VIBIA

Technical Catalogue February 2026

VIBIA

Recommended sales prices - VAT not included in this price list updates models and finishes in production, which may differ from photographs published in catalogue.





Index

Africa 328
Algorithm Grid 70
Algorithm Free 80
Alpha 500
Array 130
Balance 304
Bamboo 282
Bigger 240
Bind 430
Bind Solo 448
Break 250
Break Plus 252
Brisa 266
Circle 190
Circus 10
Circus Solo 28
Class 184
Cosmos 174
Dama 186
Dots 268
Dots Glass 272
Dots Outdoor 274
Duo 286
Duo Petra 290
Empty 254
Flamingo 96
Flamingo Mini 100
Flat 360
Funnel 142
Ghost 300
Guise 152
Halo 158
Halo Jewel 168
I.Cono 68
Jazz 94
June 280
Knit 490
Kontorno 424
Lily 344
Line 200
Match 502
Mayfair 320
Mayfair Mini 318
Meridiano 278
Musa 488
North 332
Offset 112
Origami 260
Out 256
Palma 232
Palo Alto 264
Pin 104
Plusminus 388
Plusminus Solo 416
Puck 306
Puck Wall Art 310
Rhythm Horizontal 144
Rhythm Vertical 149
Set 498
Skan 40
Slim 84
Spa 372
Sticks 466
Sticks Solo 478
Structural 178
Suite 378
Tempo 348
Top 92
Tube Free 382
Up 258
Warm 296
Wind 246
Wireflow 48
Wireflow Chandelier 64
Wireflow Free 58
Wireflow Lineal 54

Item coding 8
Light source 505
Glossary 506
Lighting control systems 507

Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

Reference

1160 10 / 1A _ 18

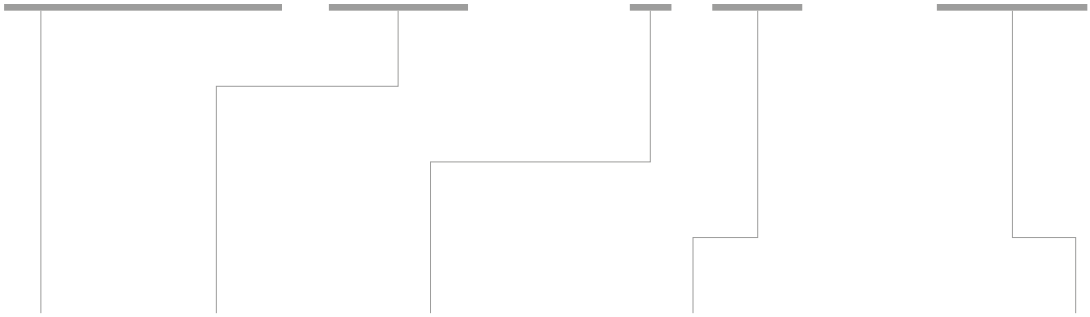

Model	Finish	LED Colour Temperature	Control	Electrical connection	
4 digits	2 digits	1 digit	1 digit	2 digits	
				Type	Model
		0 Without LED	**0** On/ Off	**1** Surface	**0** Basic
		1 2700 K	**1** DALI-2	**2** Built-in	**1** Micro
		2 3000 K	**2** 0-10V	**3** Remote	**2** XXS
		3 3500 K	**3** 1-10V	**4** Bolt-down	**3** XS
		4 4000 K	**4** TRIAC	**T** Track	**4** S
		7 2200 K	**5** Push		**5** M
		8 Tunable White	**6** Sensor		**6** L
		9 Tunable Red	**7** Lutron		**8** Free Wire
		A Infinite Colour (TW + RGB)	**8** Push 2		**9** Mud kit
		F Dim-To-Warm	**A** Push; 1-10V; DALI-2		**A** Trim
			B Push; 1-10V		**B** Trimless
			C 1-10V; DALI-2		**X** Track Surface
			D Push; DALI-2		**Z** Track Trimless
			E Casambi PTP; On/ Off		
			F Simultaneous line Push 1-10V; DALI-2; Casambi		
			G DALI; Casambi; ProtoPixel		
			H On/ Off; DALI-2; Casambi		
			M Without driver		
			W Wiz		
			Y ProtoPixel		
			Z Casambi *		

* Casambi refers to wireless dimming solutions. Ask for more information.

Should you need a non-standard product.
Please, request sales conditions.

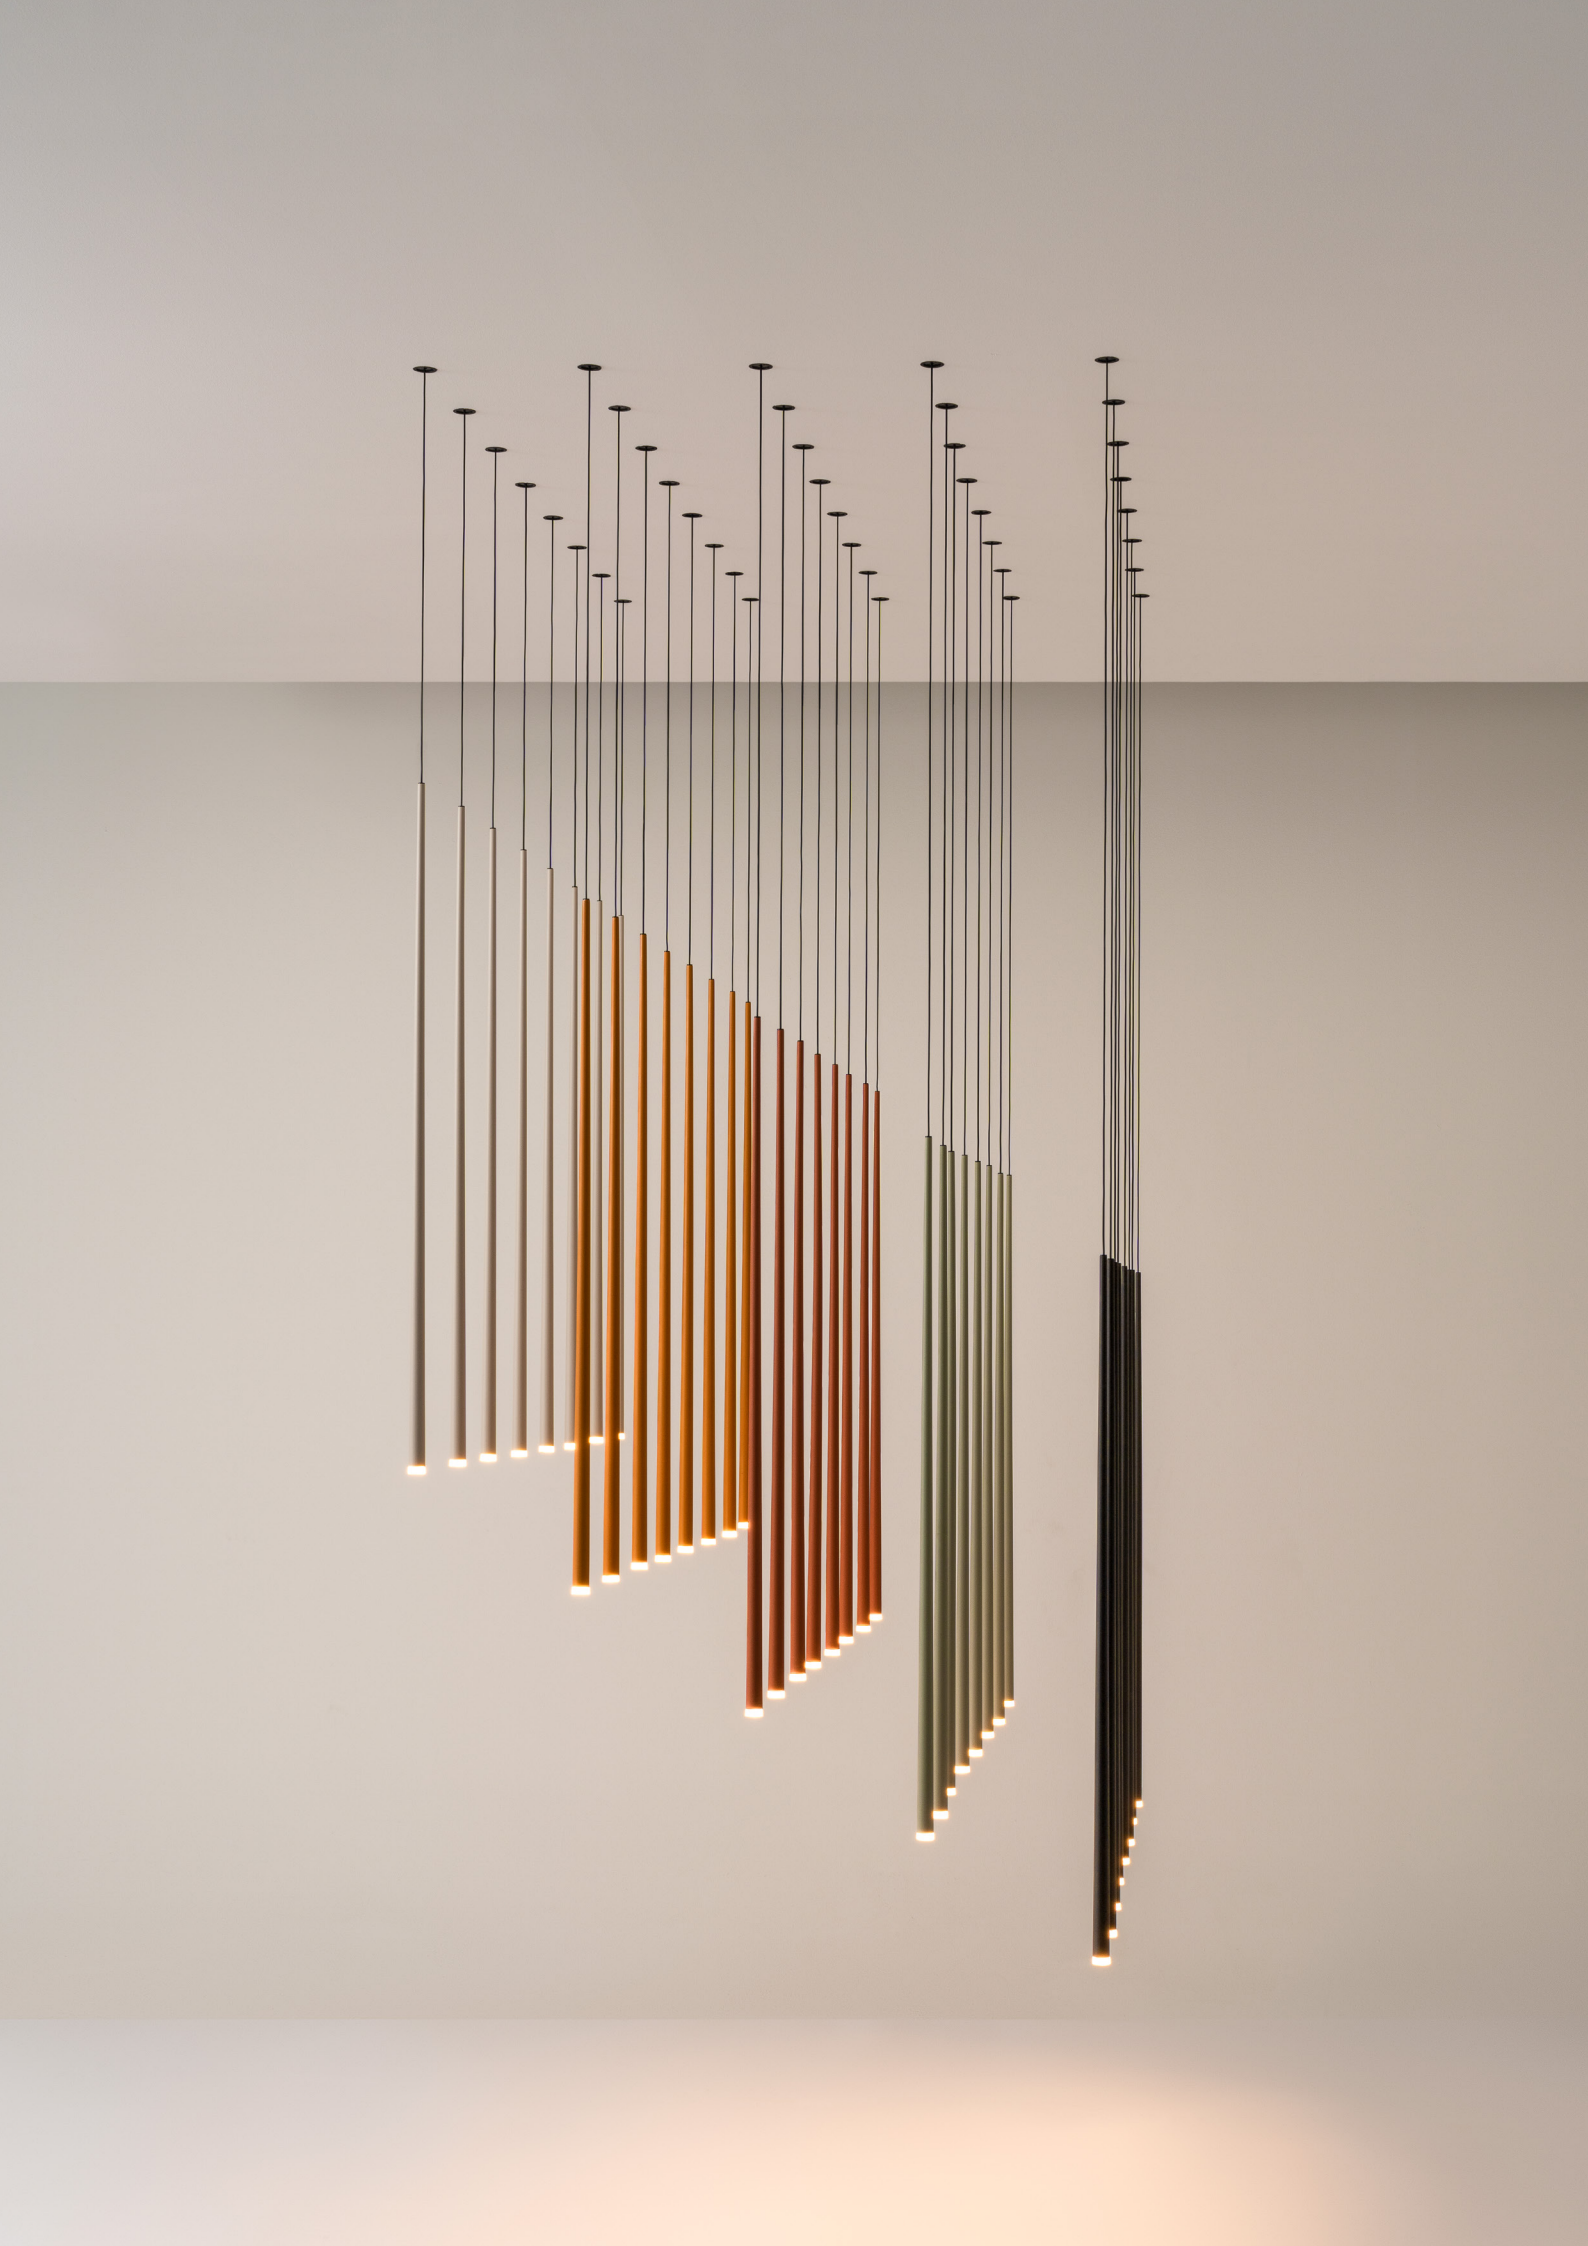

Circus

Design by Antoni Arola

Circus is defined by its minimalist structure and signature conductive bar, delicately balanced by opposing elements to create a festival of light. A creative toolkit full of possibilities to explore and enjoy that offers total freedom of composition, multiple components and a myriad of diffuse and accented lighting effects.

Pendant Ceiling - Volumetric Diffuser

PENDANT

DIRECT TO TRACK

0162

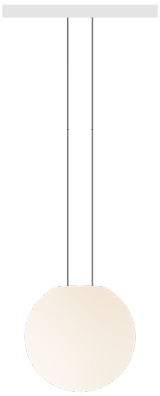

Ø 20 cm

0167

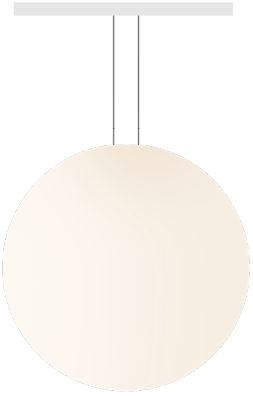

Ø 45 cm

0164

Ø 20 cm

0162



Ø 20 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 759 lm
F
/2 _ 3000 K - 794 lm
/3 _ 3500 K - 822 lm
E

Tunable White
/8 _ (1800 K - 4000 K) 452 lm - 709 lm

Tunable Red
/9 _ (Red - 2700 K) 172 lm - 468 lm
F

CRI >90

Control

0162 _ _ **/** _ _

_ _ **/** _ **1**	Static White + DALI-2 (P2P)
_ _ **/** _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)
_ _ **/ 9Z**	Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene.
Top cover: Aluminum. Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA
Tunable White:
1 x LED 6,7 W 385 mA
Tunable Red:
1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,16 Kg Net weight 0,53 Kg

Notes

Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0164



Ø 20 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 759 lm
F
/2 _ 3000 K - 794 lm
/3 _ 3500 K - 822 lm
E

Tunable White
/8 _ (1800 K - 4 000 K)
452 lm - 709 lm

Tunable Red
/9 _ (Red - 2700 K)
172 lm - 468 lm
F

CRI >90

Control

0164 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene. Top cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA
Tunable White:
1 x LED 6,7 W 385 mA
Tunable Red:
1 x LED PLATE 7,7 W 400 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,16 Kg Net weight 0,53 Kg

LED IP20

0167



Ø 45 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2588 lm
/2 _ 3000 K - 2706 lm
/3 _ 3500 K - 2804 lm

Tunable White
/8 _ (1800 K - 4000 K)
1403 lm - 2615 lm
E

Tunable Red
/9 _ (Red - 2700 K)
339 lm - 1582 lm
F

CRI >90

Control

0167 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Track adapter: PC- Polycarbonate .

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 19,6 W 600 mA
Casambi:
1 x LED 15,7 W 485 mA
Tunable White:
1 x LED 17,7 W 525 mA
Tunable Red:
1 x LED PLATE 15,7 W 500 mA

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,1966 m³
Gross weight 4,6 Kg Net weight 2,35 Kg

Notes

Static White + Casambi -18% Flux.
Extra cable length.

LED IP20

Pendant Ceiling - Hidden Diffuser

PENDANT

0155

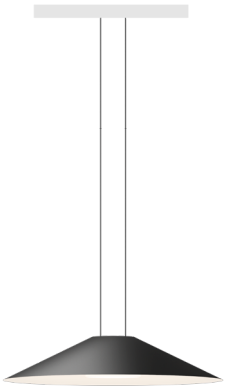

Ø 40 cm

DIRECT TO TRACK

0157



Ø 40 cm

0155

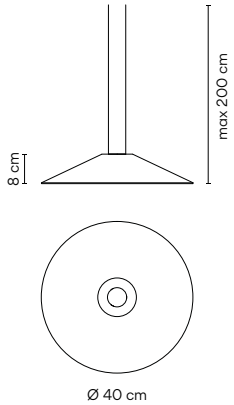

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1763 lm
/2 _ 3000 K - 1843 lm
E
/3 _ 3500 K - 1910 lm
D

Tunable White
/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm
D

Tunable Red
/9 _ (Red - 2700 K)
339,6 lm - 1582 lm
F

CRI >90

Control

0155 _ _ **/** _ _

_ _ / _ 1	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate.
Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 12,8 W 400 mA
Tunable White:
1 x LED 16,8 W 500 mA
Tunable Red:
1 x LED PLATE 15,7 W 500 mA

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m³
Gross weight 2,5 Kg Net weight 0,92 Kg

Notes

Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



0157



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1763 lm
/2 _ 3000 K - 1843 lm
E
/3 _ 3500 K - 1910 lm
D

Tunable White
/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm
D

Tunable Red
/9 _ (Red - 2700 K)
339,6 lm - 1582 lm
F

CRI >90

Control

0157 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Shade: Aluminum. Top cover: PC- Polycarbonate.
Diffuser: PC- Polycarbonate.
Track adapter: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 12,8 W 400 mA
Tunable White:
1 x LED 16,8 W 500 mA
Tunable Red:
1 x LED 15,7 W 500 mA

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m^3
Gross weight 2,5 Kg Net weight 0,92 Kg

LED IP20

Pendant Ceiling - Accent Spotlight

PENDANT

0140 Narrow
0141 Medium
0142 Wide

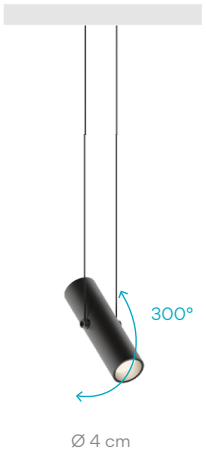

Ø 4 cm

SPOTS

Only in pendant tracks

0130 Narrow
0131 Medium
0132 Wide



Ø 4 cm

SIDE-SPOTS

Only in ceiling tracks

0135 Narrow
0136 Medium
0137 Wide



Ø 4 cm

0140
Narrow
0141
Medium
0142
Wide



0140 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control

0140 _ _ **/** _ _

_ _ / _ 1 Static White + DALI-2 (P2P)
_ _ / _ **Z** Static White + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m^3
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0141 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

Tunable Red
/F _ (Red - 2700 K)
147 lm - 535 lm

G

CRI >90

Control

0141 _ _ **/** _ _

_ _ / _ 1	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)
_ _ **/ 9Z**	Tunable Red + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7 W 460 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

Extra cable length.

LED IP20

0142 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0142 _ _ **/** _ _

_ _ / _ 1	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)

Materials

Body: Zinc Alloy. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,89 Kg Net weight 0,59 Kg

Notes

Extra cable length.

LED IP20

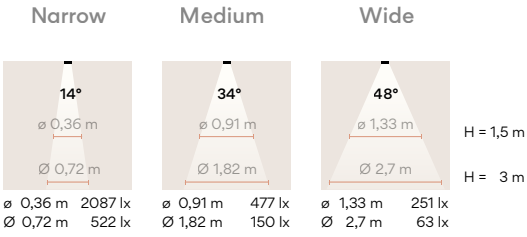

Narrow		Medium		Wide	
ø 0,36 m	2087 lx	ø 0,91 m	477 lx	ø 1,33 m	251 lx
Ø 0,72 m	522 lx	Ø 1,82 m	150 lx	Ø 2,7 m	63 lx

0130
Narrow
0131
Medium
0132
Wide

0130 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control
0130 _ _ **/** _ _

_ _ / _ 1 Static White + DALI-2 (P2P)
_ _ / _ **Z** Static White + Casambi (P2P)



Materials
Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics
1 x LED 7,2 W 400 mA

Packaging
1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

LED IP20



0131 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
G

CRI >90

Control

0131 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

LED IP20

0132 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

CRI >90

Control

0132 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

LED IP20

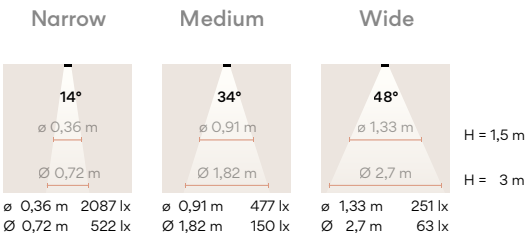

0135
Narrow
0136
Medium
0137
Wide



0135 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
F
CRI >90

Control
0135 _ _ **/** _ _
- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ **/ _ Z** Static White + Casambi (P2P)

Materials
Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics
1 x LED 7,2 W 400 mA

Packaging
1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

LED IP20

0136 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
G
CRI >90

Control
0136 _ _ **/** _ _
- _ _ / _ 1 Static White + DALI-2 (P2P)
- _ _ **/ _ Z** Static White + Casambi (P2P)
- _ _ **/ 8Z** Tunable White + Casambi (P2P)
- _ _ **/ 9Z** Tunable Red + Casambi (P2P)

Materials
Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED 7 W 460mA

Packaging
1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0137 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0137 _ _ **/** _ _

_ _ / _ **1** Static White + DALI-2 (P2P)
_ _ / _ **Z** Static White + Casambi (P2P)

_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,44 Kg Net weight 0,14 Kg

LED IP20

Narrow		Medium		Wide	
14°		34°		48°	
ø 0,36 m	2087 lx	ø 0,91 m	477 lx	ø 1,33 m	251 lx
Ø 0,72 m	522 lx	Ø 1,82 m	150 lx	Ø 2,7 m	63 lx

H = 1,5 m
H = 3 m

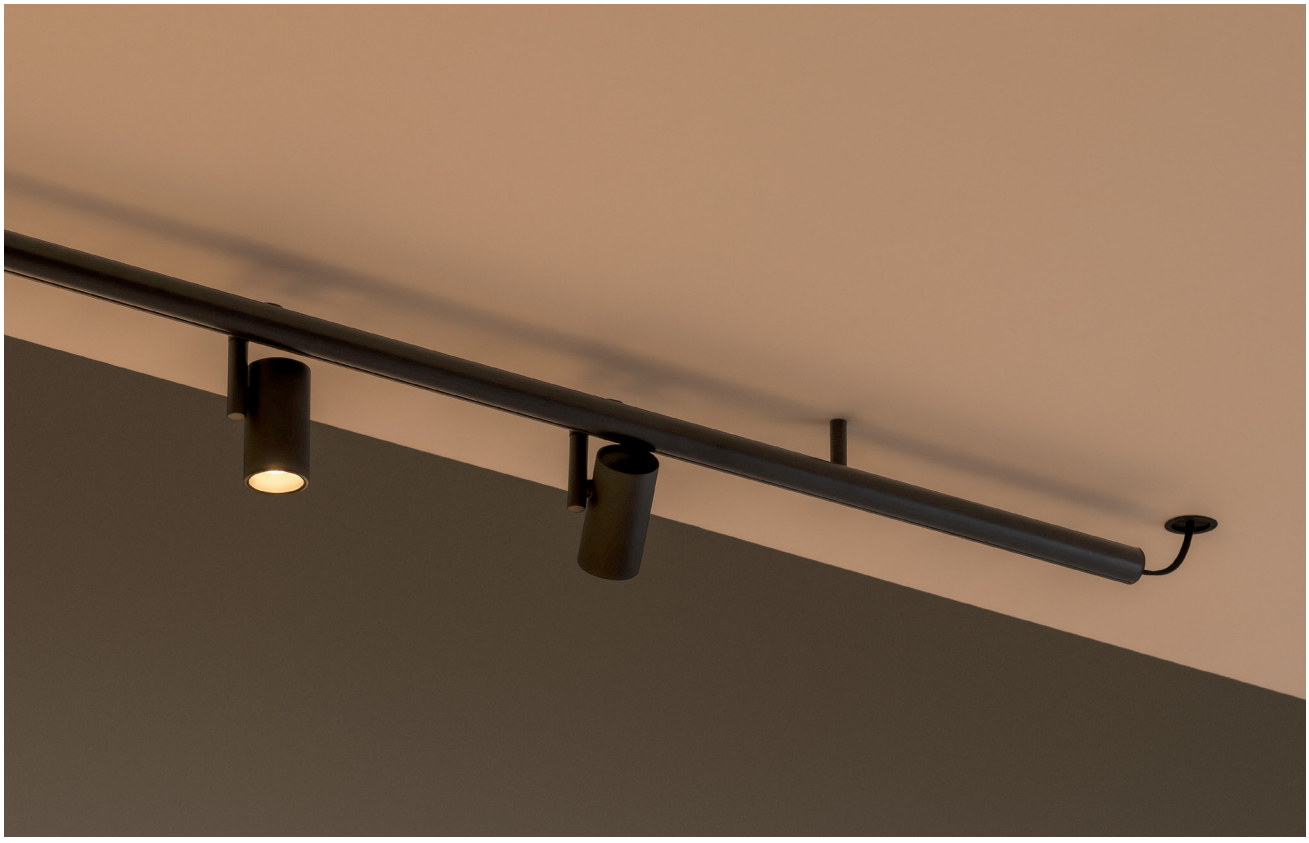

Pendant Ceiling - Accent Downlight

0151 Narrow
0152 Medium
0153 Wide



Ø 4 cm

0151
Narrow
0152
Medium
0153
Wide

0151 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

F

CRI >90

Control

0151 _ _ **/** _ _

_ _ / _ 1 Static White + DALI-2 (P2P)
_ _ / _ **Z** Static White + Casambi (P2P)



Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

1 x LED 7,2 W 400 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m^3
Gross weight 0,41 Kg Net weight 0,11 Kg

LED IP20

0152 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
G

CRI >90

Control

0152 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)
_ _ / **9Z**	Tunable Red + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA
Tunable Red:
1 x LED PLATE 7 W 460mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

LED IP20

0153 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

CRI >90

Control

0153 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2 (P2P)
_ _ / _ **Z**	Static White + Casambi (P2P)
_ _ / **8Z**	Tunable White + Casambi (P2P)

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Track adapter: PC- Polycarbonate. Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Tunable White:
1 x LED 5,5 W 150 mA

Packaging

1 Box 0,15 x 0,15 x 0,075 m
Vol 0,0017 m³
Gross weight 0,41 Kg Net weight 0,11 Kg

LED IP20

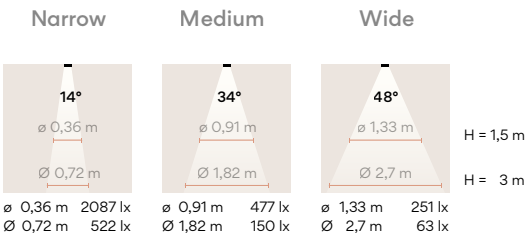

Pendant Ceiling - Light Reflector

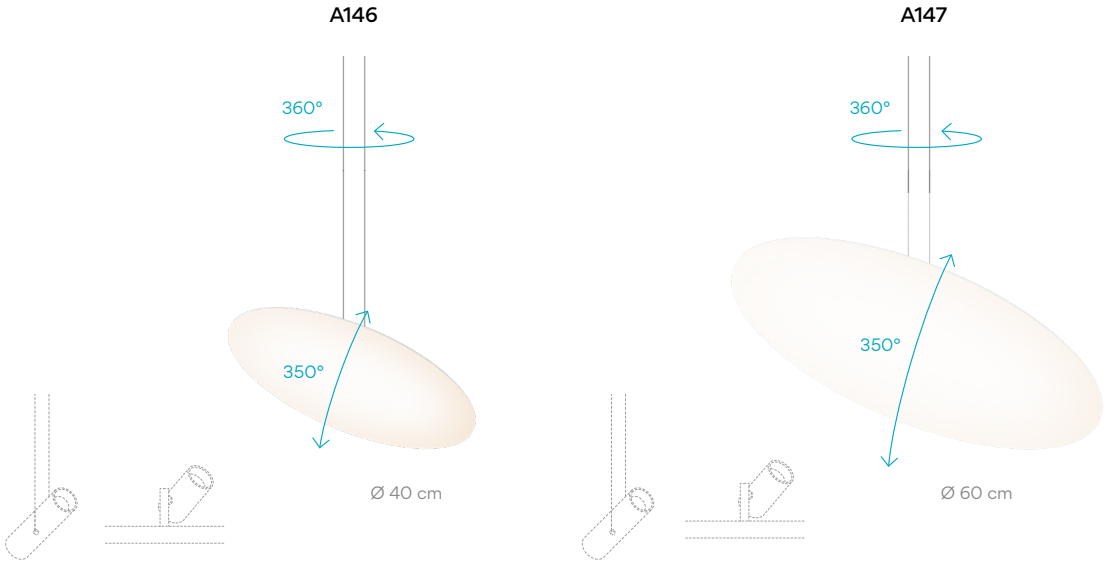

A146



Finishes

● **11/ _ _** Black
(NCS S 8500-N)

Materials

Body: Aluminum.

Control

A146 11 / 0M

Packaging

1 Box 0,48 x 0,48 x 0,12 m
Vol 0,00276 m³
Gross weight 1,5 Kg
Net weight 0,74 Kg

A147



Finishes

● **11/ _ _** Black
(NCS S 8500-N)

Materials

Body: Aluminum.

Control

A147 11 / 0M

Packaging

1 Box 0,68 x 0,68 x 0,12 m
Vol 0,00555 m³
Gross weight 2,5 Kg
Net weight 1,56 Kg

Product specifications subject to change without notice. Please check vibia.com for updated information.

Select your model at **vibia.com** and adjust

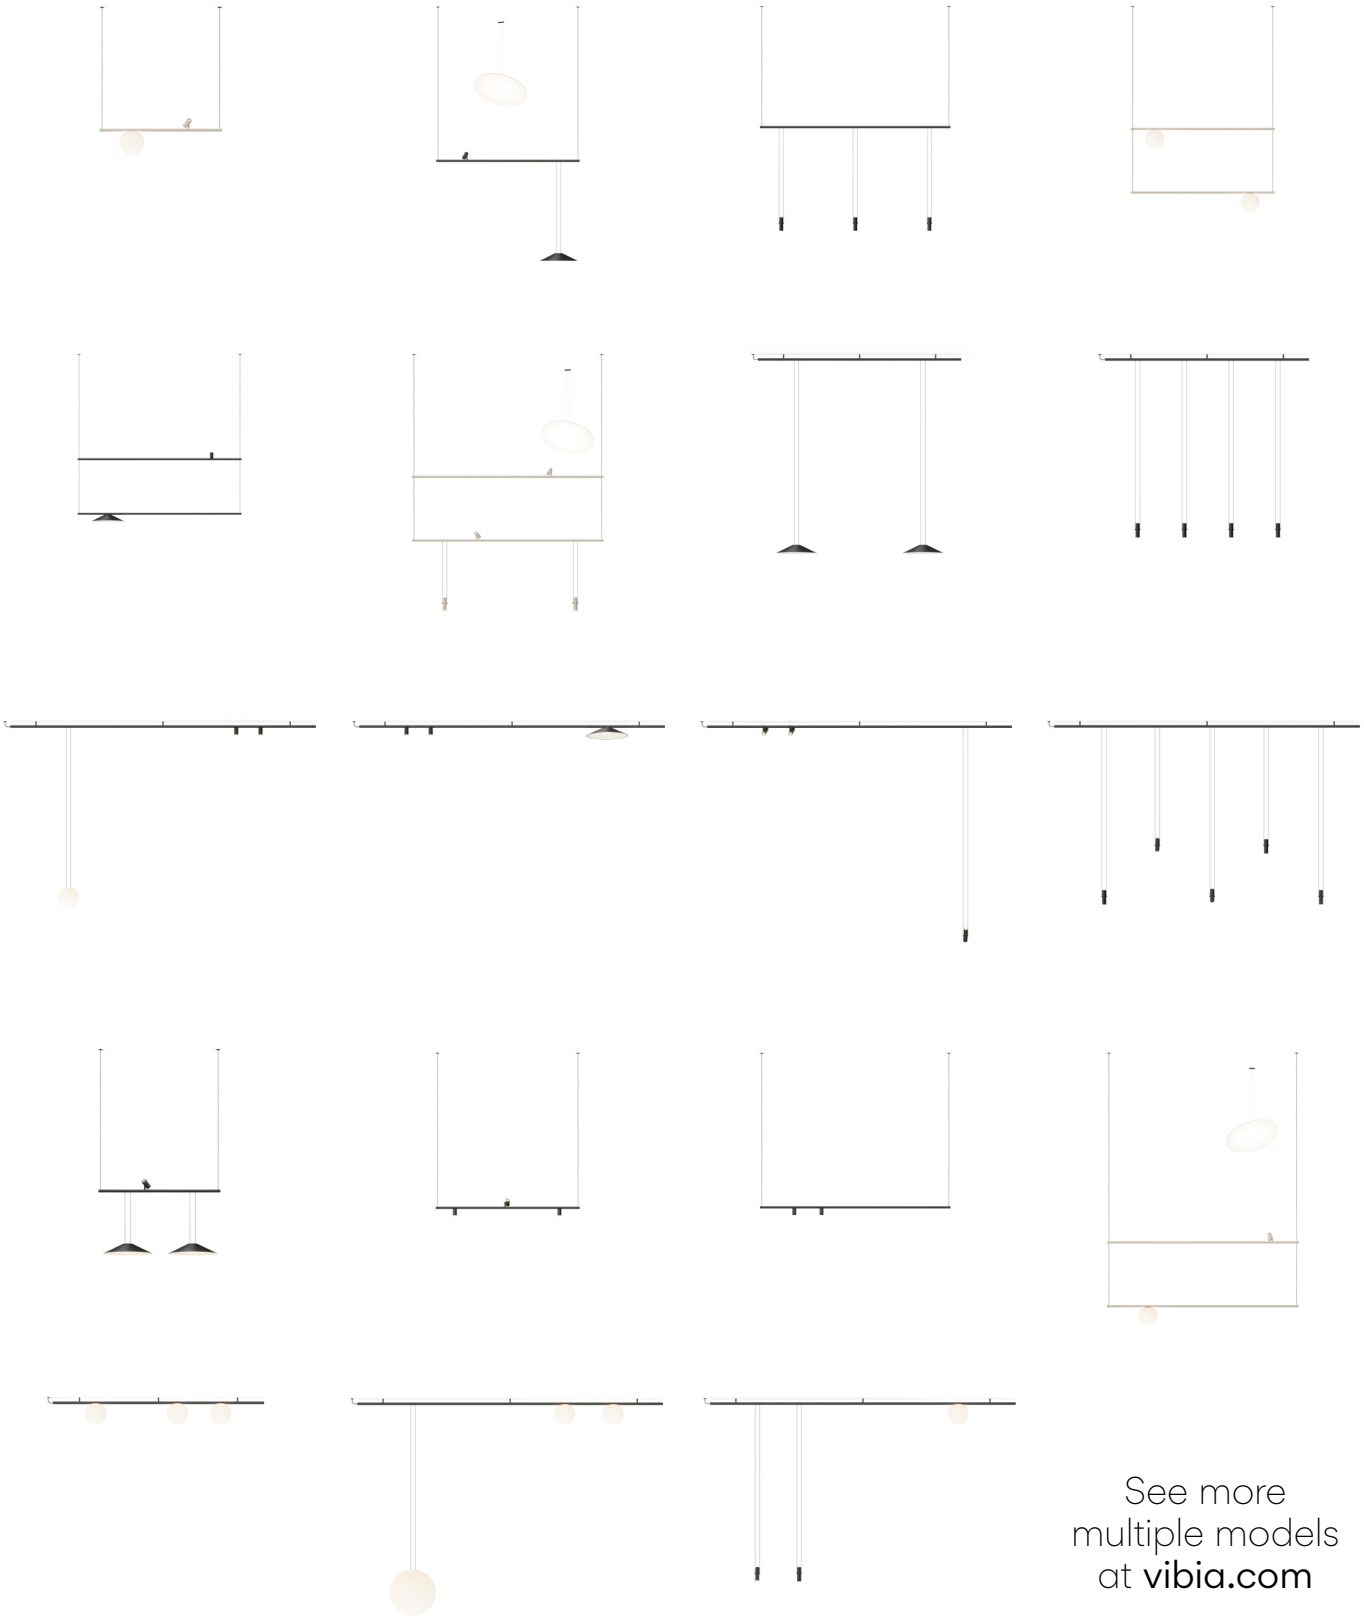

See more
multiple models
at **vibia.com**

Tracks

Ceiling Tracks

A352 210 cm



A355 300 cm



Ceiling Tracks 210 cm

A352 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Ceiling Tracks 300 cm

A355 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Surface Materials

Track: Aluminum. Top cover: PVC.

IP20

Packaging A352

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m^3
Gross weight 3,87 Kg
Net weight 1,62 Kg

Packaging A355

1 Box
0,125 x 0,125 x 3,25 m
Vol 0,0508 m^3
Gross weight 5,42 Kg
Net weight 2,17 Kg

Accessories included with the Ceiling tracks



Built-in



Remote

Select Eletrical connection



Surface
Ø 6,5 cm
33 x 6 cm



Built-in XS
25 x 3 x 2 cm



Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Product specifications subject to change without notice. Please check vibia.com for updated information.

Pendant Single Tracks

A358 (H 3m)
A359 (H 9m)

110 cm



A364 (H 3m)
A365 (H 9m)

150 cm



A370 (H 3m)
A371 (H 9m)

200 cm



Height 3 m 110 cm

A358 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 3 m 150 cm

A364 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 3 m 200 cm

A370 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 9 m 110 cm

A359 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 9 m 150 cm

A365 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Height 9 m 200 cm

A371 _ _ / 0M _ _ _

_ _ / 0M _ **10**
_ _ / 0M _ **23**
_ _ / 0M _ **31**

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Top cover: PVC.
Ceiling supports: PC- Polycarbonate.

IP20

Packaging A358 - A359

1 Box
0,125 x 0,125 x 1,25 m
Vol 0,0195 m3
Gross weigth 2,34 kg
Net weight 1,09 kg

Packaging A364 - A365

1 Box
0,125 x 0,125x 1,6 m
Vol 0,025 m^3
Gross weight 2,94 Kg
Net weight 1,34 Kg

Packaging A370 - A371

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m^3
Gross weight 3,89 Kg
Net weight 1,64 Kg

Accessories included with the Ceiling tracks


Surface


Built-in


Remote

Select Eletrical connection


Surface
Ø 6,5 cm
33 x 6 cm


Built-in XS
25 x 3 x 2 cm


Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Counterweight

Only for pendant track.
1 counterweight required for 3 or 4 spots and 2 counterweights required for 5 spots.

A160 _ _ / 0M

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Pendant Double Tracks

A376 (H 3m)
A377 (H 9m)

110 cm

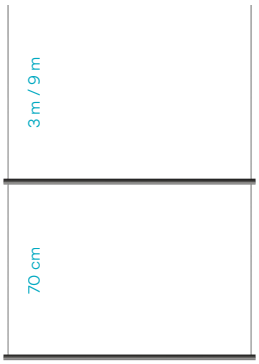

A382 (H 3m)
A383 (H 9m)

150 cm



A388 (H 3m)
A389 (H 9m)

200 cm



Height 3 m 110 cm

A376 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 3 m 150 cm

A382 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 3 m 200 cm

A388 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 9 m 110 cm

A377 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 9 m 150 cm

A383 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Height 9 m 200 cm

A389 _ _ / 0M _ _ _

_ _ / 0M _ 10
_ _ / 0M _ 23
_ _ / 0M _ 31

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Top cover: PVC.
Ceiling supports: PC- Polycarbonate.

IP20

Packaging A376 - A377

1 Box
0,125 x 0,125 x 1,25 m
Vol 0,0195 m³
Gross weight 3,34 Kg
Net weight 1,99 Kg

Packaging A382 - A383

1 Box
0,125 x 0,125 x 1,6 m
Vol 0,025 m³
Gross weight 4,09 Kg
Net weight 2,49 Kg

Packaging A388 - A389

1 Box
0,125 x 0,125 x 2,25 m
Vol 0,0351 m³
Gross weight 5,49 Kg
Net weight 3,09 Kg

Accessories included with the Ceiling tracks


Surface


Built-in


Remote

Select Eletrical connection


Surface
Ø 6,5 cm
33 x 6 cm


Built-in XS
25 x 3 x 2 cm


Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Counterweight

Only for pendant track.
1 counterweight required for 3 or 4 spots
and 2 counterweights required for 5 spots.

A160 _ _ / 0M

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Product specifications subject to change without notice. Please check vibia.com for updated information.

Electrical connection options

Driver for pendant

Control

A394 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	30W + DALI-2 (P2P), Casambi (P2P), + Surface
80 / 0G _ 23	30W + DALI-2 (P2P), Casambi (P2P), + Built-in XS
80 / 0G _ 31	30W + DALI-2 (P2P), Casambi (P2P), + Remote Micro
_ _ / 0Z _ **10**	30W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	30W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	30W + Casambi Simultaneous line + Remote Micro

A395 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	48W + DALI-2 (P2P), Casambi (P2P), + Surface
80 / 0G _ 23	48W + DALI-2 (P2P), Casambi (P2P), + Built-in XS
80 / 0G _ 31	48W + DALI-2 (P2P), Casambi (P2P), + Remote Micro
_ _ / 0Z _ **10**	48W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	48W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	48W + Casambi Simultaneous line + Remote Micro

A396 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	84W + DALI-2 (P2P), Casambi (P2P), + Surface
80 / 0G _ 23	84W + DALI-2 (P2P), Casambi (P2P), + Built-in XS
80 / 0G _ 31	84W + DALI-2 (P2P), Casambi (P2P), + Remote Micro
_ _ / 0Z _ **10**	84W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	84W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	84W + Casambi Simultaneous line + Remote Micro

Driver for ceiling

Control

A397 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	30W + DALI-2 (P2P), Casambi (P2P), + Surface
80 / 0G _ 23	30W + DALI-2 (P2P), Casambi (P2P), + Built-in XS
80 / 0G _ 31	30W + DALI-2 (P2P), Casambi (P2P), + Remote Micro
_ _ / 0Z _ **10**	30W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	30W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	30W + Casambi Simultaneous line + Remote Micro

A398 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	48W + DALI-2 (P2P), Casambi (P2P), + Surface
80 / 0G _ 23	48W + DALI-2 (P2P), Casambi (P2P), + Built-in XS
80 / 0G _ 31	48W + DALI-2 (P2P), Casambi (P2P), + Remote Micro
_ _ / 0Z _ **10**	48W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	48W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	48W + Casambi Simultaneous line + Remote Micro

A399 _ _ / _ _ _ _ _

_ _ / 0G _ **10**	84W + DALI-2 (P2P), Casambi (P2P), + Surface
80 / 0G _ 23	84W + DALI-2 (P2P), Casambi (P2P), + Built-in XS
80 / 0G _ 31	84W + DALI-2 (P2P), Casambi (P2P), + Remote Micro
_ _ / 0Z _ **10**	84W + Casambi Simultaneous line + Surface
80 / 0Z _ 23	84W + Casambi Simultaneous line + Built-in XS
80 / 0Z _ 31	84W + Casambi Simultaneous line + Remote Micro

Finishes

● **11/ 0** _ Black (NCS S 8500-N)

● **24/ 0** _ Beige M1 (NCS S 2005-Y50R)

80/ 0 _ Without finish for Built-in and Remote.

Materiales

Aluminum + PC-Polycarbonate.
(Surface version only)

IP20

Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz

Casambi Simultaneous line Bi-volt

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0044 m³
Gross weight 0,95 Kg Net weight 0,53 Kg

Included tracks electrical connections



Pendant
Built-in



Ceiling Pendant
Remote
9 m electrical cable included

Select Eletrical connection



Ceiling
Surface
Ø 6,5 cm
33 x 6 cm



Pendant
Surface
Ø 6,5 cm
33 x 6 cm



Ceiling Pendant
Built-in XS
25 x 3 x 2 cm



Ceiling Pendant
Remote Micro
25 x 3 x 2 cm

_10 Surface
_23 Built-in XS
_31 Remote Micro

Circus Solo

Design by Antoni Arola

The Circus system incorporates a range of independent elements that can be surface mounted to the ceiling, including spots, downlights and general lighting fixtures. This line allows professionals to create harmonic compositions and subtle atmospheres that break with the standards.

Pendant - Volumetric Diffuser

SURFACE BUILT-IN

0185



Ø 20 cm

0187

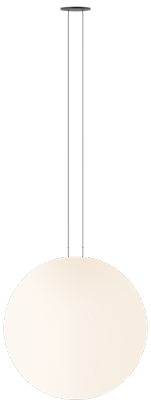

Ø 45 cm

SURFACE BUILT-IN REMOTE

0193

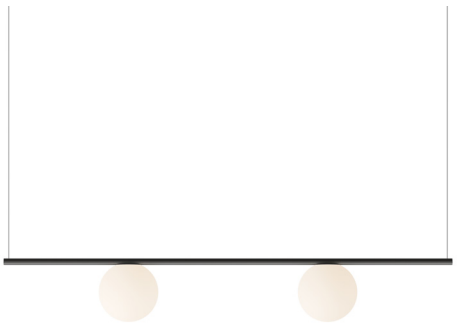

Ø 20 cm

150 cm

0185



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 759 lm
F
/2 _ 3000 K - 794 lm
/3 _ 3500 K - 822 lm
E

Tunable White

/8 _ (1800 K - 4000 K)
452 lm - 709 lm

Tunable Red

/9 _ (Red - 2700 K)
172 lm - 468 lm
F

CRI >90

Control

0185 _ _ / _ _

_ _ / _ **D**	Static White + Push, DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **8Z**	Tunable White + Casambi
_ _ / **9Z**	Tunable Red + Casambi

Select Eletrical connection



Surface



Built-in XS

_10 Surface
_23 Built-in XS

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,7 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 6,7 W 385 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7,7 W 400 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,32 x 0,32 x 0,5 m
Vol 0,0512 m^3
Gross weight 1,96 Kg Net weight 1,03 Kg

Notes

0185 _ _ / _ 8Z: Tunable White + Casambi Multi-volt
0185 _ _ / _ 9Z: Tunable Red + Casambi Multi-volt
Extra cable length.

Surface

LED IP20

Built-in

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant



0187

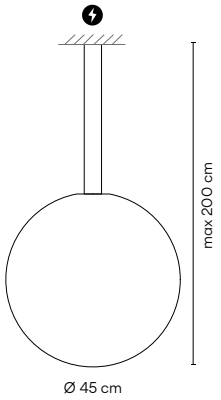

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2588 lm
/2 _ 3000 K - 2706 lm
/3 _ 3500 K - 2804 lm

Tunable White
/8 _ (1800 K - 4000 K) 1403 lm - 2615 lm
E

Tunable Red
/9 _ (Red - 2700 K) 339 lm - 1582 lm
F

CRI >90

Control

0187 _ _ / _ _

- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / **8Z** Tunable White + Casambi
- _ _ / **9Z** Tunable Red + Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials

Sphere: PE- Polyethylene. Top cover: Aluminum.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K- 3500K:
1 x LED 19,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Tunable White:
1 x LED 17,7 W 525 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 15,7 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,1966 m³
Gross weight 5,1 Kg Net weight 2,85 Kg

Notes

0187 _ _ / _ 8Z: Tunable White + Casambi Multi-volt
0187 _ _ / _ 9Z: Tunable Red + Casambi Multi-volt
Extra cable length.

Surface

LED IP20 CE UK CA EAC

Built-in

LED IP20 CE UK CA EAC

0193



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1518 lm
F

/2 _ 3000 K - 1588 lm
/3 _ 3500 K - 1644 lm
E

CRI >90

Control

0193 _ _ / _ _

- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **Z** Static White + Casambi

Select Eletrical connection



Surface Built-in XS Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Sphere: PE- Polyethylene.
Top cover: Aluminum. Structure: Aluminum.
Canopy (Surface): Aluminum + Polycarbonate.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2 x LED 6,7 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 1,82 x 0,30 x 0,30 m
Vol 0,164 m³
Gross weight 3,5 Kg Net weight 2,22 Kg

Notes

Extra cable length.

LED IP20 CE UK CA EAC

Pendant - Hidden Diffuser (Screened)

SURFACE BUILT-IN

0182



Ø 40 cm

SURFACE BUILT-IN REMOTE

0196



Ø 40 cm

150 cm

0182

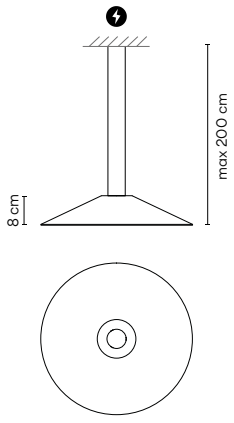

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1763 lm
/2 _ 3000 K - 1843 lm
E
/3 _ 3500 K - 1910 lm
D

Tunable White
/8 _ (1800 K - 4000 K)
1340 lm - 2501 lm
D

Tunable Red
/9 _ (Red - 2700 K)
339,6 lm - 1582 lm
F

CRI >90

Control

0182 _ _ / _ _

_ _ / _ **D**	Static White + Push, DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **8Z**	Tunable White + Casambi
_ _ / **9Z**	Tunable Red + Casambi

Select Eletrical connection



Surface



Built-in XS

_10 Surface
_23 Built-in XS

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate .

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,8 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 16,8 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 15,7 W 500 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,480 x 0,480 x 0,115 m
Vol 0,0265 m^3
Gross weight 3 Kg Net weight 1,42 Kg

Notes

0182 _ _ / _ 8Z: Tunable White + Casambi Multi-volt
0182 _ _ / _ 9Z: Tunable Red + Casambi Multi-volt
Extra cable length.

Surface

LED IP20

Built-in XS

LED IP20

0196



Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3104 lm
/2 _ 3000 K - 3244 lm
E

/3 _ 3500 K - 3362 lm
D

CRI >90

Control

0196 _ _ / _ _

_ _ / _ **D** Static White + Push, DALI-2

_ _ / _ **Z** Static White + Casambi

Select Eletrical connection


Surface


Built-in XS


Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Shade: Aluminum. Top cover: Aluminum.
Diffuser: PC- Polycarbonate. Structure: Aluminum.
Canopy (Surface): Aluminum + Polycarbonate.
Canopy (Built-in): ABS + PC- Polycarbonate

Light Source and electronics

2 x LED 11,1 W 350 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 1,60 x 0,48 x 0,13 m
Vol 0,100 m^3
Gross weight 5,60 Kg Net weight 3,10 Kg

Notes

Extra cable length.

LED IP20



Product specifications subject to change without notice. Please check vibia.com for updated information.

Pendant - Accent Spotlight

SURFACE BUILT-IN

0176 Narrow
0177 Medium
0178 Wide

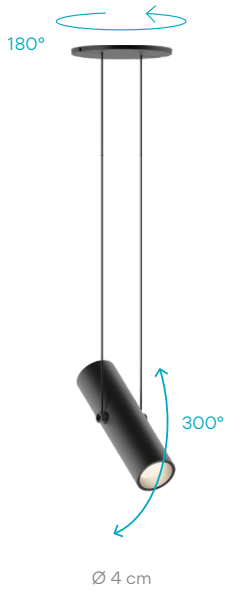

0176
Narrow
0177
Medium
0178
Wide



0176 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm
F
CRI >90

Control
0176 _ _ / _ _
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **Z** Static White + Casambi

Select Eletrical connection


Surface


Built-in XS

_10 Surface
_23 Built-in XS

Materials
Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging
1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m³
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes
Extra cable length.

Surface
LED IP20

Built-in XS
LED IP20

0177 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm

F

CRI >90

Control

0177 _ _ **/** _ _

_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **Z** Static White + Casambi
_ _ **/ 8Z** Tunable White + Casambi
_ _ **/ 9Z** Tunable Red + Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7 W 460 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m^3
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

0177 _ _ / _ 8Z: Tunable White + Casambi Multi-volt
0177 _ _ / _ 9Z: Tunable Red + Casambi Multi-volt
Extra cable length.

Surface

LED IP20

Built-in XS

LED IP20

0178 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0178 _ _ **/** _ _

_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **Z** Static White + Casambi
_ _ **/ 8Z** Tunable White + Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant

Materials

Body: Zinc Alloy.
Snoot and cover: PC- Polycarbonate.
Canopy (Surface): Aluminum.
Canopy (Built-in): ABS + PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,30 x 0,15 x 0,075 m
Vol 0,0034 m³
Gross weight 1,39 Kg Net weight 1,09 Kg

Notes

0178 _ _ / _ 8Z: Tunable White + Casambi Multi-volt
Extra cable length.

Surface

LED IP20

Built-in XS

LED IP20

Narrow	Medium	Wide	
			H = 1,5 m H = 3 m
ø 0,36 m 2087 lx Ø 0,72 m 522 lx	ø 0,91 m 477 lx Ø 1,82 m 150 lx	ø 1,33 m 251 lx Ø 2,7 m 63 lx	





Ceiling - Accent Spotlight

SPOTS (REMOTE / BUILT-IN)

0171 Narrow
0172 Medium
0173 Wide



0171
Narrow
0172
Medium
0173
Wide

BUILT-IN



REMOTE



0171 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 680 lm
- **/2** _ 3000 K - 711 lm
- **/3** _ 3500 K - 737 lm

F

CRI >90

Control
0171 _ _ **/** _ _
- _ _ **/** _ **0** On/Off
- _ _ **/** _ **D** Push, DALI-2
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi

Select Eletrical connection



Built-in XS



Remote Micro

_23 Built-in XS
_31 Remote Micro

Materials
Body: Aluminum. Snoot and cover: PC- Polycarbonate.
Ceiling Base: Aluminum. Installation frame (Built-in): POM.
Installation frame (Remote): Aluminum.

Light Source and electronics
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging
1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m^3
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.

0172 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F

Tunable Red
/9 _ (Red - 2700 K)
147 lm - 535 lm
G

CRI >90

Control

0172 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/Off
_ _ **/** _ **D**	Static White + Push, DALI-2
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 8Z**	Tunable White + Casambi
_ _ **/ 9Z**	Tunable Red + Casambi

Select Eletrical connection



Built-in XS



Remote Micro

_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Ceiling Base: Aluminum. Installation frame (Built-in): POM. Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Tunable Red:
1 x LED PLATE 7 W 460 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m^3
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

1160 | 10 | /1 | A | _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant

0173 Wide

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 680 lm
/2 _ 3000 K - 711 lm
/3 _ 3500 K - 737 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

0173 _ _ / _ _

_ _ / _ **0** Static White + + On/Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi
_ _ / **8Z** Tunable White + Casambi

Select Eletrical connection



Built-in XS



Remote Micro

_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminum. Snoot and cover: PC- Polycarbonate. Ceiling Base: Aluminum. Installation frame (Built-in): POM. Installation frame (Remote): Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Voltage 48V
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,0038 m³
Gross weight 0,71 Kg Net weight 0,41 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

Narrow	Medium	Wide	
14°	34°	48°	
ø 0,36 m	ø 0,91 m	ø 1,33 m	H = 1,5 m
Ø 0,72 m	Ø 1,82 m	Ø 2,7 m	H = 3 m
ø 0,36 m 2087 lx	ø 0,91 m 477 lx	ø 1,33 m 251 lx	
Ø 0,72 m 522 lx	Ø 1,82 m 150 lx	Ø 2,7 m 63 lx	

Light reflector- go to **page 22**

A146

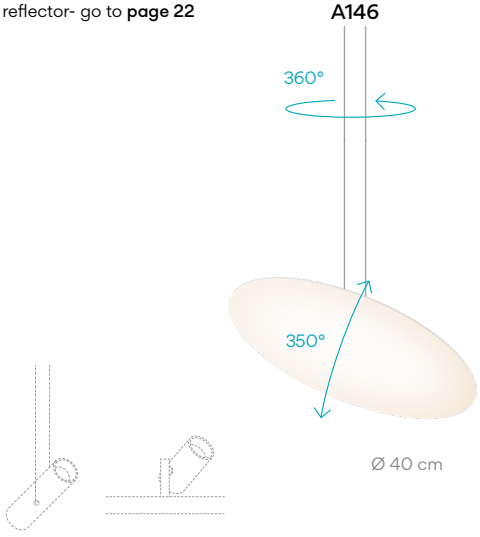

A147

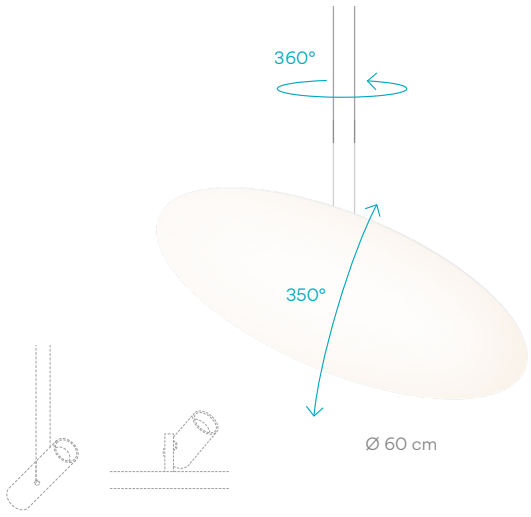

Product specifications subject to change without notice. Please check vibia.com for updated information.

Select Eletrical connection

For Ref. 0176, 0177, 0178, 0182, 0185, 0187

Drop ceiling

_23
Built-in XS



Ø 8 cm
height 8,5 cm

match with
fixture finish.

Regular ceiling

_10
Surface



Ø 6,5 cm
height 17 cm

match with
fixture finish.

For Ref. 0193, 0196

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 8,5 cm

match with
fixture finish.

Regular ceiling

_10
Surface



Ø 6,5 cm
Length 33 cm

match with
fixture finish.

For Ref. 0171, 0172, 0173

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster
ceilings.
Black finish.

_23
Built-in XS



Ø 8,3 cm
height 8,5 cm

match with
fixture finish.

Remote



Built-in



Skan

Design by Lievore, Altherr, Molina

Skan is a sleek and unadorned fixture. It combines lean lines with soothing purity of form, adding a minimalist sensibility to any space.

1160 | 10 | /1 | A
Model
Finish
LED Colour Temperature
Control

Floor

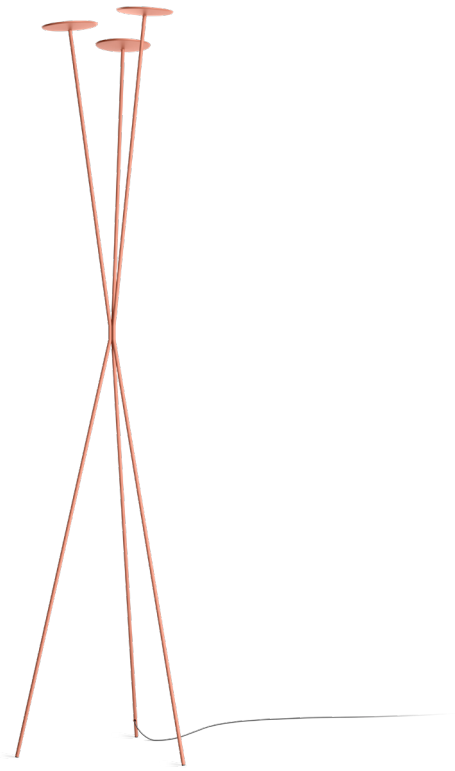

0260

43 x 37,5 x 198 cm

0260



Finishes

10/ _ _ White
(NCS S 0300-N)

11/ _ _ Black
(NCS S 8500-N)

37/ _ _ Terra Red
(NCS S4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 4430,16 lm
C

/2 _ 3000 K - 3792,73 lm
E

/3 _ 3500 K - 4799,9 lm
D

CRI >90

Control

0260 _ _ / _ **5** Push

Materials

Head: Aluminum. Diffuser: PMMA.
Vertical tube: Steel.

Light Source and electronics

3 x LED 9,2 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 2,11 x 0,60 x 0,60 m
Vol 0,7596 m^3
Gross weight 5,4 Kg Net weight 2,5 Kg

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

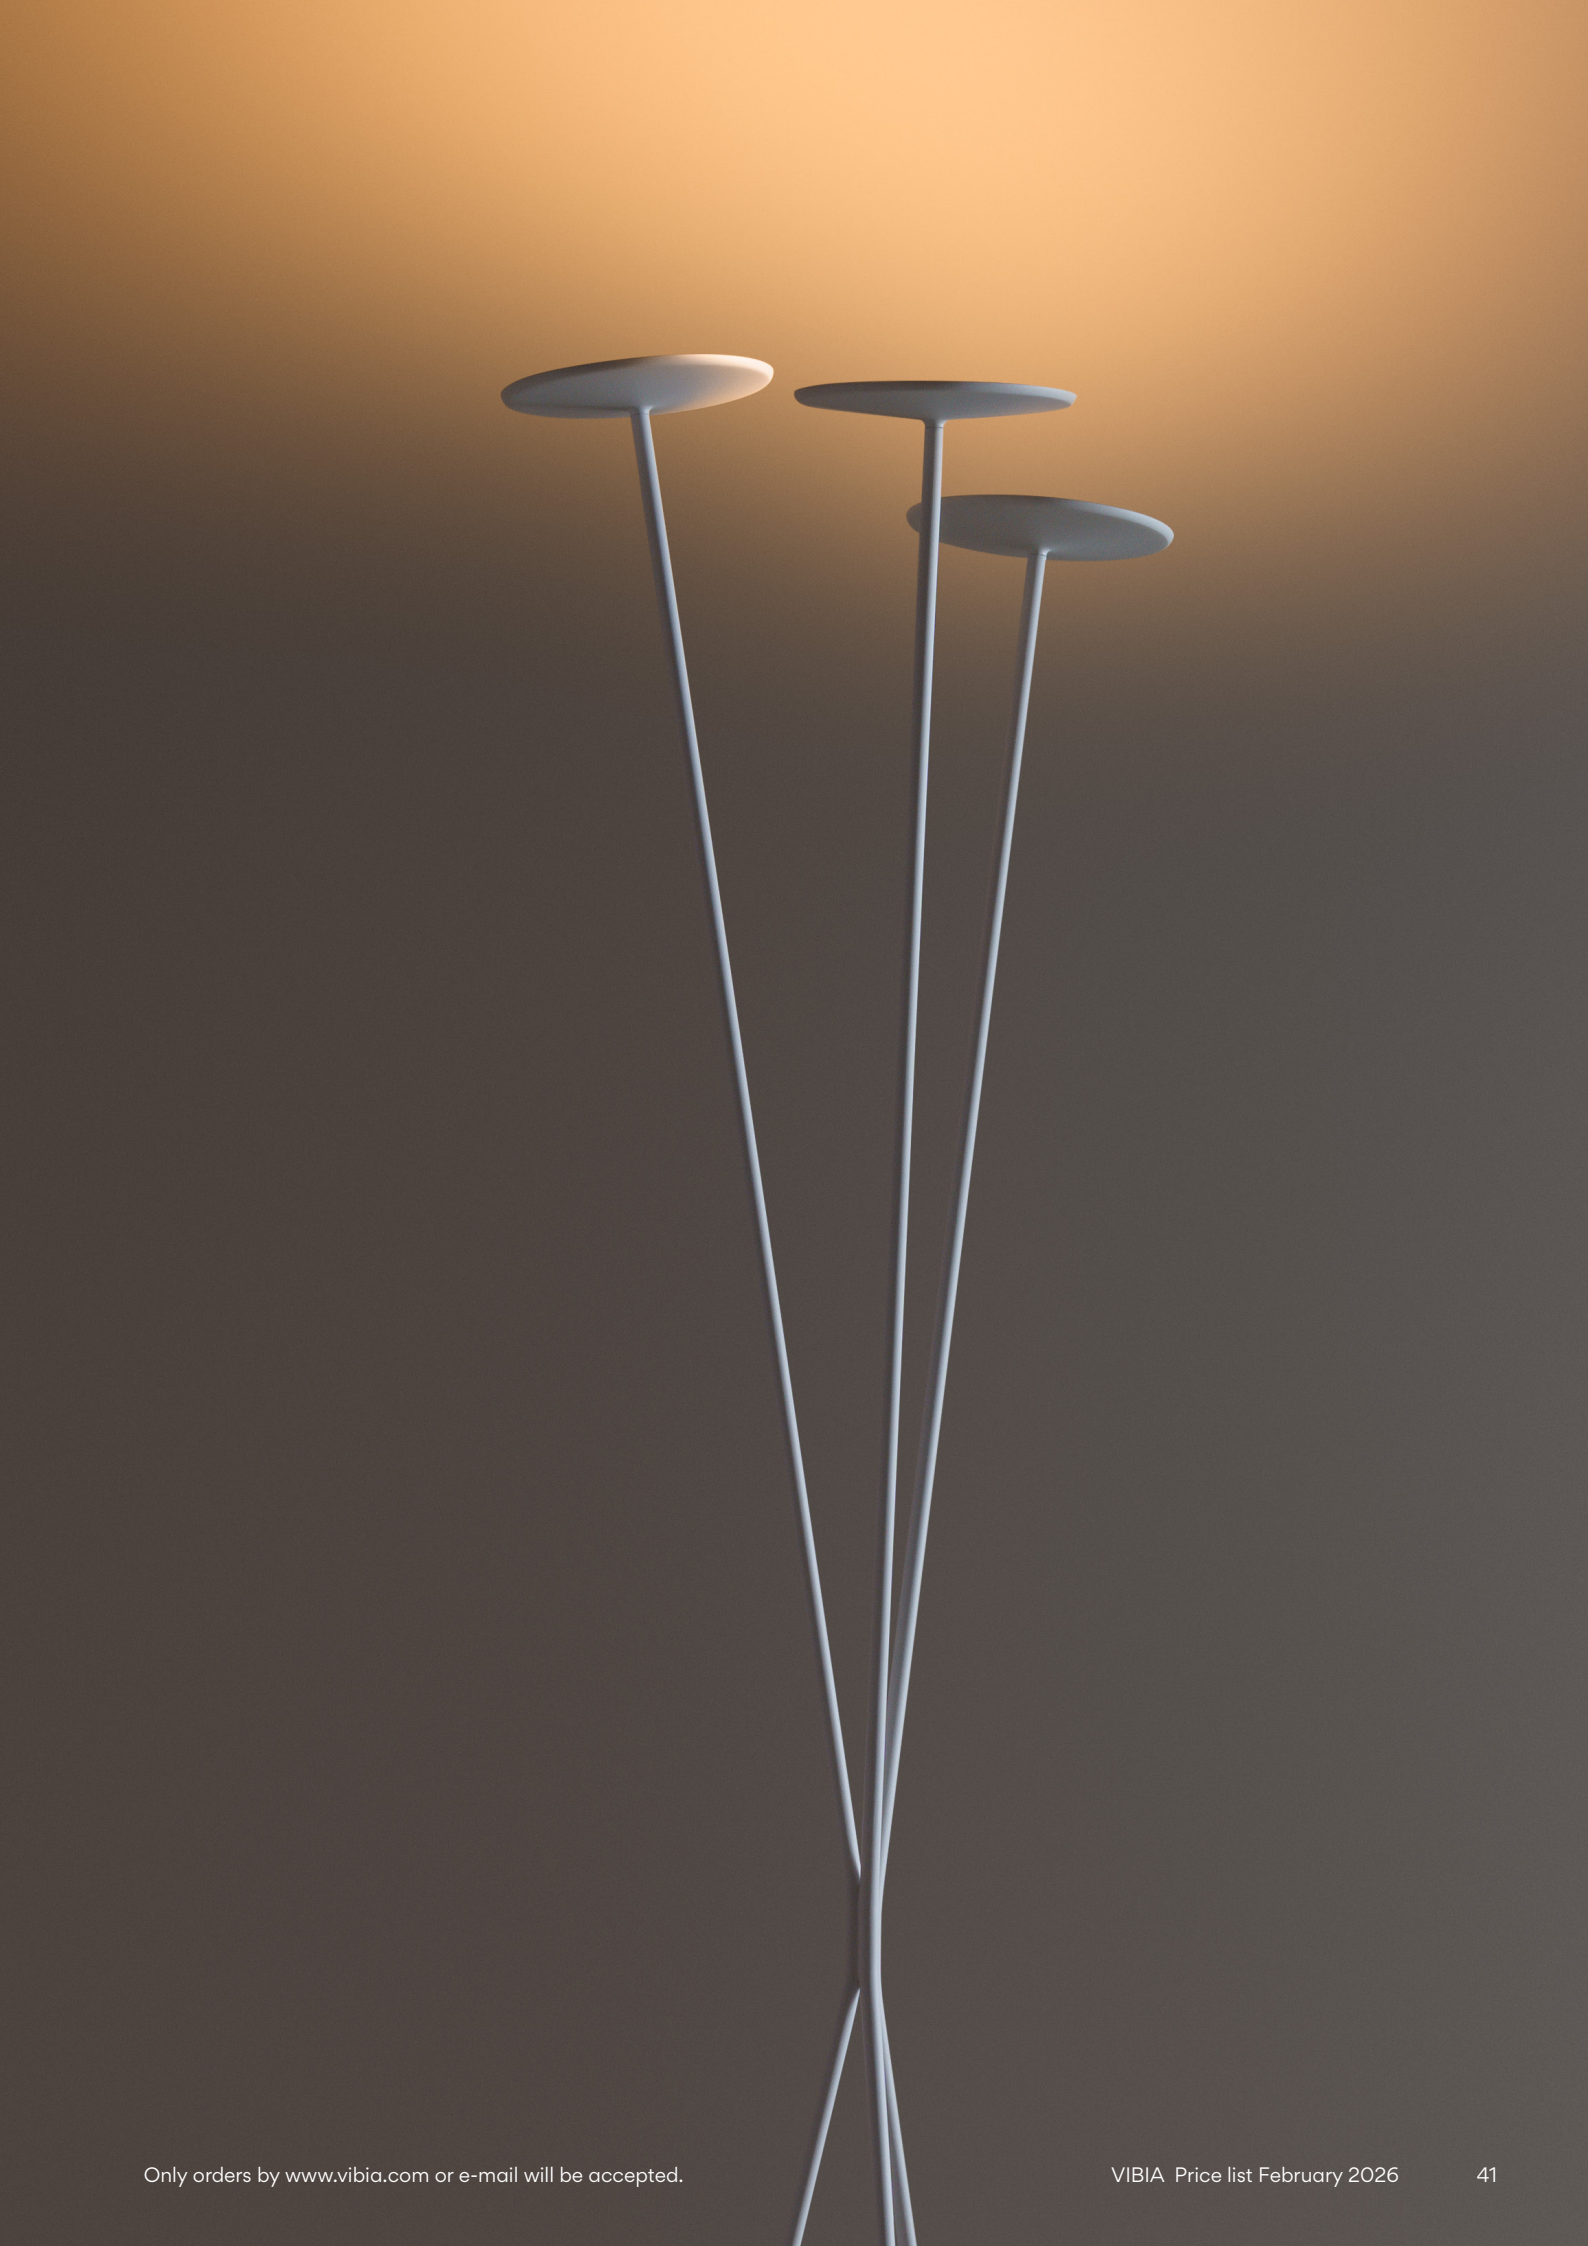

Pendant

INDIVIDUAL MODEL

0270



Ø 30 cm

0275



Ø 60 cm

MULTIPLE MODELS

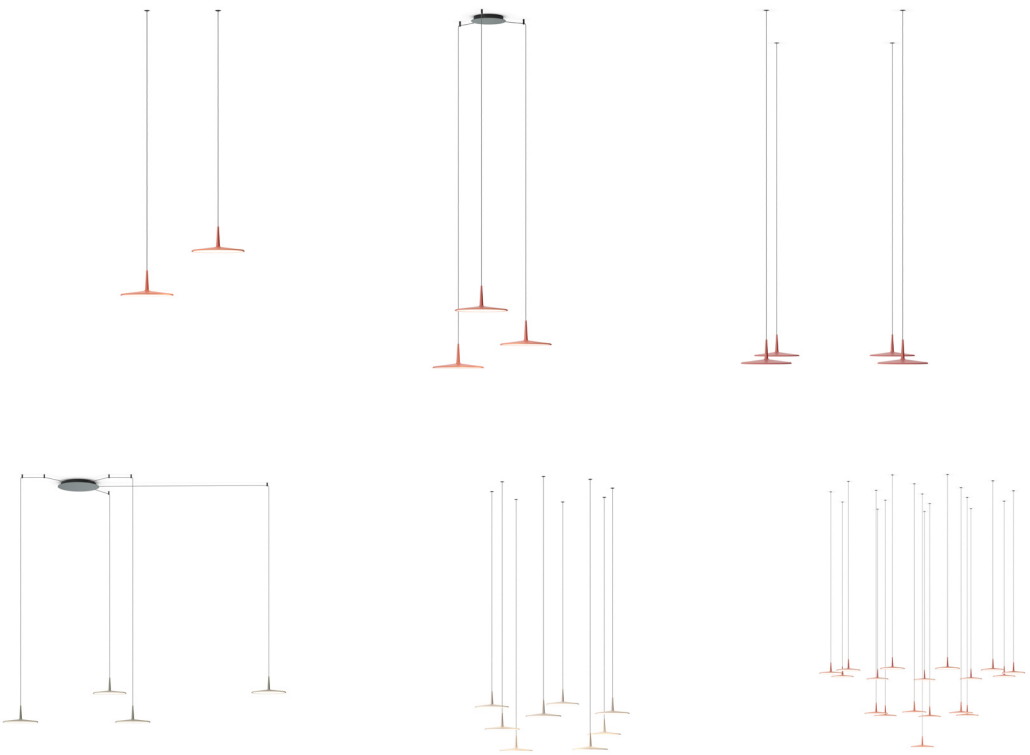

INDIVIDUAL MODEL

0270



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
CRI >90
D

/2 _ 3000 K - 1123 lm
CRI >80
D

/3 _ 3500 K - 1374 lm
CRI >90
G

Control

0270 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **2** 0-10V
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Shade: Aluminum. Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

0270 _ _ / _ 1: DALI-2 Bi-volt
0270 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

0275



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
CRI >90
F

/2 _ 3000 K - 1575 lm
CRI >80
E

/3 _ 3500 K - 1375 lm
CRI >90
F

Control

0275 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Light Source and electronics

1 x LED 13,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,42 x 0,71 x 0,66 m
Vol 0,2000 m³
Gross weight 7 Kg Net weight 4,4 Kg

Notes

Extra cable length.

LED IP20

MULTIPLE MODELS

Select your model at **vibia.com** and adjust



2 x 0270



2 x 0270



3 x 0270



3 x 0270



4 x 0270



4 x 0270



5 x 0270



7 x 0270



8 x 0270



8 x 0270



9 x 0270



18 x 0270



16 x 0270



4 x 0270



8 x 0270



9 x 0270



9 x 0270



16 x 0270

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S4040-Y70R)
42/ _ _ Blue M1
(NCS S 5010-B10G)
47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
CRI >90
/2 _ 3000 K
CRI >80
/3 _ 3500 K
CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **2** 0-10V
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0270

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 17,3 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm | Ø 22 cm | Ø 36 cm | Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 0275

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 20 cm

match with fixture finish.

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

MULTIPLE MODELS

0280



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 3123 lm
CRI >90

/2 _ 3000 K - 3369 lm
CRI >80

/3 _ 3500 K - 4124,7 lm
CRI >90

E

Control

0280 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Light Source and electronics

3 x LED 9,3 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,2226 m³
Gross weight 13,7 Kg Net weight 9,2 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20

0282



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 5205 lm
CRI >90

/2 _ 3000 K - 5615 lm
CRI >80

/3 _ 3500 K - 6874,5 lm
CRI >90

E

Control

0282 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Body: Aluminum. Diffuser: PMMA.
Canopy Plate: Steel.

Light Source and electronics

5 x LED 9,3 W 350mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3290 m³
Gross weight 36,9 Kg Net weight 29 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20



Wireflow

Design by Arik Levy

Crafted of black, electrical cables, Volumetric's airy, three-dimensional outline lends it the feeling of being at once present and absent. The geometric volumes are tipped with LED light terminals in a contemporary take on the traditional chandelier.

Pendant

4 LEDs



0309
100 x 100 cm



0310
80 x 80 cm



0311
64 x 64 cm



0312
50 x 50 cm

8 LEDs



0299
150 x 150 cm



0300
120 x 120 cm



0301
89 x 89 cm



0302
70 x 70 cm



0303
55 x 55 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

Personalise your own Wireflow composition quick and easy at **vibia.com**

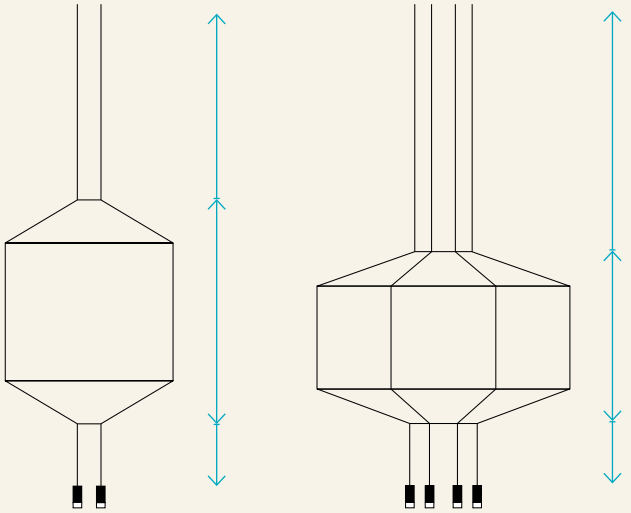

Pressed-glass diffuser.





0299



Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 3880 lm
D

/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E

CRI >90

Control

0299 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics

8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3245 m³
Gross weight 20,6 Kg Net weight 9,6 Kg

Notes

0299 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt

Pressed-glass diffuser.

Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

0300



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 3880 lm
D
/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E
CRI >90

Control
0300 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3246 m³
Gross weight 19,95 Kg Net weight 8,95 Kg

Notes
0300 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

0301



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 3880 lm
D
/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E
CRI >90

Control
0301 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 17,75 Kg Net weight 8,75 Kg

Notes
0301 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

0302



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 3880 lm
D
/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E
CRI >90

Control
0302 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 14,6 Kg Net weight 8,6 Kg

Notes
0302 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

0303



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 3880 lm
D
/2 _ 3000 K - 3880 lm
/3 _ 3500 K - 4002,4 lm
E
CRI >90

Control
0303 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
8 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 13 Kg Net weight 8,5 Kg

Notes
0303 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

0309



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0309 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 12,3 Kg Net weight 5,3 Kg

Notes
0309 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

0310



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0310 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2100 m³
Gross weight 11,8 Kg Net weight 4,8 Kg

Notes
0310 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

0311



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0311 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 8,7 Kg Net weight 4,7 Kg

Notes
0311 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20

0312



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
D
/2 _ 3000 K - 1940 lm
/3 _ 3500 K - 2001,2 lm
E
CRI >90

Control
0312 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass.
Horizontal rods and Canopy: Steel.
Body: Aluminum.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1558 m³
Gross weight 8,6 Kg Net weight 4,6 Kg

Notes
0312 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Pressed-glass diffuser.
Configuration layout at vibia.com
Min. quantity, upcharge and extra lead time apply.

LED IP20



Wireflow Lineal

Design by Arik Levy

Wireflow Lineal's ultra-minimalist design is balanced by a distinctive, precipitous presence that adds an intriguing accent to any room. Ideal for illuminating large spaces with high ceilings, its lean profile traces a formal silhouette in an open space with meticulous precision.

Pendant

2 LEDs

0320

57 cm x max. 200 cm



6 LEDs

0338

145 cm x max. 200 cm

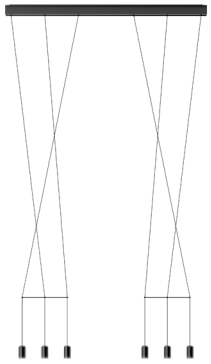

10 LEDs

0330

275 cm x max. 200 cm

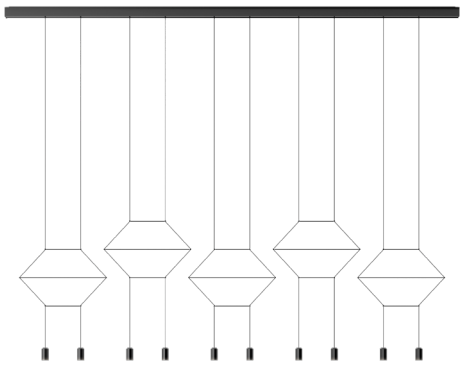

6 LEDs

0325

155 cm x max. 200 cm

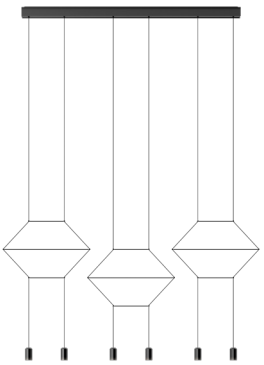

Product specifications subject to change without notice. Please check vibia.com for updated information.

Personalise your own Wireflow Lineal composition quick and easy at **vibia.com**



Without pressed-glass diffuser.

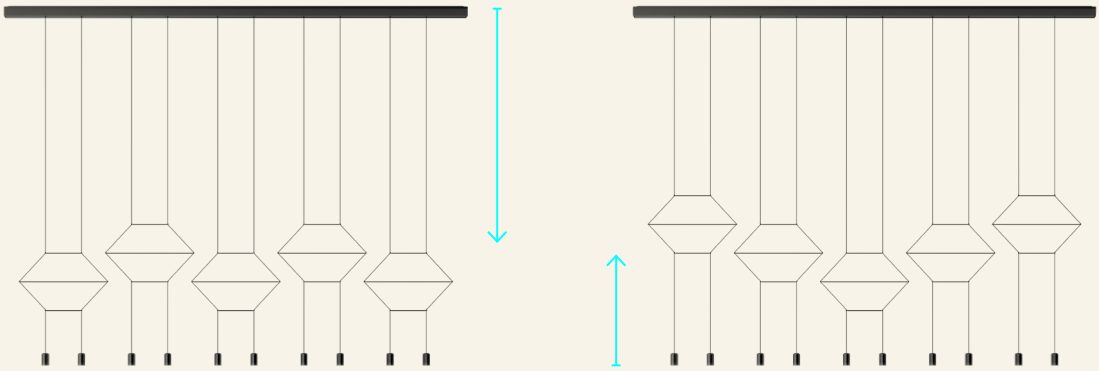

0320



Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 970 lm
D

/2 _ 3000 K - 970 lm
/3 _ 3500 K - 1000,6 lm
E

CRI >90

Control

0320 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.

Light Source and electronics

2 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,20 x 0,075 x 0,70 m
Vol 0,0150 m³
Gross weight 5,1 Kg Net weight 2,6 Kg

Notes

0320 _ _ / _ 1: DALI-2 Bi-volt
0320 _ _ / _ B: Push; 1-10V Bi-volt
Linear canopy

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

0325



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 2910 lm
D
/2 _ 3000 K - 2910 lm
/3 _ 3500 K - 3001,8 lm
E
CRI >90

Control
0325 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.

Light Source and electronics
6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 2,30 m
Vol 0,0345 m³
Gross weight 8 Kg Net weight 4,5 Kg

Notes
0325 _ _ / _ B: Push; 1-10V Bi-volt
Linear canopy

LED IP20 CE UK CA EAC

0330



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 4850 lm
D
/2 _ 3000 K - 4850 lm
/3 _ 3500 K - 5003 lm
E
CRI >90

Control
0330 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.

Light Source and electronics
10 x LED 4,5 W 700 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 3,30 m
Vol 0,0495 m³
Gross weight 9,5 Kg Net weight 5,0 Kg

Notes
Linear canopy

LED IP20 CE UK CA EAC

0338



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 2910 lm
D
/2 _ 3000 K - 2910 lm
/3 _ 3500 K - 3001,8 lm
E
CRI >90

Control
0338 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Horizontal rods: Steel.
Body and canopy: Aluminum.

Light Source and electronics
6 x LED 4,5 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,20 x 0,075 x 3,30 m
Vol 0,0495 m³
Gross weight 9,5 Kg Net weight 5,0 Kg

Notes
Linear canopy

LED IP20 CE UK CA EAC

Product specifications subject to change without notice. Please check vibia.com for updated information.



Wireflow Free

Design by Arik Levy

True to its name, Wireflow Free adapts easily to any environment.
Its cables can be directed to form unexpected visual rhythms
across a wall or ceiling, or to branch out from a central point
and delineate specific activity zones within a space.
Free offers maximum versatility in both form and function.

Pendant

0345

Ø 3 x 200cm



0361

Ø 3 x 200cm



0347

Ø 3 x 50 x 200cm



0348

Ø 3 x 50 x 200cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

0345



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 485 lm
D
/2 _ 3000 K - 485 lm
/3 _ 3500 K - 500,3 lm
E
CRI >90

Control
0345 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics
1 x LED 4,5 W 700 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes
0345 _ _ / _ 1: DALI-2 Bi-volt
0345 _ _ / _ B: Push; 1-10V Bi-volt
With pressed-glass diffuser.
Extra cable length.

LED IP20

0347



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 490 lm
D
CRI >80

Control
0347 _ _ **/ 15** Push

Materials
Diffuser: PC- Polycarbonate. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m³
Gross weight 1,5 Kg Net weight 1,35 Kg

Notes
Without pressed-glass diffuser.
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.

LED IP20

0348



Finishes
04/ _ _ Black
(RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 490 lm
D
CRI >80

Control
0348 04 / 15 Push

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,9 Kg Net weight 1,71 Kg

Notes
With pressed-glass diffuser.
Electric cable 2,5 m. With plug.
Dimmer push button on the wall plate.

LED IP20

1160 | 10 | /1 | A | _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

0361

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 485 lm
D

/2 _ 3000 K - 485 lm
/3 _ 3500 K - 500,3 lm
E

CRI >90

Control

0361 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi



Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC-Polycarbonate. Body: Aluminum.
Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 700 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m^3
Gross weight 2,6 Kg Net weight 2,34 Kg

Notes

0361 _ _ / _ 1: DALI-2 Bi-volt
0361 _ _ / _ B: Push; 1-10V Bi-volt
Without pressed-glass diffuser.
Additional cable length personalisation.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

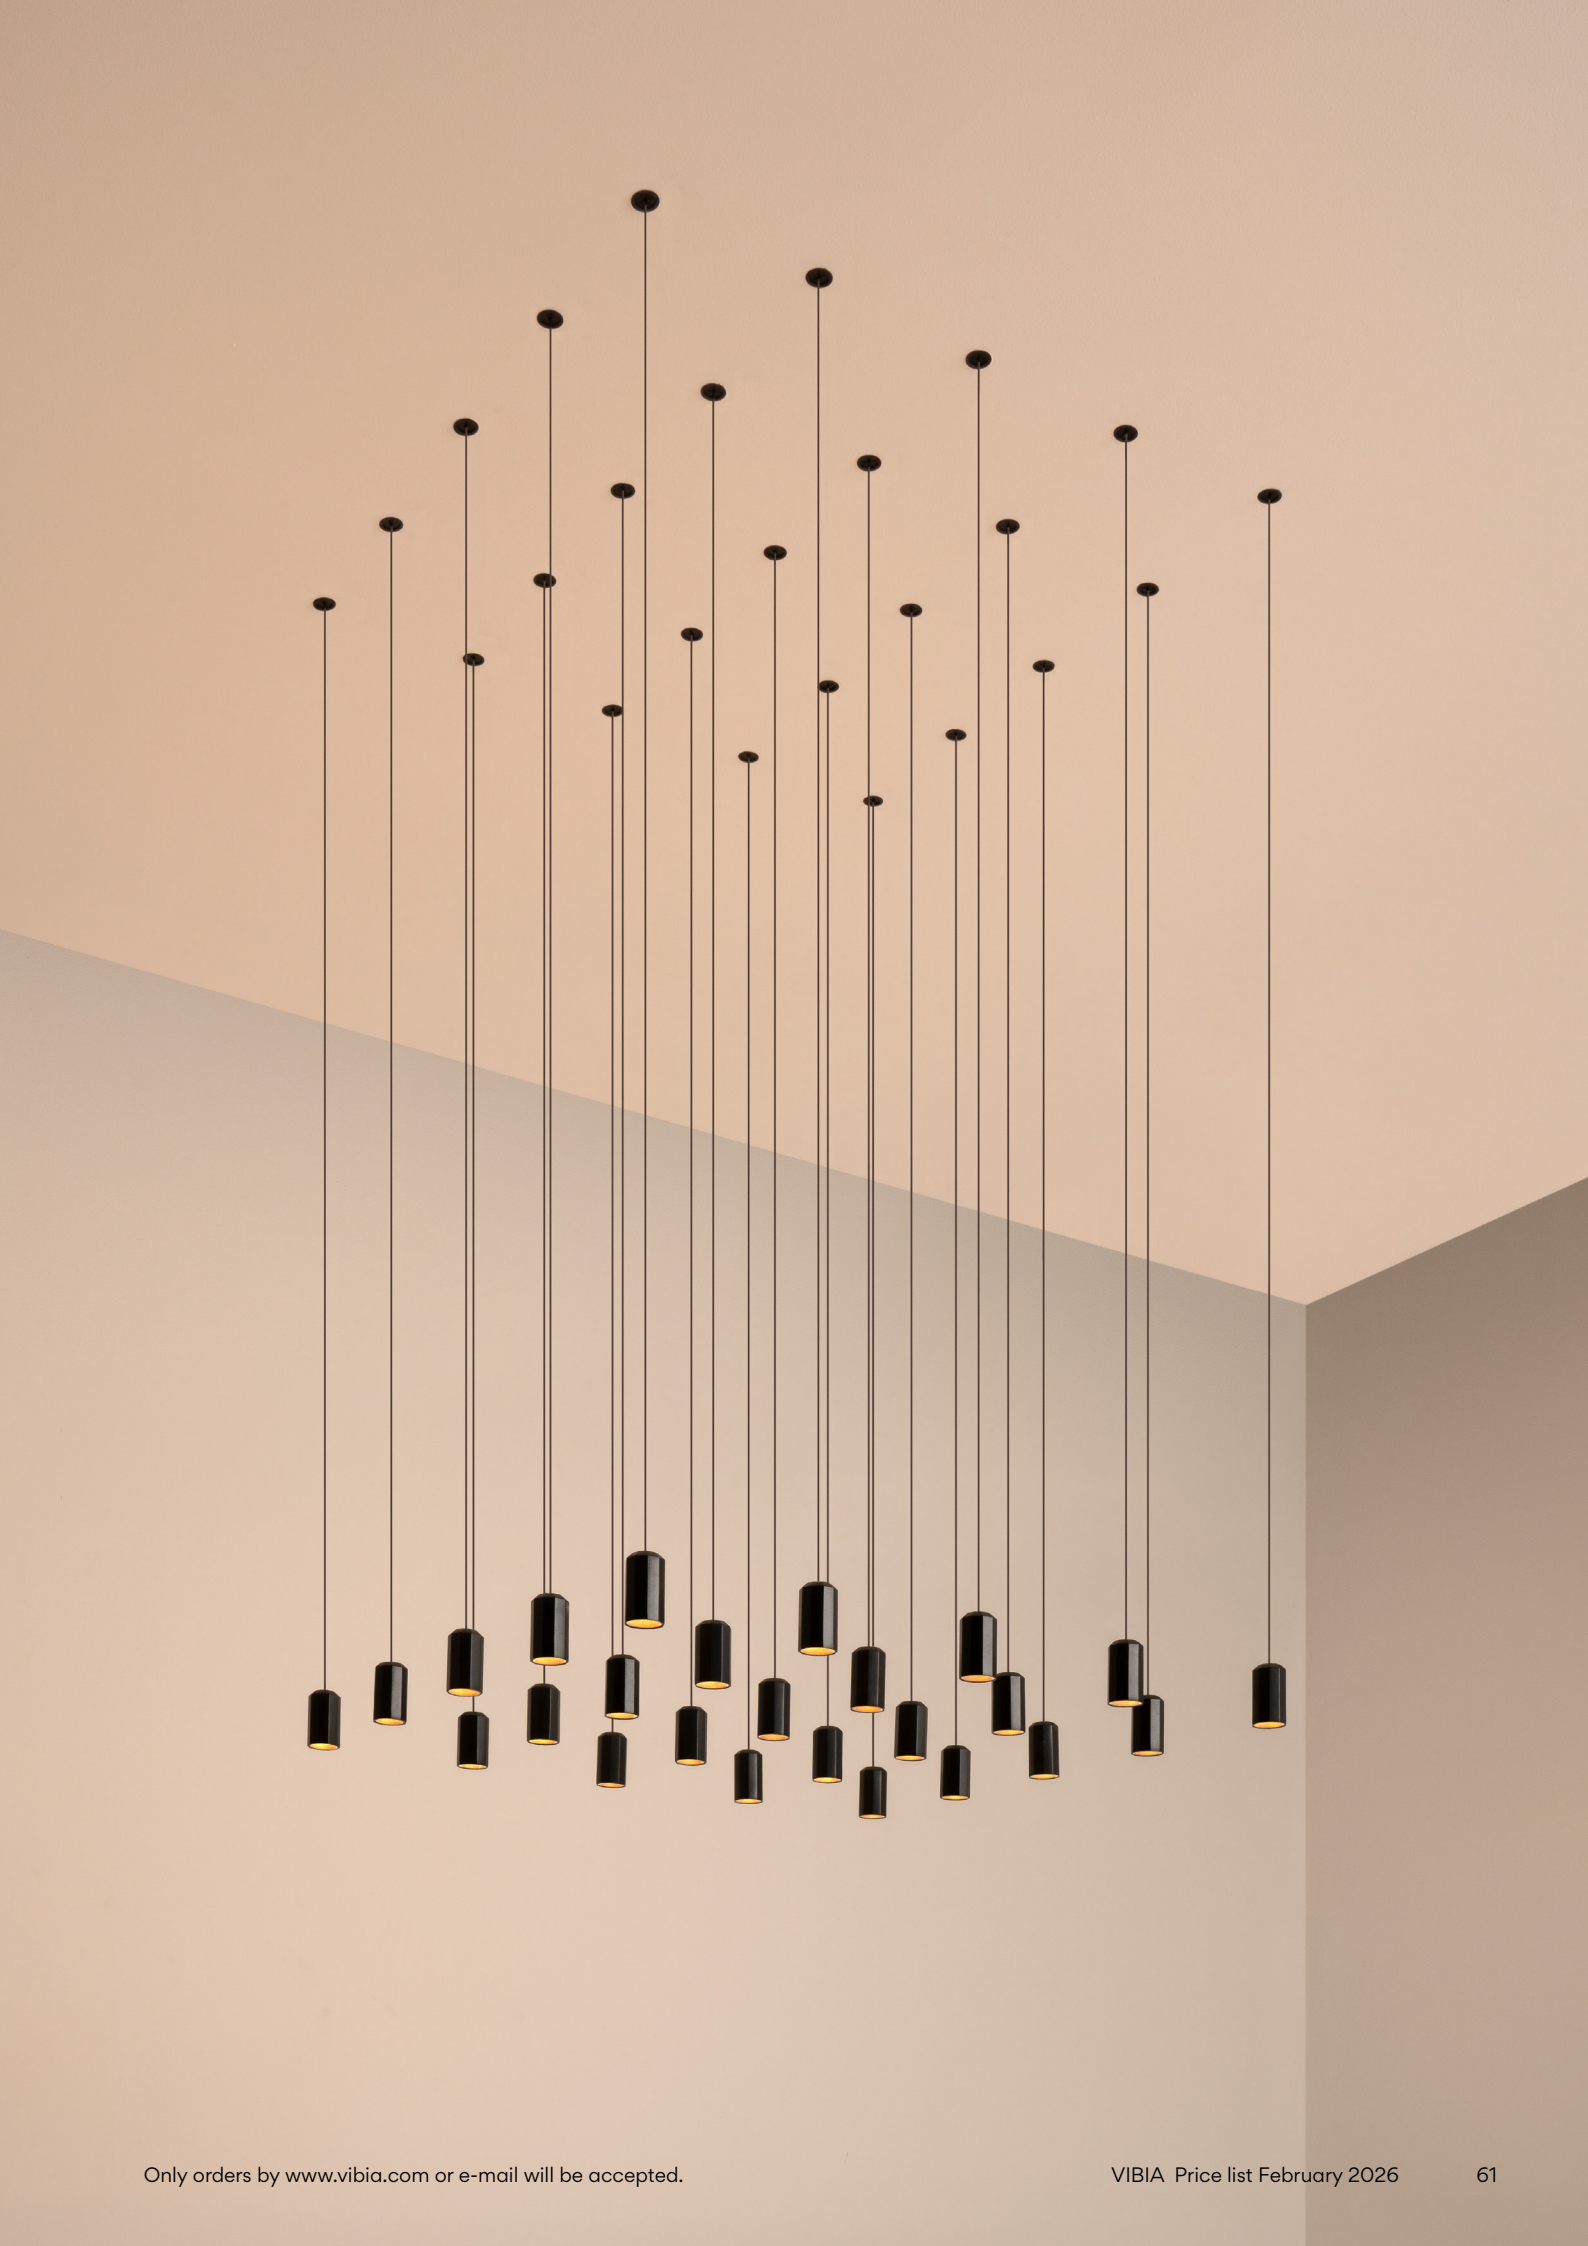

Select your model at **vibia.com** and adjust



2 x 0361



3 x 0345



3 x 0345



4 x 0361



4 x 0345



5 x 0345



5 x 0361



7 x 0345



6 x 0361



8 x 0345



15 x 0361



8 x 0345



9 x 0361



12 x 0345



11 x 0361



41 x 0361



25 x 0345



54 x 0345



45 x 0361

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0345, 0361

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 20 cm

match with fixture finish.

_18
Free Wire

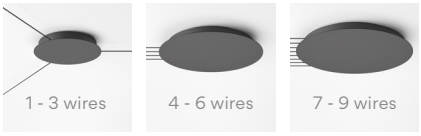

Ø 20 cm

Ø 36 cm

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials

Diffuser: Pressed-glass. / PC- Polycarbonate.
Body: Aluminum. Canopy: Steel.
Ceiling supports: POM.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

Wireflow Chandelier

Design by Arik Levy

Wireflow Chandelier is a contemporary reimagining of the traditional fixture. Its ultramodern silhouette provides an unexpected twist, while its graceful lines echo with a sense of timeless elegance. Though substantial in size its airy outline creates a feeling of transparency.

Pendant

20 LEDs

0315

120 x 279 cm

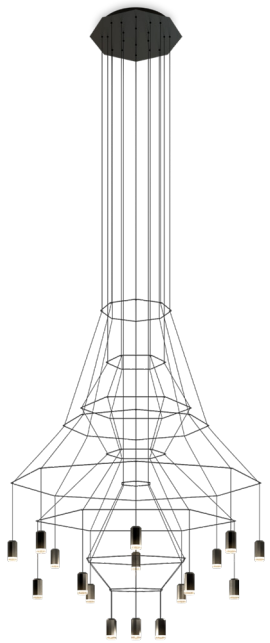

43 LEDs

0374

150 x 307 cm

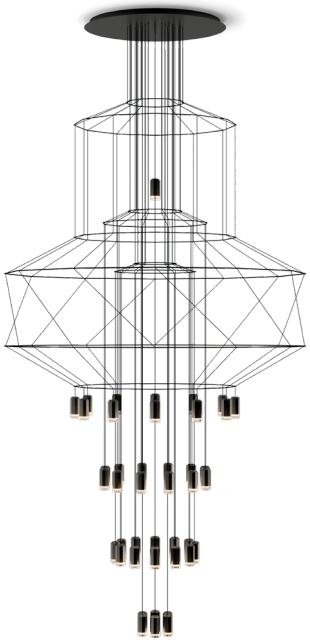

43 LEDs

0375

150 x 396 cm

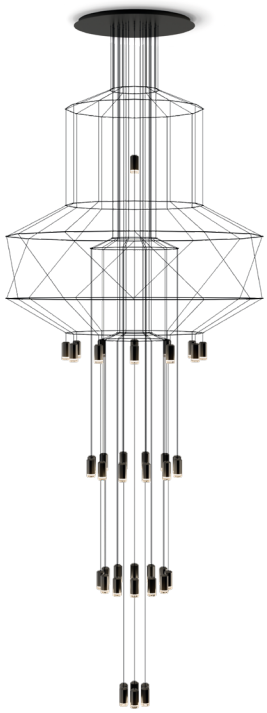

42 LEDs

0376

150 x 112 cm



42 LEDs

0377

150 x 194 cm

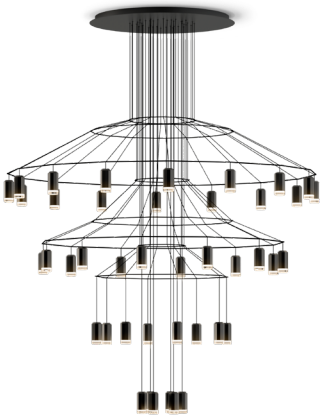

42 LEDs

0378

150 x 276 cm

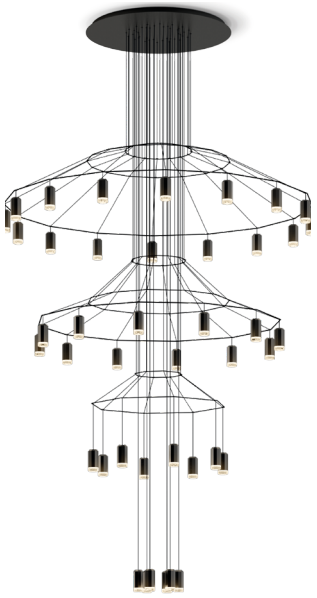

Product specifications subject to change without notice. Please check vibia.com for updated information.

Personalise your own Wireflow Chandelier composition quick and easy at **vibia.com**

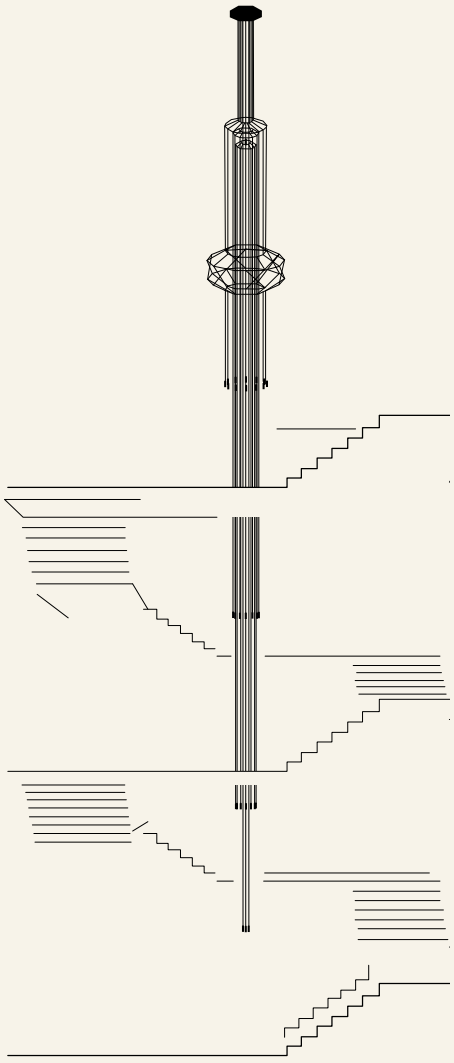

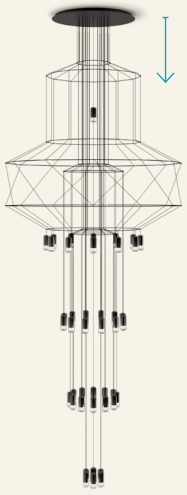

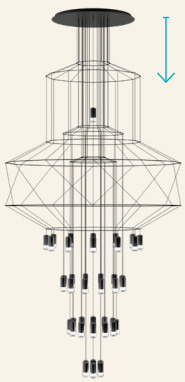

For configurations longer than 9 m, please ask Vibia customer service.



0315

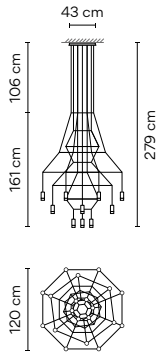

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 9700 lm
D

/2 _ 3000 K - 9700 lm
/3 _ 3500 K - 10006,1 lm
E

CRI >90

Control

0315 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

20 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,3832 m³
Gross weight 32 Kg Net weight 18 Kg

Notes

Configuration layout at **vibia.com**

Min. quantity, upcharge and extra lead time apply

LED IP20

0374

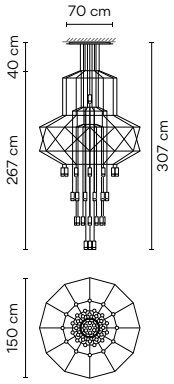

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 20855 lm
D

/2 _ 3000 K - 20855 lm
/3 _ 3500 K - 21513,1 lm
E

CRI >90

Control

0374 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

43 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5000 m³
Gross weight 57 Kg Net weight 47 Kg

Notes

Configuration layout at **vibia.com**

Min. quantity, upcharge and extra lead time apply

LED IP20

0375

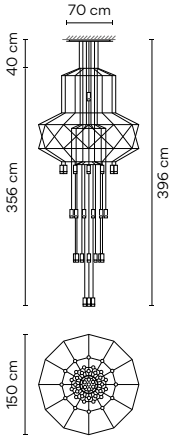

Finishes

04/ _ _ Black
(RAL 9005)

LED Colour Temperature

/1 _ 2700 K - 20855 lm
D

/2 _ 3000 K - 20855 lm
/3 _ 3500 K - 21513,1 lm
E

CRI >90

Control

0375 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics

43 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5000 m³
Gross weight 57 Kg Net weight 47 Kg

Notes

Configuration layout at **vibia.com**

Min. quantity, upcharge and extra lead time apply

LED IP20

0376



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control
0376 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at **vibia.com**
Min. quantity, upcharge and extra lead time apply

LED IP20

0377



Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control
0377 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at **vibia.com**
Min. quantity, upcharge and extra lead time apply

LED IP20

0378

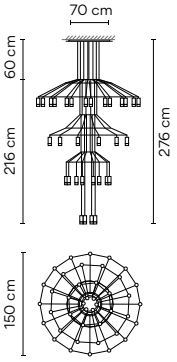

Finishes
04/ _ _ Black (RAL 9005)

LED Colour Temperature
/1 _ 2700 K - 20370 lm
D
/2 _ 3000 K - 20370 lm
/3 _ 3500 K - 21012,8 lm
E
CRI >90

Control
0378 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Pressed-glass. Body: Aluminum.
Canopy and horizontal rods: Steel.

Light Source and electronics
42 x LED 4,5 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,5000 m³
Gross weight 56 Kg Net weight 46 Kg

Notes
Configuration layout at **vibia.com**
Min. quantity, upcharge and extra lead time apply

LED IP20

l.Cono

Design by Lievore, Altherr, Molina

l.Cono is distinguished by its signature visor-shaped shade that's sleekly angled for a stylish look. Ideal for precision lighting or reading, its pure and clean design conceals its rotation mechanisms.

Table Floor Wall

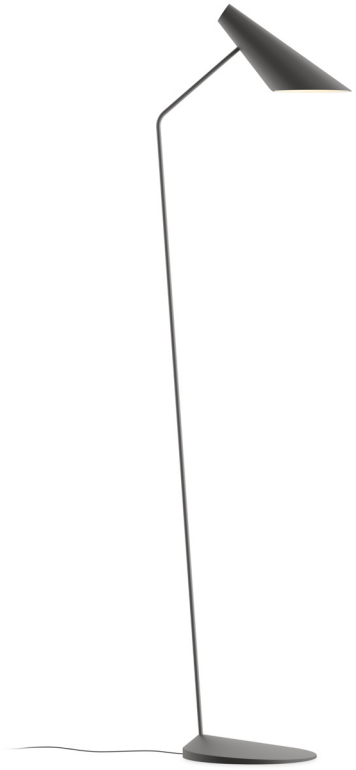

0712
21 x 130 x 35 cm



0700
17 x 56 x 32 cm



0720
15 x 17 x 26 cm



0721
15 x 17 x 26 cm

0700



Finishes

- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 745 lm
E
CRI >90

Control

0700 _ _ / _ _

_ _ / **15** Push
_ _ / **1Z** Casambi

Materials

Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.

Light Source and electronics

1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz

Packaging

1 Box 0,81 x 0,31 x 0,33 m
Vol 0,08 m^3
Gross weight 2,6 Kg Net weight 1,9 Kg

Notes

Electric cable 2,5 m.
On/off switch on the cable.

LED IP20 Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

0712

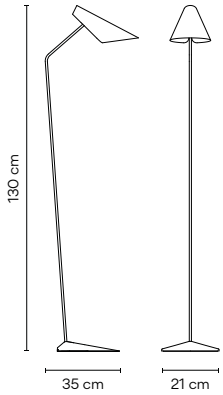

Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 745 lm
E
CRI >90

Control
0712 _ _ **/** _ _
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Tube: Iron. Base: Zinc Alloy.

Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
100~240Vac 50/60Hz

Packaging
1 Box 1,43 x 0,30 x 0,30 m
Vol 0,13 m^3
Gross weight 4 Kg Net weight 3 Kg

Notes
0712 _ _ / 15: Push Multi-volt
Electric cable 2,5 m.
On/off switch on the cable.

LED IP20

0720



Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 745 lm
E
CRI >90

Control
0720 _ _ **/ 10** On/ Off

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.

Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

Packaging
1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m^3
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes
On/off switch on the base.

LED IP20

0721



Finishes
- **10** White (NCS S 0300-N)
- **21** Black Grey (NCS S 7000-N)
- **25** Beige D1 (NCS S 4005-G80Y)
- **37** Terra Red (NCS S 4040-Y70R)
- **42** Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 745 lm
E
CRI >90

Control
0721 _ _ **/** _ _
- _ _ **/ 10** On/ Off
- _ _ **/ 1D** _ **30** Push; DALI (Remote)
- _ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Shade: ABS + PC- Polycarbonate.
Diffuser: Aluminum. Base: Aluminum. Tube: Iron.

Light Source and electronics
1 x LED 6W 350 mA
Constant current 350mA
220~240Vac 50/60Hz

Packaging
1 Box 0,20 x 0,21 x 0,13 m
Vol 0,00546 m^3
Gross weight 1,1 Kg Net weight 0,8 Kg

Notes
Without switch.

LED IP20

Algorithm Grid

Design by Toan Nguyen

Like a cloud of frozen rain, this collection brings together beauty and geometry. Mathematical order provides a magical harmony with an astonishing range of permutations and compositions.
Can be customized to suit any space.

Pendant

*** Built-in version**

6 LEDs

0830 *0832

123 x 25 cm



10 LEDs

0835 *0837

214 x 25 cm



14 LEDs

0840 *0842

306 x 25 cm



14 LEDs

0845 *0847

183 x 34 cm



29 LEDs

0850 *0852

399 x 34 cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

10 LEDs

0825 *0827

75 x 85 cm



13 LEDs

0860 *0862

110 x 110 cm



25 LEDs

0865 *0867

160 x 160 cm



15 LEDs

0870 *0872

110 x 60 cm



24 LEDs

0875 *0877

185 x 60 cm



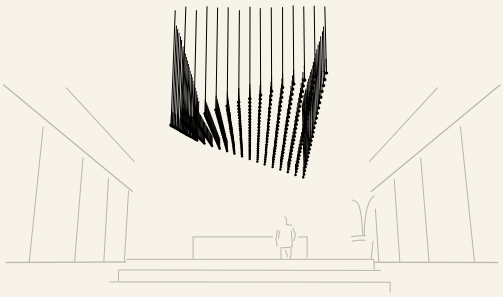



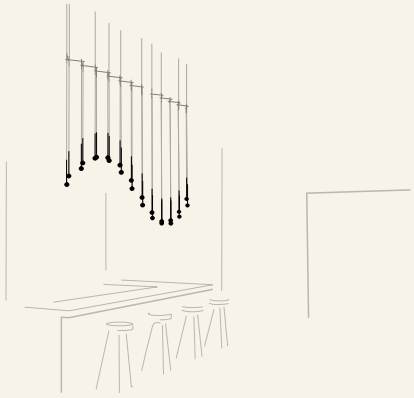

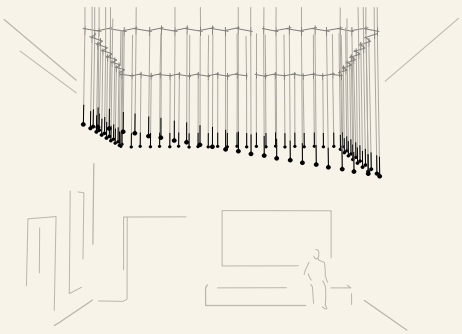

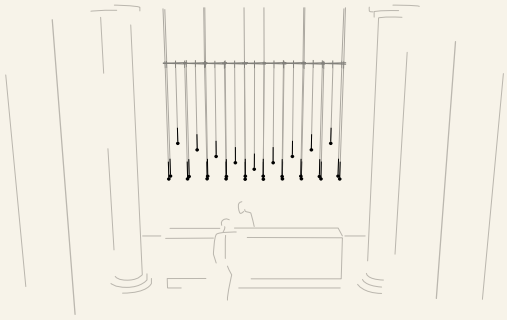

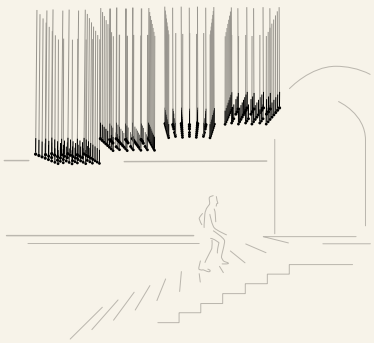

Surface.



Built-in.
11,5 cm Die-cut diameter,
12 cm minimum height in ceiling.



Adjustable cable installation.



Rigid stem installation.
Fixed at 25 cm.



Product specifications subject to change without notice. Please check vibia.com for updated information.

Adjust height of standard model

To personalize luminaire height,
without adjusting diffusers layout.

The steel cables that go from the structure to the ceiling are the only ones that allow the height of the lamp to be adjusted. The installation manual describes how to do this and how to cut the cables.

Personalise your own Algorithm composition quick and easy at **vibia.com**

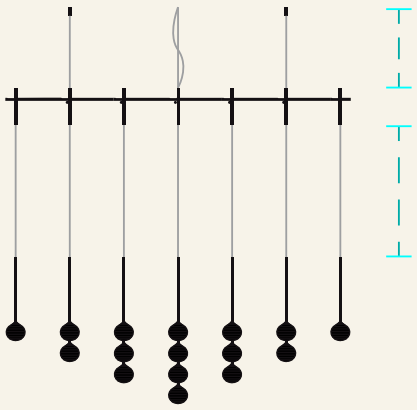

0825



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0825 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Surface

LED IP20

0827



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0827 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,324 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Built-in

LED IP20 Ø 10,5 cm

0830



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 1873,68 lm
/3 _ 3500 K - 1873,7 lm
F
CRI >90

Control
0830 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
6 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1705 m³
Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
Surface

LED IP20 CE UK CA EAC

0832



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 1873,68 lm
/3 _ 3500 K - 1873,7 lm
F
CRI >90

Control
0832 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
6 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1705 m³
Gross weight 3,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP20 CE UK CA EAC Ø 10,5 cm

0835



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0835 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Surface

LED IP20 CE UK CA EAC

0837



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 3122,8 lm
/3 _ 3500 K - 3122,8 lm
F
CRI >90

Control
0837 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
10 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 15,5 Kg Net weight 10,5 Kg

Notes
Built-in

LED IP20 CE UK CA EAC Ø 10,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

0840



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0840 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes
Surface

LED IP20 CE UK CA EAC

0842



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0842 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,5275 m³
Gross weight 17,3 Kg Net weight 11,3 Kg

Notes
Built-in

LED IP20 CE UK CA EAC Ø 10,5 cm

0845



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0845 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes
Surface

LED IP20 CE UK CA EAC

0847



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4371,92 lm
/3 _ 3500 K - 4371,92 lm
F
CRI >90

Control
0847 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
14 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3220 m³
Gross weight 18,3 Kg Net weight 13,3 Kg

Notes
Built-in

LED IP20 CE UK CA EAC Ø 10,5 cm

0850



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 9056,12 lm
/3 _ 3500 K - 9056,12 lm
F
CRI >90

Control
0850 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
29 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6260 m³
Gross weight 26 Kg Net weight 20 Kg

Notes
Surface

LED IP20 Dimmer

0852



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 9056,12 lm
/3 _ 3500 K - 9056,12 lm
F
CRI >90

Control
0852 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
29 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6260 m³
Gross weight 26 Kg Net weight 20 Kg

Notes
Built-in

LED IP20 Ø 10,5 cm

0860



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4059,64 lm
/3 _ 3500 K - 4059,64 lm
F
CRI >90

Control
0860 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
13 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3290 m³
Gross weight 17,35 Kg Net weight 11,85 Kg

Notes
Surface

LED IP20

0862



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4059,64 lm
/3 _ 3500 K - 4059,64 lm
F
CRI >90

Control
0862 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
13 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,3290 m³
Gross weight 17,35 Kg Net weight 11,85 Kg

Notes
Built-in

LED IP20 Ø 10,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

0865



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7807 lm
/3 _ 3500 K - 7807 lm
F
CRI >90

Control
0865 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
25 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,7280 m³
Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
Surface

LED IP20 CE UKCA EAC

0867



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7807 lm
/3 _ 3500 K - 7807 lm
F
CRI >90

Control
0867 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
25 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,7280 m³
Gross weight 25,25 Kg Net weight 20,25 Kg

Notes
Built-in

LED IP20 CE UKCA EAC Ø 10,5 cm

0870



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4684,2 lm
/3 _ 3500 K - 4684,2 lm
F
CRI >90

Control
0870 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
15 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2679 m³
Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
Surface

LED IP20 CE UKCA EAC

0872



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 4684,2 lm
/3 _ 3500 K - 4684,2 lm
F
CRI >90

Control
0872 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
15 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,2679 m³
Gross weight 18,25 Kg Net weight 13,75 Kg

Notes
Built-in

LED IP20 CE UKCA EAC Ø 10,5 cm

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

0875



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7494,72 lm
/3 _ 3500 K - 7494,72 lm
F
CRI >90

Control
0875 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
24 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,4500 m³
Gross weight 30,1 Kg Net weight 22,1 Kg

Notes
Surface

LED IP20

0877



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/1 _ 2700 K - 7494,72 lm
/3 _ 3500 K - 7494,72 lm
F
CRI >90

Control
0877 _ _ **/** _ _
_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials
Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics
24 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,4500 m³
Gross weight 30,1 Kg Net weight 22,1 Kg

Notes
Built-in

LED IP20 Ø 10,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.


MUSEU D'ART CONTEMPORANI

Algorithm Free

Design by Toan Nguyen

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

Like a cloud of frozen rain, this collection brings together beauty and geometry. Each unique grouping of globes defines areas of interior space, underlining their multiple uses while becoming a single aesthetic element.

INDIVIDUAL MODEL

Pendant

0820

Ø 9 cm



0820



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K - 312,28 lm
E

/3 _ 3500 K - 312,3 lm
F

CRI >90

Control

0820 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Light Source and electronics

1 x LED 3,15 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging

1 Box 0,18 x 0,55 x 0,55 m
Vol 0,0131 m^3
Gross weight 2,17 Kg Net weight 1,57 Kg

Notes

0820 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Surface.
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Select your model at **vibia.com** and adjust



2 x 0820



3 x 0820



3 x 0820



3 x 0820



4 x 0820



4 x 0820



5 x 0820



5 x 0820



5 x 0820



7 x 0820



6 x 0820



7 x 0820



15 x 0820



9 x 0820



10 x 0820



20 x 0820



41 x 0820



30 x 0820



54 x 0820

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/1 _ 2700 K
/3 _ 3500 K
CRI >90

Control

0820 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0820

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 19 cm

match with fixture finish.

_18
Free Wire

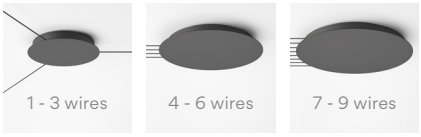

Ø 22 cm

Ø 36 cm

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials

Sphere: Blown-glass. Diffuser: PC- Polycarbonate.
Glass fastening: Aluminum. Canopy: Steel.
Pendant structure: Steel. LED support: Aluminum.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

Slim

Design by Jordi Vilardell

Streamlined and refined,
Slim serves as a sleek punctuation mark.

Pendant

INDIVIDUAL MODEL

0920

Ø 2,6 cm



MULTIPLE MODELS









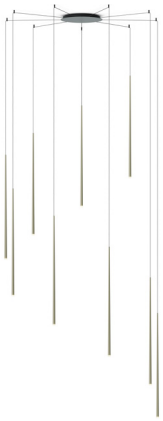

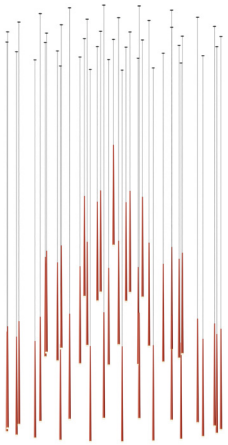

Product specifications subject to change without notice. Please check vibia.com for updated information.

INDIVIDUAL MODEL

0920



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
F
CRI >90

/2 _ 3000 K - 163,2 lm
G
CRI >80

/3 _ 3500 K - 207,6 lm
F
CRI >90

Control

0920 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 1,20 m
Vol 0,0155 m^3
Gross weight 2,14 Kg Net weight 1,2 Kg

Notes

0920 _ _ / _ 0: On/ Off Bi-volt
0920 _ _ / _ 1: DALI-2 Bi-volt
0920 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20





Select your model at **vibia.com** and adjust



2 x 0920



3 x 0920



3 x 0920



3 x 0920



4 x 0920



4 x 0920



4 x 0920



5 x 0920



5 x 0920



5 x 0920



7 x 0920



8 x 0920



15 x 0920



9 x 0920



9 x 0920



17 x 0920



41 x 0920



40 x 0920



54 x 0920

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0920_ _ / _ 0

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 17,3 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm



Ø 36 cm



Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

For Ref. 0920_ _ / _ 1 / _ B / _ Z

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 20 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm



Ø 36 cm



Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials

Diffuser: Glass. Body: FG- Fiberglass .
Canopy: Steel.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

Pendant

0917
Ø 28 cm



0931
24 x 24 cm



0933
38 x 24 cm



0937
53 x 26 cm

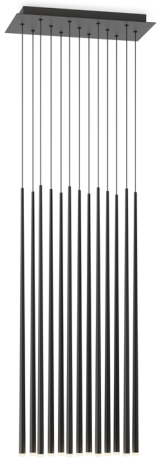

0935
Ø 69 cm

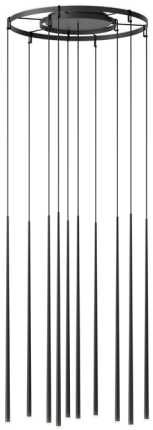

0940
Ø 100 cm

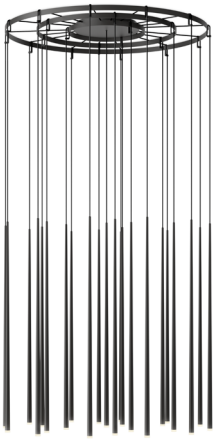

MULTIPLE MODELS

0917



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 724,88 lm
F
CRI >90

/2 _ 3000 K - 652,8 lm
G
CRI >80

/3 _ 3500 K - 830,6 lm
F
CRI >90

Control

0917 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

4 x LED 2,1 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1278 m^3
Gross weight 8 Kg Net weight 5,2 Kg

Notes

0917 _ _ / _ 1: DALI-2 Bi-volt
0917 _ _ / _ B: Push; 1-10V Bi-volt
Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

0931



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 724,88 lm
F
CRI >90

/2 _ 3000 K - 652,8 lm
G
CRI >80

/3 _ 3500 K - 830,6 lm
F
CRI >90

Control

0931 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 8 Kg Net weight 5,2 Kg

Notes

0931 _ _ / _ 1: DALI-2 Bi-volt
0931 _ _ / _ B: Push; 1-10V Bi-volt
Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20

0933



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1087,32 lm
F
CRI >90

/2 _ 3000 K - 979,2 lm
G
CRI >90

/3 _ 3500 K - 1245,9 lm
F
CRI >90

Control

0933 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

6 x LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m³
Gross weight 12,5 Kg Net weight 9,1 Kg

Notes

0933 _ _ / _ 1: DALI-2 Bi-volt
0933 _ _ / _ B: Push; 1-10V Bi-volt
Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20

0935



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 954,5 lm
CRI >90
/2 _ 3000 K - 1140 lm
CRI >80
/3 _ 3500 K - 1093,7 lm
CRI >90
F

Control

0935 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

10 x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4410 m^3
Gross weight 19,2 Kg Net weight 14,2 Kg

Notes

0935 _ _ / _ 1: DALI-2 Bi-volt
0935 _ _ / _ B: Push; 1-10V Bi-volt
Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20

0937



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2355,86 lm
F
CRI >90
/2 _ 3000 K - 2121,6 lm
G
CRI >80
/3 _ 3500 K - 2699,4 lm
F
CRI >90

Control

0937 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

13 x LED 2,1W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,22 x 0,48 x 1,20 m
Vol 0,1267 m^3
Gross weight 12,5 Kg Net weight 18,46 Kg

Notes

Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20

0940



Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)
68/ _ _ Ocre
(NCS S 3050-Y30R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2099,9 lm
CRI >90

/2 _ 3000 K - 2508 lm
CRI >80

/3 _ 3500 K - 2406,1 lm
CRI >90

F

Control

0940 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: Glass.
Body: FG- Fiberglass.
Canopy: Steel.

Light Source and electronics

22 x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 1,14 x 1,14 x 0,34 m
Vol 0,4420 m^3
Gross weight 29,9 Kg Net weight 21,9 Kg

Notes

0940 _ _ / _ 1: DALI-2 Bi-volt
0940 _ _ / _ B: Push; 1-10V Bi-volt
Surface.
Extra cable length.
UNTIL STOCK RUNS OUT

LED IP20



Top

Design by Ramos & Bassols

Soft, spherical shapes and a warm luminescence characterize the Top collection. Its glowing epicenter is encircled by a larger ring, lending the look of framing the light within its pure geometry.

Ceiling Wall



1154

Ø 17 cm



1155

Ø 40 cm



1160

Ø 60 cm



1170

Ø 90 cm

1154



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 550 lm
E

/3 _ 3500 K - 540,2 lm
F

CRI >90

Control

1154 _ _ **/** _ **0** On/ Off

Materials

Body: Aluminum.

Light Source and electronics

1 x LED PLATE 5,5 W 150 mA
Constant Current 150 mA
100~240V 50/60Hz

Packaging

1 Box 0,2 x 0,2 x 0,1 m
Vol 0,004 m³
Gross weight 0,8 Kg Net weight 0,5 Kg

LED IP20

1155



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2050 lm
F

/3 _ 3500 K - 2013,4 lm
G

CRI >90

Control

1155 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

1 x LED PLATE 18,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,45 x 0,45 x 0,15 m
Vol 0,03 m³
Gross weight 1,8 Kg Net weight 1,5 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

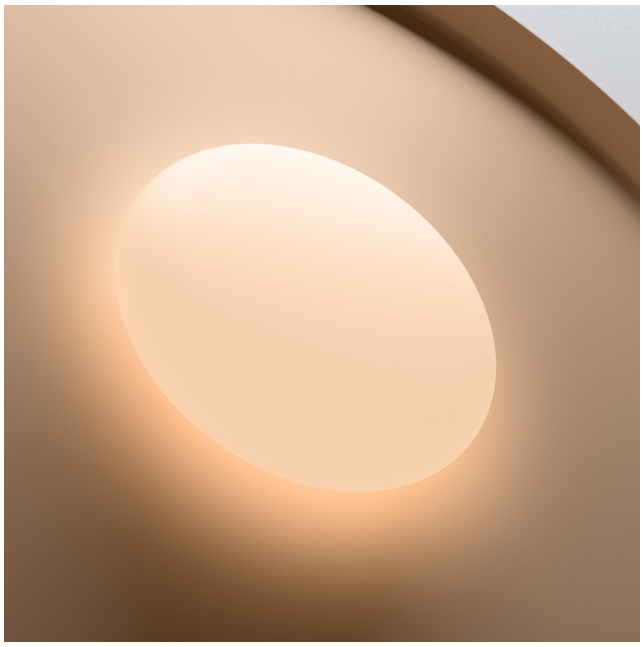



1160



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2880 lm
E

/3 _ 3500 K - 2828,6 lm
F

CRI >90

Control

1160 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

1 x LED PLATE 26,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,65 x 0,65 x 0,15 m
Vol 0,063 m³
Gross weight 3,13 Kg Net weight 2,5 Kg

LED IP20

1170



Finishes

10/ _ _ White
(NCS S 0300-N)
36/ _ _ Soft pink
(NCS S 1010-Y50R)
40/ _ _ Blue L1
(NCS S 3010-B)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 4056,81 lm
F

/3 _ 3500 K - 4243,6 lm
G

CRI >90

Control

1170 _ _ **/** _ _

_ _ **/** _ **A** Push; 1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

3 x LED 13,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 1 x 1 x 0,2 m
Vol 0,02 m³
Gross weight 7,7 Kg Net weight 5,3 Kg

LED IP20

Jazz

Design by Diego Fortunato

Undulating and fluid, Jazz's smooth silhouette is strikingly organic. The gently curved design imparts a playful presence, like an oversized chess piece standing guard.

Floor



1329

Ø 25 x 190 cm

1329



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
45 Blue D1
(NCS S 7010-B10G)

LED Colour Temperature

/1 _ 2700 K - 3736 lm
E
CRI >90

Control

1329 _ _ **/** _ _

_ _ **/ 15** Push
_ _ **/ 1Z** Casambi

Materials

Body: PU- Polyurethane.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 37,2W 1050 mA
Constant Current 1050 mA
100~240Vac 50/60Hz

Packaging

2 Boxes
Total Vol 0,1880 m³
Gross weight 19,8 Kg Net weight 15 Kg

Notes

1329 _ _ / 15: Push Bi-volt
Dimmer on the cable. Electric cable 2,5 m.

IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Flamingo

Design by Antoni Arola

Displaying the elegant poise of the bird that inspired it,
Flamingo projects a feeling of weightlessness hovering overhead.
The deconstructed design separates the LED light source from its
translucent shades, producing gradations of diffuse illumination.

Pendant

1510

Ø 70 cm



1527

Ø 90 cm



1530

Ø 90 cm



1540

Ø 70 cm



1550

Ø 90 cm



1560

Ø 90 cm



1570

Ø 90 cm

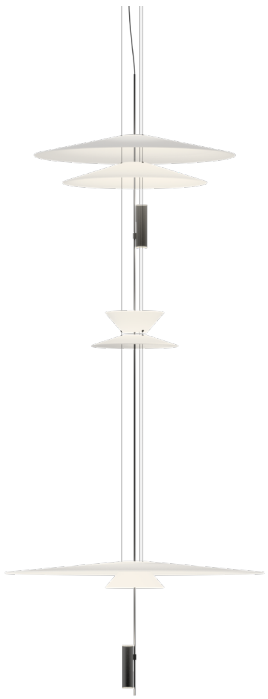

Product specifications subject to change without notice. Please check vibia.com for updated information.

1510



Finishes
18/ _ _ Graphite
(RAL 7016)
20/ _ _ Gold
(Gold)
67/ _ _ Copper
(Copper)
93/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1108,02 lm
/3 _ 3500 K - 1278,8 lm
F
CRI >90

Control
1510 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA .
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics
2 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1320 m³
Gross weight 8,7 Kg Net weight 7,8 Kg

Notes
1510 _ _ / _ 1: DALI-2 Bi-volt
1510 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

1527



Finishes
18/ _ _ Graphite
(RAL 7016)
20/ _ _ Gold
(Gold)
67/ _ _ Copper
(Copper)
93/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1108,02 lm
/3 _ 3500 K - 1278,8 lm
F
CRI >90

Control
1527 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA .
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics
2 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,12 x 0,80 x 0,79 m
Vol 0,0634 m³
Gross weight 4,1 Kg Net weight 3,69 Kg

Notes
1527 _ _ / _ 1: DALI-2 Bi-volt
1527 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

1530



Finishes
18/ _ _ Graphite
(RAL 7016)
20/ _ _ Gold
(Gold)
67/ _ _ Copper
(Copper)
93/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
CRI >90

Control
1530 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA .
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics
3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,1520 m³
Gross weight 10 Kg Net weight 7 Kg

Notes
Extra cable length.

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

1540



Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 554,01 lm
/3 _ 3500 K - 639,4 lm
F
CRI >90

Control
1540 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics
1 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0620 m³
Gross weight 6 Kg Net weight 4 Kg

Notes
1540 _ _ / _ 1: DALI-2 Bi-volt
1540 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

1550



Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
CRI >90

Control
1550 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics
3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,1520 m³
Gross weight 11,3 Kg Net weight 8,8 Kg

Notes
Extra cable length.

LED IP20

1560



Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1662,03 lm
/3 _ 3500 K - 1918,2 lm
F
CRI >90

Control
1560 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA.
Body: Aluminum.
Canopy and rods: Steel.

Light Source and electronics
3 x LED 5,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,1860 m³
Gross weight 12,7 Kg Net weight 10,2 Kg

Notes
Extra cable length.

LED IP20

1570

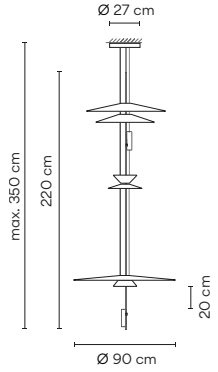

Finishes
18/ _ _ Graphite (RAL 7016)
20/ _ _ Gold (Gold)
67/ _ _ Copper (Copper)
93/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 2216,04 lm
/3 _ 3500 K - 2557,6 lm
F
CRI >90

Control
1570 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **B** Push; 1-10V
_ _ **/** _ **Z** Casambi

Materials
Diffuser: PMMA . Shade: PMMA.
Body: Aluminum. Canopy and rods: Steel.

Light Source and electronics
4 x LED 5,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1633 m³
Gross weight 10 Kg Net weight 8,64 Kg

Notes
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Flamingo Mini

Design by Antoni Arola

Flamingo Mini creates multi-layered silhouettes with an avant-garde, intriguing aesthetic. This hanging lamp recalls a bird hovering overhead, bringing an intimate ambience as it casts diffuse gradations of soothing light through its translucent diffuser.

Pendant

1575
Ø 45 cm

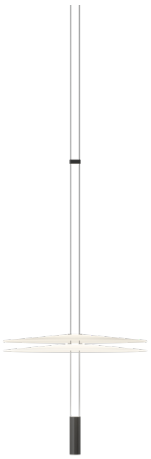

1580
Ø 9 cm



1585
Ø 45 cm

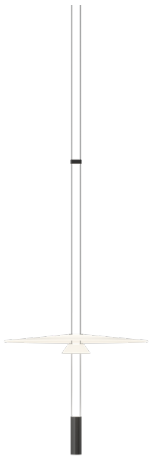

1590
Ø 45 cm

Option A



Option B



Option C



Three options of installation

1575

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 726 lm
E
CRI >90

Control
1575 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi



Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m^3
Gross weight 5,5 Kg Net weight 4 Kg

Notes
1575 _ _ / 11: DALI-2 Bi-volt
1575 _ _ / 1B: Push; 1-10V Bi-volt
Additional cable length personalisation

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

1580



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 726 lm
E
CRI >90

Control
1580 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,068 x 0,068 x 1,25 m
Box 2: 0,20 x 0,21 x 0,13 m
Total Vol 0,0112 m³
Gross weight 4 Kg Net weight 3 Kg

Notes
1580 _ _ / 11: DALI-2 Bi-volt
1580 _ _ / 1B: Push; 1-10V Bi-volt
Additional cable length personalisation

LED IP20

1585



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 726 lm
E
CRI >90

Control
1585 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
2 x LED 3W 175 mA
Constant current 350 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,25 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0478 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes
1585 _ _ / 11: DALI-2 Bi-volt
1585 _ _ / 1B: Push; 1-10V Bi-volt
Additional cable length personalisation

LED IP20

Flamingo Mini

1160 | 10 | /1 | A | _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

1590

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1152 lm
E
CRI >90

Control
1590 _ _ / _ _

_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi



Select Eletrical connection



Surface Built-in XS

_10 Surface
_23 Built-in XS

Materials
Diffuser: PMMA.
Rods: Stainless steel.
Body: Aluminum.
Canopy: ABS.

Light Source and electronics
3 x LED COB 3W 185 mA
Constant Current 550 mA
110~240Vac 50/60Hz

Packaging
2 Boxes
Box 1: 0,07 x 0,07 x 1,60 m
Box 2: 0,51 x 0,51 x 0,16 m
Total Vol 0,0494 m³
Gross weight 6,5 Kg Net weight 5 Kg

Notes
1590 _ _ / 11: DALI-2 Bi-volt
1590 _ _ / 1B: Push; 1-10V Bi-volt
Additional cable length personalisation

LED IP20

Select Eletrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

_23
Built-in XS



Ø 8 cm
height 6 cm

black finish.

Regular ceiling

_10
Surface



Ø 16 cm

black finish.

Built-in



Product specifications subject to change without notice. Please check vibia.com for updated information.



Pin

Design by Ichiro Iwasaki

A timeless proposal from Japanese designer Ichiro Iwasaki, the Pin is both classic and contemporary. Characterised by a graceful stem and subtle, functional expression, it is small in scale but with exceptional lighting efficiency.

Table

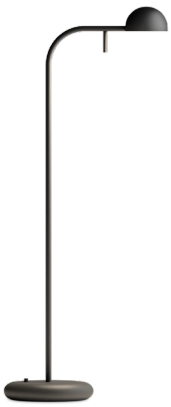

1650

23 x 55 cm



1655

40 x 55 cm

1650



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 485 lm
E

CRI >90

Control

1650 _ _ **/ 10** On/ Off

Materials

Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,174 x 0,212 x 0,713 m
Vol 0,0212 m^3
Gross weight 2,94 Kg Net weight 2 Kg

Notes

Switch on the base. Electric cable 3 m

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



1160 | 10 | /1 | A
Model
Finish
LED Colour Temperature
Control

1655



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1655 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,20 x 0,357 x 0,67 m
Vol 0,0480 m^3
Gross weight 3,68 Kg Net weight 2,2 Kg

Notes
Switch on the base. Electric cable 3 m

LED IP20 Bi-volt

Floor

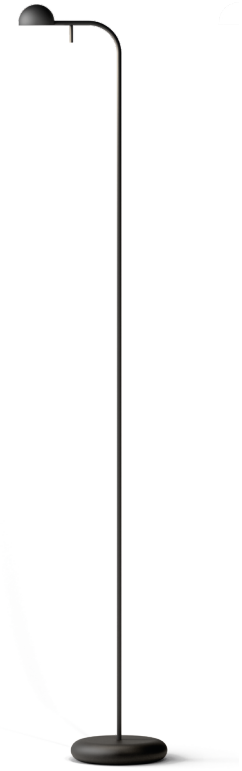

1660
25 x 125 cm

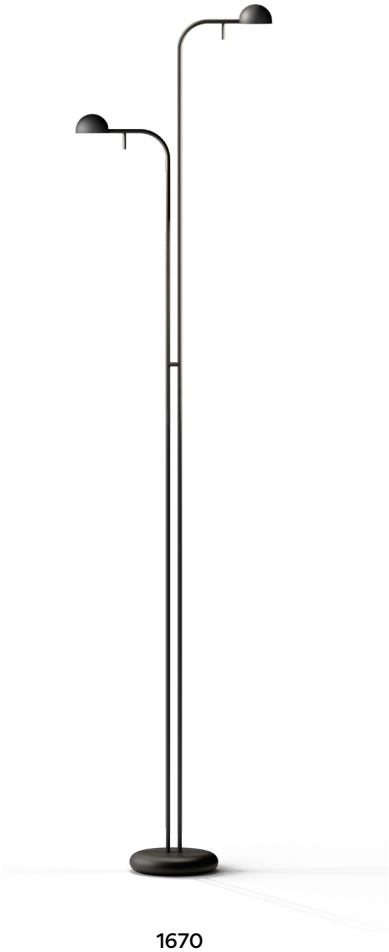

1670
35 x 143 cm

1660



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E

CRI >90

Control
1660 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,149 x 0,265 x 0,33 m
Vol 0,1310 m^3
Gross weight 7,45 Kg Net weight 3,8 Kg

Notes
Switch on the cable. Electric cable 3 m

LED IP20 Bi-volt

 Product specifications subject to change without notice. Please check vibia.com for updated information.



1670

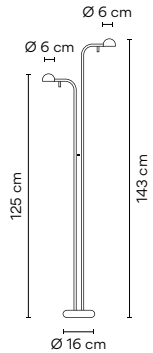

Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1670 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rods: Steel.

Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 1,496 x 0,265 x 0,33 m
Vol 0,1310 m^3
Gross weight 8,25 Kg Net weight 4,6 Kg

Notes
Switch on the cable. Electric cable 3 m

LED IP20 Bi-volt

Wall



ø 10 cm
1675 62



Ø 10 cm
1675 11



Ø 10 cm
1675 58



Ø 10 cm
1675 23



25 x 39 cm
1680



30 x 70 x 8 cm
1685



30 x 70 x 8 cm
1686



Ø 10 x 40 x 8 cm
1690



Ø 10 x 70 x 8 cm
1692



70 x 40 x 8 cm
1694

1675



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1675 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,193 x 0,148 x 0,161 m
Vol 0,0046 m^3
Gross weight 0,85 Kg Net weight 0,6 Kg

Notes
Switch on the wall plate

LED IP20 Bi-volt

1680



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1680 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m^3
Gross weight 1,745 Kg Net weight 1 Kg

Notes
Switch on the wall plate

LED IP20 Bi-volt

1685



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1685 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m^3
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes
Switch on the wall plate

LED IP20

1686



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1686 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,0620 m³
Gross weight 2,64 Kg Net weight 1,2 Kg

Notes
Switch on the wall plate

LED IP20

1690



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1690 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,146 x 0,355 x 0,473 m
Vol 0,0250 m³
Gross weight 1,545 Kg Net weight 0,8 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

1692



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90

Control
1692 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,44 Kg Net weight 1 Kg

LED IP20 Bi-volt

1694



Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
58/ _ _ Cream
(NCS S 2005-Y20R)
62/ _ _ Green
(NCS S 3010-G20Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 970 lm
E
CRI >90

Control
1694 _ _ **/ 10** On/ Off

Materials
Head: Aluminum. Base: Zinc Alloy.
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics
2 x LED 4,5 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,177 x 0,445 x 0,792 m
Vol 0,620 m³
Gross weight 2,84 Kg Net weight 1,4 Kg

LED IP20

Offset

Design by Xuclà

Offset combines intuitive lighting with an industrial, geometric silhouette. A complementary system of superficial ceiling, wall and floor fixtures, the collection integrates five lighting effects with advanced colour and temperature regulation for a carefully curated atmosphere.

Ceiling - Accent Downlight



1720
15 x 4 x 7 cm



1722
25 x 4 x 7 cm



1725
15 x 15 x 7 cm



1727
15 x 15 x 7 cm

1720
UGR <20



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control

1720 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

1 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,10 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 1 Kg Net weight 0,4 Kg

LED IP20



ø 0,7 m 331 lx
Ø 1,4 m 83 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

1722



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1353 lm
/2 _ 3000 K - 1413 lm
/3 _ 3500 K - 1467 lm

E

CRI >90

Control

1722 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

3 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,10 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 1,1 Kg Net weight 0,6 Kg

LED IP20



H = 1,5 m

H = 3 m

d 0,7 m x D 0,77 m 987 lx
d 1,4 m x D 1,45 m 250 lx

1725



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 902 lm
/2 _ 3000 K - 942 lm
/3 _ 3500 K - 978 lm

E

CRI >90

Control

1725 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,20 x 0,21 x 0,13 m
Vol 0,005 m³
Gross weight 1,2 Kg Net weight 0,6 Kg

LED IP20



H = 1,5 m

H = 3 m

d 0,7 m x D 0,73 m 659 lx
d 1,4 m x D 1,42 m 167 lx

1727



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 902 lm
/2 _ 3000 K - 942 lm
/3 _ 3500 K - 978 lm

E

CRI >90

Control

1727 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,20 x 0,21 x 0,13 m
Vol 0,005 m³
Gross weight 1,2 Kg Net weight 0,6 Kg

LED IP20



d 0,7 m x D 0,73 m 659 lx
d 1,4 m x D 1,42 m 167 lx



Product specifications subject to change without notice. Please check vibia.com for updated information.

Ceiling - High Comfort Diffuser



1728
40 x 4 x 7 cm



1730
65 x 4 x 7 cm

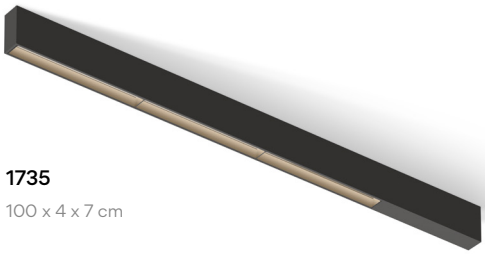

1735
100 x 4 x 7 cm



1740
31 x 15 x 7 cm



1745
31 x 15 x 7 cm

1728
UGR <21



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm

F

CRI >90

Control

1728 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials
Body: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz
Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging
1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20

1730
UGR <24



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1842 lm - 2150 lm

F

CRI >90

Control

1730 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4W 650mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,8W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m^3
Gross weight 2,1 Kg Net weight 1,4 Kg

LED IP20

1735

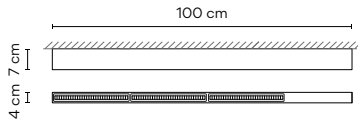

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5022 lm
/2 _ 3000 K - 5199 lm
/3 _ 3500 K - 5373 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
2763 lm - 3225 lm

F

CRI >90

Control

1735 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,1 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 31,2 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m^3
Gross weight 2,9 Kg Net weight 1,8 Kg

LED IP20

1740
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm
F

CRI >90

Control

1740 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20

1745
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm
F

CRI >90

Control

1745 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20

Ceiling - Linear High Efficiency Low Glare



1729
40 x 4 x 7 cm



1732
65 x 4 x 7 cm

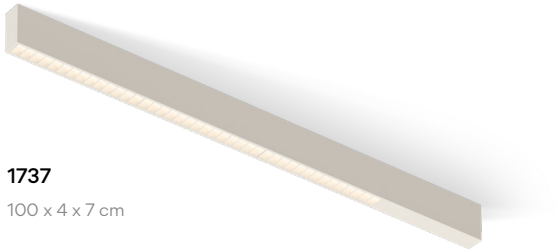

1737
100 x 4 x 7 cm



1742
32 x 15 x 7 cm



1747
31 x 15 x 7 cm

1729
UGR <18



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1842 lm - 2150 lm

F

CRI >90

Control

1729 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20



d 1,4 m x D 1,5 m — 418 lx
d 2,8 m x D 3 m — 104 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

1732
UGR <20



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1842 lm - 2150 lm

F

CRI >90

Control

1732 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,8 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m³
Gross weight 2,1 Kg Net weight 1,4 Kg

LED IP20



d 1,4 m x D 1,5 m 836 lx
d 2,8 m x D 3 m 209 lx

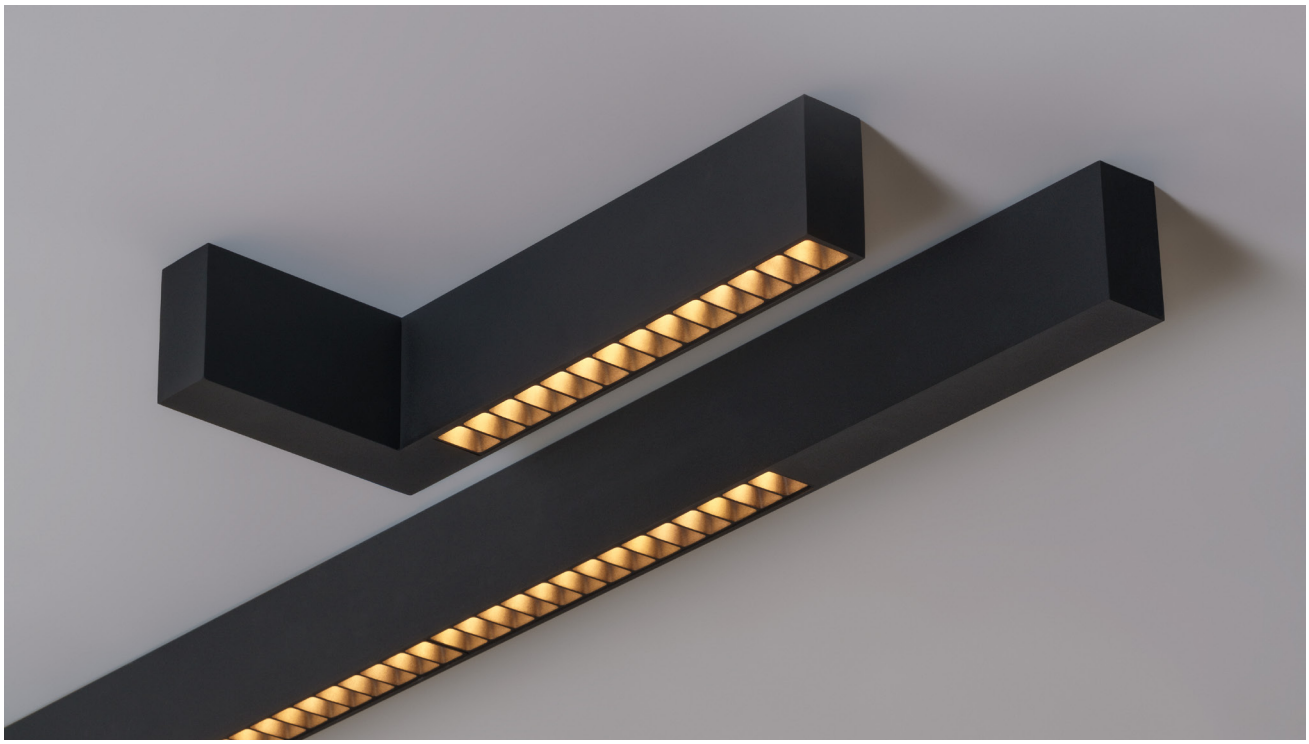

1737
UGR <20

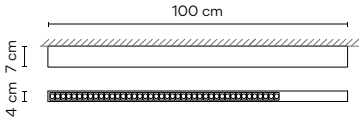

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5022 lm
/2 _ 3000 K - 5199 lm
/3 _ 3500 K - 5373 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
2763 lm - 3225 lm

F

CRI >90

Control

1737 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,1 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 31,2 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009198 m^3
Gross weight 2,9 Kg Net weight 1,8 Kg

LED IP20



d 1,4 m x D 1,8 m 1254 lx
d 2,8 m x D 3,6 m 312 lx

1742



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm

F

CRI >90

Control

1742 _ _ **/** _ _

_ _ / _ **1**	DALI-2
_ _ / _ **5**	Push
_ _ / _ **Z**	Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

1747



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
921 lm - 1075 lm

F

CRI >90

Control

1747 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,42 x 0,29 x 0,10 m
Vol 0,01218 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

Ceiling - Flat Diffuser



1755
125 x 4 x 7 cm

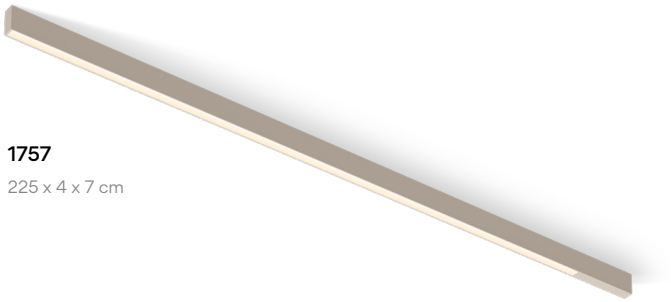

1757
225 x 4 x 7 cm

1755

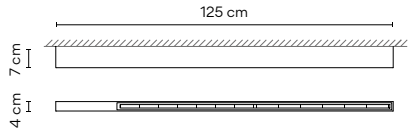

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
1751,96 lm - 2395,6 lm

F

CRI >90

Control

1755 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi
- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,6 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,1 x 0,106 x 1,5 m
Vol 0,016 m^3
Gross weight 3,5 Kg Net weight 2,1 Kg

LED IP20

1757

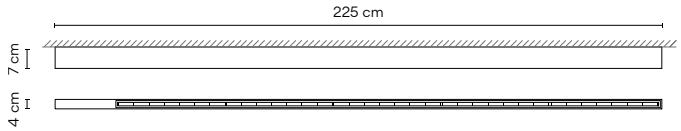

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm

E

Tunable White
/8 _ (2200 K - 4000 K)
3503,92 lm - 4791,2 lm

F

CRI >90

Control

1757 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **5**	Push
_ _ **/** _ **Z**	Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 41,2 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 41,3 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 6,0 Kg Net weight 3,5 Kg

LED IP20

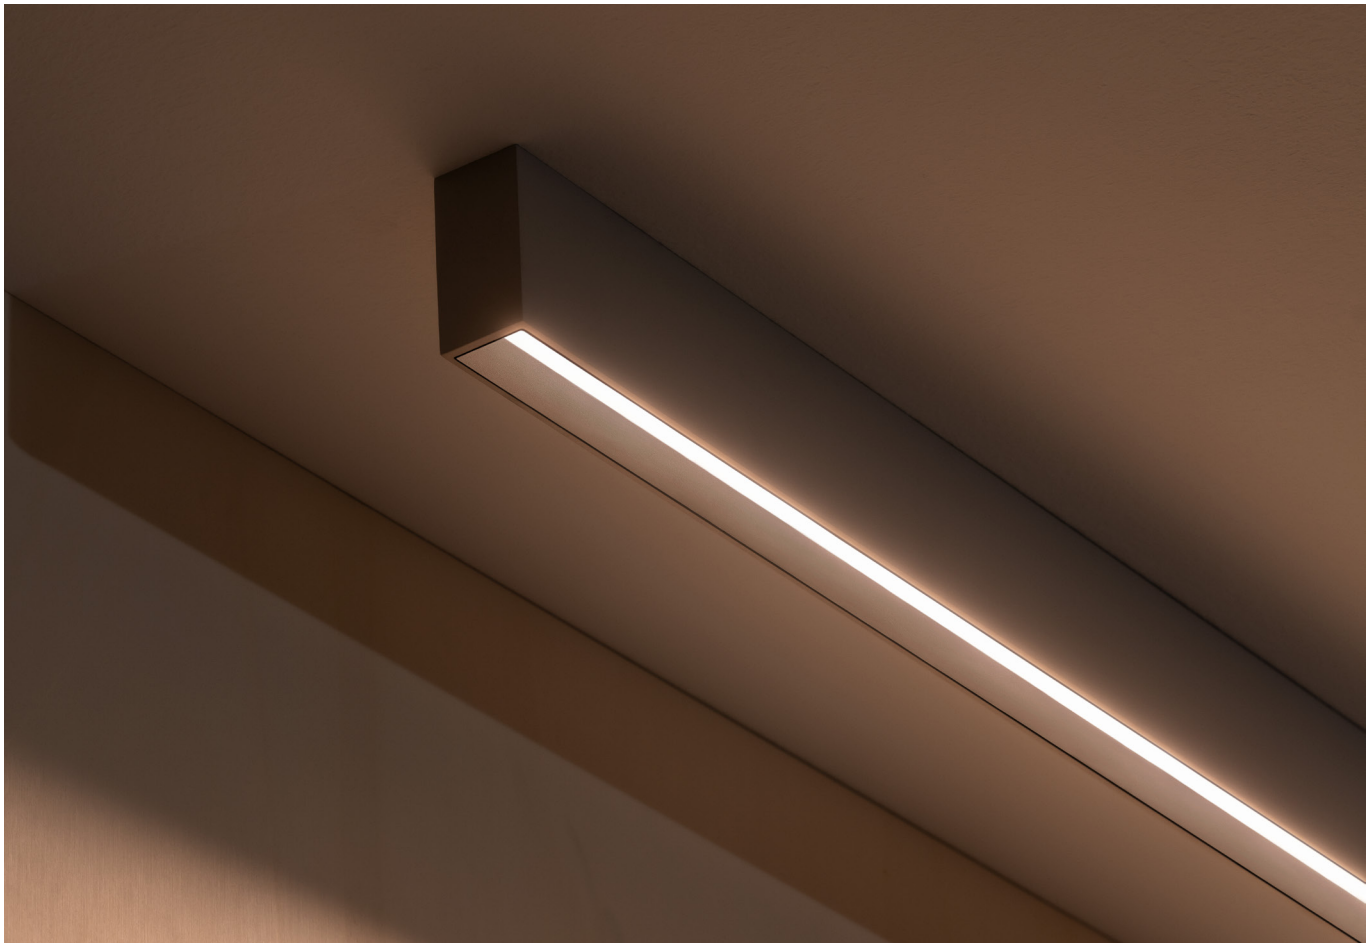

Ceiling Wall - Colour Mood Grazer



Right Left
1760 1762
7 x 125 x 5 cm



Right Left
1765 1767
7 x 225 x 5 cm

1760
Right

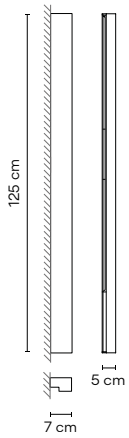

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/A _ Infinite Colour (TW + RGB)
1572 lm - 1940 lm
70 lm (RED)
182 lm (GREEN)
35 lm (BLUE)
E
CRI >90

Control
1760 _ _ / _ **Y** ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics
1 x LED STRIP 17,2W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20

1762
Left

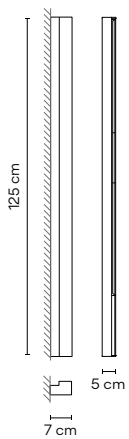

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/A _ Infinite Colour (TW + RGB)
1572 lm - 1940 lm
70 lm (RED)
182 lm (GREEN)
35 lm (BLUE)
E
CRI >90

Control
1762 _ _ / _ **Y** ProtoPixel*

Materials
Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics
1 x LED STRIP 17,2 W
Constant Voltage 24 VDC
110~240V 50/60Hz

Packaging
1 Box 0,117 x 0,125 x 1,3 m
Vol 0,020 m³
Gross weight 4,0 Kg Net weight 2,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20

1765
Right

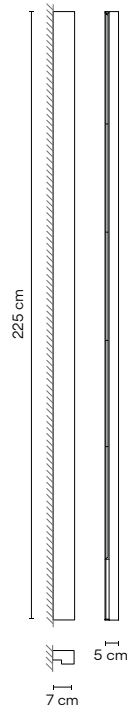

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/A _ Infinite Colour (TW + RGB)
3880 lm - 3144 lm
140 lm (RED)
364 lm (GREEN)
70 lm (BLUE)

E

CRI >90

Control

1765 _ _ **/** _ **Y** ProtoPixel*

Materials

Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics

1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
110~240V 50/60Hz

Packaging

1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 7,5 Kg Net weight 5,0 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20

1767
Left

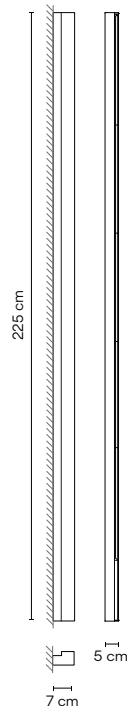

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/A _ Infinite Colour (TW + RGB)
3880 lm - 3144 lm
140 lm (RED)
364 lm (GREEN)
70 lm (BLUE)

E

CRI >90

Control

1767 _ _ **/** _ **Y** ProtoPixel*

Materials

Diffuser: PC- Polycarbonate.
Lens: PMMA.

Light Source and electronics

1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,1 x 0,106 x 2,3 m
Vol 0,024 m³
Gross weight 7,5 Kg Net weight 5,0 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20

Wall - Up&Down Surface Grazer

1770
7 x 8 x 4 cm



1772
7 x 100 x 4 cm

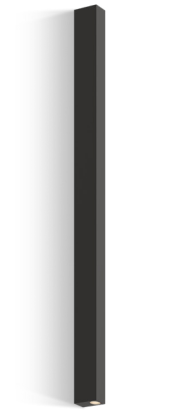

1774
7 x 160 x 4 cm

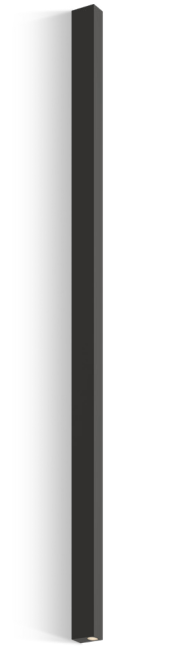

1770



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control

1770 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **5** Push (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,15 x 0,095 x 0,09 m
Vol 0,0013 m^3
Gross weight 0,7 Kg Net weight 0,3 Kg

LED IP20

1772



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control

1772 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant current 250 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,08 x 1,095 m
Vol 0,0091 m³
Gross weight 2,6 Kg Net weight 1,5 Kg

LED IP20

1774



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm

E

CRI >90

Control

1774 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2 x LED 2,9 W 250 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,117 x 0,125 x 2 m
Vol 0,029 m³
Gross weight 4,1 Kg Net weight 2,3 Kg

LED IP20





Floor

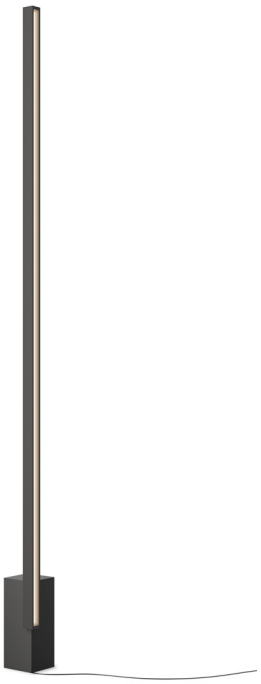

1780
14 x 218 cm

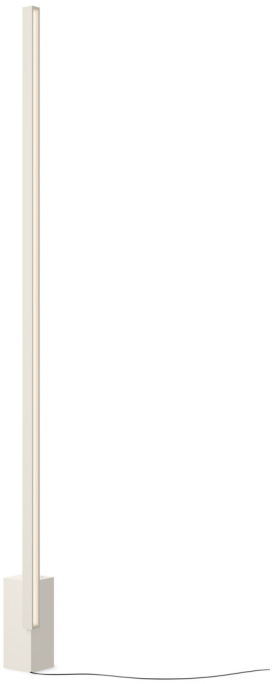

1780
14 x 218 cm

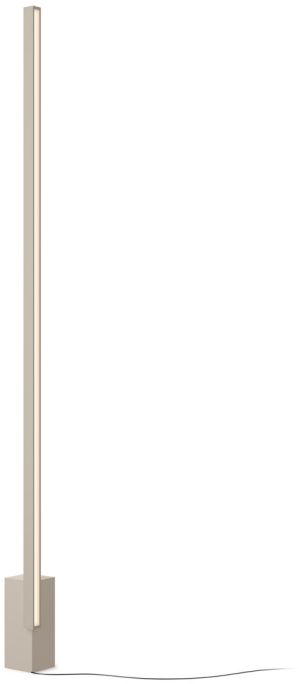

1780
14 x 218 cm

1780



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/A _ Infinite Colour (TW + RGB)
3880 lm - 3144 lm
140 lm (RED)
364 lm (GREEN)
70 lm (BLUE)

E

CRI >90

Control

1780 _ _ / _ **Y** ProtoPixel*
(also with push buttons)

Materials

Body: Aluminum.

Light Source and electronics

1 x LED STRIP 35,4 W
Constant Voltage 24 VDC
220~240V 50/60Hz

Packaging

1 Box 0,60 x 0,68 x 2,2 m
Vol 0,9 m³
Gross weight 7,0 Kg Net weight 4,3 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 Dimmer

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendant

Height 70 cm



Ø 37 cm

1800



Ø 54,5 cm

1815

Height 110 cm



Ø 37 cm

1805



Ø 54,5 cm

1820



Ø 82,5 cm

1830



Ø 124 cm

1840

Height 190 cm



Ø 37 cm

1810



Ø 54,5 cm

1825



Ø 82,5 cm

1835



Ø 124 cm

1845

Product specifications subject to change without notice. Please check vibia.com for updated information.

Height 70 cm



Ø 54,5 cm

1850

Height 110 cm



Ø 54,5 cm

1855



Ø 82,5 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 54,5 cm

1860



Ø 82,5 cm

1870



Ø 124 cm

1880

1800



Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2662 lm

D

CRI >90

Control

1800 _ _ / _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7 Kg Net weight 4,8 Kg

Notes

1800 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1805



Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2662 lm

D

CRI >90

Control

1805 _ _ / _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,3 Kg Net weight 5,1 Kg

Notes

1805 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1810

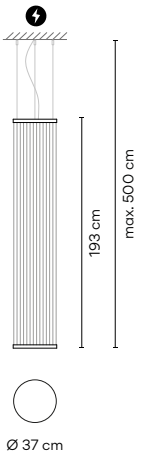

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 2662 lm
D
CRI >90

Control
1810 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,6 Kg Net weight 5,4 Kg

Notes
1810 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1815



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control
1815 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,4 Kg Net weight 6,2 Kg

Notes
1815 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1820

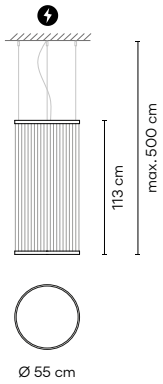

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm

D

CRI >90

Control

1820 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg

Notes

1820 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1825

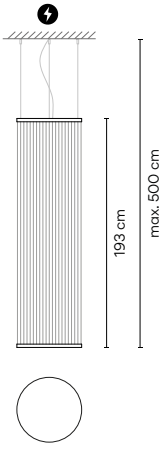

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm

D

CRI >90

Control

1825 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg

Notes

1825 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

1830

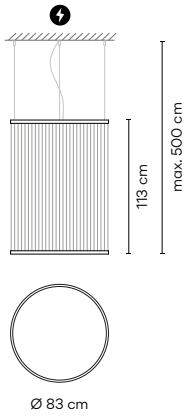

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control
1830 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 13,5 Kg Net weight 9,5 Kg

Notes
1830 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1835

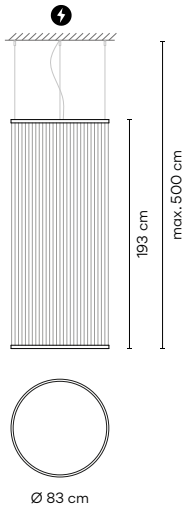

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control
1835 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 14,1 Kg Net weight 10,1 Kg

Notes
1835 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1840

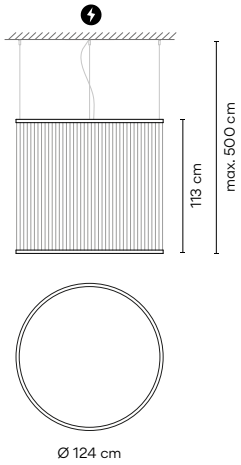

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 9196 lm

D

CRI >90

Control

1840 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19 Kg Net weight 13 Kg

Notes

1840 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1845

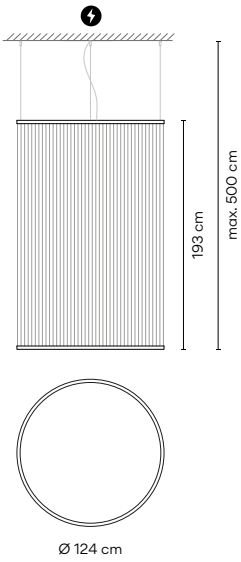

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 9196 lm

D

CRI >90

Control

1845 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19,9 Kg Net weight 13,9 Kg

Notes

1845 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1850



Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control
1850 _ _ / _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 7,9 Kg Net weight 5,7 Kg

Notes
1850 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1855

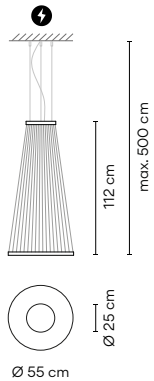

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control
1855 _ _ / _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,3 Kg Net weight 6,1 Kg

Notes
1855 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1860

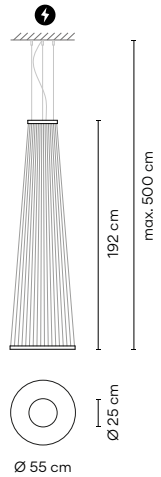

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3993 lm

D

CRI >90

Control

1860 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,7 Kg Net weight 6,5 Kg

Notes

1860 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1865

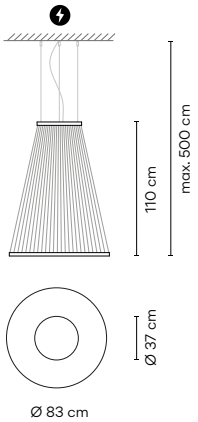

Finishes (threads)

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 6050 lm

D

CRI >90

Control

1865 _ _ **/** _ _

- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)

Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging

1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg

Notes

1865 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1870

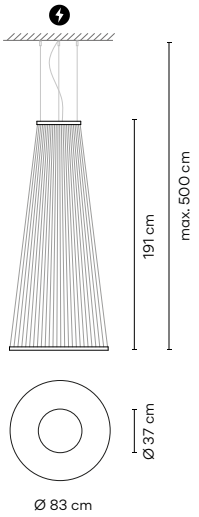

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control
1870 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 12,4 Kg Net weight 9,4 Kg

Notes
1870 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1875

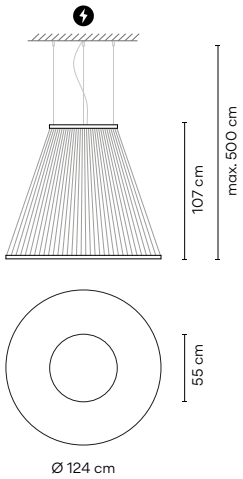

Finishes (threads)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90

Control
1875 _ _ **/** _ _
- _ _ **/ 13** 1-10V
- _ _ **/ 1D** Push; DALI-2
- _ _ **/ 1Z** Casambi

Finishes (rings and canopy)
Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 15,9 Kg Net weight 11,9 Kg

Notes
1875 _ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendants

1880

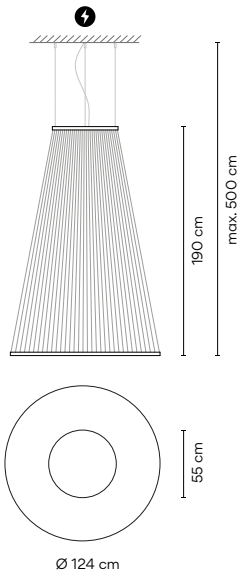

Finishes (threads)
- **24/ _ _** Beige M1 (NCS S 2005-Y50R)
- **37/ _ _** Terra Red (NCS S4040-Y70R)
- **47/ _ _** Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90

Control
1880 _ _ / _ _
- **_ _ / 13** 1-10V
- **_ _ / 1D** Push; DALI-2
- **_ _ / 1Z** Casambi

Finishes (rings and canopy)
Black (NCS S 8500-N)

Select Eletrical connection



Surface | Built-in S | Remote Micro

_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 16,8 Kg Net weight 12,8 Kg

Notes
1880_ _ / _ 13: 1-10V Multi-volt
Extra cable length.

LED IP20

Select Eletrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_24
Built-in S



Ø 12 cm
height 6 cm

black finish.

Regular ceiling

_10
Surface



Ø 25,5 cm
height 4,5 cm

black finish.

Ø 37,5 cm
height 4,5 cm

black finish.

Remote



Built-in



Product specifications subject to change without notice. Please check vibia.com for updated information.



Funnel

A gentle presence with a distinctly sculptural form, Funnel is a study in materiality, light and space.

Ceiling Wall

2012
Ø 22 cm



2013
Ø 35 cm



2014
Ø 50 cm



2012



Ø 22 cm

2013



Ø 35 cm

2012





Finishes

10/ _ _ White
(NCS S 0300-N)

36/ _ _ Soft Pink
(NCS S 1010-Y50R)

47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 631,7 lm
E
CRI >80

/2 _ 3000 K - 649 lm
E
CRI >80

/3 _ 3500 K - 655,4 lm
F
CRI >90

Control

2012 _ _ **/** _ **0** On/ Off

Finishes

51/ _ _ Gold leaf
(Gold leaf)

LED Colour Temperature

/1 _ 2700 K - 631,7 lm
E
CRI >80

/2 _ 3000 K - 649 lm
E
CRI >80

/3 _ 3500 K - 655,4 lm
F
CRI >90

Control

2012 51 / _ 0 On/ Off

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

1 x LED PLATE 6,3 W 350 mA
Constant Current 350 mA
100-240V 50/60Hz

Packaging

1 Box 0,27 x 0,27 x 0,16 m
Vol 0,0116 m^3
Gross weight 0,892 Kg Net weight 0,45 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2013





Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2580 lm
E
CRI >80

/2 _ 3000 K - 2580 lm
E
CRI >90

/3 _ 3500 K - 2580 lm
F
CRI >90

Control

2013 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Finishes

- **51/** _ _ Gold leaf (Gold leaf)

LED Colour Temperature

/1 _ 2700 K - 2580 lm
E
CRI >80

/2 _ 3000 K - 2580 lm
E
CRI >90

/3 _ 3500 K - 2580 lm
F
CRI >90

Control

2013 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m^3
Gross weight 2,53 Kg Net weight 2 Kg

LED IP20

2014



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2580 lm
E
CRI >80

/2 _ 3000 K - 2580 lm
E
CRI >80

/3 _ 3500 K - 2580 lm
F
CRI >90

Control

2014 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Shade: Aluminum.
Reflector: Aluminum.
Support: Steel.

Light Source and electronics

6 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m^3
Gross weight 3,782 Kg Net weight 3,3 Kg

LED IP20

Rhythm Horizontal

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

Pendant

Stick 47 cm



2110
45 x 47 cm



2111
93 x 47 cm



2112
141 x 47 cm



2113
189 x 47 cm

Stick 87 cm



2120
63 x 87 cm

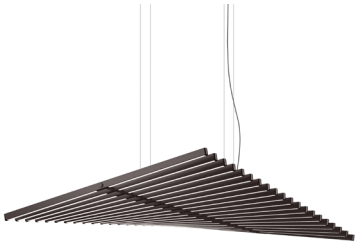

2121
131 x 87 cm

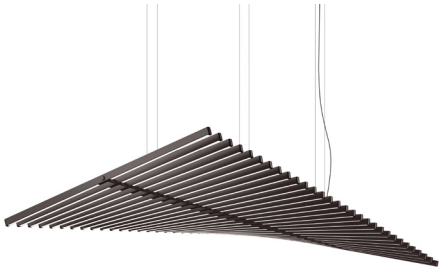

2122
199 x 87 cm

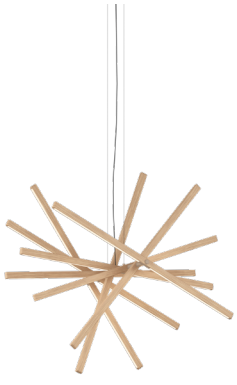

2155
49 x 87 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique.
Personalise your own
Rhythm composition
quick and easy.






2110



Finishes

14/ _ _ Chocolate
(RAL 8019)

58/ _ _ Off-White
(RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 4332 lm
/3 _ 3500 K - 4578 lm

D

CRI >90

Control

2110 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials

Stick: PA- Polyamide.
Diffuser: PC- Polycarbonate.
Canopy: Steel.

Light Source and electronics

10 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0591 m^3
Gross weight 7,7 Kg Net weight 6 Kg

Notes

2110 _ _ / _ 1: DALI-2 Multi-volt
2110 _ _ / _ 3: 1-10V Multi-volt

219114 Built-in accesory
(96 mm) chocolate

219158 Built-in accesory
(96 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20

Ø 18,5 cm Only for built-in

2111



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm
D
CRI >90

Control

2111 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1570 m³
Gross weight 14,2 Kg Net weight 10,5 Kg

Notes

2111 _ _ / _ 1: DALI-2 Multi-volt
2111 _ _ / _ 3: 1-10V Multi-volt

219114 Built-in accesory (96 mm) chocolate

219158 Built-in accesory (96 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UKCA EAC

Ø 18,5 cm Only for built-in

2112



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 12996 lm
/3 _ 3500 K - 13736 lm
D
CRI >90

Control

2112 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0430 m³
Gross weight 10,3 Kg Net weight 7 Kg

Notes

2112 _ _ / _ 1: DALI-2 Multi-volt
2112 _ _ / _ 3: 1-10V Multi-volt

219014 Built-in accesory (44,5 mm) chocolate

219058 Built-in accesory (44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UKCA EAC

Ø 18,5 cm Only for built-in

2113



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 17328 lm
/3 _ 3500 K - 18314 lm
D
CRI >90

Control

2113 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1900 m³
Gross weight 17,2 Kg Net weight 13,5 Kg

Notes

2113 _ _ / _ 1: DALI-2 Multi-volt
2113 _ _ / _ 3: 1-10V Multi-volt

219014 Built-in accesory (44,5 mm) chocolate

219058 Built-in accesory (44,5 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UKCA EAC

Ø 18,5 cm Only for built-in

Product specifications subject to change without notice. Please check vibia.com for updated information.

2120



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 7602 lm
/3 _ 3500 K - 8035 lm
D
CRI >90

Control
2120 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate. Canopy: Steel.

Light Source and electronics
10 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1380 m³
Gross weight 9,5 Kg Net weight 7,3 Kg

Notes
2120 _ _ / _ 1: DALI-2 Multi-volt
2120 _ _ / _ 3: 1-10V Multi-volt

219214 Built-in accesory (136 mm) chocolate

219258 Built-in accesory (136 mm) off-white

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UKCA EAC
Ø 18,5 cm Only for built-in

2121



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 15204 lm
/3 _ 3500 K - 16070 lm
D
CRI >90

Control
2121 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
20 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz

Notes
2 Boxes
Total Vol 0,1664 m³
Gross weight 14,7 Kg Net weight 10,5 Kg

Notes
2121 _ _ / _ 1: DALI-2 Multi-volt
2121 _ _ / _ 3: 1-10V Multi-volt

219014 Built-in accesory (44,5 mm) chocolate

219058 Built-in accesory (44,5 mm) off-white

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UKCA EAC
Ø 18,5 cm Only for built-in

2122



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 22807 lm
/3 _ 3500 K - 24105 lm
D
CRI >90

Control
2122 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
30 x LED STRIP 30V 5,8 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,07120 m³
Gross weight 24 Kg Net weight 21,5 Kg

Notes
2122 _ _ / _ 1: DALI-2 Multi-volt
2122 _ _ / _ 3: 1-10V Multi-volt

219014 Built-in accesory (44,5 mm) chocolate

219058 Built-in accesory (44,5 mm) off-white

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UKCA EAC
Ø 18,5 cm Only for built-in

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

2155
Wood



Finishes
82/ _ _ White oak
83/ _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 5893 lm
/3 _ 3500 K - 6213 lm
D
CRI >90

Control
2155 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Wood. Spacers: Aluminum.
Diffuser: PC-Polycarbonate.
Canopy: Steel.

Light Source and electronics
8 x LED STRIP 5,8 W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Cajas
Total Vol 0,1570 m³
Peso bruto 8,5 Kg Peso neto 6,3 Kg

Notes
2155 _ _ / _ 1: DALI-2 Multi-volt
2155 _ _ / _ 3: 1-10V Multi-volt

219282 Built-in accesory
(136 mm) Beige D1

219283 Built-in accesory
(136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED IP20
Ø 18,5 cm Only for built-in



Rhythm Vertical

Design by Arik Levy

Minimalist in form yet simultaneously complex, Rhythm features slender light modules of varying lengths, each fitted with an LED, that can be arranged in endless configurations. Fluid and flowing or angular and anarchic, the collection offers total freedom of composition.

Pendant

Stick 47 cm

2141



2142

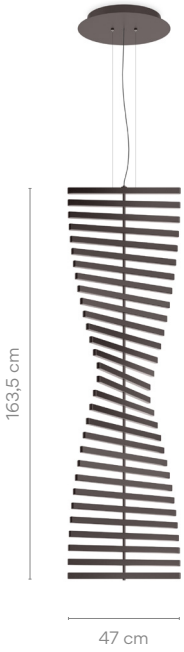

2143

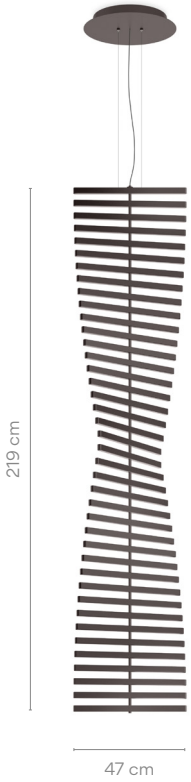

Stick 87 cm



2165

87 x 52,5 cm



2167

87 x 81 cm

Each project is unique. Personalise your own Rhythm composition quick and easy.

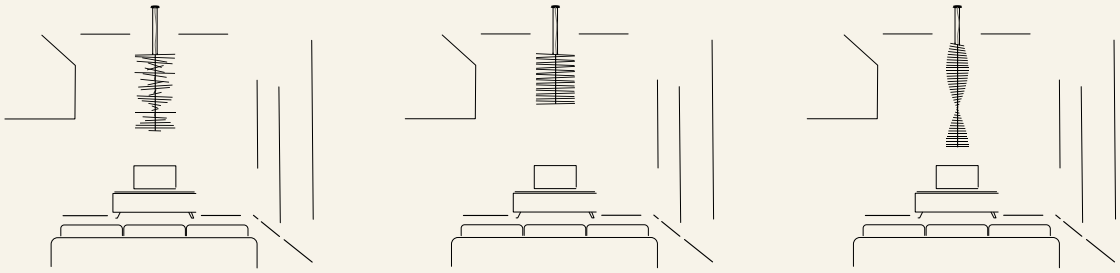

2141



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm

D

CRI >90

Control

2141 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

20 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,5850 m³
Gross weight 10,3 Kg Net weight 7,4 Kg

Notes

2141 _ _ / _ 1: DALI-2 Multi-volt
2141 _ _ / _ 3: 1-10V Multi-volt

14 Built-in accesory (96 mm) chocolate

58 Built-in accesory (96 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK CA EAC

Ø 18,5 cm Only for built-in

2142



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature

/1 _ 2700 K - 12996 lm
/3 _ 3500 K - 13736 lm

D

CRI >90

Control

2142 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics

30 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,6239 m³
Gross weight 13,7 Kg Net weight 8,2 Kg

Notes

2142 _ _ / _ 1: DALI-2 Multi-volt
2142 _ _ / _ 3: 1-10V Multi-volt

219114 Built-in accesory (96 mm) chocolate

219158 Built-in accesory (96 mm) off-white

Surface and built-in fitting.

Extra cable length.

LED IP20 CE UK CA EAC

Ø 18,5 cm Only for built-in

Product specifications subject to change without notice. Please check vibia.com for updated information.

2143



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **58/** _ _ Off-White (RAL D2 1109005)

LED Colour Temperature
/1 _ 2700 K - 8664 lm
/3 _ 3500 K - 9157 lm
D
CRI >90

Control
2143 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Polyamide 6 with 10% of Fiberglass.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
40 x LED STRIP 30V 2,9 W
Constant Voltage 30V
100~240V 50/60Hz

Notes
2 Boxes
Total Vol 0,6600 m³
Gross weight 16,9 Kg Net weight 13 Kg

Notes
2143 _ _ / _ 1: DALI-2 Multi-volt
2143 _ _ / _ 3: 1-10V Multi-volt

14 Built-in accesory (96 mm) chocolate

58 Built-in accesory (96 mm) off-white

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UK CA EAC
Ø 18,5 cm Only for built-in

2165
Madera



Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 5893 lm
/3 _ 3500 K - 6213 lm
D
CRI >90

Control
2165 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Wood. Spacers: Aluminum.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
8 x LED STRIP 5,8W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1570 m³
Gross weight 8,5 Kg Net weight 6,3 Kg

Notes
2165 _ _ / _ 1: DALI-2 Multi-volt
2165 _ _ / _ 3: 1-10V Multi-volt

219282 Built-in accesory (136 mm) Beige D1

219283 Built-in accesory (136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UK CA EAC
Ø 18,5 cm Only for built-in

2167
Madera



Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 11049 lm
/3 _ 3500 K - 11649 lm
D
CRI >90

Control
2167 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
Stick: Wood. Spacers: Aluminum.
Diffuser: Polycarbonate.
Canopy: Steel.

Light Source and electronics
15 x LED STRIP 5,8W 30V
Constant Voltage 30V
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1570 m³
Gross weight 12,6 Kg Net weight 6,6 Kg

Notes
2167 _ _ / _ 1: DALI-2 Multi-volt
2167 _ _ / _ 3: 1-10V Multi-volt

219282 Built-in accesory (136 mm) Beige D1

219283 Built-in accesory (136 mm) Brown D1

Surface and built-in fitting.
Extra cable length.

LED IP20 CE UK CA EAC
Ø 18,5 cm Only for built-in

Guise

Design by Diez Office

Crafted of precision glass and embedded with a row of recessed LEDS, Guise explores the relationship between light and transparency. The light inside the glass appears invisible while the delicately engraved surface radiates an intense glow, the markings beautifully diffusing the light.

Wall

SURFACE



2260

Ø 54 cm

SURFACE



2262

Ø 92 cm

REMOTE



2263

Ø 92 cm

Infinite Colour

2260



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 445 lm
G
CRI >90

Control

2260 18 / 26 Sensor

Materials

Diffuser: Borosilicate.
LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 10 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,69 x 0,69 x 0,09 m
Vol 0,043 m³
Gross weight 7 Kg Net weight 4 Kg

Notes

Electric cable with plug 3 m

LED IP20 Dimmer Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

2262



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 897 lm
G
CRI >90

Control
2262 18 / 26 Sensor

Materials
Diffuser: Borosilicate.
LED support: Aluminum.

Light Source and electronics
1 x LED STRIP 24V 17,2 W.
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 1,04 x 1,04 x 0,10 m
Vol 0,104 m³
Gross weight 16,5 Kg Net weight 11,58 Kg

Notes
Electric cable with plug 3 m

LED IP20 Dimmer Multi-volt

2263



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/A Infinite Colour (TW + RGB)
778 lm - 939 lm
G
CRI >90

Control
2263 18 / AY_ 30
Protopixel* (Remote)
(also with push buttons)

Materials
Diffuser: Borosilicate. LED support: Aluminum.

Light Source and electronics
1 x LED STRIP 24V 17,2 W.
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 1,04 x 1,04 x 0,10 m
Vol 0,104 m³
Gross weight 16,5 Kg Net weight 11,58 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 Dimmer





Pendant

2270



Ø 16 cm

2272



Ø 16 cm

2277

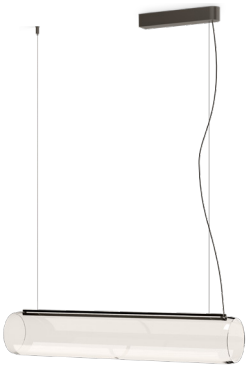

89 cm

2282



Ø 25 cm

2288



Ø 40 cm

2270



Finishes

18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature

/2 _ 3000 K - 1097 lm
G

CRI >90

Control

2270 _ _ **/** _ _

_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2Z** Casambi

Materials

Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,87 x 0,35 x 0,37 m
Vol 0,113 m^3
Gross weight 6,5 Kg Net weight 5 Kg

Notes

2270 _ _ / 21: DALI-2 Multi-volt
2270 _ _ / 26: Sensor Bi-volt
Extra cable length.

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

2272



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 1097 lm
G
CRI >90

Control
2272 _ _ **/ 26** Sensor

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 20 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,45 x 0,80 x 0,20 m
Vol 0,0072 m³
Gross weight 16,10 Kg Net weight 16,10 Kg

Notes
2272 _ _ / 26: Sensor Bi-volt
Extra cable length.

LED IP20

2277



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 1404 lm
G
CRI >90

Control
2277 _ _ **/** _ _
_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 30 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 1,18 x 0,35 x 0,37 m
Vol 0,153 m³
Gross weight 9,5 Kg Net weight 7,5 Kg

Notes
2277 _ _ / 21: DALI-2 Multi-volt
2277 _ _ / 26: Sensor Bi-volt
Extra cable length.

LED IP20 Dimmer

2282



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
G
CRI >90

Control
2282 _ _ **/** _ _
_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,41 x 0,41 x 0,38 m
Vol 0,0639 m³
Gross weight 3,3 Kg Net weight 2,3 Kg

Notes
2282 _ _ / 21: DALI-2 Bi-volt
2282 _ _ / 26: Sensor Bi-volt
2282 _ _ / 2B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

2288



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 868 lm
G
CRI >90

Control
2288 _ _ **/** _ _
_ _ **/ 21** DALI-2
_ _ **/ 26** Sensor
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 18 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,56 x 0,56 x 0,46 m
Vol 0,1443 m³
Gross weight 11,7 Kg Net weight 9,7 Kg

Notes
2288 _ _ / 21: DALI-2 Multi-volt
Extra cable length.

LED IP20

1160 | 10 | /1A
Model | Finish | LED Colour Temperature | Control

Ceiling

2292

Ø 25 cm



2298

Ø 40 cm



2292



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
G
CRI >90

Control
2292 _ _ **/** _ _

_ _ **/ 21** DALI-2
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 12 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,41 x 0,41 x 0,33 m
Vol 0,0555 m³
Gross weight 3,2 Kg Net weight 2,2 Kg

Notes
2292 _ _ / 21: DALI-2 Bi-volt
2292 _ _ / 2B: Push; 1-10V Bi-volt

LED IP20

2298



Finishes
18/ _ _ Graphite
(ADAPTA RF9913WX)

LED Colour Temperature
/2 _ 3000 K - 398 lm
G
CRI >90

Control
2298 _ _ **/** _ _

_ _ **/ 21** DALI-2
_ _ **/ 2B** Push; 1-10V
_ _ **/ 2Z** Casambi

Materials
Diffuser: Borosilicate glass. Body: Aluminum.
LED support: Aluminum. Canopy: Steel.

Light Source and electronics
1 x LED STRIP 24V 18 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging
1 Box 0,56 x 0,56 x 0,46 m
Vol 0,1443 m³
Gross weight 13,3 Kg Net weight 11,3 Kg

Notes
2298 _ _ / 21: DALI-2 Multi-volt

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Halo

Design by Martín Azúa

A seamless merging of light and matter, Halo lends the effect of light floating in the air. Powered by LED bulbs that remain invisible within their opalized, spherical moulds, the light flows freely from its source.

Pendant



2330
Ø 55,5 cm



2331
89 cm
2 Units

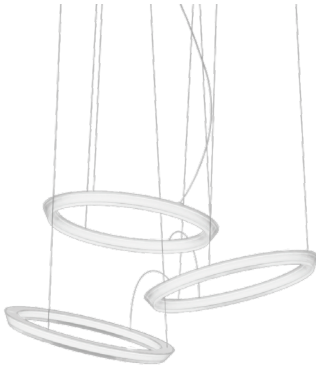

2332
127 cm
3 Units

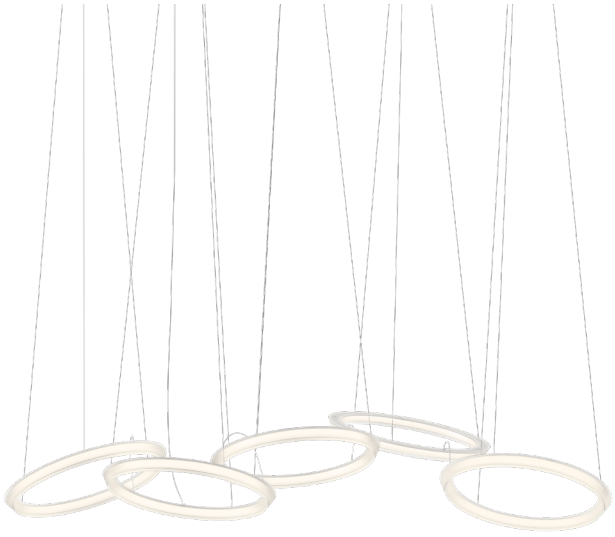

2333
197 cm
5 Units

Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique. Personalise your own Halo composition quick and easy.



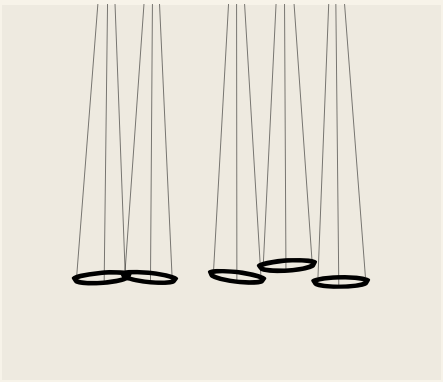
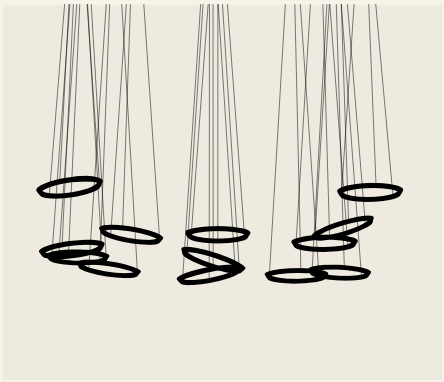

2330



Finishes

03/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1904 lm
CRI >90
/2 _ 3000 K - 1726 lm
CRI >80
D

Control

2330 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials

LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m^3
Gross weight 5,75 Kg Net weight 3,75 Kg

Notes

2330 _ _ / _ 1: DALI-2 Multi-volt
2330 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

2331



Finishes
03/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 3808 lm
CRI >90
/2 _ 3000 K - 3453 lm
CRI >80
D

Control
2331 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel

Light Source and electronics
2 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 10,25 Kg Net weight 6,25 Kg

Notes
2331 _ _ / _ 1: DALI-2 Multi-volt
2331 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

2332



Finishes
03/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 5712 lm
CRI >90
/2 _ 3000 K - 5180 lm
CRI >80
D

Control
2332 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
3 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0972 m³
Gross weight 14,75 Kg Net weight 8,75 Kg

Notes
2332 _ _ / _ 1: DALI-2 Multi-volt
2332 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

2333



Finishes
03/ _ _ White (RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 9520 lm
CRI >90
/2 _ 3000 K - 8633 lm
CRI >80
D

Control
2333 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials
LED support: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
5 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1106 m³
Gross weight 23,75 Kg Net weight 13,75 Kg

Notes
2333 _ _ / _ 1: DALI-2 Multi-volt
2333 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20



Pendant



2340
152 cm
2 Units

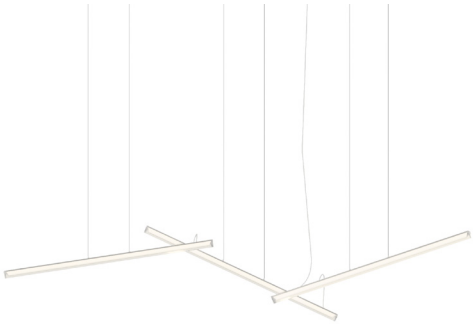

2341
204 cm
3 Units

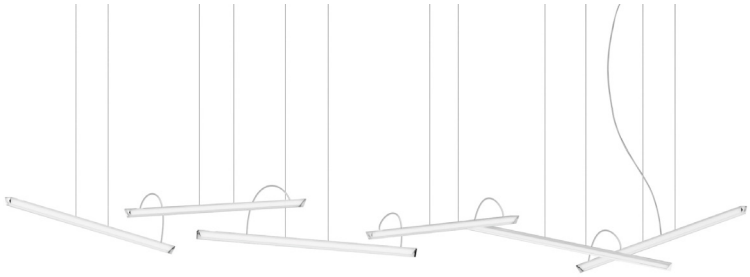

2342
336 cm
6 Units

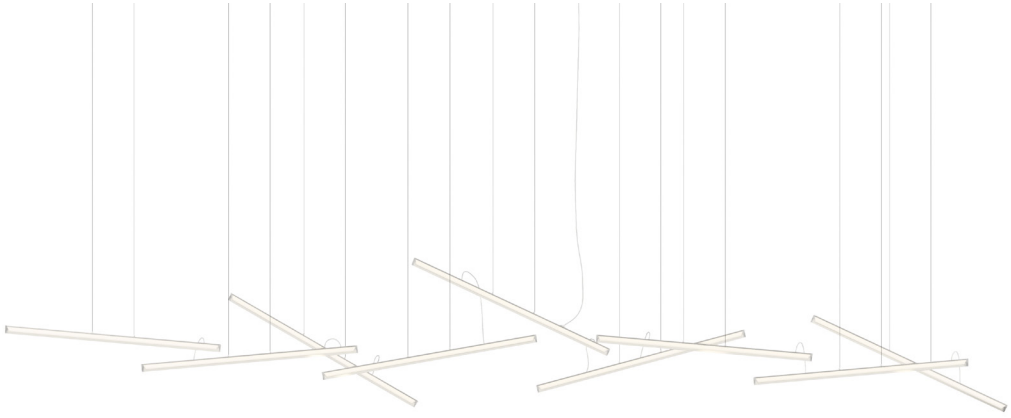

2343
500 cm
9 Units

Each project is unique. Personalise your own Halo composition quick and easy.

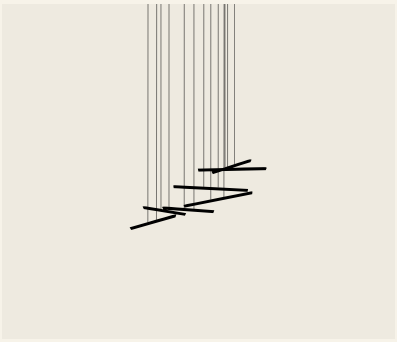
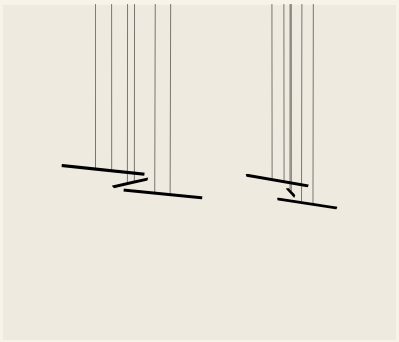
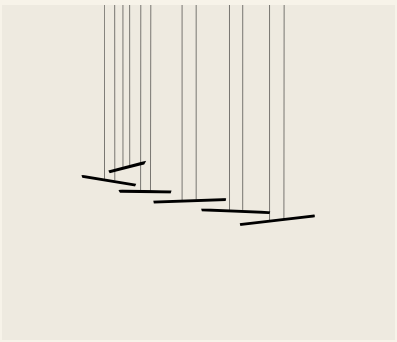
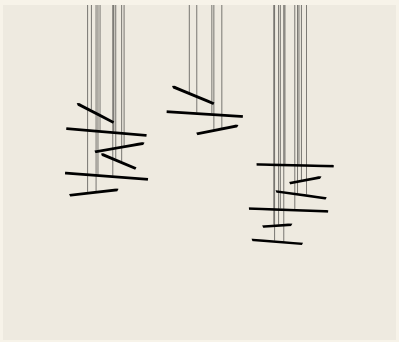

2340

Finishes

03/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 1904 lm
F

/2 _ 3000 K - 1726 lm
G

CRI >90

Control

2340 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi



Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

2 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0753 m³
Gross weight 6,2 Kg Net weight 5,58 Kg

Notes

2340 _ _ / _ 1: DALI-2 Multi-volt
2340 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

2341



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
F
/2 _ 3000 K - 3850 lm
G
CRI >90

Control
2341 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0753 m³
Gross weight 7,3 Kg Net weight 6,57 Kg

Notes
2341 _ _ / _ 1: DALI-2 Multi-volt
2341 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

2342



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 8492 lm
F
/2 _ 3000 K - 7701 lm
G
CRI >90

Control
2342 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
6 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0756 m³
Gross weight 11,8 Kg Net weight 10,25 Kg

Notes
2342 _ _ / _ 1: DALI-2 Multi-volt
2342 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

1160 10 /1A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant

2343



Finishes

03/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 12739 lm
F

/2 _ 3000 K - 11552 lm
G

CRI >90

Control

2343 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface

Remote Micro


Remote XXS

_10 Surface
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

9 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

2 Boxes
Total Vol 0,0756 m³
Gross weight 16,20 Kg Net weight 14,75 Kg

Notes

2343 _ _ / _ 1: DALI-2 Multi-volt
2343 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

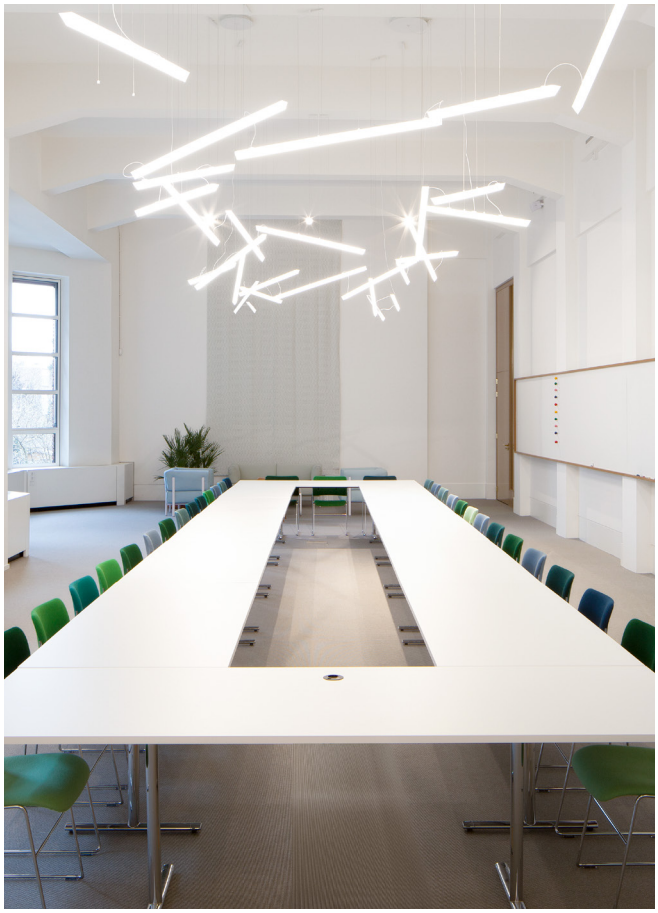



Select Eletrical connection

Choose your preferred installation option according to your needs.

For Ref. 2340, 2341

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

Regular ceiling

_10
Surface



Ø 30,5 cm

match with fixture finish.

For Ref. 2342, 2343

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

Regular ceiling

_10
Surface



Ø 35 cm

match with fixture finish.

Remote



Built-in



Wall



2360

102,5 x 5,7 cm

2360



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **13/** _ _ Off-White (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control

2360 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** _ **30**
Casambi (Remote)

Materials

Diffuser: PMMA .
LED support: Aluminum.

Light Source and electronics

1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,10 x 1,025 x 0,10 m
Vol 0,01 m³
Gross weight 2,25 Kg Net weight 1,75 Kg

Notes

2360 _ _ / _ 3: 1-10V Multi-volt

LED IP20

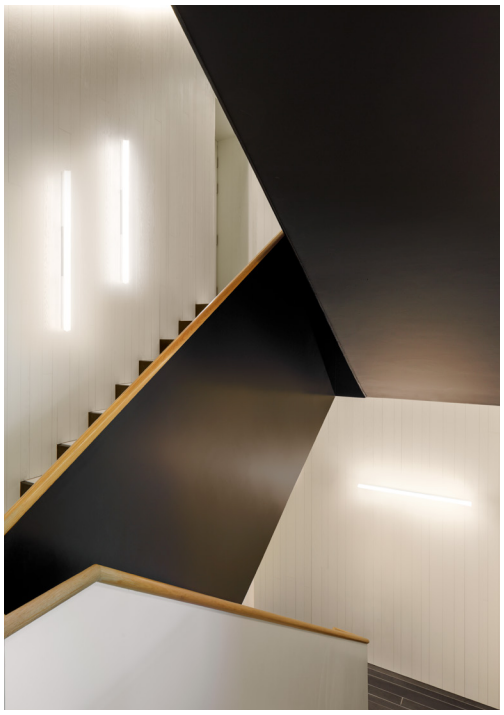



Halo Jewel

Design by Martín Azúa

Subtle light floating in the air and delicately
suspended by a perfectly crafted steel structure.
Light and matter in one.

Pendant

INDIVIDUAL MODELS

2350

Ø 56,3 cm



2351

Ø 56,3 cm



2355

Ø 16 x 350 cm



2356

Ø 27 x 350 cm



MULTIPLE MODELS



Product specifications subject to change without notice. Please check vibia.com for updated information.

INDIVIDUAL MODEL

2350

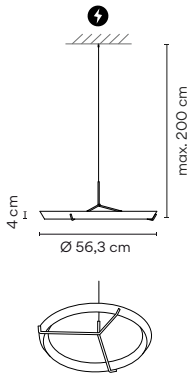

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90
/2 _ 3000 K - 2024 lm
F
CRI >80

Control
2350 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90

Control
2350 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics
1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes
2350 _ _ / _ 1: DALI-2 Multi-volt
2350 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

2351

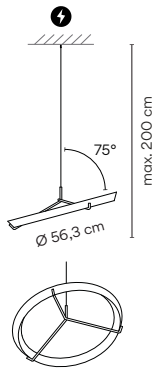

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90
/2 _ 3000 K - 2024 lm
F
CRI >80

Control
2351 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1904 lm
G
CRI >90

Control
2351 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics
1 x LED STRIP 24V 23 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,6 x 0,6 x 0,27 m
Vol 0,097 m³
Gross weight 7 Kg Net weight 6,35 Kg

Notes
2351 _ _ / _ 1: DALI-2 Multi-volt
2351 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for Pendant

2355



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control
2355 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 1415 lm
/2 _ 3000 K - 1224 lm
F
CRI >90

Control
2355 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface


Free Wire


Built-in XS

Remote Micro


Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics
1 x LED STRIP 24V 15,3 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,19 x 1,265 m
Vol 0,0312 m^3
Gross weight 5 Kg Net weight 4,1 Kg

Notes
Extra cable length.

LED IP20 Dimmer

2356



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
/2 _ 3000 K - 3672 lm
F
CRI >90

Control
2356 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Finishes
20/ _ _ Gold
(Gold)

LED Colour Temperature
/1 _ 2700 K - 4246 lm
/2 _ 3000 K - 3672 lm
F
CRI >90

Control
2356 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PMMA. LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics
3 x LED STRIP 24V 15,3 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging
1 Box 0,31 x 0,33 x 2 m
Vol 0,2046 m^3
Gross weight 7,4 Kg Net weight 6,06 Kg

Notes
2356 _ _ / _ 1: DALI-2 Multi-volt
2356 _ _ / _ 3: 1-10V Multi-volt
Extra cable length.

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.



Select your model at **vibia.com** and adjust



2 x 2355



2 x 2350



1 x 2351 2 x 2350



3 x 2351



3 x 2351



4 x 2350



5 x 2355



1 x 2351 3 x 2350



9 x 2355



17 x 2355



7 x 2355



25 x 2355

See more
multiple models
at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

11/ _ _ Black
(NCS S 8500-N)
20/ _ _ Gold
(Gold)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K

CRI >80
CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 2350, 2351

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



Ø 27 cm

match with fixture finish.

_18
Free Wire



Ø 22 cm

you can choose the finish of the canopy among black or white.



Ø 36 cm



Ø 40 cm

For Ref. 2355

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



Ø 16 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm

you can choose the finish of the canopy among black or white.



Ø 36 cm



Ø 40 cm

Remote



Built-in



Materials

Diffuser: PMMA . LED support: Aluminum.
Pendant structure: Steel. Ceiling rose: Steel.

Notes

Extra cable length.

LED IP20 Dimmer Bi-volt

Cosmos

Design by Lievore, Altherr, Molina

Design and light become one with Cosmos pendant. Flattened spheres in suspension that naturally descend from the ceiling and use light to draw a fluctuating course like a constellation of stars.

Pendant



Ø 19 cm

2500



Ø 27 cm

2501



Ø 48 cm

2502



55 cm

2510



65 cm

2511



76 cm

2515



86 cm

2516

2500



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **62/** _ _ Green (PANTONE 5645)
- **58/** _ _ Off-White (NCS S 2005-Y20R)

LED Colour Temperature

/1 _ 2700 K - 485 lm
CRI >90

/3 _ 3500 K - 128 lm
CRI >80

E

Control

2500 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ 10: 100~240V 50/60Hz
/ 1B: 110~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0180 m^3
Gross weight 1,62 Kg Net weight 1,18 Kg

Notes

2500 _ _ / _ 0: On/ Off Bi-volt
2500 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

2501



Finishes

14/ _ _ Chocolate
(RAL 8019)

62/ _ _ Green
(PANTONE 5645)

58/ _ _ Off-White
(NCS S 2005-Y20R)

LED Colour Temperature

/1 _ 2700 K - 485 lm
CRI >90

/3 _ 3500 K - 512 lm
CRI >80

E

Control

2501 _ _ **/** _ _

_ _ **/** _ **0** On/ Off
_ _ **/** _ **1** DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel

Light Source and electronics

1 x LED 4,5 W 350mA
Constant Current 350 mA
/ 10: 100~240V 50/60Hz
/ 1B: 110~240V 50/60Hz

Packaging

1 Box 0,42 x 0,42 x 0,25 m
Vol 0,0441 m³
Gross weight 2,54 Kg Net weight 1,44 Kg

Notes

2501 _ _ / _ 0: On/ Off Bi-volt
2501 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED IP20

2502



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 485 lm
CRI >90

/3 _ 3500 K - 512 lm
CRI >80

E

Control

2502 _ _ **/** _ _

_ _ **/** _ **0** On/ Off
_ _ **/** _ **1** DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA.
1 x LED 1 W 350 mA.
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 5,58 Kg Net weight 3,15 Kg

Notes

2502 _ _ / _ 0: On/ Off Bi-volt
2502 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED IP20

2510



Finishes

62/ _ _ Green,
White and
Chocolate
(PANTONE 5645,
NCS S 0300-N,
RAL 8019)

LED Colour Temperature

/1 _ 2700 K - 1455 lm
CRI >90

/3 _ 3500 K - 1537 lm
CRI >80

E

Control

2510 _ _ **/** _ _

_ _ **/** _ **A** Push;
1-10V; DALI-2
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics

3 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 7,54 Kg Net weight 5,11 Kg

Notes

2510 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Compositions and finishes can
not be changed
Extra cable length.

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

2511



Finishes
- **62/** _ _ Green, White and Chocolate (PANTONE 5645, NCS S 0300-N, RAL 8019)
- **58/** _ _ Off-White, White and Chocolate (NCS S 2005-Y20R, NCS S 0300-N, RAL 801)

LED Colour Temperature
/1 _ 2700 K - 1455 lm
CRI >90
/3 _ 3500 K - 1537 lm
CRI >80
E

Control
2511 _ _ / _ _
- _ _ / _ **A** Push; 1-10V; DALI-2
- _ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics
3 x LED 4,5 W 350 mA
1 x LED 1 W 350 mA.
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,60 x 0,60 x 0,27 m
Vol 0,0970 m³
Gross weight 9,25 Kg Net weight 6,82 Kg

Notes
2511 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Compositions and finishes can not be changed.
Extra cable length.

LED IP20

2515



Finishes
- **62/** _ _ Green, Chocolate and Off-White (Pantone 5645, RAL 8019, NCS S 2005-Y20R)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
CRI >90
/3 _ 3500 K - 2050 lm
CRI >80
E

Control
2515 _ _ / _ _
- _ _ / _ **A** Push; 1-10V; DALI-2
- _ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics
4 x LED 4,5 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,76 x 0,76 x 0,27 m
Vol 0,1560 m³
Gross weight 10,94 Kg Net weight 7,04 Kg

Notes
2515 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Compositions and finishes can not be changed
Extra cable length.

LED IP20

2516



Finishes
- **62/** _ _ Green, White and Chocolate (PANTONE 5645, RAL 9010, RAL 8019)

LED Colour Temperature
/1 _ 2700 K - 1940 lm
CRI >90
/3 _ 3500 K - 2050 lm
CRI >80
E

Control
2516 _ _ / _ _
- _ _ / _ **A** Push; 1-10V; DALI-2
- _ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Body: PU- Polyurethane.
Canopy: Steel.

Light Source and electronics
4 x LED 4,5 W 350 mA
2x LED 1 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,73x0,73x0,32 m
Vol 0,1705 m³
Gross weight 14,62 Kg Net weight 15,5 Kg

Notes
2516 _ _ / _ A: Push; 1-10V; DALI-2 Bi-volt
Compositions and finishes can not be changed.
Extra cable length.

LED IP20



Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating scultptural pieces integrated in the architecture.

Wall

2600
16 x 16 cm



2602
26 x 22 cm



2610
120 x 18 x 10 cm



2612
240 x 30 x 10cm



2615
180 x 120 x 10 cm



2617
84 x 240 x 10 cm



2600



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 700 lm
F

/2 _ 3000 K - 756 lm
/3 _ 3500 K - 763 lm
E

CRI >90

Control

2600 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m^3
Gross weight 1,35 Kg Net weight 0,9 Kg

Notes

2600 _ _ / _ 1: DALI-2 Multi-volt
2600 _ _ / _ 3: 1-10V Multi-volt

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

2602



Finishes
15/ _ _ Grey L2 (NCS S 2500-N)
21/ _ _ Black Grey (NCS S 7000-N)
Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1400 lm
F
/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E
CRI >90

Control
2602 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics
2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 2,85 Kg Net weight 1,9 Kg

Notes
2602 _ _ / _ 1: DALI-2 Multi-volt
2602 _ _ / _ 3: 1-10V Multi-volt
* Electrical connection point.

LED IP20

2610



Finishes
15/ _ _ Grey L2 (NCS S 2500-N)
21/ _ _ Black Grey (NCS S 7000-N)
Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1400 lm
F
/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E
CRI >90

Control
2610 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics
1 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,036 m³
Gross weight 3,6 Kg Net weight 2,4 Kg

Notes
2610 _ _ / _ 1: DALI-2 Multi-volt
2610 _ _ / _ 3: 1-10V Multi-volt
* Electrical connection point.

LED IP20

2612



Finishes
15/ _ _ Grey L2 (NCS S 2500-N)
21/ _ _ Black Grey (NCS S 7000-N)
Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1400 lm
F
/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E
CRI >90

Control
2612 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics
2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,042 m³
Gross weight 3,9 Kg Net weight 2,6 Kg

Notes
2612 _ _ / _ 1: DALI-2 Multi-volt
2612 _ _ / _ 3: 1-10V Multi-volt
* Electrical connection point.

LED IP20

2615



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1400 lm
F

/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E

CRI >90

Control

2615 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,038 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

2615 _ _ / _ 1: DALI-2 Multi-volt
2615 _ _ / _ 3: 1-10V Multi-volt
* Electrical connection point.

LED IP20

2617



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1400 lm
F

/2 _ 3000 K - 1513 lm
/3 _ 3500 K - 1526 lm
E

CRI >90

Control

2617 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,041 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

2617 _ _ / _ 1: DALI-2 Multi-volt
2617 _ _ / _ 3: 1-10V Multi-volt
* Electrical connection point.

LED IP20

Ceiling

2630
18 x 21 cm



2632
24 x 15cm



2634
48 x 13 cm



2640
120 x 21 cm



2642
160 x 15 cm



2645
120 x 21 cm

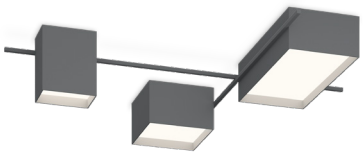

2647
160 x 21 cm

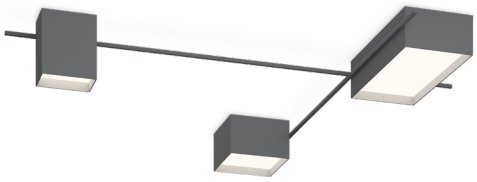

2630



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 998 lm
F

/2 _ 3000 K - 1078 lm
/3 _ 3500 K - 1087 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
820 lm - 1060 lm
G - F

CRI >90

Control

2630 _ _ / _ _

_ _ / _ **1**	Static White + DALI-2
_ _ / _ **3**	Static White + 1-10V
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0, 4 x 0,4 x 0,2 m
Vol 0,032 m^3
Gross weight 3,75 Kg Net weight 2,5 Kg

Notes

2630 _ _ / _ 1: Static White + DALI-2 — Bi-volt
2630 _ _ / _ 3: Static White + 1-10V — Multi-volt
2630 _ _ / 81: Tunable White + DALI-2 DT8 — Multi-volt

LED IP20

2632



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 2049 lm
E

/2 _ 3000 K - 2214 lm
/3 _ 3500 K - 2233 lm
D

Tunable White

/8 _ (2200 K - 4000 K)
1699 lm - 2188 lm
F - E

CRI >90

Control

2632 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **3** Static White + 1-10V
_ _ / _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,34 x 0,34 x 0,25 m
Vol 0,029 m³
Gross weight 4,35 Kg Net weight 2,9 Kg

Notes

2632_ _ / _ 1: Static White + DALI-2 Bi-volt
2632 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20

2634



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 4098 lm
E

/2 _ 3000 K - 4428 lm
/3 _ 3500 K - 4466 lm
D

Tunable White

/8 _ (2200 K - 4000 K)
3398 lm - 4376 lm
F - E

CRI >90

Control

2634 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **3** Static White + 1-10V
_ _ / _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,58 x 0,34 x 0,23 m
Vol 0,045 m³
Gross weight 5,85 Kg Net weight 3,9 Kg

Notes

2634_ _ / _ 1: Static White + DALI-2 Multi-volt
2634 _ _ / _ 3: Static White + 1-10V Multi-volt
2634 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20

2640



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)

21/ _ _ Black Grey
(NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 3047 lm
/2 _ 3000 K - 3292 lm
/3 _ 3500 K - 3320 lm
E

Tunable White

/8 _ (2200 K - 4000 K)
2519 lm - 3248 lm
F - E

CRI >90

Control

2640 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **3** Static White + 1-10V
_ _ / _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,15 m³
Gross weight 8,25 Kg Net weight 5,5 Kg

Notes

2640_ _ / _ 1: Static White + DALI-2 Multi-volt
2640 _ _ / _ 3: Static White + 1-10V Multi-volt
* Electrical connection point.

LED IP20

2642



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 6147 lm
E
/2 _ 3000 K - 6642 lm
/3 _ 3500 K - 6699 lm
D
Tunable White
/8 _ (2200 K - 4000 K)
5097 lm - 6564 lm
F - E
CRI >90

Control

2642 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2
_ _ **/** _ **3** Static White + 1-10V
_ _ **/** _ **Z** Static White + Casambi
_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 0,60 x 1,7 m
Vol 0,255 m³
Gross weight 11,25 Kg Net weight 7,5 Kg

Notes

2642_ _ / _ 1: Static White + DALI-2 Multi-volt
2642 _ _ / _ 3: Static White + 1-10V Multi-volt
* Electrical connection point.

LED IP20

2645



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 7145 lm
E
/2 _ 3000 K - 7720 lm
/3 _ 3500 K - 7786 lm
D
Tunable White
/8 _ (2200 K - 4000 K)
5917 lm - 7624 lm
F - E
CRI >90

Control

2645 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2
_ _ **/** _ **3** Static White + 1-10V
_ _ **/** _ **Z** Static White + Casambi
_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 1,2 x 1,2 m
Vol 0,42 m³
Gross weight 14,25 Kg Net weight 9,25 Kg

Notes

2645_ _ / _ 1: Static White + DALI-2 Multi-volt
2645 _ _ / _ 3: Static White + 1-10V Multi-volt
* Electrical connection point.

LED IP20

2647



Finishes

15/ _ _ Grey L2
(NCS S 2500-N)
21/ _ _ Black Grey
(NCS S 7000-N)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 7145 lm
E
/2 _ 3000 K - 7720 lm
/3 _ 3500 K - 7786 lm
D
Tunable White
/8 _ (2200 K - 4000 K)
5917 lm - 7624 lm
F - E
CRI >90

Control

2647 _ _ **/** _ _

_ _ **/** _ **1** Static White + DALI-2
_ _ **/** _ **3** Static White + 1-10V
_ _ **/** _ **Z** Static White + Casambi
_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 9 W
1 x LED PLATE 24V 15 W
1 x LED PLATE 24V 30 W
Constant Voltage 24V
110~240V 50/60Hz

Packaging

1 Box 0,25 x 1,7 x 1,7 m
Vol 0,72 m³
Gross weight 15,3 Kg Net weight 10,2 Kg

Notes

2647_ _ / _ 1: Static White + DALI-2 Multi-volt
2647 _ _ / _ 3: Static White + 1-10V Multi-volt
* Electrical connection point.

LED IP20

Class

Design by Sebastian Herkner

A timeless and elegant solution for outdoor environments, Class combines the refined aesthetic of a patio light with the functional performance of a bollard. Consisting of a durable aluminum shaft and fluted glass diffuser, it washes the space with a gentle luminescence.

Outdoor



2810
28 x 250 cm



2815
28 x 250 cm



2800
22 x 78,5 cm



2805
22 x 78,5 cm



2820
18 x 60 cm



2825
18 x 96 cm

2800



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1188 lm
G
CRI >90

Control
2800 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 11,6 Kg Net weight 9,6 Kg

LED IP65

2805



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2376 lm
G
CRI >90

Control
2805 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
2 x LED 3,5W 150 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 0,95 x 0,30 x 0,30 m
Box 2: 0,31 x 0,31 x 0,21 m
Total Vol 0,11 m³
Gross weight 14,8 Kg Net weight 12,8 Kg

LED IP65

Product specifications subject to change without notice. Please check vibia.com for updated information.

2810



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2376 lm
G
CRI >90

Control
2810 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 7W 300 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 2,92 x 0,32 x 0,32 m
Box 2: 0,37 x 0,32 x 0,22 m
Total Vol 0,33 m³
Gross weight 20,5 Kg Net weight 17,5 Kg

LED IP65 Dimmer

2815



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4752 lm
G
CRI >90

Control
2815 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
2 x LED 7W 300 mA
Constant Current 600 mA
220~240V. 50/60Hz

Packaging
2 Boxes
Box 1: 2,92 x 0,32 x 0,32 m
Box 2: 0,37 x 0,32 x 0,22 m
Total Vol 0,33 m³
Gross weight 28,4 Kg Net weight 25,4 Kg

LED IP65

2820



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 1188 lm
G
CRI >90

Control
2820 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 3,5W 150 mA
Constant Current 150 mA
220~240V. 50/60Hz

Packaging
1 Box 0,95 x 0,40 x 0,20 m
Vol 0,08 m³
Gross weight 4,4 Kg Net weight 2,9 Kg

LED IP65

2825



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2376 lm
G
CRI >90

Control
2825 _ _ **/** _ _

_ _ **/ 11** DALI-2
_ _ **/ 15** Push
_ _ **/ 1Z** _ **30** Casambi (Remote)

Materials
Body: Aluminum. Glass: Borosilicate glass.
Diffuser: Opal PC- Polycarbonate.

Light Source and electronics
1 x LED 7W 300 mA
Constant Current 300 mA
220~240V. 50/60Hz

Packaging
1 Box 0,95 x 0,30 x 0,30 m
Vol 0,09 m³
Gross weight 6,4 Kg Net weight 4,40 Kg

LED IP65

Dama

Design by Ludovica+Roberto Palomba

Dama is a homage to the classic lamp, ideal for shaping an intimate atmosphere with an elevated aesthetic. Combining technical quality with a layer of warmth and intimacy, the collection connects the charm of tradition with the finesse of contemporary lighting design.

Table Floor Pendant



3225
63,5 x 61 cm

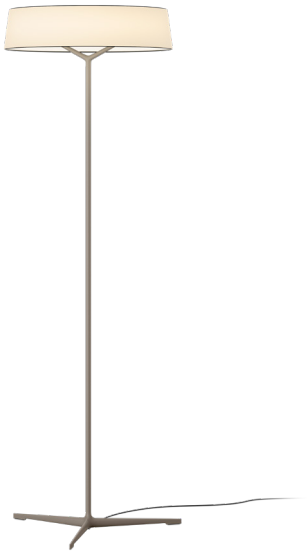

3230
Ø 49,5 x 140 cm

3235

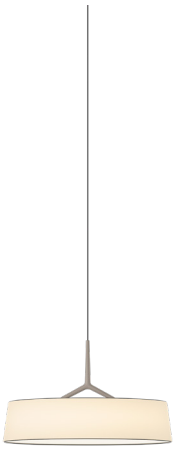

Ø 45 cm

3225



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

E

CRI >90

Control

3225 _ _ **/** _ _

_ _ **/ 15** Push
_ _ **/ 1Z** Casambi

Materials

Tube: Steel.
Base: Zinc Alloy.
Shade: Paper.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100-240V. 50/60Hz

Packaging

1 Box 0,75 x 0,55 x 0,55 m
Vol 0,23 m³
Gross weight 3,3 Kg Net weight 1,8 Kg

Notes

3225 _ _ / _ 5: Push Multi-volt
Switch on the cable. Electric cable 2,5 m.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

3230

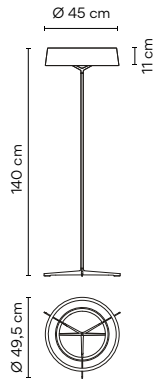

Finishes

- **11/ _ _** Black (NCS S 8500-N)
- **25/ _ _** Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

E

CRI >90

Control

3230 _ _ / _ _

- **_ _ / 15** Push
- **_ _ / 1Z** Casambi

Materials

Tube: Steel.
Base: Zinc Alloy.
Shade: Paper.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 1,6 x 0,55 x 0,55 m
Vol 0,48 m³
Gross weight 5 Kg Net weight 2,55 Kg

Notes

3230 _ _ / _ 5: Push Multi-volt
Switch on the cable. Electric cable 2,5 m.

LED IP20 CE UK CA EAC

3235



Finishes

- **11/ _ _** Black (NCS S 8500-N)
- **25/ _ _** Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm

E

CRI >90

Control

3235 _ _ / _ _

- **_ _ / 11** DALI-2
- **_ _ / 1B** Push; 1-10V
- **_ _ / 1Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Body: Aluminum.
Shade: Paper.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Current 900 mA
110~240V. 50/60Hz

Packaging

1 Box 0,40 x 0,55 x 0,55 m
Vol 0,12 m³
Gross weight 3,2 Kg Net weight 1,6 Kg

Notes

Extra cable length.

LED IP20 CE UK CA EAC





Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 3235

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 20 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Ø 22 cm

Ø 36 cm

Ø 40 cm

Remote



Built-in







Circle

Combining accent, diffuse and general lighting effects with dynamic control and temperature regulation, Circle is a highly-functional complementary product designed to curate a nuanced ambience.

Ceiling - Accent Downlight - Colour



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless

3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide



Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

Ceiling - Accent Downlight - Wood



Ø 7 cm

Trim

3300 Narrow
3303 Medium
3306 Wide



Ø 6 cm

Trimless

3310 Narrow
3313 Medium
3316 Wide



Ø 11 cm

Trim

3320 Narrow
3323 Medium
3326 Wide



Ø 10 cm

Trimless

3330 Narrow
3333 Medium
3336 Wide

3300
TRIM Narrow
3303
TRIM Medium
3306
TRIM Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3300 _ _ / _ _
3303 _ _ / _ _
3306 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3300 _ _ / _ _
3303 _ _ / _ _
3306 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,2 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 5,8 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,003 m³
Gross weight 0,5 Kg Net weight 0,33 Kg

Notes

3300_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3300_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
3303_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3303_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
3306_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3306_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED ☐ IP20 IP40 CE UK CA EAC Ø 6 cm

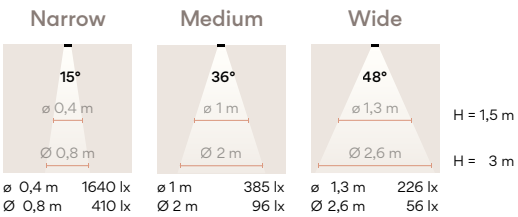

ø 0,4 m	1640 lx	ø 1 m	385 lx
Ø 0,8 m	410 lx	Ø 2 m	96 lx

ø 1,3 m	226 lx		
Ø 2,6 m	56 lx		

3310
TRIMLESS Narrow
3313
TRIMLESS Medium
3316
TRIMLESS Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3310 _ _ / _ _
3313 _ _ / _ _
3316 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ /**F1** Dim-To-Warm + DALI-2
- _ _ /**FB** Dim-To-Warm + Push; 1-10V
- _ _ /**FM** Dim-To-Warm + Without driver
- _ _ /**FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 607 lm
/2 _ 3000 K - 634 lm
/3 _ 3500 K - 657 lm

Tunable White
/8 _ (1800 K - 4000 K) 308 lm - 504 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 611 lm

F

CRI >90

Control

3310 _ _ / _ _
3313 _ _ / _ _
3316 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

- _ _ /**F1** Dim-To-Warm + DALI-2
- _ _ /**FB** Dim-To-Warm + Push; 1-10V
- _ _ /**FM** Dim-To-Warm + Without driver
- _ _ /**FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 6,2 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 5,8 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,002 m^3
Gross weight 0,6 Kg Net weight 0,43 Kg

Notes

3310_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3310_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
3313_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3313_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
3316_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3316_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt

Trimless frame can be shipped beforehand.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 IP40 Ø 7 cm

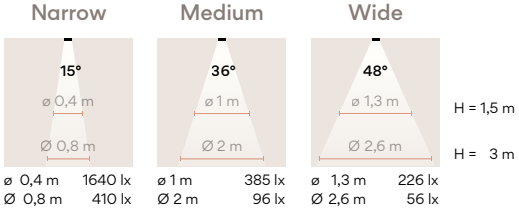

Narrow		Medium		Wide	
ø 0,4 m	1640 lx	ø 1 m	385 lx	ø 1,3 m	226 lx
Ø 0,8 m	410 lx	Ø 2 m	96 lx	Ø 2,6 m	56 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3320
TRIM Narrow
3323
TRIM Medium
3326
TRIM Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3320 _ _ **/** _ _
3323 _ _ **/** _ _
3326 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

_ _ **/F1** Dim-To-Warm + DALI-2
_ _ **/FB** Dim-To-Warm + Push; 1-10V
_ _ **/FM** Dim-To-Warm + Without driver
_ _ **/FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3320 _ _ **/** _ _
3323 _ _ **/** _ _
3326 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

_ _ **/F1** Dim-To-Warm + DALI-2
_ _ **/FB** Dim-To-Warm + Push; 1-10V
_ _ **/FM** Dim-To-Warm + Without driver
_ _ **/FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,15 m
Vol 0,003 m^3
Gross weight 0,6 Kg Net weight 0,4 Kg

Notes

3320_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3320_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
3323_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3323_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
3326_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3326_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt

Trimless frame can be shipped beforehand.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 IP40 Ø 10 cm

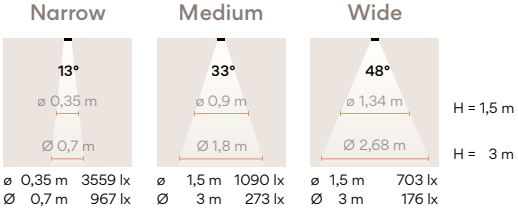

ø	0,35 m	3559 lx	ø	1,5 m	1090 lx
Ø	0,7 m	967 lx	Ø	3 m	273 lx

ø	1,5 m	703 lx
Ø	3 m	176 lx

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

3330
TRIMLESS Narrow
3333
TRIMLESS Medium
3336
TRIMLESS Wide



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3330 _ _ / _ _
3333 _ _ / _ _
3336 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm

F

CRI >90

Control

3330 _ _ / _ _
3333 _ _ / _ _
3336 _ _ / _ _

_ _ / _ **0** Static White + On/ Off
_ _ / _ **D** Static White + Push, DALI-2
_ _ / _ **M** Static White + Without driver
_ _ / _ **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

_ _ /**F1** Dim-To-Warm + DALI-2
_ _ /**FB** Dim-To-Warm + Push; 1-10V
_ _ /**FM** Dim-To-Warm + Without driver
_ _ /**FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate/ Wood.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,002 m^3
Gross weight 0,75 Kg Net weight 0,55 Kg

Notes

3330_ _ / F1: Dim-To-Warm + DALI-2 — Bi-volt
3330_ _ / FB: Dim-To-Warm + Push; 1-10V — Bi-volt
3333_ _ / F1: Dim-To-Warm + DALI-2 — Bi-volt
3333_ _ / FB: Dim-To-Warm + Push; 1-10V — Bi-volt
3336_ _ / F1: Dim-To-Warm + DALI-2 — Bi-volt
3336_ _ / FB: Dim-To-Warm + Push; 1-10V — Bi-volt

Trimless frame can be shipped beforehand.

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED | IP20 IP40 | Ø 11 cm

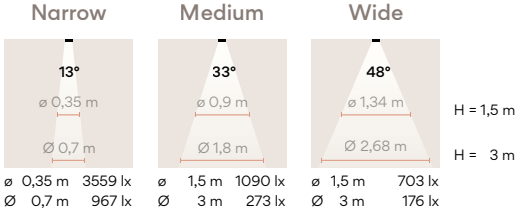

ø 0,35 m 3559 lx
Ø 0,7 m 967 lx
ø 1,5 m 1090 lx
Ø 3 m 273 lx
ø 1,5 m 703 lx
Ø 3 m 176 lx


Design Does

Ceiling - Wall Washer



Ø 11 cm

3350



Ø 10 cm

3353

3350
TRIM



Ø 11 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 914 lm
/2 _ 3000 K - 956 lm
/3 _ 3500 K - 990 lm
E

Tunable White
/8 _ (1800 K - 4000 K) 571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K) 1258 lm
F

CRI >90

Control

3350 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **D** Static White + Push, DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

- _ _ **/F1** Dim-To-Warm + DALI-2
- _ _ **/FB** Dim-To-Warm + Push; 1-10V
- _ _ **/FM** Dim-To-Warm + Without driver
- _ _ **/FZ** Dim-To-Warm + Casambi

Materials

Body: Aluminum.
Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 7,4 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,15 x 0,15 x 0,1 m
Vol 0,002 m^3
Gross weight 0,6 Kg Net weight 0,4 Kg

Notes

3350_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3350_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED ☐ IP20 IP40 Ø 10 cm



H 2,5 m x 1 m 128 lx
H 4 m x 1 m 55 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3353
TRIMLESS



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature
Static White
/1 _ 2700 K - lm
/2 _ 3000 K - lm
/3 _ 3500 K - lm
E

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

Dim-To-Warm
/F _ (1800 K - 3000 K)
1258 lm
F

CRI >90

Control
3353 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **D** Static White + Push, DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

- _ _ **/F1** Dim-To-Warm + DALI-2
- _ _ **/FB** Dim-To-Warm + Push; 1-10V
- _ _ **/FM** Dim-To-Warm + Without driver
- _ _ **/FZ** Dim-To-Warm + Casambi

Materials
Body: Aluminum.
Shade: PC- Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 6 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Dim-To-Warm:
1 x LED 11,6 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,006 m³
Gross weight 0,6 Kg Net weight 0,4 Kg

Notes
3353_ _ / F1: Dim-To-Warm + DALI-2 Bi-volt
3353_ _ / FB: Dim-To-Warm + Push; 1-10V Bi-volt
Trimless frame can be shipped beforehand.
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 IP40 Ø 11 cm



H 2,5 m x 1 m 128 lx
H 4 m x 1 m 55 lx



Ceiling - Flat Diffuser



Ø 36 cm

3360



Ø 47 cm

3363

3360



Ø 36 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1800 lm
/2 _ 3000 K - 1890 lm
F
/3 _ 3500 K - 1926 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
1607 lm - 2186 lm
E

CRI >90

Control

3360 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **D** Static White + Push, DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum. Diffuser:PMMA.
Shade: PC-Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 17,4 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED PLATE 17,1 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,48 x 0,48 x 0,12 m
Vol 0,03 m³
Gross weight 2,4 Kg Net weight 2 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UKCA EAC

Ø 35 cm

3363



Ø 47 cm

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2798 lm
F
/2 _ 3000 K - 2938 lm
/3 _ 3500 K - 2994 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
2471 lm - 3198 lm
E

CRI >90

Control

3363 _ _ / _ _

- _ _ / _ **0** Static White + On/ Off
- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi

- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

Materials

Body: Aluminum. Diffuser:PMMA.
Shade: PC-Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 25,6 W 550 mA
Constant Current 550 mA
220~240V 50/60Hz

Tunable White:
1 x LED PLATE 25,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Packaging

1 Box 0,68 x 0,68 x 0,12 m
Vol 0,055 m³
Gross weight 3,4 Kg Net weight 2,9 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20 CE UKCA EAC

Ø 46 cm



Line

Line consists of a series of simple linear luminaires, each with a distinct lighting effect. Integrating dynamic control and subtle gradients in intensity, tone and colour, the collection complements Vibia's wider product range to curate a subtle atmosphere.

Ceiling - High Comfort Diffuser



3500 Trim

14 x 4 cm



3503 Trimless

13 x 3 cm



3505 Trim

27 x 4 cm



3508 Trimless

26 x 3 cm



3510 Trim

53 x 4 cm



3513 Trimless

51 x 3 cm



3515 Trim

104 x 4 cm



3518 Trimless

102 x 3 cm

TRIM



TRIMLESS



Product specifications subject to change without notice. Please check vibia.com for updated information.

3500
TRIM
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
642 lm - 701 lm
F

CRI >90

Control

3500 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **D** Static White + Push, DALI-2
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m^3
Gross weight 0,5 Kg Net weight 0,35 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

13,5 x 3,5 cm

3503
TRIMLESS
UGR <21



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
642 lm - 701 lm
F

CRI >90

Control

3503 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **D** Static White + Push, DALI-2
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Vol 0,006 m^3
Gross weigth 0,825kg Net weight 0,525 kg

Notes

Trimless frame can be shipped in advance under request.
For Tunable White versions, remote driver only required.
For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

14,5 x 4 cm

3505
TRIM
UGR <21



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
1221 lm - 1343 lm
F

CRI >90

Control

3505 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m^3
Gross weight 0,65 Kg Net weight 0,45 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

26,2 x 3,5 cm

3508
TRIMLESS
UGR <21



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
1221 lm - 1343 lm
F

CRI >90

Control

3508 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m^3
Gross weight 1,05 Kg Net weight 0,75 Kg

Notes

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

27 x 4 cm

3510
TRIM
UGR <21

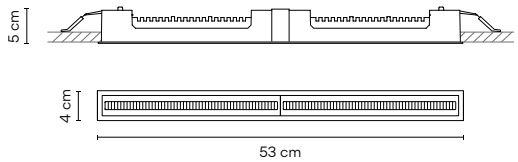

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
2442 lm - 2686 lm
F

CRI >90

Control

3510 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,570 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

52 x 3,5 cm

3513
TRIMLESS
UGR <21

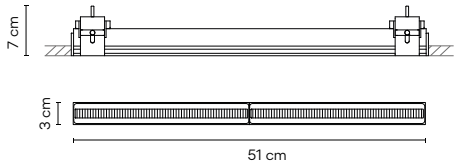

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
2442 lm - 2686 lm
F

CRI >90

Control

3513 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,010 m^3
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

53 x 4 cm

3515
TRIM
UGR <21

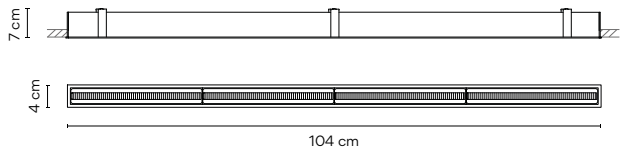

Finishes

- **11/ _ _** Black (NCS S 8500-N)
- **23/ _ _** Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm
E

Tunable White
/8 _ (2200 K - 4000 K)
4884 lm - 5372 lm
F

CRI >90

Control

3515 _ _ / _ _

- **_ _ / _ 0** Static White + On/ Off
- **_ _ / _ A** Static White + Push; 1-10V; DALI-2
- **_ _ / _ M** Static White + Without driver
- **_ _ / _ Z** Static White + Casambi

- **_ _ / 81** Tunable White + DALI-2 DT8
- **_ _ / 8M** Tunable White + Without driver
- **_ _ / 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Frame: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m³
Gross weight 3,25 Kg Net weight 2,36 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UK CA EAC

103 x 3,5 cm

3518
TRIMLESS
UGR <21

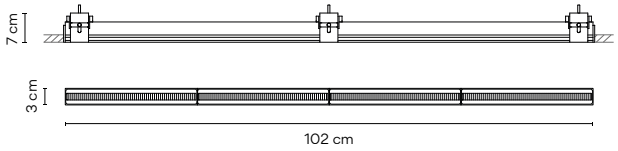

Finishes

- **11/ _ _** Black (NCS S 8500-N)
- **23/ _ _** Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm
E EPREL

Tunable White
/8 _ (2200 K - 4000 K)
4884 lm - 5372 lm
F EPREL

CRI >90

Control

3518 _ _ / _ _

- **_ _ / _ 0** Static White + On/ Off
- **_ _ / _ A** Static White + Push; 1-10V; DALI-2
- **_ _ / _ M** Static White + Without driver
- **_ _ / _ Z** Static White + Casambi

- **_ _ / 81** Tunable White + DALI-2 DT8
- **_ _ / 8M** Tunable White + Without driver
- **_ _ / 8Z** Tunable White + Casambi

Materials

Body: Aluminum / PC- Polycarbonate.
Shade: PC- Polycarbonate & Bronze.
Diffuser: PE- Polyethylene.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,018 m³
Gross weight 3,35 kg Net weight 2,46 Kg

Notes

Trimless frame can be shipped in advance under request.
For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UK CA EAC

104 x 4 cm



Ceiling - Flat Diffuser



3530 Trim
53 x 4 cm

3533 Trimless
51 x 3 cm



3535 Trim
103 x 4 cm



3538 Trimless
102 x 3 cm



3540 Trim
203 x 4 cm



3543 Trimless
202 x 3 cm

TRIM



TRIMLESS



3530
TRIM

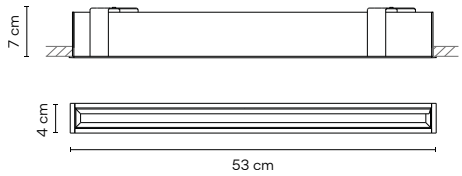

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1272 lm
/2 _ 3000 K - 1314 lm
/3 _ 3500 K - 1356 lm

Tunable White
/8 _ (2200 K - 4000 K)
875 lm - 1197 lm

E

CRI >90

Control

3530 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,570 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

3530_ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 52 x 3,5 cm

3533
TRIMLESS

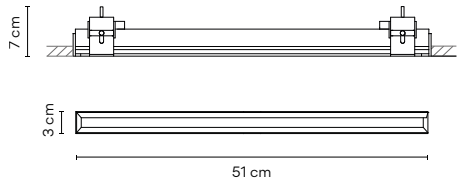

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1272 lm
/2 _ 3000 K - 1314 lm
/3 _ 3500 K - 1356 lm

Tunable White
/8 _ (2200 K - 4000 K)
875 lm - 1197 lm

E

CRI >90

Control

3533 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 10,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,010 m^3
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

3533_ _ / _ 0: Static White + On/ Off Multi-volt

3533_ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with j ust one electrical point.

LED IP20 53 x 4 cm

3535
TRIM

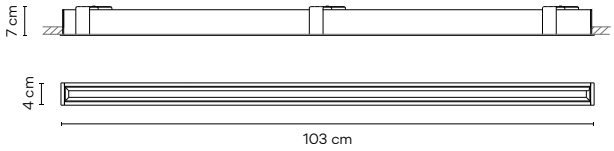

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm

Tunable White
/8 _ (2200 K - 4000 K) 1751 lm - 2395 lm

E

CRI >90

Control

3535 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m³
Gross weight 3,25 Kg Net weight 2,36 Kg

Notes

3535_ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt

For Tunable White versions, a grouping driver is recommended.

LED IP20 102 x 3,5 cm

3538
TRIMLESS

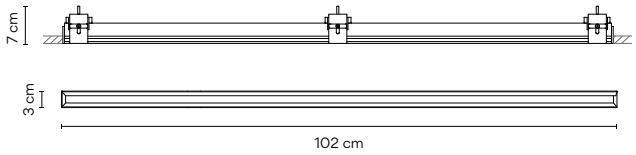

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm

Tunable White
/8 _ (2200 K - 4000 K) 1751 lm - 2395 lm

E

CRI >90

Control

3538 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 20,6 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Vol 0,018 m³
Gross weight 3,35 Kg Net weight 2,46 Kg

Notes

3538_ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

LED IP20 103 x 4 cm

3540
TRIM

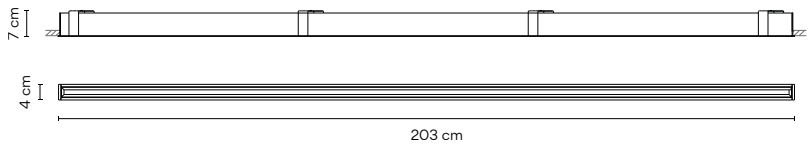

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm

Tunable White
/8 _ (2200 K - 4000 K)
3503 lm - 4791 lm

E

CRI >90

Control

3540 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 41,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 41,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,125 x 0,125 x 2,25 m
Vol 0,035 m³
Gross weight 7,25 Kg Net weight 5,16 Kg

Notes

3540_ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt

For Tunable White versions, a grouping driver is recommended.

LED IP20 202 x 3,5 cm

3543
TRIMLESS

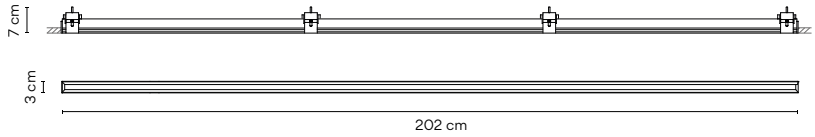

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm

Tunable White
/8 _ (2200 K - 4000 K)
3503 lm - 4791 lm

E

CRI >90

Control

3543 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum.
Diffuser: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 24V 41,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 41,3 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,07 m³
Gross weight 7,85 Kg Net weight 5,66 Kg

Notes

3543_ _ / _ A: Static White + Push; 1-10V; DALI-2 Multi-volt

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

LED IP20 203 x 4 cm

Ceiling - High Efficiency Low Glare



3550 Trim
14 x 4 cm



3553 Trimless
13 x 3 cm



3555 Trim
27 x 4 cm



3558 Trimless
26 x 3 cm



3560 Trim
53 x 4 cm



3563 Trimless
51 x 3 cm



3565 Trim
104 x 4 cm



3568 Trimless
102 x 3 cm

TRIM



TRIMLESS



3550
TRIM
UGR <18



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm

Tunable White
/8 _ (2200 K - 4000 K)
664 lm - 898 lm

E

CRI >90

Control

3550 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m^3
Gross weight 0,5 Kg Net weight 0,35 Kg

Notes

For Tunable White versions,
a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

13,5 x 3,5 cm



d 1,3 m x D 1,4 m 232 lx
d 2,7 m x D 2,9 m 58 lx

3553
TRIMLESS
UGR <18



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 897 lm
/2 _ 3000 K - 928 lm
/3 _ 3500 K - 960 lm

Tunable White
/8 _ (2200 K - 4000 K)
664 lm - 898 lm

E

CRI >90

Control

3553 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 7,4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 7,2 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m³
Gross weight 0,825 Kg Net weight 0,525 Kg

Notes

Trimless frame can be shipped in advance under request.

For Tunable White versions, remote driver only required.

For tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC

14,5 x 4 cm



d 1,3 m x D 1,4 m 232 lx
d 2,7 m x D 2,9 m 58 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3555
TRIM
UGR <18



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

Tunable White
/8 _ (2200 K - 4000 K)
1262 lm - 1707 lm

E

CRI >90

Control

3555 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,003 m³
Gross weight 0,55 Kg Net weight 0,45 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC

26,2 x 3,5 cm



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

3558
TRIMLESS
UGR <18



Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1674 lm
/2 _ 3000 K - 1733 lm
/3 _ 3500 K - 1791 lm

Tunable White
/8 _ (2200 K - 4000 K)
1262 lm - 1707 lm

E

CRI >90

Control

3558 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,7 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 13,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,006 m³
Gross weight 1,05 Kg Net weight 0,75 Kg

Notes

Trimless frame can be shipped in advance under request.

For tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

27 x 4 cm



d 1,4 m x D 1,5 m 418 lx
d 2,8 m x D 3 m 104 lx

3560
TRIM
UGR <18

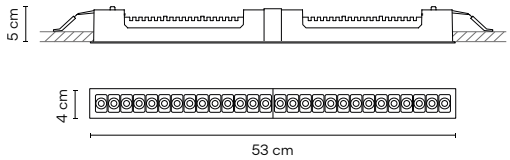

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

Tunable White
/8 _ (2200 K - 4000 K)
2524 lm - 3414 lm

E

CRI >90

Control

3560 _ _ / _ _

_ _ / _ 0 Static White +
On/ Off

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ M Static White +
Without driver

_ _ / _ Z Static White +
Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8M Tunable White +
Without driver

_ _ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC

52 x 3,5 cm



d 1,4 m x D 1,5 m — 836 lx
d 2,8 m x D 3 m — 209 lx

3563
TRIMLESS
UGR <18

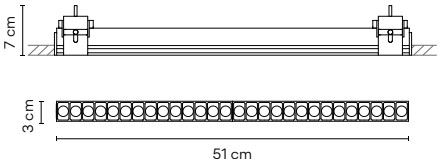

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 3348 lm
/2 _ 3000 K - 3466 lm
/3 _ 3500 K - 3582 lm

Tunable White
/8 _ (2200 K - 4000 K)
2524 lm - 3414 lm

E

CRI >90

Control

3563 _ _ **/** _ _

_ _ **/** _ **0** Static White +
On/ Off

_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2

_ _ **/** _ **M** Static White +
Without driver

_ _ **/** _ **Z** Static White +
Casambi

_ _ **/ 81** Tunable White +
DALI-2 DT8

_ _ **/ 8M** Tunable White +
Without driver

_ _ **/ 8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 27,4 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 27,4 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,010 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC

53 x 4 cm



d 1,4 m x D 1,5 m 836 lx
d 2,8 m x D 3 m 209 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3565
TRIM
UGR <18

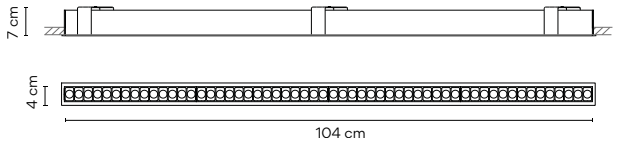

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm

Tunable White
/8 _ (2200 K - 4000 K)
5048 lm - 6828 lm

E

CRI >90

Control

3565 _ _ / _ _

_ _ / _ 0 Static White +
On/ Off

_ _ / _ A Static White +
Push; 1-10V; DALI-2

_ _ / _ M Static White +
Without driver

_ _ / _ Z Static White +
Casambi

_ _ / 81 Tunable White +
DALI-2 DT8

_ _ / 8M Tunable White +
Without driver

_ _ / 8Z Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,009 m^3
Gross weight 3,25 Kg Net weight 2,36 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

LED | IP20 | CE | UKCA | EAC

102 x 3,5 cm



d 1,4 m x D 1,5 m 1581 lx
d 2,8 m x D 3 m 395 lx

3568
TRIMLESS
UGR <18

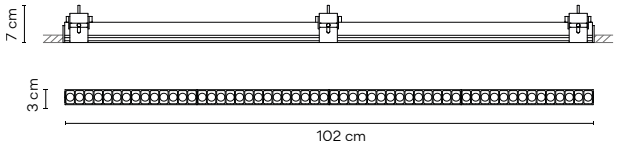

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 6696 lm
/2 _ 3000 K - 6932 lm
/3 _ 3500 K - 7164 lm

Tunable White
/8 _ (2200 K - 4000 K)
5048 lm - 6828 lm

E

CRI >90

Control

3568 _ _ **/** _ _

- _ _ **/** _ **0** Static White + On/ Off
- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi

- _ _ **/ 81** Tunable White + DALI-2 DT8
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 54,8 W 650 mA
Constant Current 650 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 54,7 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,095 m
Vol 0,018 m³
Gross weight 3,35 Kg Net weight 2,46 Kg

Notes

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

LED IP20

104 x 4 cm



d 1,4 m x D 1,5 m 1581 lx
d 2,8 m x D 3 m 395 lx



Ceiling - Wall Washer



3575 Trim
27 x 4 cm



3578 Trimless
26 x 3 cm



3580 Trim
53 x 4 cm



3583 Trimless
51 x 3 cm



3585 Trim
104 x 4 cm



3588 Trimless
102 x 3 cm

TRIM



TRIMLESS



3575
TRIM



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1392 lm
/2 _ 3000 K - 1430 lm
/3 _ 3500 K - 1455 lm

Tunable White
/8 _ (2200 K - 4000 K)
764 lm - 849 lm

F

CRI >90

Control

3575 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Frame: PC- Polycarbonate.
Body: Aluminum & PC-Polycarbonate.
Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 11,5 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,325 m
Vol 0,015 m^3
Gross weight 0,55 Kg Net weight 0,45 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UK CA EAC

26,2 x 3,5 cm



H 2,5 m x 1 m 75 lx
H 4 m x 1m 33 lx

3578
TRIMLESS



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1392 lm
/2 _ 3000 K - 1430 lm
/3 _ 3500 K - 1455 lm

Tunable White
/8 _ (2200 K - 4000 K)
764 lm - 849 lm

F

CRI >90

Control

3578 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **D** Static White + Push, DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 13,3 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 11,5 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,03 m^3
Gross weight 1,1 Kg Net weight 0,75 Kg

Notes

Trimless frame can be shipped in advance under request.

For tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

27 x 4 cm



H 2,5 m x 1 m 75 lx
H 4 m x 1m 33 lx

3580
TRIM

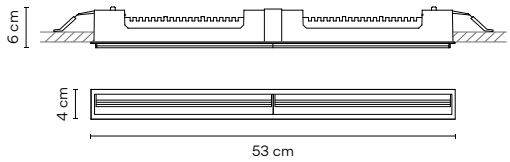

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2784 lm
/2 _ 3000 K - 2860 lm
/3 _ 3500 K - 2911 lm

Tunable White
/8 _ (2200 K - 4000 K)
1528 lm - 1698 lm

F

CRI >90

Control

3580 _ _ **/** _ _

_ _ **/** _ **0** Static White +
On/ Off

_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2

_ _ **/** _ **M** Static White +
Without driver

_ _ **/** _ **Z** Static White +
Casambi

_ _ **/ 81** Tunable White +
DALI-2 DT8

_ _ **/ 8M** Tunable White +
Without driver

_ _ **/ 8Z** Tunable White +
Casambi

Materials

Frame: PC- Polycarbonate.
Body: Aluminum & PC-Polycarbonate.
Lens: PMMA. Shade: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 26,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 23 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 0,57 m
Vol 0,005 m^3
Gross weight 1,25 Kg Net weight 0,78 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

52 x 3,5 cm



H 2,5 m x 1 m 134 lx
H 4 m x 1m 60 lx

3583
TRIMLESS

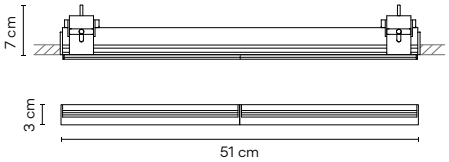

Finishes

11/ _ _ Black
(NCS S 8500-N)

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2784 lm
/2 _ 3000 K - 2860 lm
/3 _ 3500 K - 2911 lm

Tunable White
/8 _ (2200 K - 4000 K)
1528 lm - 1698 lm

F

CRI >90

Control

3583 _ _ **/** _ _

_ _ **/** _ **0** Static White +
On/ Off

_ _ **/** _ **A** Static White +
Push; 1-10V; DALI-2

_ _ **/** _ **M** Static White +
Without driver

_ _ **/** _ **Z** Static White +
Casambi

_ _ **/ 81** Tunable White +
DALI-2 DT8

_ _ **/ 8M** Tunable White +
Without driver

_ _ **/ 8Z** Tunable White +
Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 26,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 23 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,01 m³
Gross weight 2,1 Kg Net weight 1,32 Kg

Notes

Trimless frame can be shipped in advance under request.

For Tunable White versions, a grouping driver is recommended.

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20 CE UKCA EAC

53 x 4 cm



H 2,5 m x 1 m 134 lx
H 4 m x 1m 60 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

3585
TRIM

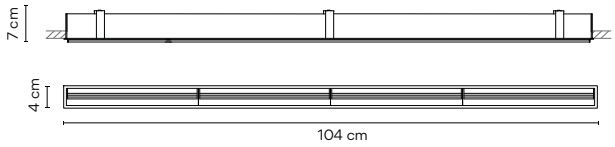

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 5568 lm
/2 _ 3000 K - 5721 lm
/3 _ 3500 K - 5822 lm

Tunable White
/8 _ (2200 K - 4000 K)
3056 lm - 3396 lm

F

CRI >90

Control

3585 _ _ / _ _

_ _ / _ 0	Static White + On/ Off
_ _ / _ A	Static White + Push; 1-10V; DALI-2
_ _ / _ M	Static White + Without driver
_ _ / _ Z	Static White + Casambi
_ _ / 81	Tunable White + DALI-2 DT8
_ _ / 8M	Tunable White + Without driver
_ _ / 8Z	Tunable White + Casambi

Materials

Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate.
Lens: PMMA.
Frame: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED STRIP 53,2 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 46 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,125 x 0,125 x 1,9 m
Vol 0,017 m^3
Gross weight 3,25 Kg Net weight 2,3 Kg

Notes

For Tunable White versions, a grouping driver is recommended.

LED IP20

103 x 3,5 cm



H 2,5 m x 1 m 232 lx
H 4 m x 1m 107 lx

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

3588
TRIMLESS

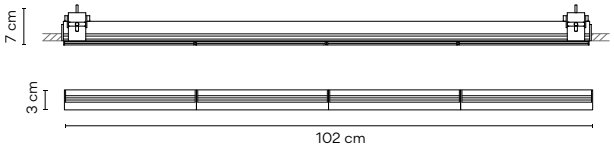

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 5568 lm
/2 _ 3000 K - 5721 lm
/3 _ 3500 K - 5822 lm

Tunable White
/8 _ (2200 K - 4000 K)
3056 lm - 3396 lm

F
CRI >90

Control
3588 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off
_ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi

_ _ **/ 81** Tunable White + DALI-2 DT8
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi

Materials
Body: Aluminum & PC-Polycarbonate.
Shade: PC - Polycarbonate. Lens: PMMA.
Trimless frame: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED STRIP 53,2 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Tunable White:
1 x LED STRIP 46 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,017 m³
Gross weight 4,5 Kg Net weight 3,06 Kg

Notes
For Tunable White versions, a grouping driver is recommended.

LED IP20 CE UK CA EAC

104 x 4 cm



H 2,5 m x 1 m 232 lx
H 4 m x 1m 107 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.



Ceiling - Colour Mood Grazer



3605 Trim
103 x 4 cm

3608 Trimless
100 x 3 cm



3610 Trim
203 x 4 cm

3613 Trimless
202 x 3 cm

TRIM



TRIMLESS



3605
TRIM

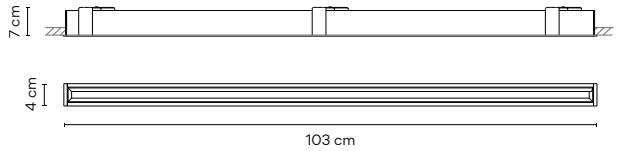

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Infinite Colour (TW+ RGB)
/A _ 1575 lm - 1861 lm
70 lm 11 (RED)
182 lm (GREEN)
35 lm (BLUE)

G

CRI >90

Control

3605 _ _ **/ AY** ProtoPixel*

Materials

Frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 24V 28 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

1 Box 0,105 x 0,08 x 1,09 m
Vol 0,009 m^3
Gross weight 3,17 Kg Net weight 2,4 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 CE UKCA EAC

102 x 3,5 cm

3608
TRIMLESS

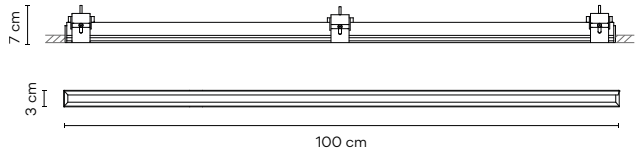

Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

Infinite Colour (TW+ RGB)
/A _ 1575 lm - 1861 lm
70 lm 11 (RED)
182 lm (GREEN)
35 lm (BLUE)

G

CRI >90

Control

3608 _ _ **/ AY** ProtoPixel*

Materials

Trimless frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics

1 x LED STRIP 24V 28 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,02 m^3
Gross weight 3,17 Kg Net weight 2,4 Kg

Notes

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Trimless frame can be shipped in advance under request.

LED IP20 CE UKCA EAC

103 x 4 cm

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

3610
TRIM

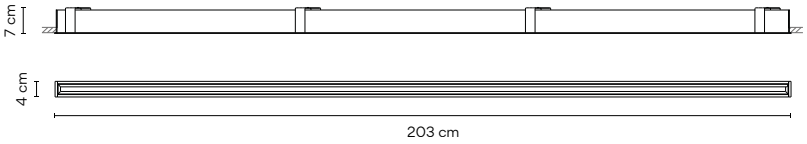

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
Infinite Colour (TW+ RGB)
/A _ 3150 lm - 3722 lm
140 lm 11 (RED)
364 lm (GREEN)
70 lm (BLUE)
G
CRI >90

Control
3610 _ _ **/ AY** ProtoPixel*

Materials
Frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED STRIP 56 W 24 V
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
1 Box 0,125 x 0,125 x 2,09 m
Vol 0,047 m³
Gross weight 5,25 Kg Net weight 4,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

LED IP20 CE UKCA EAC
202 x 3,5 cm

3613
TRIMLESS

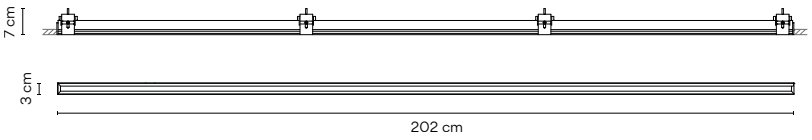

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

LED Colour Temperature
Infinite Colour (TW+ RGB)
/A _ 3150 lm - 3722 lm
140 lm 11 (RED)
364 lm (GREEN)
70 lm (BLUE)
G
CRI >90

Control
3613 _ _ **/ AY** ProtoPixel*

Materials
Trimless frame: Aluminum.
Body: Aluminum.
Shade: Aluminum.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1x LED STRIP 24V 56 W
Constant Voltage 24VDC
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,093 m³
Gross weight 5,25 Kg Net weight 4,6 Kg

Notes
ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).
Trimless frame can be shipped in advance under request.

LED IP20 CE UKCA EAC
203 x 4 cm



Palma

Design by Antoni Arola

The interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions. Palma connects light and vegetation as in the natural landscape.

Wall

3700
55 x 19 x 25 cm



3702
85 x 22 x 25 cm



3704
120 x 22 x 25 cm



3706
195 x 22 x 25 cm



3710
22 x 55 x 25 cm



3714
22 x 114 x 26 cm



3716
22 x 114 x 26 cm



3718
22 x 187 x 26 cm

3700



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3700 18 / 1B Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 3 Kg Net weight 1,8 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

3702



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3702 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,87 x 0,31 x 0,21 m
Vol 0,0581 m³
Gross weight 4,05 Kg Net weight 2,4 Kg

LED IP20

3704



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3704 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 6,2 Kg Net weight 3,9 Kg

LED IP20

3706



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2604 lm
F
CRI >90

Control
3706 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1793 m³
Gross weight 6,4 Kg Net weight 3,9 Kg

LED IP20

3710



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3710 **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,57 x 0,31 x 0,21 m
Vol 0,0382 m³
Gross weight 2,6 Kg Net weight 1,8 Kg

LED IP20

3714



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3714 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 5,2 Kg Net weight 2,9 Kg

LED IP20

3716



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3716 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0081 m³
Gross weight 6,5 Kg Net weight 4,2 Kg

LED IP20

3718



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2604 lm
F
CRI >90

Control
3718 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,1793 m³
Gross weight 8,6 Kg Net weight 6,1 Kg

LED IP20

Pendant

3720



Ø 25 cm

3724



Ø 25 cm

3726



Ø 25 cm

3728



Ø 25 cm

3730



Ø 25 cm

3734



150 cm

3735



150 cm

3736



195 cm

3720



Finishes

18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature

/1 _ 2700 K - 868 lm
F

CRI >90

Control

3720 _ _ / _ _

_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials

Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics

2 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,71 x 0,27 x 0,21 m
Vol 0,0413 m³
Gross weight 3,75 Kg Net weight 2,8 Kg

Notes

3720 _ _ / 11: DALI-2 Bi-volt
3720 _ _ / 1B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

3724



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 868 lm
F
CRI >90

Control
3724 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
2 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,02 x 0,27 x 0,21 m
Vol 0,0588 m³
Gross weight 4,6 Kg Net weight 3,3 Kg

Notes
3724 _ _ / 11: DALI-2 Bi-volt
3724 _ _ / 1B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

3726



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3726 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 1,02 x 0,27 x 0,21 m
Vol 0,0588 m³
Gross weight 5,4 Kg Net weight 4,1 Kg

Notes
Extra cable length.

LED IP20

3728



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3728 _ _ **/** _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,75 x 0,53 x 0,21 m
Vol 0,0857 m³
Gross weight 8,8 Kg Net weight 4,7 Kg

Notes
Extra cable length.

LED IP20

3730



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2604 lm
F
CRI >90

Control
3730 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,75 x 0,53 x 0,21 m
Vol 0,0857 m³
Gross weight 9,5 Kg Net weight 5,4 Kg

Notes
Extra cable length.

LED IP20

3734



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2265 lm
F
CRI >90

Control
3734 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
1 x LED 2 W 500 mA
4 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,72 x 0,33 x 0,31 m
Vol 0,1790 m³
Gross weight 9,4 Kg Net weight 5,95 Kg

Notes
3724 _ _ / 1A: Push; 1-10V; DALI-2 Bi-volt
Extra cable length.

LED IP20

3735



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 2265 lm
F
CRI >90

Control
3735 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 1,72 x 0,33 x 0,31 m
Vol 0,1790 m³
Gross weight 9,4 Kg Net weight 5,95 Kg

Notes
Extra cable length.

LED IP20

3736



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 3133 lm
F
CRI >90

Control
3736 _ _ **/** _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.
Planter: PMMA.

Light Source and electronics
1 x LED 2 W 500 mA
6 x LED 4,6 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 2,17 x 0,33 x 0,31 m
Vol 0,2219 m³
Gross weight 12,29 Kg Net weight 8,16 Kg

Notes
Extra cable length.

LED IP20 Dimmer

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

Ceiling

3760



50 x 61 cm

3764



50 x 74 cm

3760



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 1736 lm
F
CRI >90

Control
3760 _ _ / _ _
_ _ **/ 11** DALI-2
_ _ **/ 1B** Push; 1-10V
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
4 x LED 4,6 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging
1 Box 0,81 x 0,33 x 0,31 m
Vol 0,0083 m³
Gross weight 6,2 Kg Net weight 3,9 Kg

LED IP20

3764



Finishes
18/ _ _ Graphite
(ADAPTA RF 9913 WX)

LED Colour Temperature
/1 _ 2700 K - 3472 lm
F
CRI >90

Control
3764 _ _ / _ _
_ _ **/ 1A** Push; 1-10V; DALI-2
_ _ **/ 1Z** Casambi

Materials
Diffuser: Blown-glass.
Profile: Aluminum.

Light Source and electronics
8 x LED 4,6 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging
1 Box 0,81 x 0,33 x 0,31 m
Vol 0,0083 m³
Gross weight 9,5 Kg Net weight 5,4 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Bigger

Design by La Invisible

Bigger serves as statement lighting without overbearing the space it occupies, radiating with profuse light which cascades down from the ceiling, its impressive scale bringing the space to life.

Ceiling

3900

Ø 80 cm



3905

Ø 84 cm



3910

Ø 103 cm



3915

Ø 107 cm

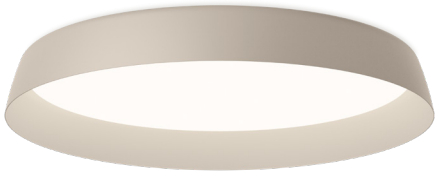

3900



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 6547,3 lm
D

/3 _ 3500 K - 7359,4 lm
C

Tunable White

/8 _ (2200 K - 4000 K) 5748,1 lm - 7351,4 lm
C

CRI >90

Control

3900 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m^3
Gross weight 11,65 Kg Net weight 9,65 Kg

Notes

3900 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

3905



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 6547,3 lm
D
/3 _ 3500 K - 7359,4 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
C

CRI >90

Control

3905 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 12,7 Kg Net weight 10,75 Kg

Notes

3905 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer

3910



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3910 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 1,16 x 0,35 m
Vol 0,487 m³
Gross weight 17,9 Kg Net weight 15,8 Kg

Notes

3910 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer

3915



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C
Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3915 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 1,16 x 0,35 m
Vol 0,487 m³
Gross weight 19,2 Kg Net weight 17,1 Kg

Notes

3915 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer



Pendant



3920

Ø 80 cm



3925

Ø 84 cm



3930

Ø 103 cm



3935

Ø 107 cm

3920



Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White

/1 _ 2700 K - 6547,3 lm
D

/3 _ 3500 K - 7359,4 lm
C

Tunable White

/8 _ (2200 K - 4000 K) 5748,1 lm - 7351,4 lm
C

CRI >90

Control

3920 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Body: Aluminum.
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m^3
Gross weight 11,71 Kg Net weight 9,7 Kg

Notes

3920 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer

3925

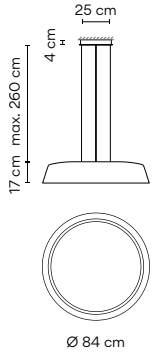

Ø 84 cm

Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 6547,3 lm
D
/3 _ 3500 K - 7359,4 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
5748,1 lm - 7351,4 lm
C

CRI >90

Control

3925 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 46,7 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 45,6 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,487 m³
Gross weight 12,75 Kg Net weight 10,75 Kg

Notes

3925 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer

3930



Ø 103 cm

Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C

Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3930 _ _ / _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 1,16 x 0,35 m
Vol 0,487 m³
Gross weight 18 Kg Net weight 15,9 Kg

Notes

3930 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer

3935

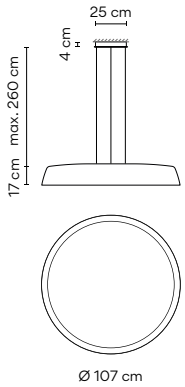

Finishes

- **23/** _ _ Beige L1 (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

Static White
/1 _ 2700 K - 12826,9 lm
D
/3 _ 3500 K - 14703,6 lm
C
Tunable White
/8 _ (2200 K - 4000 K)
14743,8 lm - 11402,6 lm
C

CRI >90

Control

3935 _ _ **/** _ _

_ _ / _ **A**	Static White + Push; 1-10V; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials

Body: Aluminum. Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K - 3500 K:
1 x LED MODULE 94,1 W 1050 mA
Constant Current 1050 mA
110~240V 50/60Hz

Tunable White:
1 x LED MODULE 92,7 W 1040 mA
Constant Current 1040 mA
120~250V 50/60Hz

Packaging

1 Box 1,16 x 1,16 x 0,35 m
Vol 0,487 m^3
Gross weight 19,3 Kg Net weight 17,2 Kg

Notes

3935 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 Dimmer



Wind

Design by Jordi Vilardell

A perfect marriage of technology and tradition.
Wind's drum shade is made of fibreglass, an innovative webbed texture and pattern that elevates the visual contribution of this timeless silhouette.

Outdoor



4072
Ø 60 cm



4077
Ø 60 cm



4078
Ø 120 cm



4057
Ø 60 x 191 cm



4062
Ø 120 x 195 cm



4067
Ø 60 x 166 cm

4057



Finishes

- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1 _ 2700 K - 3299 lm

D

CRI >90

Control

4057 _ _ **/ 10** On/ Off

Materials

Shade: FG- Fiberglass. Weight: Concrete.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 1,0300 m³
Gross weight 45,1 Kg Net weight 27,8 Kg

Notes

Portable version. Electric cable 1,5 m

LED IP64

Product specifications subject to change without notice. Please check vibia.com for updated information.

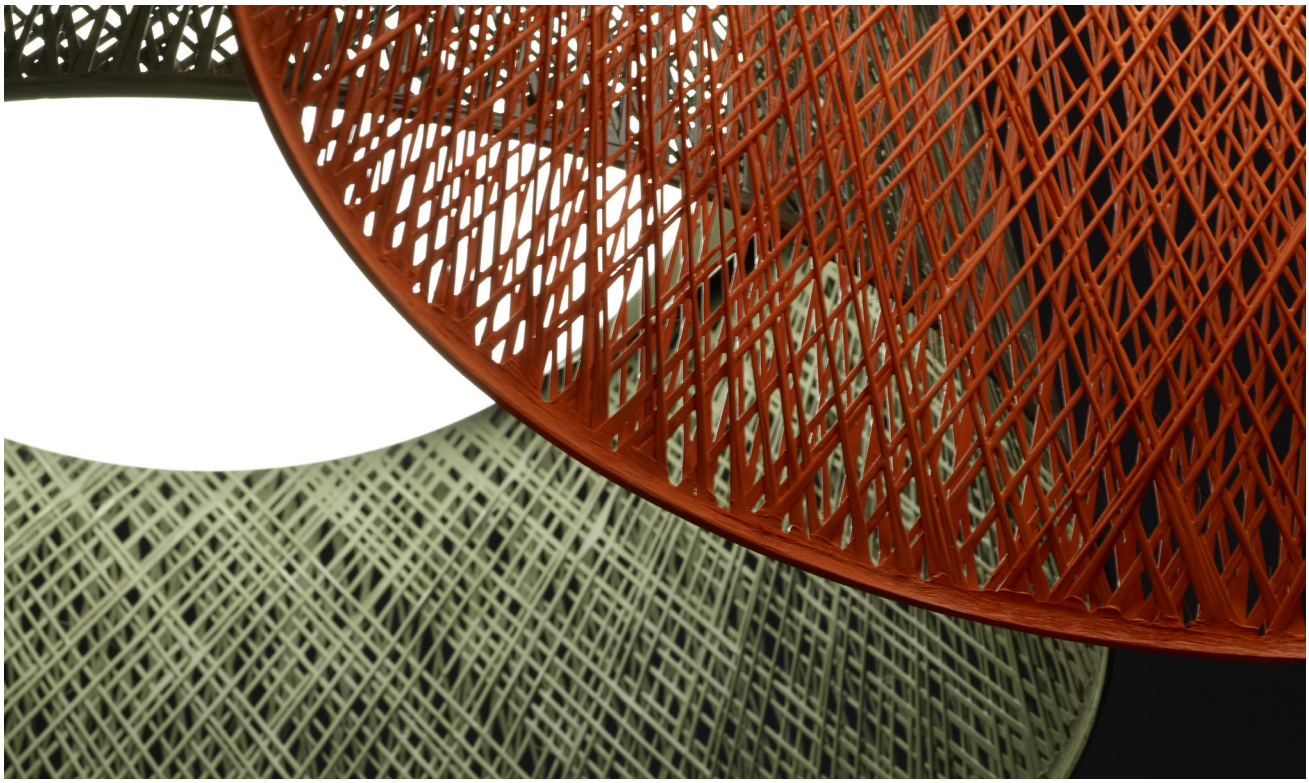

4062

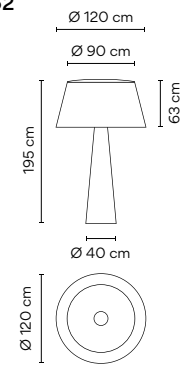

Finishes

- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1 _ 2700 K - 3481 lm

D

CRI >90

Control

4062 _ _ **/ 10** On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

4 x LED PLATE 14 W 500 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

4 Boxes
Total Vol 2,3500 m^3
Gross weight 125,2 Kg Net weight 113,23 Kg

Notes

Portable version. Electric cable 2 m

LED IP64 Multi-volt

4067



Finishes

- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature

/1 _ 2700 K - 3481 lm

D

CRI >90

Control

4067 _ _ **/ 10** On/ Off

Materials

Shade: FG- Fiberglass. Base: FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED PLATE 25 W 700 mA
1 x LED 2,4 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

3 Boxes
Total Vol 1,5000 m^3
Gross weight 50 Kg Net weight 30,5 Kg

Notes

Portable version. Electric cable 1,5 m

LED IP64

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

4072



Finishes
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
/1 _ 2700 K - 3299 lm
D
CRI >90

Control
4072 _ _ **/ 10** On/ Off

Materials
Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics
1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,50 x 0,77 x 0,77 m
Vol 0,2970 m³
Gross weight 11,1 Kg Net weight 9,9 Kg

Notes
Surface mounted
Extra cable length.

LED IP65

4077



Finishes
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
/1 _ 2700 K - 3299 lm
D
CRI >90

Control
4077 _ _ **/ 10** On/ Off

Materials
Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics
1 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,67 x 0,67 x 0,62 m
Vol 0,2970 m³
Gross weight 11 Kg Net weight 9,9 Kg

Notes
Surface mounted
Extra cable length.

LED IP65

4078



Finishes
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)
- **61/** _ _ Ocre red (NCS S 3050-Y60R)

LED Colour Temperature
/1 _ 2700 K - 3299 lm
D
CRI >90

Control
4078 _ _ **/ 10** On/ Off

Materials
Shade: FG- Fiberglass. Canopy: Steel.
Lid: Steel. Diffuser: PMMA.

Light Source and electronics
3 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,74 x 1,24 x 1,27 m
Vol 1,1300 m³
Gross weight 38 Kg Net weight 30 Kg

Notes
Indoor only
Extra cable length.

LED IP20 Multi-volt



Break

Design by Xuclà & Alemany

Break is distinguished by its architectural attitude. A series of cubic volumes provide indirect downlight while doubling up as a dynamic sculptural presence.

Outdoor



4101
25 x 81 cm



4106
25 x 43 cm



4108
48 x 38 cm

4101



Finishes
80/ _ _ Concrete
(Natural finish)

LED Colour Temperature
/1 _ 2700 K - 710 lm
E
CRI >80

Control
4101 _ _ **/ 10** On/ Off

Materials
Body: Steel.
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,1032 m³
Gross weight 38,9 Kg Net weight 35,01 Kg

LED IP66 Bi-volt

4106



Finishes
80/ _ _ Concrete
(Natural finish)

LED Colour Temperature
/1 _ 2700 K - 710 lm
E
CRI >80

Control
4106 _ _ **/ 10** On/ Offf

Materials
Head: Concrete.
Base: Concrete.
Diffuser: PMMA.

Light Source and electronics
1 x LED 6,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,88 x 0,35 x 0,34 m
Vol 0,0598 m³
Gross weight 21,5 Kg Net weight 19,35 Kg

LED IP66 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4108



Finishes

22/ _ _ Graphite Black
(NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 2500 lm
D
CRI >80

Control

4108 22 / 10 On/ Off

Materials

Body: Steel.
Diffuser: PMMA.

Light Source and electronics

2 x LED Strip 9,2 W 400 mA
Constant Current 400 mA
220~240V 50/60Hz

Packaging

1 Box 0,49 x 0,51 x 0,52 m
Vol 0,1312 m^3
Gross weight 6,6 Kg Net weight 16 Kg

LED IP66



Break Plus

Design by Xuclà

Designed to blend instinctively with the architecture in which it exists, Break Plus converts any wall into a three dimensional mural. Arranged individually or as a group, it consists of four geometric volumes that cast beams of diffuse light upwards, downwards -or in both directions- creating a dynamic dialogue between light and shadow.

Outdoor

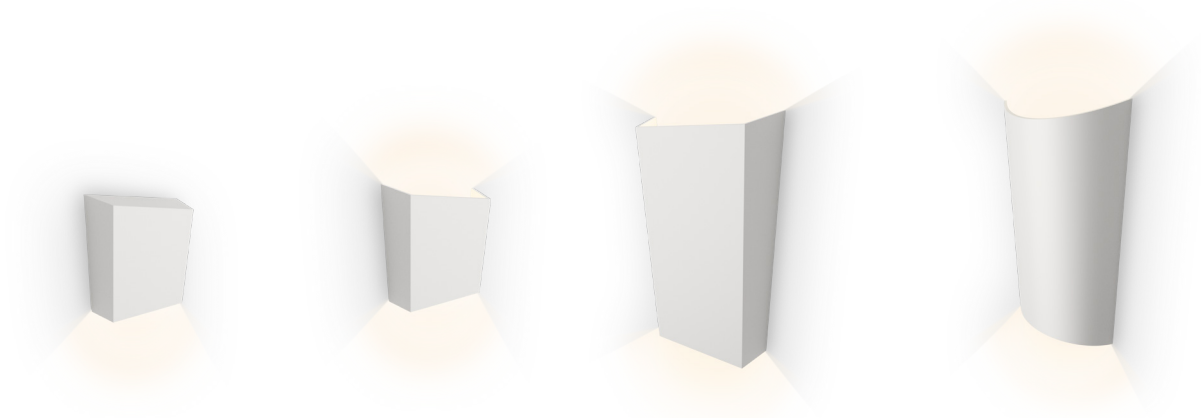

4112
12 x 14 cm

4114
12 x 14 cm

4116
21 x 34 cm

4118
19 x 32 cm

4112



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 113 lm
F

/3 _ 3500 K - 146 lm
D

CRI >90

Control

4112 _ _ / _ _

_ _ / _ **0**	On/ Off
_ _ / _ **1** _ **30**	DALI-2 (Remote)
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m^3
Gross weight 1 Kg Net weight 0,610 Kg

Notes

4112 _ _ / _ 0: On/ Off Multi-volt
4112 _ _ / _ 1 _ 30: DALI-2 Bi-volt

LED IP65

4114



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 227 lm
F

/3 _ 3500 K - 292 lm
D

CRI >90

Control

4114 _ _ / _ _

_ _ / _ **0**	On/ Off
_ _ / _ **1** _ **30**	DALI-2 (Remote)
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m^3
Gross weight 1 Kg Net weight 0,590 Kg

Notes

4114 _ _ / _ 0: On/ Off Multi-volt
4114 _ _ / _ 1 _ 30: DALI-2 Bi-volt

LED IP65

Product specifications subject to change without notice. Please check vibia.com for updated information.



4116



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
G
/3 _ 3500 K - 925 lm
F
CRI >90

Control

4116 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 4W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
Vol 0,0120 m^3
Gross weight 3,2 Kg Net weight 2,2 Kg

Notes

4116 _ _ / _ 0: On/ Off Multi-volt
4116 _ _ / _ 1 _ 30: DALI-2 Bi-volt

LED IP65

4118



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **95/** _ _ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
G
/3 _ 3500 K - 925 lm
F
CRI >90

Control

4118 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 4W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
Vol 0,0120 m^3
Gross weight 3,2 Kg Net weight 1,71 Kg

Notes

4118 _ _ / _ 0: On/ Off Multi-volt
4118 _ _ / _ 1 _ 30: DALI-2 Bi-volt

LED IP65

Empty

Design by Xuclà

Empty, lends itself to Vibia's 'furniture meets light' concept. Incorporating a table, stool and light fixture into a single three-dimensional entity, each geometric structure glows with subtle, indirect light from an invisible source.

Outdoor



4125
45 x 45 cm



4130
45 x 70 cm



4135
25 x 25 cm



4136
25 x 55 cm

4125



Finishes

18/ _ _ Polymer Concrete Grey (NCS S 2002-B50G)

22/ _ _Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 664 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4125 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,56 x 0,50 x 0,50 m
Vol 0,176 m^3
Gross weight 40 Kg Net weight 36 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 Multi-volt

4130



Finishes

18/ _ _ Polymer Concrete Grey (NCS S 2002-B50G)

22/ _ _Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 664 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4130 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,81 m
Vol 0,254 m^3
Gross weight 54,7 Kg Net weight 49,7 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4135



Finishes

18/ _ _ Polymer
Concrete Grey
(NCS S 2002-B50G)

22/ _ _Graphite Black
(NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 304 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4135 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,36 x 0,36 x 0,36 m
Vol 0,04 m³
Gross weight 12,2 Kg Net weight 10,4 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 Bi-volt

4136



Finishes

18/ _ _ Polymer
Concrete Grey
(NCS S 2002-B50G)

22/ _ _Graphite Black
(NCS S 8000-N)

LED Colour Temperature

/1 _ 2700 K - 304 lm
/3 _ 3500 K - 1247 lm
G
CRI >80 CRI >90

Control

4136 _ _ **/** _ **0** On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,36 x 0,36 x 0,65 m
Vol 0,084 m³
Gross weight 22 Kg Net weight 19 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66
Dimmer Bi-volt

Out

Design by Víctor Carrasco

A romantic response to the global transition to life outside, Out brings the intimacy of indoor lighting outdoors. Suitable for illuminating a table or meeting point, this luminaire emanates with a soft, diffuse downlight, its source obscured by a translucent screen.

Floor Outdoor



4270 Not Fixed
211 x 242 cm

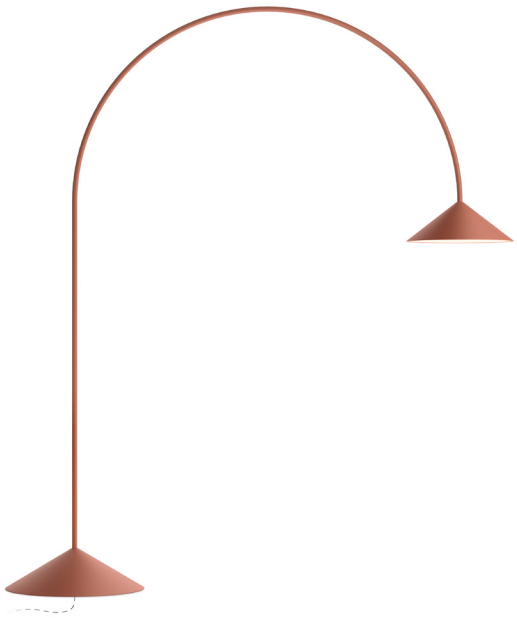

4275 Bolt-down “hard wired”
211 x 242 cm

4270



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1300 lm

F

CRI >90

Control

4270 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials

Tube: Stainless Steel.
Shades: Aluminum.
Diffuser: PE- Polyethylene.

Light Source and electronics

1 x LED 12,4 W 700 mA
Constant Voltage 24V 1.0A
220~240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m³
Gross weight 84 Kg Net weight 49,5 Kg

Notes

Switch on the cable. Electric cable 4 m.

LED IP44



4275



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1300 lm

F

CRI >90

Control

4275 _ _ / _ _

_ _ / _ **1** DALI-2

_ _ / _ **Z** _ **30** Casambi (Remote)

Materials

Tube: Stainless Steel.
Shades: Aluminum.
Diffuser: PE- Polyethylene.

Light Source and electronics

1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz

Packaging

5 Boxes
Box 1: 0,17 x 0,39 x 0,51 m
Box 2: 0,17 x 0,39 x 0,51 m
Box 3: 0,60 x 0,60 x 0,27 m
Box 4: 0,72 x 0,72 x 0,32 m
Box 5: 2,40 x 2,10 x 0,1 m
Total Vol 0,835 m^3
Gross weight 84 Kg Net weight 49,5 Kg

Notes

4275 _ _ / _ 1: DALI-2 Bi-volt

Bolt-down “hard wired”

LED IP65

Up

Design by Ramos & Bassols

Inspired by the neoclassical cornice, Up's geometric form protudes from the ceiling with a quiet elegance. Its broad flat diffuser and refined rim create the illusion of daylight passing through an opening in the ceiling.

Ceiling

4440
Ø 50 cm



4442
Ø 77 cm



4460
106 x 106 cm

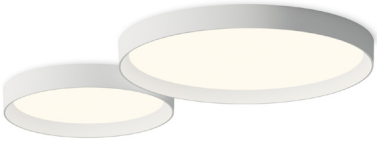

4452
31 x 121 cm



4454
64 x 64 cm



4440



Finishes

18/ _ _ Graphite
(RAL 7016)

93/ _ _ White
(RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4440 _ _ / _ _

_ _ / _ A	Static White + Push; 1-10V; DALI-2
_ _ / _ Z	Static White + Casambi
_ _ / 81	Tunable White + DALI-2 DT8
_ _ / 8Z	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,55 x 0,55 m
Vol 0,0514 m^3
Gross weight 11 Kg Net weight 7,5 Kg

LED IP20

4442



Finishes

18/ _ _ Graphite
(RAL 7016)

93/ _ _ White
(RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3959 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
3138 lm - 4238 lm
G - F

CRI >90

Control

4442 _ _ / _ _

_ _ / _ A	Static White + Push; 1-10V; DALI-2
_ _ / _ Z	Static White + Casambi
_ _ / 81	Tunable White + DALI-2 DT8
_ _ / 8Z	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 55,3 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,90 x 0,90 m
Vol 0,1377 m^3
Gross weight 13 Kg Net weight 15 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

4452



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3957 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
4355 lm - 5744 lm
G - F

CRI >90

Control

4452 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,42 x 1,31 m
Vol 0,0924 m³
Gross weight 14 Kg Net weight 12 Kg

LED IP20

4454



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3957 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
5050 lm - 5039 lm
G - F

CRI >90

Control

4454 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110~240V 50/60Hz

Packaging

1 Box 0,17 x 0,73 x 0,73 m
Vol 0,0905 m³
Gross weight 14 Kg Net weight 13 Kg

LED IP20

4460



Finishes
- **18/** _ _ Graphite (RAL 7016)
- **93/** _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1 _ 2700 K - 3957 lm
G

Tunable White
/8 _ (2200 K - 4000 K)
5039 lm - 6699 lm
G - F

CRI >90

Control

4460 _ _ **/** _ _

_ _ **/** _ **A**	Static White + Push; 1-10V; DALI-2
_ _ **/** _ **Z**	Static White + Casambi
_ _ **/ 81**	Tunable White + DALI-2 DT8
_ _ **/ 8Z**	Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
1 x LED PLATE 55,3W 750 mA
Constant Current 500 / 750 mA
110~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1891 m³
Gross weight 24 Kg Net weight 23 Kg

Notes

Only one electric connection point

LED IP20

Origami

Design by Ramón Esteve

Recalling the folded paper of the Japanese art form for which it's named, Origami generates a stunning play of light and shadows. Composed of two architectural modules that be arranged in countless personalized designs, it creates the effect of climbing ivy along a blank expanse of wall.

Wall Outdoor

4500
30 x 30 cm

4501
30 x 30 cm

4504
53 x 63cm



4506
70 x 91 cm

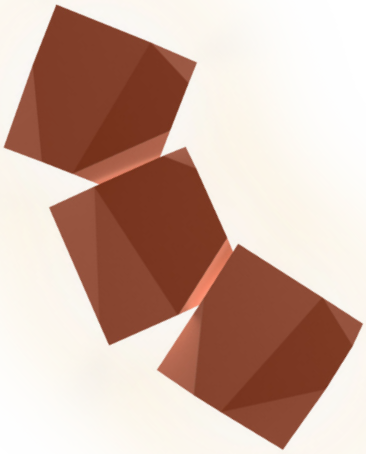

4508
94 x 107 cm

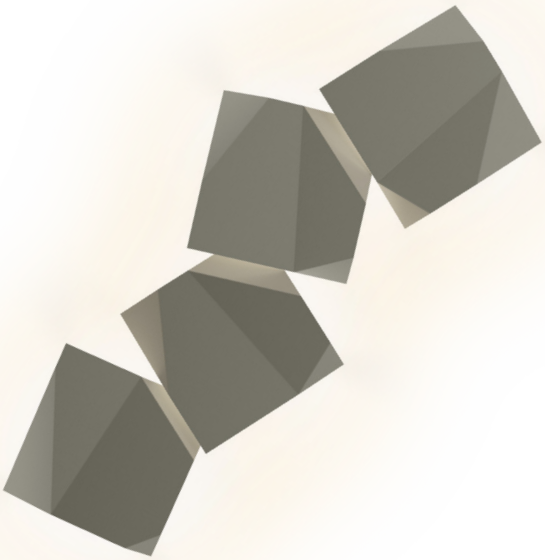

Product specifications subject to change without notice. Please check vibia.com for updated information.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Origami composition quick and easy at vibia.com

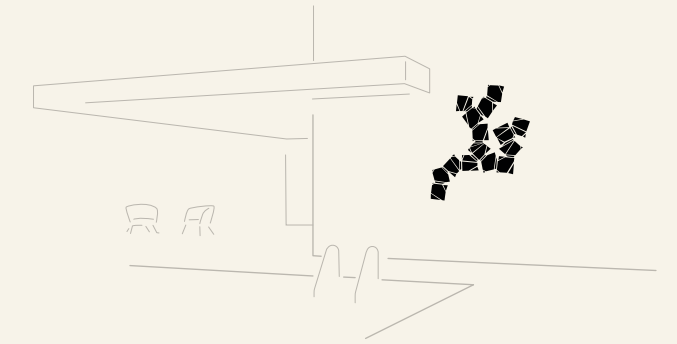

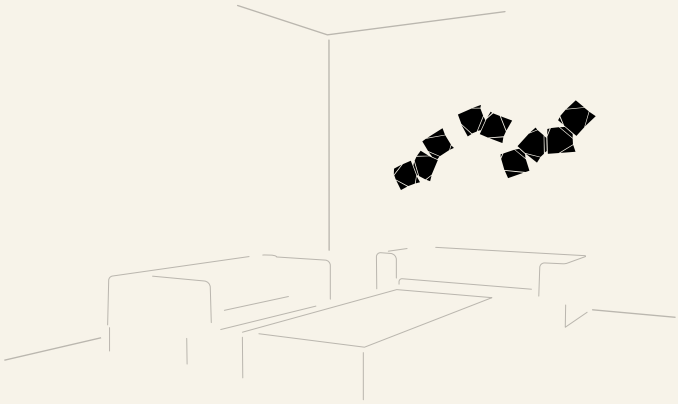

4500



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 756 lm
D

/3 _ 3500 K - 799 lm
E

CRI >90

Control

4500 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m^3
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 Multi-volt

4501



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 756 lm
D

/3 _ 3500 K - 799 lm
E

CRI >90

Control

4501 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,35 x 0,35 x 0,12 m
Vol 0,0150 m^3
Gross weight 1,5 Kg Net weight 1 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 Multi-volt

4504



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1512 lm
D

/3 _ 3500 K - 1598 lm
E

CRI >90

Control

4504 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

2 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,64 x 0,40 x 0,22 m
Vol 0,0563 m^3
Gross weight 4,05 Kg Net weight 2,15 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 Multi-volt

4506



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2269 lm
D

/3 _ 3500 K - 2397 lm
E

CRI >90

Control

4506 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

3 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,95 x 0,40 x 0,22 m
Vol 0,0836 m^3
Gross weight 5,33 Kg Net weight 3,23 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 Multi-volt

4508



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 3025 lm
D

/3 _ 3500 K - 3196 lm
E

CRI >90

Control

4508 _ _ **/** _ **4** TRIAC

Materials

Shade: ABS.
Diffuser: PC- Polycarbonate.
Lid: PC- Polycarbonate.
Arm: PC- Polycarbonate.

Light Source and electronics

4 x LED STRIP 6,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 1,25 x 0,40 x 0,22 m
Vol 0,1100 m^3
Gross weight 7,2 Kg Net weight 6,48 Kg

Notes

A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP65 Multi-volt



Palo Alto

Design by Xuclà

Palo Alto is defined by a linear, angular silhouette. Industrial in style yet natural in form, it recalls a tree whose steel “branches” are embedded with LEDs, illuminating the surrounding landscape with a diffuse downlight.

Outdoor

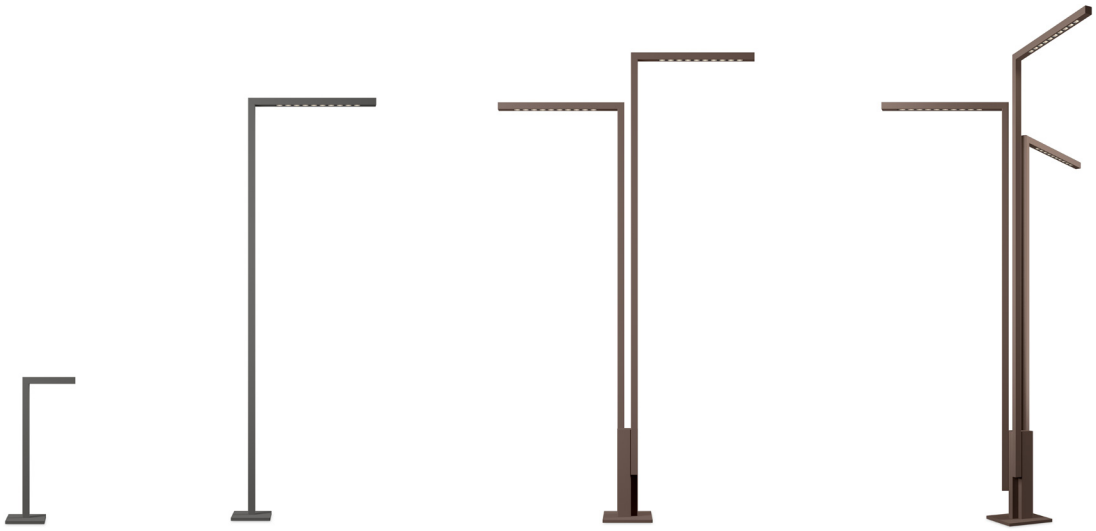

4510
35 x 90 cm

4516
85 x 280 cm

4539
85 x 310 cm

4540
136 x 310 x 161 cm

4510



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 179 lm
/3 _ 3500 K - 179 lm
G
CRI >90

Control
4510 _ _ **/** _ **0** On/ Off

Materials
Body: Steel.
Cover: Steel.

Light Source and electronics
2 x LED 2,2 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,44 x 0,40 x 1,10 m
Vol 0,2080 m³
Gross weight 11,1 Kg Net weight 10 Kg

LED IP65 Bi-volt

4516



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1044 lm
/3 _ 3500 K - 1045 lm
G
CRI >90

Control
4516 _ _ **/** _ **0** On/ Off

Materials
Body: Steel.
Cover: Steel.

Light Source and electronics
1 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,32 x 2,64 m
Vol 0,2703 m³
Gross weight 18,4 Kg Net weight 16,5 Kg

LED IP65 Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4539



Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2089 lm
/3 _ 3500 K - 2089 lm

G

CRI >90

Control

4539 _ _ / _ **0** On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

2 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 2,61 m
Vol 0,3570 m^3
Gross weight 46,4 Kg Net weight 41,76 Kg

LED IP65 Multi-volt

4540

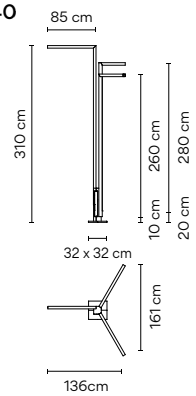

Finishes

- **22/** _ _ Graphite Black (NCS S 8000-N)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3134 lm
/3 _ 3500 K - 3134 lm

G

CRI >90

Control

4540 _ _ / _ **0** On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

3 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,40 x 0,44 x 2,64 m
Vol 0,4646 m^3
Gross weight 55,4 Kg Net weight 49,86 Kg

LED IP65 Multi-volt



Brisa

Design by Lievore, Altherr, Molina

Inspired by the forest blue bellflower,
Brisa is the essence of flawless landscape integration.
Its stylised silhouette and natural inspiration bring
a subtle charm to any exterior.

Outdoor



4625
10 x 103 cm



4630
10 x 100 cm



4635
22 x 99,5 x 23 cm



4640
30 x 100 x 27,5 cm

4625



Finishes

- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature

/1 _ 2700 K - 181 lm
G

/3 _ 3500 K - 193 lm
F

CRI >90

Control

4625 _ _ **/** _ **0** On/ Off

Materials

Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m^3
Gross weight 1,8 Kg Net weight 1,3 Kg

Notes

Spike. Surface

LED IP64 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4630



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature
/1 _ 2700 K - 181 lm
G
/3 _ 3500 K - 193 lm
F
CRI >90

Control
4630 _ _ **/** _ **0** On/ Off

Materials
Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,16 x 0,16 x 1,6 m
Vol 0,0409 m³
Gross weight 2,6 Kg Net weight 2 Kg

Notes
Built-in

LED IP65 Multi-volt Ø 13 cm

4635



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature
/1 _ 2700 K - 543 lm
G
/3 _ 3500 K - 581 lm
F
CRI >90

Control
4635 _ _ **/** _ **0** On/ Off

Materials
Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics
3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6,5 Kg Net weight 5,85 Kg

Notes
Built-in

LED IP65 Bi-volt Ø 17 cm

4640



Finishes
- **07/** _ _ Khaki (RAL 7039)
- **54/** _ _ Oxide (RAL 8014)

LED Colour Temperature
/1 _ 2700 K - 905 lm
G
/3 _ 3500 K - 965 lm
F
CRI >90

Control
4640 _ _ **/** _ **0** On/ Off

Materials
Shade and Base: Aluminum.
Disc: Stainless steel.
Vertical tube: Steel.

Light Source and electronics
5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,32 x 0,36 x 1,16 m
Vol 0,1336 m³
Gross weight 6 Kg Net weight 4 Kg

Notes
Built-in

LED IP65 Bi-volt Ø 22,5 cm

Dots

Design by Martín Azúa

A diminutive wall sconce delivers outsized impact in the form of simple, circular v. Seamlessly connecting a space with an intimate landscape of beams and halos, the collection creates a melody of light like a composition of musical notes in concert with another.

Wall



Ø 17,5 cm

Ajustable: 360° turn.
4662: On-off switch on the back plate.

4660 - 4662



Ø 17,5 cm

Once installed position is fixed and cannot be adjusted.

4665



Ø 17,5 cm

Ajustable: 360° turn.

4670



Ø 17,5 cm

4675

4660



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

Control
4660 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** TRIAC

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

Control
4660 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** TRIAC

Materials
Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes
22º light halo

LED IP20

4662



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

Control
4662 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **4** TRIAC

Finishes
- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature
/1 _ 2700 K - 482 lm
/3 _ 3500 K - 520 lm
F
CRI >90

4662 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off
- _ _ **/** _ **4** TRIAC

Materials
Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging
1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes
22º light halo
Switch on the back plate

LED IP20

4665



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control

4665 _ _ / _ **0** On/ Off

Materials

Body: ABS.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
Gross weight 0,65 Kg Net weight 0,4 Kg

LED IP20

4670



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control

4670 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** TRIAC

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control

4670 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED 5,75 W 500 mA
Constant Current 500 mA
220~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m³
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

4675



Finishes

- **13/** _ _ Off-White (NCS S 1000-N)
- **27/** _ _ Brown L1 (NCS S 1505-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 573 lm
E
/3 _ 3500 K - 515 lm
F
CRI >90

Control

4675 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** TRIAC

Finishes

- **82/** _ _ White oak
- **83/** _ _ American walnut

LED Colour Temperature

/1 _ 2700 K - 482 lm
/3 _ 3500 K - 515 lm
F
CRI >90

Control

4675 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** TRIAC

Materials

Body: ABS / Wood.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 4,5 W 500 mA
Constant Current 500 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,22 x 0,21 m
Vol 0,0062 m^3
ABS: Gross weight 0,65 Kg
Net weight 0,4 Kg
Natural wood: Gross weight 0,85 Kg
Net weight 0,6 Kg

Notes

4675 _ _ / _ 0: On/ Off Bi-volt

LED IP20



Dots Glass

Design by Martín Azúa

Sheathed in layers of transparent optical glass, the LED source within the fixture generates a warm, 360-degree glow, while the layering of the glass and aluminum at the edge of each disc creates a pulsating ambient effect.

Wall Outdoor



4680

Ø 20 cm

4680



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 985 lm
/3 _ 3500 K - 1015 lm

F

CRI >90

Control

4680 _ _ **/** _ _

_ _ **/** _ **0** On/ Off
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** _ **30** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: Optical Glass.

Light Source and electronics

1 x LED 10 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging

1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m^3
Gross weight 1,8 Kg Net weight 2,2 Kg

Notes

4680 _ _ / _ 1: DALI-2 Bi-volt
4680 _ _ / _ 3: 1-10V Bi-volt

LED IP66



Dots Outdoor

Design by Martín Azúa

Diminutive, compact and easily installed, Dots Outdoor is the perfect solution for subtle outdoor illumination. Designed to nestle discreetly into the undergrowth of a garden or patio, Dots shines at night with a diffuse or focused glow from an invisible source.

Outdoor

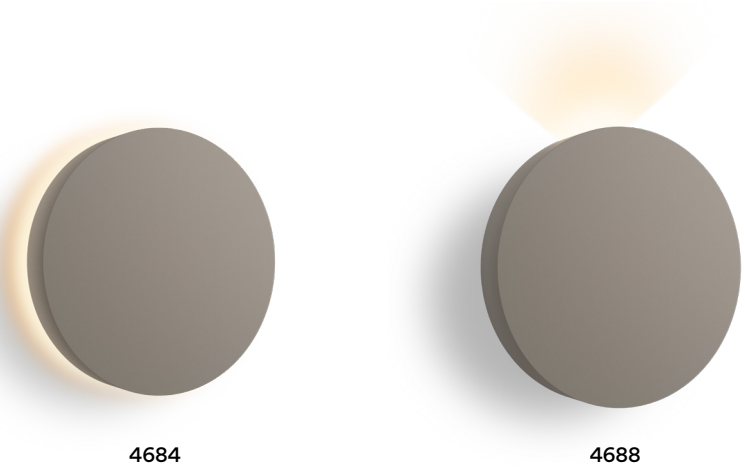

4684
Ø 20 cm

4688
Ø 20 cm

4684



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 400 lm
/3 _ 3500 K - 412 lm
F
CRI >90

Control
4684 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5 W 500 mA
Constant Current 500 mA
100~240Vac 50/60Hz

Packaging
1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m^3
Gross weight 1,6 Kg Net weight 2,0 Kg

Notes
4684 _ _ / _ 0: On/ Off Bi-volt

LED IP66

4688



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 500 lm
/3 _ 3500 K - 515 lm
F
CRI >90

Control
4688 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminium.
Diffuser: Glass.

Light Source and electronics
1 x LED 5,75 W 500 mA
Constant Current 500 mA
100~277Vac 50/60Hz

Packaging
1 Box 0,305 x 0,305 x 0,105 m
Vol 0,00976 m^3
Gross weight 1,7 Kg Net weight 2,1 Kg

Notes
4688 _ _ / _ 0: On/ Off Bi-volt

LED IP66

Product specifications subject to change without notice. Please check vibia.com for updated information.

Outdoor



4695
Ø 20 x 12 cm



4697
Ø 15 x 9 cm



4700
Ø 20 x 12 cm



4702
Ø 15 x 9 cm

4695



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 750,2 lm
F
CRI >90

Control
4695 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 7,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz

Packaging
1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m^3
Gross weight 3,4 Kg Net weight 2,7 Kg

Notes
4695 _ _ / _ 0: On/ Off Multi-volt
4695 _ _ / _ 1 _ 30: DALI-2 Bi-volt

LED IP65

4697



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 375,9 lm
F
CRI >90

Control
4697 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRP 4,6W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0624 m^3
Gross weight 1,9 Kg Net weight 1,5 Kg

Notes
4697 _ _ / _ 0: On/ Off Multi-volt
4697 _ _ / _ 1 _ 30: DALI-2 Bi-volt

LED IP65

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

4700



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1445 lm
F
CRI >90

Control
4700 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 14,8W 350 mA
Constant Current 350 mA
100~277V 50/60Hz

Packaging
1 Box 0,30 x 0,27 x 0,18 m
Vol 0,0146 m³
Gross weight 3,8 Kg Net weight 3,1 Kg

Notes
4700 _ _ / _ 0: On/ Off Multi-volt
4700 _ _ / _ 1 _ 30: DALI-2 Bi-volt

LED IP65

4702



Finishes
- **22/** _ _ Graphite Black (NCS S 8000-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1294 lm
F
CRI >90

Control
4702 _ _ **/** _ _

_ _ **/** _ **0**	On/ Off
_ _ **/** _ **1** _ **30**	DALI-2 (Remote)
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 12,8W 300 mA
Constant Current 300 mA
100~277V 50/60Hz

Packaging
1 Box 0,24 x 0,20 x 0,13 m
Vol 0,0146 m³
Gross weight 1,9 Kg Net weight 1,5 Kg

Notes
4702 _ _ / _ 0: On/ Off Multi-volt
4702 _ _ / _ 1 _ 30: DALI-2 Bi-volt
4702 _ _ / _ Z _ 30: Casambi Bi-volt

LED IP65

Product specifications subject to change without notice. Please check vibia.com for updated information.



Meridiano

Design by Jordi Vilardell & Meritxell Vidal

Composed of a structure of corrugated steel rods, Meridiano radiates with a burst of light and shadow that enriches its surrounding environment. As a floor lamp, it doubles up as outdoor furniture; as a wall sconce, it animates a bare façade with a dynamic sunburst motif.

Outdoor



4720



4710

Ø 64 cm

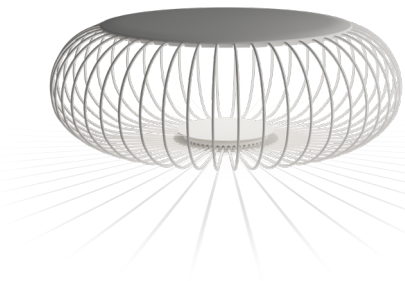

4715

Ø 92 cm

4710



Finishes

07/ _ _ Khaki (RAL 7006)

58/ _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/3 _ 3500 K - 1709 lm
C
CRI >80

Control

4710 _ _ **/** _ **0** On/ Off

Materials

Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,58 x 0,70 x 0,70 m
Vol 0,2842 m³
Gross weight 26 Kg Net weight 23 Kg

Notes

It can be connected with or without a plug.
Electric cable 2 m.

LED IP64 Bi-volt

4715



Finishes

07/ _ _ Khaki (RAL 7006)

58/ _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/3 _ 3500 K - 1709 lm
C
CRI >80

Control

4715 _ _ **/** _ **0** On/ Off

Materials

Seat: PU- Polyurethane. Rods: Steel.
Arm: Steel. Diffuser: Glass.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,43 x 0,94 x 0,94 m
Vol 0,38 m³
Gross weight 20,1 Kg Net weight 16,7 Kg

Notes

It can be connected with or without a plug.
Electric cable 2 m.

LED IP64 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4720



Finishes

07/ _ _ Khaki
(RAL 7006)

58/ _ _ Off-white
(PANTONE
WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D

CRI >90

/3 _ 3500 K - 1709 lm
C

CRI >80

Control

4720 _ _ **/** _ **0** On/ Off

Materials

Base: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,106 x 0,310 x 0,310 m
Vol 0,102 m^3
Gross weight 1,5 Kg Net weight 1 Kg

LED IP65 Bi-volt

June

Design by Ana Mir + Emili Padrós (Emiliana Design Studio)

Inspired by traditional lanterns, June's moon-like spheres cast a warm, ambient glow, lending a touch of nostalgia to an outdoor space.

Outdoor



4785

Ø 9 x 120 cm



4780

Ø 9 x 80 cm

4780



Finishes

54/ _ _ Brown
(Pantone Black U)

LED Colour Temperature

/1 _ 2700 K - 95,5 lm
F

CRI >90

Control

4780 54 / 10 On/ Off

Materials

Diffuser: Opal blown glass.
Tubes: Steel.

Light Source and electronics

1 x LED 1 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 1 x 0,4 x 0,4 m
Vol 0,16 m³
Gross weight 5 Kg Net weight 3 Kg

Notes

Built-in.

LED IP65 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



4785



Finishes

● **54/** _ _ Brown
(Pantone Black U)

LED Colour Temperature

/1 _ 2700 K - 190,9 lm
F
CRI >90

Control

4785 54 / 10 On/ Offf

Materials

Diffuser: Opal blown glass.
Tubes: Steel.

Light Source and electronics

2 x LED 1 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 1,5 x 0,4 x 0,4 m
Vol 0,24 m³
Gross weight 6 Kg Net weight 4 Kg

Notes

Built-in.

LED IP65 Bi-volt

Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

Outdoor



4820
19 x 6 cm



4800 4802
6 x 60 cm

4801 4803
6 x 90 cm

4804
6 x 190 cm

4805
6 x 270 cm

4810
Ø 43 x 190 cm

4811
Ø 35 x 270 cm

4812
Ø 40 x 270 cm

4800



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 181,2 lm
/3 _ 3500 K - 181,2 lm
G
CRI >90

Control
4800 _ _ / _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA .

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,125 x 0,125 x 1,3 m
Vol 0,0203 m^3
Gross weight 4 Kg Net weight 3,6 Kg

Notes
Surface

LED IP66 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4801



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 362,4 lm
/3 _ 3500 K - 362,4 lm
G
CRI >90

Control
4801 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 6 Kg

Notes
Surface

LED IP66 Bi-volt

4802



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 181,2 lm
/3 _ 3500 K - 181,2 lm
G
CRI >90

Control
4802 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 7 Kg Net weight 5,5 Kg

Notes
Built-in

LED IP66 Multi-volt

4803



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 362,4 lm
/3 _ 3500 K - 362,4 lm
G
CRI >90

Control
4803 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP66 Multi-volt

4804



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 543,7 lm
/3 _ 3500 K - 543,7 lm
G
CRI >90

Control
4804 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
3 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 8 Kg Net weight 6,5 Kg

Notes
Built-in

LED IP66 Bi-volt

4805



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 724,9 lm
/3 _ 3500 K - 724,9 lm
G
CRI >90

Control
4805 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
4 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0600 m³
Gross weight 9 Kg Net weight 7 Kg

Notes
Built-in

LED IP66 Bi-volt

4810



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 906,1 lm
/3 _ 3500 K - 906,1 lm
G
CRI >90

Control
4810 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
5 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 0,1388 m³
Gross weight 15 Kg Net weight 12,5 Kg

Notes
Built-in

LED IP66 Bi-volt

4811



Finishes
- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature
/1 _ 2700 K - 1268,5 lm
/3 _ 3500 K - 1268,5 lm
G
CRI >90

Control
4811 _ _ **/** _ **0** On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
7 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
3 Boxes
Total Vol 1,660 m³
Gross weight 16,5 Kg Net weight 13 Kg

Notes
Built-in

LED IP66 Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

4812

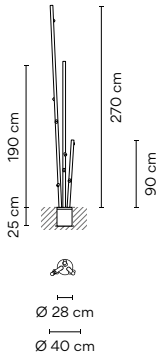

Finishes

- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 1631,0 lm
/3 _ 3500 K - 1631,0 lm

G

CRI >90

Control

4812 _ _ / _ **0** On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

9 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

4 Boxes
Total Vol 0,1854 m³
Gross weight 21,6 Kg Net weight 19,44 Kg

Notes

Built-in

LED IP66 Multi-volt

4815



Finishes

- **18** Polymer concrete (NCS S 2002-B50G)

4815 18

Materials

Base: Polymer concrete.

Packaging

1 Box 0,40 x 0,50 x 0,50 m
Vol 0,1000 m³
Gross weight 39 Kg Net weight 35 Kg

Notes

Surface installation accessory.
For ref. 4810. 4811. 4812

4820



Finishes

- **07/** _ _ Khaki (RAL 7006)
- **54/** _ _ Oxide (RAL 8017)
- **58/** _ _ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

/1 _ 2700 K - 181,2 lm
/3 _ 3500 K - 181,2 lm

G

CRI >90

Control

4820 _ _ / _ _

_ _ / _ **0** On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,10 x 0,10 m
Vol 0,0025 m³
Gross weight 2 Kg Net weight 1 Kg

Notes

Surface

LED IP66 Bi-volt

Duo

Design by Ramos & Bassols

Duo brings natural warmth to a space. Its gently curved form encases a supple wood-finished interior, lending a soothing sensibility.

Ceiling - Oak wood

4870
Ø 47,5 cm



4872
Ø 78,5 cm



4874
Ø 35 cm



4878
Ø 70 cm



4876
Ø 35 cm



4880
Ø 70 cm



4870



Finishes

18/ _ _ Graphite / Oak wood (Adapta RF9913WX)

58/ _ _ Cream / Oak wood (RAL 7044)

93/ _ _ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 2207 lm

/3 _ 3500 K - 2304 lm

F

CRI >90 CRI >80

Tunable White

/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm

G - F

CRI >90

Control

4870 _ _ / _ _

_ _ / _ **A** Static White + Push; 1-10V; DALI-2

_ _ / _ **Z** Static White + Casambi

_ _ / _ **81** Tunable White + DALI-2 DT8

_ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m^3
Gross weight 7 Kg Net weight 6 Kg

Notes

4870 _ _ / _ A: Static White + Push; 1-10V; DALI-2 Bi-volt

4870 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

4872



Finishes

- **18/** _ _ Graphite / Oak wood (Adapta RF9913WX)
- **58/** _ _ Cream / Oak wood (RAL 7044)
- **93/** _ _ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 3959 lm
F

/3 _ 3500 K - 4133 lm
E

Tunable White

/8 _ (2200 K - 4000 K) 3138 lm - 4238 lm
G - F

CRI >90

Control

4872 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m^3
Gross weight 19 Kg Net weight 17 Kg

LED IP20 CE UKCA EAC

4874



Finishes

- **18/** _ _ Graphite / Oak wood (Adapta RF9913WX)
- **58/** _ _ Cream / Oak wood (RAL 7044)
- **93/** _ _ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White

/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White

/8 _ (2200 K - 4000 K) 1244 lm - 1582 lm
G - F

CRI >90

Control

4874 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2
- _ _ / _ **B** Static White + Push; 1-10V
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m^3
Gross weight 5 Kg Net weight 4 Kg

Notes

4874 _ _ / _ 1: Static White + DALI-2 Bi-volt
4874 _ _ / _ B: Static White + Push; 1-10V Bi-volt
4874 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 CE UKCA EAC

4876



Finishes

- **18/** _ _ Graphite / Oak wood (Adapta RF9913WX)
- **58/** _ _ Cream / Oak wood (RAL 7044)
- **93/** _ _ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K)
1244 lm - 1582 lm
G - F

CRI >90

Control

4876 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2
- _ _ / _ **B** Static White + Push; 1-10V
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

Notes

4876 _ _ / _ 1: Static White + DALI-2 Bi-volt
4876 _ _ / _ B: Static White + Push; 1-10V Bi-volt
4876 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20

4878



Finishes

- **18/** _ _ Graphite / Oak wood (Adapta RF9913WX)
- **58/** _ _ Cream / Oak wood (RAL 7044)
- **93/** _ _ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4878 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes

4878 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20

4880



Finishes

- **18/** _ _ Graphite / Oak wood (Adapta RF9913WX)
- **58/** _ _ Cream / Oak wood (RAL 7044)
- **93/** _ _ White / Oak wood (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F

CRI >90

Control

4880 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Oak wood.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes

4880 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20

Ceiling - American walnut

4882
Ø 47,5 cm



4883
Ø 78,5 cm



4884
Ø 35 cm



4886
Ø 70 cm

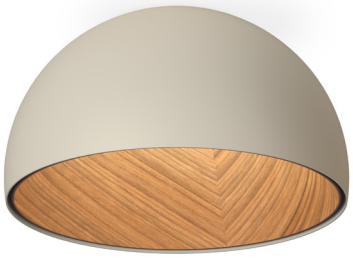

4885
Ø 35 cm



4887
Ø 70 cm

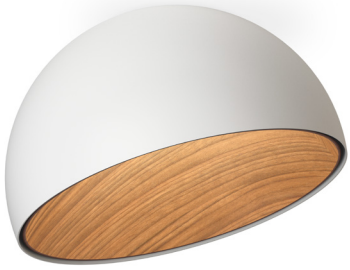

4882



Finishes

- **18/** _ _ Graphite / American walnut (Adapta RF9913WX)
- **58/** _ _ Cream / American walnut (RAL 7044)
- **93/** _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F
CRI >90 CRI >80

Tunable White
/8 _ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F
CRI >90

Control

4882 _ _ **/** _ _

- _ _ **/** _ **A** Static White + Push; 1-10V; DALI-2
- _ _ **/** _ **Z** Static White + Casambi
- _ _ **/** _ **81** Tunable White + DALI-2 DT8
- _ _ **/** _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m^3
Gross weight 7 Kg Net weight 6 Kg

LED IP20

4883



Finishes

- **18/** _ _ Graphite / American walnut (Adapta RF9913WX)
- **58/** _ _ Cream / American walnut (RAL 7044)
- **93/** _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 3959 lm F
/3 _ 3500 K - 4133 lm E

Tunable White
/8 _ (2200 K - 4000 K) 3138 lm - 4238 lm G - F

CRI >90

Control

4883 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging

1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m^3
Gross weight 19 Kg Net weight 17 Kg

LED IP20

4884



Finishes

- **18/** _ _ Graphite / American walnut (Adapta RF9913WX)
- **58/** _ _ Cream / American walnut (RAL 7044)
- **93/** _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm G

Tunable White
/8 _ (2200 K - 4000 K) 1244 lm - 1582 lm G - F

CRI >90

Control

4884 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2
- _ _ / _ **B** Static White + Push; 1-10V
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m^3
Gross weight 5 Kg Net weight 4 Kg

LED IP20

4885



Finishes

- **18/** _ _ Graphite / American walnut (Adapta RF9913WX)
- **58/** _ _ Cream / American walnut (RAL 7044)
- **93/** _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm G

Tunable White
/8 _ (2200 K - 4000 K) 1244 lm - 1582 lm G - F

CRI >90

Control

4885 _ _ / _ _

- _ _ / _ **1** Static White + DALI-2
- _ _ / _ **B** Static White + Push; 1-10V
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m^3
Gross weight 5 Kg Net weight 4 Kg

LED IP20

4886



Finishes

- **18/** _ _ Graphite / American walnut (Adapta RF9913WX)
- **58/** _ _ Cream / American walnut (RAL 7044)
- **93/** _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4886 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m^3
Gross weight 16 Kg Net weight 14 Kg

LED IP20

4887



Finishes

- **18/** _ _ Graphite / American walnut (Adapta RF9913WX)
- **58/** _ _ Cream / American walnut (RAL 7044)
- **93/** _ _ White / American walnut (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4887 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: American walnut.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m^3
Gross weight 16 Kg Net weight 14 Kg

LED IP20





Duo Petra

Design by Ramos & Bassols

Duo Petra's slate veneer lends a timeless elegance to the collection. The ceiling lamp's gently curved form encases a velvety slate-finished interior for a sophisticated, natural aesthetic.

Ceiling

4871

Ø 47,5 cm



4873

Ø 78,5 cm



4875

Ø 35 cm



4877

Ø 35 cm



4879

Ø 70 cm



4881

Ø 70 cm



Product specifications subject to change without notice. Please check vibia.com for updated information.

4871



Finishes
- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4871 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials
Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics
1 x LED PLATE 26,5 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,56 x 0,56 x 0,26 m
Vol 0,0815 m³
Gross weight 7 Kg Net weight 6 Kg

Notes
4871 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 CE UKCA EAC

4873



Finishes
- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 3959 lm
F

/3 _ 3500 K - 4133 lm
E

Tunable White
/8 _ (2200 K - 4000 K) 3138 lm - 4238 lm
G - F

CRI >90

Control

4873 _ _ / _ _

- _ _ / _ **A** Static White + Push; 1-10V; DALI-2
- _ _ / _ **Z** Static White + Casambi
- _ _ / _ **81** Tunable White + DALI-2 DT8
- _ _ / _ **8Z** Tunable White + Casambi

Materials
Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics
1 x LED PLATE 50 W 500 mA
Constant Current 750 mA
110~240V 50/60Hz

Packaging
1 Box 0,9 x 0,9 x 0,25 m
Vol 0,2025 m³
Gross weight 19 Kg Net weight 17 Kg

LED IP20 CE UKCA EAC

4875



Finishes
- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K) 1244 lm - 1582 lm
G - F

CRI >90

Control

4875 _ _ / _ _

- _ _ / **11** Static White + DALI-2
- _ _ / **1B** Static White + Push; 1-10V
- _ _ / **1Z** Static White + Casambi
- _ _ / **81** Tunable White + DALI-2 DT8
- _ _ / **8Z** Tunable White + Casambi

Materials
Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics
1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

Notes
4875 _ _ / 11: Static White + DALI-2 Bi-volt
4875 _ _ / 1B: Static White + Push; 1-10V Bi-volt
4875 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 CE UKCA EAC

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

4877



Finishes
- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 644 lm
/3 _ 3500 K - 632 lm
G

Tunable White
/8 _ (2200 K - 4000 K) 1244 lm - 1582 lm
G - F

CRI >90

Control

4877 _ _ / _ _

_ _ / _ **1** Static White + DALI-2
_ _ / _ **B** Static White + Push; 1-10V
_ _ / _ **Z** Static White + Casambi

_ _ / _ **81** Tunable White + DALI-2 DT8
_ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 12 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,44 x 0,44 x 0,35 m
Vol 0,0678 m³
Gross weight 5 Kg Net weight 4 Kg

Notes

4877 _ _ / _ 1: Static White + DALI-2 Bi-volt
4877 _ _ / _ B: Static White + Push; 1-10V Bi-volt
4877 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 CE UKCA EAC

4879



Finishes
- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4879 _ _ / _ _

_ _ / _ **A** Static White + Push; 1-10V; DALI-2
_ _ / _ **Z** Static White + Casambi

_ _ / _ **81** Tunable White + DALI-2 DT8
_ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes

4879 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 CE UKCA EAC

4881



Finishes
- **18/** _ _ Graphite / Slate (Adapta RF9913WX)
- **58/** _ _ Cream / Slate (RAL 7044)
- **93/** _ _ White / Slate (RAL 9016)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

Static White
/1 _ 2700 K - 2207 lm
/3 _ 3500 K - 2304 lm
F

Tunable White
/8 _ (2200 K - 4000 K) 1901 lm - 2461 lm
G - F

CRI >90

Control

4881 _ _ / _ _

_ _ / _ **A** Static White + Push; 1-10V; DALI-2
_ _ / _ **Z** Static White + Casambi

_ _ / _ **81** Tunable White + DALI-2 DT8
_ _ / _ **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Main Body: Aluminum.
Inner structure: Slate.

Light Source and electronics

1 x LED PLATE 26,5 W 500 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,79 x 0,79 x 0,59 m
Vol 0,3682 m³
Gross weight 16 Kg Net weight 14 Kg

Notes

4881 _ _ / 81: Tunable White + DALI-2 DT8 Multi-volt

LED IP20 CE UKCA EAC



Warm

Design by Ramos & Bassols

A contemporary take on a timeless design,
Warm features a generous drum shade in
a muted colour palette for a refined touch.

Table



4895 4896

Ø 19 x 41 cm



4900 4901

Ø 32,4 x 59 cm

4895



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 470 lm

4895 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED G9 230V 4,2 W

Packaging

2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 1,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20

4896



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 470 lm

4896 _ _ / 00

Materials

Shade: Aluminium.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED G9 230V 4,2 W

Packaging

2 Boxes
Total Vol 0,0390 m³
Gross weight 2,9 Kg Net weight 2 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20



4900



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4900 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,2153 m³
Gross weight 4,3 Kg Net weight 3,8 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20

4901



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 1520 lm

4901 _ _ / 00

Materials

Shade: Aluminum.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,2153 m³
Gross weight 4,8 Kg Net weight 4,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2 m

IP20

Floor



4905 4906

Ø 32,4 x 150 cm

4905



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4905 10 / 00

Materials

Shade: Screen.
Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,3426 m³
Gross weight 10,2 Kg Net weight 6,3 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m

IP20 CE UK CA EAC

4906



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 1520 lm

4906 _ _ / 00

Materials

Diffuser: PMMA.
Rod: Aluminum.
Base: Steel.

Light Source and electronics

3 x LED E27 230V 12 W

Packaging

2 Boxes
Total Vol 0,3426 m³
Gross weight 10,7 Kg Net weight 6,8 Kg

Notes

On/ Off switch on the cable.
Electric cable 2,5 m

IP20 CE UK CA EAC

Pendant



4925 4926

Ø 62 cm

4925



Finishes

10 White
(NCS S 0300-N)

LED 2700 K 1520 lm

4925 10 / 00

Materials

Shade: Screen.
Canopy: Steel.
Diffuser: PMMA.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging

1 Box 0,68 x 0,68 x 0,39 m
Vol 0,18 m³
Gross weight 7,7 Kg Net weight 3,9 Kg

Notes

Extra cable length.

IP20

4926



Finishes

10 White
(NCS S 0300-N)
25 Beige D1
(NCS S 4005-Y50R)
28 Brown M1
(NCS S 4020-Y60R)
56 Green D1
(NCS S 7010-G30Y)
Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED 2700 K 1520 lm

4926 _ _ / 00

Materials

Shade: Aluminum.
Canopy: Steel.
Diffuser: PMMA.

Light Source and electronics

4 x LED E27 230V 12 W

Packaging

1 Box 0,77 x 0,77 x 0,50 m
Vol 0,2965 m³
Gross weight 8,9 Kg Net weight 5,1 Kg

Notes

Extra cable length.

IP20

Ghost

Design by Arik Levy

A study in contrasts, the Ghost collection embodies both spirit and materiality, discretion and presence. A contemporary reimagining of the grand lights that once graced entryways and living areas, its sensuous form radiates with a warm, welcoming glow.

Table



4960

Ø 47,5 x 112 cm



4965

Ø 47,5 x 92 cm



4970

Ø 47,5 x 88 cm

Dimming and installation options





/15: Push-dimming model equipped with two buttons, one for each diffuser. A quick push turns the light on and off, a longer pression dims the light.

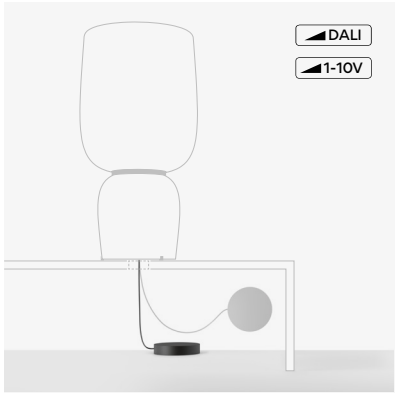



Dimming and installation options: The driver of the DALI-2, 1-10V and Casambi versions is enclosed in a box at the end of the cable.

Product specifications subject to change without notice. Please check vibia.com for updated information.

4960

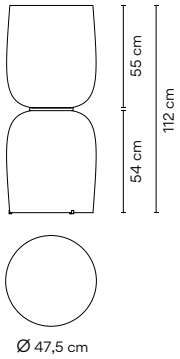

Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
D
CRI >90

Control
4960 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
(with or without memory)
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics
2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6051 m³
Gross weight 25,7 Kg Net weight 22,7 Kg

Notes
4960 _ _ / _ 1: DALI-2 Bi-volt
4960 _ _ / _ 3: 1-10V Multi-volt
4960 _ _ / _ 5: Push Bi-volt
A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED IP20 Dimmer

4965



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
D
CRI >90

Control
4965 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
(with or without memory)
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics
2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6051 m³
Gross weight 20,6 Kg Net weight 17,6 Kg

Notes
4965 _ _ / _ 1: DALI-2 Multi-volt
4965 _ _ / _ 3: 1-10V Multi-volt
4965 _ _ / _ 5: Push Bi-volt
A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED IP20 Dimmer

4970



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 5432,0 lm
D
CRI >90

Control
4970 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
(with or without memory)
_ _ **/** _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics
2 x LED 19,8 W 800 mA
Constant Current 800 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,6051 m³
Gross weight 21,7 Kg Net weight 18,7 Kg

Notes
4970 _ _ / _ 1: DALI-2 Multi-volt
4970 _ _ / _ 3: 1-10V Multi-volt
4970 _ _ / _ 5: Push Bi-volt
A colour glass diffuser can be placed in the lower glass for an amber or burgundy light effect.
Electric cable 2 m.

LED IP20 Dimmer

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

Pendant



4987
Ø 47,5 cm

4987

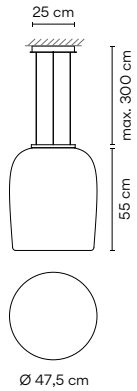

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4826,7 lm
D
CRI >90

Control
4987 _ _ / _ _

_ _ / _ **A** Push; -10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Diffuser: Opal Glass.
Metal parts: Aluminum.

Light Source and electronics
1 x LED 37,2 W 1050 mA
Constant Current 1050 mA
100~240V 50/60Hz

Packaging
1 Box 0,61 x 0,62 x 0,80 m
Vol 0,3026 m³
Gross weight 13,9 Kg Net weight 12,4 Kg
Extra cable length.

LED | □ | IP20 | CE | UKCA | EAC | Dimmer



Balance

Design by Jordi Vilardell

Balance features a classic drum shade, elegantly cantilevered from its column to provide a general ambient lighting effect or a more focused reading light.

Floor

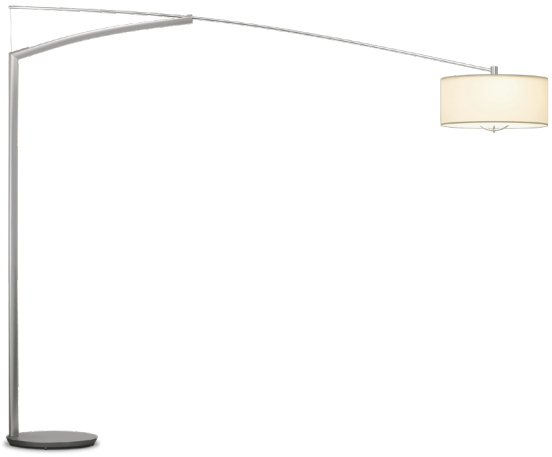

5189 5190

260 x 210 cm



5191 5192

215 x 210 cm



5189



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5189 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Aluminum.

Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UK CA EAC Dimmer

5190



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5190 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Parchment paper.

Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,5 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UK CA EAC Dimmer

5191



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5191 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Parchment paper.

Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UK CA EAC Dimmer

5192



Finishes
- **18** Graphite (RAL 7016)
- **30** Nickel (Metallic finish)

LED 2700K 1520 lm Dim

Control
5192 _ _ **/ 05** Push

Materials
Vertical tube: Aluminum.
Base: Steel.
Arm: Stainless steel.
Shade: Aluminum.

Light Source and electronics
3 x E27 230V 12 W

Packaging
3 Boxes
Total Vol 0,3472 m³
Gross weight 53,8 Kg Net weight 49,1 Kg

Notes
Dimmer on the cable. 3 m

IP20 CE UK CA EAC Dimmer

Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.

Ceiling Wall

5410
24,4 x 6,6 cm

5412
27,2 x 7,7 cm

5425 5427
31,8 x 24,2 cm



5430 5432
46,7 x 38 cm



5435 5437
56,8 x 49,2cm

5410



Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K 470 lm

5410 03 / 00 On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
1 x LED G9 4,2 W

Packaging
1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg

IP20

5412



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 880 lm
E
CRI >90

Control
5412 03 / 10 On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
1 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,37 x 0,37 x 0,23 m
Vol 0,0315 m³
Gross weight 0,95 Kg Net weight 0,7 Kg

IP20 Bi-volt

5425



Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K - 470 lm

5425 03 / 00 On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes
All version require only one electrical connection

IP20

5427



Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 831 lm
D
/3 _ 3500 K - 878 lm
G
CRI >90

Control
5427 03 / _ **0** On/ Off

Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED PLATE 3,2 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,25 x 0,42 x 0,42 m
Vol 0,0441 m³
Gross weight 2,26 Kg Net weight 1,08 Kg

Notes
All version require only one electrical connection

IP20 Bi-volt

1160 10 /1 A
Model
Finish
LED Colour Temperature
Control

5430

Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K 470 lm

5430 03 / 00 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection

IP20

5432

Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 1760 lm
E
CRI >90

Control
5432 03 / 10 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
2 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection

IP20 Bi-volt

5435

Finishes
03 White
(RAL 9016)

LED Colour Temperature
2700 K 470 lm

5435 03 / 00 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
3 x LED G9 4,2 W

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection

IP20

5437

Finishes
03/ _ _ White
(RAL 9016)

LED Colour Temperature
/1 _ 2700 K - 2640 lm
E
CRI >90

Control
5437 03 / 10 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
3 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection

IP20 Bi-volt



Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art combines two circular wall lights of different sizes and colours, superimposed on top of one another, and combining to create a set of highly dynamic, sculptural compositions. The collection provides ambient indirect light and only requires a single electrical connection.

Wall



5470
Ø 30 cm



5471
Ø 40 cm



5472
Ø 45 cm



5474
Ø 46 cm



5476
Ø 60 cm



5480
58 x 58 x 6 cm



5481
69 x 69 x 9 cm



5485
68 x 68 x 9 cm



5487
87 x 87 x 9 cm

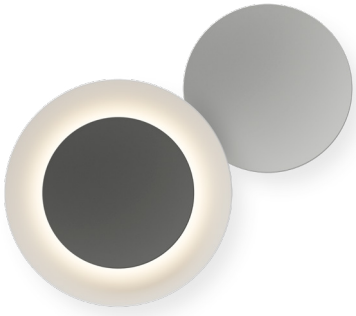

5486
87 x 87 x 11 cm

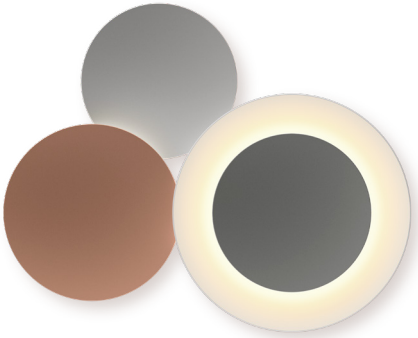

5491
103 x 84 x 11 cm

Each project is unique.
Personalise your own
Puck Wall Art composition
quick and easy.

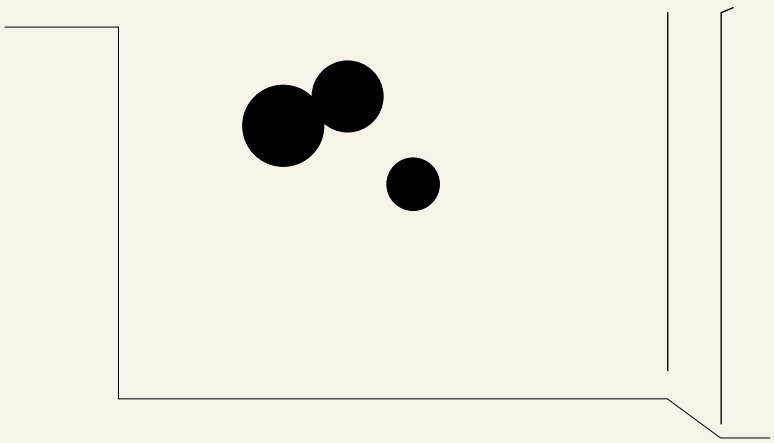

5470

Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED Colour Temperature
/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm
E
CRI >90

Control
5470 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi



Finishes
- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm
E
CRI >90

Control
5470 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics
1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,34 x 0,34 x 0,23 m
Vol 0,0266 m^3
Gross weight 2,6 Kg Net weight 1,6 Kg

Notes
5470 _ _ / _ 1: DALI-2 Bi-volt
5470 _ _ / _ 3: 1-10V Bi-volt
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 Dimmer

5471

Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5471 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi



Finishes
- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5471 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,44 x 0,44 x 0,25 m
Vol 0,0484 m^3
Gross weight 3,5 Kg Net weight 1,9 Kg

Notes
5471 _ _ / _ 3: 1-10V Bi-volt
5471 _ _ / _ 5: Push Bi-volt
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20

5472

Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5472 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi



Finishes
- **76/** _ _ Grey Felt L1
- **77/** _ _ Grey Felt D1

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5472 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m^3
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes
5472 _ _ / _ 3: 1-10V Bi-volt
5472 _ _ / _ 5: Push Bi-volt
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

5474

Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED Colour Temperature
/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm
E
CRI >90

Control
5474 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi



Finishes
- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature
/1 _ 2700 K - 952 lm
/3 _ 3500 K - 1017 lm
E
CRI >90

Control
5474 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics
1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m³
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes
5474 _ _ / _ 1: DALI-2 Bi-volt
5474 _ _ / _ 3: 1-10V Bi-volt
5474 _ _ / _ 5: Push Bi-volt
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20

5476

Finishes
- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5476 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi



Finishes
- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature
/1 _ 2700 K - 1435 lm
/3 _ 3500 K - 1533 lm
E
CRI >90

Control
5476 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **3** 1-10V
- _ _ **/** _ **4** Triac
- _ _ **/** _ **5** Push
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging
1 Box 0,66 x 0,66 x 0,235 m
Vol 0,1024 m³
Gross weight 6,3 Kg Net weight 2,9 Kg

Notes
5476 _ _ / _ 3: 1-10V Bi-volt
5476 _ _ / _ 5: Push Bi-volt
A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system.

LED IP20

5480



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5480 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5480 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m^3
Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

5480 _ _ / _ 1: DALI-2 Bi-volt

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system.

LED IP20

5481



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **28/** _ _ Brown M1 (NCS S 4020-Y60R)
- **72/** _ _ Black Grey & Grey L2 (NCS S 7000-N, NCS S 2500-N)

LED Colour Temperature

/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm

E

CRI >90

Control

5481 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi

Finishes

- **71/** _ _ Grey Felt L1 & Grey Felt D1
- **76/** _ _ Grey Felt L1

LED Colour Temperature

/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm

E

CRI >90

Control

5481 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
- _ _ / _ **4** Triac
- _ _ / _ **5** Push
- _ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m^3
Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

5481 _ _ / _ 1: DALI-2 Bi-volt

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

5485



Finishes

72/ _ _ Black Grey & Grey L2
(NCS S 7000-N, NCS S 2500-N)

73/ _ _ Brown M1 & Black Grey
(NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5485 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Finishes

71/ _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5485 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,43 m
Vol 0,1118 m^3
Gross weight 8,42 Kg Net weight 4,22 Kg

Notes

5485 _ _ / _ 1: DALI-2 Bi-volt

LED IP20

5486



Finishes

72/ _ _ Black Grey & Grey L2
(NCS S 7000-N, NCS S 2500-N)

73/ _ _ Brown M1 & Black Grey
(NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm

E

CRI >90

Control

5486 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Finishes

71/ _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1 _ 2700 K - 2871 lm
/3 _ 3500 K - 3067 lm

E

CRI >90

Control

5486 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

2 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m^3
Gross weight 11,35 Kg Net weight 5,45 Kg

Notes

5486 _ _ / _ 1: DALI-2 Bi-volt

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

5487



Finishes

21/ _ _ Black Grey
(NCS S 7000-N)

73/ _ _ Brown M1 & Black Grey
(NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5487 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Finishes

71/ _ _ Grey Felt L1 & Grey Felt D

LED Colour Temperature

/1 _ 2700 K - 2388 lm
/3 _ 3500 K - 2551 lm

E

CRI >90

Control

5487 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,52 Kg Net weight 5,62 Kg

LED IP20

5491



Finishes

72/ _ _ Black Grey & Grey L2
(NCS S 7000-N, NCS S 2500-N)

73/ _ _ Brown M1 & Black Grey
(NCS S 4020-Y60R, NCS S 7000-N)

LED Colour Temperature

/1 _ 2700 K - 4307 lm
/3 _ 3500 K - 4601 lm

E

CRI >90

Control

5491 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Finishes

71/ _ _ Grey Felt L1 & Grey Felt D1

LED Colour Temperature

/1 _ 2700 K - 4307 lm
/3 _ 3500 K - 4601 lm

E

CRI >90

Control

5491 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **4** Triac
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Diffuser: PC- Polycarbonate.
Shade: ABS.
Wall support: Aluminum.
Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
Vol 0,2919 m³
Gross weight 14,85 Kg Net weight 7,35 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Mayfair Mini

Design by Diego Fortunato

The perfect lighting companion, Mayfair Mini is a small-scale design that casts a contained pool of diffuse, downlight for an intimate atmosphere. A light to grab and go that can be moved where needed -indoors or out- via its slender stem.

Table



5495

Ø 20 x 38 cm

Portable



5496

Ø 20 x 38 cm

Bolt-down



5497

Ø 20 x 38 cm

Bolt-down

5495



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **38** Terra Dark (NCS S 5040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 223 lm

E

CRI >90

Control

5495 _ _ **/ 16** Touch sensor

Materials

Base and shade: ABS + PC- Polycarbonate.
Diffuser: PC- Polycarbonate.
Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m^3
Gross weight 1,62 Kg Net weight 0,73 Kg

Notes

Rechargeable battery autonomy:
6h at 100% Intensity.
12h at 50% Intensity.
18h at 25% Intensity.

USB-C cable: length 1,20 m
(from the base to the USB charger).

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5496



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **38** Terra Dark (NCS S 5040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 223 lm
E
CRI >90

Control

5496 _ _ **/ 16** Touch sensor (with or without memory)

Materials

Base and shade: ABS + PC- Polycarbonate
Diffuser: PC- Polycarbonate.
Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m³
Gross weight 1,84 Kg Net weight 0,94 Kg

Notes

Cable length: 1 m
(from the base to the USB charger)

LED IP20 Bi-volt

5497



Finishes

- **23** Warm White (NCS S 0502-Y50R)
- **25** Beige D1 (NCS S 4005-Y50R)
- **38** Terra Dark (NCS S 5040-Y70R)
- **47** Green L1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 223 lm
E
CRI >90

Control

5497 _ _ **/** _ _

_ _ **/ 10** On/ Off
_ _ **/ 11** DALI-2
_ _ **/ 13** 1-10V

Materials

Base and shade: ABS + PC- Polycarbonate
Diffuser: PC- Polycarbonate.
Stem: Stainless steel.

Light Source and electronics

1 x LED PLATE 5V 2,5 W
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,26 x 0,50 m
Vol 0,033 m³
Gross weight 1,45 Kg Net weight 0,54 Kg

Notes

Cable length: 1 m. (the cable connects directly to the remote driver)

LED IP20 Bi-volt



Mayfair

Design by Diego Fortunato

A modern reimagining of the traditional 19th-century bouillotte lamp, the Mayfair collection is a statement in contemporary design. Perfectly proportioned, its luminaire casts a pool of diffuse, downward light to create an intimate lighting effect.

Table Floor



5500

Ø 30 x 52 cm



5505

Ø 30 x 52 cm



5510

Ø 30 x 147 cm



5515

Ø 30 x 147 cm

5500



Finishes

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5500 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m^3
Gross weight 3,6 Kg Net weight 3,4 Kg

Notes

Touch dimmer on base. Electric cable 2 m.

LED IP20 Dimmer Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5505



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

Control

5505 _ _ / _ _

_ _ **/ 16** Optical sensor
_ _ **/ 18** Push 2 (without memory)

Finishes

- **20/** _ _ Gold
- **67/** _ _ Copper

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

Control

5505 _ _ / _ _

_ _ **/ 16** Optical sensor
_ _ **/ 18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,22 x 0,35 x 0,61 m
Vol 0,0470 m^3
Gross weight 3,6 Kg Net weight 3,4 Kg

Notes

Touch dimmer on base. Electric cable 2 m.

LED | IP20 | Dimmer | Multi-volt



5510

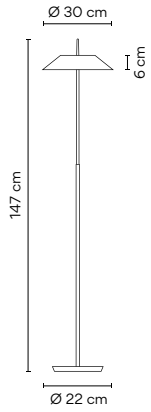

Finishes

- **07/** _ _ Graphite and green (RAL 7016. RAL 6026)
- **08/** _ _ Graphite and orange (RAL 7016. RAL 2009)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5510 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel. Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,50 x 0,32 x 0,34 m
Vol 0,1630 m^3
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes

Touch dimmer on shade. Electric cable 2 m.

LED IP20 Dimmer Multi-volt

5515

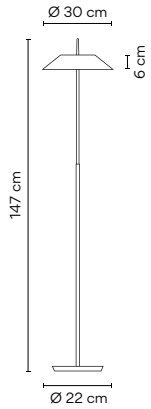

Finishes

- **18/** _ _ Graphite (RAL 7016)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5515 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Finishes

- **20/** _ _ Gold
- **67/** _ _ Copper

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5515 _ _ / _ _

_ _ / **16** Optical sensor

_ _ / **18** Push 2 (without memory)

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube: Steel.
Base: Zinc Alloy.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,50 x 0,32 x 0,34 m
Vol 0,1630 m^3
Gross weight 12,8 Kg Net weight 6,2 Kg

Notes

Touch dimmer on shade. Electric cable 2 m.

LED IP20 Dimmer Multi-volt



Pendant

INDIVIDUAL MODEL



5520
Ø 30 cm

5525
Ø 30 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

5520



Finishes

07/ _ _ Graphite and green (RAL 7016. RAL 6026)

08/ _ _ Graphite and orange (RAL 7016. RAL 2009)

LED Colour Temperature

/1 _ 2700 K - 2027 lm

D

CRI >90

Control

5520 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Tube and canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,50 x 0,31 x 0,31 m
Vol 0,0500 m^3
Gross weight 2,8 Kg Net weight 1,8 Kg

Notes

Extra cable length.

LED IP20

1160 | 10 | /1 | A | _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

5525



Finishes

- **18/** _ _ Graphite (RAL 7016)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

Control

5525 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Finishes

- **20/** _ _ Gold
- **67/** _ _ Copper

LED Colour Temperature

/1 _ 2700 K - 2027 lm
D
CRI >90

5525 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: PC- Polycarbonate.
Shade: PMMA.
Ttube and canopy: Steel.

Light Source and electronics

1 x LED STRIP 24V 2,4 W
1 x LED STRIP 24V 12,6 W
Constant Voltage 24V
220~240V 50/60Hz

Packaging

1 Box 0,50 x 0,31 x 0,31 m
Vol 0,0500 m^3
Gross weight 2,9 Kg Net weight 1,9 Kg

Notes

Extra cable length.

LED IP20



Select your model at **vibia.com** and adjust



2 x 5525



3 x 5525



4 x 5525



4 x 5525



5 x 5525



7 x 5525



8 x 5525



10 x 5525



22 x 5525



16 x 5525

See more multiple models at **vibia.com**

Finishes
5520

- **07/** _ _ Graphite and green (RAL 7016. RAL 6026)
- **08/** _ _ Graphite and orange (RAL 7016. RAL 2009)

Finishes
5525

- **20/** _ _ Gold
- **67/** _ _ Copper
- **18/** _ _ Graphite (RAL 7016)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K
CRI >90

Control
Model _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5520, 5525

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm

Ø 36 cm

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

Remote



Built-in



Materials
5520
Diffuser: PC- Polycarbonate. Shade: PMMA. Tube and canopy: Steel.
5525
Diffuser: PC- Polycarbonate. Shade, tube and canopy: Steel.

Notes
Additional cable length from 2 m.

LED IP20



Africa

Design by Francisco Gomez Paz

An object of desire, Africa is a unique gift that
combines richness of form and materiality
with high performance lighting capabilities.
A holistic exploration of beauty and functionality.

Table



5580
Ø 5 x 45 cm
Portable



5585
Ø 5 x 40 cm
Portable

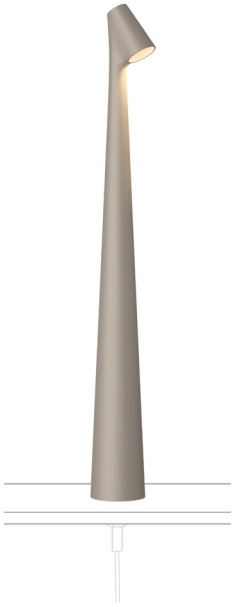

5590
Ø 5 x 45 cm
Bolt-down



5595
Ø 5 x 40 cm
Bolt-down

5580



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5580 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate

Light Source and electronics
1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m^3
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes
Battery capacity 10.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

5585



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5585 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA
Output: DC 5.0 V 2.0 A 10.0W
Input: 100~240V 50/60Hz

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,23 Kg Net weight 0,9 Kg

Notes
Battery capacity 10.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
6,5h at 100% Intensity.
10h at 66% Intensity.
20h at 33% Intensity.

LED IP20

5590



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5590 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m

LED IP20

5595



Finishes
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **29/** _ _ Brown D1 (NCS S 8005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)

LED Colour Temperature
/1 _ 2700 K - 520 lm
E
CRI >90

Control
5595 _ _ **/ 15** Push

Materials
Body: Aluminium.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,5W 500 mA 9V
Output: DC 5.0 V 2.0 A 10.0W

Packaging
1 Box 0,08 m x 0,53 m
Vol 0,0026 m³
Gross weight 1,3 Kg Net weight 0,950 Kg

Notes
Electric cable 2 m

LED IP20

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control



A439
Ø 27 cm



A440
Ø 27 cm

A439



Finishes
83/ _ _ Walnut (Tray)

Control
A439 83 / 00 On/ Off

Materials
Tray: Wood (Rustic Walnut)

Output: DC 5.0V 4.0 A.
Input: 100~240V 50/60Hz

Packaging
1 Box 0,350 x 0,350 x 0,090 m
Vol 0,0110 m³
Gross weight 1,2 Kg Net weight 0,750 Kg

Notes
Electric cable with plug.
Electric cable 2 m

IP20 Bi-volt

A440



Finishes
83/ _ _ Walnut (Tray)

Control
A440 83 / 00 On/ Off

Materials
Tray: Wood (Rustic Walnut).

Output: DC 5.0V 4.0 A.
Input: 100~240V 50/60Hz

Packaging
1 Box 0,350 x 0,350 x 0,090 m
Vol 0,0110 m³
Gross weight 1,2 Kg Net weight 0,750 Kg

Notes
Electric cable with plug.
Electric cable 2 m

IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



North

Design by Arik Levy

North features a base, stem, and shade that are disconnected from one another in a dynamic system of adjustable parts. Protruding arms hold triangular shades that direct the light where needed.

Floor



5605

max. 270 cm x max. 230 cm x max. 355 cm



5620

max. 447 cm x max. 325 cm x max. 425 cm

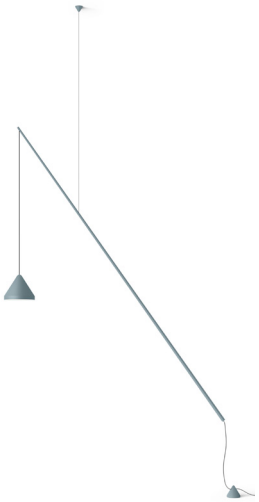

5666

max. 210 cm x max. 310 cm x max. 130 cm

5605



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 2538,0 lm

D

CRI >90

Control

5605 _ _ **/ 15** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Base: Steel.

Light Source and electronics

2 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

10 Boxes
Total Vol 0,35 m³
Gross weight 91 Kg Net weight 79,8 Kg

Notes

Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 Dimmer

5620



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 3807 lm
D
CRI >90

Control

5620 _ _ **/ 15** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Base: Steel.

Light Source and electronics

3 x LED 9W 350mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

12 Boxes
Total Vol 0,36 m³
Gross weight 94,85 Kg Net weight 81,25 Kg

Notes

Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 Dimmer

5666



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5666 _ _ **/** _ **5** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Counterweight: Aluminum.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

2 Boxes 0,24 x 0,217 x 0,21 m
Total Vol 0,0464 m³
Gross weight 6,2 Kg Net weight 4,05 Kg

Notes

Electric cable with plug.
Electric cable 2,5 m
Extra cable length.

LED IP20 Dimmer Bi-volt

Height-adjustable shade.



Adjustable-angle rods. Can be connected with or without plug.



1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

Wall



5630
150 x 195 cm

5630



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
/2 _ 3000 K - 1123 lm
D
CRI >90
/3 _ 3500 K - 1374,9 lm
G
CRI >80

Control

5630 _ _ **/** _ **5** Push

Materials

Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Wall Plate: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,24 m³
Gross weight 11,05 Kg Net weight 5,85 Kg

Notes

Height-adjustable shade.
Push-button on the wall plate.
Can be connected with or without plug.
Electric cable 2,5 m

LED IP20 Dimmer Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



Pendant

INDIVIDUAL MODEL



5660
Ø 16 x 200 cm



5662
Ø 40 x 200 cm



5664
Ø 60 x 200 cm



5670
Ø 16 x 200 cm



5672
Ø 40 x 200 cm



5674
Ø 60 x 200 cm

MULTIPLE MODELS













INDIVIDUAL MODEL

5660



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5660 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes

5660 _ _ / _ 1: DALI-2 Bi-volt
5660 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

5662



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5662 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,36 x 0,537 x 0,537 m
Vol 0,10 m³
Gross weight 4,8 Kg Net weight 2,25 Kg

Notes

5662 _ _ / _ 1: DALI-2 Bi-volt
5662 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

5664



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

5664 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Select Eletrical connection


Surface


Free Wire


Built-in XS

Remote Micro


Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,32 x 0,727 x 0,727
Vol 0,17 m³
Gross weight 6,25 Kg Net weight 2,95 Kg

Notes

5664 _ _ / _ 1: DALI-2 Bi-volt
5664 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20



Height-adjustable shade.



MULTIPLE MODELS

Select your model at **vibia.com** and adjust



2 x 5660



2 x 5660



3 x 5660/5662/5664



4 x 5664



4 x 5660



5 x 5660



6 x 5660



8 x 5664



8 x 5660



8 x 5660



10 x 5664



20 x 5662



24 x 5660



7 x 5660



9 x 5660



29 x 5660



10 x 5660



13 x 5660



5 x 5662

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

10/ _ _ White
(NCS S 0300-N)
11/ _ _ Black
(NCS S 8500 N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)
42 / _ _ Blue M1
(NCS S 5010-B10G)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
D
CRI >90

/2 _ 3000 K
D
CRI >80

/3 _ 3500 K
G
CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5660 / 5662 / 5664

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 18 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm



Ø 22 cm



Ø 36 cm



Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Shade: Aluminum
Diffuser: PMMA . Canopy: Steel.

Notes

Additional cable length
from 2 m.

LED IP20 Bi-volt

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

5670



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm
- **/2** _ 3000 K - 1123 lm
  D
  CRI >90 CRI >80
- **/3** _ 3500 K - 1374 lm
  G
  CRI >90

Control
5670 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,06 m³
Gross weight 5,75 Kg Net weight 2 Kg

Notes
5670 _ _ / _ 1: DALI-2 Bi-volt
5670 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

5672



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm
- **/2** _ 3000 K - 1123 lm
  D
  CRI >90 CRI >80
- **/3** _ 3500 K - 1374 lm
  G
  CRI >90

Control
5672 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
1 x LED 9W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,14 m³
Gross weight 8,25 Kg Net weight 3 Kg

Notes
5672 _ _ / _ 1: DALI-2 Bi-volt
5672 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

5674



Finishes
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm
- **/2** _ 3000 K - 1123 lm
  D
  CRI >90 CRI >80
- **/3** _ 3500 K - 1374 lm
  G
  CRI >90

Control
5674 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Rods: Carbon fiber.
Shade: Aluminum.
Diffuser: PMMA.
Canopy: Steel.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,21 m³
Gross weight 9,7 Kg Net weight 3,7 Kg

Notes
5674 _ _ / _ 1: DALI-2 Bi-volt
5674 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.



Lily

Design by Ludovica+Roberto Palomba

The simplicity of Lily's refined silhouette makes this fixture ideal for an elegant interior with a relaxed ambience.
Its graceful glass diffuser radiates brings a sense of warmth and wellbeing.

Table Floor Pendant



5720
Ø 49 x 63,5 cm



5725
Ø 49 x 155 cm



5730
Ø 49 cm

5720



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm
E
CRI >90

Control

5720 _ _ / _ _

_ _ / **15** Push
_ _ / **1Z** Casambi

Materials

Body: Steel.
Diffusser: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,59 x 0,68 x 0,54 m
Vol 0,21 m³
Gross weight 10 Kg Net weight 5 Kg

Notes

5720 _ _ / _ 5: Push Multi-volt
Electric cable 2,5 m.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

5725



Finishes

11/ _ _ Black
(NCS S 8500-N)

25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm
E
CRI >90

Control

5725 _ _ / _ _

_ _ / 15 Push
_ _ / 1Z Casambi

Materials

Body: Steel.
Diffusser: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,7 W 900 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 1,57 x 0,49 x 0,49 m
Vol 0,277 m^3
Gross weight 14,2 Kg Net weight 8,20 Kg

Notes

5725 _ _ / _ 5: Push Multi-volt
Electric cable 2,5 m.

LED IP20





1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

5730



Finishes

11/ _ _ Black
(NCS S 8500-N)

25/ _ _ Beige D1
(NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2170 lm
E

CRI >90

Control

5730 _ _ / _ _

_ _ / 11 DALI-2
_ _ / 1B Push; 1-10V
_ _ / 1Z Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Body: Aluminium.
Shade: Triple opal blown glass.

Light Source and electronics

1 x LED STRIP 16,2 W 900 mA
Constant Current 900mA
110~240V 50/60Hz

Packaging

1 Box 0,27 x 0,60 x 0,60 m
Vol 0,972 m³
Gross weight 6 Kg Net weight 2 Kg

Notes

Extra cable length.

LED IP20

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5730

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 20 cm

match with fixture finish.

Remote



Built-in





Tempo

Design by Lievore, Altherr

The Tempo collection reclaims our collective memory of light, distilling lighting archetypes to their most basic forms. Vibia presents three designs in two sizes: the disc, the diamond and the milk glass oval - all inspired by the interplay of opacity, translucence and transparency.

Wall



5756 5757

122,5 x 80 cm



5758 5759

116,5 x 80 cm



5760 5761

120 x 80 cm



5762 5763

42,5 x 140 cm



5764 5765

36,5 x 140 cm



5766 5767

40 x 140 cm



Ref.
5757, 5759, 5761,5763, 5765, 5767.
Recessed dimmable driver.



Ref.
5756, 5758, 5760, 5762, 5764, 5766.
Push dimmer on the cable.
With plug.

Product specifications subject to change without notice. Please check vibia.com for updated information.

5756



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5756 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5757



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5757 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,082 m³
Gross weight 4,3 Kg Net weight 2,5 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20
Ø 7,5 cm

5758



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5758 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes
Push dimmer on the cable. With plug (4 m).

LED IP20 Dimmer

5759



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E
CRI >90

Control

5759 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes

Recessed dimmable driver (2,5 m)

LED IP20 Ø 7,5 cm

5760



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E
CRI >90

Control

5760 _ _ **/ 15** Push

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes

Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5761



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm
E
CRI >90

Control

5761 _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes

Recessed dimmable driver (2,5 m)

LED IP20 Ø 7,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

5762



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5762 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,2 Kg Net weight 2 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5763



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5763 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.
Shade: Aluminum.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,2 Kg Net weight 2 Kg

Notes
Recessed dimmable driver (2,5 m)

LED IP20 Ø 7,5 cm

5764



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5764 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,45 Kg Net weight 1,25 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 Dimmer

5765



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5765 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,45 Kg Net weight 1,25 Kg

Notes
Recessed dimmable driver (2,5 m)

LED ☐ IP20 CE UK CA EAC

Ø 7,5 cm

5766



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5766 _ _ **/ 15** Push

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes
Push dimmer on the cable. With plug (4 m)

LED IP20 CE UK CA EAC Dimmer

5767



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5767 _ _ **/** _ _
- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Structures: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Notes
Recessed dimmable driver (2,5 cm)

LED ☐ IP20 CE UK CA EAC

Ø 7,5 cm



Pendant

INDIVIDUAL MODEL

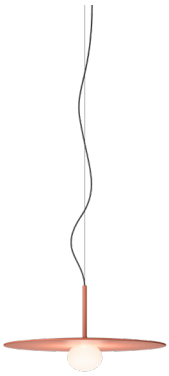

5776
Ø 40 cm



5770
Ø 25 cm



5778
Ø 24 cm



5772
Ø 13 cm

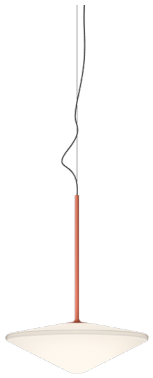

5780
Ø 34,5 cm



5774
Ø 20,5 cm

MULTIPLE MODELS



Product specifications subject to change without notice. Please check vibia.com for updated information.

INDIVIDUAL MODEL

5770



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5770 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes

5770 _ _ / _ 1: DALI-2 Bi-volt
5770 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20 CE UK CA EAC

5772



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5772 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 1,8 Kg Net weight 1,2 Kg

Notes

5772 _ _ / _ 1: DALI-2 Bi-volt
5772 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20 CE UK CA EAC

5774



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5774 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 2 Kg Net weight 1,4 Kg

Notes

5774 _ _ / _ 1: DALI-2 Bi-volt
5774 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

5776



Finishes

- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K - 415 lm

E

CRI >90

Control

5776 _ _ **/** _ _

- _ _ **/** _ **1** DALI-2
- _ _ **/** _ **B** Push; 1-10V
- _ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging

1 Box 0,45 x 0,45 x 0,12 m
Vol 0,023 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

5776 _ _ / _ 1: DALI-2 Bi-volt
5776 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

5778



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5778 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_18** Free Wire
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Canopy: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,33 x 0,33 x 0,42 m
Vol 0,045 m³
Gross weight 4 Kg Net weight 2,5 Kg

Notes
5778 _ _ / _ 1: DALI-2 Bi-volt
5778 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20 CE UK CA EAC

5780



Finishes
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
5780 _ _ / _ _
- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Built-in XS | Remote Micro | Remote XXS

- **_10** Surface
- **_23** Built-in XS
- **_31** Remote Micro
- **_32** Remote XXS

Materials
Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,41 x 0,41 x 0,23 m
Vol 0,038 m³
Gross weight 4 Kg Net weight 2,5 Kg

Notes
5780 _ _ / _ 1: DALI-2 Bi-volt
5780 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20 CE UK CA EAC

MULTIPLE MODELS

Select your model at **vibia.com** and adjust



2 x 5774



3 x 5772



4 x 5770



4 x 5772



5 x 5774



8 x 5770



15 x 5772



8 x 5770



10 x 5774



20 x 5772



16 x 5774



3 x 5770



5 x 5774 From: 3.125,00 €



6 x 5774 From: 3.750,00 €



29 x 5774 From: 18.125,00 €



10 x 5772 From: 6.350,00 €



16 x 5774



5 x 5774



8 x 5774

See more multiple models at **vibia.com**

Finishes

- **18/ _ _** Graphite (ADAPTA RF9913WX)
- **37/ _ _** Terra Red (NCS S 4040-Y70R)
- **58/ _ _** Cream (RAL 7044)
- **62/ _ _** Green (NCS S 3010-G20Y)

LED Colour Temperature

/1 _ 2700 K
CRI >90

Control

Model _ _ / _ _

- _ _ / _ **1** DALI-2
- _ _ / _ **B** Push; 1-10V
- _ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5770, 5772, 5774

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10 Surface



Ø 16 cm

match with fixture finish.

_18 Free Wire



Ø 20 cm | Ø 36 cm | Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5778

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

_10 Surface



Ø 16 cm

match with fixture finish.

_18 Free Wire



Ø 20 cm
1-10V; DALI-2

Ø 22 cm
Casambi

Ø 36 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5776, 5780

Drop ceiling

_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

_10 Surface



Ø 16 cm

match with fixture finish.

Remote



Built-in



Materials

Diffuser: Blown-glass. LED support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Notes

Additional cable length from 2 m.

LED IP20 Bi-volt

Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

Ceiling



5920
Ø 40 cm



5915
Ø 55 cm



5926
Ø 90 cm



5905
101 x 88 cm



5910
106 x 90 cm



5922
178 x 149 cm



5924
186 x 149 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

5905



Finishes

10/ _ _ White
(NCS S 0300-N)

71/ _ _ White, Green L1, Off-White
(NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 5906 lm
E

/3 _ 3500 K - 6344 lm
F

CRI >90

Control

5905 _ _ **/** _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

4 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,75 x 0,45 x 0,25 m
Vol 0,0844 m³
Gross weight 17,15 Kg Net weight 15,38 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5910



Finishes

10/ _ _ White
(NCS S 0300-N)

72/ _ _ White, Green L1
(NCS S 0300-N, NCS S 4005-G80Y)

73/ _ _ White, Off-White
(NCS S 0300-N, NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 4430 lm
E

/3 _ 3500 K - 4758 lm
F

CRI >90

Control

5910 _ _ **/** _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,80 x 0,70 x 0,30 m
Vol 0,1680 m³
Gross weight 11,90 Kg Net weight 9,10 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5915



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 2953 lm
E

/3 _ 3500 K - 3172 lm
F

CRI >90

Control

5915 10 / _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

2 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,65 x 0,65 x 0,25 m
Vol 0,0106 m³
Gross weight 6,80 Kg Net weight 4,73 Kg

Notes

* Electrical connection point

LED IP20 Dimmer Bi-volt

5920



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **13/** _ _ Off-White (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm

E

CRI >90

Control

5920 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,45 x 0,45 x 0,25 m
Vol 0,0051 m³
Gross weight 3,10 Kg Net weight 1,91 Kg

Notes

* Electrical connection point

LED IP20 Dimmer Bi-volt

5922



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **71/** _ _ White, Green L1, Off-White (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 13920 lm
/3 _ 3500 K - 14951 lm

D

CRI >90

Control

5922 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

4 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 1,35 x 1,20 x 0,30 m
Vol 0,0486 m³
Gross weight 26,60 Kg Net weight 19,98 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5924



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **72/** _ _ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
- **73/** _ _ White, Off-White (NCS S 0300-N, NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 9897 lm

D

/3 _ 3500 K - 10630 lm

E

CRI >90

Control

5924 _ _ / _ _

_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 1,45 x 1,10 x 0,25 m
Vol 0,0399 m³
Gross weight 27 Kg Net weight 20,80 Kg

Notes

* Electrical connection point

LED IP20 Dimmer

5926



Finishes

10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature

/1 _ 2700 K - 6598 lm
D

/3 _ 3500 K - 7086 lm
E

CRI >90

Control

5926 10 / _ **A** Push; 1-10V; DALI-2

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

2 x LED PLATE 25 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 1,05 x 1,05 x 0,25 m
Vol 0,0276 m^3
Gross weight 14,60 Kg Net weight 10,08 Kg

Notes

* Electrical connection point

LED IP20 Dimmer



Pendant

INDIVIDUAL MODEL



5930
Ø 90 cm



5935
Ø 40 cm



5940
Ø 55 cm

MULTIPLE MODELS

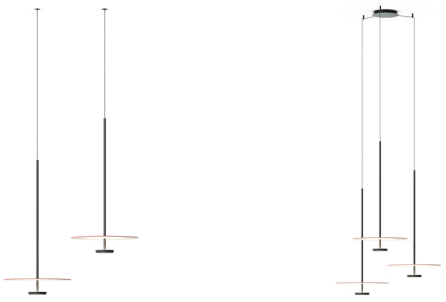







INDIVIDUAL MODEL

5930

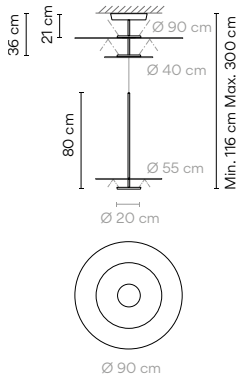

Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9897 lm
D
/3 _ 3500 K - 10630 lm
E
CRI >90

Control
5930 _ _ / _ _
_ _ / _ **A** Push; 1-10V; DALI-2
_ _ / _ **Z** Casambi

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,96x0,96x0,50 m
Vol 0,4608 m³
Gross weight 27,9 Kg Net weight 22 Kg

Notes
Adjust the height on installation

LED IP20 Dimmer

5935



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm
E
CRI >90

Control
5935 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,71 x 0,13 x 0,71 m
Vol 0,0655 m³
Gross weight 6,10 Kg Net weight 5 Kg

Notes
Extra cable length.

LED IP20 Dimmer

5940



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1740 lm
/3 _ 3500 K - 1868 lm
E
CRI >90

Control
5940 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,71 x 0,13 x 0,71 m
Vol 0,0665 m³
Gross weight 7 Kg Net weight 6 Kg

Notes
Extra cable length.

LED IP20 Dimmer

MULTIPLE MODELS

Select your model at **vibia.com** and adjust



2 x 5935



2 x 5935



3 x 5935



3 x 5935



4 x 5935



4 x 5935



4 x 5935



5 x 5935



8 x 5935



8 x 5935



9 x 5935



9 x 5935



18 x 5935



16 x 5935

See more multiple models at **vibia.com**

Finishes

13/ _ _ Off-White
(NCS S 1000-N)
37/ _ _ Terra Red
(NCS S 4040-Y70R)
47/ _ _ Green L1
(NCS S 4005-G80Y)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5935

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16,7 cm

match with fixture finish.

_18
Free Wire

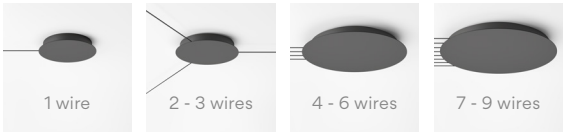

Ø 20 cm

Ø 22 cm

Ø 36 cm

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5940_ _ / _ 1 / _ B

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16,7 cm

match with fixture finish.

_18
Free Wire



Ø 20 cm

Ø 22 cm

Ø 36 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5940_ _ / _ Z

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_18
Free Wire



Ø 20 cm

Ø 22 cm

Ø 36 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Shade: Aluminum Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum

Notes

Additional cable length
from 2 m.

LED IP20 Dimmer Bi-volt

Floor



5945
76 x 64 x 90 cm



5950
Ø 55 x 43 cm



5955
46 x 25 x 100 cm



5957
48 x 35 x 96 cm

5945



Finishes
13/ _ _ Off-White
(NCS S 1000-N)
47/ _ _ Green L1
(NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1365 lm
/3 _ 3500 K - 1467 lm
F
CRI >90

Control
5945 _ _ **/** _ **5** Push
(with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
2 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,65 x 1,00 x 0,25 m
Vol 0,0163 m³
Gross weight 15,85 Kg Net weight 15,25 Kg

Notes
Electric cable 2 m

LED □ IP20 CE UKCA EAC Dimmer Multi-volt

5950



Finishes
10/ _ _ White
(NCS S 0300-N)

LED Colour Temperature
/1 _ 2700 K - 682 lm
/3 _ 3500 K - 733 lm
F
CRI >90

Control
5950 10 / _ **5** Push
(with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,65 x 0,65 x 0,20 m
Vol 0,0085 m³
Gross weight 14,60 Kg Net weight 12,71 Kg

Notes
Electric cable 2 m

LED □ IP20 CE UKCA EAC Dimmer Multi-volt



5955



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
/3 _ 3500 K - 733 lm
F
CRI >90

Control
5955 _ _ **/** _ **5** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,30 x 1,10 x 0,10 m
Vol 0,0033 m³
Gross weight 4,80 Kg Net weight 3,50 Kg

Notes
Electric cable 2 m

LED | □ | IP20 | CE | UK CA | EAC | Dimmer | Multi-volt

5957



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
/3 _ 3500 K - 733 lm
F
CRI >90

Control
5957 _ _ **/** _ **5** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7 W 400 mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,40 x 1,10 x 0,10 m
Vol 0,0044 m³
Gross weight 6,10 Kg Net weight 4,46 Kg

Notes
Electric cable 2 m

LED | □ | IP20 | CE | UK CA | EAC | Dimmer | Multi-volt

Table



5965
35 x Ø 30 x 16 cm



5970
29 x 17 x 30 cm



5972
11 x 30 cm

Bolt-down





 Product specifications subject to change without notice. Please check vibia.com for updated information.

5965



Finishes
- **13/** _ _ Off-White (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
F
CRI >90

Control
5965 _ _ **/15** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,50 x 0,50 x 0,7 m
Vol 0,0018 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Multi-volt

5970



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
F
CRI >90

Control
5970 _ _ **/15** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,20 x 0,40 x 0,07 m
Vol 0,0072 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Multi-volt

5972



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 682 lm
F
CRI >90

Control
5972 _ _ **/15** Push (with or without memory)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.

Light Source and electronics
1 x LED PLATE 7W 400mA
Constant Voltage 24V
110~240V 50/60Hz

Packaging
1 Box 0,15 x 0,13 x 0,36 m
Vol 0,00702 m³
Gross weight 0,9 Kg Net weight 0,6 Kg

Notes
Electric cable 2 m

LED | IP20 | Dimmer | Multi-volt

Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

Ceiling Wall



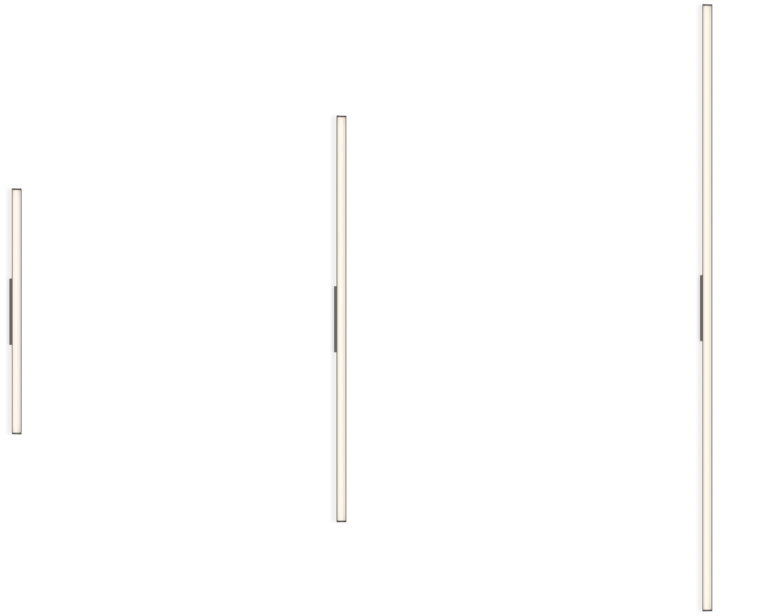

5975
121 x 4,7 x 6,5 cm

5977
201 x 4,7 x 6,5 cm

5979
301 x 4,7 x 6,5 cm



5981
253 x 4,8 x 6,6 cm

5983
413 x 4,8 x 6,6 cm

5985
613 x 4,8 x 6,6 cm

5975



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1560 lm
/3 _ 3500 K - 1290 lm

E

CRI >90

Control

5975 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 Dimmer

5977



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2560 lm
/3 _ 3500 K - 3360 lm

E

CRI >90

Control

5977 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6

LED IP44 Dimmer

5979



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3840 lm
/3 _ 3500 K - 5040 lm

E

CRI >90

Control

5979 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m³
Gross weight 6,9 Kg Net weight 3,6 Kg

LED IP44 Dimmer

5981



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3120 lm
/3 _ 3500 K - 3840 lm

E

CRI >90

Control

5981 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

2 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,030 m³
Gross weight 5,8 Kg Net weight 2,8 Kg

LED IP44 Dimmer

5983



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 5120 lm
/3 _ 3500 K - 6720 lm

E

CRI >90

Control

5983 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

2 x LED STRIP 21,6 W 600 mA
Constant Current 1200 mA
220~240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,046 m³
Gross weight 9,4 Kg Net weight 4,8 Kg

Notes

5983 _ _ / _ 1: DALI-2 Multi-volt

LED IP44 Dimmer

5985



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 7680 lm
/3 _ 3500 K - 10080 lm

E

CRI >90

Control

5985 _ _ / _ _

_ _ / _ **1** _ **30**	DALI-2 (Remote)
_ _ / _ **3** _ **30**	1-10V (Remote)
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA..

Light Source and electronics

2 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA Remote
220~240V 50/60Hz

Packaging

3 Boxes
Total Vol 0,066 m³
Gross weight 13,5 Kg Net weight 6,9 Kg

LED IP44 Dimmer

Wall Vanity light





5987
L 121 cm



5989
L 201 cm

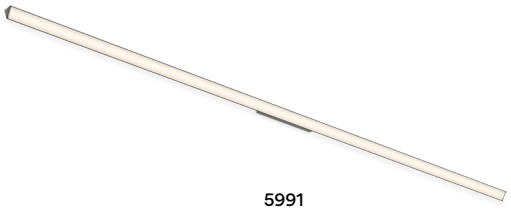

5991
L 301 cm

5987



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1560 lm
/3 _ 3500 K - 1920 lm
E
CRI >90

Control
5987 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 10,8 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

Notes
Central canopy with module LED inclined 30°

LED IP44 Dimmer

5989



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2560 lm
/3 _ 3500 K - 3360 lm
E
CRI >90

Control
5989 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg

Notes
Central canopy with module LED inclined 30°

LED IP44 Dimmer

5991



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3840 lm
/3 _ 3500 K - 5040 lm

E

CRI >90

Control

5991 _ _ **/** _ _

_ _ **/** _ **1**	DALI-2
_ _ **/** _ **3**	1-10V
_ _ **/** _ **Z** _ **30**	Casambi (Remote)

Materials

Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics

1 x LED STRIP 32,4 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 3,3 x 0,1 x 0,1 m
Vol 0,033 m^3
Gross weight 6,9 Kg Net weight 3,6 Kg

Notes

Central canopy with module LED inclined 30°

LED IP44 Dimmer



Product specifications subject to change without notice. Please check vibia.com for updated information.

Vertical Wall





5993
6,6 x 4,7 x 132 cm



5995
6,6 x 4,7 x 212 cm

5993



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 1560 lm
/3 _ 3500 K - 1920 lm
E
CRI >90

Control
5993 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 10,8W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 1,5 x 0,1 x 0,1 m
Vol 0,015 m³
Gross weight 3,1 Kg Net weight 1,6 Kg

LED IP44 Dimmer

5995



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 2560 lm
/3 _ 3500 K - 3360 lm
E
CRI >90

Control
5995 _ _ / _ _

_ _ / _ **1**	DALI-2
_ _ / _ **3**	1-10V
_ _ / _ **Z** _ **30**	Casambi (Remote)

Materials
Profile and canopy: Aluminum.
Difuser: PMMA.

Light Source and electronics
1 x LED STRIP 21,6 W 600 mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 2,3 x 0,1 x 0,1 m
Vol 0,023 m³
Gross weight 4,9 Kg Net weight 2,6 Kg

LED IP44 Dimmer

Suite

Design by Jordi Vilardell & Meritxell Vidal

Reinterprets and updates the traditional combination of side table or shelf with table lamp. Its warm and comfortable lighting effect appears when least expected, a pleasant luminous surprise.

Floor Table



6006
46 x 46 x 133 cm



6007
46 x 46 x 133 cm



6011
46 x 39 x 97 cm



6012
46 x 39 x 112 cm

6006



Finishes

- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1539 lm
F

CRI >90

Control

6006 _ _ **/15** Push (with or without memory)

Materials

Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics

8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging

1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m^3
Gross weight 34,3 Kg Net weight 16,7 Kg

Notes

Glass diffuser mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m.

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

6007



Finishes
14/ _ _ Chocolate (RAL 8019)
23/ _ _ Warm White (NCS S 0502-Y50R)
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1539 lm
F
CRI >90

Control
6007 _ _ **/15** Push (with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics
8 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,4513 m³
Gross weight 34,3 Kg Net weight 17 Kg

Notes
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m.

LED IP20 Dimmer

6011



Finishes
14/ _ _ Chocolate (RAL 8019)
23/ _ _ Warm White (NCS S 0502-Y50R)
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 790 lm
F
CRI >90

Control
6011 _ _ **/15** Push (with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 32,4 Kg Net weight 15,7 Kg

Notes
Glass diffuser mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m

LED IP20 Dimmer

6012



Finishes
14/ _ _ Chocolate (RAL 8019)
23/ _ _ Warm White (NCS S 0502-Y50R)
Finish customization (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1275 lm
F
CRI >90

Control
6012 _ _ **/15** Push (with or without memory)

Materials
Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Vertical tube: Steel.
Base: Steel.
Lid: ABS with fiberglass.

Light Source and electronics
6 x LED STRIP 24V 1,63 W.
1 x LED 4,5 W 350 mA
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging
1 Box 0,730 x 0,535 x 1,385 m
Vol 0,3623 m³
Gross weight 33,6 Kg Net weight 16 Kg

Notes
Reading light mink (Pantone 407C), mounted on shelf with dimmable light.
USB charging connection.
LED On/ Off switch under the shelf.
Electric cable 2,5 m

LED IP20 Dimmer

Wall

6040
32 x 14 x 16 cm

6041
32 x 14 x 16 cm



6045
32 x 29 x 16 cm



6046
32 x 29 x 16 cm

6040



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90
/3 _ 3500 K - 184 lm
F
CRI >80

Control
6040 _ **/** _ **0** On/ Off

Materials
Shelf: Aluminum.
Diffuser: Blown-glass.
Lid: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50Hz

Packaging
1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m³
Gross weight 2,6 Kg Net weight 1,6 Kg

LED IP20

6041



Finishes
- **14/** _ _ Chocolate (RAL 8019)
- **23/** _ _ Warm White (NCS S 0502-Y50R)

Finish customization (Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 485 lm
E
CRI >90
/3 _ 3500 K - 184 lm
F
CRI >80

Control
6041 _ _ **/** _ **0** On/ Off

Materials
Shelf: Aluminum.
Diffuser: Blown-glass.
Lid: Steel.

Light Source and electronics
1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,21 x 0,48 x 0,21 m
Vol 0,0212 m³
Gross weight 2,6 Kg Net weight 1,6 Kg

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

6045



Finishes

14/ _ _ Chocolate
(RAL 8019)

23/ _ _ Warm White
(NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 616 lm
E
CRI >90

/3 _ 3500 K - 184 lm
F
CRI >80

Control

6045 _ _ / _ **0** On/ Off

Materials

Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Lid: Steel.

Light Source and electronics

1 x LED STRIP 24V 1,63W.
1 x LED 4,5W 350mA.
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,418 m³
Gross weight 2,6 Kg Net weight 1,8 Kg

Notes

Reading light mink (Pantone 407C),
mounted on shelf with dimmable light.

LED IP20 CE UKCA EAC

6046



Finishes

14/ _ _ Chocolate
(RAL 8019)

23/ _ _ Warm White
(NCS S 0502-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 616 lm
E
CRI >90

/3 _ 3500 K - 184 lm
F
CRI >80

Control

6046 _ _ / _ **0** On/ Off

Materials

Shelf: Aluminum.
Diffuser: PC- Polycarbonate.
Lid: Steel.

Light Source and electronics

1 x LED STRIP 24V 1,63W.
1 x LED 4,5W 350mA.
Constant Current / Constant Voltage 350 24V
220~240V 50Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,418 m³
Gross weight 2,6 Kg Net weight 1,8 Kg

Notes

Reading light mink (Pantone 407C),
mounted on shelf with dimmable light.

LED IP20 CE UKCA EAC

Wall

6050

12 x 12 x 10 cm

6050



Finishes

23/ _ _ Warm White
(NCS S 0502-Y50R)

LED Colour Temperature

/1 _ 2700 K - 485 lm
E
CRI >90

Control

6050 **/ 10** On/ Off

Materials

Wall support: Aluminum.
Diffuser: Blown-glass

Light Source and electronics

1 x LED 4,5W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,21 m
Vol 0,00055 m³
Gross weight 0,6 Kg Net weight 0,4 Kg

LED IP20 CE UKCA EAC Bi-volt

Tube Free

Design by Ichiro Iwasaki

With the Tube ceiling collection, Ichiro Iwasaki endeavours to create a lighting system capable of forming distinctive expressions by reconfiguring the different constituent parts. By combining three different diameter shades, six colour tones and a rhythm of differing heights, Tube creates a unique landscape of luminaires overhead.

Ceiling

Built-in

6095
Ø 22 cm



6100
Ø 28,5 cm



6105
Ø 41 cm



6095



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N
- **10/** _ _ White (NCS S 0300-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6095 _ _ / _ _

_ _ / _ **A** _ **32**	Push; 1-10V; DALI-2 (Remote)
_ _ / _ **Z** _ **32**	Casambi (Remote)

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: ABS.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,017576 m^3
Gross weight 1,6 Kg Net weight 0,8 Kg

LED IP20 CE UK CA EAC

6100



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **10/** _ _ White (NCS S 0300-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1476 lm
E
/2 _ 3000 K - 1521 lm
/3 _ 3500 K - 1550 lm
F
CRI >90

Control

6100 _ _ **/** _ **A** Push; 1-10V;
DALI-2

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,40 x 0,40 x 0,35 m
Vol 0,056 m³
Gross weight 4,5 Kg Net weight 2,5 Kg

LED IP20 Bi-volt

6105



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **10/** _ _ White (NCS S 0300-N)
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 2413 lm
/2 _ 3000 K - 2485 lm
/3 _ 3500 K - 2533 lm
E
CRI >90

Control

6105 _ _ **/** _ **A** Push; 1-10V;
DALI-2

Materials

Diffuser: PC- Polycarbonate.
Led support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED PLATE 20 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Packaging

1 Box 0,60 x 0,60 x 0,40 m
Vol 0,144 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

LED IP20 Bi-volt

Pendant

INDIVIDUAL MODEL



6160
Ø 22 cm

6165
Ø 28,5 cm

MULTIPLE MODELS



Product specifications subject to change without notice. Please check vibia.com for updated information.

INDIVIDUAL MODEL

6160



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6160 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging

Total Vol 0,04 m3
Gross weight 4,40 Kg Net weight 2,15 Kg

Notes

6160 _ _ / _ 1: DALI-2 Bi-volt
6160 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

6165



Finishes

- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm

E

CRI >90

Control

6165 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Light Source and electronics

1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging

Total Vol 0,04 m3
Gross weight 4,40 Kg Net weight 2,15 Kg

Notes

6165 _ _ / _ 1: DALI-2 Bi-volt
6165 _ _ / _ B: Push; 1-10V Bi-volt
Extra cable length.

LED IP20

MULTIPLE MODELS

Select your model at **vibia.com** and adjust



2 x 6160



2 x 6165 + 1 x 6160



4 x 6165



4 x 6160



5 x 6165



7 x 6165



8 x 6160



8 x 6165



10 x 6160



19 x 6160



24 x 6165



3 x 6165



5 x 6165



6 x 6165



29 x 6160



10 x 6160



16 x 6160



5 x 6165



8 x 6160

See more multiple models at **vibia.com**

Product specifications subject to change without notice. Please check vibia.com for updated information.

Finishes

10/ _ _ White (NCS S 0300-N)
15/ _ _ Grey L2 (NCS S 2500-N
16/ _ _ Grey M1 (NCS S 4500-N)
21/ _ _ Black Grey (NCS S 7000-N)
24/ _ _ Beige M1 (NCS S 2005-Y50R)
37/ _ _ Terra Red (NCS S 4040-Y70R)

Finish customization

(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K
/2 _ 3000 K
/3 _ 3500 K

CRI >90

Control

Model _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **B** Push; 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 6160, 6165

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16,8 cm

Black finish.

_18
Free Wire



Ø 20 cm



Ø 22 cmv



Ø 36 cm



Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in



Materials

Diffuser: PC- Polycarbonate. Shade: Aluminum.
Led support: Aluminum. Tube: Steel. Canopy: Steel.

Notes

Additional cable length from 2 m.

LED IP20 Bi-volt

Plusminus

Design by Diez Office

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.





Easy to design and install

Compose a personalised Plusminus at **vibia.com**

From scratch

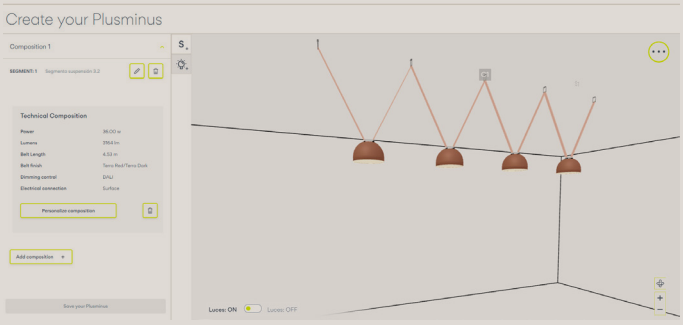

+ Create and compose projects in detail.
+ Draw and customise in 3D to see it in space.
+ Or customise it step by step without drawing.

From a layout

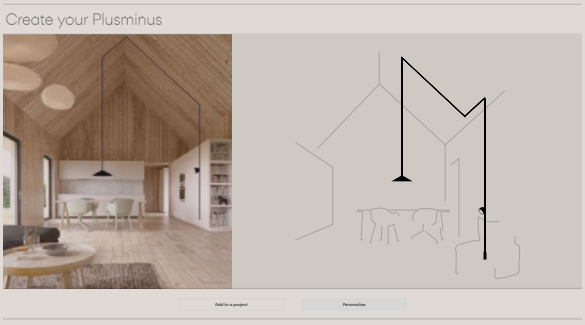

+ Customise and adapt it to the needs of your project.
+ Add it to your project and edit it at any time.
+ More than 100 creations for you.

Product specifications subject to change without notice. Please check vibia.com for updated information.









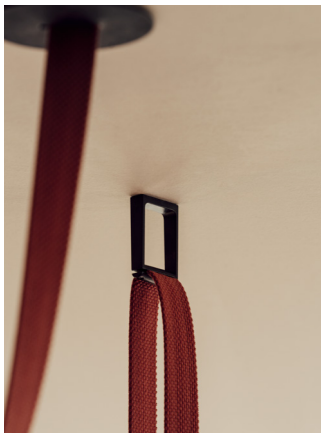

Easy connection
Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.

Luminaire types and lighting effects



Sphere



Volumetric Diffuser
distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere.
The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



Semisphere



Hidden Diffuser
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



Cone



Hidden Diffuser
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

Spotlight



Flat diffuser
emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.



Accent light
emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.





Linear Diffuser



General lighting
provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.

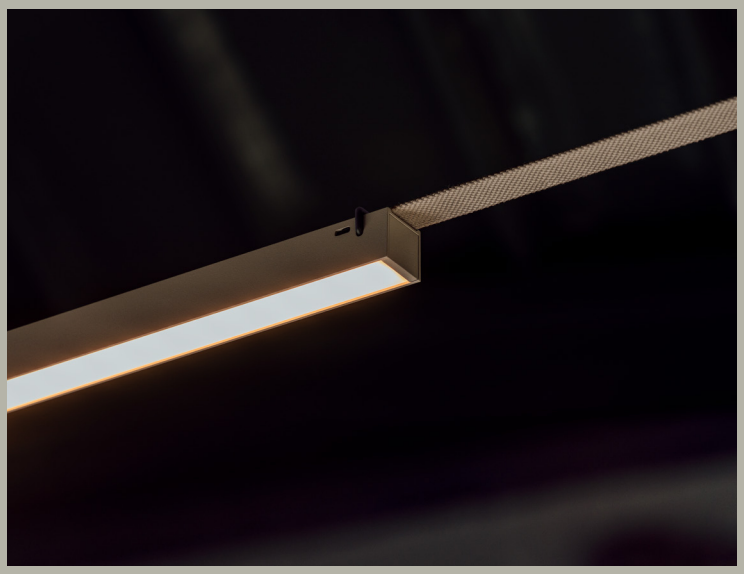

Linear Low UGR



Linear High Efficiency Low Glare
offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

Linear High Comfort Low Glare
provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.





Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website **vibia.com**

Sphere



6230

Ø 20 cm



6235

Ø 30 cm

6230



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm

E

CRI >90

Control

6230 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,26 x 0,26 x 0,260 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,93 Kg

LED IP20 Dimmer

6235



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6235 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,50 Kg Net weight 1,80 Kg

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

Semisphere



6220
Ø 20 cm



6225
Ø 30 cm

6220



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
- **/1** _ 2700 K - 846 lm
- **/2** _ 3000 K - 884 lm
- **/3** _ 3500 K - 916 lm

E

CRI >90

Control
6220 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 Dimmer

6225



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
- **/1** _ 2700 K - 1492 lm
- **/2** _ 3000 K - 1569 lm
- **/3** _ 3500 K - 1606 lm

F

CRI >90

Control
6225 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website **vibia.com**

Cone



6240

Ø 60 cm



6245

Ø 80 cm

6240



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6240 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

0,727 x 0,727 x 0,32 m
Vol 0,1691 m³
Gross weight 5 Kg Net weight 2,5 Kg

LED IP20 Dimmer

6245



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6245 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,2488 m³
Gross weight 7 Kg Net weight 3,5 Kg

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

Spotlight



Spot Accent Light
6200 Narrow
Ø 10 cm



Spot Accent Light
6205 Medium
6210 Wide
Ø 10 cm



Spot Flat Diffuser
6215
Ø 10 cm

6200
Narrow



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6200 _ _ **/** _ _
- _ _ **/** _ **0** On/Off
- _ _ **/** _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ **/** _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m^3
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

6205
Medium



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6205 _ _ **/** _ _
- _ _ **/** _ **0** On/Off
- _ _ **/** _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ **/** _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m^3
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website **vibia.com**

6210
Wide



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm

E

CRI >90

Control

6210 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

6215
Flat Diffuser



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 491 lm
/2 _ 3000 K - 513 lm
/3 _ 3500 K - 532 lm

E

CRI >90

Control

6215 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

Spotlight - Accent

Narrow	Medium	Wide
		
H = 1,5 m		
H = 3 m		
ø 0,2 m 1240 lx Ø 0,4 m 310 lx	ø 0,69 m 851 lx Ø 1,37 m 213 lx	ø 0,9 m 307 lx Ø 1,8 m 77 lx

Spot Accent Light



Spot Flat Diffuser



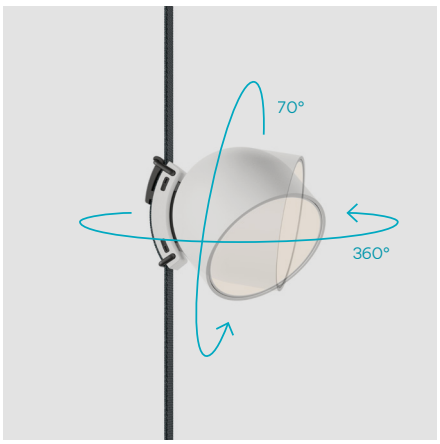

Product specifications subject to change without notice. Please check vibia.com for updated information.

Linear diffuser

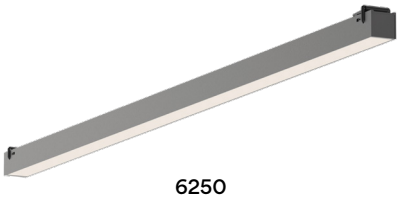

6250
102 x 4 x 3 cm

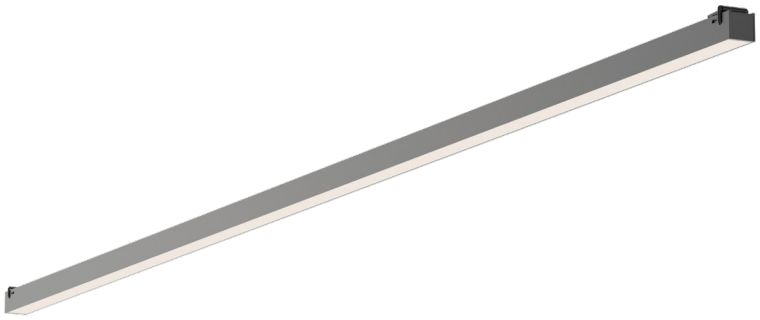

6255
202 x 4 x 3 cm

6250



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm
C
CRI >90

Control

6250 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 Dimmer

6255



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm
D
CRI >90

Control

6255 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 Dimmer

Linear Low UGR - High-Comfort



6260
26,8 x 7 x 3 cm



6265
52,5 x 7 x 3 cm

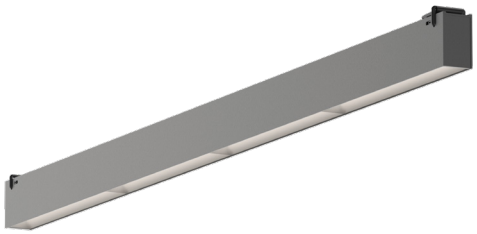

6270
103,7 x 7 x 3 cm



6260



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1281 lm
/2 _ 3000 K - 1323 lm
/3 _ 3500 K - 1366 lm
D
CRI >90

Control

6260 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m^3
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 Dimmer

6265



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2562 lm
/2 _ 3000 K - 2647 lm
/3 _ 3500 K - 2731 lm
D
CRI >90

Control

6265 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 Dimmer

6270



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 5124 lm
/2 _ 3000 K - 5293 lm
/3 _ 3500 K - 5462 lm
D
CRI >90

Control

6270 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 Dimmer

Linear Low UGR - High-Efficiency



6275
26,8 x 7 x 3 cm



6280
52,5 x 7 x 3 cm

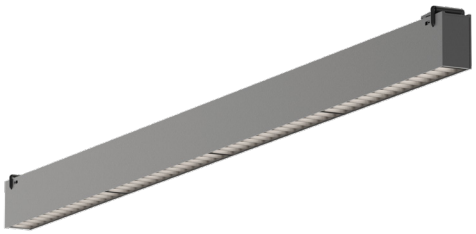

6285
103,7 x 7 x 3 cm



6275



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1281 lm
/2 _ 3000 K - 1323 lm
/3 _ 3500 K - 1366 lm

D

CRI >90

Control

6275 _ _ **/** _ _

- _ _ **/** _ **0** On/Off
- _ _ **/** _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ **/** _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 10,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m^3
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

6280



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2562 lm
/2 _ 3000 K - 2647 lm
/3 _ 3500 K - 2731 lm
D
CRI >90

Control

6280 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m^3
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 Dimmer

6285



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 5124 lm
/2 _ 3000 K - 5293 lm
/3 _ 3500 K - 5462 lm
D
CRI >90

Control

6285 _ _ / _ _

- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m
Vol 0,0096 m^3
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 Dimmer

Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.



 Product specifications subject to change without notice. Please check vibia.com for updated information.

Installation accessories

You will receive a personalised accessories toolbox per every composition made at **vibia.com.** The Toolbox includes some extra units for on-site adjustments.



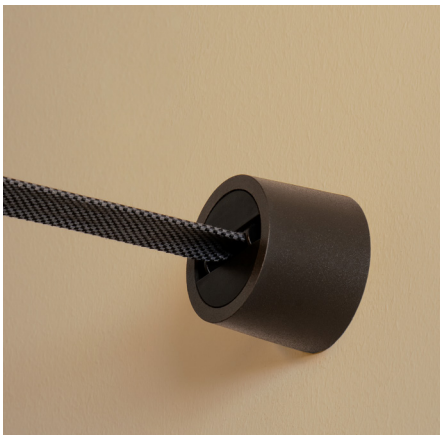

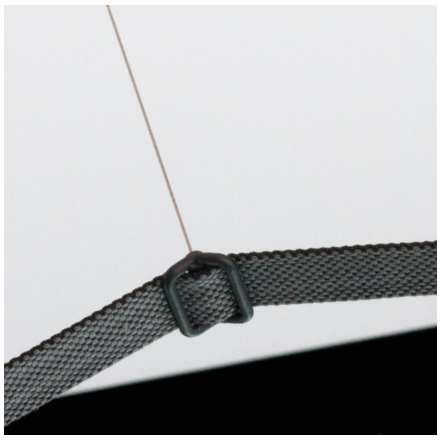

Belt terminations options



B3
Belt End Cap



B4
Double End Cap



B5
Pendant End Cap

Fasten accessories options



F1
Circular Ratchet



F2
Circular Anchor



F3
Belt Support



F4
Counterweight



F5
Corner Support



F6
Freestyle Bar
2 m. bar length
5 m. maximum tensor cable

Tension clips options



T1
Suspension Clip



T2
V-Tension Clip



T3
Parallel Tension Clip S



T4
Parallel Tension Clip M



T5
Cable End Cap



T6
Pendant Cable S



T7
Pendant Cable M

Materials
Counterweight: Cast iron

Finishes
11 Black (NCS S 0300-N)

Electrical connection options

Choose your preferred installation option according to your needs.



Surface



Built-in



Remote

Built-in



Surface



Plug



Optional wire connector

Dimming control options

Choose your preferred installation option according to your needs.

Dimming Control	**Electrical Connection**			
	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On/ Off	✓	✓	✓	✓
Push Switch	–	–	–	✓
Push Simultaneous	✓	✓	✓	–
1-10V Simultaneous	✓	✓	✓	–
DALI Simultaneous	✓	✓	✓	–
Casambi Simultaneous	✓	✓	✓	✓
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓

Belt Options Surface Canopy

Choose your preferred installation option according to your needs.





Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; Casambi (P2P).

Body: ABS.
Net weight 0,9 Kg.

11 Black
(NCS S 8500-N)

IP20 Dimmer Bi-volt



Surface Canopy M
E2 Ø 260 mm.

Wattage options:
>60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; Casambi (P2P).

Body: ABS.
Net weight 1,8 Kg.

11 Black
(NCS S 8500-N)

IP20 Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; Casambi (P2P).

Body: ABS.
Net weight 1,08 - 1,860 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 Dimmer Bi-volt

120/240W
IP20 Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; Casambi (P2P).

Body: ABS.
Net weight 0,87 - 1,65 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 Dimmer Bi-volt

120/240W
IP20 Dimmer Bi-volt



Remote Surface Canopy
E5 Ø 60 mm.

Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi; Casambi (P2P).

Body: Aluminum.
Net weight 0,95 - 1,73 Kg.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 Dimmer Bi-volt

120/240W
IP20 Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi;
Casambi (P2P).

Body: ABS.

11 Black
(NCS S 8500-N)

25/40/60W
IP20 Dimmer Bi-volt



Wire Connector
E8 Ø 3,1 mm.

Wattage options:
< 60W.

Wire connector
E8 Ø 5,8 mm.

Wattage options:
< 60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Body: ABS.

11 Black
(NCS S 8500-N)

IP20

Belt

Maximum 60 metres per electrical connection, belt length personalised for each composition on **www.vibia.com**

Finishes
Black
Terra Red
Blue
Green
Beige

Belt
Polyester

Fire Hazard Testing. GW-960.
fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

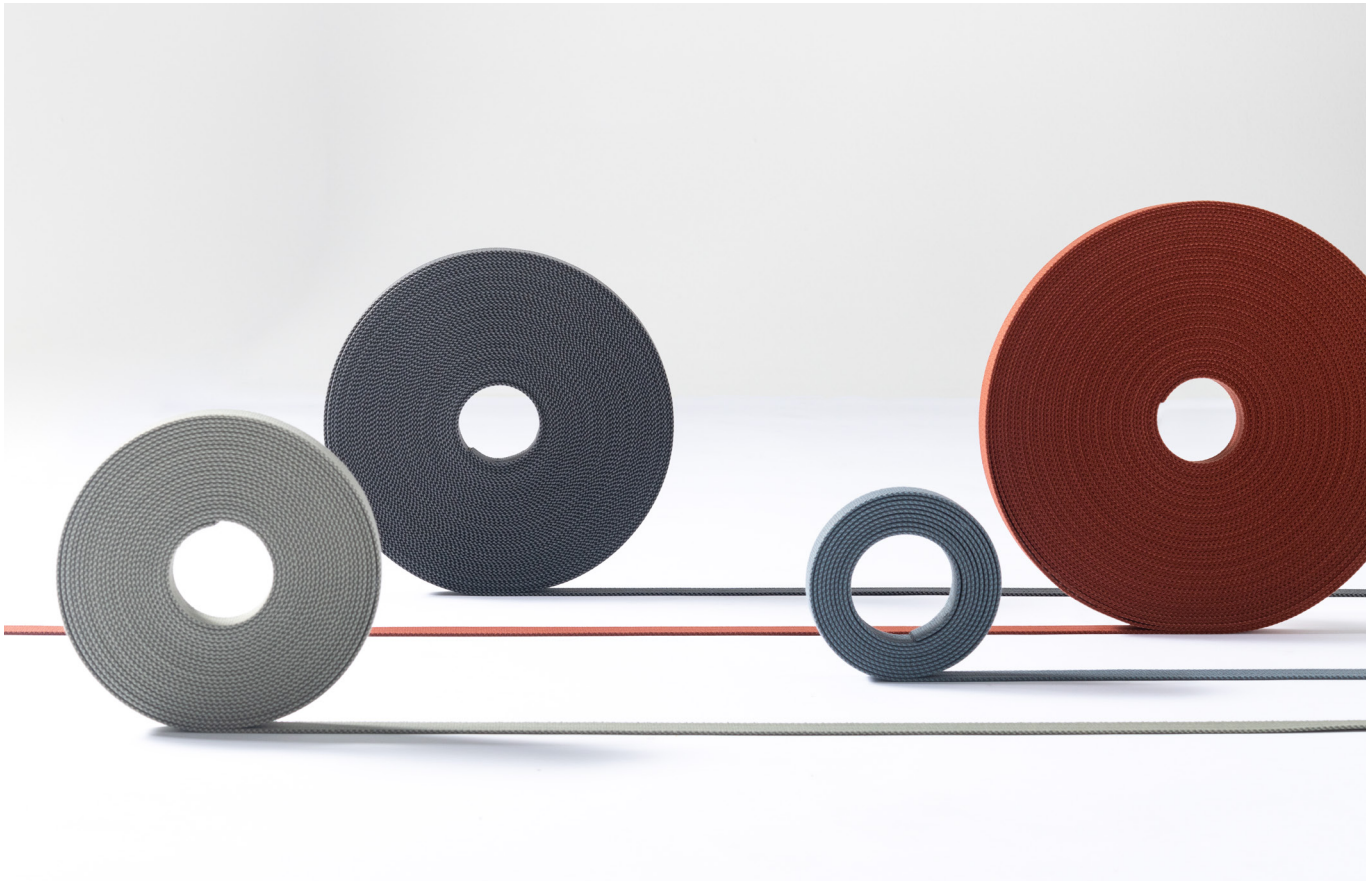

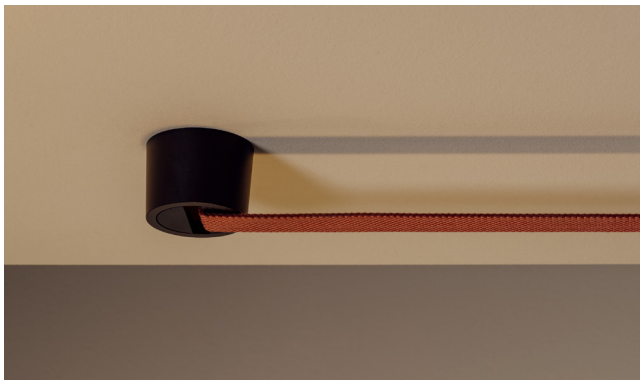

The distance of the belt from the wall or the ceiling, when installed in parallel, is always 4,5 cm.

Belt terminations

Belt terminations can be adjusted during the installation process according to your preference.






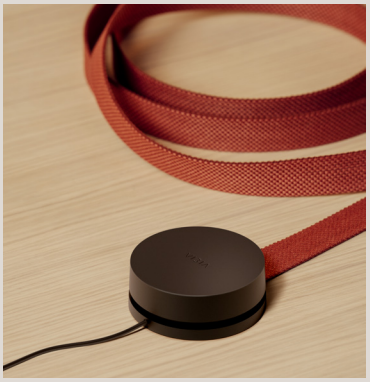




Composition examples for orientative prices

The final price of the composition depends on the number of luminaires, belt length, dimming control and the electrical connection type chosen.

Composition examples for orientative prices

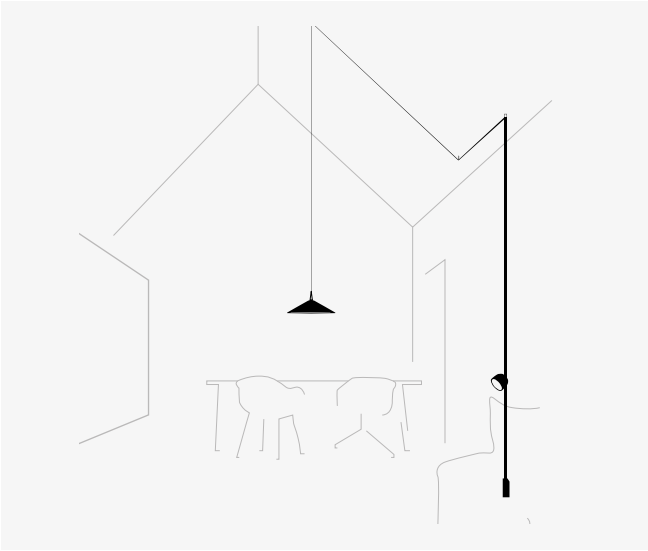

Sketch composed by one composition.

2 luminaires: Cone 6240, Spotlight 6215.

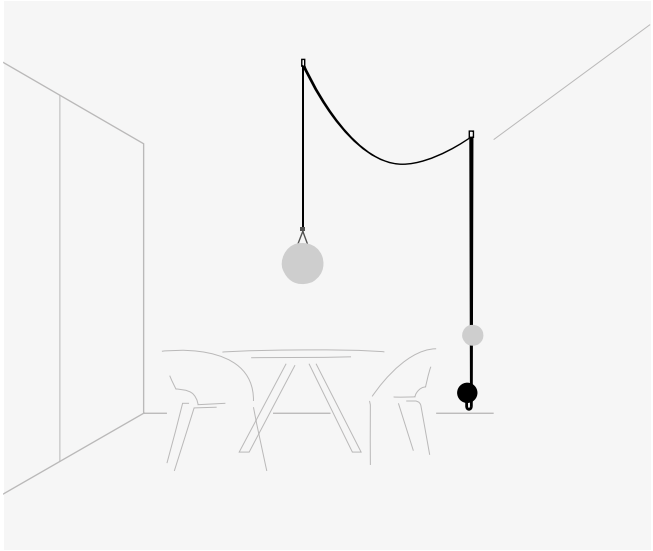

Sketch composed by one composition.

2 luminaires: Sphere 6230, Sphere 6235.

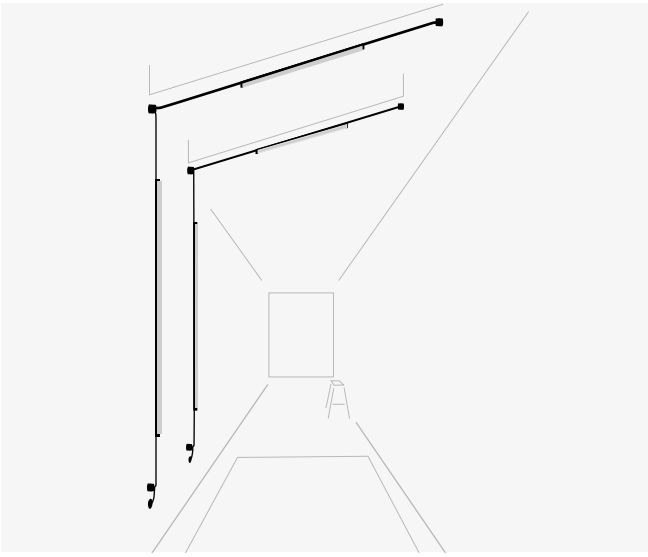

Sketch composed by two identical compositions.

2 luminaires: Linear Diffuser 6250, Linear Diffuser 6255.

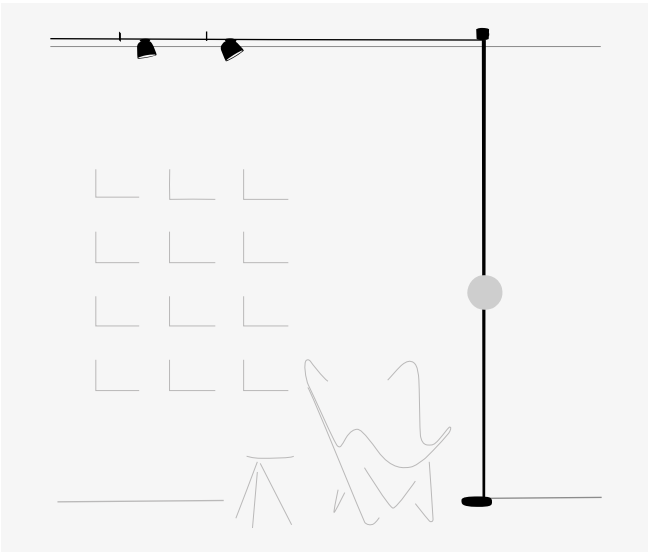

Sketch composed by one composition.

3 luminaires: Spotlight 6205 x 2, Sphere 6230.



Sketch composed by one composition.

1 luminaire: Sphere 6230.

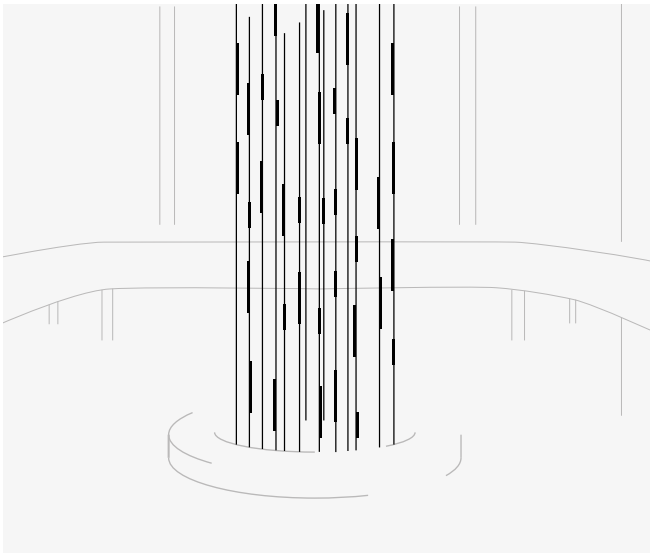

Sketch composed by several compostions.

3 luminaires: Linear Diffuser 6255.

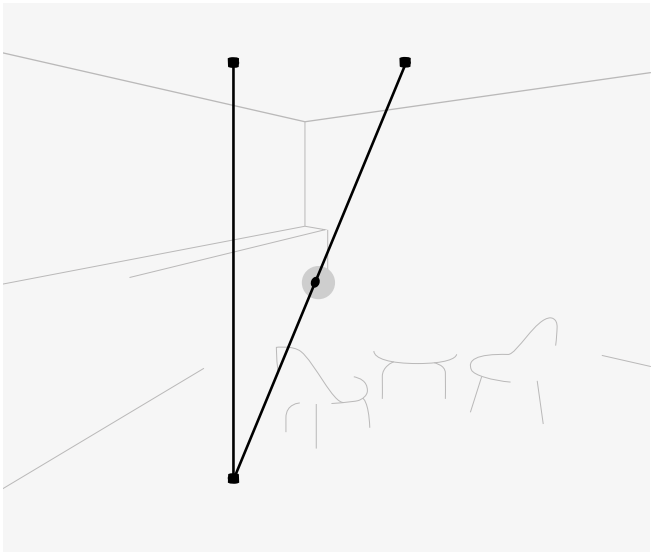

Sketch composed by one composition.

1 luminaire: Sphere 6230.

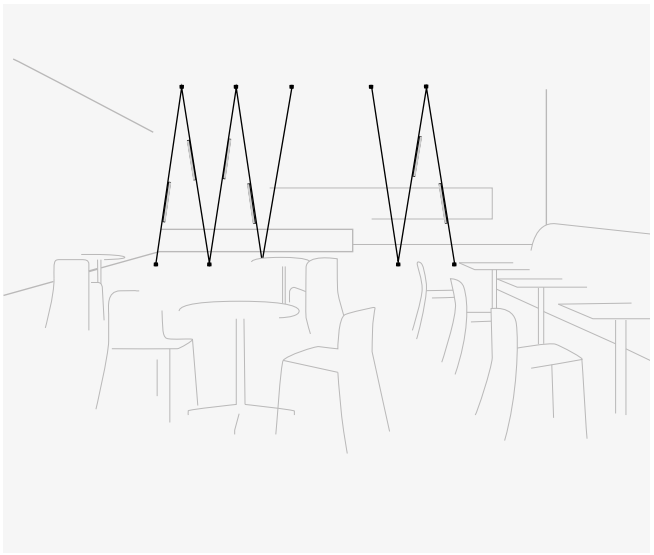

Sketch composed by two compositions.

2 luminaires: Linear Diffuser 6250.

Composition examples for orientative prices

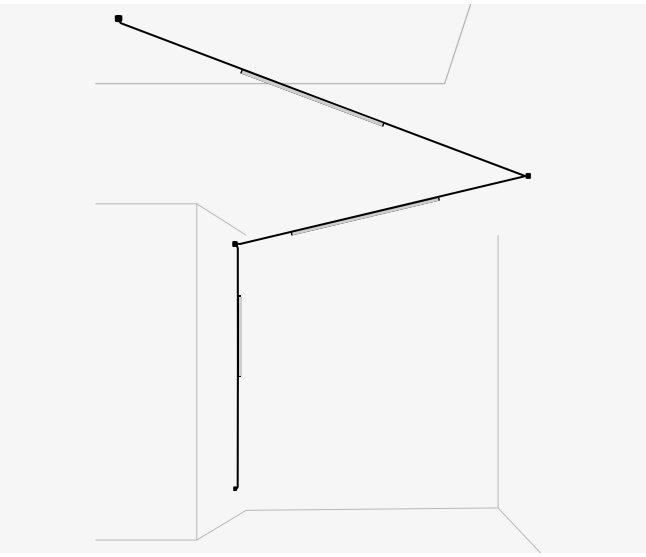

Sketch composed by one composition.

3 luminaires: Linear Diffuser 6250, Linear Diffuser 6255 x 2.

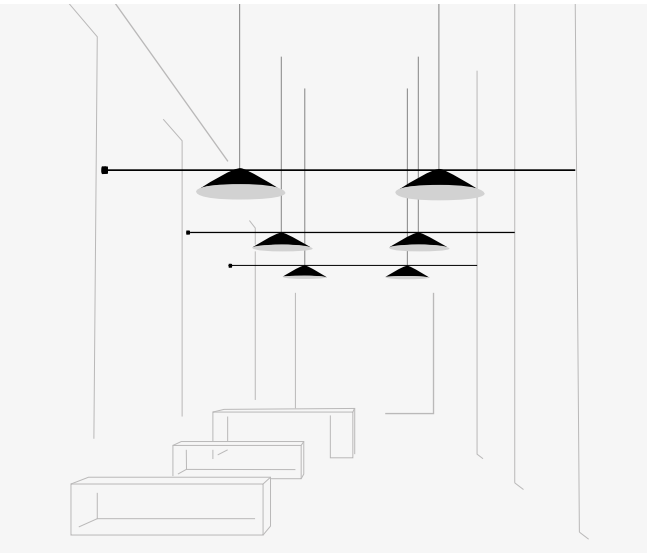

Sketch composed by three identical compositions.

2 luminaires: Cone 6245 x 2.

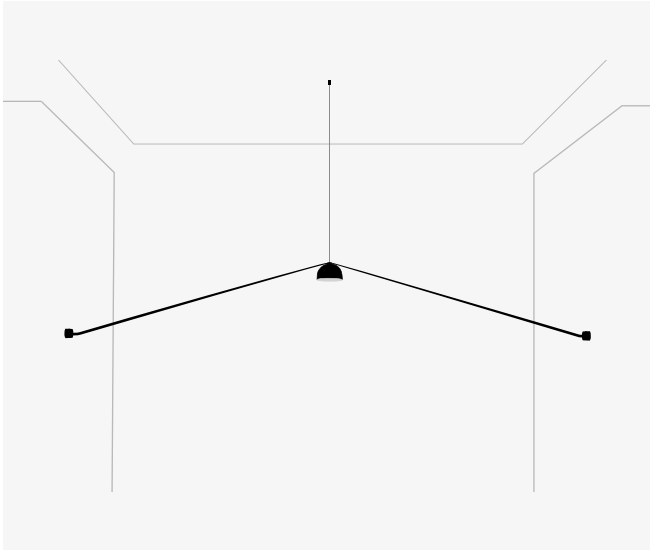

Sketch composed by one composition.

1 luminaire: Semisphere 6225.

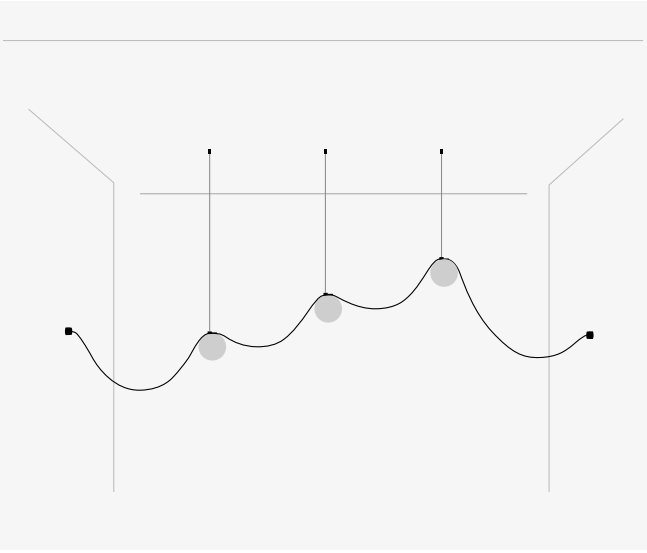

Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

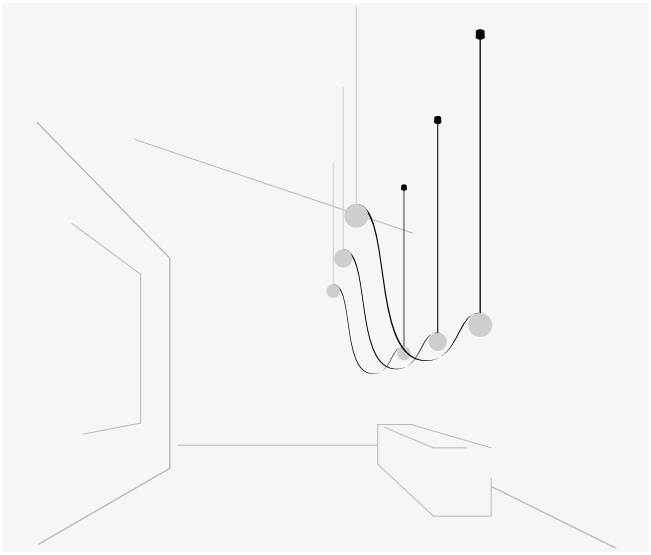

Sketch composed by three identical compositions.

2 luminaires: Sphere 6235 x 2.

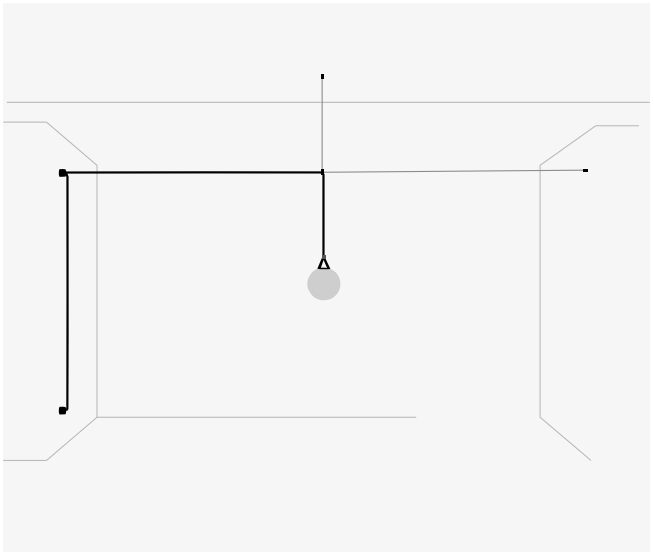

Sketch composed by one composition.

1 luminaire: Sphere 6235.

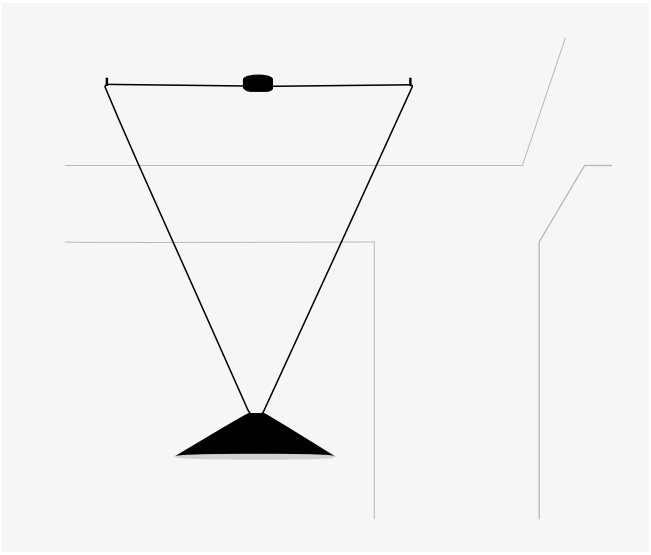

Sketch composed by one composition.

1 luminaire: Cone 6245.

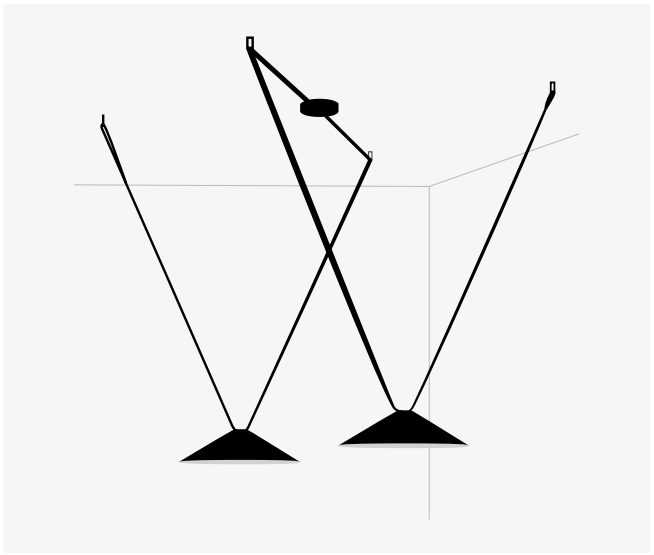

Sketch composed by one composition.

2 luminaires: Cone 6240 x 2.

Composition examples for orientative prices

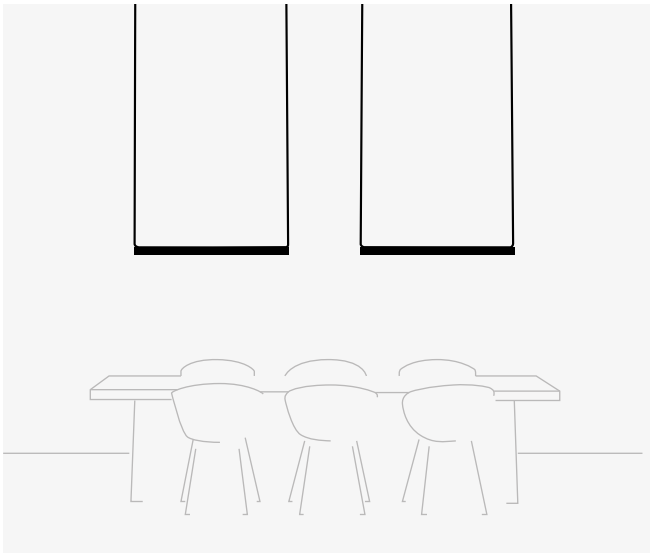

Sketch composed by one composition.

2 luminaires: Linear Low UGR High-Comfort 6270 x 2.

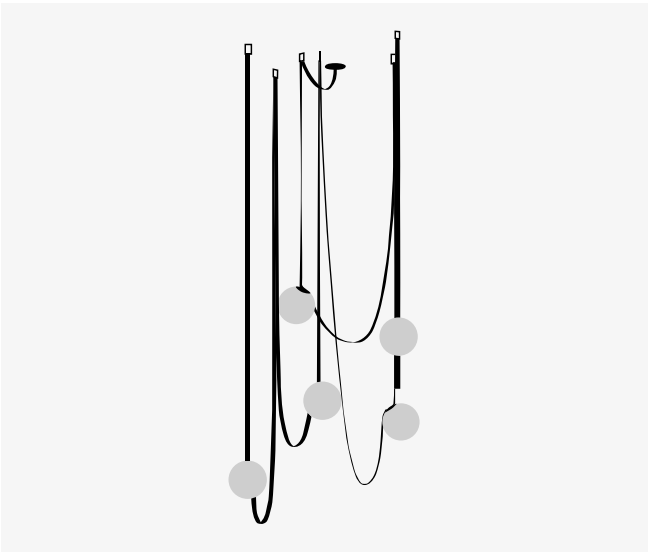

Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

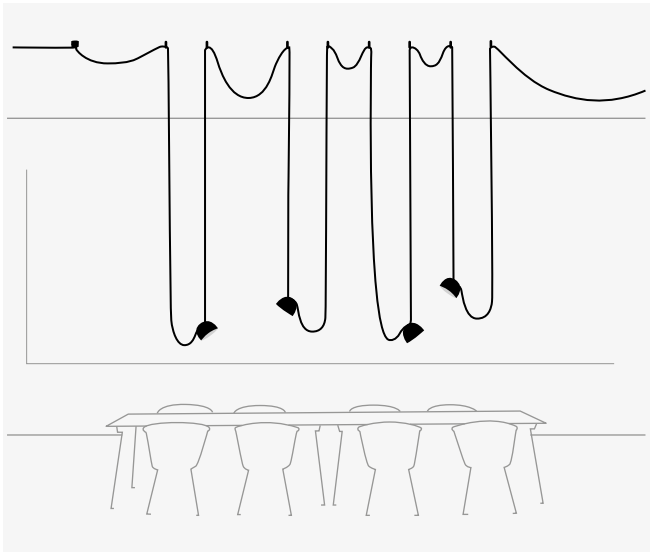

Sketch composed by one composition.

4 luminaires: Semiphere 6220 x 4.

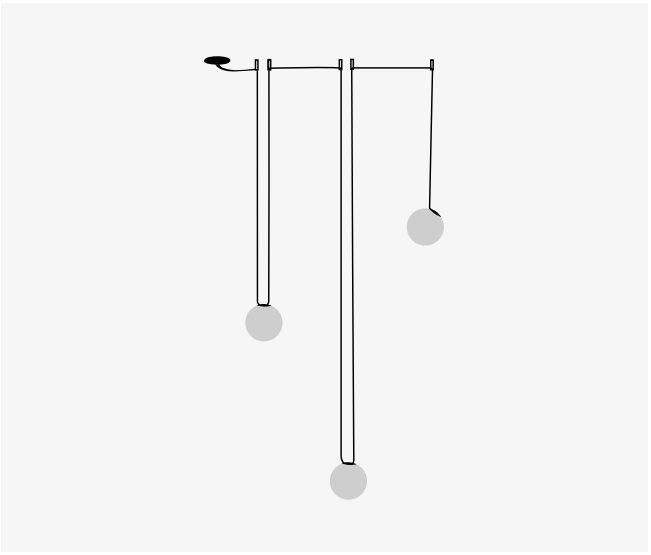

Sketch composed by one composition.

3 luminaires: Sphere 6230 x 3.

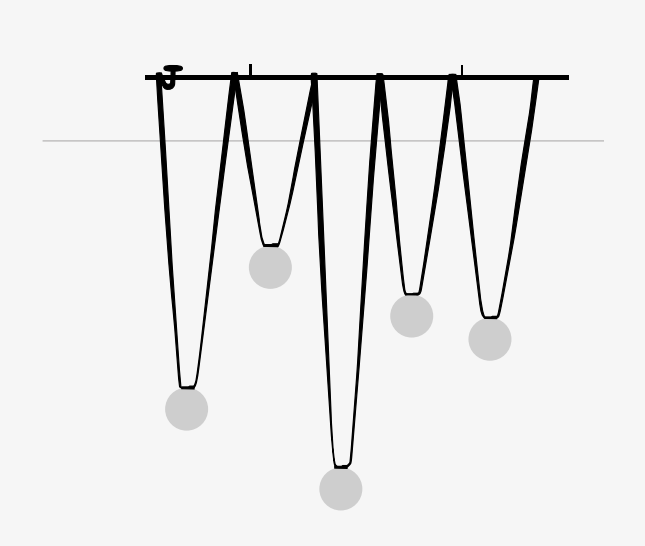

Sketch composed by one composition.

5 luminaires: Sphere 6230 x 5.

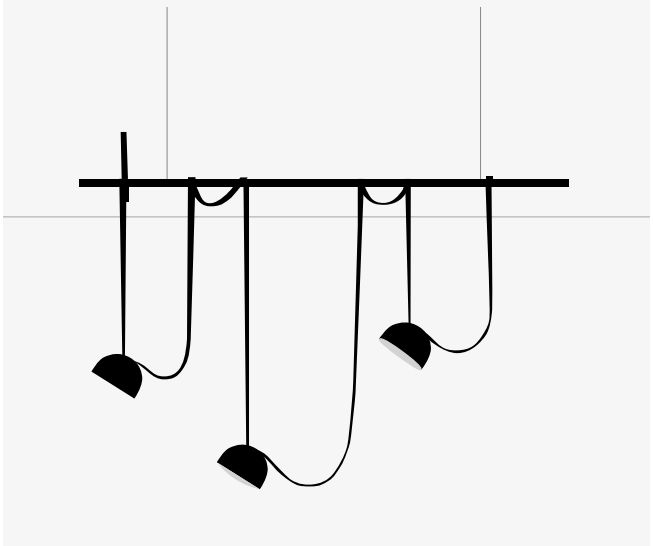

Sketch composed by one composition.

3 luminaires: Semisphere 6220 x 3.

Each project is unique.
Visit vibia.com and chose among
multiple compositions designed
and adapted to your project needs.

Personalise your own Plusminus composition
quick and easy at vibia.com

Plusminus Solo

Design by Diez Office

Plusminus Solo introduces a collection of versatile semi-spherical luminaires that adapt to the surrounding space. Easily adjustable, the Plusminus wall range features semi-spherical directed flat diffusers in different sizes, as well as an accent spotlight for more precise illumination.

Ceiling Wall

Spot Accent Light

6330 Narrow
6331 Medium
6332 Wide

Ø 10 cm



Spot Flat Diffuser

6333

Ø 10 cm



Spot Flat Diffuser

6335

Ø 20 cm



Spot Flat Diffuser

6340

Ø 30 cm



6330
Narrow
6331
Medium
6332
Wide



6330 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 916 lm
/2 _ 3000 K - 925 lm
/3 _ 3500 K - 959 lm

E

CRI >90

Control

6330 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA
3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m^3
Gross weight 0,67 Kg Net weight 0,49 Kg

Notes

6330 _ _ / _ 1: DALI-2 Bi-volt
6330 _ _ / _ B: Push; 1-10V Bi-volt

LED IP20 Dimmer

Ø 3 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

6331 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 916 lm
/2 _ 3000 K - 925 lm
/3 _ 3500 K - 959 lm

E

CRI >90

Control

6331 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA
3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

Notes

6331 _ _ / _ 1: DALI-2 Bi-volt
6331 _ _ / _ B: Push; 1-10V Bi-volt

LED IP20 Dimmer
Ø 3 cm

6332 Wide

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 916 lm
/2 _ 3000 K - 925 lm
/3 _ 3500 K - 959 lm

E

CRI >90

Control

6332 _ _ **/** _ _

- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2700 K:
1 x LED 7,9 W 450 mA
3000 K - 3500K:
1 x LED 7,7 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

Notes

6332 _ _ / _ 1: DALI-2 Bi-volt
6332 _ _ / _ B: Push; 1-10V Bi-volt

LED IP20 Dimmer
Ø 3 cm

Spotlight - Accent

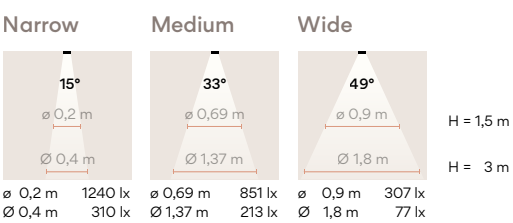

ø 0,2 m 1240 lx
Ø 0,4 m 310 lx

ø 0,69 m 851 lx
Ø 1,37 m 213 lx

ø 0,9 m 307 lx
Ø 1,8 m 77 lx



6333
Flat Diffuser



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 491 lm
/2 _ 3000 K - 546 lm
/3 _ 3500 K - 566 lm
E
CRI >90

Control
6333 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
2700 K:
1 x LED 4,2 W 250 mA
3000 K - 3500K:
1 x LED 4,1 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,67 Kg Net weight 0,49 Kg

Notes
6333 _ _ / _ 1: DALI-2 Bi-volt
6333 _ _ / _ B: Push; 1-10V Bi-volt

LED IP20 Dimmer
Ø 3 cm

6335



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm
E
CRI >90

Control
6335 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,31 Kg Net weight 0,89 Kg

Notes
6335 _ _ / _ 1: DALI-2 Bi-volt
6335 _ _ / _ B: Push; 1-10V Bi-volt

LED IP20 Dimmer
Ø 5,5 cm

6340



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1673 lm
/2 _ 3000 K - 1752 lm
/3 _ 3500 K - 1817 lm
E
CRI >90

Control
6340 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **1** DALI-2 (Remote)
- _ _ **/** _ **B** Push; 1-10V (Remote)
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA
Constant Current 850 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,20 Kg Net weight 1,70 Kg

Notes
6340 _ _ / _ 1: DALI-2 Bi-volt
6340 _ _ / _ B: Push; 1-10V Bi-volt

LED IP20 Dimmer
Ø 5,5 cm

Product specifications subject to change without notice. Please check vibia.com for updated information.

Table Floor



6341 Accent medium / Surface
6343 Flat diffuser / Surface

Ø 10 x 50 cm

6346 Accent medium / Bolt-down
6348 Flat diffuser / Bolt-down

Ø 10 x 50 cm

6341
Accent medium / Surface
6343
Flat diffuser / Surface



6341 Accent medium / Surface

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm

E

CRI >90

Control

6341 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.
Base: Steel / Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

6341 _ _ / _ 5: Push Multi-volt
Cable with plug included.

LED IP20 Dimmer

6343 Flat diffuser / Surface

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 531 lm
/2 _ 3000 K - 557 lm
/3 _ 3500 K - 557 lm

E

CRI >90

Control

6343 _ _ **/** _ _

_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials

Body: Aluminum.
Base: Steel.
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes

6343 _ _ / _ 5: Push Multi-volt

LED IP20 Dimmer

6346
Accent medium / Bolt-down
6348
Flat diffuser / Bolt-down

6346 Accent medium / Bolt-down

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm
E
CRI >90

Control
6346 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **Z** _ **40** Casambi

Materials
Body: Aluminum,
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes
6346 _ _ / _ 1: DALI-2 Bi-volt

LED IP20 Dimmer

6348 Flat diffuser / Bolt-down

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 531 lm
/2 _ 3000 K - 557 lm
/3 _ 3500 K - 557 lm
E
CRI >90

Control
6348 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **Z** _ **40** Casambi

Materials
Body: Aluminum,
Spot: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,78 x 0,13 x 0,13 m
Vol 0,0326 m³
Gross weight 3,8 Kg Net weight 2,8 Kg

Notes
6348 _ _ / _ 1: DALI-2 Bi-volt

LED IP20 Dimmer



Product specifications subject to change without notice. Please check vibia.com for updated information.

Wall Table Floor

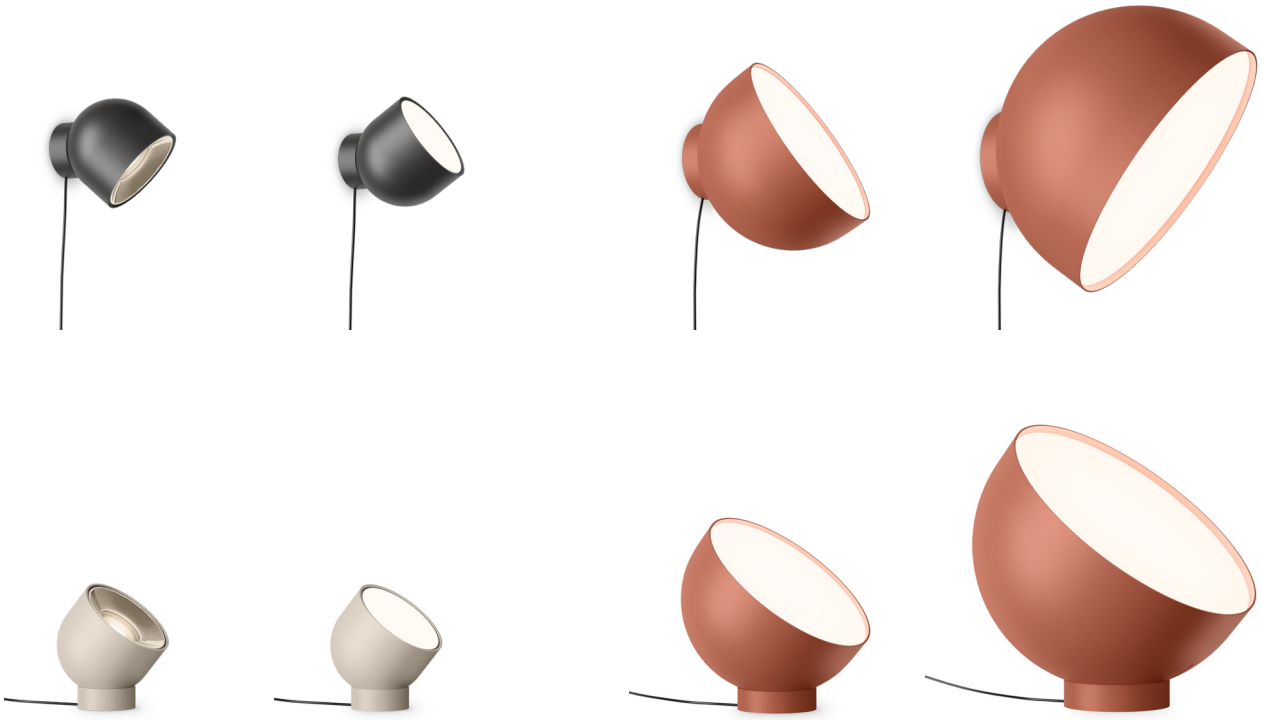

Accent medium
6361 Surface / Bolt-down
Ø 10 cm

Flat diffuser
6363 Surface / Bolt-down
Ø 10 cm

Flat diffuser
6365 Surface / Bolt-down
Ø 20 cm

Flat diffuser
6370 Surface / Bolt-down
Ø 30 cm





6361
Accent medium
Surface / Bolt down

6363
Flat diffuser Surface / Bolt-down



6361 Accent medium Surface / Bolt-down

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm
E
CRI >90

Control
6361 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³
Gross weight 0,95 Kg Net weight 0,73 Kg

Notes
6361 _ _ / _ 5: Push Multi-volt
Cable with plug included. Electric cable 2 m.
Base: Ø 6 cm. Height 2,3 cm.

LED IP20 Dimmer

6363 Flat diffuser Surface / Bolt-down

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 531 lm
/2 _ 3000 K - 557 lm
/3 _ 3500 K - 557 lm
E
CRI >90

Control
6363 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,2 W 250 mA
Constant Current 250 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m Vol 0,0046 m³
Gross weight 0,98 Kg Net weight 0,73 Kg

Notes
6363 _ _ / _ 5: Push Multi-volt
Cable with plug included. Electric cable 2 m.
Base: Ø 6 cm. Height 2,3 cm.

LED IP20 Dimmer

6365
Flat diffuser Surface / Bolt-down



6365 Flat diffuser Surface / Bolt-down

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 941 lm
/2 _ 3000 K - 987 lm
/3 _ 3500 K - 1022 lm
E
CRI >90

Control
6365 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA
Constant Current 450 mA
220~240Vac 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,31 Kg Net weight 0,89 Kg

Notes
6365 _ _ / _ 5: Push Multi-volt
Cable with plug included. Electric cable 2 m.
Base: Ø 8,2 cm. Height 2,3 cm.

LED IP20 Dimmer

6370
Flat diffuser Surface / Bolt-down



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1673 lm
/2 _ 3000 K - 1752 lm
/3 _ 3500 K - 1817 lm

E

CRI >90

Control

6370 _ _ / _ _

_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials

Body: Aluminum.
Base: Zinc Alloy.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 16 W 850 mA
Constant Current 850 mA
220~240Vac 50/60Hz

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m^3
Gross weight 2,20 Kg Net weight 1,70 Kg

Notes

6370 _ _ / _ 5: Push Multi-volt
Cable with plug included. Electric cable 2 m.
Base: Ø 11 cm. Height 2,8 cm.

LED IP20 Dimmer





Kontorno

Design by Sebastian Herkner

Consisting of an elegant linear framework complemented by a cylindrical diffuser or curved reflector, the Kontorno collection envelops the light source it contains, offering diffuse, balanced illumination.

Wall



6414
20 x 92 cm



6416
20 x 122 cm



6418
20 x 162 cm



6444
19 x 92 cm



6446
19 x 122 cm

6414



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E
/2 _ 3000 K - 2381 lm
F
/3 _ 3500 K - 2551 lm
E
/7 _ 2200 K - 2041 lm
F
CRI >90

Control
6414 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials
Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes
6414 _ _ / _ 1: DALI-2 Multi-volt
6414 _ _ / _ 3: 1-10V Multi-volt
6414 _ _ / _ 5: Push Multi-volt

LED IP20 Dimmer

6416



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E
/2 _ 3000 K - 3154 lm
F
/3 _ 3500 K - 3380 lm
E
/7 _ 2200 K - 2703 lm
F
CRI >90

Control
6416 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials
Concave shade: Aluminum. Diffuser: PC- Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

Notes
6416 _ _ / _ 1: DALI-2 Multi-volt
6416 _ _ / _ 3: 1-10V Multi-volt
6416 _ _ / _ 5: Push Multi-volt

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

6418

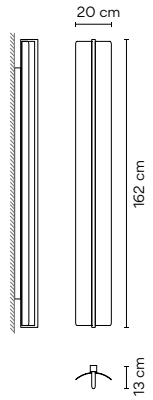

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4205 lm
E
/2 _ 3000 K - 4205 lm
F
/3 _ 3500 K - 4506 lm
E
/7 _ 2200 K - 3604 lm
F
CRI >90

Control
6418 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials
Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 0,175 m
Vol 0,1580 m³
Gross weight 6,5 Kg Net weight 4 Kg

Notes
6418 _ _ / _ 1: DALI-2 Multi-volt
6418 _ _ / _ 3: 1-10V Multi-volt
6418 _ _ / _ 5: Push Multi-volt

LED IP20 Dimmer

6444



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E
/2 _ 3000 K - 2381 lm
F
/3 _ 3500 K - 2551 lm
E
/7 _ 2200 K - 2041 lm
F
CRI >90

Control
6444 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials
Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg

Notes
6444 _ _ / _ 1: DALI-2 Multi-volt
6444 _ _ / _ 3: 1-10V Multi-volt
6444 _ _ / _ 5: Push Multi-volt

LED IP20 Dimmer

6446

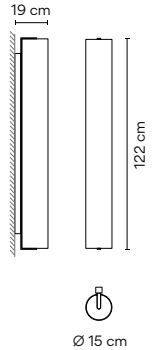

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E
/2 _ 3000 K - 3154 lm
F
/3 _ 3500 K - 3380 lm
E
/7 _ 2200 K - 2703 lm
F
CRI >90

Control
6446 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials
Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg

Notes
6446 _ _ / _ 1: DALI-2 Multi-volt
6446 _ _ / _ 3: 1-10V Multi-volt
6446 _ _ / _ 5: Push Multi-volt

LED IP20 Dimmer

Pendant



6434
92 x max. 200 cm



6436
122 x max. 200 cm

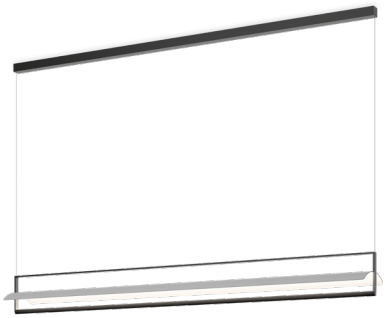

6438
162 x max. 200 cm



6474
92 x max. 200 cm



6476
122 x max. 200 cm

6434



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 2381 lm
E

/2 _ 3000 K - 2381 lm
F

/3 _ 3500 K - 2551 lm
E

/7 _ 2200 K - 2041 lm
F

CRI >90

Control

6434 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials

Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m^3
Gross weight 5,5 Kg Net weight 3,5 Kg

Notes

6434 _ _ / _ 1: DALI-2 Multi-volt
6434 _ _ / _ 3: 1-10V Multi-volt
6434 _ _ / _ 5: Push Multi-volt
Extra cable length.

LED IP20 Dimmer

6436



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3154 lm
E
/2 _ 3000 K - 3154 lm
F
/3 _ 3500 K - 3380 lm
E
/7 _ 2200 K - 2703 lm
F
CRI >90

Control
6436 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg

Notes
6436 _ _ / _ 1: DALI-2 Multi-volt
6436 _ _ / _ 3: 1-10V Multi-volt
6436 _ _ / _ 5: Push Multi-volt
Extra cable length.

LED IP20 Dimmer

6438



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4205 lm
E
/2 _ 3000 K - 4205 lm
F
/3 _ 3500 K - 4505 lm
E
/7 _ 2200 K - 3604 lm
F
CRI >90

Control
6438 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Concave shade: Aluminum.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 37,2 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,75 m
Vol 0,158 m³
Gross weight 6,5 Kg Net weight 4 Kg

Notes
6438 _ _ / _ 1: DALI-2 Multi-volt
6438 _ _ / _ 3: 1-10V Multi-volt
6438 _ _ / _ 5: Push Multi-volt
Extra cable length.

LED IP20 Dimmer

6474



Finishes
● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 2381 lm
E
/2 _ 3000 K - 2381 lm
/7 _ 2200 K - 2041 lm
F
CRI >90

Control
6474 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics
1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging
1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 6,2 Kg Net weight 3,7 Kg

Notes
6474 _ _ / _ 1: DALI-2 Multi-volt
6474 _ _ / _ 3: 1-10V Multi-volt
6474 _ _ / _ 5: Push Multi-volt
Extra cable length.

LED IP20 Dimmer

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

6476



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3154 lm
E

/2 _ 3000 K - 3154 lm

/7 _ 2200 K - 2703 lm
F

CRI >90

Control

6476 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

Materials

Glass shade: Opal triplex.
Diffuser: PC- Polycarbonate.
Structures: Steel.
Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90~305V 50/60Hz

Packaging

1 Box 0,75 x 0,45 x 1,35 m
Vol 0,122 m³
Gross weight 9 Kg Net weight 6 Kg

Notes

6476 _ _ / _ 1: DALI-2 Multi-volt
6476 _ _ / _ 3: 1-10V Multi-volt
6476 _ _ / _ 5: Push Multi-volt
Extra cable length.

LED IP20 Dimmer

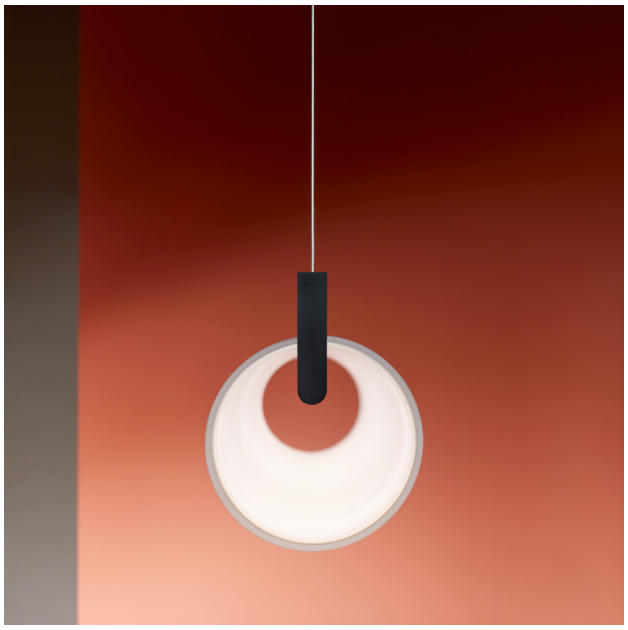

Product specifications subject to change without notice. Please check vibia.com for updated information.



Bind

Design by Martín Azúa

Bind is a hybrid lighting system designed to create multiple atmospheres to suit a range of spaces, uses and moods. The connective quality, ease of installation and versatility of this fully modular system guarantees a harmonious balance between technical and decorative lighting, promising new holistic lighting solutions.

Pendant Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

6500 Narrow
6504 Medium

Ø 3 x 15 cm



DOWNLIGHT Ø 4 cm

6520 Narrow
6524 Medium
6528 Wide

Ø 4 x 17,5 cm



6525 Medium
6529 Wide

Ø 4 x 20 cm



Pendant Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

6510 Narrow
6514 Medium

Ø 3 x 20 cm



SPOTLIGHT Ø 4 cm

6530 Narrow
6534 Medium
6538 Wide

Ø 4 x 22,5 cm



Pendant Ceiling - Wide Accent Downlight

DOMO Ø 18,5 cm

6540 Medium
6542 Wide



Product specifications subject to change without notice. Please check vibia.com for updated information.

6500
Narrow
6504
Medium



6500 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 451 lm
- **/2** _ 3000 K - 471 lm
- **/3** _ 3500 K - 489 lm

F

CRI >90

Control

6500 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line

_ _ / _ **Z** Casambi (P2P)

Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED 4,3 W 250 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

LED IP20

6504 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 451 lm
- **/2** _ 3000 K - 471 lm
- **/3** _ 3500 K - 489 lm

F

CRI >90

Control

6504 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line

_ _ / _ **Z** Casambi (P2P)

Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED 4,3 W 250 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,6 Kg Net weight 0,12 Kg

LED IP20

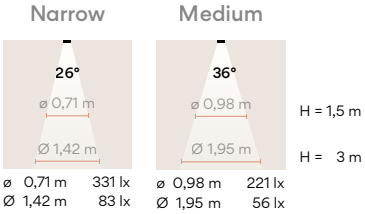

6520
Narrow
6524
Medium
6528
Wide



6520 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 530 lm
- **/2** _ 3000 K - 554 lm
- **/3** _ 3500 K - 574 lm

F

CRI >90

Control

6520 _ _ **/** _ _

- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Z** Casambi (P2P)

Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED LED 5,2 W 300 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

LED IP20

6524 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 530 lm
- **/2** _ 3000 K - 554 lm
- **/3** _ 3500 K - 574 lm

F

CRI >90

Control

6524 _ _ **/** _ _

- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Z** Casambi (P2P)

Material
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED LED 5,2 W 300 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

LED IP20

6528 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
- **/1** _ 2700 K - 530 lm
- **/2** _ 3000 K - 554 lm
- **/3** _ 3500 K - 574 lm

F

CRI >90

Control

6528 _ _ **/** _ _

- _ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
- _ _ **/** _ **Z** Casambi (P2P)

Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
1 x LED LED 5,2 W 300 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

LED IP20

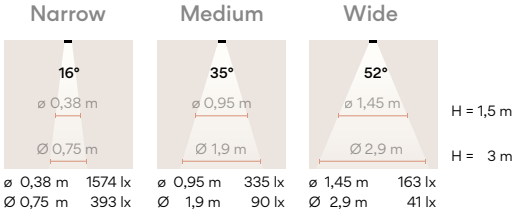

Narrow		Medium		Wide	
ø 0,38 m	1574 lx	ø 0,95 m	335 lx	ø 1,45 m	163 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx	Ø 2,9 m	41 lx

6525
Medium
6529
Wide



6525 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
E
CRI >90

Control
6525 _ _ **/** _ _
_ _ **/ 8Z** Casambi (P2P)

Materials
Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics
1 x LED 5,5 W 150 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg

LED IP20

6529 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
E
CRI >90

Control
6529 _ _ **/** _ _
_ _ **/ 8Z** Casambi (P2P)

Materials
Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics
1 x LED 5,5 W 150 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,8 Kg Net weight 0,2 Kg

LED IP20

6510
Narrow
6514
Medium



6510 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6510 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

LED IP20

6514 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6514 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

Materials

Lens: PMMA..
Body: Aluminum.

Light Source and electronics

1 x LED 4,3 W 250 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,18 Kg

LED IP20

Narrow



ø 0,71 m 331 lx
Ø 1,42 m 83 lx

Medium



ø 0,98 m 221 lx
Ø 1,95 m 56 lx

H = 1,5 m
H = 3 m

6530
Narrow
6534
Medium
6538
Wide



6530 Narrow

Finishes
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6530 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ **/** _ **Z** Casambi (P2P)

Materials
Lens: PMMA
Body: Aluminum.

Light Source and electronics
1 x LED 5,2 W 300 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

LED IP20

6534 Medium

Finishes
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6534 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ **/** _ **Z** Casambi (P2P)
_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials
Lens: PMMA.
Body: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Tunable White:
1 x LED 5,6 W 150 mA

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

LED IP20

6538 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White

/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White

/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6538 _ _ **/** _ _

_ _ **/** _ **F**	On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ **/** _ **Z**	Casambi (P2P)
_ _ **/ 8Z**	Tunable White + Casambi (P2P)

Materials

Lens: PMMA.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA

Tunable White:
1 x LED 5,6 W 150 mA

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,87 Kg Net weight 0,27 Kg

LED IP20

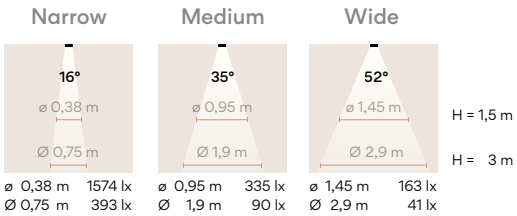

ø 0,38 m	1574 lx	ø 0,95 m	335 lx	ø 1,45 m	163 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx	Ø 2,9 m	41 lx





Product specifications subject to change without notice. Please check vibia.com for updated information.

6540
Medium
6542
Wide



6540 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control

6540 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line

_ _ **/** _ **Z** Casambi (P2P)

_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,5 Kg Net weight 1 Kg

LED IP20

6542 Wide

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm

F

CRI >90

Control

6542 _ _ **/** _ _

_ _ **/** _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line

_ _ **/** _ **Z** Casambi (P2P)

_ _ **/ 8Z** Tunable White + Casambi (P2P)

Materials

Diffuser: PC- Polycarbonate.
Lens: Polycarbonate.
Body: Aluminum.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Tunable White:
1 x LED 8,9 W 500 mA
(max. combined)

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,5 Kg Net weight 1 Kg

LED IP20

Medium



ø 0,62 m 1485 lx
Ø 1,24 m 371 lx

Wide



ø 1,55 m 360 lx
Ø 3,1 m 90 lx

H = 1,5 m

H = 3 m

Luminaire types

Bind track is compatible with the Skan, Slim, North, Tempo and Tube pendant collections, presenting a range of decorative silhouettes with multiple lighting effects. Single or multiple pendant can be suspended as desired, allowing for the formation of intricate chandeliers created from a compilation of tracks with multiple pendant.

Pendant

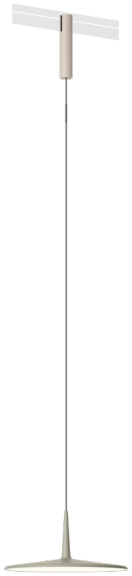

6560 (11 Black)
6561 (24 Beige)



6570 (11 Black)
6571 (24 Beige)



6575 (11 Black)
6576 (24 Beige)



6590 (11 Black)
6591 (24 Beige)



6580 (11 Black))
6581 (24 Beige)



6583 (11 Black)
6584 (24 Beige)



6586 (11 Black)
6587 (24 Beige)



Multiple fixtures can be connected at any point using a pincer.

Black (NCS S 8500-N)

Beige M1 (NCS S 2005-Y50R)

Product specifications subject to change without notice. Please check vibia.com for updated information.

6560
Black pincer
6561
Beige pincer



Finishes (shade)

- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 1000-N)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 1269 lm
D
CRI >90

/2 _ 3000 K - 1123 lm
D
CRI >80

/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control

6560 _ _ / _ _
6561 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

6560

Finishes (pincer)
Black (NCS S 8500-N)

6561

Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials

Body: Aluminum.
Diffuser: PMMA .

Light Source and electronics

1 x LED 9,3 W 350 mA
Constant Current 350 mA
110~277V 50/60Hz

Packaging

1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m^3
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes

Extra cable length.

LED IP20

6570
Black pincer
6571
Beige pincer



Finishes (shade)
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **47/** _ _ Green L1 (NCS S 4005-G80Y)
- **68/** _ _ Ocre (NCS S 3050-Y30R)

Finish customization (Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
- **/1** _ 2700 K - 181,22 lm
  F
  CRI >90
- **/2** _ 3000 K - 163,2 lm
  G
  CRI >80
- **/3** _ 3500 K - 207,6 lm
  F
  CRI >90

Control
6570 _ _ / _ _
6571 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

6570
Finishes (pincer)
Black (NCS S 8500-N)

6571
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Glass.
Body: FG- Fiberglass.

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
1 Box 0,17 x 0,19 x 1,21 m
Vol 0,0370 m³
Gross weight 2,48 Kg Net weight 1,35 Kg

Notes
Extra cable length.

LED IP20

6575
Black pincer
6576
Beige pincer



Finishes (shade)
- **10/** _ _ White (NCS S 0300-N)
- **11/** _ _ Black (NCS S 8500 N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **42 /** _ _ Blue M1 (NCS S 5010-B10G)

Finish customization (Available options: Vibia colour palette
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm
  D
  CRI >90
- **/2** _ 3000 K - 1123 lm
  D
  CRI >80
- **/3** _ 3500 K - 1374,9 lm
  G
  CRI >90

Control
6575 _ _ / _ _
6576 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

6575
Finishes (pincer)
Black (NCS S 8500-N)

6576
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Shade: Aluminum.
Diffuser: PMMA.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes
Extra cable length.

LED IP20

6590
Black pincer
6591
Beige pincer



Finishes (shade)
- **10/** _ _ White (NCS S 0300-N)
- **15/** _ _ Grey L2 (NCS S 2500-N
- **16/** _ _ Grey M1 (NCS S 4500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)

Finish customization
(Available options:
Vibia colour palette
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature
/1 _ 2700 K - 1170 lm
/2 _ 3000 K - 1251 lm
/3 _ 3500 K - 1251 lm
E
CRI >90

Control
6590 _ _ / _ _
6591 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

6590
Finishes (pincer)
Black (NCS S 8500-N)

6591
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: PC- Polycarbonate.
Shade: Aluminum.
Led support: Aluminum.
Tube: Steel.

Light Source and electronics
1 x LED PLATE 10,5 W 15 V
Constant Current 700 mA
110~240V 50/60Hz

Packaging
1 Box 0,29 x 0,38 x 0,38 m
Vol 0,0418 m³
Gross weight 2,6 Kg Net weight 1,4 Kg

Notes
Extra cable length.

LED IP20 CE UKCA EAC

6580
Black pincer
6581
Beige pincer



Finishes (shade)
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
6580 _ _ / _ _
6581 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

6580
Finishes (pincer)
Black (NCS S 8500-N)

6581
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Blown-glass.
Body: Aluminum

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
Extra cable length.

LED IP20 CE UKCA EAC

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

6583
Black pincer
6584
Beige pincer



Finishes (shade)
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
6583 _ _ / _ _
6584 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

6583
Finishes (pincer)
Black (NCS S 8500-N)

6584
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Blown-glass.
Body: Aluminum

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
Extra cable length.

LED IP20

6586
Black pincer
6587
Beige pincer



Finishes (shade)
- **18/** _ _ Graphite (ADAPTA RF9913WX)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **58/** _ _ Cream (RAL 7044)
- **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1 _ 2700 K - 415 lm
E
CRI >90

Control
6586 _ _ / _ _
6587 _ _ / _ _

_ _ / _ **F** On/Off; Push; 1-10V; DALI-2; Casambi Simultaneous Line
_ _ / _ **Z** Casambi (P2P)

6586
Finishes (pincer)
Black (NCS S 8500-N)

6587
Finishes (pincer)
Beige M1 (NCS S 2005-Y50R)

Materials
Diffuser: Blown-glass.
Body: Aluminum

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110~240V 50/60Hz

Packaging
1 Box 0,28 x 0,26 x 0,13 m
Vol 0,01 m³
Gross weight 2,5 Kg Net weight 2 Kg

Notes
Extra cable length.

LED IP20

Select your model at **vibia.com** and adjust





















See more
multiple models
at **vibia.com**

Tracks

Ceiling Tracks

A491 120 cm
A492 210 cm
A493 300 cm



Ceiling Tracks 120 cm **A491 _ _ / 0M**
Ceiling Tracks 210 cm **A492 _ _ / 0M**
Ceiling Tracks 300 cm **A493 _ _ / 0M**

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Canopy: ABS + Polycarbonate.

IP20

Packaging A491

1 Box
0,068 x 0,068 x 1,25 m
Vol 0,0058 m^3
Gross weight 1,75 Kg
Net weight 0,90 Kg

Packaging A492

1 Box
0,068 x 0,068 x 2,4 m
Vol 0,0111 m^3
Gross weight 3,24 Kg
Net weight 1,62 Kg

Packaging A493

1 Box
0,068 x 0,068 x 3,15 m
Vol 0,0146 m^3
Gross weight 4,36 Kg
Net weight 2,17 Kg



Product specifications subject to change without notice. Please check vibia.com for updated information.

Pendant Tracks

A419 120 cm (H 9m)
A422 210 cm (H 9m)
A425 300 cm (H 9m)

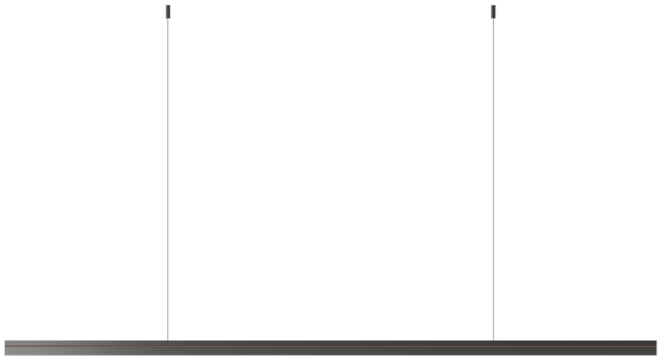

Height 9 m 120 cm **A419 _ _ / 0M**
Height 9 m 210 cm **A422 _ _ / 0M**
Height 9 m 300 cm **A425 _ _ / 0M**

Finishes

11/ 0M Black (NCS S 8500-N)
24/ 0M Beige M1 (NCS S 2005-Y50R)

Materials

Track: Aluminum.
Canopy: Aluminum.
Ceiling supports: Aluminum.

IP20

Packaging A419
1 Box
0,068 x 0,068 x 1,25 m
Vol 0,0058 m^3
Gross weight 1,87 Kg
Net weight 1,02 Kg

Packaging A422
1 Box
0,068 x 0,068 x 2,4 m
Vol 0,0111 m^3
Gross weight 3,24 Kg
Net weight 1,62 Kg

Packaging A425
1 Box
0,068 x 0,068 x 3,15 m
Vol 0,0146 m^3
Gross weight 4,36 Kg
Net weight 2,17 Kg



Electrical connection options

Driver for ceiling

A494 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 48W + On/ Off + Surface
- _ _ **/ 00_31** 48W + On/ Off + Remote Micro
- _ _ **/ 01_10** 48W + DALI-2 + Surface
- _ _ **/ 01_31** 48W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 48W + 1-10V + Surface
- _ _ **/ 03_31** 48W + 1-10V + Remote Micro
- _ _ **/ 05_10** 48W + Push + Surface
- _ _ **/ 05_31** 48W + Push + Remote Micro
- _ _ **/ 0Z_10** 48W + Casambi + Surface
- _ _ **/ 0Z_31** 48W + Casambi + Remote Micro

A495 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 84W + On/ Off + Surface
- _ _ **/ 00_31** 84W + On/ Off + Remote Micro
- _ _ **/ 01_10** 84W + DALI-2 + Surface
- _ _ **/ 01_31** 84W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 84W + 1-10V + Surface
- _ _ **/ 03_31** 84W + 1-10V + Remote Micro
- _ _ **/ 05_10** 84W + Push + Surface
- _ _ **/ 05_31** 84W + Push + Remote Micro
- _ _ **/ 0Z_10** 84W + Casambi + Surface
- _ _ **/ 0Z_31** 84W + Casambi + Remote Micro

Finishes

11/ 0 _ Black (NCS S 8500-N)

24/ 0 _ Beige M1 (NCS S 2005-Y50R)

Materials

Aluminum.

IP20

Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz

Notes

Max. 5 luminaires with Simultaneous line 48 W.
Max.10 luminaires with Simultaneous line 84 W.
Select On/ Off if your luminaires are P2P.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0273 m³
Gross weight 0,95 Kg
Net weight 0,53 Kg

Select Eletrical connection



L 30 cm.
A494 _ _ / 00 A495 _ _ / 00

Surface



L 40 cm.
A494 _ _ / 01 A495 _ _ / 01
A494 _ _ / 03 A495 _ _ / 03
A494 _ _ / 05 A495 _ _ / 05
A494 _ _ / 0Z A495 _ _ / 0Z

Surface



Remote

_10 Surface
_31 Remote Micro

Included in tracks electrical connections



Remote
1 x 9 m
electrical cable included

Driver for pendant

A426 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 48W + On/ Off + Surface
- _ _ **/ 00_23** 48W + On/ Off + Built-in XS
- _ _ **/ 00_31** 48W + On/ Off + Remote Micro
- _ _ **/ 01_10** 48W + DALI-2 + Surface
- _ _ **/ 01_23** 48W + DALI-2 + Built-in XS
- _ _ **/ 01_31** 48W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 48W + 1-10V + Surface
- _ _ **/ 03_23** 48W + 1-10V + Built-in XS
- _ _ **/ 03_31** 48W + 1-10V + Remote Micro
- _ _ **/ 05_10** 48W + Push + Surface
- _ _ **/ 05_23** 48W + Push + Built-in XS
- _ _ **/ 05_31** 48W + Push + Remote Micro
- _ _ **/ 0Z_10** 48W + Casambi + Surface
- _ _ **/ 0Z_23** 48W + Casambi + Built-in XS
- _ _ **/ 0Z_31** 48W + Casambi + Remote Micro

A427 _ _ / _ _ _ _ _

- _ _ **/ 00_10** 84W + On/ Off + Surface
- _ _ **/ 00_23** 84W + On/ Off + Built-in XS
- _ _ **/ 00_31** 84W + On/ Off + Remote Micro
- _ _ **/ 01_10** 84W + DALI-2 + Surface
- _ _ **/ 01_23** 84W + DALI-2 + Built-in XS
- _ _ **/ 01_31** 84W + DALI-2 + Remote Micro
- _ _ **/ 03_10** 84W + 1-10V + Surface
- _ _ **/ 03_23** 84W + 1-10V + Built-in XS
- _ _ **/ 03_31** 84W + 1-10V + Remote Micro
- _ _ **/ 05_10** 84W + Push + Surface
- _ _ **/ 05_23** 84W + Push + Built-in XS
- _ _ **/ 05_31** 84W + Push + Remote Micro
- _ _ **/ 0Z_10** 84W + Casambi + Surface
- _ _ **/ 0Z_23** 84W + Casambi + Built-in XS
- _ _ **/ 0Z_31** 84W + Casambi + Remote Micro

Finishes

11/ 0 _ Black (NCS S 8500-N)

24/ 0 _ Beige M1 (NCS S 2005-Y50R)

Materials

Surface: Aluminum.
Built-in and Remote Driver box: Steel.

IP20

Electrical connection

Driver Constant Voltage 48V
220~240V 50/60Hz

Notes

Max. 5 luminaires with Simultaneous line 48 W.
Max.10 luminaires with Simultaneous line 84 W.
Select On/ Off if your luminaires are P2P.

Packaging

1 Box 0,12 x 0,10 x 0,37 m
Vol 0,0273 m^3
Gross weight 0,95 Kg
Net weight 0,53 Kg

Select Eletrical connection



Surface

L 25 cm.

	A427 _ _ / 00
A426 _ _ / 01	A427 _ _ / 01
A426 _ _ / 03	A427 _ _ / 03
A426 _ _ / 05	A427 _ _ / 05
A426 _ _ / 0Z	A427 _ _ / 0Z



Surface

L 21 cm.
A426 _ _ / 00



Built-in XS



Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Included in tracks electrical connections



Surface
Feeder + 9 m electrical cable included



Built-in
Canopy + 9 m electrical cable included



Remote
Micro canopy + 9 m electrical cable included

Bind Solo

Bind Solo provides a set of tools to play with contrasts, defining functional and transitional areas, as well as hybrid activity zones. The range can be mounted to the ceiling as desired, creating visual hierarchy by directing the gaze towards specific features and combining to form unique compositions overhead.

Ceiling - Accent Downlight - Micro

6600 Narrow
6604 Medium

Ø 3 cm



6650 Narrow
6654 Medium
6658 Wide

Ø 4cm







Product specifications subject to change without notice. Please check vibia.com for updated information.

6600
Narrow
6604
Medium



6600 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6600 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 63 Kg Net weight 0,15 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

6604 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6604 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 63 Kg Net weight 0,15 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

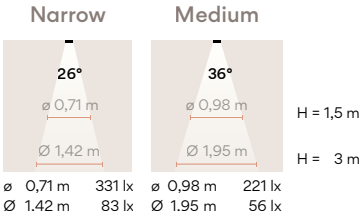

ø 0,71 m 331 lx
Ø 1.42 m 83 lx
ø 0,98 m 221 lx
Ø 1.95 m 56 lx

6650
Narrow
6654
Medium
6658
Wide



6650 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6650 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **D** Push; DALI-2 (Remote)
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

6654 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6654 _ _ **/** _ _
- _ _ **/** _ **0** Static White + On/ Off (Remote)
- _ _ **/** _ **D** Static White + Push; DALI-2 (Remote)
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi (Remote)
- _ _ **/ 81** Tunable White + DALI-2 DT8 (Remote)
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED ☐ IP20

6658 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6658 _ _ **/** _ _

_ _ **/** _ **0** Static White + On/ Off (Remote)
_ _ **/** _ **D** Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M** Static White + Without driver
_ _ **/** _ **Z** Static White + Casambi (Remote)

_ _ **/ 81** Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M** Tunable White + Without driver
_ _ **/ 8Z** Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0,68 Kg Net weight 0,2 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

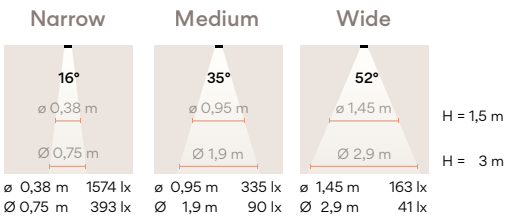

ø 0,38 m	1574 lx	ø 0,95 m	335 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx
ø 1,45 m	163 lx		
Ø 2,9 m	41 lx		



Ceiling - Accent Downlight

DOWNLIGHT Ø 3 cm

6610 Narrow
6614 Medium

Ø 3 x 4 cm



6630 Narrow
6634 Medium

Ø 3 x 10 cm



DOWNLIGHT Ø 4 cm

6660 Narrow
6664 Medium
6668 Wide

Ø 4 x 7 cm



6680 Narrow
6684 Medium
6688 Wide

Ø 4 x 10 cm



Ceiling - Accent Spotlight

SPOTLIGHT Ø 3 cm

6620 Narrow
6624 Medium

Ø 3 x 7 cm



6640 Narrow
6644 Medium

Ø 3 x 11,5 cm



SPOTLIGHT Ø 4 cm

6670 Narrow
6674 Medium
6678 Wide

Ø 4 x 10 cm



6690 Narrow
6694 Medium
6698 Wide

Ø 4 x 14 cm



Ceiling - Wide Accent Downlight

Ø 18,5 cm

6700 Medium
6702 Wide

Ø 18,5 cm



6610
Narrow
6614
Medium



6610 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6610 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6614 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6614 _ _ / _ _

- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,66 Kg Net weight 0,18 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

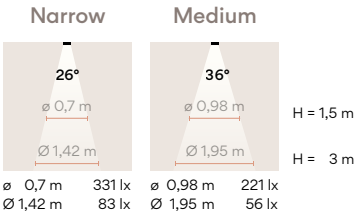

6630
Narrow
6634
Medium



6630 Narrow

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6630 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

6634 Medium

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6634 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,19 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20

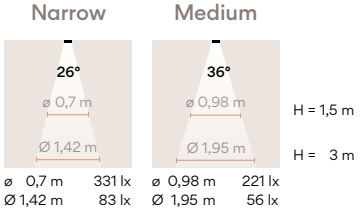

ø 0,7 m 331 lx
Ø 1,42 m 83 lx
ø 0,98 m 221 lx
Ø 1,95 m 56 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

6660
Narrow
6664
Medium
6668
Wide



6660 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6660 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum
Lens: PMMA.

Light Source and electronics
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6664 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6664 _ _ / _ _
- _ _ / _ **0** Static White + On/ Off (Remote)
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,72 Kg Net weight 0,24 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

6668 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6668 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0, 72 Kg Net weight 0,24 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED ☐ IP20

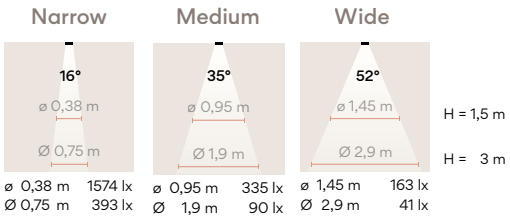

ø 0,38 m	1574 lx	ø 0,95 m	335 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx

ø 1,45 m	163 lx
Ø 2,9 m	41 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.

6680
Narrow
6684
Medium
6688
Wide



6680 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6680 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,73 Kg Net weight 0,25 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6684 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6684 _ _ / _ _
- _ _ / _ **0** Static White + On/ Off (Remote)
- _ _ / _ **D** Static White + Push; DALI-2 (Remote)
- _ _ / _ **M** Static White + Without driver
- _ _ / _ **Z** Static White + Casambi (Remote)
- _ _ / **81** Tunable White + DALI-2 DT8 (Remote)
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

6688 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6688 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0072 m^3
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED ☐ IP20

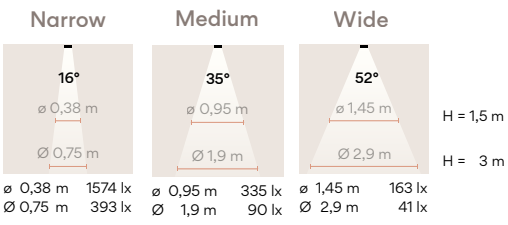

ø 0,38 m	1574 lx	ø 0,95 m	335 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx
ø 1,45 m	163 lx		
Ø 2,9 m	41 lx		

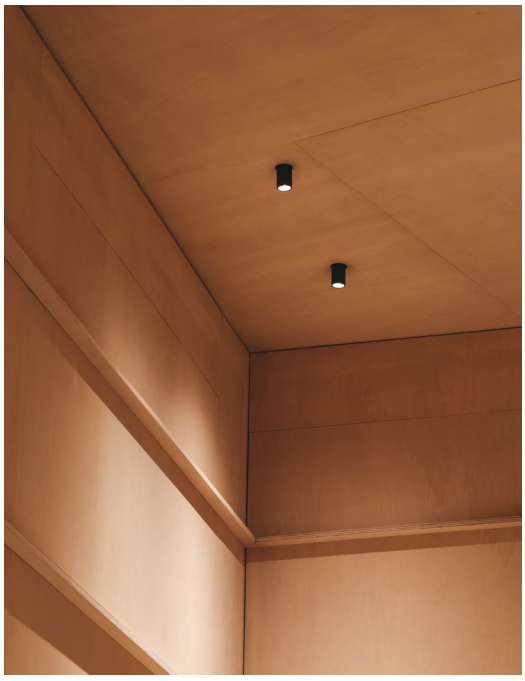

Product specifications subject to change without notice. Please check vibia.com for updated information.

6620
Narrow
6624
Medium



6620 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6620 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 68 Kg Net weight 0,2 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

6624 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control
6624 _ _ / _ _
- _ _ / _ **0** On/ Off (Remote)
- _ _ / _ **D** Push; DALI-2 (Remote)
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0, 68 Kg Net weight 0,2 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED ☐ IP20 CE UK CA EAC

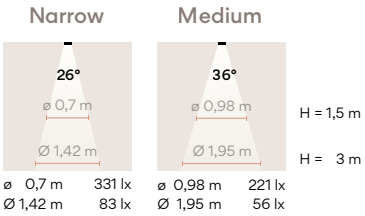

6640
Narrow
6644
Medium



6640 Narrow

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6640 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,69 Kg Net weight 0,21 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

6644 Medium

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 451 lm
/2 _ 3000 K - 471 lm
/3 _ 3500 K - 489 lm
F
CRI >90

Control

6644 _ _ / _ _

_ _ / _ **0** On/ Off (Remote)
_ _ / _ **D** Push; DALI-2 (Remote)
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

1 x LED 4,3 W 250 mA
Constant Current 250 mA
220~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,69 Kg Net weight 0,21 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point.

LED IP20

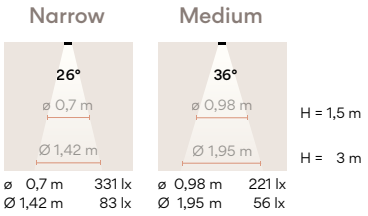

6670
Narrow
6674
Medium
6678
Wide



6670 Narrow

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6670 _ _ **/** _ _
- _ _ **/** _ **0** On/ Off (Remote)
- _ _ **/** _ **D** Push; DALI-2 (Remote)
- _ _ **/** _ **M** Without driver
- _ _ **/** _ **Z** Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED 4,1 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20

6674 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6674 _ _ **/** _ _
- _ _ **/** _ **0** Static White + On/ Off (Remote)
- _ _ **/** _ **D** Static White + Push; DALI-2 (Remote)
- _ _ **/** _ **M** Static White + Without driver
- _ _ **/** _ **Z** Static White + Casambi (Remote)
- _ _ **/ 81** Tunable White + DALI-2 DT8 (Remote)
- _ _ **/ 8M** Tunable White + Without driver
- _ _ **/ 8Z** Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20

6678 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6678 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,75 Kg Net weight 0,27 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20

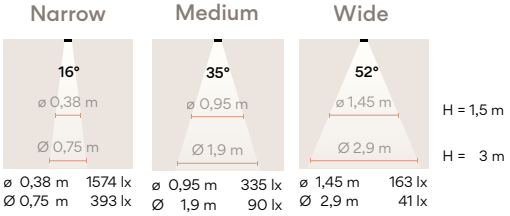

ø 0,38 m	1574 lx	ø 0,95 m	335 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx
ø 1,45 m	163 lx		
Ø 2,9 m	41 lx		



Product specifications subject to change without notice. Please check vibia.com for updated information.

6690
Narrow
6694
Medium
6698
Wide



6690 Narrow

Finishes
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
F
CRI >90

Control
6690 _ _ / _ _

_ _ / _ **0**	On/ Off (Remote)
_ _ / _ **D**	Push; DALI-2 (Remote)
_ _ / _ **M**	Without driver
_ _ / _ **Z**	Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
1 x LED PLATE 5,2 W 300 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point.

LED □ IP20 CE UK CA EAC Dimmer

6694 Medium

Finishes
11/ _ _ Black
(NCS S 8500-N)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm
Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm
F
CRI >90

Control
6694 _ _ / _ _

_ _ / _ **0**	Static White + On/ Off (Remote)
_ _ / _ **D**	Static White + Push; DALI-2 (Remote)
_ _ / _ **M**	Static White + Without driver
_ _ / _ **Z**	Static White + Casambi (Remote)
_ _ / **81**	Tunable White + DALI-2 DT8 (Remote)
_ _ / **8M**	Tunable White + Without driver
_ _ / **8Z**	Tunable White + Casambi (Remote)

Materials
Body: Aluminum.
Lens: PMMA.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz
Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes
Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED □ IP20 CE UK CA EAC

6698 Wide

Finishes

11/ _ _ Black
(NCS S 8500-N)

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 530 lm
/2 _ 3000 K - 554 lm
/3 _ 3500 K - 574 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

6698 _ _ **/** _ _

_ _ **/** _ **0**	Static White + On/ Off (Remote)
_ _ **/** _ **D**	Static White + Push; DALI-2 (Remote)
_ _ **/** _ **M**	Static White + Without driver
_ _ **/** _ **Z**	Static White + Casambi (Remote)
_ _ **/ 81**	Tunable White + DALI-2 DT8 (Remote)
_ _ **/ 8M**	Tunable White + Without driver
_ _ **/ 8Z**	Tunable White + Casambi (Remote)

Materials

Body: Aluminum.
Lens: PMMA.

Light Source and electronics

2700 K - 3000 K - 3500K:
1 x LED 5,2 W 300 mA
Constant Current 300 mA
220~240V 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V 50/60Hz

Packaging

1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m^3
Gross weight 0,78 Kg Net weight 0,3 Kg

Notes

Visit **vibia.com** to group several pieces with just one electrical point, only for Static White.

LED IP20

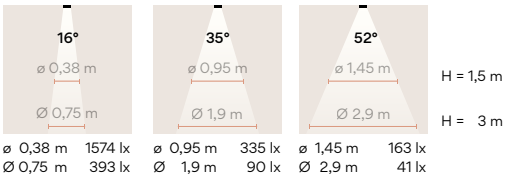

Narrow		Medium		Wide	
ø 0,38 m	1574 lx	ø 0,95 m	335 lx	ø 1,45 m	163 lx
Ø 0,75 m	393 lx	Ø 1,9 m	90 lx	Ø 2,9 m	41 lx

6700
Medium
6702
Wide



6700 Medium

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm
Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm
F
CRI >90

Control
6700 _ _ / _ _

_ _ / _ **D**	Static White + Push; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials
Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz
Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,7 Kg Net weight 1,2 Kg

LED IP20 CE UK CA EAC

6702 Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1256 lm
/2 _ 3000 K - 1313 lm
/3 _ 3500 K - 1360 lm
Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm
F
CRI >90

Control
6702 _ _ / _ _

_ _ / _ **D**	Static White + Push; DALI-2
_ _ / _ **Z**	Static White + Casambi
_ _ / **81**	Tunable White + DALI-2 DT8
_ _ / **8Z**	Tunable White + Casambi

Materials
Diffuser: PC- Polycarbonate.
Body: Aluminum.

Light Source and electronics
2700 K - 3000 K - 3500K:
1 x LED 12,4 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz
Tunable White:
1 x LED 8,9 W 500 mA
Constant Current 500 mA
110~240V 50/60Hz

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0176 m³
Gross weight 1,7 Kg Net weight 1,2 Kg

LED IP20 CE UK CA EAC

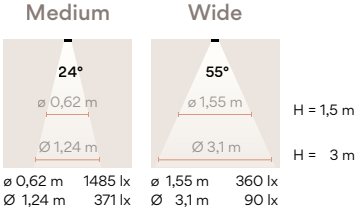

Sticks

Design by Arik Levy

Fusing technology, space, and architecture, Sticks offers a creative toolkit for integrating light elements in an interior. Pure and graphic, the minimalist aluminum rods transform linear light into floating sculpture.

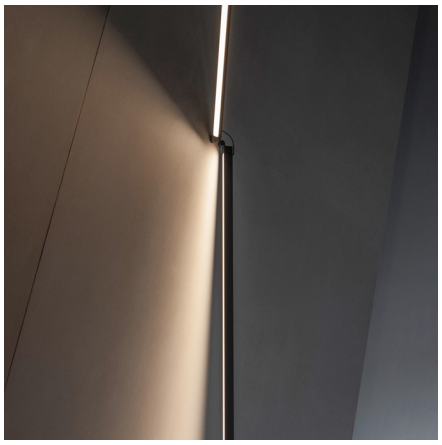





You can chose the desired composition through one of the following three options:

A - Choose among pre-designed layouts the one that fits with your project and order it directly (see page 466).

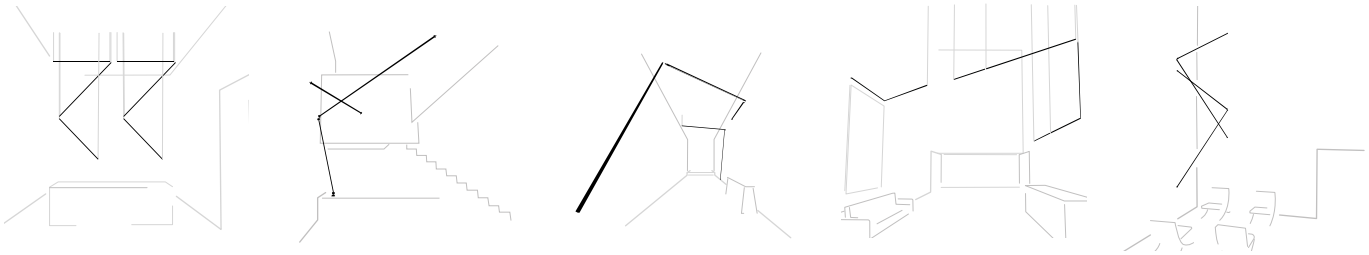

B - Select one composition on vibia.com among multiple applications in spaces, and adjust it to your project by modifying:

+ Length of the sticks.
+ Position of each stick in the space.
+ Colour temperature and dimming.
+ Installation type.



C - Create your configuration on vibia.com from scratch in three easy steps, without sketches.

1

Choose the location for your electrical connection point

2

Add connectable Sticks up to 6.5 meters

3

Configure

+ Colour temperature
+ Dimming control
+ Installation type
+ Pendant height

Technical Specifications
(see page 476)

The Sticks collection has three sizes: 1.5 m, 2 m, or 3 m,
and they can be connected one to each other
to a total maximum lenght of 6.5 meters per electrical connection.

Wall-Wall / Ceiling-Ceiling



7300
Stick 152 x 3 x 2 cm

7303
Stick 201 x 3 x 2 cm

7306
Stick 300 x 3 x 2 cm

Wall-Wall (corner) / Wall-Ceiling



7330
Stick 158 x 3 x 2 cm

7333
Stick 207 x 3 x 2 cm

7336
Stick 306 x 3 x 2 cm

Wall-Pendant



7310
7311 UGR<19
Stick 153 x 3 x 2 cm

7313
7314 UGR<19
Stick 204 x 3 x 2 cm

7316
7317 UGR<19
Stick 303 x 3 x 2 cm

Pendant-Pendant

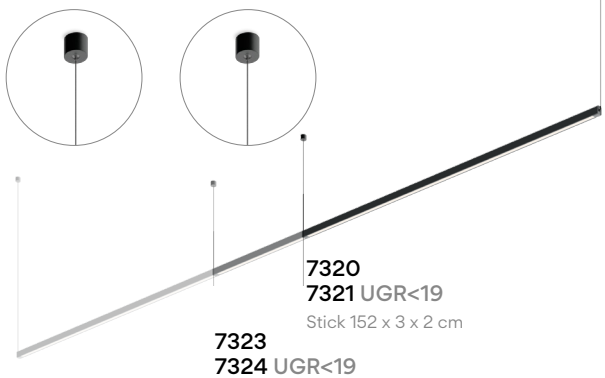

7320
7321 UGR<19
Stick 152 x 3 x 2 cm

7323
7324 UGR<19
Stick 201 x 3 x 2 cm

7326
7327 UGR<19
Stick 300 x 3 x 2 cm

Pendant



7350
Stick 152 x 3 x 2 cm

7353
Stick 201 x 3 x 2 cm

7356
Stick 300 x 3 x 2 cm

Floor-Wall



7346
Stick 310 cm

7343
Stick 211 cm

7340
Stick 163 cm

ø 10 cm

Sticks Connectable

Next sketches are composed by one or more compositions

Pendant / Ceiling

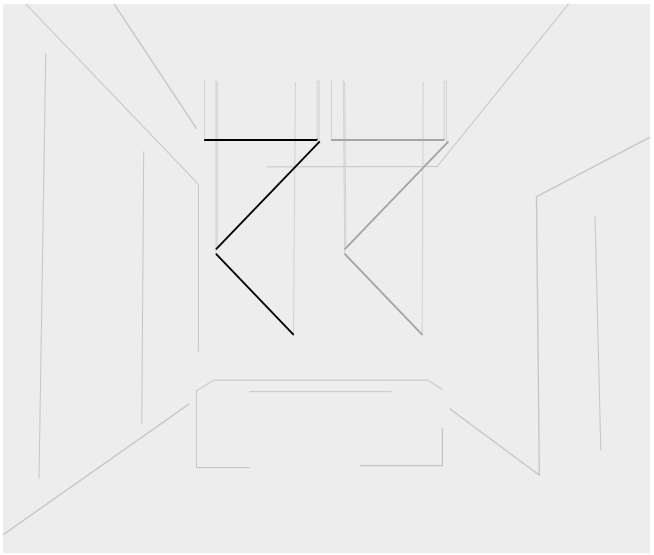

STI001
Sketch composed by two identical compositions.

Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

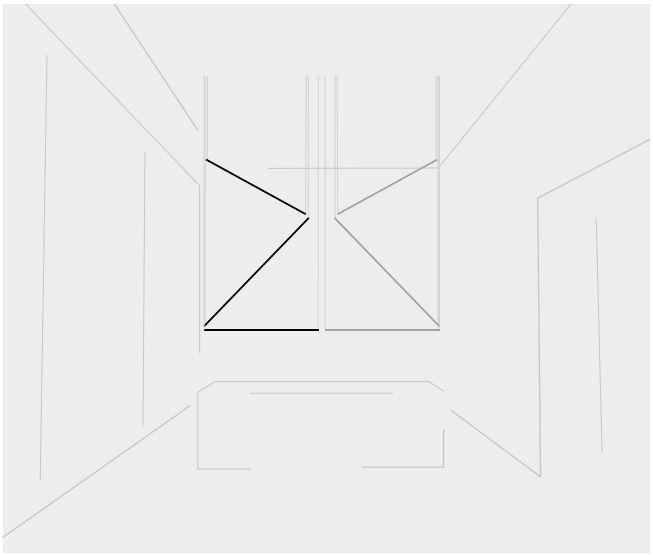

STI005
Sketch composed by two identical compositions.

Each composition:
3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

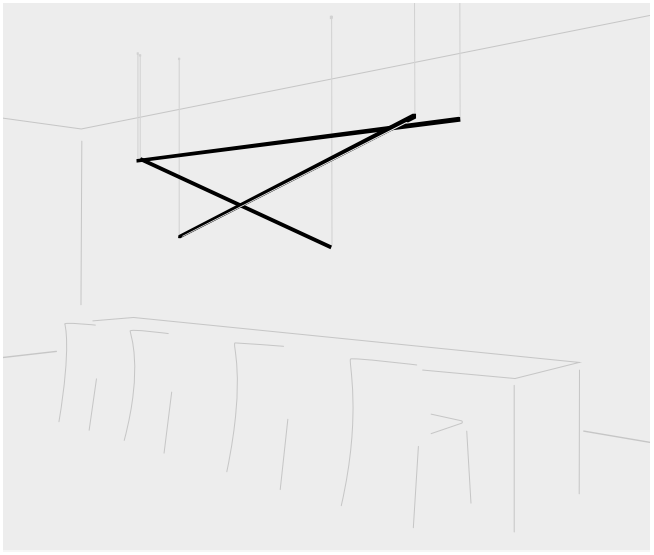

STI015
Sketch composed by two compositions.

Composition 1:
2 Sticks: 1 x 150 cm, 1 x 300 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Built-in disc S canopy. 1-10V.

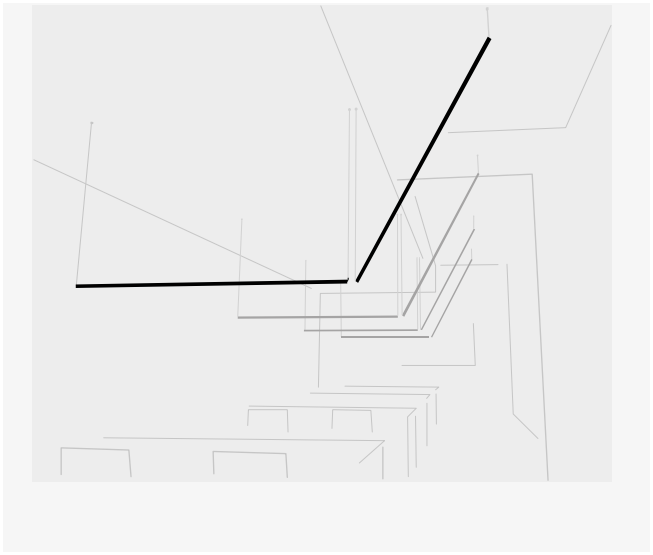

STI021
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 3500 K. 9496 lm. 140,8 W.
Built-in disc S canopy. 1-10V.

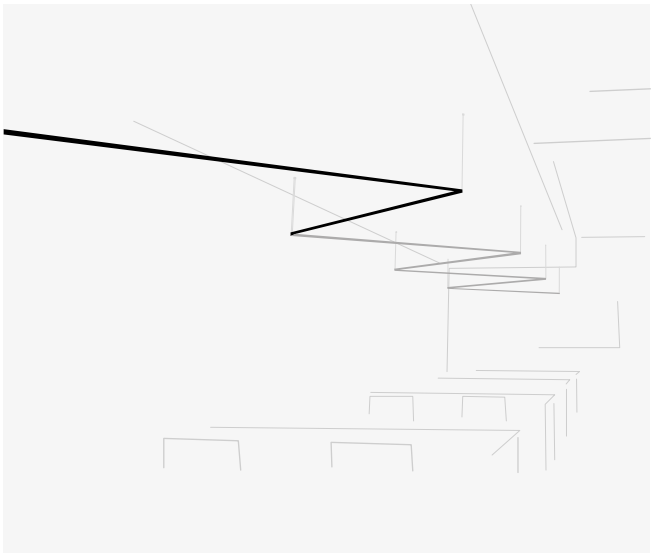

STI025
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

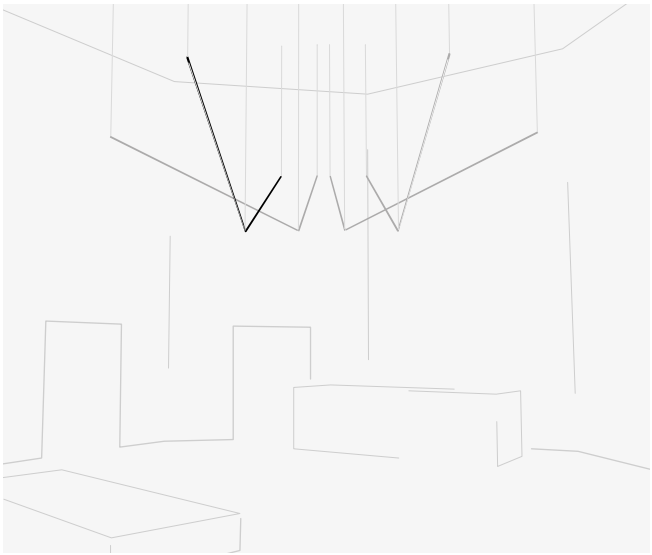

STI035
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 3500 K. 10683 lm. 79,2 W.
Built-in disc S canopy. 1-10V.

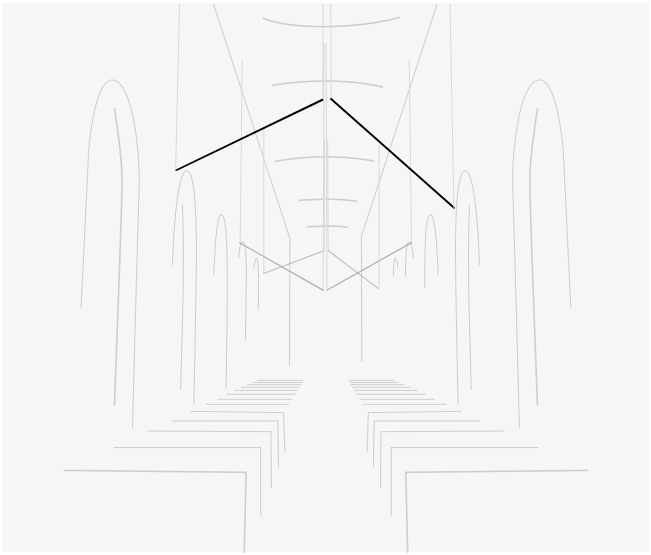

STI041
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

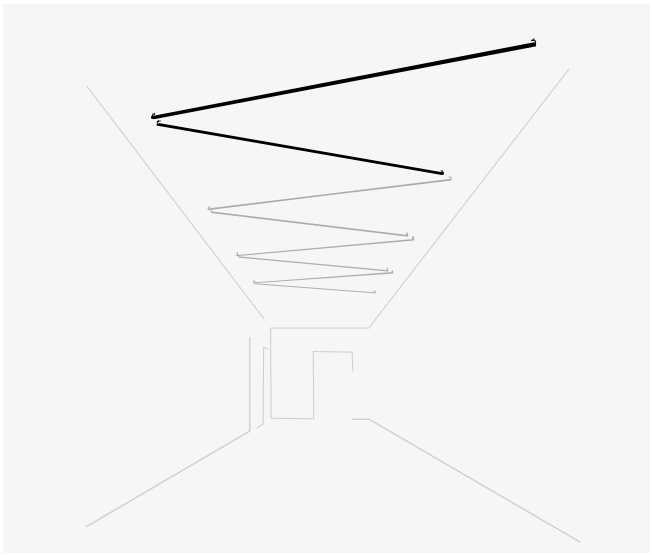

STI085
Sketch composed by four identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions

Some sticks are attached to the Wall

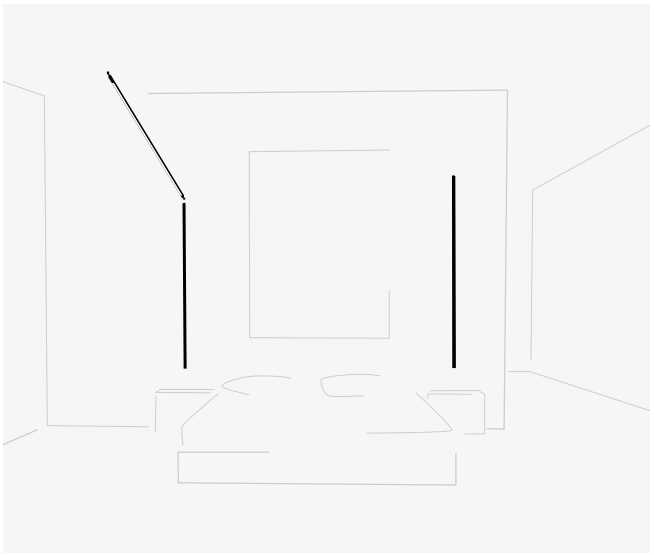

STI051
Sketch composed by two compositions.

Composition 1:
2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

Composition 2:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4346 lm. 35,2 W.
Floor base & plug. Push.

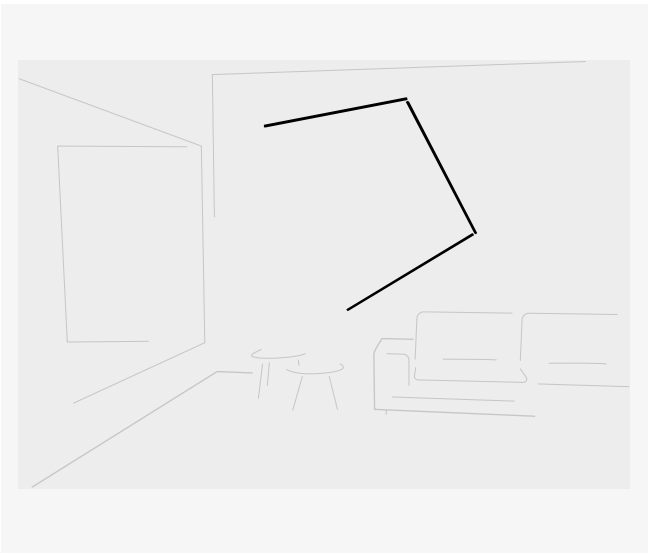

STI055
Sketch composed by only one composition.

3 Sticks: 3 x 150 cm. Total 4,5 m.
LED 2700 K. 9780 lm. 79,2 W.
Floor base & plug. Push.

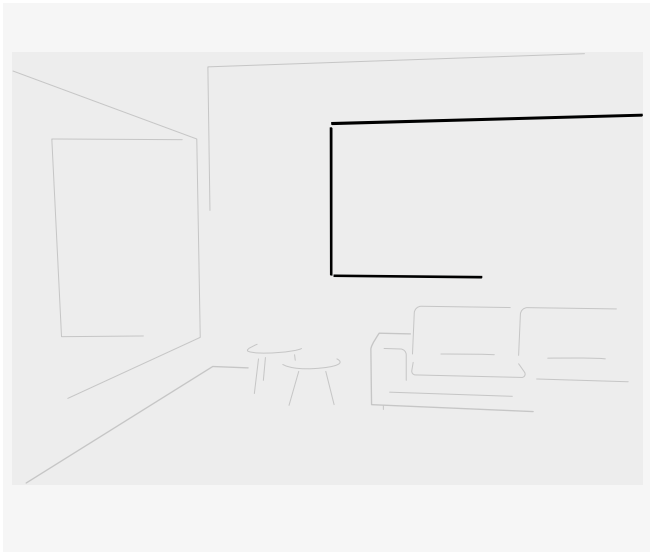

STI061
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 2700 K. 13039 lm. 105,6 W.
Floor base & plug. Push.

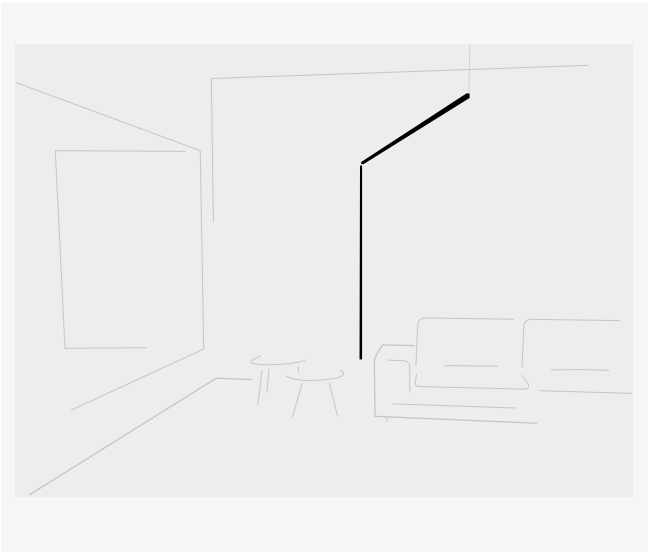

STI065
Sketch composed by only one composition.

2 Sticks: 2 x 150 cm. Total 3 m.
LED 2700 K. 6520 lm. 52,8 W.
Floor base & plug. Push.

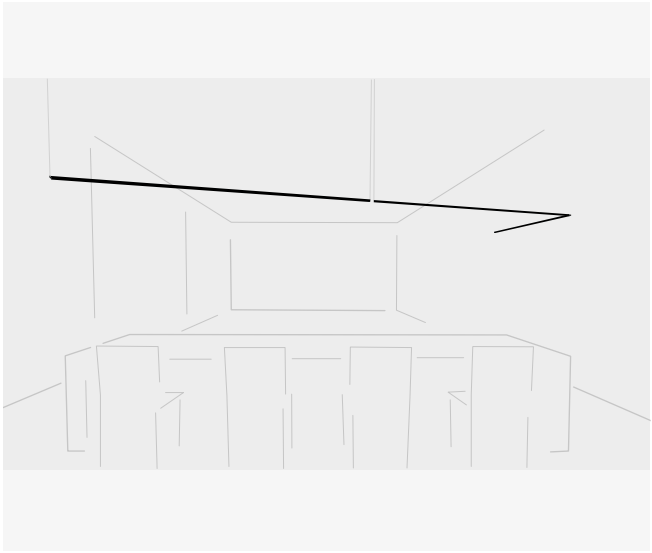

STI071
Sketch composed by only one composition.

3 Sticks: 1 x 150 cm, 2 x 200 cm. Total 5,5 m.
LED 2700 K. 11952 lm. 96,8 W.
Floor base & plug. Push.

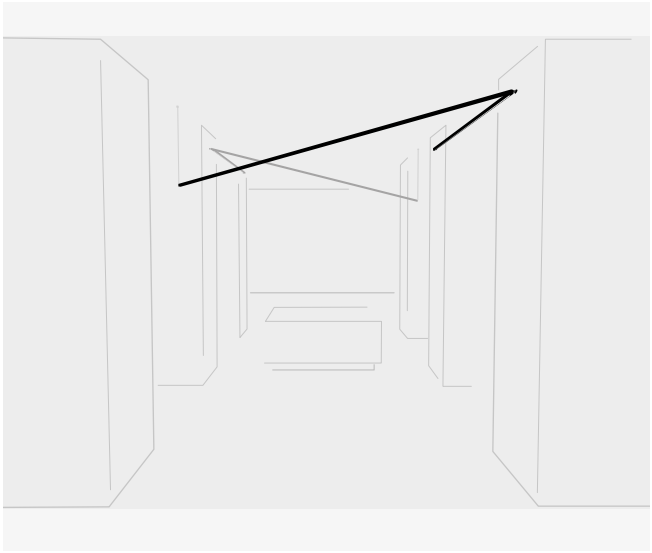

STI075
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

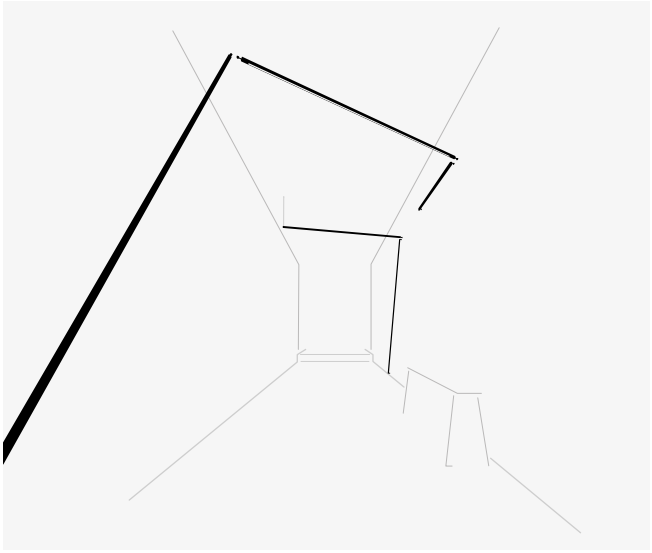

STI081
Sketch composed by two compositions.

Composition 1:
3 Sticks: 1 x 150 cm, 1 x 200 cm, 1 x 300 cm. Total 6,5 m.
LED 3500 K. 15431 lm. 114,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

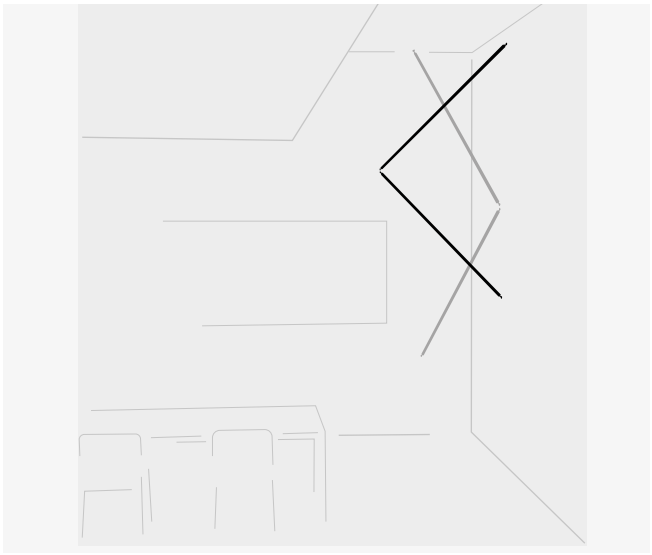

STI091
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 2700 K. 8692 lm. 70,4 W.
Remote driver Built-in Micro. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions

Some sticks are attached to the Wall

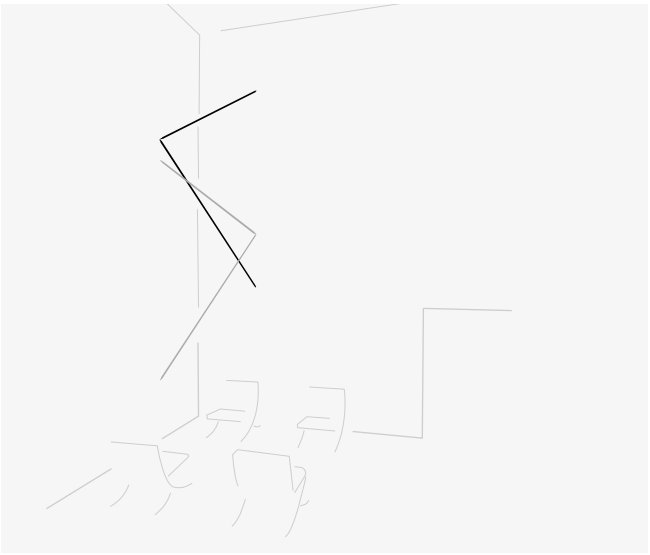

STI095
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

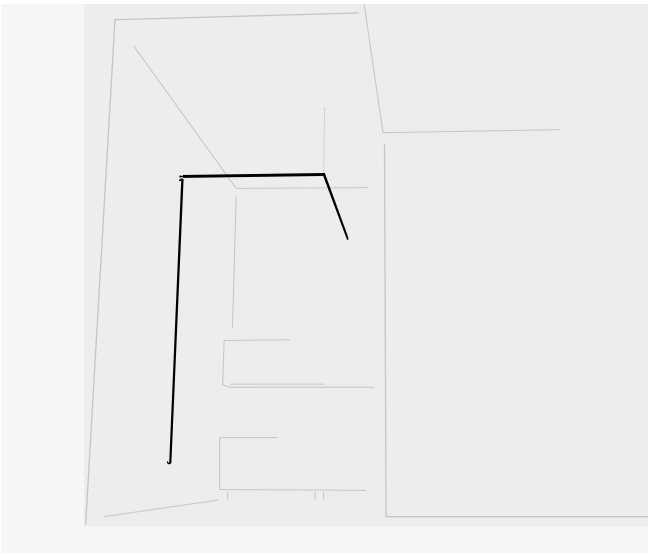

STI101
Sketch composed by two compositions.

Composition 1:
2 Sticks: 1 x 300 cm, 1 x 150 cm. Total 4,5 m.
LED 2700 K. 9779 lm. 79,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
1 Stick: 1 x 300 cm. Total 3 m.
LED 2700 K. 6519 lm. 52,8 W.
Remote driver Built-in Micro. 1-10V.

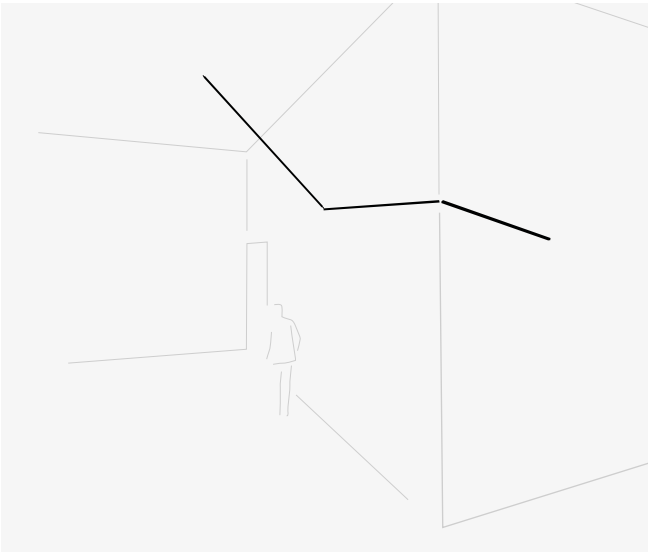

STI105
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 200 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Floor base & plug. Push.

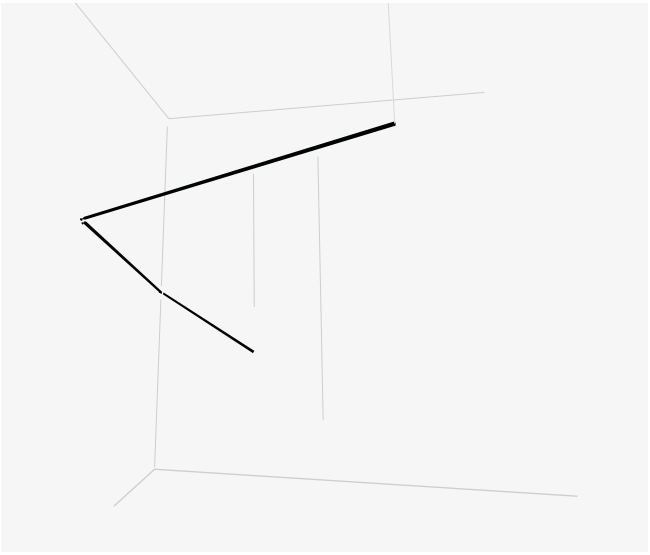

STI111
Sketch composed by only one composition.

3 Sticks: 2 x 150 cm, 1 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

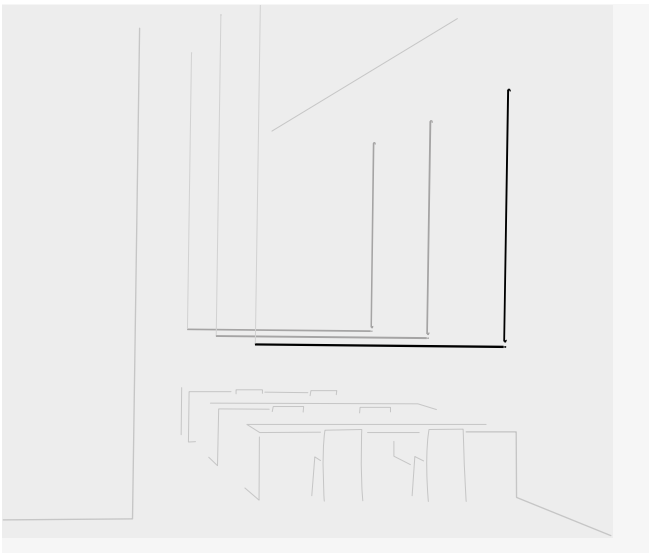

STI115
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 2 x 200 cm. Total 4 m.
LED 3500 K. 9496 lm. 70,4 W.
Built-in disc S canopy. 1-10V.

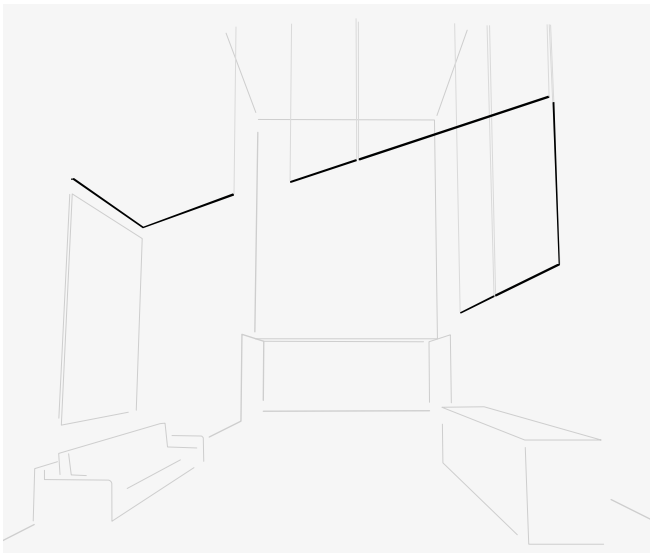

STI131
Sketch composed by four compositions.

Composition 1:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 3500 K. 3561 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 3:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

Composition 4:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V.

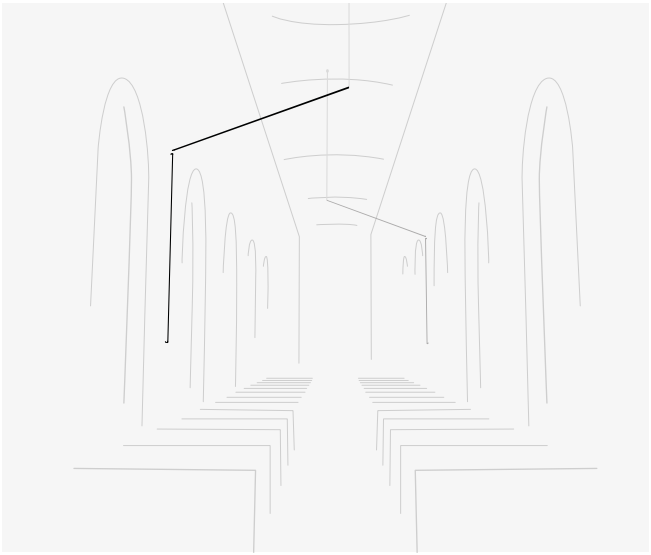

STI141
Sketch composed by two identical compositions.

Each composition:
2 Sticks: 2 x 300 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Built-in disc S canopy. 1-10V.

Sticks Connectable

Next sketches are composed by one or more compositions

Some sticks are on the Floor

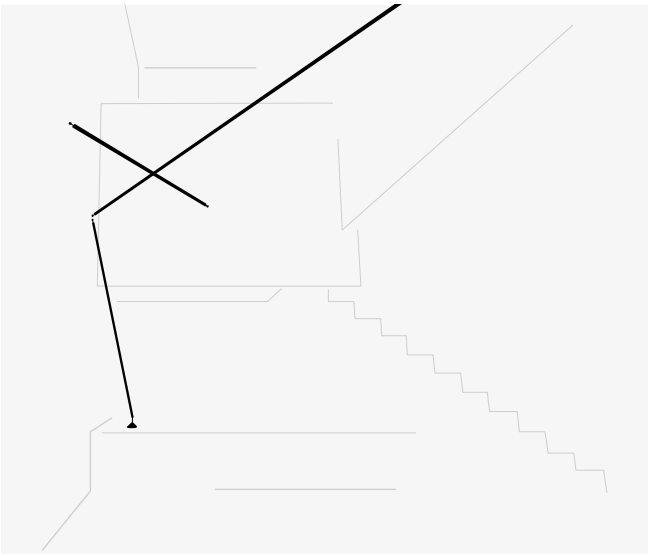

STI151
Sketch composed by two compositions.

Composition 1:
1 Stick: 1 x 150 cm. Total 1,5 m.
LED 2700 K. 3260 lm. 26,4 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

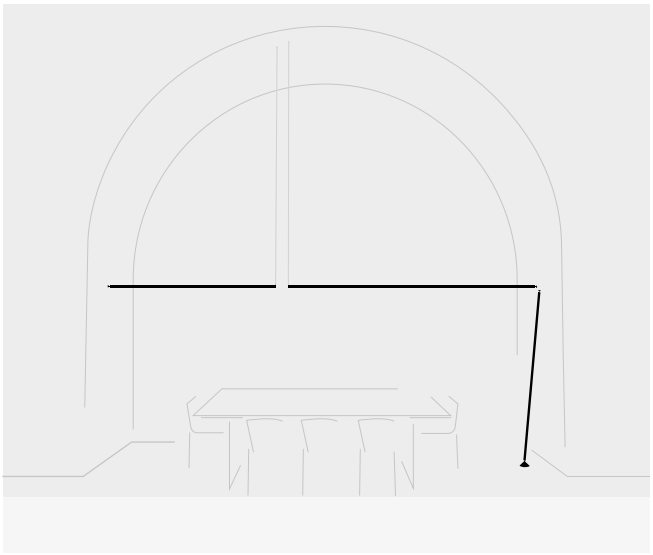

STI161
Sketch composed by two compositions.

Composition 1:
1 Stick: 1 x 200 cm. Total 2 m.
LED 2700 K. 4336 lm. 35,2 W.
Remote driver Built-in Micro. 1-10V.

Composition 2:
2 Sticks: 1 x 300 cm, 1 x 200 cm. Total 5 m.
LED 2700 K. 10865 lm. 88 W.
Remote driver Built-in Micro. 1-10V.

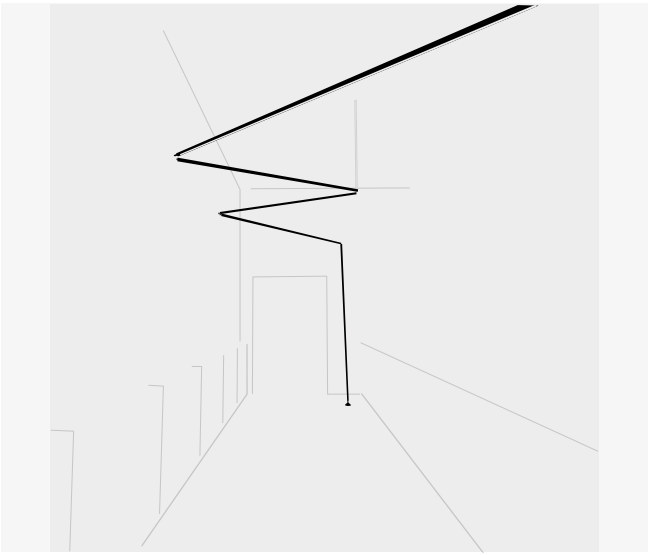

STI171
Sketch composed by two compositions.

Composition 1:
3 Sticks: 3 x 200 cm. Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Surface canopy. 1-10V.

Composition 2:
2 Sticks: 1 x 200 cm, 1 x 300 cm. Total 5 m.
LED 3500 K. 11870 lm. 88 W.
Surface canopy. 1-10V.

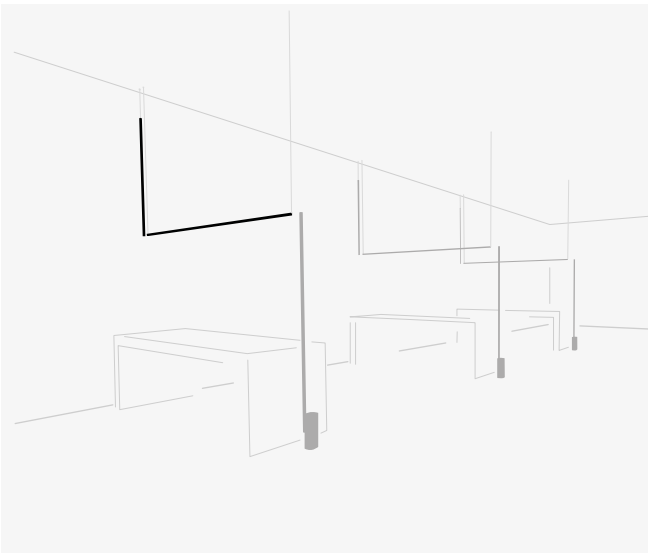

STI175
Sketch composed by three identical compositions.

Each composition:
2 Sticks: 1 x 150 cm, 1 x 200 cm. Total 3,5 m.
LED 3500 K. 8309 lm. 61,6 W.
Surface canopy. 1-10V.

Some sticks are attached to the Wall

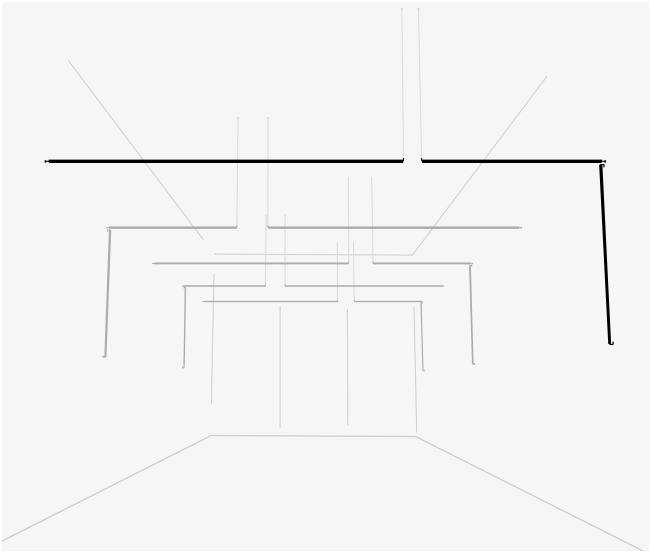

STI145
Sketch composed by five identical compositions.

Each composition:
3 Sticks: 1 x 300 cm, 2 x 150 cm . Total 6 m.
LED 3500 K. 14244 lm. 105,6 W.
Remote driver Built-in Micro. 1-10V

Each project is unique.
Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalize your own Sticks composition quick and easy at vibia.com.

Sticks Connectable

Elements to be configurated

Wall-Wall / Ceiling-Ceiling
Wall-Wall (corner) / Wall-Ceiling
Wall-Pendant
Pendant-Pendant
Pendant-Ceiling
Pendant

Sticks 1,5 m.
7300 7310 7311 7320 7321 7330 7350

Temperature Colour

/1 _ 2700 K E
CRI >90 3260 lm 123 lm/W
/2 _ 3000 K E
CRI >90 3510 lm 133 lm/W
/3 _ 3500 K E
CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 0,9 Kg.

Sticks 2 m.
7303 7313 7314 7323 7324 7333 7353

Temperature Colour

/1 _ 2700 K F
CRI >90 4346 lm 123 lm/W
/2 _ 3000 K F
CRI >90 4680 lm 133 lm/W
/3 _ 3500 K E
CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,2 Kg.

Sticks 3 m.
7306 7316 7317 7326 7327 7336 7356

Temperature Colour

/1 _ 2700 K E
CRI >90 6519 lm 123 lm/W
/2 _ 3000 K E
CRI >90 7020 lm 133 lm/W
/3 _ 3500 K E
CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 1,8 Kg.

Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Driver and **Dimming** depends on selected installation accesory (see page 477).

Suspension cables up to 3m. for Wall - Pendant and Pendant-Pendant.

Personalisation options available
- Extra cable length for Wall - Pendant and Pendant - Pendant.
Min. quantity, upcharge and extra lead time apply.

11 Black
(NCS S 8500-N)

LED IP20 Dimmer



Horizontal pendant version with a UGR index <19 available.

Floor-Wall

Sticks 1,5 m.
7340

Temperature Colour

/1 _ 2700 K F
CRI >90 3260 lm 123 lm/W
/2 _ 3000 K F
CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K E
CRI >90 3480 lm 132 lm/W

1 x LED STRIP 26,4 W 24V

Net weight 1,5 Kg.

Sticks 2 m.
7343

Temperature Colour

/1 _ 2700 K F
CRI >90 4346 lm 123 lm/W
/2 _ 3000 K F
CRI >90 2644 lm 100,15 lm/W
/3 _ 3500 K E
CRI >90 4640 lm 132 lm/W

1 x LED STRIP 35,2 W 24V

Net weight 1,8 Kg.

Sticks 3 m.
7346

Temperature Colour

/1 _ 2700 K F
CRI >90 6519 lm 123 lm/W
/2 _ 3000 K F
CRI >90 5288 lm 100,15 lm/W
/3 _ 3500 K E
CRI >90 6960 lm 132 lm/W

1 x LED STRIP 52,8 W 24V

Net weight 2,4 Kg.

Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Driver and **Dimming** depends on selected installation accesory (see page 477).

11 Black
(NCS S 8500-N)

LED IP20 Dimmer

Electrical connection options



Floor base & plug



Surface canopy



Built-in disc S



Remote driver Built-in Micro



Floor base & plug
ACST000001 ACST000002

Driver Constant Voltage 24V.
200~240V. 50/60Hz.
Dimming: Push.

Materials
Body: Steel.

Packaging
1 Box.
0,16 x 0,16 x 0,4 m.
Vol. 0,01 m³.
Gross weight 8,5 Kg.
Net weight 7 Kg.

11 Black
(NCS S 8500-N)

IP20 Dimmer



Surface canopy
ACST000003 ACST000004

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box.
0,50 x 0,25 x 0,25 m.
Vol. 0,03 m³.
Gross weight 2,9 Kg.
Net weight 2,5 Kg.

11 Black
(NCS S 8500-N)

IP20 Multi-volt



Built-in disc S
ACST000005 ACST000006

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Steel.

Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 Multi-volt



Remote driver Built-in Micro
ACST000007 ACST000008

Driver Constant Voltage 24V.
90~305V. 50/60Hz.
Dimming: 1-10V.

Personalisation options available
- Dimming: DALI-2, Casambi.
Min. quantity, upcharge and extra lead time apply.
To be installed on ceiling or wall.

Materials
Body: Aluminum.

Packaging
1 Box.
0,25 x 0,25 x 0,25 m.
Vol. 0,01 m³.
Gross weight 1,8 Kg.
Net weight 1,5 Kg.

11 Black
(NCS S 8500-N)

IP20 Multi-volt

Sticks Solo

Design by Arik Levy

A pure solution for a minimalist interior, Sticks Solo features a range of free-standing, arranged floor to wall, connecting two planes of the same space or horizontal pendant of various lengths and incorporates a range of electrical connection options for seamless integration with the surrounding architecture.

Floor



7338



7339



7348

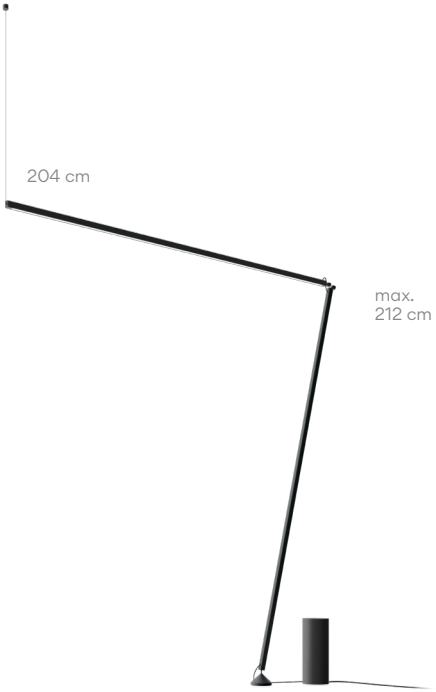

7375
7376 UGR <19

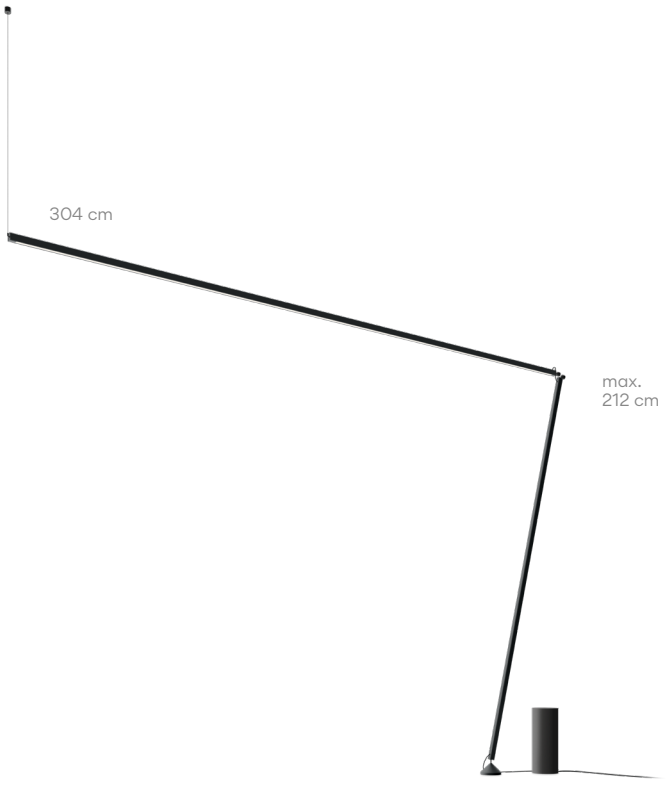

7378
7379 UGR <19

7338

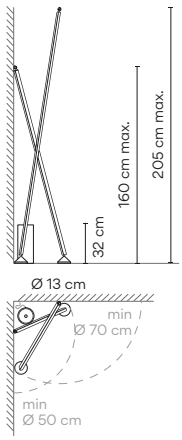

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 7604 lm
/2 _ 3000 K - 8192 lm
/3 _ 3500 K - 8286 lm
F
CRI >90

Control
7338 11 / _ **5** Push

Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 26,4 W 24V
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0414 m³
Gross weight 14,2 Kg Net weight 9,7 Kg

LED IP20 Dimmer

7339

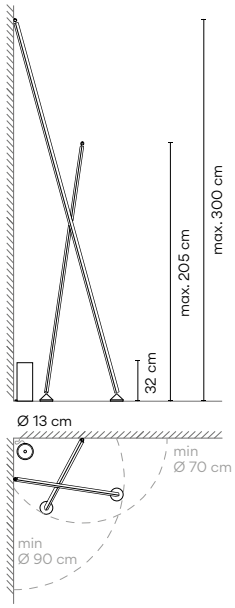

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 10868 lm
/2 _ 3000 K - 11704 lm
/3 _ 3500 K - 11836 lm
F
CRI >90

Control
7339 11 / _ **5** Push

Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
1 x LED STRIP 52,8 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,057 m³
Gross weight 16,6 Kg Net weight 10,6 Kg

LED IP20 Dimmer

7348



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4346 lm
/2 _ 3000 K - 4681 lm
/3 _ 3500 K - 4734 lm
F
CRI >90

Control
7348 11 / _ **5** Push

Materials
Sticks: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2 W 24V
Constant Voltage 24V
200~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0166 m³
Gross weight 8,8 Kg Net weight 8,4 Kg

LED IP20 Dimmer

7375
7376
UGR <19

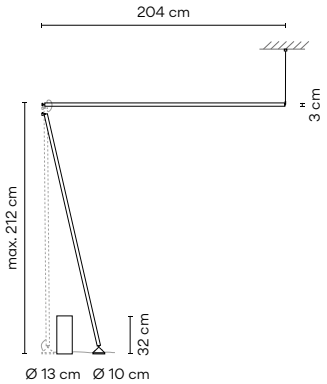

7375

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7375 11 / _ **5** Push

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg

LED IP20 Dimmer

7376

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7376 11 / _ **5** Push

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25
Vol 0,035 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 13,6 Kg Net weight 9,4 Kg

LED IP20 Dimmer

7378
7379
UGR <19

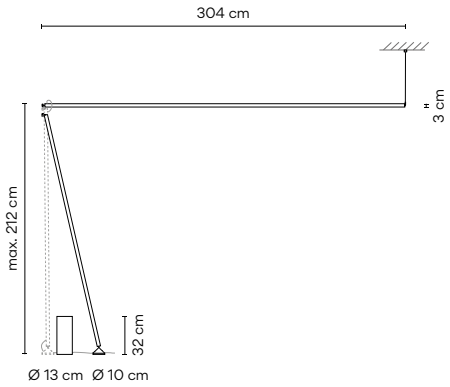

7378

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 10868 lm
/2 _ 3000 K - 11704 lm
/3 _ 3500 K - 11836 lm
F
CRI >90

Control
7378 11 / _ **5** Push

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2W 24V
1 x LED STRIP 52,8W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 3,25
Vol 0,05 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 Dimmer

7379

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 10868 lm
/2 _ 3000 K - 11704 lm
/3 _ 3500 K - 11836 lm
F
CRI >90

Control
7379 11 / _ **5** Push

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED STRIP 35,2W 24V
1 x LED STRIP 52,8W 24V
Constant voltage 24V
200~240Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 3,25
Vol 0,05 m³
1 Tube 0,16 x 0,16 x 0,40
Vol 0,01 m³
Gross weight 15,7 Kg Net weight 9,4 Kg

LED IP20 Dimmer

Pendant



7360
7361 UGR <19
152 x 2 x 3 cm

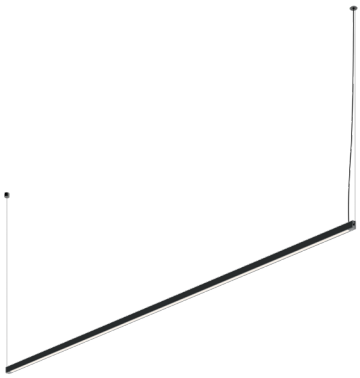

7363
7364 UGR <19
201 x 2 x 3 cm

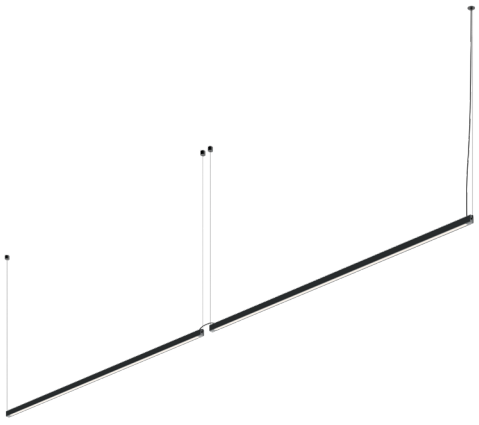

7365
7366 UGR <19
304 x 2 x 3 cm

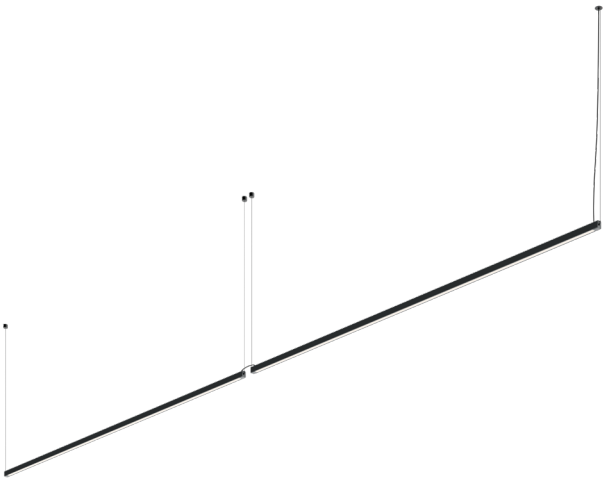

7368
7369 UGR <19
402 x 2 x 3 cm

7360
7361
UGR <19

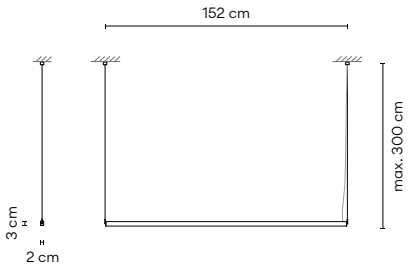

7360

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3260 lm
/2 _ 3000 K - 3511 lm
/3 _ 3500 K - 3551 lm
F
CRI >90

Control
7360 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED PLATE 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 1,60 m
Vol 0,007 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 4,6 Kg Net weight 3,4 Kg

Notes
7360 _ _ / _ 1: DALI-2 Multi-volt
7360 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

7361

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3260 lm
/2 _ 3000 K - 3511 lm
/3 _ 3500 K - 3551 lm
F
CRI >90

Control
7361 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED PLATE 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 1,60 m
Vol 0,007 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 4,6 Kg Net weight 3,4 Kg

Notes
7361 _ _ / _ 1: DALI-2 Multi-volt
7361 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

7363
7364
UGR <19

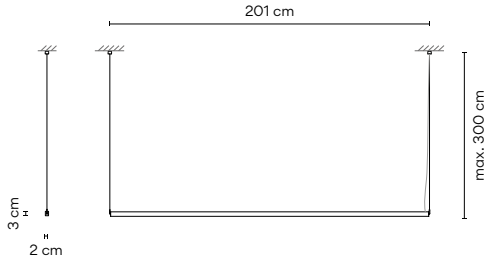

7363

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4347 lm
/2 _ 3000 K - 4682 lm
/3 _ 3500 K - 4734 lm
F
CRI >90

Control
7363 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg

Notes
7363 _ _ / _ 1: DALI-2 Multi-volt
7363 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

7364

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 4347 lm
/2 _ 3000 K - 4682 lm
/3 _ 3500 K - 4734 lm
F
CRI >90

Control
7364 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
1 x LED PLATE 35,2 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,07 x 0,07 x 2,240 m
Vol 0,011 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 5,3 Kg Net weight 3,7 Kg

Notes
7364 _ _ / _ 1: DALI-2 Multi-volt
7364 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

7365
7366
UGR <19

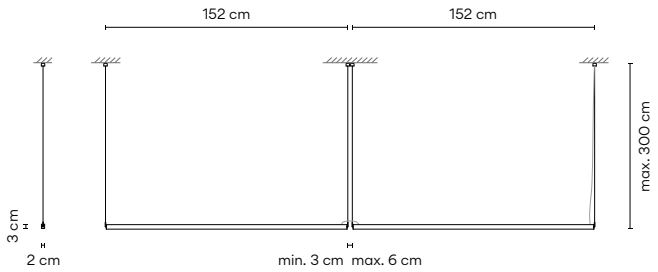

7365

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 6521 lm
/2 _ 3000 K - 7022 lm
/3 _ 3500 K - 7102 lm
F
CRI >90

Control
7365 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,070 m
Vol 0,032 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 7,9 Kg Net weight 4,3 Kg

Notes
7365 _ _ / _ 1: DALI-2 Multi-volt
7365 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

7366

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 6521 lm
/2 _ 3000 K - 7022 lm
/3 _ 3500 K - 7102 lm
F
CRI >90

Control
7366 11 / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection


Surface


Built-in Disc S


Remote Micro


Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 26,4 W 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,070 m
Vol 0,032 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 7,9 Kg Net weight 4,3 Kg

Notes
7366 _ _ / _ 1: DALI-2 Multi-volt
7366 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

1160 10 /1A _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

7368
7369
UGR <19

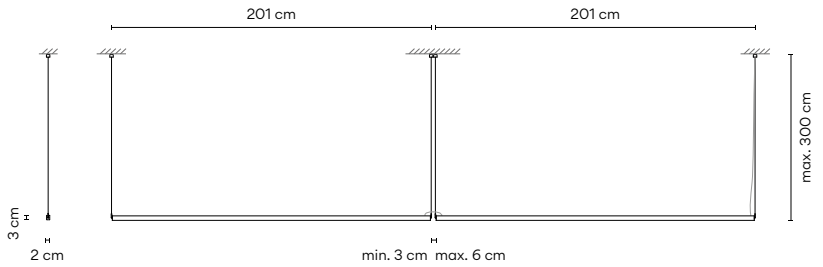

7368

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7368 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25 m
Vol 0,035 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 8,7 Kg Net weight 4,9 Kg

Notes
7368 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

7369

Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 8694 lm
/2 _ 3000 K - 9363 lm
/3 _ 3500 K - 9469 lm
F
CRI >90

Control
7369 11 / _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Built-in Disc S | Remote Micro | Remote XXS

_10 Surface
_24 Built-in Disc S
_31 Remote Micro
_32 Remote XXS

Materials
Stick: Aluminium.
Diffuser: PC - Polycarbonate.

Light Source and electronics
2 x LED STRIP 35,2 24V
Constant voltage 24V
90~305Vac 50/60Hz

Packaging
1 Tube 0,12 x 0,12 x 2,25 m
Vol 0,035 m³
1 Box 0,12 x 0,12 x 0,48 m
Vol 0,007 m³
Gross weight 8,7 Kg Net weight 4,9 Kg

Notes
7369 _ _ / _ 3: 1-10V Multi-volt

LED IP20 Dimmer

Select Eletrical connection

For Ref. 7360, 7361, 7363, 7364, 7365, 7366, 7368, 7369

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Black finish.

_24
Built-in Disc S



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



28 x 10 x 4 cm

Ref. 3768, 3769
40 x 10 x 4 cm

Black finish.

Remote



Built-in





Musa

Design by Note Design Studio

Delicate elegance.
It explores the delicacy of nature
which is both strong and powerful,
in a poetic expression of light.

Table Wall



7400
9 x Ø 26 cm



7402
Ø 26 x 14 x 10 cm



7404
Ø 26 x 14 x 10 cm



7415
Ø 26 x 10 cm

Portable

7400



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 449 lm
F

CRI >90

Control

7400 _ _ **/ 15** Push
(with or without memory)

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m³
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Electric cable with plug 3m.
Push-button on the base.

LED IP20 Dimmer Multi-volt





Product specifications subject to change without notice. Please check vibia.com for updated information.

7402



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 449 lm
F
CRI >90

Control

7402 _ _ **/ 15** Push
(with or without memory)

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m^3
Gross weight 1,3 Kg Net weight 0,85 Kg

Notes

Electric cable with plug 3m.
Push-button on the base.

LED IP20 Dimmer Multi-volt

7404



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 157 lm
G
CRI >90

Control

7404 _ _ **/ 15** Push
(with or without memory)

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 1,5 W 500 mA
Constant Voltage 5V
100~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m^3
Gross weight 1,4 Kg Net weight 0,95 Kg

Notes

Portable version with batery.
Dimmer switch on the base. 3 step dimming.
Electric cable with plug. 3 m.
Push-button on the base.
Battery life: from 6 to 18 hours
(depending on intensity).

LED IP20 Multi-volt Li-ion

7415



Finishes

- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **36/** _ _ Soft Pink (NCS S 1010-Y50R)

Finish customization
(Available options: Vibia colour palette.
Minimum quantity 10 units. Price + 10%)

LED Colour Temperature

/1 _ 2700 K - 449 lm
F
CRI >90

Control

7415 _ _ **/ 13** 1-10V

Materials

Diffuser: Blown glass.
Body: Aluminum.

Light Source and electronics

1 x LED 4,5 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Packaging

1 Box 0,17 x 0,32 x 0,3 m
Vol 0,0163 m^3
Gross weight 1,8 Kg Net weight 1,3 Kg

LED IP20

Knit

Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection. Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.

Pendant



7450



Finishes

24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 4740 lm
E
CRI >90

Control

7450 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz

Packaging
1 Box 0,55 x 0,55 x 0,65 m
Vol 0,196 m³
Gross weight 6 Kg Net weight 3,7 Kg

Notes
7450 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED IP20

Product specifications subject to change without notice. Please check vibia.com for updated information.

7455



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7455 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz

Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m³
Gross weight 5,9 Kg Net weight 3,2 Kg

Notes
7455 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED IP20 CE UKCA EAC

7460



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7460 _ _ **/** _ _
_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Current 1050 mA
110~240V 50/60Hz

Packaging
1 Box 0,54 x 0,54 x 0,41 m
Vol 0,119 m³
Gross weight 5,2 Kg Net weight 3,4 Kg

Notes
7460 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED IP20 CE UKCA EAC

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendant

7470



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7470 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110~240V 50/60Hz

Packaging
1 Box 0,59 x 0,78 x 0,78m
Vol 0,358 m³
Gross weight 9 Kg Net weight 5,5 Kg

Notes
7470 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED ☐ IP20 CE UK CA EAC

7475



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7475 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Eletrical connection



Surface | Free Wire | Built-in XS | Remote Micro | Remote XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote Micro
_32 Remote XXS

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
6 x LED 6,7W 400 mA
Constant Current 1200 mA
110~240V 50/60Hz

Packaging
1 Box 0,80 x 0,80 x 0,77m
Vol 0,492 m3
Gross weight 9,5 Kg Net weight 6 Kg

Notes
7475 _ _ / _ 1: DALI-2 Bi-volt
Extra cable length.

LED ☐ IP20 CE UK CA EAC

Select Eletrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 7450, 7455, 7460, 7470, 7475

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings. Black finish.

_32
Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings. Match with fixture finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10
Surface



Ø 16 cm

match with fixture finish.

_18
Free Wire

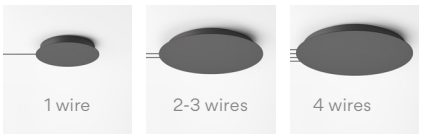

Ø 22 cm

Ø 36 cm

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

Remote



Built-in







Floor



7480
Ø 45 x 178 cm



7485
Ø 45 x 170 cm



7487
Ø 65 x 195 cm



7490
Ø 45 x 55 cm



7492
Ø 65 x 51 cm



7494
Ø 65 x 62 cm

7480



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7480 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38 x 0,36 m
Total Vol. 0,4311 m³
Gross weight 21,9 Kg Net weight 11,3 Kg

Notes
7480 _ _ / _ 5: Push Bi-volt
Electric cable 2,5 m.

LED IP20 CE UKCA EAC

7485



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7485 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,54 x 0,54 x 0,41 m
Box 2: 1,71 x 0,38x 0,36 m
Total Vol. 0,353 m³
Gross weight 21,5 Kg Net weight 10,8 Kg

Notes
7485 _ _ / _ 5: Push Bi-volt
Electric cable 2,5 m.

LED IP20 CE UKCA EAC

7487



Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7487 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.
Stem: Iron.
Floor base: Zinc Alloy.

Light Source and electronics
6 x LED 5,9W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
2 Boxes
Box 1: 0,78 x 0,78 x 0,59 m
Box 2: 1,93 x 0,45 x 0,46 m
Total Vol. 0,7649 m³
Gross weight 30 Kg Net weight 18,5 Kg

Notes
7487 _ _ / _ 5: Push Bi-volt
Electric cable 2,5 m.

LED IP20 CE UKCA EAC

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

7490

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7490 _ _ **/** _ _
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

ø 45 cm


Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,65 x 0,55 x 0,55 m
Vol 0,196 m³
Gross Weight 5,4 Kg Net Weight 3,3 Kg

Notes
7490 _ _ / _ 5: Push Bi-volt
Push on the top of the luminaire.
Electric cable 2,5 m

LED IP20

7492

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7492 _ _ **/** _ _
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

ø 65 cm


Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,78 x 0,78 x 0,59 m
Vol 0,358 m³
Gross Weight 7,3 Kg Net Weight 4,5 Kg

Notes
7492 _ _ / _ 5: Push Bi-volt
Push on the top of the luminaire.
Electric cable 2,5 m

LED IP20

7494

Finishes
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 4740 lm
E
CRI >90

Control
7494 _ _ **/** _ _
_ _ **/** _ **5** Push
_ _ **/** _ **Z** Casambi

ø 65 cm


Materials
Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Botom diffuser: PMMA.
Diffuser ring and support: ABS.

Light Source and electronics
6 x LED 5,9 W 350 mA
Constant Voltage 42V 1,43 mA
110~240V 50/60Hz

Packaging
1 Box 0,80 x 0,80 x 0,75 m
Vol 0,48 m³
Gross Weight 9,3 Kg Net Weight 5,9 Kg

Notes
7494 _ _ / _ 5: Push Bi-volt
Push on the top of the luminaire.
Electric cable 2,5 m.

LED IP20



Set

Design by Xuclà

Set is a new concept of modular wall sconces thatcomposes light as art onto the walls. During the day Set decorates the wall with a pattern of rectangular elements, but once illuminated it creates a surprising play of lights, shadows and volumes.

Wall



7749
18 x 10 cm

7750
18 x 10 cm

7751
30 x 10 cm

7752
30 x 10 cm

7753
38 x 10 cm

7749



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control
7749 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,065 x 0,145 x 0,275 m
Vol 0,0026 m³
Gross weight 0,67 Kg Net weight 0,52 Kg

LED IP20 Multi-volt

7750



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
/1 _ 2700 K - 1269 lm
D
/3 _ 3500 K - 1374,9 lm
G
CRI >90

Control
7750 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 0,95 Kg Net weight 0,8 Kg

Notes
LED placed on the lower element.

LED IP20 Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

7751



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm D
- **/3** _ 3500 K - 1374,9 lm G

CRI >90

Control
7751 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,25 Kg Net weight 1,1 Kg

Notes
LED placed on the lower element.

LED IP20 Multi-volt

7752



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm D
- **/3** _ 3500 K - 1374,9 lm G

CRI >90

Control
7752 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0,132 x 0,36 m
Vol 0,0071 m³
Gross weight 1,6 Kg Net weight 1,4 Kg

Notes
LED placed on the lower element.

LED IP20 Multi-volt

7753



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **93/** _ _ White (RAL 9003)

LED Colour Temperature
- **/1** _ 2700 K - 1269 lm D
- **/3** _ 3500 K - 1374,9 lm G

CRI >90

Control
7753 _ _ **/** _ **2** 0-10V

Materials
Main body: Aluminum.
Diffuser: Borosilicate glass.
Reflecting bodies: PVC.
Lid: PC- Polycarbonate.

Light Source and electronics
1 x LED 9 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,15 x 0193 x 0,36 m
Vol 0,0100 m³
Gross weight 2 Kg Net weight 1,5 Kg

Notes
LED placed on the lower element.

LED IP20 Multi-volt

Alpha

Design by Ramos & Bassols

A wall lamp with basic lines and advanced lighting performance, its diffuser emits a warm, comfortable light.

Wall



7940

12 x 12 cm



Without switch

7942

12 x 12 cm

7940



Finishes

18/ _ _ Graphite & Black (RAL 7016 & RAL 9005)

93/ _ _ White (RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
D

/3 _ 3500 K - 163,20 lm
G

CRI >90

Control

7940 _ _ **/** _ **0** On/ Off

Materials

Diffuser: PC- Polycarbonate.
Lid: Zinc Alloy.
Body: Aluminum.
Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m^3
Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface

On/ Off switch on the front cover

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.



7942



Finishes

18/ _ _ Graphite & Black
(RAL 7016 & RAL 9005)

93/ _ _ White
(RAL 9016)

LED Colour Temperature

/1 _ 2700 K - 181,22 lm
D

/3 _ 3500 K - 163,20 lm
G

CRI >90

Control

7942 _ _ **/** _ **0** On/ Off

Materials

Diffuser: PC- Polycarbonate.
Lid: Zinc Alloy.
Body: Aluminum.
Lid: Aluminum.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m
Vol 0,0055 m^3
Gross weight 1,2 Kg Net weight 1 Kg

Notes

Surface
Without switch

LED IP20 Bi-volt

Match

Design by Jordi Vilardell & Meritxell Vidal

Based on the principle of co-creation, Match is a lighting collection that can be fully customised virtually. Characterised by unlimited configurations, Match's kinetic clusters exude a textured, sculptural presence.

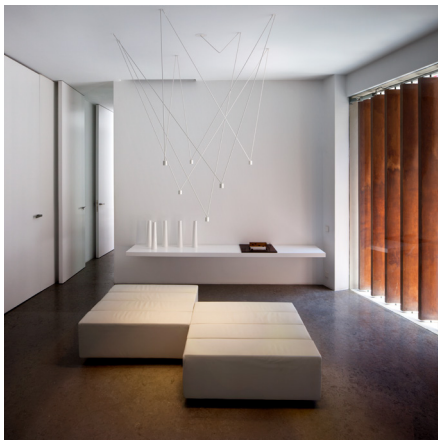





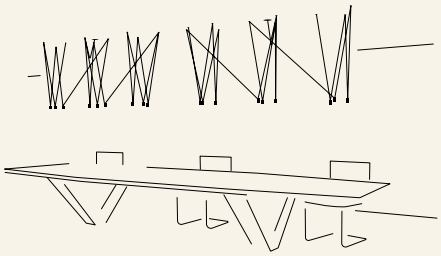

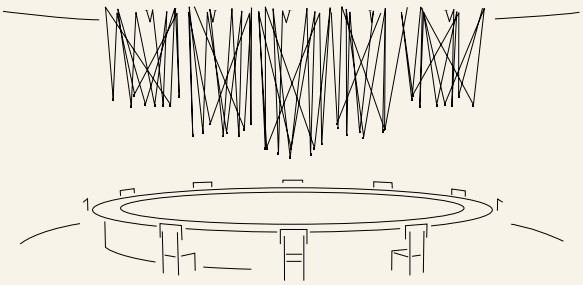

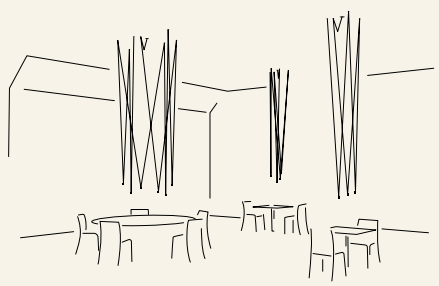

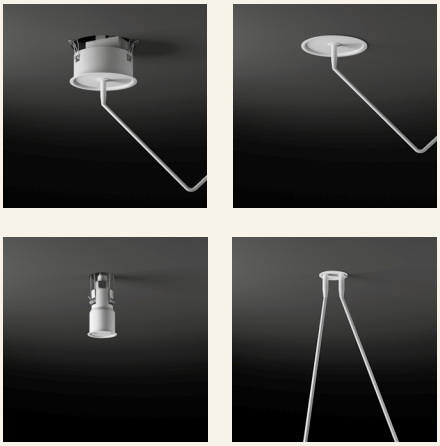

Built-in installation
-Electrical connection finials: the minimum height is 10 cm and the dimension of the cut-out is 10,5 cm.
-Nodes:the minimum height is 12 cm and the dimension of the cut-out is 4,5 cm.

Each project is unique. Visit vibia.com and chose among multiple compositions designed and adapted to your project needs.

Personalise your own Match composition quick and easy at vibia.com

It's necessary to make your personalized configuration on vibia.com to see prices and place orders.

Example 1:



Example 2:



Example 3:



Example 4:



Example 5:



Example 6:



Finishes

03/ _ _ White (RAL 9010)

18/ _ _ Graphite (RAL 7016)

LED Colour Temperature

/1 _ 2700 K - 1269 lm

G

CRI >90

/2 _ 3000 K - 1269 lm

D

CRI >80

/3 _ 3500 K - 1446 lm

G

CRI >90

Control

_ _ **/ A** Push; 1-10V- DALI-2

_ _ **/ Z** Casambi

Materials

Head: Aluminum.
Canopy: Steel.
Rods: Steel.

Light Source and electronics

LED 2,1 W 700 mA
Constant Current 700 mA
110~240V 50/60Hz

Notes

Built-in

LED IP20 Bi-volt

Ø 4,5 cm Ø 10,5 cm

PLACE ORDER ONLINE AT WWW.VIBIA.COM



Light source

Luminaire data

The information published in this technical catalog (lumens & watts) refers to the light source. Check luminaire data in the downloadable spec sheet at **vibia.com**

LED retrofit			
900018.	LED G9 4,2W 2700K 470 lm.		Puck and Warm
900102.	LED E27 230V 12W LED 2700 K 1520 lm		Balance and Warm

Bulbs: net prices, without discount

Glossary

CE
Product fulfills the requirements
of the relevant European directives.

UK CA
Product fulfills the requirements
of Great Britain relevant legislation.

EAC
Product complying with TP TC 004/2011
and TP TC 020/2011. Custom Union Regulation

Product that complies with the law N24-09
of the current Moroccan legislation.

IP
Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids.
The scale goes from IP20 to IP69.

IP20
Product protected against solid object as big as or bigger than 12 mm. No protection against water.

IP20
IP40
Product protected against solid objects as big as or bigger than 12 mm in the built-in part. In the visible part of the luminaire, product protected against solid objects as big as or bigger than 1 mm. No protection against water.

IP64
Dust-tight product. Protected against water spray.

IP65
Dust-tight product. Protected against water trickles.

IP66
Dust-tight product. Protected against water spurts.

Insulation class

Class I. Product with an additional protection cable (grounds).

Class II. Product protected against electric shock having a double insulation. No grounds.

Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

Bi-volt
Valid for the range 110V-230V, 50-60Hz.

Multi-volt
Valid for the range 110-277V, 50-60Hz.

Cut out

Property for embedding dimension.

Integrated Dimmer

Dimmer
Lamp that has a integrated dimmer.

EU Energetic label

More Efficacy
A
B
C
D
E
F
G
Less Efficacy

Light source information

CRI
Colour rendering index.

K
LED Colour Temperature.

lm
Lumen, unit of measurement of luminous flux.

lm/W
Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.

Lighting control systems

1 Push control

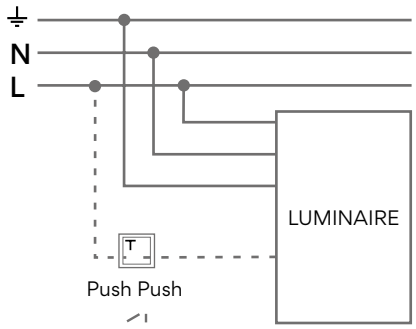

2 1-10V System control

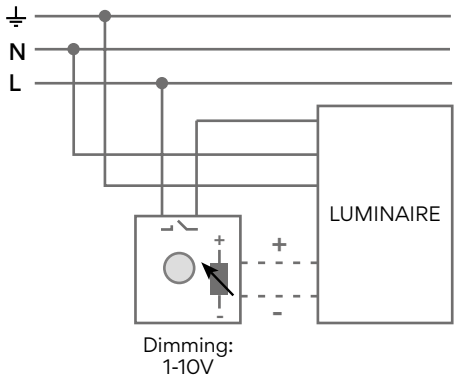

3 DALI System control

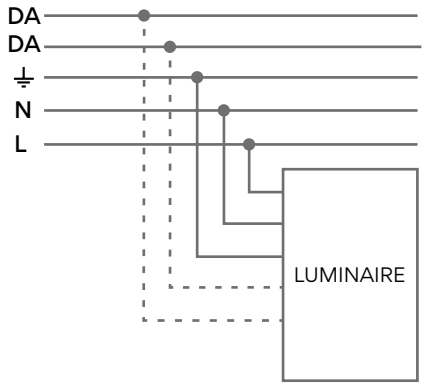

4 Casambi control

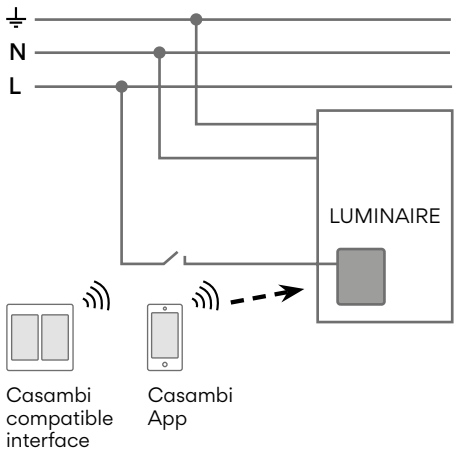

5 ProtoPixel control

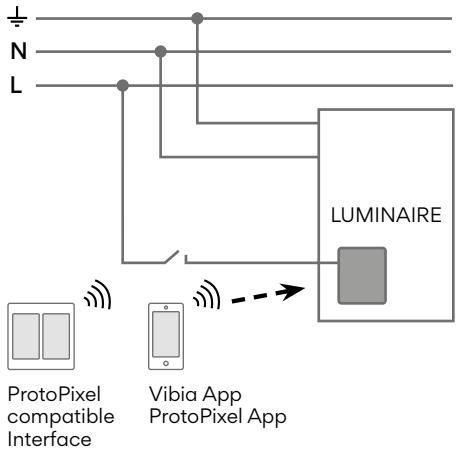

6 TRIAC control

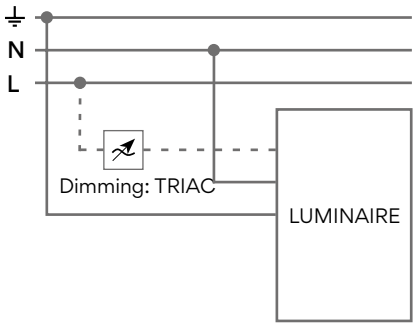

⏚	Ground	L	Line
N	Neutral	DA	DALI-Digital Signal



Product specifications subject to change without notice. Please check vibia.com for updated information.



VIBIA

Technical Catalogue April 2026
New Collections

VIBIA

Recommended sales prices - VAT not included in this price list updates models and finishes in production, which may differ from photographs published in catalogue.



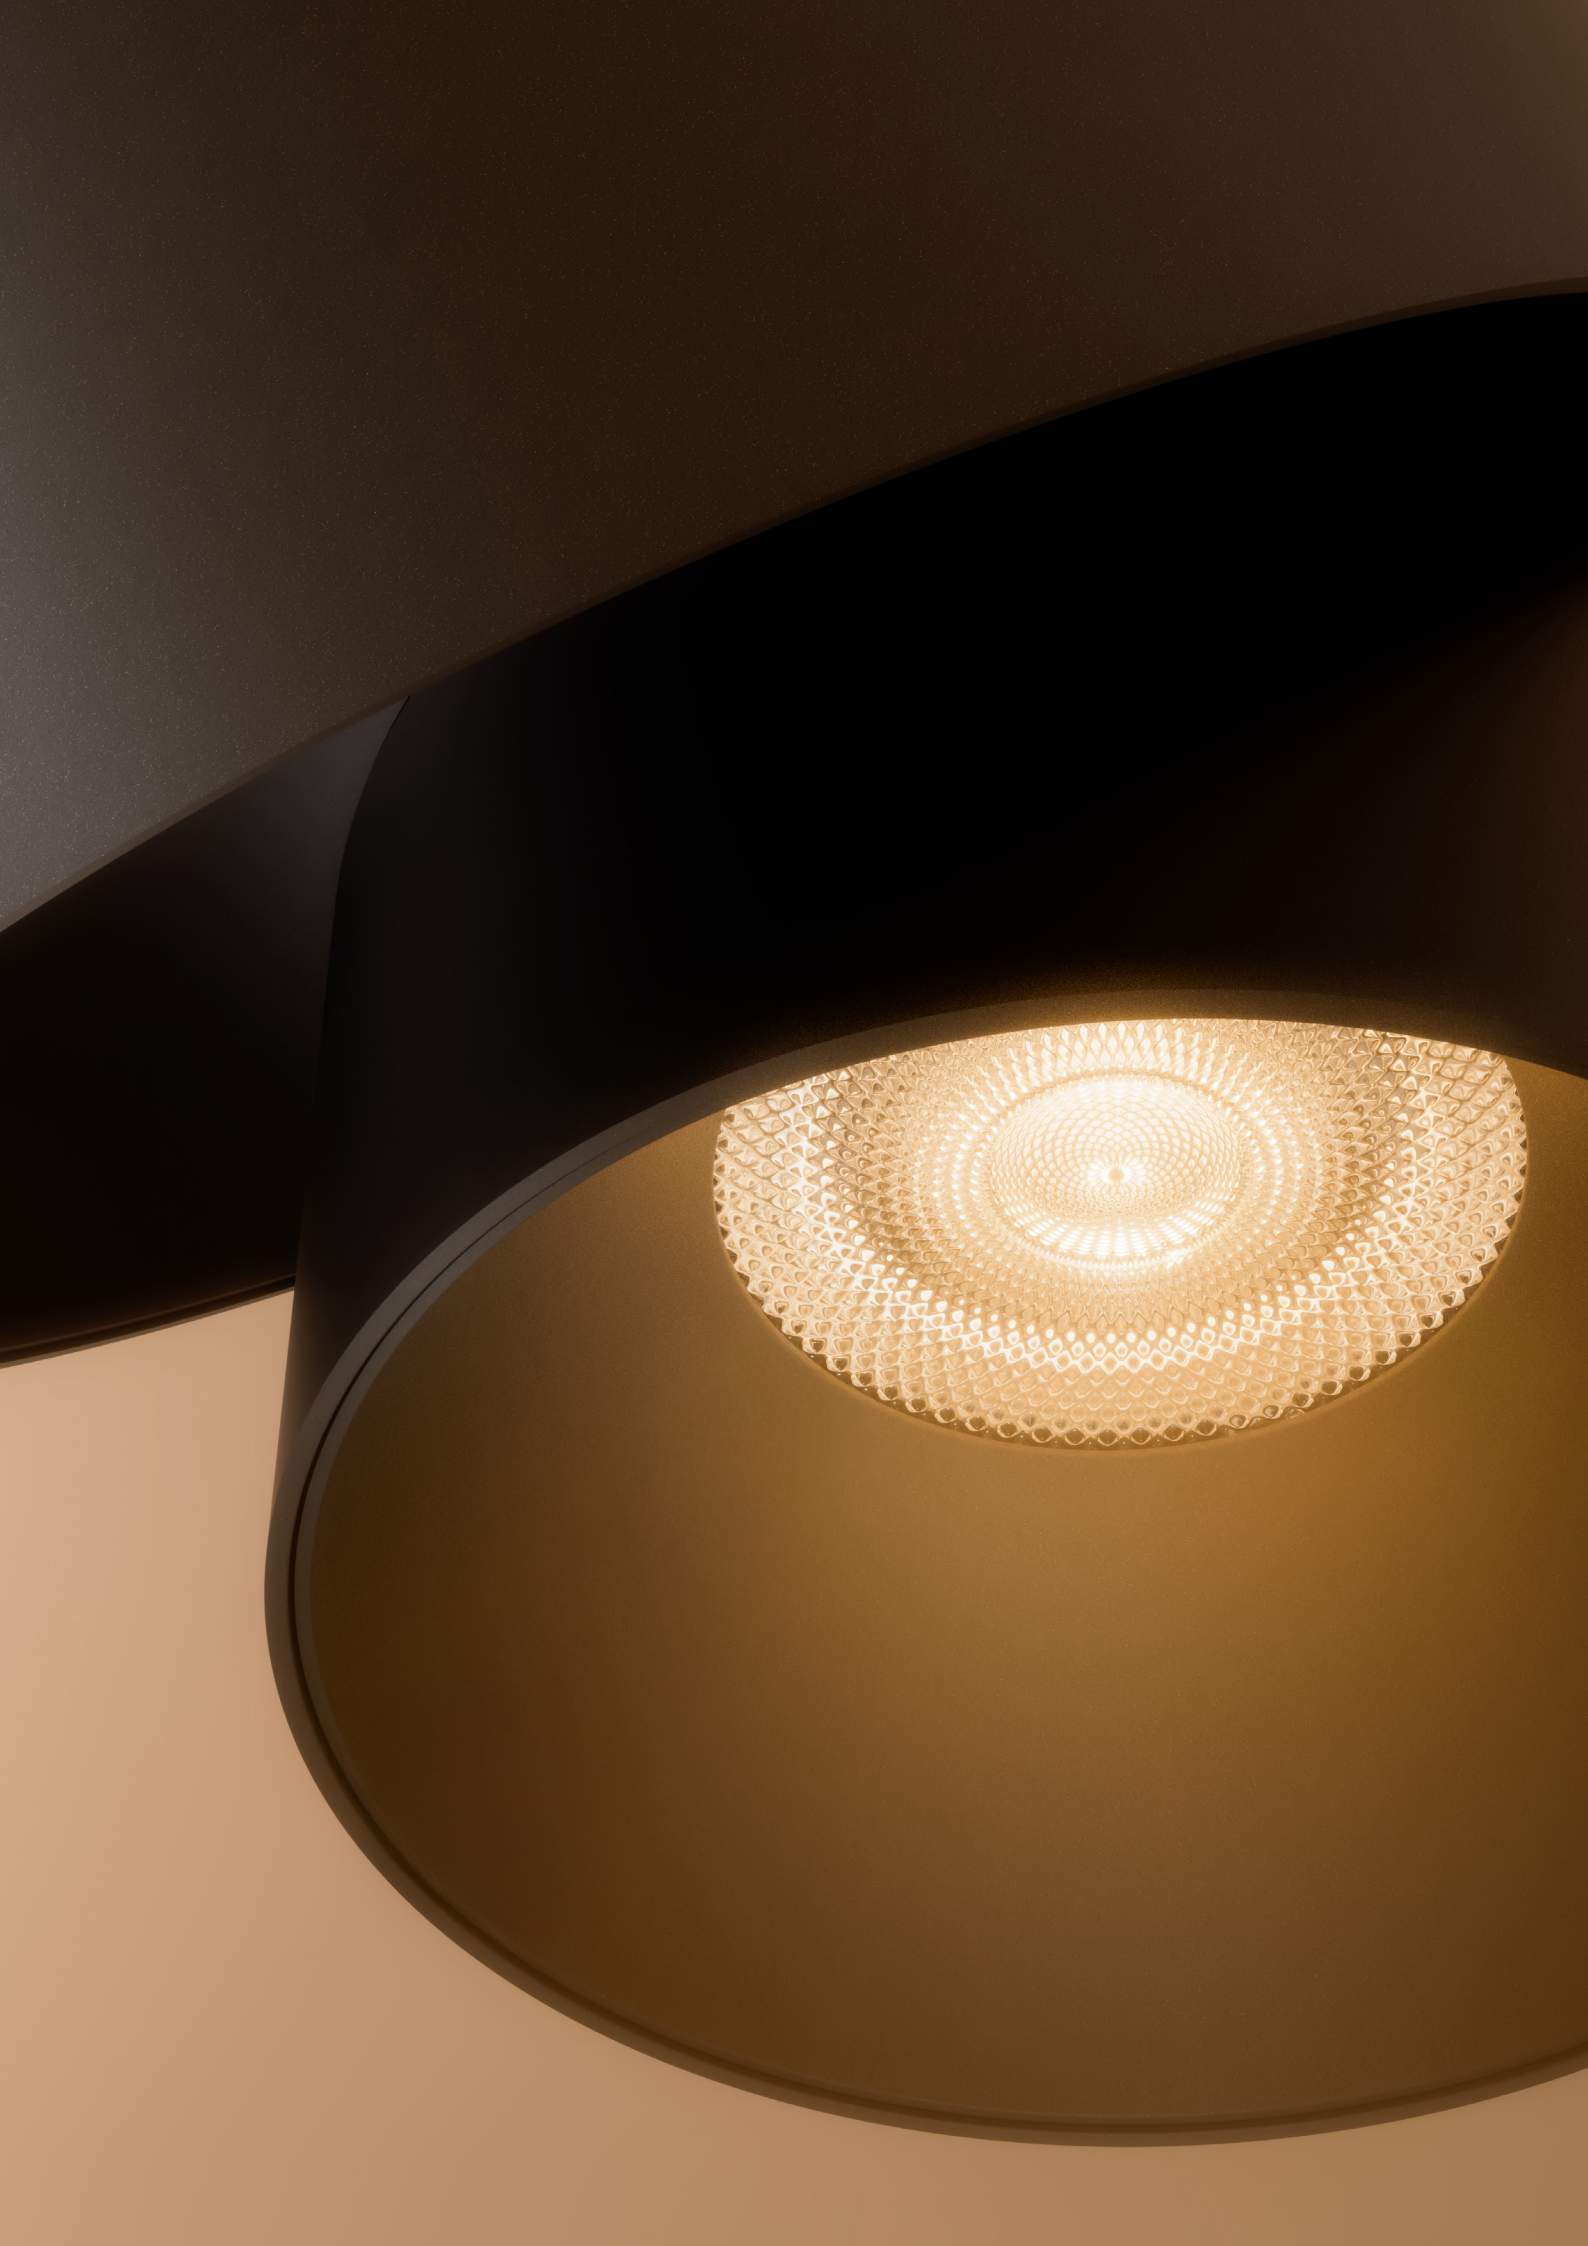

Index

Alba
22

Asia
16

Closer
10

Nexum
24

Pro
54

Plusminus Essentials
70

Glossary
92

Lighting control systems
93

Item coding

Some pendant models offer different electrical connection typology, these will require additional coding.

Reference

1160 10 / 1A _ 18

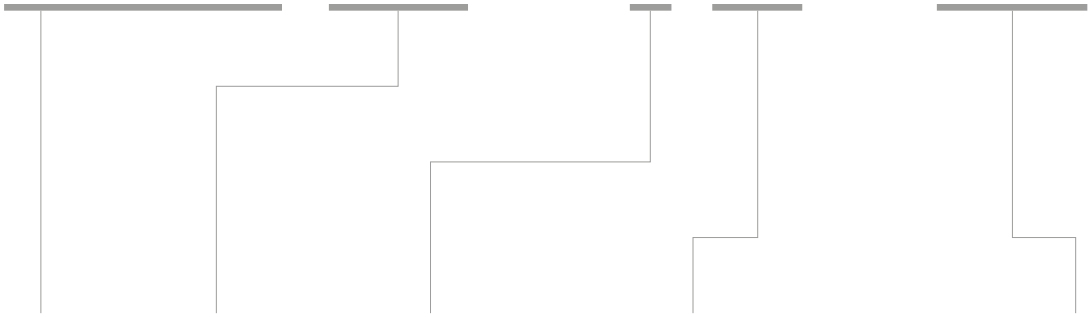

Model	Finish	LED Colour Temperature	Control	Electrical connection	
4 digits	2 digits	1 digit	1 digit	2 digits	
				Type	Model
		0 Without LED	**0** On/ Off	**1** Surface	**0** Basic
		1 2700 K	**1** DALI-2	**2** Built-in	**1** Micro
		2 3000 K	**2** 0-10V	**3** Remote	**2** XXS
		3 3500 K	**3** 1-10V	**4** Bolt-down	**3** XS
		4 4000 K	**4** TRIAC	**T** Track	**4** S
		7 2200 K	**5** Push		**5** M
		8 Tunable White	**6** Sensor		**6** L
		9 Tunable Red	**7** Lutron		**8** Free Wire
		A Infinite Colour (TW + RGB)	**8** Push 2		**9** Mud kit
		F Dim-To-Warm	**A** Push; 1-10V; DALI-2		**A** Trim
			B Push; 1-10V		**B** Trimless
			C 1-10V; DALI-2		**X** Track Surface
			D Push; DALI-2		**Z** Track Trimless
			E Casambi PTP; On/ Off		
			F Simultaneous line Push 1-10V; DALI-2; Casambi		
			G DALI; Casambi; ProtoPixel		
			H On/ Off; DALI-2; Casambi		
			M Without driver		
			W Wiz		
			Y ProtoPixel		
			Z Casambi *		

* Casambi refers to wireless dimming solutions. Ask for more information.

Should you need a non-standard product.
Please, request sales conditions.



Closer

Design by Ichiro Iwasaki

A versatile and airy luminaire that transforms outdoor spaces into inviting retreats while blending seamlessly into interiors. Its inner light gently washes the knitted shade, revealing a warm translucent texture that enhances everyday moments.

Outdoor - Pendant

CABLE
Height: max. 200 cm



Ø 68 cm
1700



Ø 56 cm
1702



Ø 49 cm
1704

RIGID STEM
Total height
106 cm / 150 cm



Ø 68 cm
1705



Ø 56 cm
1707



Ø 49 cm
1709

Outdoor - Floor & Table



Ø 68 cm
1710



Ø 56 cm
1712



Ø 49 cm
1714

Product specifications subject to change without notice. Please check vibia.com for updated information.

1700



Finishes

- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature

/1 _ 2700 K - 2600 lm

F

CRI >90

Control

1700 _ _ / _ _

- _ _ **/ 11** DALI-2
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics

1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 0,78 x 0,78 x 0,58 m
Vol 0,3508 m^3
Gross weight 5,9 Kg Net weight 2,19 Kg

Notes

1700 _ _ / 1 _ 23: Built-in XS IP20
1700 _ _ / 1 _ 31: Remote Micro IP20
Extra cable length.

LED IP44 CE UK CA EAC

1702



Finishes

- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature

/1 _ 2700 K - 2600 lm

F

CRI >90

Control

1702 _ _ / _ _

- _ _ **/ 11** DALI-2
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium. Shade: Polyester.
Diffuser: PMMA- Polymethylmethacrylate.

Light Source and electronics

1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,61 m
Vol 0,2665 m^3
Gross weight 5,1 Kg Net weight 2 Kg

Notes

1702 _ _ / 1 _ 23: Built-in XS IP20
1702 _ _ / 1 _ 31: Remote Micro IP20
Extra cable length.

LED IP44 CE UK CA EAC

1704



Finishes

- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature

/1 _ 2700 K - 2600 lm

F

CRI >90

Control

1704 _ _ **/** _ _

- _ _ **/ 11 DA**LI-2
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics

1 x LED PLATE 26W 600mA
Constant Current 600 mA
220-240V 50/60Hz

Packaging

1 Box 1,02 x 0,53 x 0,60 m
Vol 0,3217 m^3
Gross weight 5,8 Kg Net weight 2,18 Kg

Notes

1704 _ _ / 1 _ 23: Built-in XS IP20
1704 _ _ / 1 _ 31: Remote Micro IP20
Extra cable length.

LED IP44

Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



Ø 18 cm
height 8 cm

Black finish.

Remote



Built-in



Product specifications subject to change without notice. Please check vibia.com for updated information.

1705



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 2600 lm
F
CRI >90

Control
1705 _ _ **/** _ _
- _ _ **/ 11 DA**LI-2
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 0,78 x 0,78 x 0,58 m
Vol 0,3508 m³
Gross weight 6,7 Kg Net weight 2,99 Kg

Notes
Rigid stem

LED IP44

1707



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 2600 lm
F
CRI >90

Control
1707 _ _ **/** _ _
- _ _ **/ 11 DA**LI-2
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 0,66 x 0,66 x 0,61 m
Vol 0,2665 m³
Gross weight 5,8 Kg Net weight 2,7 Kg

Notes
Rigid stem

LED IP44

1709



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 2600 lm
F
CRI >90

Control
1709 _ _ **/** _ _
- _ _ **/ 11 DA**LI-2
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 26W 600mA
Constant Current 600 mA
220~240V 50/60Hz

Packaging
1 Box 1,02 x 0,53 x 0,60 m
Vol 0,3217 m³
Gross weight 6,6 Kg Net weight 2,98 Kg

Notes
Rigid stem

LED IP44



Rigid stem

Closer surface canopy adapts to both flat and sloped ceilings, ensuring correct luminaire orientation.
Two rigid stems (106 cm and 150 cm) are included in the packaging to select the appropriate installation height.

1160 | 10 | /1 | A
Model | Finish | LED Colour Temperature | Control

1710



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 1440 lm
E
CRI >90

Control
1710 _ _ **/** _ _

_ _ **/ 15** Push

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 6W 3,7V
Constant Voltage 24V
220~240V. 50/60Hz

Packaging
1 Box 0,79 x 0,79 x 0,74 m
Vol 0,4629 m³
Gross weight 6,9 Kg Net weight 2,4 Kg

Notes
Portable with battery.
Battery capacity 20.800 mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
10 h at 100% Intensity.
20 h at 50%Intensity.
40 h at 25% Intensity.
The first battery charge must be 14 h.
Plug-in driver IP44
Cable length: 3 m

LED IP65

1712



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 1440 lm
E
CRI >90

Control
1712 _ _ **/** _ _

_ _ **/ 15** Push

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 6W 3,7V
Constant Voltage 24V
220~240V. 50/60Hz

Packaging
1 Box 0,79 x 0,79 x 0,74 m
Vol 0,4629 m³
Gross weight 6,8 Kg Net weight 2,3 Kg

Notes
Portable with battery.
Battery capacity 20.800 mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
10 h at 100% Intensity.
20 h at 50%Intensity.
40 h at 25% Intensity.
The first battery charge must be 14 h.
Plug-in driver IP44
Cable length: 3 m

LED IP65

1714



Finishes
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature
/1 _ 2700 K - 1440 lm
E
CRI >90

Control
1714 _ _ **/** _ _

_ _ **/ 15** Push

Materials
Body: Aluminium. Shade: Polyester.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics
1 x LED PLATE 6W 3,7V
Constant Voltage 24V
220~240V. 50/60Hz

Packaging
1 Box 1,02 x 0,53 x 0,60 m
Vol 0,3217 m³
Gross weight 6,1 Kg Net weight 2,5 Kg

Notes
Portable with battery.
Battery capacity 20.800 mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
10 h at 100% Intensity.
20 h at 50%Intensity.
40 h at 25% Intensity.
The first battery charge must be 14 h.
Plug-in driver IP44
Cable length: 3 m

LED IP65

Product specifications subject to change without notice. Please check vibia.com for updated information.



Asia

Design by Antoni Arola

The Asia collection combines refinement, simplicity, and warmth.
It captures the serenity of traditional Oriental gabled rooftops
and the delicacy of a molded glass, reimagined into
an elegantly timeless luminaire.

Pendant

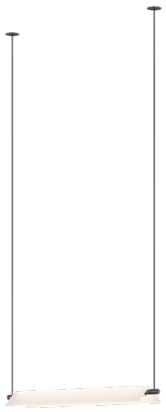

3625
45 cm

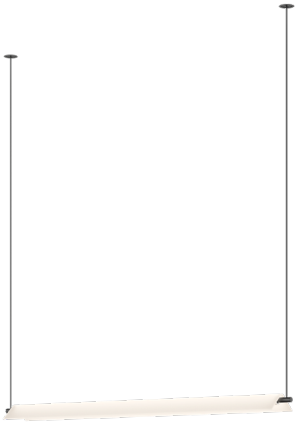

3627
85 cm

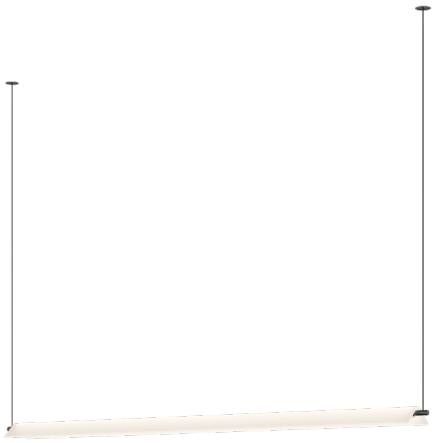

3630
125 cm

3625



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 553 lm
F
CRI >90

Control

3625 _ _ / _ _

- _ _ / **11** DALI-2
- _ _ / **1B** Push; 1-10V
- _ _ / **1Z** Casambi

Select Electrical connection


Surface


Built-in XS

Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Shade: Lacquered glass.
Body: Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 5,6W
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,15 x 0,78 x 0,31 m
Vol 0,036 m³
Gross weight 2,5 Kg Net weight 1,1 Kg

LED IP20 Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

3627



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1185 lm

F

CRI >90

Control

3627 _ _ **/** _ _

- _ _ **/ 11** DALI-2
- _ _ **/ 1B** Push; 1-10V
- _ _ **/ 1Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

- **_10** Surface
- **_23** Built-in XS
- **_31** Remote Micro

Materials

Shade: Lacquered glass.
Body: Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 12W
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,15 x 0,17 x 0,31 m
Vol 0,054 m³
Gross weight 3,3 Kg Net weight 1,8 Kg

LED | IP20 | Bi-volt

3630



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1817 lm

F

CRI >90

Control

3630 _ _ **/** _ _

- _ _ **/ 11** DALI-2
- _ _ **/ 1B** Push; 1-10V
- _ _ **/ 1Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

- **_10** Surface
- **_23** Built-in XS
- **_31** Remote Micro

Materials

Shade: Lacquered glass.
Body: Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 18,4W
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,15 x 1,58 x 0,31 m
Vol 0,073 m³
Gross weight 4,2 Kg Net weight 2,4 Kg

LED | IP20 | Bi-volt

1160 | 10 | /1 | A | _18
Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendants

Select Electrical connection

Choose your preferred installation option according to your needs.

For Ref. 3625

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



21,5 x 5,8 x 5,8 cm

Black finish.

For Ref. 3627, 3630

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



27 x 5,8 x 5,8 cm

Black finish.

Remote



Built-in









Product specifications subject to change without notice. Please check vibia.com for updated information.



Floor Table



3635
30 x 40 cm



3637
55 x 40 cm



3640
30 x 112 cm

3635



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 331 lm
F
CRI >90

Control
3635 _ _ **/** _ _
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Materials
Shade: Lacquered glass.
Body: Steel / Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics
1 x LED STRIP 24V 3,4W
Constant Voltage 24V
100~240V. 50/60Hz

Packaging
1 Box 0,15 x 0,37 x 0,48 m
Vol 0,027 m³
Gross weight 3,1 Kg Net weight 1,8 Kg

Notes
Cable length: 2,5 m.

LED □ IP20 CE UK CA EAC Bi-volt

3637



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature
/1 _ 2700 K - 662 lm
F
CRI >90

Control
3637 _ _ **/** _ _
- _ _ **/ 15** Push
- _ _ **/ 1Z** Casambi

Materials
Shade: Lacquered glass.
Body: Steel / Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics
2 x LED STRIP 24V 3,4W
Constant Voltage 24V
100~240V. 50/60Hz

Packaging
1 Box 0,20 x 0,49 x 0,64 m
Vol 0,063 m³
Gross weight 4,5 Kg Net weight 2,2 Kg

Notes
Cable length: 2,5 m.

LED □ IP20 CE UK CA EAC Bi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

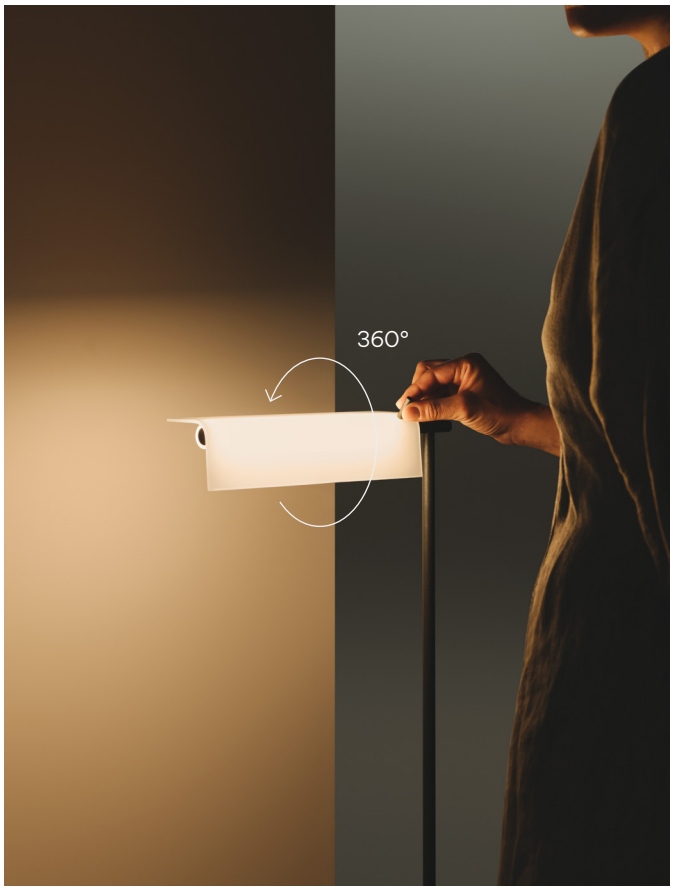



3640

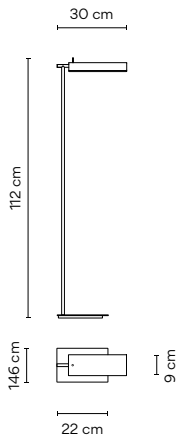

Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **25/** _ _ Beige D1 (NCS S 4005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 331 lm

F

CRI >90

Control

3640 _ _ **/** _ _

_ _ **/ 15** Push

_ _ **/ 1Z** Casambi

Materials

Shade: Lacquered glass.
Body: Steel / Stainless steel.
Diffuser: PC- Polycarbonate.
External diffuser: Ultra-clear quartz glass.

Light Source and electronics

1 x LED STRIP 24V 3,4W
Constant Voltage 24V
100~240V. 50/60Hz

Packaging

1 Box 0,30 x 1,27 x 0,45 m
Vol 0,171 m^3
Gross weight 6,7 Kg Net weight 3,2 Kg

Notes

Cable length: 2,5 m.
Switch on the cable.

LED IP20 Bi-volt

Floor switch



Table switch



Alba

Design by Palomba Serafini Associati

Alba evokes dawn's first light with two softly balanced volumes, a glossy circular base and a luminous cylindrical diffuser, meeting in a subtle tangent to create a poetic, ethereal glow that blends form and illumination.

Floor Table



3780

Ø 20 cm

3780



Finishes

- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **38/** _ _ Terra Dark (NCS S 5040-Y70R)
- **56/** _ _ Green D1 (NCS S 7010-G30Y)

LED Colour Temperature

/1 _ 2700 K - 218 lm

F

CRI >90

Control

3780 _ _ **/** _ _

_ _ **/ 15** Push

Materials

Body: Aluminium.
Diffuser: PMMA - Polymethylmethacrylate.

Light Source and electronics

1 x LED 2,1W 700mA
Constant Voltage 24V
5V 2A 50/60Hz

Packaging

1 Box 0,13 x 0,31 x 0,13 m
Vol 0,0052 m³
Gross weight 0,9 Kg Net weight 0,6 Kg

Notes

Portable with battery.

Battery capacity 5.000mAh.
Battery voltage 3,7V.
Rechargeable battery autonomy:
15h at 100% Intensity.
30h at 50% Intensity.
60h at 25% Intensity.

The first battery charge must be 12 h.
Cable length: 1,5 m

LED IP20 Bi-volt



A52280/00

USB-C charger
DC5V 2A 10W

Control

A52280 / 00

Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 | 10 | /1 | A

Model | Finish | LED Colour Temperature | Control



Nexum

Design by Arik Levy

Nexum reinterprets the chandelier with intertwining metal profiles, creating a balanced, three-dimensional light that fuses geometry and character into a striking statement.

Volumetric

PENDANT - DOWNLIGHTING



5100
60 x 60 cm
4 LEDs



5102
90 x 40 cm
6 LEDs

PENDANT - DOWNLIGHTING & UPLIGHTING



5104
120 x 120 cm
12 LEDs



5110
Ø 120 cm
16 LEDs



5112
Ø 180 cm
16 LEDs



5106
270 x 270 cm
16 LEDs

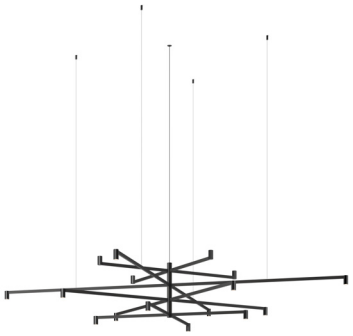

5114
Ø 270 cm
16 LEDs

Product specifications subject to change without notice. Please check vibia.com for updated information.

5100



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 1212 lm
/2 _ 3000 K - 1268 lm
/3 _ 3500 K - 1312 lm
/4 _ 4000 K - 1340 lm

G

CRI >90

Control

5100 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection


Surface


Built-in XS


Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

4 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,19 x 0,56 x 0,56 m
Vol 0,059 m³
Gross weight 4,5 Kg Net weight 3 Kg

LED IP20 Multi-volt

5102



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 1818 lm
/2 _ 3000 K - 1902 lm
/3 _ 3500 K - 1968 lm
/4 _ 4000 K - 2010 lm

G

CRI >90

Control

5102 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection


Surface


Built-in XS


Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

6 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,51 x 0,42 x 1,1 m
Vol 0,235 m³
Gross weight 5 Kg Net weight 3,5 Kg

LED IP20 Multi-volt

5104



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3636 lm
/2 _ 3000 K - 3804 lm
/3 _ 3500 K - 3936 lm
/4 _ 4000 K - 4020 lm

G

CRI >90

Control

5104 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

12 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,6 x 1,01 x 1,01 m
Vol 0,612 m³
Gross weight 6,9 Kg Net weight 5 Kg

LED IP20 Multi-volt

5106

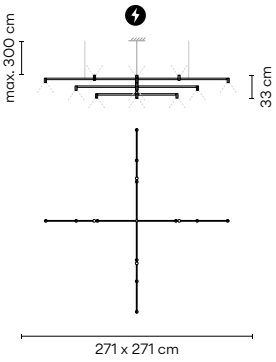

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4848 lm
/2 _ 3000 K - 5072 lm
/3 _ 3500 K - 5248 lm
/4 _ 4000 K - 5360 lm

G

CRI >90

Control

5106 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

16 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,07 x 0,53 x 2,9 m
Vol 0,107 m³
Gross weight 9,9 Kg Net weight 7,5 Kg

LED IP20 Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5110



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4848 lm
/2 _ 3000 K - 5072 lm
/3 _ 3500 K - 5248 lm
/4 _ 4000 K - 5360 lm

G

CRI >90

Control

5110 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection


Surface


Built-in XS


Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

16 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,6 x 1,01 x 1,01 m
Vol 0,612 m³
Gross weight 7,9 Kg Net weight 5,7 Kg

LED IP20 Multi-volt

5112



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4848 lm
/2 _ 3000 K - 5072 lm
/3 _ 3500 K - 5248 lm
/4 _ 4000 K - 5360 lm

G

CRI >90

Control

5112 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection


Surface


Built-in XS


Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

16 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,73 x 1,25 x 1,25 m
Vol 1,140 m³
Gross weight 9,3 Kg Net weight 6,9 Kg

LED IP20 Multi-volt



5114

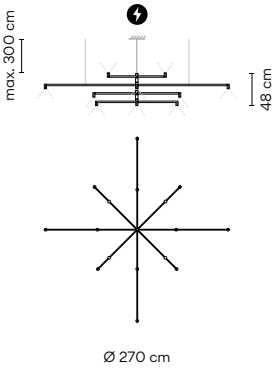

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4848 lm
/2 _ 3000 K - 5072 lm
/3 _ 3500 K - 5248 lm
/4 _ 4000 K - 5360 lm

G

CRI >90

Control

5114 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

16 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,73 x 1,25 x 1,25 m
Vol 1,140 m³
Gross weight 10,8 Kg Net weight 8,2 Kg

LED IP20 Multi-volt

Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



Ø 28 cm
height 3,8 cm

Black finish.

Remote



Built-in



Product specifications subject to change without notice. Please check vibia.com for updated information.

1160 10 /1 A _18

Model
Finish
LED Colour Temperature
Control
Electrical connection
Only for pendants



Lineal

PENDANT & CEILING - DOWNLIGHTING

Ceiling







Pendant





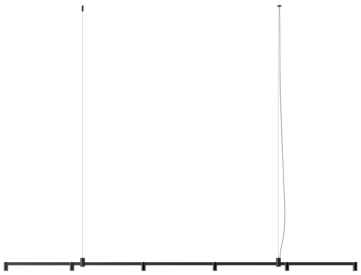

5120
120 cm
3 LEDs

5122
180 cm
4 LEDs

5124
270 cm
6 LEDs

PENDANT DOWNLIGHTING & UPLIGHTING





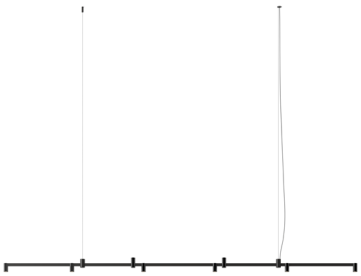

5150
120 cm
4 LEDs

5152
180 cm
6 LEDs

5154
270 cm
8 LEDs

5120

Ceiling and Pendant Option



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 909 lm
/2 _ 3000 K - 951 lm
/3 _ 3500 K - 984 lm
/4 _ 4000 K - 1005 lm

G

CRI >90

Control

5120 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

3 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 1,46 x 0,15 x 0,15 m
Vol 0,032 m³
Gross weight 5,2 Kg Net weight 4 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt

5122

Ceiling and Pendant Option



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 1212 lm
/2 _ 3000 K - 1268 lm
/3 _ 3500 K - 1312 lm
/4 _ 4000 K - 1340 lm

G

CRI >90

Control

5122 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

4 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 2,25 x 0,15 x 0,15 m
Vol 0,050 m³
Gross weight 5,6 Kg Net weight 4,3 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt

5124



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 1818 lm
/2 _ 3000 K - 1902 lm
/3 _ 3500 K - 1968 lm
/4 _ 4000 K - 2010 lm

G

CRI >90

Control

5124 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

6 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 3,3 x 0,15 x 0,15 m
Vol 0,074 m^3
Gross weight 6 Kg Net weight 4,7 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt

5150



Finishes

● **11/** _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 1212 lm
/2 _ 3000 K - 1268 lm
/3 _ 3500 K - 1312 lm
/4 _ 4000 K - 1340 lm

G

CRI >90

Control

5150 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

4 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 1,46 x 0,15 x 0,15 m
Vol 0,032 m^3
Gross weight 5,6 Kg Net weight 4,3 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt



Product specifications subject to change without notice. Please check vibia.com for updated information.

5152



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 1818 lm
/2 _ 3000 K - 1902 lm
/3 _ 3500 K - 1968 lm
/4 _ 4000 K - 2010 lm

G

CRI >90

Control

5152 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

6 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 2,25 x 0,15 x 0,15 m
Vol 0,050 m³
Gross weight 5,9 Kg Net weight 4,6 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt

5154



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 2424 lm
/2 _ 3000 K - 2536 lm
/3 _ 3500 K - 2624 lm
/4 _ 4000 K - 2680 lm

G

CRI >90

Control

5154 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

8 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 3,3 x 0,15 x 0,15 m
Vol 0,074 m³
Gross weight 6,3 Kg Net weight 5 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt

Rectangular

PENDANT & CEILING - DOWNLIGHTING

Ceiling







Pendant



5130
120 cm
7 LEDs



5132
180 cm
10 LEDs



5134
270 cm
16 LEDs

PENDANT DOWNLIGHTING & UPLIGHTING



5160
120 cm
8 LEDs



5162
180 cm
12 LEDs



5164
270 cm
18 LEDs

Product specifications subject to change without notice. Please check vibia.com for updated information.

5130

Ceiling and Pendant Option



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 2121 lm
/2 _ 3000 K - 2219 lm
/3 _ 3500 K - 2296 lm
/4 _ 4000 K - 2345 lm

G

CRI >90

Control

5130 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

7 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,35x 0,68 m
Vol 0,166 m³
Gross weight 6,9 Kg Net weight 4,8 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt

5132

Ceiling and Pendant Option



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3030 lm
/2 _ 3000 K - 3170 lm
/3 _ 3500 K - 3280 lm
/4 _ 4000 K - 3350 lm

G

CRI >90

Control

5132 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface



Built-in XS



Remote
Micro

_10 Surface
_23 Built-in XS
_31 Remote
Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

10 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,92x 0,68 m
Vol 0,237 m³
Gross weight 7,9 Kg Net weight 5,6 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt

5134



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4848 lm
/2 _ 3000 K - 5072 lm
/3 _ 3500 K - 5248 lm
/4 _ 4000 K - 5360 lm

G

CRI >90

Control

5134 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

16 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,92 x 0,68 m
Vol 0,237 m³
Gross weight 11,2 Kg Net weight 8,3 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt

5160



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 2424 lm
/2 _ 3000 K - 2536 lm
/3 _ 3500 K - 2624 lm
/4 _ 4000 K - 2680 lm

G

CRI >90

Control

5160 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

8 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,35 x 0,68 m
Vol 0,166 m³
Gross weight 7,2 Kg Net weight 5,1 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt





Product specifications subject to change without notice. Please check vibia.com for updated information.

5162



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3636 lm
/2 _ 3000 K - 3804 lm
/3 _ 3500 K - 3936 lm
/4 _ 4000 K - 4020 lm

G

CRI >90

Control

5162 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

12 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,92 x 0,68 m
Vol 0,237 m³
Gross weight 8,3 Kg Net weight 5,9 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt

5164



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 5454 lm
/2 _ 3000 K - 5706 lm
/3 _ 3500 K - 5904 lm
/4 _ 4000 K - 6030 lm

G

CRI >90

Control

5164 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

18 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,92 x 0,68 m
Vol 0,237 m³
Gross weight 11,6 Kg Net weight 8,6 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt



Select Electrical connection

Choose your preferred installation option according to your needs.

For Ref. 5120, 5122, 5124, 5130, 5150, 5122, 5124, 5160

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



28 x 4,5 x 9,6 cm

Black finish.

For Ref. 5132, 5134, 5162, 5164

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



40 x 4,5 x 9,6 cm

Black finish.

Remote



Built-in





Square

PENDANT & CEILING - DOWNLIGHTING

Ceiling



5140
120 x 120 cm
12 LEDs



5142
180 x 180 cm
12 LEDs

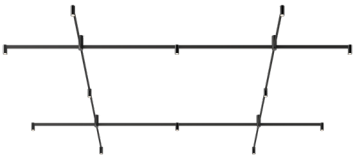

5144
270 x 270 cm
12 LEDs

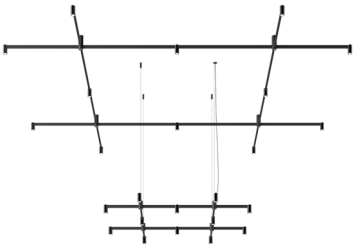

5146
120 x 120 cm
270 x 270 cm
24 LEDs

Pendant



5140
120 x 120 cm
12 LEDs



5142
180 x 180 cm
12 LEDs

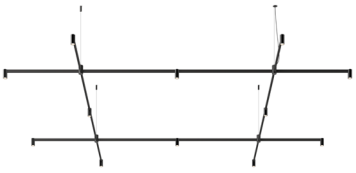

5144
270 x 270 cm
12 LEDs

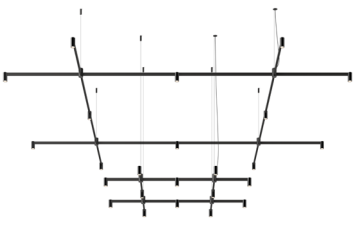

5146
120 x 120 cm
270 x 270 cm
24 LEDs

Product specifications subject to change without notice. Please check vibia.com for updated information.

PENDANT - DOWNLIGHTING & UPLIGHTING



5170
120 x 120 cm
14 LEDs



5172
180 x 180 cm
14 LEDs

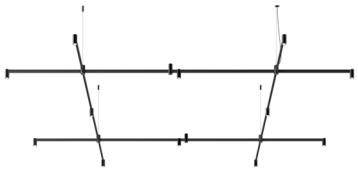

5174
270 x 270 cm
14 LEDs

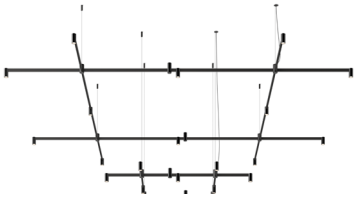

5176
120 x 120 cm
270 x 270 cm
28 LEDs

5140

Ceiling and Pendant Option



Finishes
11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature
/1 _ 2700 K - 3636 lm
/2 _ 3000 K - 3804 lm
/3 _ 3500 K - 3936 lm
/4 _ 4000 K - 4020 lm
G
CRI >90

Control
5140 _ _ / _ _
_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection


Surface


Built-in XS


Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics
12 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging
1 Box 0,18 x 1,35 x 1,35 m
Vol 0,328 m^3
Gross weight 8,3 Kg Net weight 6 Kg

Notes
Option to add extra spots (please consult us).

LED IP20 Multi-volt

5142

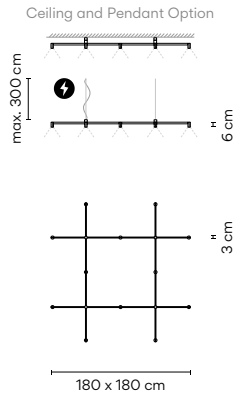

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3636 lm
/2 _ 3000 K - 3804 lm
/3 _ 3500 K - 3936 lm
/4 _ 4000 K - 4020 lm

G

CRI >90

Control

5142 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

12 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,35 x 1,35 m
Vol 0,328 m³
Gross weight 9,1 Kg Net weight 6,6 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt

5144

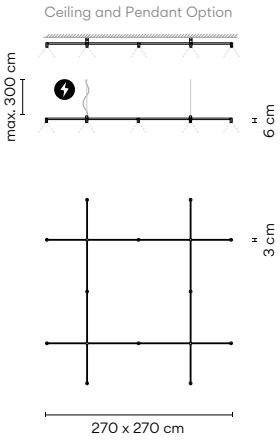

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 3636 lm
/2 _ 3000 K - 3804 lm
/3 _ 3500 K - 3936 lm
/4 _ 4000 K - 4020 lm

G

CRI >90

Control

5144 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

12 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,68 x 1,68 m
Vol 0,508 m³
Gross weight 10,3 Kg Net weight 7,6 Kg

Notes

Option to add extra spots (please consult us).

LED | IP20 | Multi-volt

Product specifications subject to change without notice. Please check vibia.com for updated information.

5146

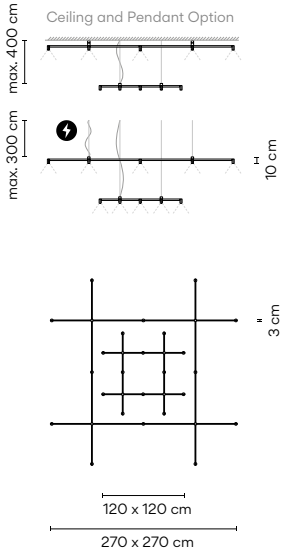

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 7272 lm
/2 _ 3000 K - 7608 lm
/3 _ 3500 K - 7872 lm
/4 _ 4000 K - 8040 lm

G

CRI >90

Control

5146 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

24 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

2 Boxes
Total Vol 0,508 m³
Gross weight 18 Kg Net weight 13,6 Kg

Notes

Option to add extra spots (please consult us).
Requires only one electrical connection.

LED IP20 Multi-volt

5170



Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4242 lm
/2 _ 3000 K - 4438 lm
/3 _ 3500 K - 4592 lm
/4 _ 4000 K - 4690 lm

G

CRI >90

Control

5170 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

14 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,35 x 1,35 m
Vol 0,328 m³
Gross weight 8,6 Kg Net weight 6,3 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt

5172

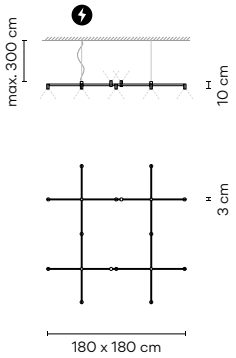

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4242 lm
/2 _ 3000 K - 4438 lm
/3 _ 3500 K - 4592 lm
/4 _ 4000 K - 4690 lm

G

CRI >90

Control

5172 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

14 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,35 x 1,35 m
Vol 0,328 m³
Gross weight 9,4 Kg Net weight 6,9 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt

5174

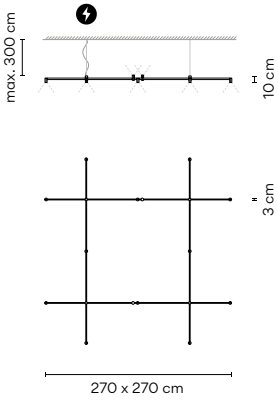

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 4242 lm
/2 _ 3000 K - 4438 lm
/3 _ 3500 K - 4592 lm
/4 _ 4000 K - 4690 lm

G

CRI >90

Control

5174 _ _ **/** _ _

_ _ **/** _ **1** DALI-2
_ _ **/** _ **3** 1-10V
_ _ **/** _ **Z** Casambi

Select Electrical connection



Surface | Built-in XS | Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

14 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

1 Box 0,18 x 1,68 x 1,68 m
Vol 0,508 m³
Gross weight 10,6 Kg Net weight 7,9 Kg

Notes

Option to add extra spots (please consult us).

LED IP20 Multi-volt





Product specifications subject to change without notice. Please check vibia.com for updated information.

5176

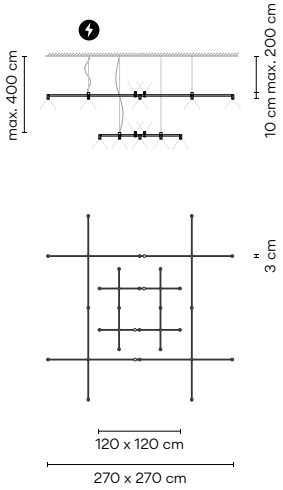

Finishes

11/ _ _ Black
(NCS S 8500-N)

LED Colour Temperature

/1 _ 2700 K - 8484 lm
/2 _ 3000 K - 8876 lm
/3 _ 3500 K - 9184 lm
/4 _ 4000 K - 9380 lm

G

CRI >90

Control

5176 _ _ / _ _

_ _ / _ **1** DALI-2
_ _ / _ **3** 1-10V
_ _ / _ **Z** Casambi

Select Electrical connection


Surface


Built-in XS


Remote Micro

_10 Surface
_23 Built-in XS
_31 Remote Micro

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.
Canopy: Fe-Iron.

Light Source and electronics

28 x LED 5W 250mA
Constant Voltage 24V
90~305V. 50/60Hz

Packaging

2 Boxes
Total Vol 0,836 m³
Gross weight 18 Kg Net weight 13,9 Kg

Notes

Option to add extra spots (please consult us).
Requires only one electrical connection.

LED IP20 Multi-volt

Select Electrical connection

Choose your preferred installation option according to your needs.

For Refs. 5140, 5142, 5144, 5170, 5172, 5174

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



29 x 29 x 4 cm

Black finish.

For Refs. 5146, 5176

Drop ceiling

_31
Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_23
Built-in XS



Ø 8 cm
height 6 cm

Black finish.

Regular ceiling

_10
Surface



29 x 29 x 4 cm

Black finish.

Remote



Built-in



Use Guide

The Nexum collection is structured into four typologies: Lineal, Rectangular, Square and Volumetric.
Each configuration responds to a specific geometry and a defined method of light distribution, providing solutions adapted to different spatial scales and lighting requirements.
This user guide outlines the recommended application of each typology, supporting accurate specification according to the characteristics of the space and enabling the selection of the most appropriate illuminance level for each type of environment.

Nexum delivers even ground illumination from elevated heights, with precisely positioned spotlights and calibrated beam angles ensuring controlled, uniform light.



This diagram provides a general graphical reference on which the lighting calculations are based, considering two standard suspension heights (H1, H2). Depending on the typology, these heights may vary, as spatial integration and resulting illuminance levels differ according to the selected luminaire.

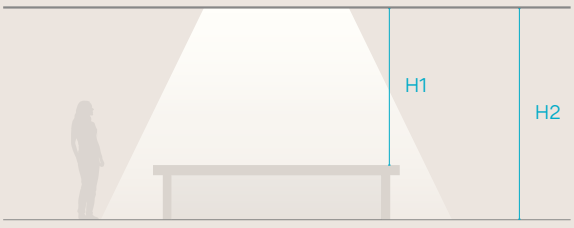

Lineal

The Lineal typology is ideal for longitudinal spaces where uniformity and precision are required.

Its distribution optimizes the lighting on continuous surfaces such as kitchen islands, workstations or corridors, ensuring visual comfort and a clean reading of the space.

It is particularly suitable for environments where functionality and light clarity are a priority, providing a balance between technical performance and discreet presence.

The **Downlighting & Uplighting** version enhances the perception of luminosity within the space. By illuminating the ceiling, it creates a more expansive ambient light with fewer light points.

*** H1 = 1 m**
Distance from the luminaire to a table or other surface to be illuminated

*** H2 = 3 m**
Distance from the luminaire to the floor

PENDANT & CEILING - DOWNLIGHTING

5120

120 x 3 cm

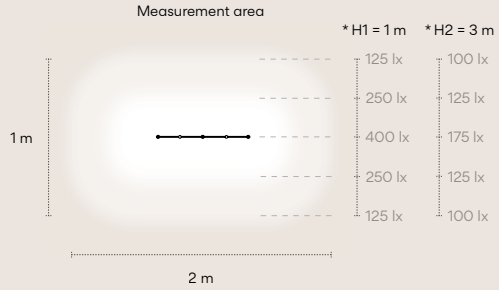

5122

180 x 3 cm

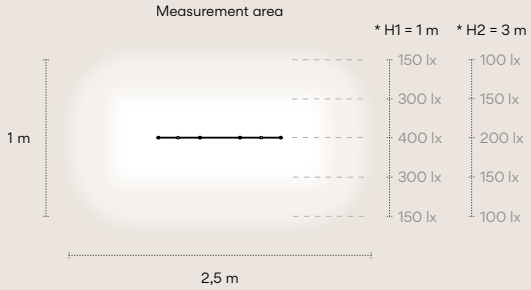

5124

270 x 3 cm

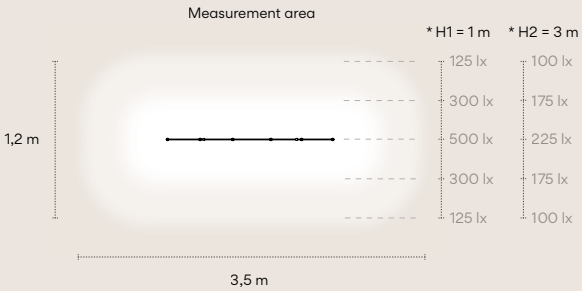

PENDANT - DOWNLIGHTING & UPLIGHTING

5150

120 x 3cm

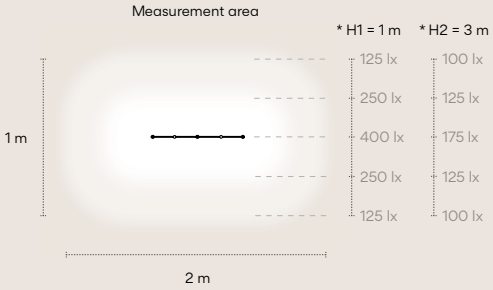

5152

180 x 3cm

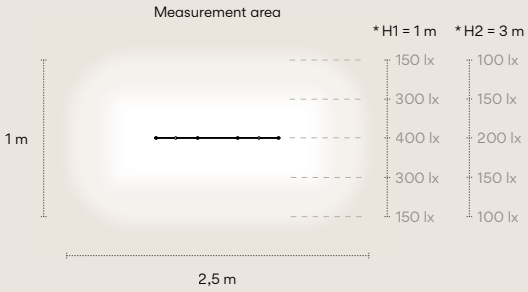

5154

270 x 3 cm

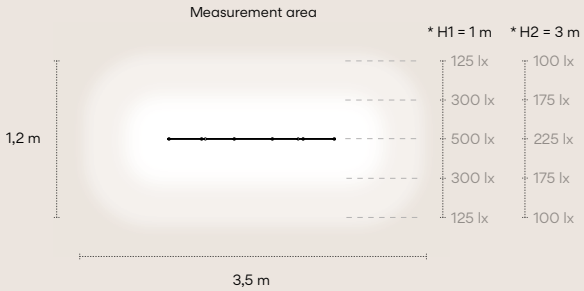



Rectangular

The Rectangular typology structures light within a defined perimeter, generating a sufficient volume of illumination over large and clearly delimited areas.

Suitable for large format tables, meeting/conference rooms requiring **500 lux**, as well as receptions or open workspaces with **300-500 lux** requirements.

Its configuration improves uniformity in wide rectangular planes and facilitates the fulfillment of average illuminance values, optimizing the relationship between number of light points and covered surface.

The **Downlighting & Uplighting** version enhances the overall luminosity of the space. Ideal for meeting rooms, it fosters an atmosphere of concentration and focus, while establishing a clear hierarchy of light that guides the user's gaze.

*** H1 = 1,5 m**
Distance from the luminaire to a table or other surface to be illuminated

*** H2 = 3 m**
Distance from the luminaire to the floor

Product specifications subject to change without notice. Please check vibia.com for updated information.

PENDANT & CEILING - DOWNLIGHTING

5130

120 x 60 cm

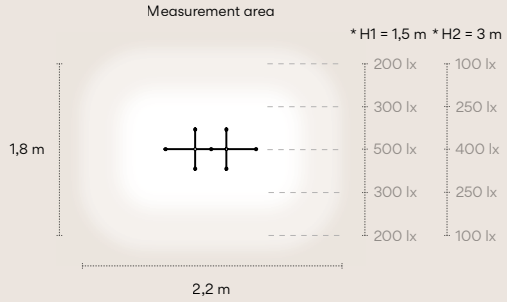

5132

180 x 60 cm

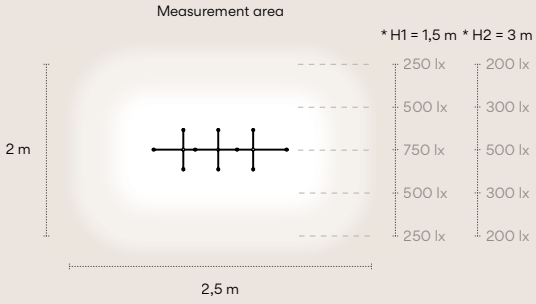

5134

270 x 60 cm

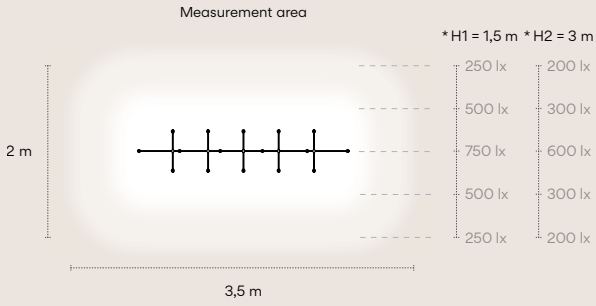

PENDANT - DOWNLIGHTING & UPLIGHTING

5160

120 x 60 cm

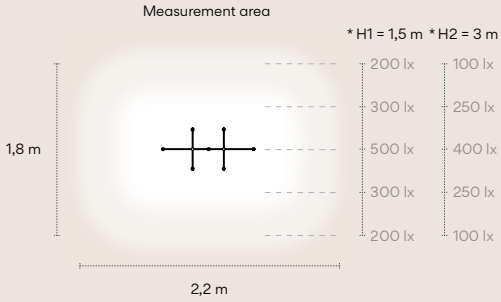

5162

180 x 60 cm

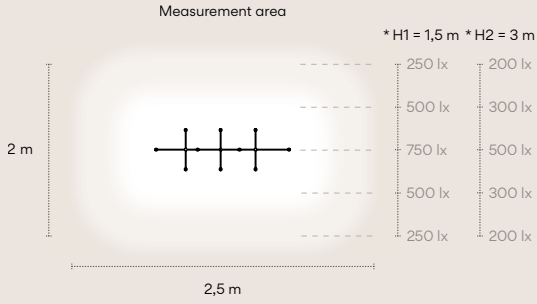

5164

270 x 60 cm

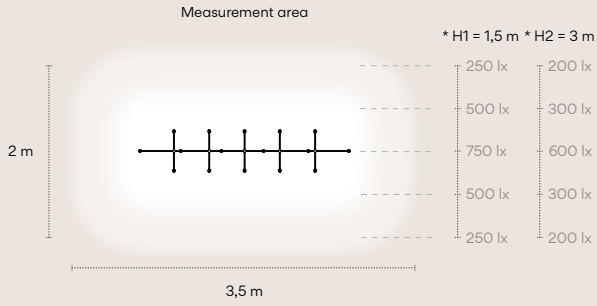

Square

The Square typology is especially suitable for lounge areas, lobbies or medium-sized meeting rooms, where you want to prioritize a specific area without overloading the environment.

It allows reaching **300-500 lux** in meeting rooms, **300 lux** in lounge or hospitality areas for occasional work, and lower levels **200 lux** in transition or waiting zones.

Its configuration favors a balanced uniformity on the useful plane and reduces excessive contrasts, ensuring visual comfort and spatial consistency in medium-scale environments.

By illuminating the ceiling with the **Downlighting & Uplighting** luminaires, a greater sense of luminosity is achieved throughout the space, reducing the number of light points required. For large areas such as lobbies or spacious rooms, it offers an effective solution for creating a well-balanced lighting environment.

PENDANT & CEILING - DOWNLIGHTING

5140

120 x 120 cm

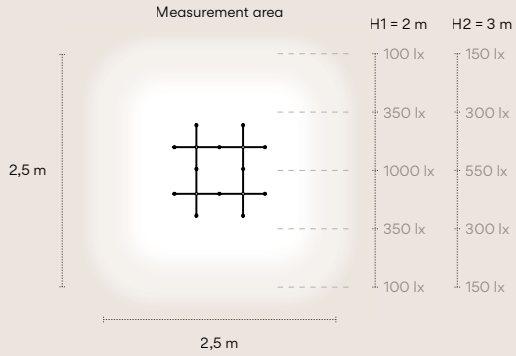

5142

180 x 180 cm

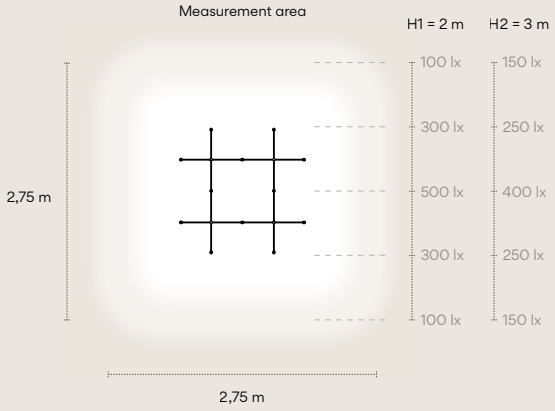

5144

270 x 270 cm

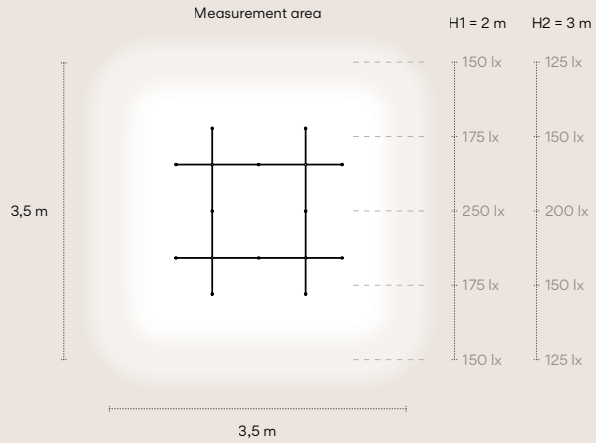

5146

270 x 270 / 120 x 120 cm

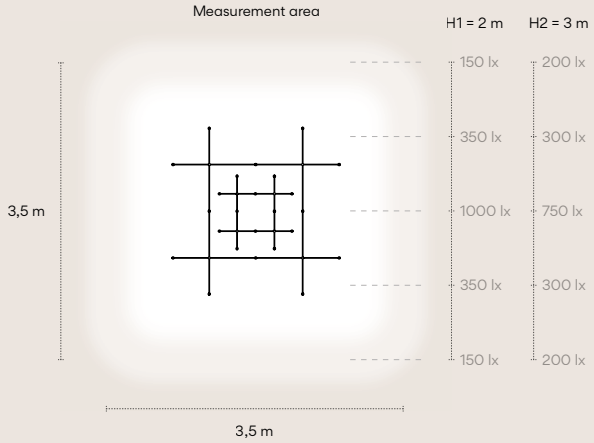

 Product specifications subject to change without notice. Please check vibia.com for updated information.

PENDANT - DOWNLIGHTING & UPLIGHTING

5170

120 x 120 cm

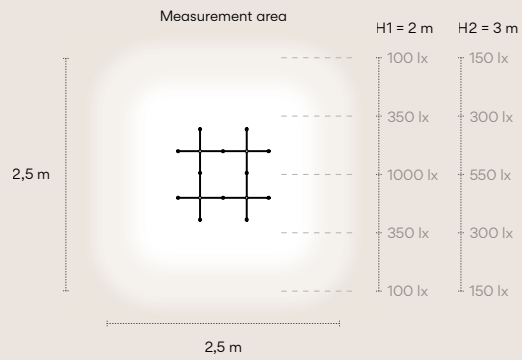

5172

180 x 180 cm

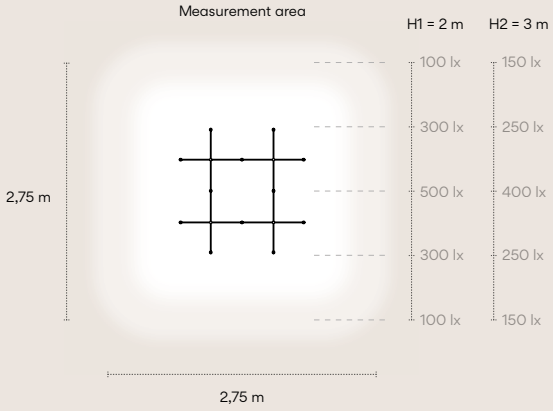

5174

270 x 270 cm

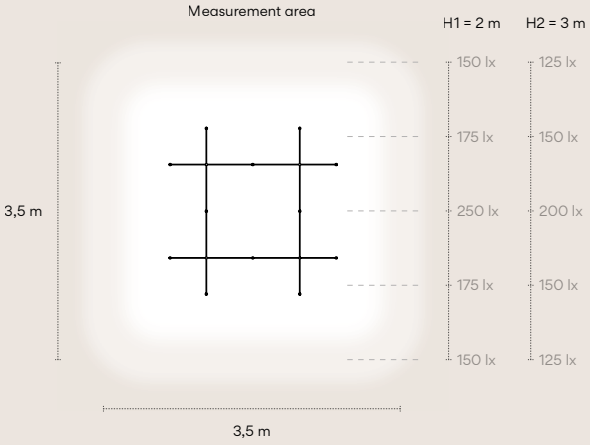

5176

270 x 270 / 120 x 120 cm

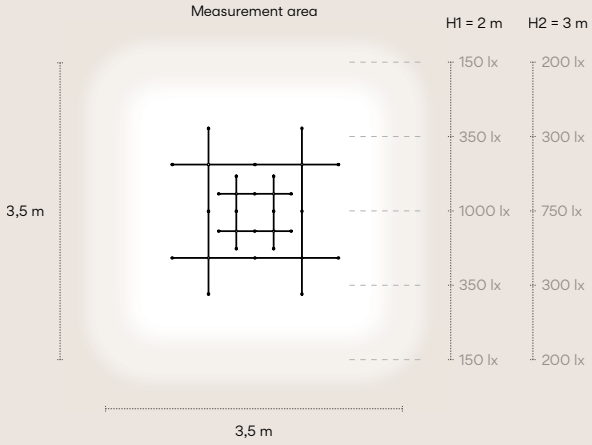

Volumetric

The Volumetric typology incorporates a three-dimensional configuration that multiplies the emission points, allowing to extend the light coverage in larger spaces or with significant heights.

Pendant Downlighting references 5100 and 5102, of more contained dimensions, offer a suitable luminous flux to reach appropriate levels of illuminance in auxiliary tables, coffee tables or workstations of reduced scale, ensuring uniformity and visual comfort.

Downlighting & Uplighting references 5104, 5106, 5110, 5112 and 5114 are designed for larger applications, such as double heights, lobbies, restaurants or showrooms, where a greater coverage area and spatial presence is required.

Its configuration optimizes the distribution of the luminous flux in wide spaces, maintaining a light and architectural structural reading, and facilitating compliance with the lighting and visual comfort requirements specific to contract and representative environments.

*** H1 = 1,5 m**
Distance from the luminaire to a table or other surface to be illuminated

*** H2 = 3 m**
Distance from the luminaire to the floor

PENDANT - DOWNLIGHTING

5100

60 x 60 cm

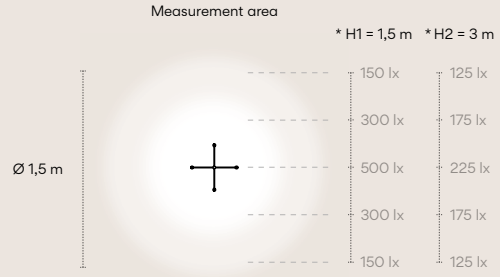

5102

90 x 40 cm

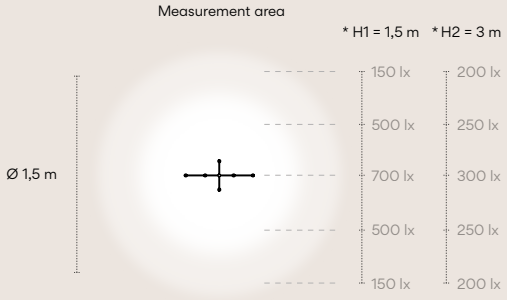

Product specifications subject to change without notice. Please check vibia.com for updated information.

PENDANT - DOWNLIGHTING & UPLIGHTING

5104

120 x 120 cm

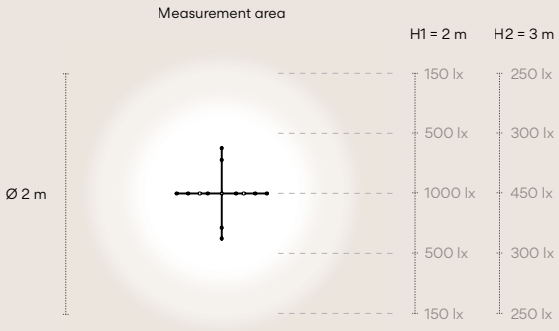

5106

270 x 270 cm

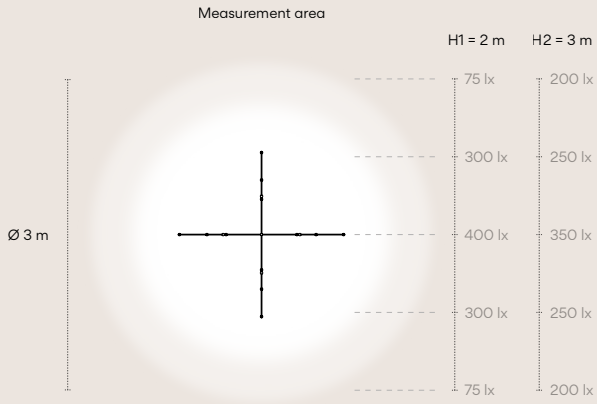

5110

Ø 120 cm

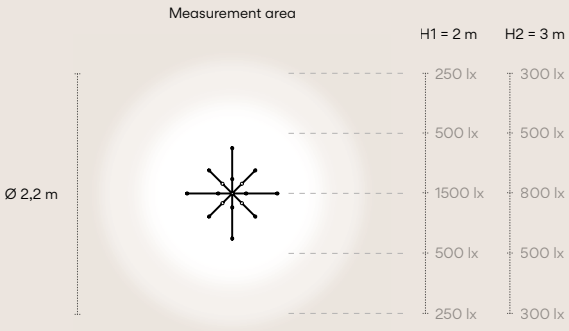

5112

Ø 180 cm

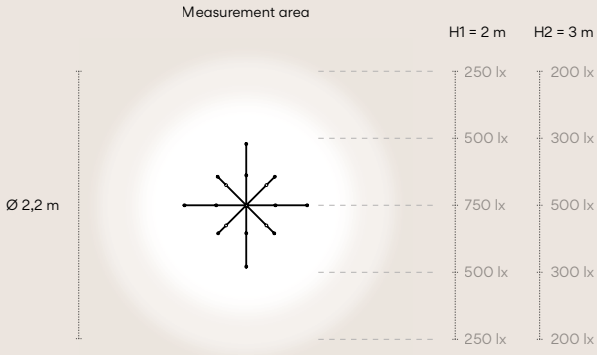

5114

Ø 270 cm

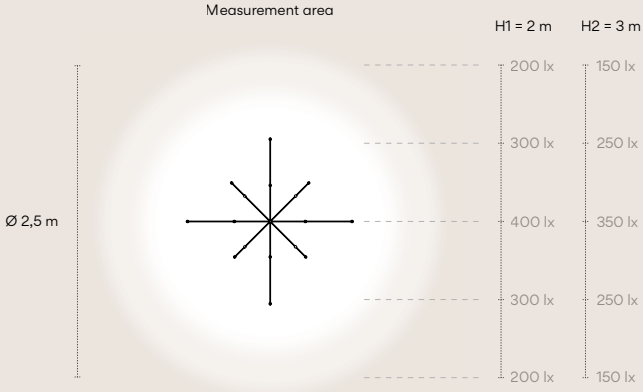

Pro

Design by Holscher Design

The spotlight concept is reimagined with Pro. Three different diameters offer greater compositional freedom, combining various levels of high-performance luminous flux while ensuring visual harmony between luminaires of different sizes within a project. Pro shapes spaces, moods and atmospheres through dynamic light effects, expressed in a sculptural and refined geometry that integrates seamlessly into any interior project.

Ceiling - Accent Spotlight

Ceiling Surface



Ø 7 cm

7000 Narrow
7002 Medium
7004 Wide



Ø 9 cm

7010 Narrow
7012 Medium
7014 Wide



Ø 12 cm

7020 Narrow
7022 Medium
7024 Wide

Ceiling Trim



Ø 7 cm

7030 Narrow
7032 Medium
7034 Wide



Ø 9 cm

7040 Narrow
7042 Medium
7044 Wide



Ø 12 cm

7050 Narrow
7052 Medium
7054 Wide

Ceiling Trimless



Ø 7 cm

7030 Narrow
7032 Medium
7034 Wide



Ø 9 cm

7040 Narrow
7042 Medium
7044 Wide



Ø 12 cm

7050 Narrow
7052 Medium
7054 Wide

Product specifications subject to change without notice. Please check vibia.com for updated information.

7000
SURFACE Narrow
7002
SURFACE Medium
7004
SURFACE Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1098 lm
/2 _ 3000 K - 1148 lm
/3 _ 3500 K - 1189 lm
/4 _ 4000 K - 1214 lm
F

Control
7000 _ _ / _ _
7002 _ _ / _ _
7004 _ _ / _ _

_ _ / _ **0**_ **10** On/ Off
_ _ / _ **D**_ **10** Push; DALI-2
_ _ / _ **Z**_ **10** Casambi



Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
1 x LED 10,4W 600 mA
Constant Current 600 mA
220~240V. 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,71 Kg Net weight 0,61 Kg

LED IP20

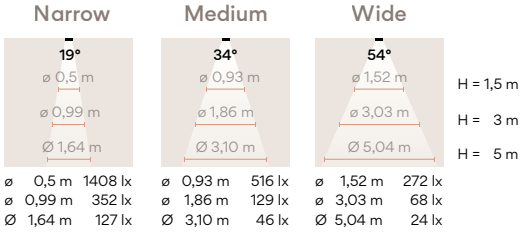

Narrow		Medium		Wide	
ø 0,5 m	1408 lx	ø 0,93 m	516 lx	ø 1,52 m	272 lx
ø 0,99 m	352 lx	ø 1,86 m	129 lx	ø 3,03 m	68 lx
Ø 1,64 m	127 lx	Ø 3,10 m	46 lx	Ø 5,04 m	24 lx

7010
SURFACE Narrow
7012
SURFACE Medium
7014
SURFACE Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1961 lm
/2 _ 3000 K - 2050 lm
/3 _ 3500 K - 2124 lm
/4 _ 4000 K - 2300 lm
E

Control
7010 _ _ / _ _
7012 _ _ / _ _
7014 _ _ / _ _

_ _ / _ **0**_ **10** On/ Off
_ _ / _ **D**_ **10** Push; DALI-2
_ _ / _ **Z**_ **10** Casambi



Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
1 x LED 17,1W 500 mA
Constant Current 500 mA
220~240V. 50/60Hz

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,99 Kg Net weight 0,89 Kg

LED IP20

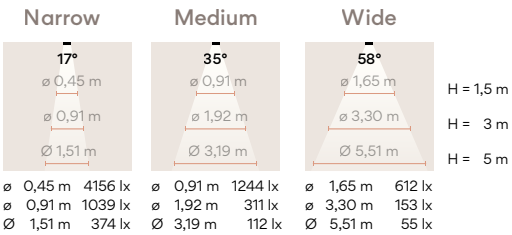

Narrow		Medium		Wide	
ø 0,45 m	4156 lx	ø 0,91 m	1244 lx	ø 1,65 m	612 lx
ø 0,91 m	1039 lx	ø 1,92 m	311 lx	ø 3,30 m	153 lx
Ø 1,51 m	374 lx	Ø 3,19 m	112 lx	Ø 5,51 m	55 lx

7020
SURFACE Narrow
7022
SURFACE Medium
7024
SURFACE Wide

Finishes
11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm
E

Control
7020 _ _ / _ _
7022 _ _ / _ _
7024 _ _ / _ _

_ _ / _ **0**_ **10** On/ Off
_ _ / _ **D**_ **10** Push; DALI-2
_ _ / _ **Z**_ **10** Casambi



Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
1 x LED 24,8W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz

Packaging
1 Box 0,217 x 0,217 x 0,24 m
Vol 0,0113 m³
Gross weight 2,49 Kg Net weight 2,34 Kg

LED IP20

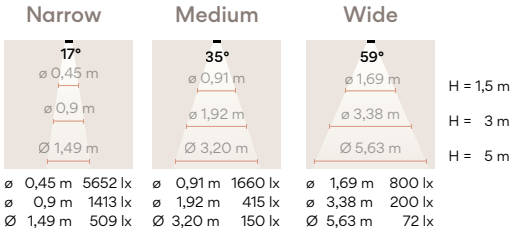

Narrow		Medium		Wide	
ø 0,45 m	5652 lx	ø 0,91 m	1660 lx	ø 1,69 m	800 lx
ø 0,9 m	1413 lx	ø 1,92 m	415 lx	ø 3,38 m	200 lx
Ø 1,49 m	509 lx	Ø 3,20 m	150 lx	Ø 5,63 m	72 lx



Product specifications subject to change without notice. Please check vibia.com for updated information.

7030
Narrow
7032
Medium
7034
Wide

TRIM



TRIMLESS



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1098 lm
/2 _ 3000 K - 1148 lm
/3 _ 3500 K - 1189 lm
/4 _ 4000 K - 1214 lm

Tunable White
/8 _ (1800 K - 4000 K)
308 lm - 504 lm

F

CRI >90

Control

7030 _ _ / _ _
7032 _ _ / _ _
7034 _ _ / _ _

- _ _ / _ **0** On/ Off
- _ _ / _ **D** Push; DALI-2
- _ _ / _ **M** Without driver
- _ _ / _ **Z** Casambi

- _ _ / **81** Tunable White + DALI-2
- _ _ / **8M** Tunable White + Without driver
- _ _ / **8Z** Tunable White + Casambi

Select Electrical connection

Built-in Trim



Built-in Trimess

_2A Built-in Trim
_2B Built-in Trimess

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500 K - 4000 K:
1 x LED 10,4W 600 mA
Constant Current 600 mA
220~240V. 50/60Hz

Tunable White:
1 x LED 5,5 W 150 mA
Constant Current 150 mA
110~240V. 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,51 Kg Net weight 0,41 Kg

TRIM

LED ☐ IP20 CE UK CA EAC Ø 9 cm

TRIMLESS

LED ☐ IP20 CE UK CA EAC Ø 10,6 cm

Narrow		Medium		Wide	
19°		34°		54°	
ø 0,5 m	1408 lx	ø 0,93 m	516 lx	ø 1,52 m	272 lx
ø 0,99 m	352 lx	ø 1,86 m	129 lx	ø 3,03 m	68 lx
Ø 1,64 m	127 lx	Ø 3,10 m	46 lx	Ø 5,04 m	24 lx

H = 1,5 m
H = 3 m
H = 5 m





7040
Narrow
7042
Medium
7044
Wide

TRIM



TRIMLESS



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1961 lm
/2 _ 3000 K - 2050 lm
/3 _ 3500 K - 2124 lm
/4 _ 4000 K - 2300 lm
E

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm
F

CRI >90

Control

7040 _ _ / _ _
7042 _ _ / _ _
7044 _ _ / _ _

_ _ / _ **0**	On/ Off
_ _ / _ **D**	Push; DALI-2
_ _ / _ **M**	Without driver
_ _ / _ **Z**	Casambi
_ _ / **81**	Tunable White + DALI-2
_ _ / **8M**	Tunable White + Without driver
_ _ / **8Z**	Tunable White + Casambi

Select Electrical connection

Built-in Trim



Built-in Trimess

_2A Built-in Trim
_2B Built-in Trimess

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500 K - 4000 K:
1 x LED 17,1W 500 mA
Constant Current 500 mA
220~240V. 50/60Hz

Tunable White:
1 x LED 8,9W 500 mA
Constant Current 500 mA
110~240V. 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m^3
Gross weight 0,84 Kg Net weight 0,74 Kg

TRIM

LED ☐ IP20 CE UK CA EAC Ø 11,6 cm

TRIMLESS

LED ☐ IP20 CE UK CA EAC Ø 13,2 cm

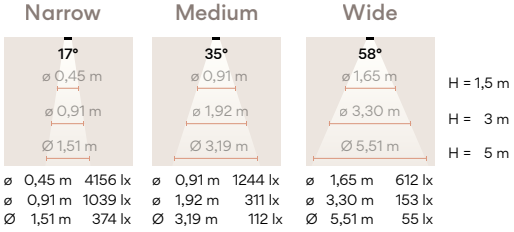

Product specifications subject to change without notice. Please check vibia.com for updated information.

7050
Narrow
7052
Medium
7054
Wide

TRIM



TRIMLESS



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm
E

Tunable White
/8 _ (1800 K - 4000 K)
735 lm - 1152 lm
F

CRI >90

Control

7050 _ _ / _ _
7052 _ _ / _ _
7054 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **D** Push; DALI-2
_ _ / _ **M** Without driver
_ _ / _ **Z** Casambi

_ _ / **81** Tunable White + DALI-2
_ _ / **8M** Tunable White + Without driver
_ _ / **8Z** Tunable White + Casambi

Select Electrical connection



Built-in Trim



Built-in Trimess

_2A Built-in Trim
_2B Built-in Trimess

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

2700 K - 3000 K - 3500 K - 4000 K:
1 x LED 24,8W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz

Tunable White:
1 x LED 12,6W 700 mA
Constant Current 700 mA
110~240V. 50/60Hz

Packaging

1 Box 0,217 x 0,217 x 0,24 m
Vol 0,0113 m³
Gross weight 2,15 Kg Net weight 2,00 Kg

TRIM

LED ☐ IP20 CE UK CA EAC Ø 15,6 cm

TRIMLESS

LED ☐ IP20 CE UK CA EAC Ø 17,2 cm

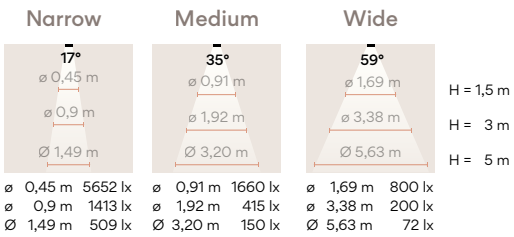

Ceiling - Track-mounted - Accent Spotlight

Track Surface



Ø 7 cm

7060 Narrow
7062 Medium
7064 Wide



Ø 9 cm

7070 Narrow
7072 Medium
7074 Wide



Ø 12 cm

7080 Narrow
7082 Medium
7084 Wide

Track Trimless



Ø 7 cm

7060 Narrow
7062 Medium
7064 Wide



Ø 9 cm

7070 Narrow
7072 Medium
7074 Wide



Ø 12 cm

7080 Narrow
7082 Medium
7084 Wide

Product specifications subject to change without notice. Please check vibia.com for updated information.

7060
Narrow
7062
Medium
7064
Wide

TRACK SURFACE



TRACK TRIMLESS



Finishes

11/ _ _ Black
(NCS S 8500-N)
23/ _ _ Warm White
(NCS S 0502-Y50R)
24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1098 lm
/2 _ 3000 K - 1148 lm
/3 _ 3500 K - 1189 lm
/4 _ 4000 K - 1214 lm
F

Control

7060 _ _ / _ _
7062 _ _ / _ _
7064 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

Select Electrical connection



Track Surface



Track Trimless

_TX Track Surface
_TZ Track Trimess

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

1 x LED 10,4W 600 mA
Constant Current 600 mA
48V. 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,51 Kg Net weight 0,41 Kg

LED IP20

Narrow		Medium		Wide	
19°		34°		54°	
ø 0,5 m	1408 lx	ø 0,93 m	516 lx	ø 1,52 m	272 lx
ø 0,99 m	352 lx	ø 1,86 m	129 lx	ø 3,03 m	68 lx
Ø 1,64 m	127 lx	Ø 3,10 m	46 lx	Ø 5,04 m	24 lx

H = 1,5 m
H = 3 m
H = 5 m

7070
Narrow
7072
Medium
7074
Wide

TRACK SURFACE



TRACK TRIMLESS



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm

E

Control

7070 _ _ / _ _
7072 _ _ / _ _
7074 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

Select Electrical connection



Track Surface



Track Trimless

_TX Track Surface
_TZ Track Trimess

Materials

Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics

1 x LED 17,1W 500 mA
Constant Current 500 mA
48V. 50/60Hz

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,84 Kg Net weight 0,74 Kg

LED IP20

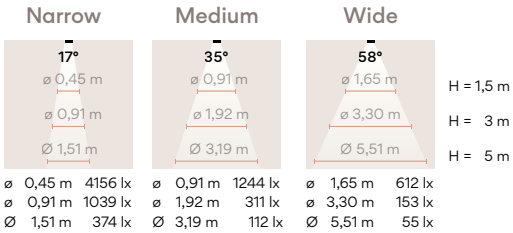

Narrow		Medium		Wide	
ø 0,45 m	4156 lx	ø 0,91 m	1244 lx	ø 1,65 m	612 lx
ø 0,91 m	1039 lx	ø 1,92 m	311 lx	ø 3,30 m	153 lx
Ø 1,51 m	374 lx	Ø 3,19 m	112 lx	Ø 5,51 m	55 lx



Product specifications subject to change without notice. Please check vibia.com for updated information.

7080
Narrow
7082
Medium
7084
Wide

Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm
E

Control
7080 _ _ / _ _
7082 _ _ / _ _
7084 _ _ / _ _

_ _ / _ **0** On/ Off
_ _ / _ **1** DALI-2
_ _ / _ **Z** Casambi

TRACK SURFACE



Select Electrical connection


Track Surface


Track Trimless

_TX Track Surface
_TZ Track Trimess

TRACK TRIMLESS



Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
1 x LED 24,8W 700 mA
Constant Current 700 mA
48V. 50/60Hz

Packaging
1 Box 0,217 x 0,217 x 0,024 m
Vol 0,0113 m³
Gross weight 2,15 Kg Net weight 2,00 Kg

LED IP20 CE UKCA EAC

Narrow	Medium	Wide	
17°	35°	59°	
ø 0,45 m	ø 0,91 m	ø 1,69 m	H = 1,5 m
ø 0,9 m	ø 1,92 m	ø 3,38 m	H = 3 m
Ø 1,49 m	Ø 3,20 m	Ø 5,63 m	H = 5 m
ø 0,45 m 5652 lx	ø 0,91 m 1660 lx	ø 1,69 m 800 lx	
ø 0,9 m 1413 lx	ø 1,92 m 415 lx	ø 3,38 m 200 lx	
Ø 1,49 m 509 lx	Ø 3,20 m 150 lx	Ø 5,63 m 72 lx	



Tracks and accessories

The Pro collection is complemented by a system of tracks and accessories designed to facilitate its integration into different architectural settings. Available in surface and trimless versions, the program includes tracks, end covers, electrical connectors and drivers that allow the installation to be configured with precision and technical coherence. These elements ensure visual continuity, reliable electrical supply and flexibility in mounting, adapting to the specific requirements of each project.



Product specifications subject to change without notice. Please check vibia.com for updated information.

	Surface	Trimless
Tracks	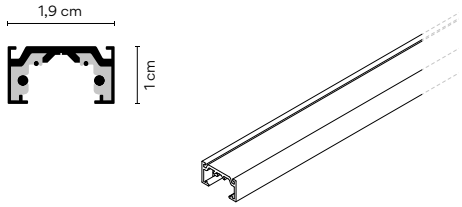	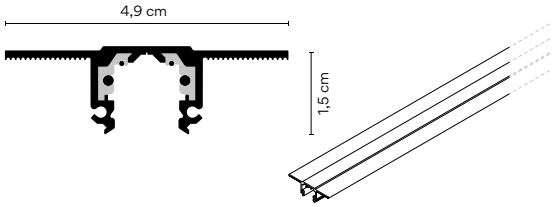
	T001 11/0M Surface track 1 m **T002 11/0M** Surface track 2 m **T003 11/0M** Surface track 3 m	**T011 11/0M** Trimless track 1 m **T012 11/0M** Trimless track 2 m **T013 11/0M** Trimless track 3 m
Track covers	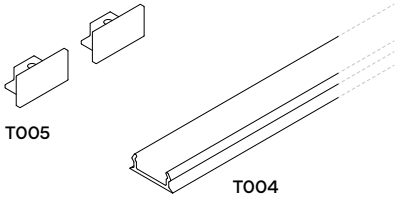	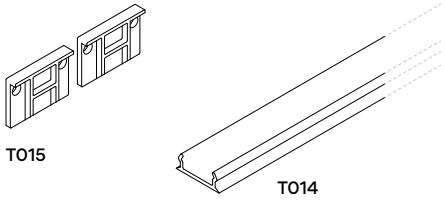
	T004 11/0M Surface track cover 3 m **T005 11/0M** End caps for surface track (set of 2)	**T014 11/0M** Trimless track cover 3 m **T015 11/0M** End caps for trimless track (set of 2)
Electrical jointing connectors		
	T007 11/0M Straight electrical joint **T008 11/0M** L electrical joint for surface track	**T007 11/0M** Straight electrical joint **T009 11/0M** L electrical joint for trimless track
Drivers	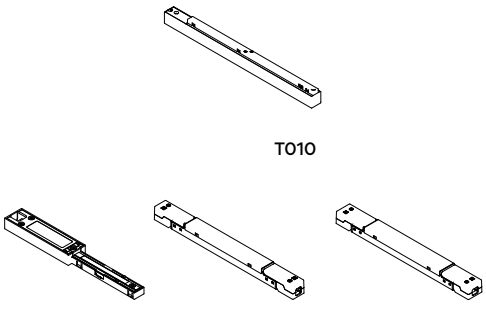	
	T010 11/0H Electrical connection 100W surface **T006 11/0M** Remote feeder for surface track (Required with T017 and T018) **T017 80/0H** Electrical connection 48W remote **T018 80/0H** Electrical connection 84W remote	**T016 11/0M** Remote feeder for trimless track (Required with T017 and T018) **T017 80/0H** Electrical connection 48W remote **T018 80/0H** Electrical connection 84W remote

Stand-alone - Accent Spotlight

Plug



Ø 9 cm

7092 Medium



Ø 12 cm

7102 Medium

Bolt-down



Ø 9 cm

7110 Narrow
7112 Medium
7114 Wide



Ø 12 cm

7120 Narrow
7122 Medium
7124 Wide

Product specifications subject to change without notice. Please check vibia.com for updated information.

7092
PLUG Medium



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 1961 lm
/2 _ 3000 K - 2050 lm
/3 _ 3500 K - 2124 lm
/4 _ 4000 K - 2300 lm
E

Control

7092 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
1 x LED 17,1W 500 mA
Constant Current 500 mA
100~240V. 50/60Hz

Packaging
1 Box 0,272 x 0,161 x 0,148 m
Vol 0,0064 m³
Gross weight 1,29 Kg Net weight 1,09 Kg

Notes
Cable length: 2,5 m.
Switch on the cable.

LED □ IP20 CE UK CA EAC
Dimmer Bi-volt

Medium



H = 5 m
H = 3 m
H = 1,5 m

ø 0,91 m 1244 lx
ø 1,92 m 311 lx
Ø 3,19 m 112 lx

7102
PLUG Medium



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **23/** _ _ Warm White (NCS S 0502-Y50R)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature

Static White
/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm
E

Control

7102 _ _ / _ _
_ _ / _ **5** Push
_ _ / _ **Z** Casambi

Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
1 x LED 24,8W 700 mA
Constant Current 700 mA
100~240V. 50/60Hz

Packaging
1 Box 0,217 x 0,217 x 0,318 m
Vol 0,0149 m³
Gross weight 2,79 Kg Net weight 2,64 Kg

Notes
Cable length: 2,5 m.
Switch on the cable.

LED □ IP20 CE UK CA EAC
Dimmer Bi-volt

Medium



H = 5 m
H = 3 m
H = 1,5 m

ø 0,91 m 1244 lx
ø 1,92 m 311 lx
Ø 3,20 m 112 lx

1160 | 10 | /1A
Model | Finish | LED Colour Temperature | Control

7110
BOLT-DOWN
Narrow

7112
BOLT-DOWN
Medium

7114
BOLT-DOWN
Wide

Finishes
- **11/ _ _** Black (NCS S 8500-N)
- **23/ _ _** Warm White (NCS S 0502-Y50R)
- **24/ _ _** Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 1961 lm
/2 _ 3000 K - 2050 lm
/3 _ 3500 K - 2124 lm
/4 _ 4000 K - 2300 lm
E

Tunable White
/8 _ (1800 K - 4000 K)
571 lm - 895 lm
F

CRI >90

Control
7110 _ _ / _ _
7112 _ _ / _ _
7114 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ Z Casambi
_ _ / 81 Tunable White + DALI-2
_ _ / 8Z Tunable White + Casambi



Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500 K - 4000 K:
1 x LED 17,1W 500 mA
Constant Current 500 mA
220~240V. 50/60Hz

Tunable White:
1 x LED 8,9W 500 mA
Constant Current 700 mA
110~240V. 50/60Hz

Packaging
1 Box 0,25 x 0,161 x 0,148 m
Vol 0,0059 m³
Gross weight 1,29 Kg Net weight 1,09 Kg

LED ☐ IP20 CE UK CA EAC

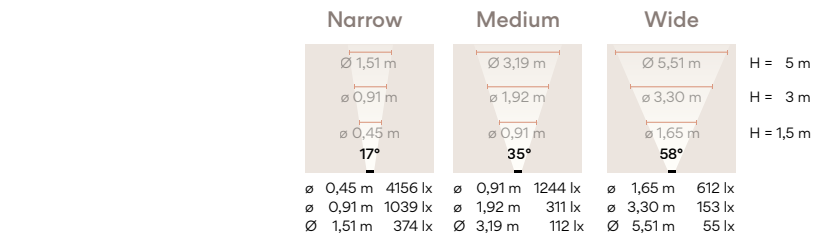

Narrow		Medium		Wide	
ø 0,45 m	4156 lx	ø 0,91 m	1244 lx	ø 1,65 m	612 lx
ø 0,91 m	1039 lx	ø 1,92 m	311 lx	ø 3,30 m	153 lx
Ø 1,51 m	374 lx	Ø 3,19 m	112 lx	Ø 5,51 m	55 lx

7120
BOLT-DOWN
Narrow

7122
BOLT-DOWN
Medium

7124
BOLT-DOWN
Wide

Finishes
- **11/ _ _** Black (NCS S 8500-N)
- **23/ _ _** Warm White (NCS S 0502-Y50R)
- **24/ _ _** Beige M1 (NCS S 2005-Y50R)

LED Colour Temperature
Static White
/1 _ 2700 K - 2676 lm
/2 _ 3000 K - 2798 lm
/3 _ 3500 K - 2899 lm
/4 _ 4000 K - 2960 lm
E

Tunable White
/8 _ (1800 K - 4000 K)
735 lm - 1152 lm
F

CRI >90

Control
7120 _ _ / _ _
7122 _ _ / _ _
7124 _ _ / _ _

_ _ / _ 1 DALI-2
_ _ / _ Z Casambi
_ _ / 81 Tunable White + DALI-2
_ _ / 8Z Tunable White + Casambi



Materials
Body: Aluminium.
Lens: PC- Polycarbonate.

Light Source and electronics
2700 K - 3000 K - 3500 K - 4000 K:
1 x LED 24,8W 700 mA
Constant Current 700 mA
220~240V. 50/60Hz

Tunable White:
1 x LED 12,6W 700 mA
Constant Current 700 mA
110~240V. 50/60Hz

Packaging
1 Box 0,217 x 0,217 x 0,30 m
Vol 0,0141 m³
Gross weight 2,79 Kg Net weight 2,64 Kg

LED ☐ IP20 CE UK CA EAC

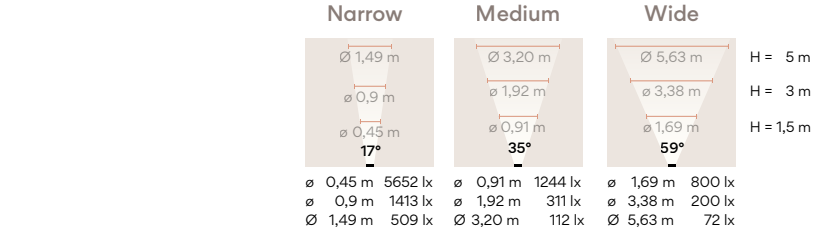

Narrow		Medium		Wide	
ø 0,45 m	5652 lx	ø 0,91 m	1244 lx	ø 1,69 m	800 lx
ø 0,9 m	1413 lx	ø 1,92 m	311 lx	ø 3,38 m	200 lx
Ø 1,49 m	509 lx	Ø 3,20 m	112 lx	Ø 5,63 m	72 lx

Product specifications subject to change without notice. Please check vibia.com for updated information.



Plusminus Essentials

Design by Diez Office

Plusminus Essentials distils the Plusminus collection into its most essential expression. A simplified lighting system that reinterprets the concept of a lighting track through a plug-and-play approach.

At its core, a conductive textile ribbon allows luminaires to be positioned intuitively.



Product specifications subject to change without notice. Please check vibia.com for updated information.

Compose your Plusminus Essentials in three steps

1

Select one of the four available toolboxes:

+ Belt finish
+ Control type
+ Electrical connection



2

Select luminaires:

+ Finish
+ LED colour temperature

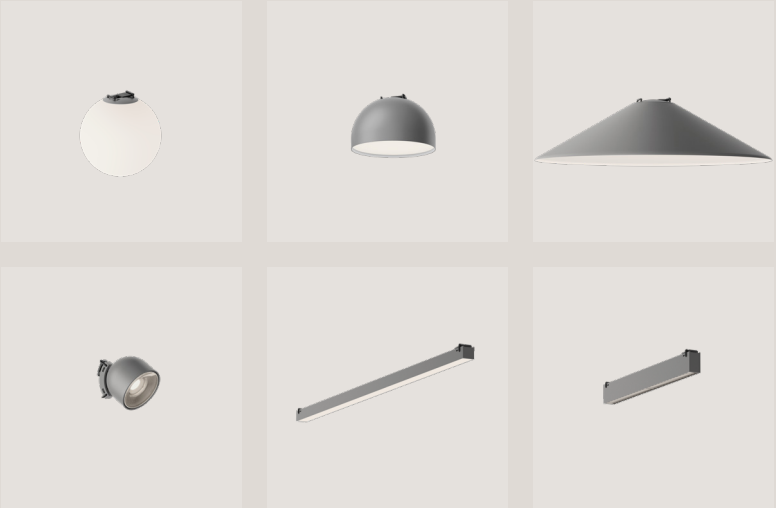

3

Optional: add additional accessories

+ Counterweight
+ Wire connector



Each Toolbox includes all the components required to create different Plusminus Essentials compositions, including the conductive textile ribbon, as well as installation and electrical connection accessories. Additional units are also included to allow for adjustments during on-site installation.

1 Select Toolbox

TB01

Using a maximum of two ceiling anchoring points, the luminaires are suspended above the area to be illuminated: dining tables, kitchen islands or reading corners. A clear, lightweight lighting gesture that focuses illumination where activity takes place, with a subtle visual presence.

Possible compositions with TB01

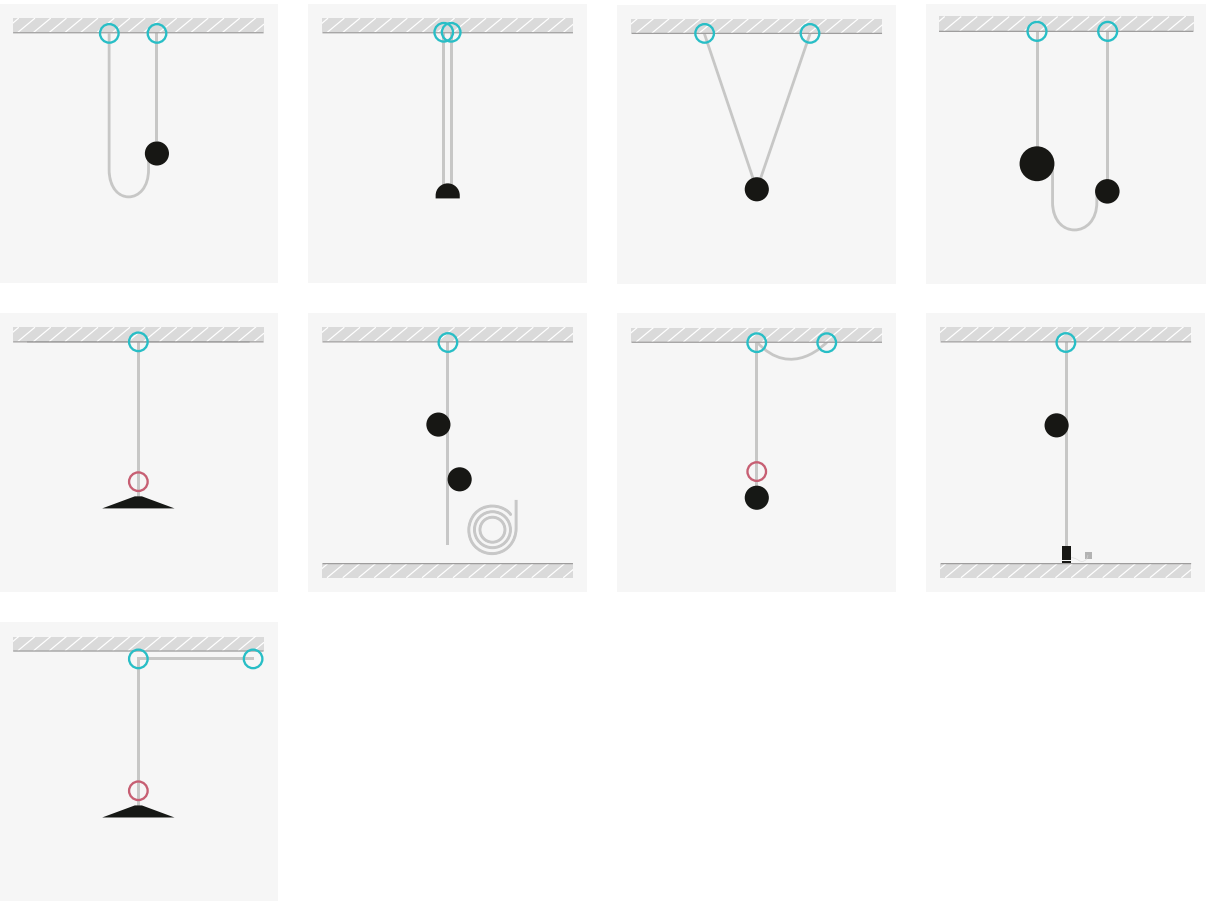

1. Fixed content



B5 Belt terminations

Pendant End Cap
1 un.



F3 Fasten accessories

Belt Support
2 un.

Product specifications subject to change without notice. Please check vibia.com for updated information.

2. Select Belt finish

Belt (6m)

Finishes
- **11/** _ _ Black
- **24/** _ _ Beige
- **38/** _ _ Terra Red
- **42/** _ _ Blue
- **53/** _ _ Green

Belt
Polyester

Fire Hazard Testing. GW-960.
fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB01 _ _ / _ _

- _ _ **/ 00_10** On/ Off Surface
- _ _ **/ 01_10** DALI Surface
- _ _ **/ 03_10** 1-10V Surface
- _ _ **/ 05_10** Push Surface
- _ _ **/ 0Z_10** Casambi Surface

IP20 Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB01 _ _ / _ _

- _ _ **/ 00_24** On/ Off Built-in
- _ _ **/ 01_24** DALI Built-in
- _ _ **/ 03_24** 1-10V Built-in
- _ _ **/ 05_24** Push Built-in
- _ _ **/ 0Z_24** Casambi Built-in

25/40/60W

IP20 Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB01 _ _ / _ _

- _ _ **/ 00_32** On/ Off Remote
- _ _ **/ 01_32** DALI Remote
- _ _ **/ 03_32** 1-10V Remote
- _ _ **/ 05_32** Push Remote
- _ _ **/ 0Z_32** Casambi Remote

25/40/60W

IP20 Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB01 _ _ / _ _

- _ _ **/ 00_50** On/ Off Plug-in
- _ _ **/ 05_50** Push Plug-in
- _ _ **/ 0Z_50** Casambi Plug-in

25/40/60W

IP20 Dimmer Bi-volt

1 Select Toolbox

TB02

This combination of accessories enables the creation of robust, tensioned light paths that structure a specific area within a space. It provides general illumination while helping to establish visual hierarchies. It is particularly suitable for settings such as reading corners, corridors, dining areas or compact domestic environments, where light helps organise and define the space.

Possible compositions with TB02

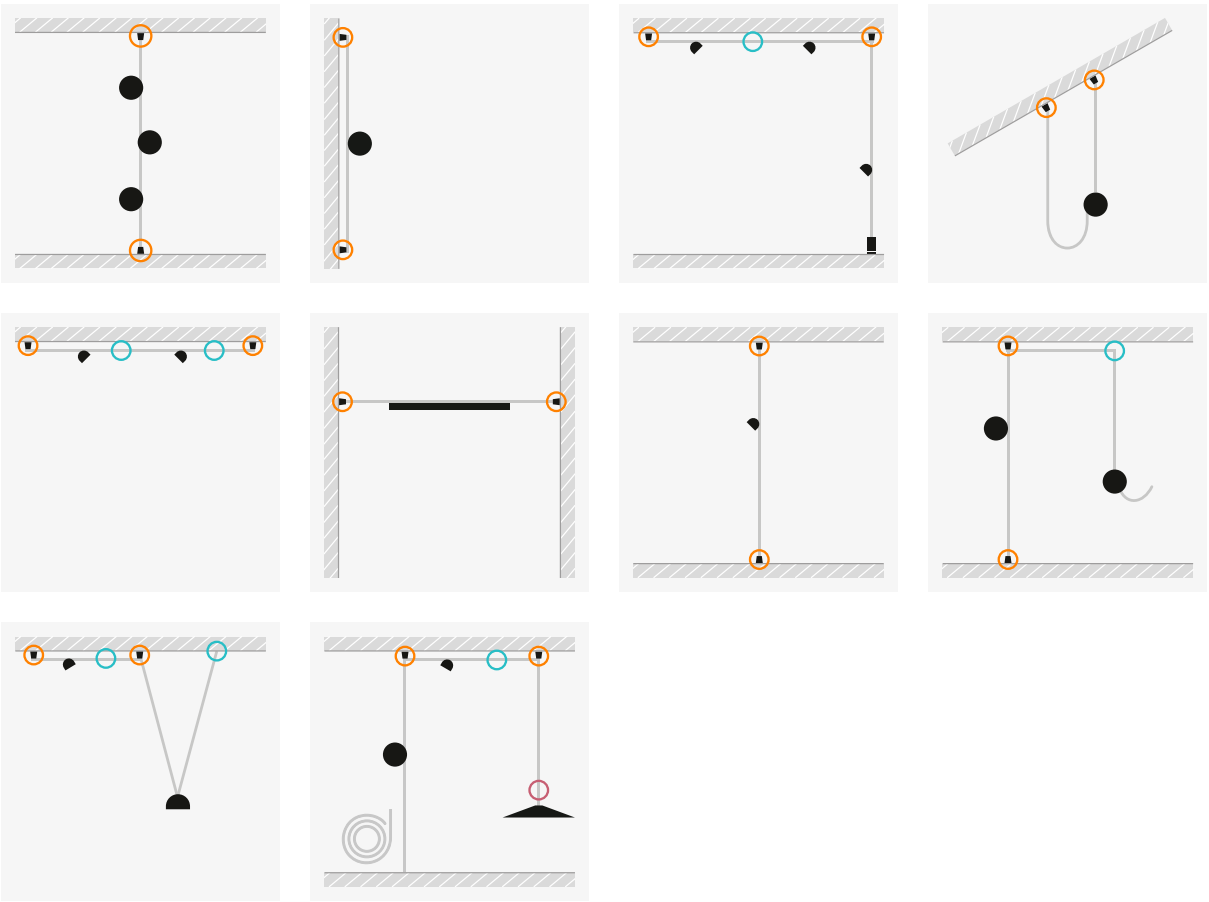

1. Fixed content



B5 Belt terminations

Pendant End Cap
1 un.



F3 Fasten accessories

Belt Support
2 un.



F1 Fasten accessories

Circular Ratchet
2 un.

Product specifications subject to change without notice. Please check vibia.com for updated information.

2. Select Belt finish

Belt (6m)

Finishes
- **11/** _ _ Black
- **24/** _ _ Beige
- **38/** _ _ Terra Red
- **42/** _ _ Blue
- **53/** _ _ Green

Belt
Polyester

Fire Hazard Testing. GW-960.
fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB02 _ _ / _ _

- _ _ **/ 00_10** On/ Off Surface
- _ _ **/ 01_10** DALI Surface
- _ _ **/ 03_10** 1-10V Surface
- _ _ **/ 05_10** Push Surface
- _ _ **/ 0Z_10** Casambi Surface

IP20 Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB02 _ _ / _ _

- _ _ **/ 00_24** On/ Off Built-in
- _ _ **/ 01_24** DALI Built-in
- _ _ **/ 03_24** 1-10V Built-in
- _ _ **/ 05_24** Push Built-in
- _ _ **/ 0Z_24** Casambi Built-in

25/40/60W

IP20 Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB02 _ _ / _ _

- _ _ **/ 00_32** On/ Off Remote
- _ _ **/ 01_32** DALI Remote
- _ _ **/ 03_32** 1-10V Remote
- _ _ **/ 05_32** Push Remote
- _ _ **/ 0Z_32** Casambi Remote

25/40/60W

IP20 Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB02 _ _ / _ _

- _ _ **/ 00_50** On/ Off Plug-in
- _ _ **/ 05_50** Push Plug-in
- _ _ **/ 0Z_50** Casambi Plug-in

25/40/60W

IP20 Dimmer Bi-volt

TB03

Following the intention of illuminating focused, activity-based surfaces, this configuration uses a longer ribbon and additional supports to create sequences of light points that generate rhythm and continuity along the visual path. It is suitable for elongated surfaces such as long tables, kitchen islands, circulation areas or reading spots.

Possible compositions with TB03

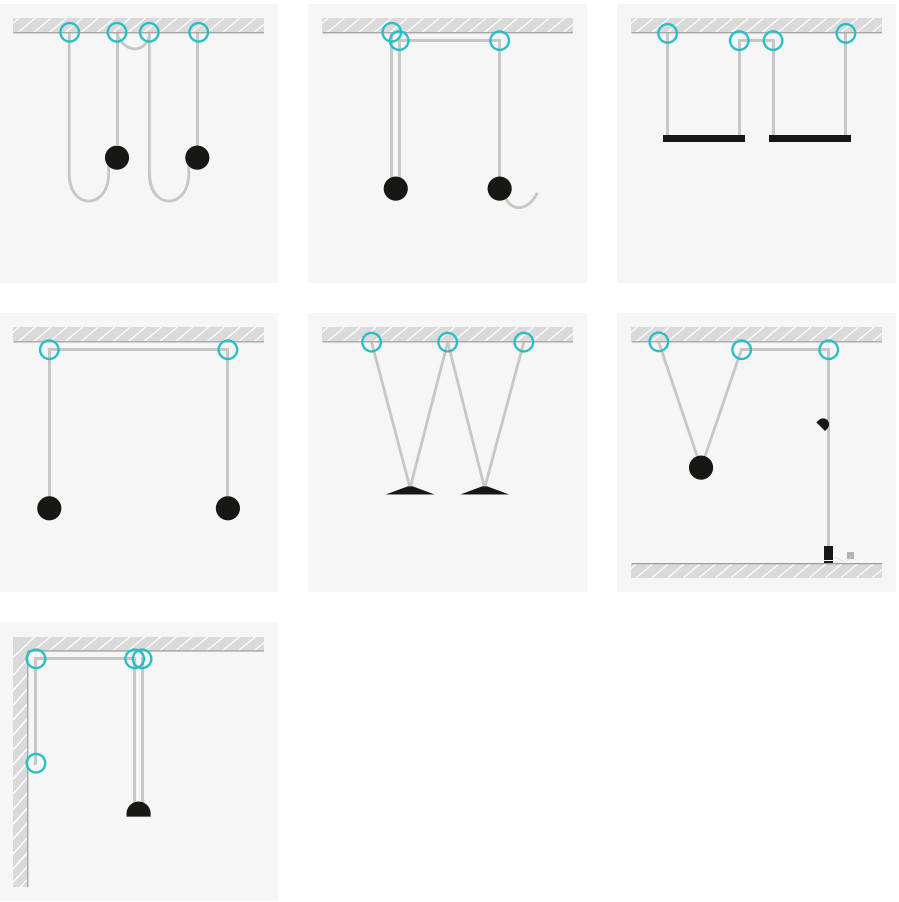

1. Fixed content



B5 Belt terminations

Pendant End Cap
1 un.



F3 Fasten accessories

Belt Support
4 un.

2. Select Belt finish

Belt (10m)

Finishes
- **11/** _ _ Black
- **24/** _ _ Beige
- **38/** _ _ Terra Red
- **42/** _ _ Blue
- **53/** _ _ Green

Belt
Polyester

Fire Hazard Testing. GW-960.
fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB03 _ _ **/** _ _

- _ _ **/ 00_10** On/ Off Surface
- _ _ **/ 01_10** DALI Surface
- _ _ **/ 03_10** 1-10V Surface
- _ _ **/ 05_10** Push Surface
- _ _ **/ 0Z_10** Casambi Surface

IP20 Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB03 _ _ **/** _ _

- _ _ **/ 00_24** On/ Off Built-in
- _ _ **/ 01_24** DALI Built-in
- _ _ **/ 03_24** 1-10V Built-in
- _ _ **/ 05_24** Push Built-in
- _ _ **/ 0Z_24** Casambi Built-in

25/40/60W

IP20 Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB03 _ _ **/** _ _

- _ _ **/ 00_32** On/ Off Remote
- _ _ **/ 01_32** DALI Remote
- _ _ **/ 03_32** 1-10V Remote
- _ _ **/ 05_32** Push Remote
- _ _ **/ 0Z_32** Casambi Remote

25/40/60W

IP20 Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB03 _ _ **/** _ _

- _ _ **/ 00_50** On/ Off Plug-in
- _ _ **/ 05_50** Push Plug-in
- _ _ **/ 0Z_50** Casambi Plug-in

25/40/60W

IP20 Dimmer Bi-volt

1 Select Toolbox

TB04

This configuration allows multiple points of light to be distributed along a longer ribbon, creating depth and visual hierarchies within the space.
It combines the previous typologies, enabling the highlighting of specific points, providing general illumination and adapting to large, open spaces while structuring the overall spatial composition.

Possible compositions with TB04

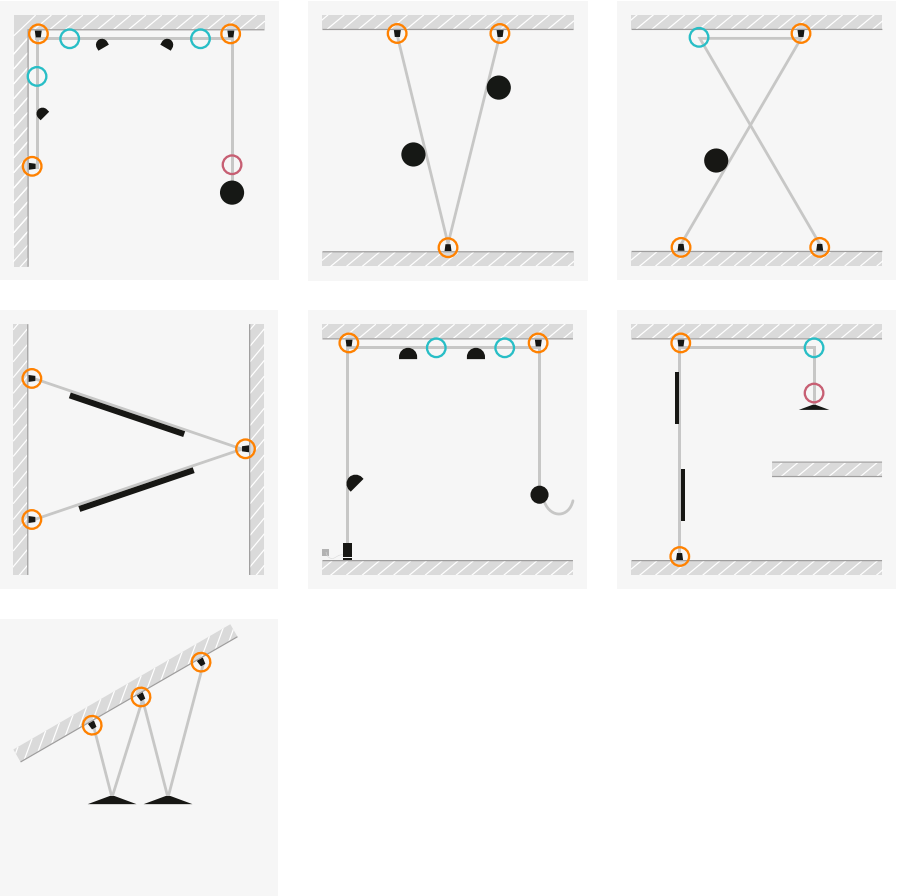

1. Fixed content



B5 Belt terminations

Pendant End Cap
1 un.



F3 Fasten accessories

Belt Support
3 un.



F1 Fasten accessories

Circular Ratchet
3 un.

2. Select Belt finish

Belt (10m)

Finishes
- **11/** _ _ Black
- **24/** _ _ Beige
- **38/** _ _ Terra Red
- **42/** _ _ Blue
- **53/** _ _ Green

Belt
Polyester

Fire Hazard Testing. GW-960.
fulfills the requirements of:
standards EN 60695-2-10:2013;
EN 60695-2-11:2015;
EN 60695-2-12:2011 / A1:2014

3. Select Electrical Connection Accesories



Surface Canopy S
E1 Ø 205 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,9 Kg.

TB04 _ _ / _ _

- _ _ **/ 00_10** On/ Off Surface
- _ _ **/ 01_10** DALI Surface
- _ _ **/ 03_10** 1-10V Surface
- _ _ **/ 05_10** Push Surface
- _ _ **/ 0Z_10** Casambi Surface

IP20 Dimmer Bi-volt



Built-in Canopy
E3 Ø 120 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 1,08 - 1,860 Kg.

TB04 _ _ / _ _

- _ _ **/ 00_24** On/ Off Built-in
- _ _ **/ 01_24** DALI Built-in
- _ _ **/ 03_24** 1-10V Built-in
- _ _ **/ 05_24** Push Built-in
- _ _ **/ 0Z_24** Casambi Built-in

25/40/60W

IP20 Dimmer Bi-volt



Remote Built-in Canopy
E4 Ø 60 mm.

Wattage options:
>25W.
<240W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line Push; 1-10V; DALI; Casambi.

Body: ABS.
Net weight 0,87 - 1,65 Kg.

TB04 _ _ / _ _

- _ _ **/ 00_32** On/ Off Remote
- _ _ **/ 01_32** DALI Remote
- _ _ **/ 03_32** 1-10V Remote
- _ _ **/ 05_32** Push Remote
- _ _ **/ 0Z_32** Casambi Remote

25/40/60W

IP20 Dimmer Bi-volt



Plug-in Floor Switch
E6 Ø 90 mm.

Wattage options:
< 60W.

Finishes
11 Black
(NCS S 8500-N)

Driver Constant Voltage 42V.
90-305 VAC. 100~240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi.

Body: ABS.

TB04 _ _ / _ _

- _ _ **/ 00_50** On/ Off Plug-in
- _ _ **/ 05_50** Push Plug-in
- _ _ **/ 0Z_50** Casambi Plug-in

25/40/60W

IP20 Dimmer Bi-volt

Sphere



6230
Ø 20 cm



6235
Ø 30 cm

6230



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6230 _ _ / _ _
_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,26 x 0,26 x 0,260 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,93 Kg

LED IP20 Dimmer

6235



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm
F
CRI >90

Control
6235 _ _ / _ _
_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,50 Kg Net weight 1,80 Kg

LED IP20 Dimmer

Semisphere



6220
Ø 20 cm



6225
Ø 30 cm

6220



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6220 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 Dimmer

6225



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm
F
CRI >90

Control
6225 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 Dimmer

Cone



6240
Ø 60 cm



6245
Ø 80 cm

6240



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6240 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

0,727 x 0,727 x 0,32 m
Vol 0,1691 m³
Gross weight 5 Kg Net weight 2,5 Kg

LED IP20 Dimmer

6245



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1492 lm
/2 _ 3000 K - 1569 lm
/3 _ 3500 K - 1606 lm

F

CRI >90

Control

6245 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics

1 x LED 16 W 850 mA

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,2488 m³
Gross weight 7 Kg Net weight 3,5 Kg

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

Spotlight



Spot Accent Light
6200 Narrow
Ø 10 cm



Spot Accent Light
6205 Medium
6210 Wide
Ø 10 cm



Spot Flat Diffuser
6215
Ø 10 cm

6200
Narrow



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6200 _ _ **/** _ _

_ _ **/** _ **0** On/Off
_ _ **/** _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

6205
Medium



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm
E
CRI >90

Control
6205 _ _ **/** _ _

_ _ **/** _ **0** On/Off
_ _ **/** _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

2 Select luminaires

6210
Wide



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 846 lm
/2 _ 3000 K - 884 lm
/3 _ 3500 K - 916 lm

E

CRI >90

Control

6210 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

6215
Flat Diffuser



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 491 lm
/2 _ 3000 K - 513 lm
/3 _ 3500 K - 532 lm

E

CRI >90

Control

6215 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED 4,2 W 250 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Dimmer

Spotlight - Accent

Narrow	Medium	Wide
		
15°	33°	49°
ø 0,2 m	ø 0,69 m	ø 0,9 m
Ø 0,4 m	Ø 1,37 m	Ø 1,8 m
ø 0,2 m 1240 lx	ø 0,69 m 851 lx	ø 0,9 m 307 lx
Ø 0,4 m 310 lx	Ø 1,37 m 213 lx	Ø 1,8 m 77 lx

H = 1,5 m

H = 3 m

Spot Accent Light



Spot Flat Diffuser



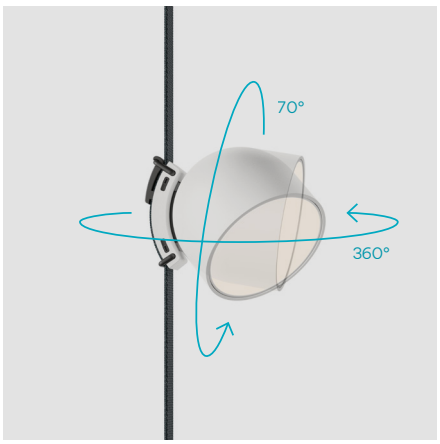

Product specifications subject to change without notice. Please check vibia.com for updated information.

Linear diffuser

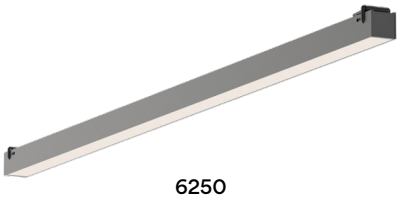

6250
102 x 4 x 3 cm

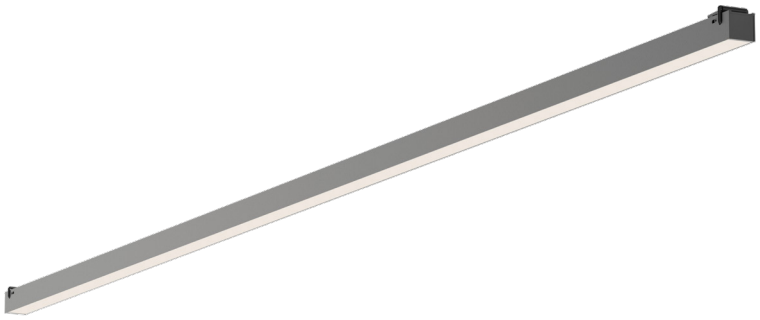

6255
202 x 4 x 3 cm

6250



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 2544 lm
/2 _ 3000 K - 2628 lm
/3 _ 3500 K - 2712 lm
C
CRI >90

Control
6250 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging
1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 Dimmer

6255



Finishes
- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 5088 lm
/2 _ 3000 K - 5256 lm
/3 _ 3500 K - 5424 lm
D
CRI >90

Control
6255 _ _ / _ _
- _ _ / _ **0** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials
Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED STRIP 41,3 W 24 V

Packaging
1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 Dimmer

Linear Low UGR - High-Comfort



6260
26,8 x 7 x 3 cm



6265
52,5 x 7 x 3 cm

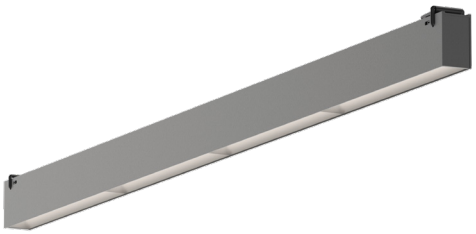

6270
103,7 x 7 x 3 cm



6260



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1281 lm
/2 _ 3000 K - 1323 lm
/3 _ 3500 K - 1366 lm

D

CRI >90

Control

6260 _ _ / _ _

_ _ / _ **0** On/Off

_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m^3
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

6265



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2562 lm
/2 _ 3000 K - 2647 lm
/3 _ 3500 K - 2731 lm
D
CRI >90

Control

6265 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 Dimmer

6270



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 5124 lm
/2 _ 3000 K - 5293 lm
/3 _ 3500 K - 5462 lm
D
CRI >90

Control

6270 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 Dimmer

Linear Low UGR - High-Efficiency



6275
26,8 x 7 x 3 cm



6280
52,5 x 7 x 3 cm

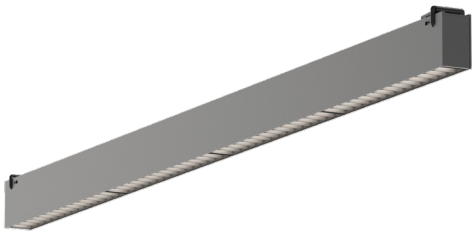

6285
103,7 x 7 x 3 cm



6275



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 1281 lm
/2 _ 3000 K - 1323 lm
/3 _ 3500 K - 1366 lm

D

CRI >90

Control

6275 _ _ / _ _

_ _ / _ **0** On/Off

_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 10,3 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m^3
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19

LED IP20 Dimmer

Product specifications subject to change without notice. Please check vibia.com for updated information.

6280



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 2562 lm
/2 _ 3000 K - 2647 lm
/3 _ 3500 K - 2731 lm
D
CRI >90

Control

6280 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19

LED IP20 Dimmer

6285



Finishes

- **11/** _ _ Black (NCS S 8500-N)
- **24/** _ _ Beige M1 (NCS S 2005-Y50R)
- **37/** _ _ Terra Red (NCS S 4040-Y70R)
- **42/** _ _ Blue M1 (NCS S 5010-B10G)
- **53/** _ _ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

/1 _ 2700 K - 5124 lm
/2 _ 3000 K - 5293 lm
/3 _ 3500 K - 5462 lm
D
CRI >90

Control

6285 _ _ / _ _

_ _ / _ **0** On/Off
_ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI

Materials

Shade: Aluminum.

Light Source and electronics

1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19

LED IP20 Dimmer

3 Optional, add additional accessories



Wire Connector
E8 Ø 3,1 mm.

Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

A52411/00

IP20 CE UKCA EAC

Finishes
11/ _ _ Black
(NCS S 8500-N)

Materials
Body: ABS.



Counterweight

Finishes
11/ _ _ Black
(NCS S 8500-N)

Materials
Body: Cast Iron.

A52511/00





Product specifications subject to change without notice. Please check vibia.com for updated information.



Glossary

CE
Product fulfills the requirements
of the relevant European directives.

UK CA
Product fulfills the requirements
of Great Britain relevant legislation.

EAC
Product complying with TP TC 004/2011
and TP TC 020/2011. Custom Union Regulation

Product that complies with the law N24-09
of the current Moroccan legislation.

IP
Level of protection. Electrical products are prepared to avoid solids and liquids from getting in contact with the electrical parts. Such resistance is expressed as IP followed by two digits: the first digit indicates the level of resistance to solid objects and the second one to liquids.
The scale goes from IP20 to IP69.

IP20
Product protected against solid object as big as or bigger than 12 mm. No protection against water.

IP20
IP40
Product protected against solid objects as big as or bigger than 12 mm in the built-in part. In the visible part of the luminaire, product protected against solid objects as big as or bigger than 1 mm. No protection against water.

IP64
Dust-tight product. Protected against water spray.

IP65
Dust-tight product. Protected against water trickles.

IP66
Dust-tight product. Protected against water spurts.

Insulation class

Class I. Product with an additional protection cable (grounds).

Class II. Product protected against electric shock having a double insulation. No grounds.

Class III. Product protected against electric shock based on a very-low voltage system. No grounds.

Bi-volt
Valid for the range 110V-230V, 50-60Hz.

Multi-volt
Valid for the range 110-277V, 50-60Hz.

Cut out

Property for embedding dimension.

Integrated Dimmer

Dimmer
Lamp that has a integrated dimmer.

EU Energetic label

More Efficacy
A
B
C
D
E
F
G
Less Efficacy

Light source information

CRI
Colour rendering index.

K
LED Colour Temperature.

lm
Lumen, unit of measurement of luminous flux.

lm/W
Light source performance. Relationship between the luminous flux (lm) and the power consumed (W) by the source.

Lighting control systems

1 Push control

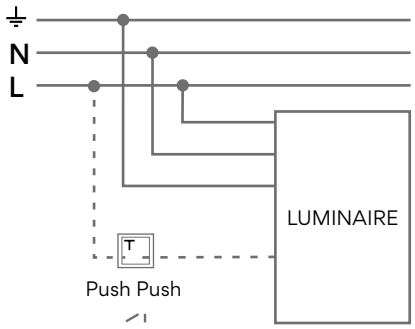

2 1-10V System control

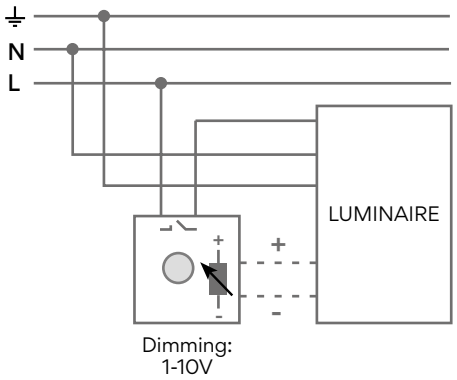

3 DALI System control

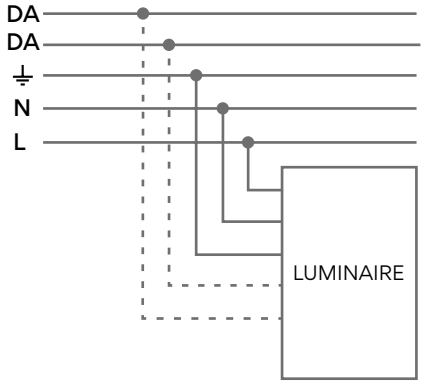

4 Casambi control

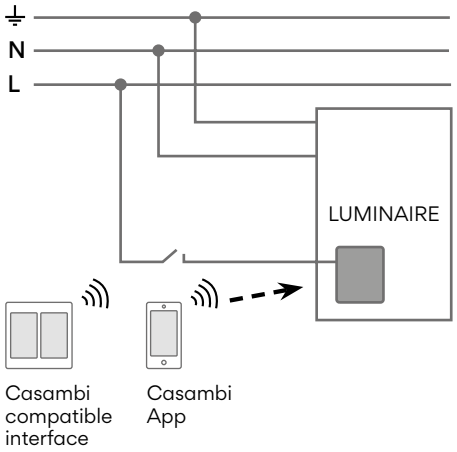

5 ProtoPixel control

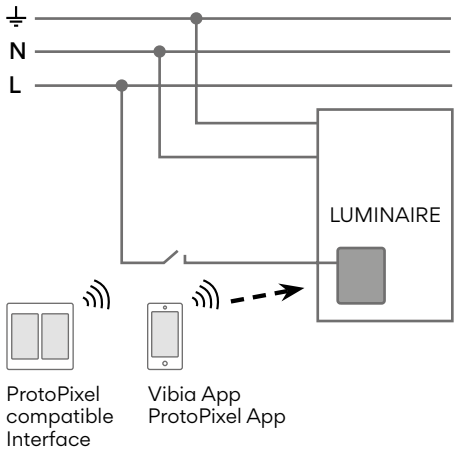

6 TRIAC control

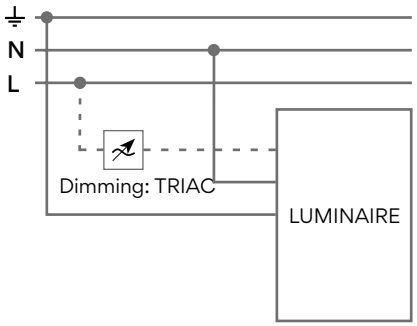

⏚	Ground	L	Line
N	Neutral	DA	DALI-Digital Signal

Very important
Vibia Lighting S.L.U. has the right to change any model or finish of the products included in the picture catalogue without any previous notice.

ACKNOWLEDGEMENTS

Yoyo Balagué
yoyobalague.com
@yoyobabcn
(Page 19)

Project: Espacio Home Design
(Page 64)

Vibia Lighting, S.L.U.

Office
Progrés 4-6.
08850 Gavà (Barcelona).
International Tel +34 934 796 971.

customer.service@vibia.com
vibia.com

COPYRIGHT© VIBIA LIGHTING S.L.U. ALL RIGHTS RESERVED.

vibia.com