The Lighting Bible®

FIFTEEN

DELTALIGHT®

We are Delta Light

Let’s journey into the world of Delta Light with **the Lighting Bible 15**. Let’s journey into the world of Delta Light with the Lighting Bible 15. Get inspired by new product families, innovative integrations and technical advancements. This illustrated catalogue is a testament to our craft, where light and creativity collide. Lighting Bible 15 bridges the gap between print and digital. This book will give you a deeper understanding of our architectural lighting solutions, as well as access to more technical information presented through sketches and informative tables.
In need of a visual representation with fitting project photography? Seamlessly switch to our website via QR-codes and visual cues. We provide everything you need: **create on paper, imagine online.**

NEW DELTA LIGHT WEBSITE
In the ever-evolving digital landscape, we at Delta Light find better ways to service our customers. A well-designed website can serve as a powerful tool to piece together your architectural narrative or design project.
By reducing the use of printed materials and focusing on potent digital tools, we are adjusting our course to more sustainable communication channels. We believe it is more than just a trend- it’s a crucial step on our path towards a sustainable future.
The latest version of our website has many helpful functionalities. Gather inspiration via the effective search function, collect your favorite projects and products with pins and share them with whoever you want. It is super easy to cross reference technical data from the Lighting Bible to applications on the new website and vice versa.
With this new **synergy between online and offline** we provide a comprehensive and easily accessible toolset for our clients, helping them to bring their visions to life and make their mark on their world.

welcome to our world.


We develop lighting solutions to improve people's quality of life. We offer our lighting expertise to architects, interior designers and lighting designers to help them achieve their vision and create a lighting display that integrates into the architecture. Using the right lighting, in the right way enhances and complements architectural concepts.

We strive to be the best in everything we do. With our extensive experience in product development, manufacturing, and design, we approach the future of lighting with ambition and confidence. We continuously invest in people, new markets, production technologies and our infrastructure. And we do this to improve our service; expand our R&D department, test facilities and laboratory; increase the level of warehouse automation and expand the House of Light training center. We like sharing our passion, creativity, and dedication. Our aim is to inspire people all over the world. As a family business, we have a personal stake in making your project a success.

we make light

Paul Ameloot
Entrepreneur Visionary Designer

Paul Ameloot created Delta Light in 1989 in the Belgian city of Roeselare, achieving his dream to design and manufacture architectural lighting. This local success story soon went global, with the participation in international events from the get-go. Today Delta Light is active on all continents, but still honors its local roots.
“I started out designing and developing all products myself. Even though today we have a team of 35 engineers, I still contribute my vision and ideas. Because once a player, it’s hard to become a fan sitting on the bench at the side of the pitch and watching the game. My dream – that was made possible by working together with my wife Katrien – really came true. Our sons, Peter and Jan, continue to make that dream grow.”

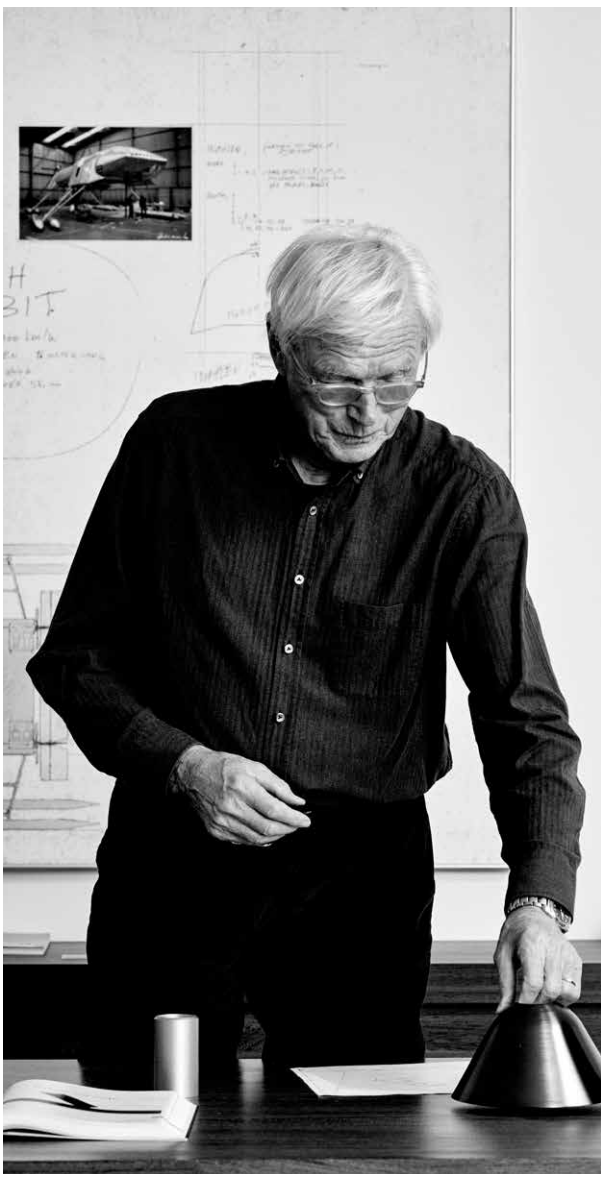

Paul Ameloot

Entrepreneur Visionary Designer



Purity is key in this latest edition of The Lighting Bible. You will find pure lighting pleasure deep in the core of our DNA, it is our leitmotif.

The Lighting Bible 15 brings you a collection of pure lighting experiences with a language of its own to enhance the human experience of architecture and nature. Our luminaires offer the building blocks for unique creations of brightness, atmosphere, and emotion.

Sophistication in technology, and purity in design unite in our collection. We offer lighting that pushes the boundaries of technology and engineering, whilst bringing a feeling of comfort, elegance, excitement and purity. Explore our complete collection of lighting solutions and experience pure lighting pleasure.

pure lightinc

a pleasure.

Light that makes you see.

Light that makes you look.

Light that animates the world, around you.

Global

Since 1989, we have grown from a small Belgian company toa global business that offers lighting solutions and services in 120 countries worldwide.

In addition to the Belgian headquarters we have Delta Light branch offices and partners on all continents and in key design capitals, from Sydney to New York, Amsterdam, Bogota, Hong Kong, Copenhagen, Miami, London, Milan, Cape Town, Los Angeles and many more.
Our goal is to support the international projects personally and locally.

Delta Light caters to some of the world's most well-known brands and architects, providing sophisticated and value add lighting solutions to residential, office, hospitality, retail, landscaping, showroom, and public projects. From small to super large scale, Delta Light has the product range, experience, and knowledge to meet the functional and aesthetic needs of your projects.
Each project requires a customised approach, and as such Delta Light recognises this with an exceptional package of services and design tools. Our global team works with all stakeholders involved to achieve the best possible results.

Starting with initial concept lighting support to the installation process and project follow-up, and everything in between. Be il for technical or application questions, performance and energy saving studies, custom designs, and made-to-measure solutions, rendering or graphics, or any other lighting support needs ... Delta Light provides a one-stop-shopping solution for your projects.



Jan & Peter Ameloot
CEO’s



Lighting spaces, indoor and outdoor
Delta Light stands for a high-quality range of contemporary architectural interior lighting solutions. A legacy we carry with pride and that we will continue to build upon with determination. From residential to hospitality, whether small or large, Delta Light has the technical expertise, product range, and practical experience to meet both the functional and aesthetic requirements of your interior project.

For the past 20 years we have been expanding our Delta Light outdoor range. We can proudly say that all that effort, and the vision behind it, has resulted in an extensive and complete range of Delta Light outdoor luminaires. These lights are of high quality and the product excellence is evident in the sublime lighting experience, enhanced durability and state-of-the-art finishes. More than ever, we are determined to make our outdoor range as renowned as our indoor range, based on the same pillars: contemporary design, excellent quality, innovative product development and a solid production and finish.

lighting spaces



R&D

The lighting industry is constantly evolving, providing both challenge and opportunity.
It fascinates us to keep on bringing new designs and lighting solutions to the market. You could consider it a passion to continuously surprise and inspire people with new lighting languages.
An essential attribute in Delta Light's creative process is the extensive in-house design, development, testing, engineering, and manufacturing of all products. This enables us to achieve our short idea-to-market philosophy, resulting in extensive new collections being launched on a regular basis.

Our in-house design team crafts cuttingedge lighting solutions, that combine an architectural design language, a minimalist approach, and a boldness that challenges the boundaries of technology.
In-house design is the foundation of our product portfolio, but we also love to collaborate with architects and designers, from different industries to create and innovate.

Delta Light's extensive design and R&D teams are constantly discovering future trends, both in terms of design and use of materials, whilst remaining focused on the power of imagination.
Its creative statement is supported by the opinion of expert panels, resulting in prestigious awards lor our collection of products, including IF Design Award, Good Design Award, Red Dot Design Award plus many more ..

We are focused on the detail. The looks, how a fixture moves, how it can be specified and installed, the ease of enjoying the light and so much more. With a surprising visual simplicity, our products are the result of extensive research and testing, fusing advanced technology with timeless design and sustainable materials.

CONTINUOUS RESEARCH & INNOVATION

Delta Light has been at the forefront of lighting technology for over 30 years now, and we continue to push boundaries, both in interior and exterior lighting. Our investment in R&D, production and innovation aims to deliver outstanding luminaires, blending contemporary design with high-quality materials, advanced engineering, the very best performance and a long lifespan.

CUTTING-EDGE LED TECHNOLOGY

As luminaire designers and manufacturers, we always strive to create the best possible thermal conditions in the luminaire, to ensure the LEDs operate at their optimum. From the design of the LED circuit boards and heat sink, to the selection of materials, to the assembly process and installation techniques ... everything is engineered to reach optimal life expectancy and maximum efficiency.

in-ho
des

By partnering with the best LED suppliers in the world, we ensure a consistent LED selection with colour uniformity across all product ranges. A minimum of MacAdam Step 2 is standard throughout our collection, whilst many of our new collection LEDs offer MacAdam Step 1.

CERTIFIED LABORATORY TESTING

Product quality and safety testing within our Delta Light laboratory conform to the International Electrotechnical Commission standards. The close cooperation and CTF stage 3 acceptance with our certifying partners SGS-CEBEC and INTERTEK leads to CE, ENEC and CB certifications for European and IEC member countries www.members.iecee.org/
Our laboratory also covers the certification of products for the North American market by being certified as a level 4 satellite laboratory for INTERTEK.
This allows us to efficiently obtain the cETLus listing tor our standard North American product range and provide exceptional service for even the most demanding customer specific solutions.
www.intertek.com/directories/etl-listed-mark/

ADVANCED OPTICS

Delta Light's team of engineers and optics experts are on a continuous quest to match the company's credo tor design with energy-efficiency and optimal quality of light. Delta Light's collection is ready to meet the needs of today's architecture, interior and landscape design, and to illuminate with impact.
We offer different precision light distributions to fulfil various requirements, with high uniformity, for demanding applications. CAD-engineered and precision manufactured lenses deliver a tightly controlled light distribution.
The variety of optics, beams and other features enable designers to meet the various illumination needs.

ouse
sign

STATE OF THE ART DEVELOPMENT TECHNIQUES

An important feature in Delta Light's creative process is the use of state-of-the-art development techniques. The intensive use of 3D printing, early stage FMEA (Failure Mode and Effect analysis), goniophotometer measurement and an in-house third party recognised lab (SMT/CTF/ satellite data acceptance) result in a fast, efficient and 'first time right' development process. As such, it is an essential attribute in the company's short idea-to-market philosophy. Throughout the entire production process Delta Light distinguishes itself by handling the strictest quality parameters, to ensure products and services are designed and produced to exceed customer requirements. Every step in the production process has a routine quality procedure, covering both product quality and testing. Every single product that leaves Delta Light, has been inspected and tested thoroughly, resulting in minimal returns and maximum efficiency.

HIGH-OUALITY

Delta Light's proprietary process creates luminaires for both indoor and outdoor use. The quality of the outdoor range is based on the five factors, including basic materials, pre-treatment, powder coating, hardware, and process control. The company uses selected alloys for the lowest grade of corrosion-inducing contaminants. Stainless steel components are made in 316 grade, a steel composition that ensures medical-grade corrosion resistance.

The pre-treatment process creates a high corrosion-resistant product in seven steps, including alkaline degreasing, etching, titanium passivation, and hot air drying. After pre-treatment, a UV-resistant polyester thermosetting powder coating is applied, certified according to European fire and fume regulations, and is solvent-free. The hardware used for outdoor luminaires is made from high-quality stainless steel to assure the entire quality of the product, and protection compounds avoid electrochemical corrosion.


This dedicated treatment is even reinforced by two individual trademarks: Delta Light Quali Protect® and Delta Light Supreme Texture®. The former covers the protective non-organic pre-treatment applied to the most suitable alloys to ensure long-term corrosion resistance, while the latter covers the final finish of the product in terms of both weather and UV resistance.


5 YEAR GUARANTEE


Throughout the entire design and production process, Delta Light handles the strictest quality parameters to ensure products and services are designed and produced to exceed customer requirements. Every step in the production process undergoes an extensive quality procedure, covering both product quality and testing. As such, each product that leaves Delta Light has been thoroughly inspected and tested, resulting in minimal returns and maximum efficiency. Product quality and safety testing according to the international IEC standards is done in our Delta Light Laboratory.

To stand by this quality promise, Delta Light offers a five-year guarantee on its entire indoor and outdoor lighting range.
Thanks to this initiative, customers can be sure that by choosing lighting solutions from Delta Light, they are investing in the future.




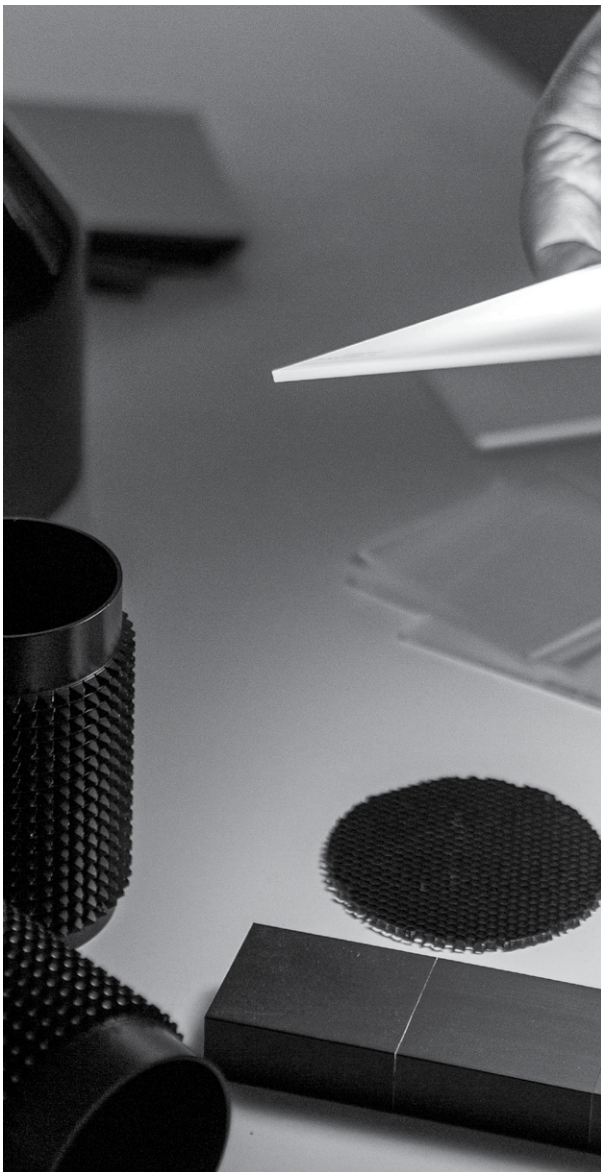

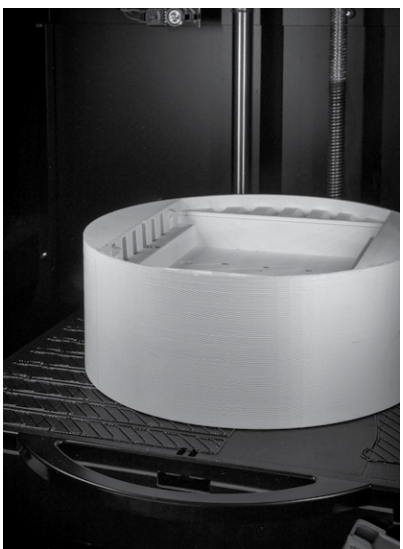


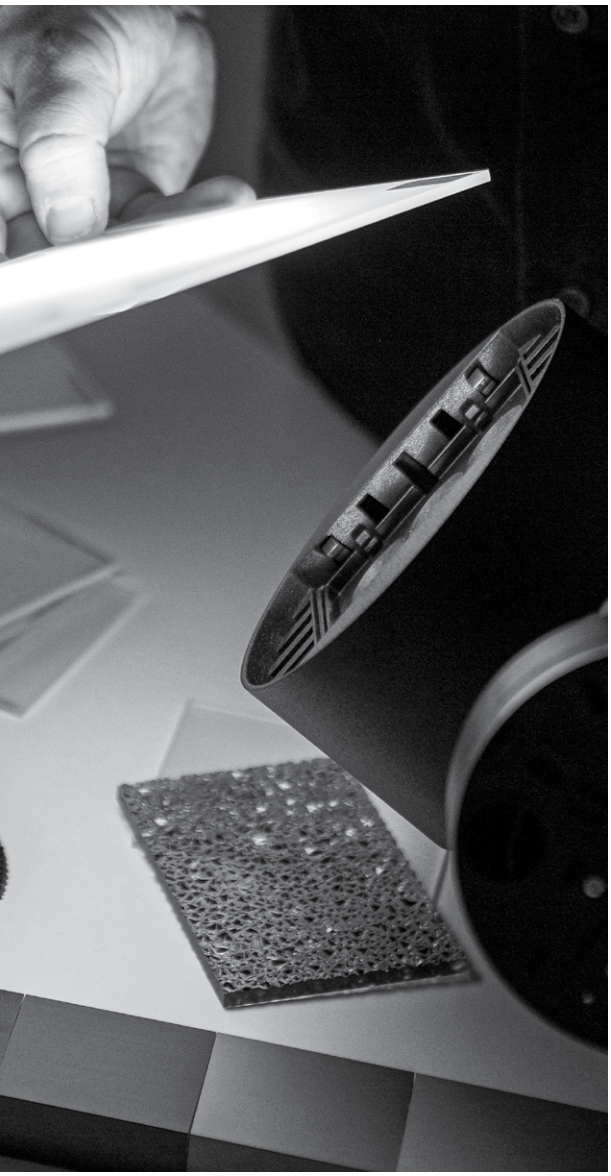



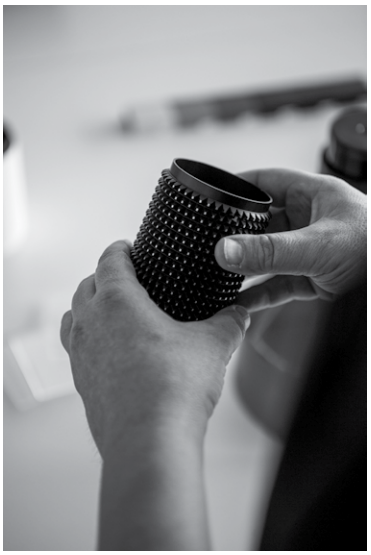



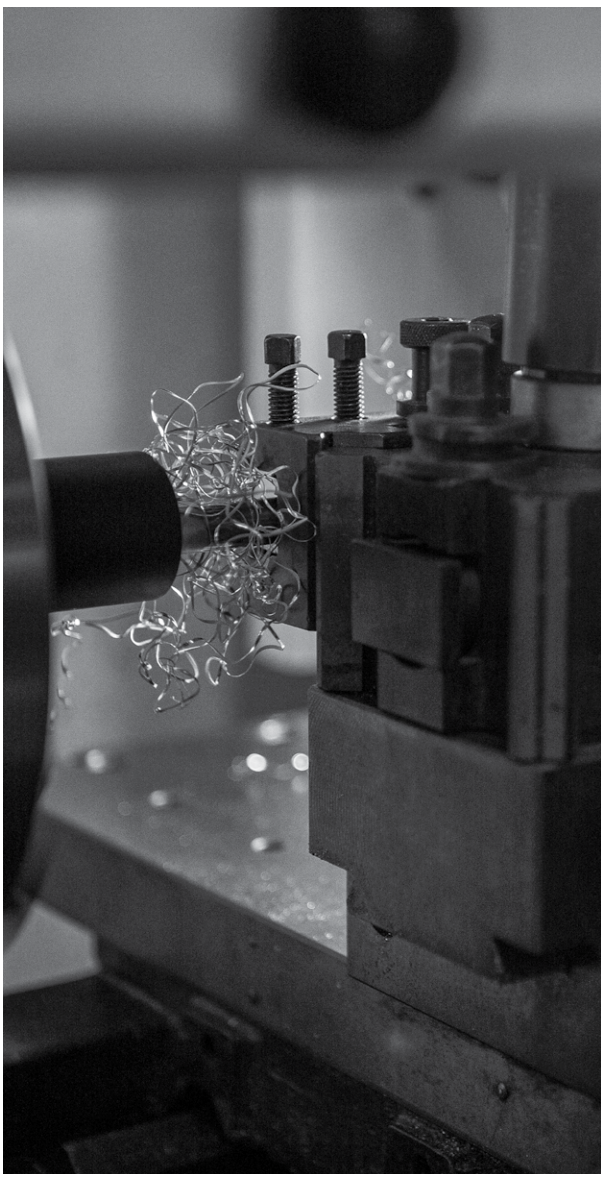





sustainability

Just as the digital revolution has drastically changed the way we live and work, so will sustainability in the near future. Sustainability will create added value and drive economic growth, it will permeate everything we do and that will have its consequences. What consequences then? That's what we at Delta Light are looking for every day. Sustainability is not so much a destination of one big goal, but rather a path with an accumulation of smaller initiatives, where every effort counts to achieve that bigger collective result.

At Delta Light, we recognise that our business activities have an impact on the environment, and we take this responsibility seriously. We place great importance on ecological awareness and sustainability. Our goal is to produce light fittings that are inventive, efficient and also environmentally friendly. We constantly strive to improve our products and operations in terms of efficiency, longevity and sustainability.

With each new collection, we integrate the latest technological developments wherever possible, make improvements in recyclability and pay close attention to efficient use of materials, production and transport.

Our commitment has been recognised with prestigious awards such as the Lighting For Good Awards in 2019 and 2020. Our commitment to sustainability does not only extend to our production processes. Our headquarters in Belgium are equipped with solar panels that produce enough renewable energy to power our entire production line and our office site. We also pay a lot of attention to recycling and waste management. Many of our luminaires are made of aluminium profiles and we make sure that they are manufactured optimally, thus minimising waste. And all that aluminium waste is collected and recycled, as aluminium is 100% reusable.

But we are also upcycling. In the autumn of 2022, together with Dutch company MVRDV, we launched High Profile, a collection of colourful lighting fixtures based on aluminium cutting remnants from profiles. A refreshing and sustainable design that was awarded the dezeen award for best in lighting of the year 2022, an honourable mention we cherish.

We are also quite proud to offer our employees a healthy, safe and harmonious environment, both in our global offices and in our Belgian headquarters. Our sustainability efforts and commitment to the well-being of our employees earned us the bronze Ecovadis medal in 2019, and the silver in 2020, 2021 and 2022.

is the new digital

design collabs

Throughout our history we've focused on creating lighting solutions that can enhance any building or setting. For some of these collections we have collaborated with external designers, opening up new exciting adventures in lighting. Merging the vision and concepts of these leading architects and designers with our in-house R&D and production expertise, exemplifies how Delta Light, hand-in-hand with them, continues to step into the future.





MVRDV

×

DELTALIGHT®

MVRDV introduced the idea to develop a new design with Delta Light's waste material, instead of inventing a completely new product. The name stems from profile lighting as a key part of architecture which often produces offcuts as a residual product – these scrap elements became the starting point of the design. The resultant design looks critically at the manufacturing process, finding not only opportunity but also beauty in elements that are normally discarded as waste.

HIGH PROFILE

The High Profile series is a range of luminaires inspired by leftover aluminum profiles. The design takes a critical look at the manufacturing process, finding both opportunity and beauty in residual elements that would normally be cast aside. The industrial look is softened by giving the profiles a colour dip; the series comes in pink, white, turquoise and random, adding MVRDV's well-known use of expressive colours to Delta Light's typical colour range.The High Profile series is a range of luminaires inspired by leftover aluminum profiles. The design takes a critical look at the manufacturing process, finding both opportunity and beauty in residual elements that would normally be cast as metal."



Winner: Lighting design of the year 2022. MVRDV and Delta Light have produced a series inspired by the beauty in elements normally discarded as waste.

`

Judges comments: "High Profile is an ingenious use of discarded materials to create a very strong narrative. The lamp fits into a range of different aesthetics, whether you are are going for pastel or metal."

dezeen awards 2022




XY180

OMA is an international practice founded by Rem Koolhaas, operating within the traditional boundaries of architecture and urbanism. AMO, a research and design studio, applies architectural thinking to domains beyond. XY180 is a 3-piece collection of luminaires designed by OMA The collection was born from a fascination with point, line and surf ace, key characters in the discourse of architecture. The collection uses precise geometry proportions. The base elements. which include a tube light and a spotlight, can be combined with a hinge, to general countless light conditions. both essential and complex .


OMA

Niteo Lighting

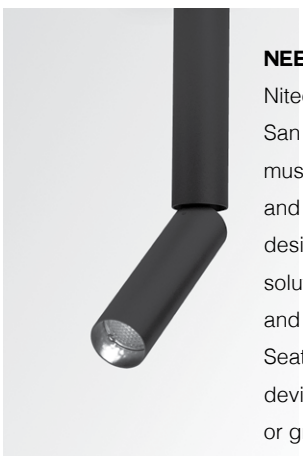

NEEDLE

Niteo is a premiere lighting design studio with offices in Seattle, San Francisco, and Singapore. With a portfolio ranging from museums to personal art collections, corporate offices to retail, and landscapes to art displays, their intimate engagement through design attention to detail is evident. Niteo delivers elegant lighting solutions via leveraging decades of experience in a collaborative and technically savvy way. Delta Light collaborated with Niteo's Seattle office to develop the Needle. This bespoke luminaire was devised to provide a playful solution in an elegant form. As a single or grouping of multiple fixtures, the slender and flexible design permits it to blend into ceilings, peek around corners, or demurely clamor attention.

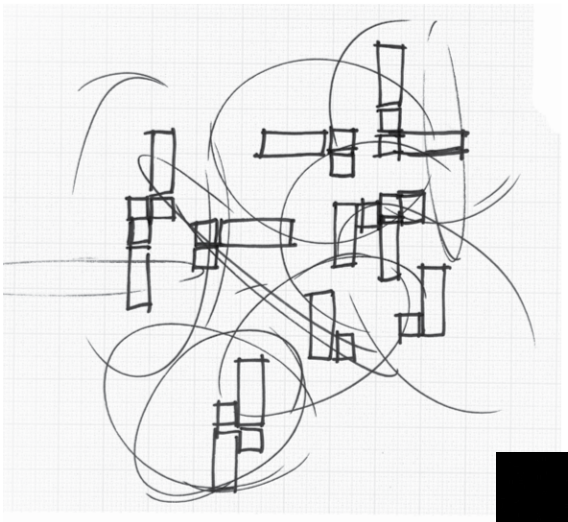


Dean Skira



NIME - POLESANO - CONFORM

Dean Skira is the founder of Skira, an award-winning practice based in Pula (Croatia) with projects also in the EU, Middle East, Russia, Canada, and the United Kingdom. For the past 30 years, he is building and creating mostly with intangible forms while working with investors, architects, and designers to create meaningful lighting experiences.

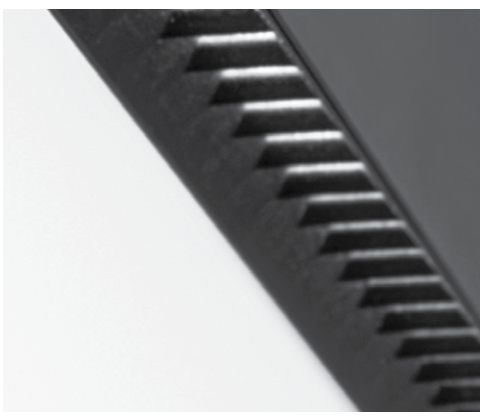

UNStudio

SOLISCAPE

An extremely versatile and flexible system, specifically designed to create human-centric environments. Developed together with UNStudio, Soliscape combines lighting, acoustics and IOT into an aesthetically appealing solution. Soliscape presents a toolbox with flexible components to architects and designers, to create unique constellations in human-centric environments.



Create on paper.
Imagine online.

Impressions.




Obin.

Based on the patented ERS (Ex-Centriq Rotation System) and equipped with flat lenses, Obin fuses ultimate flexibility with supreme user comfort in a minimalistic surface mounted lighting fixture.
By adjusting the rounded backside - using the ERS system - Obin is 360° rotatable and 45° tiltable without the need of an additional hinge. On the frontside, the sleek lenses create a sense of depth without the need of real physical space. Combining both results in free space on the inside to house a DALI power supply, perfect for an easy individual controllable surface mounted lighting scheme.

FIND ME
ON PAGE 220

I'm new to the range.





Cute outside, Functional inside

Nime.

BY DELTA LIGHT & DEAN SKIRA




Invisible. Yet tangible.

The black hole reflects no light, but the light of Nime finds its way out.

The tangible part disappears inside its heart, and the intangible part illuminates the object.
An hole of mere 10mm,
a whole lot of options.

FIND ME
ON PAGE 116

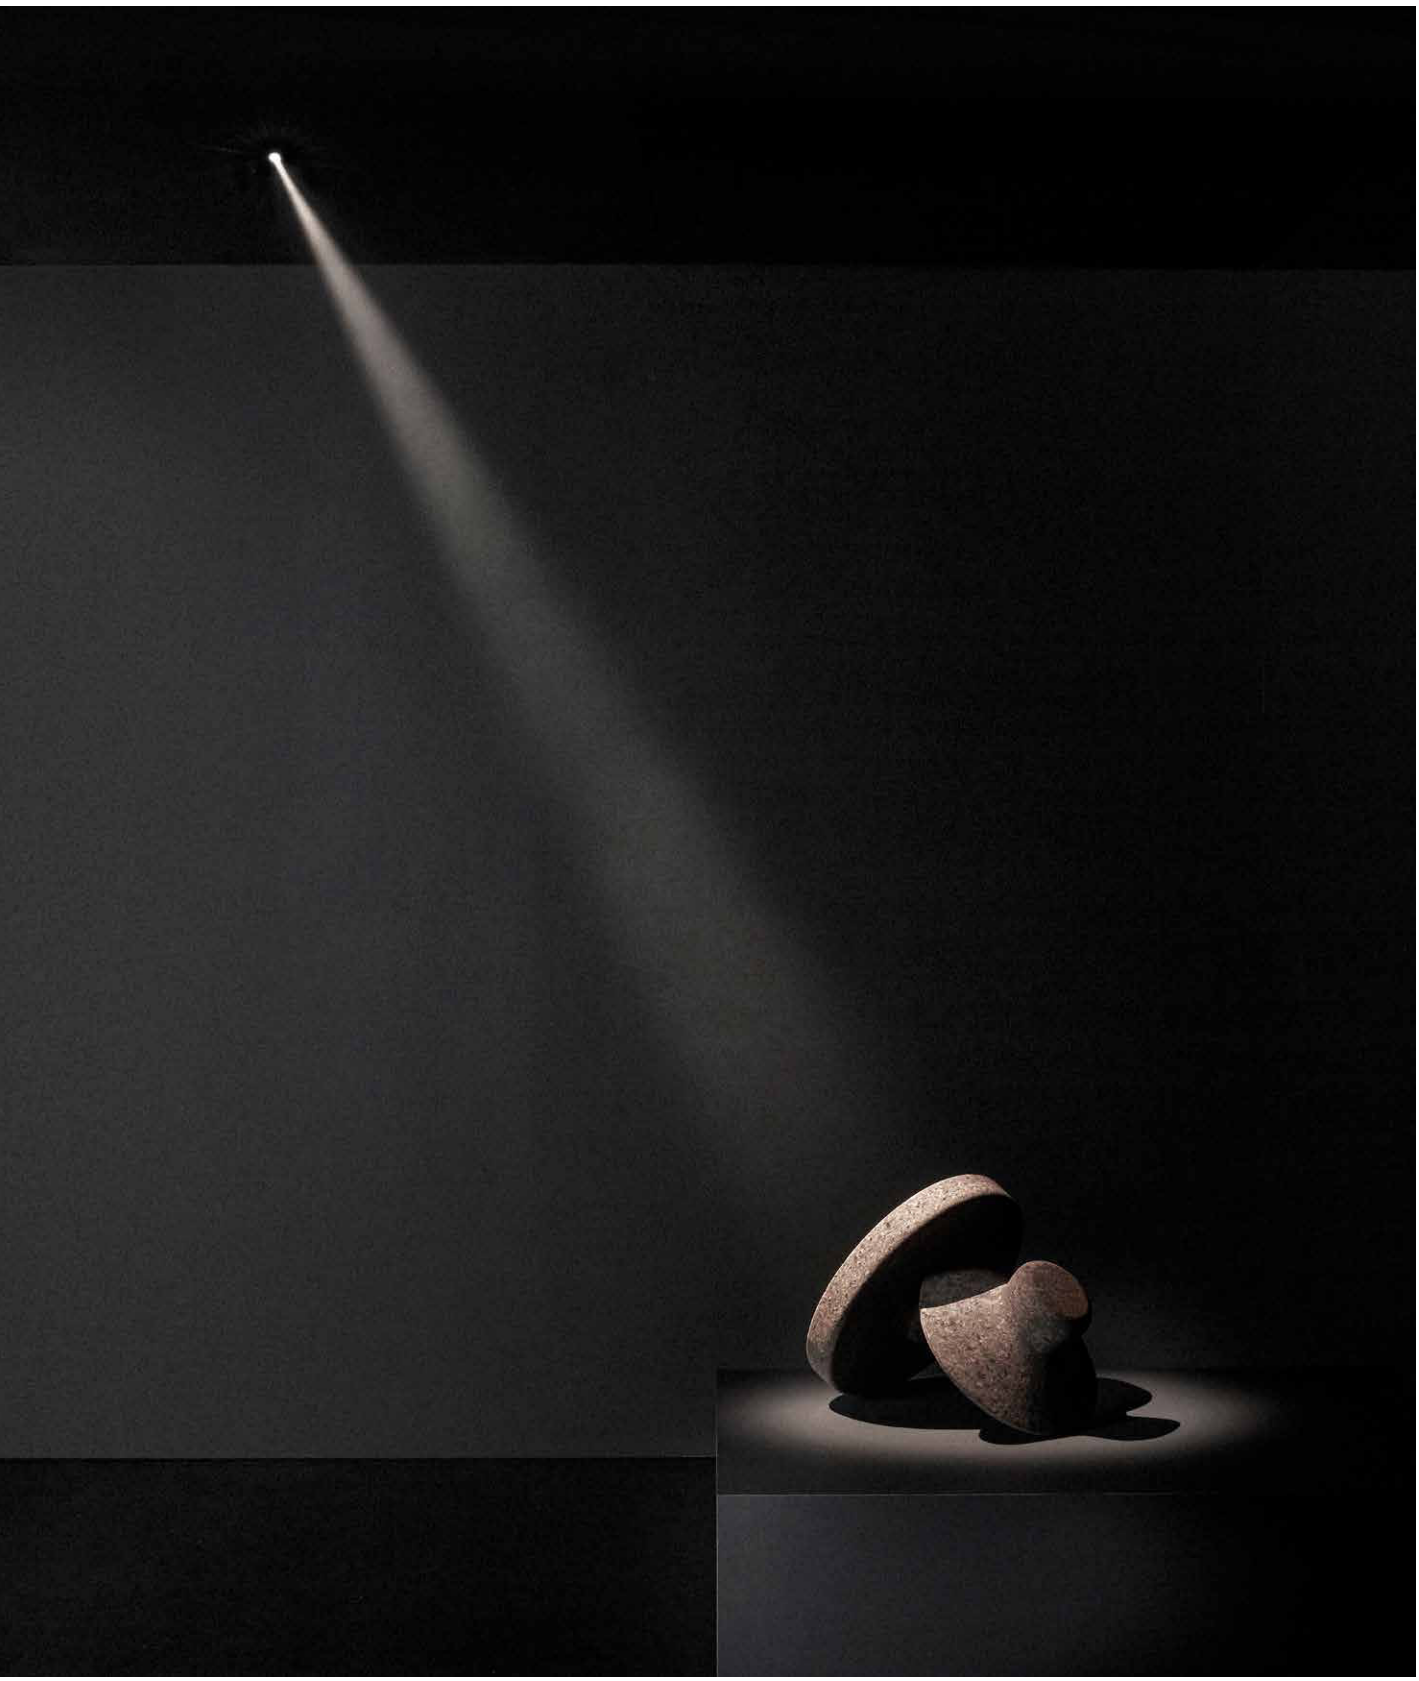

Deep



FIND ME
ON PAGE 118



Light is important, influencing the passer-by in many ways. It impacts the inner mood, the physical health, the mental state of mind. We care for that, we study this impact and we implement our findings into our luminaires. Soft Dim technology to set the mood, state-of-the-art LEDs that help to focus during the day and relax in the evening or careful positioning of the LEDs within the design of our luminaires to enhance the human visual comfort are some examples that show we care.

Visual comfort


Gold is sunny.
Gold is joyful.
Gold is rich.
Gold is energy.
Gold highlights.
Gold stimulates.
Gold is warm.
Gold draws
attention.
Gold
unveils



Size matters*


Mini.

Deep
Ringo

Although we like to stand out, we like to fit in just as much. Fit in the concept, fit in the lighting design, fit in the architecture. Our miniature lighting fixtures do just that. They are designed to perform and designed to fit in. Unnoted to the eye and seamlessly integrated into any ceiling.

* this quote is open to interpretation

FIND ME
ON PAGE 146

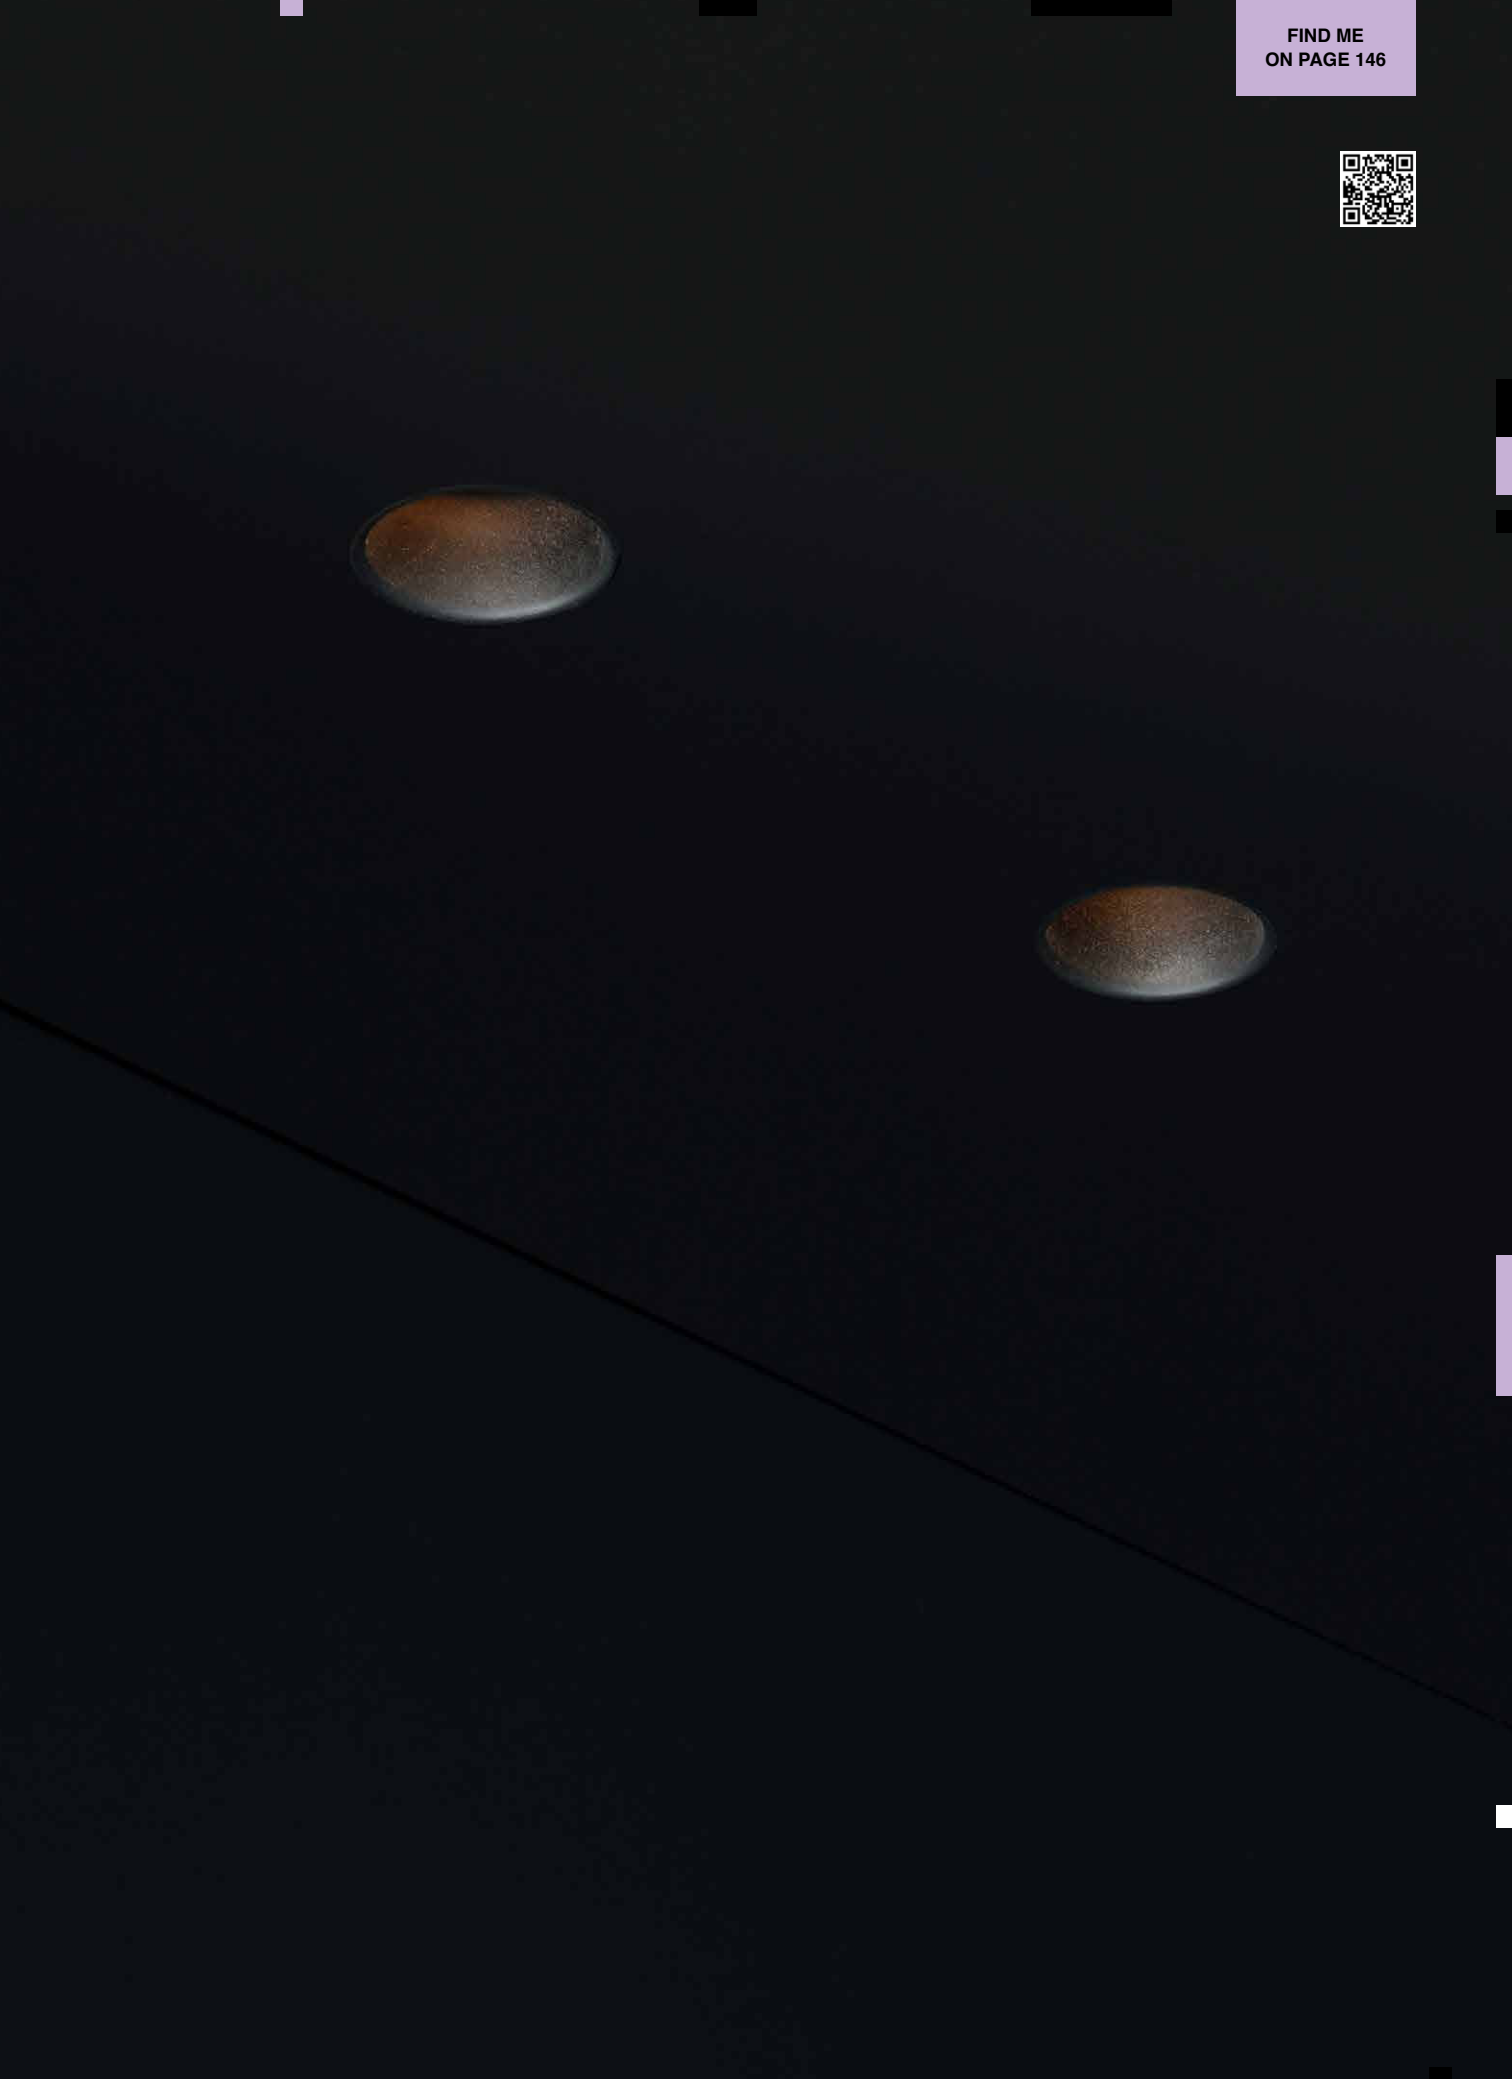

Gyn.


A ROUND OR SQUARE GYPSUM LUMINAIRE.




We shed light on the architectural story of the project. Architects and interior architects are inspired by design, and the conceptual idea that goes along with it. Illuminating that story is what we are happy to support by offering aesthetically pleasing, clever and practical ways to make lighting work brilliantly.

Some examples?
Our Gyn family fully integrates into wall or ceiling and can be finished on site in any desired colour.
Our **▲IR** range combines lighting and ventilation into 1 aesthetically appealing blend.
Our trimless fixtures can be integrated in many types of ceiling, even warm or cold stretched ones.

FIND ME
ON PAGE 150 / 324

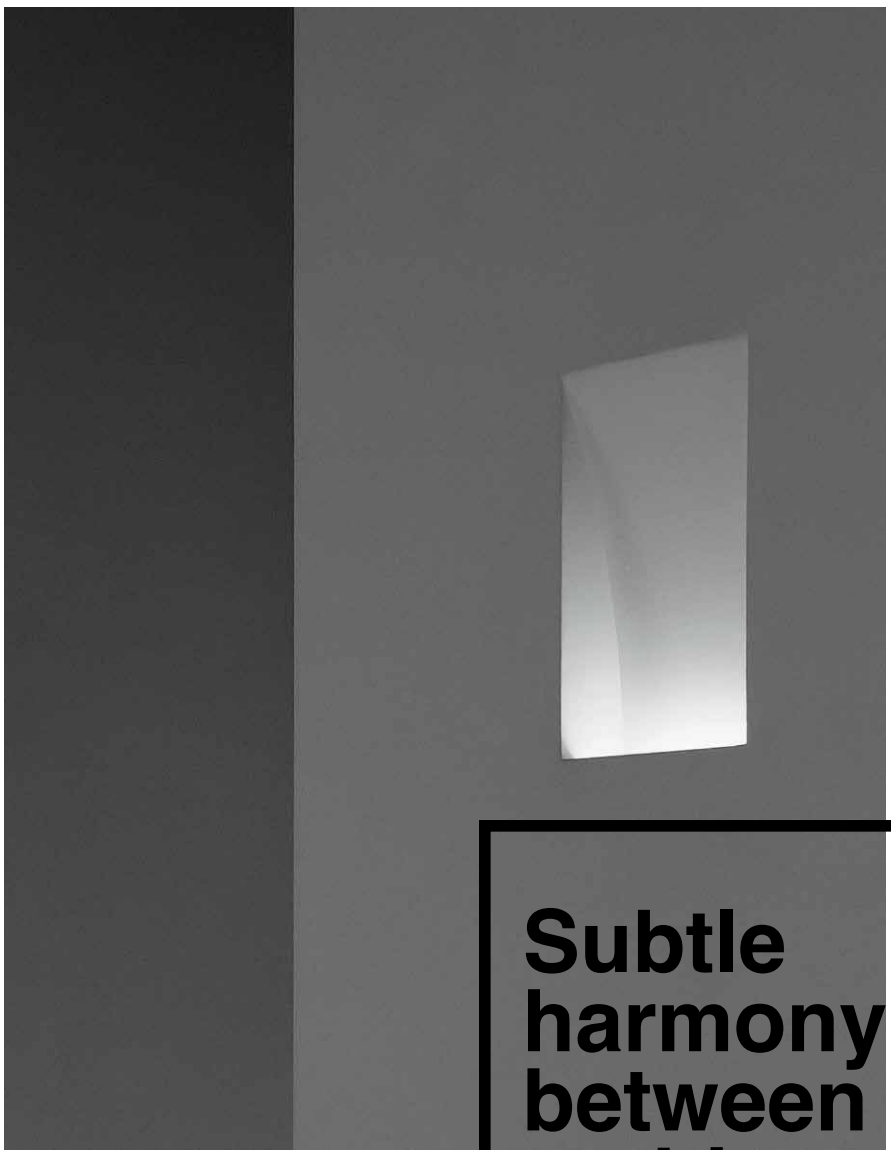

Subtle harmony between architecture and lighting.

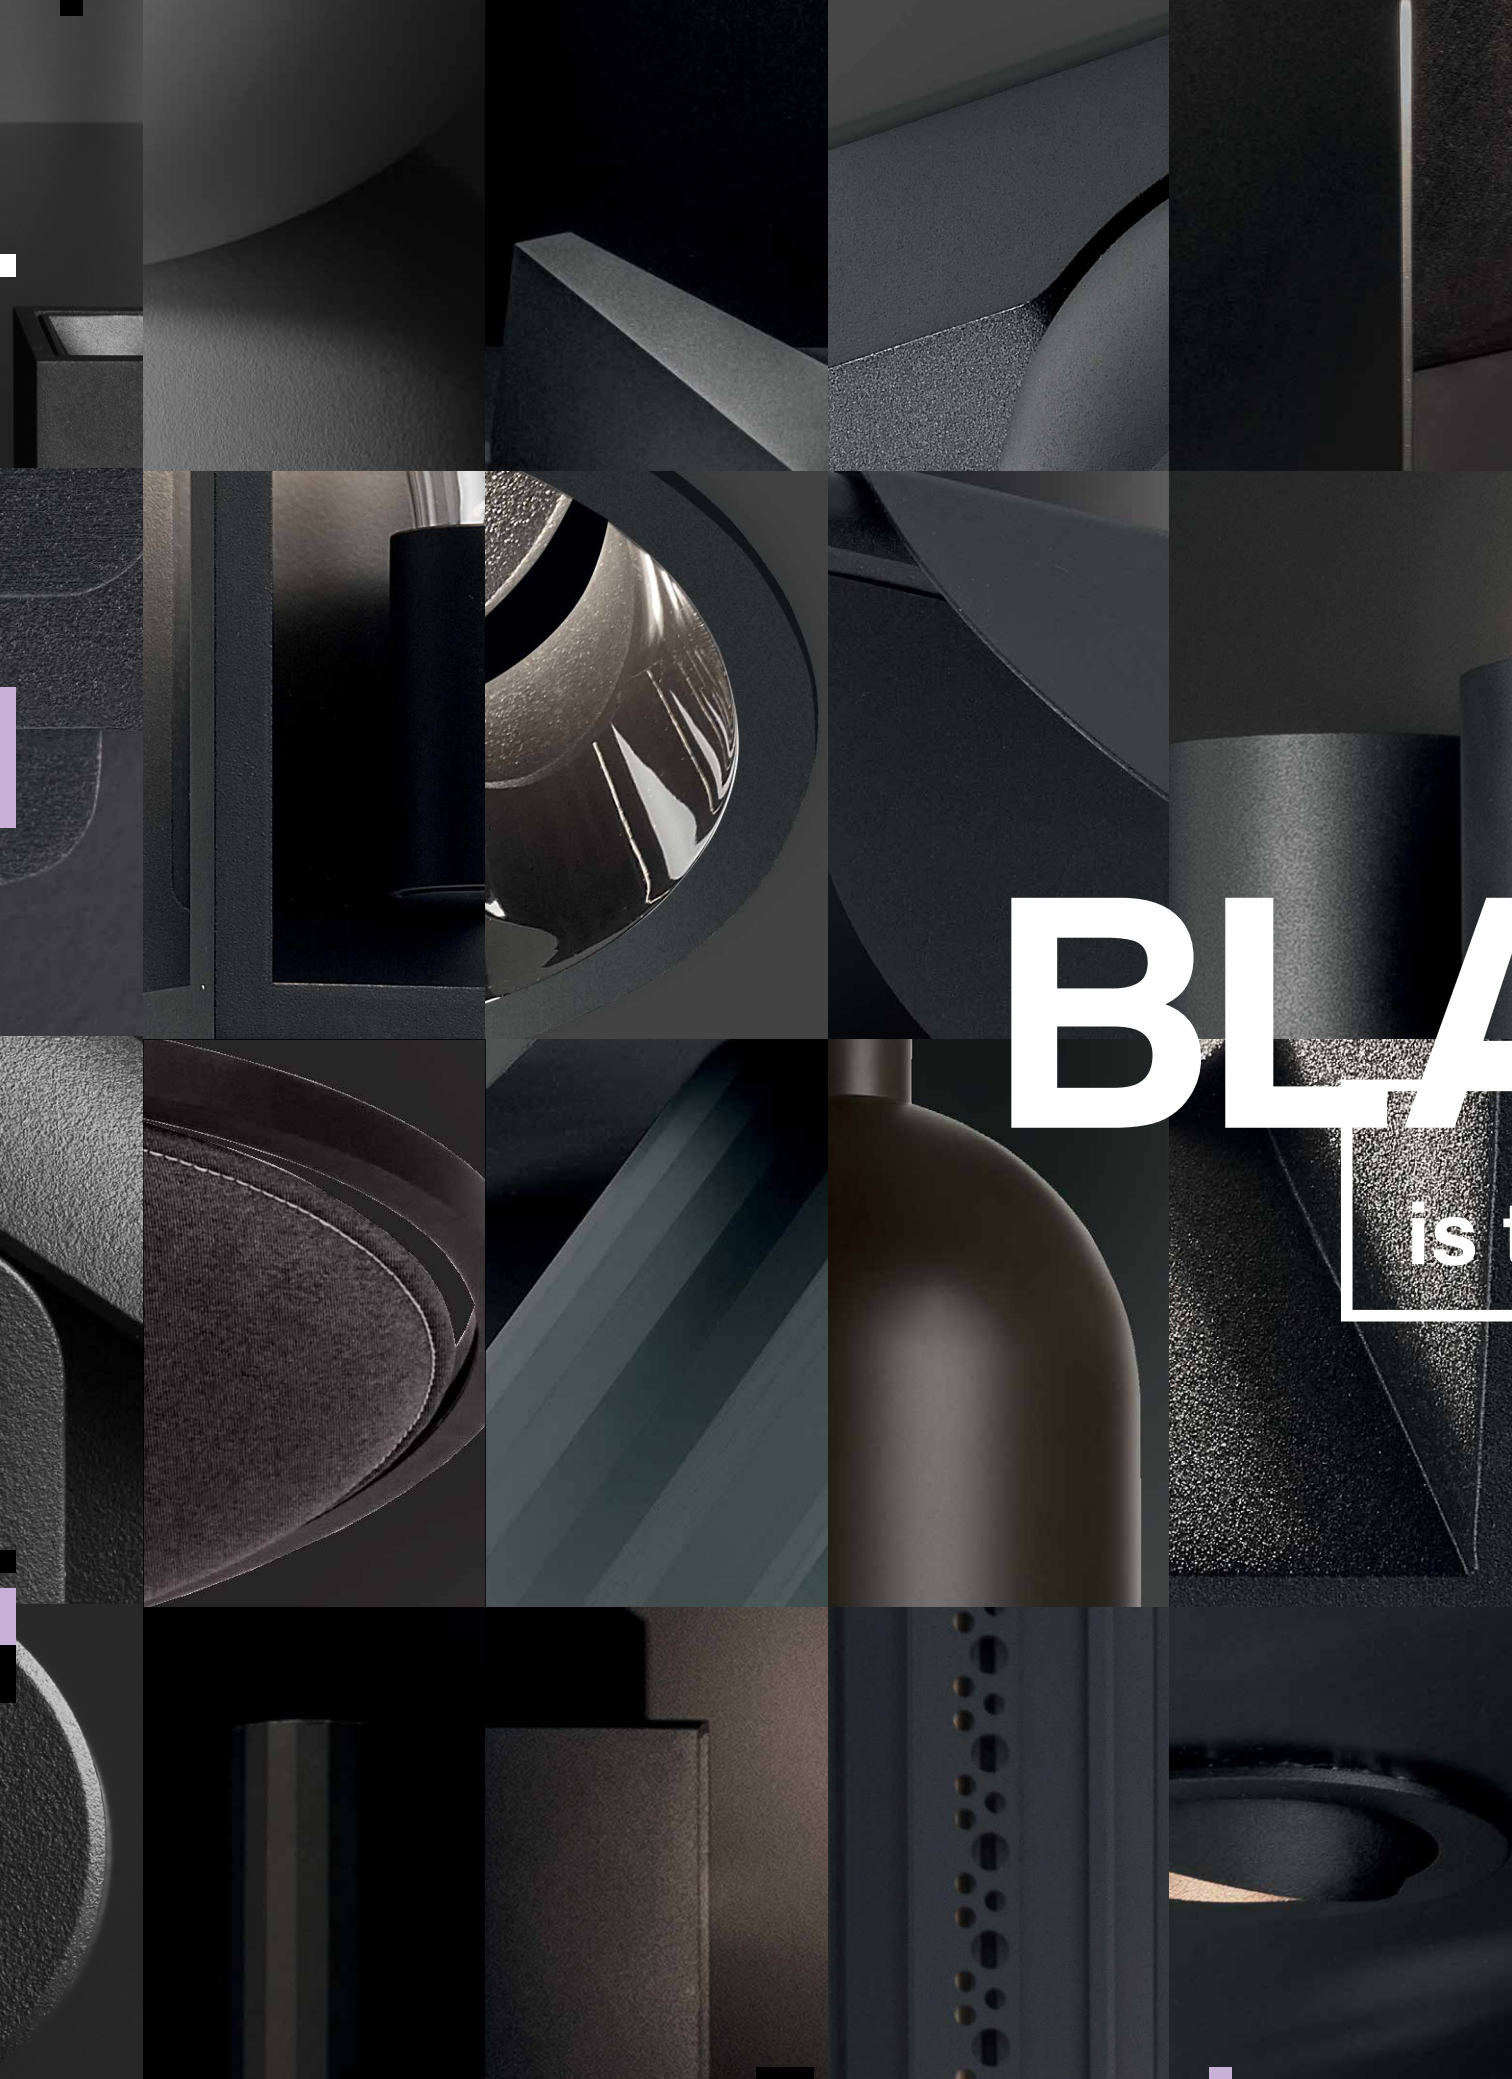
BLA
is t


ACK
the new black.
Black is mystery.
Black is shadow.
Black is power.
Black is the unknown.
Black absorbs.
Black empowers.
Black is formal.
Black is elegant.



Punk.

Step away from brave, alter yourself and dare to dare. This spiked design family breathes creativity and allows you to play with light and texture. Available in Black, Gold Coloured and Black Pure, a Black coloured finish with pure aluminum topped spikes.

FIND ME
ON PAGE 188




Boxy.

We love a challenge and we don't step away from them. Reinventing our evergreens is one of those. Take Boxy, once a single surface mounted cube for halogen lamps, now an elaborate family of cylindrical and cubic shaped fxtures that even fit on our magnetic profile range. We strive to be one step ahead and build on what you love.



FIND ME
ON PAGE 200 / 391



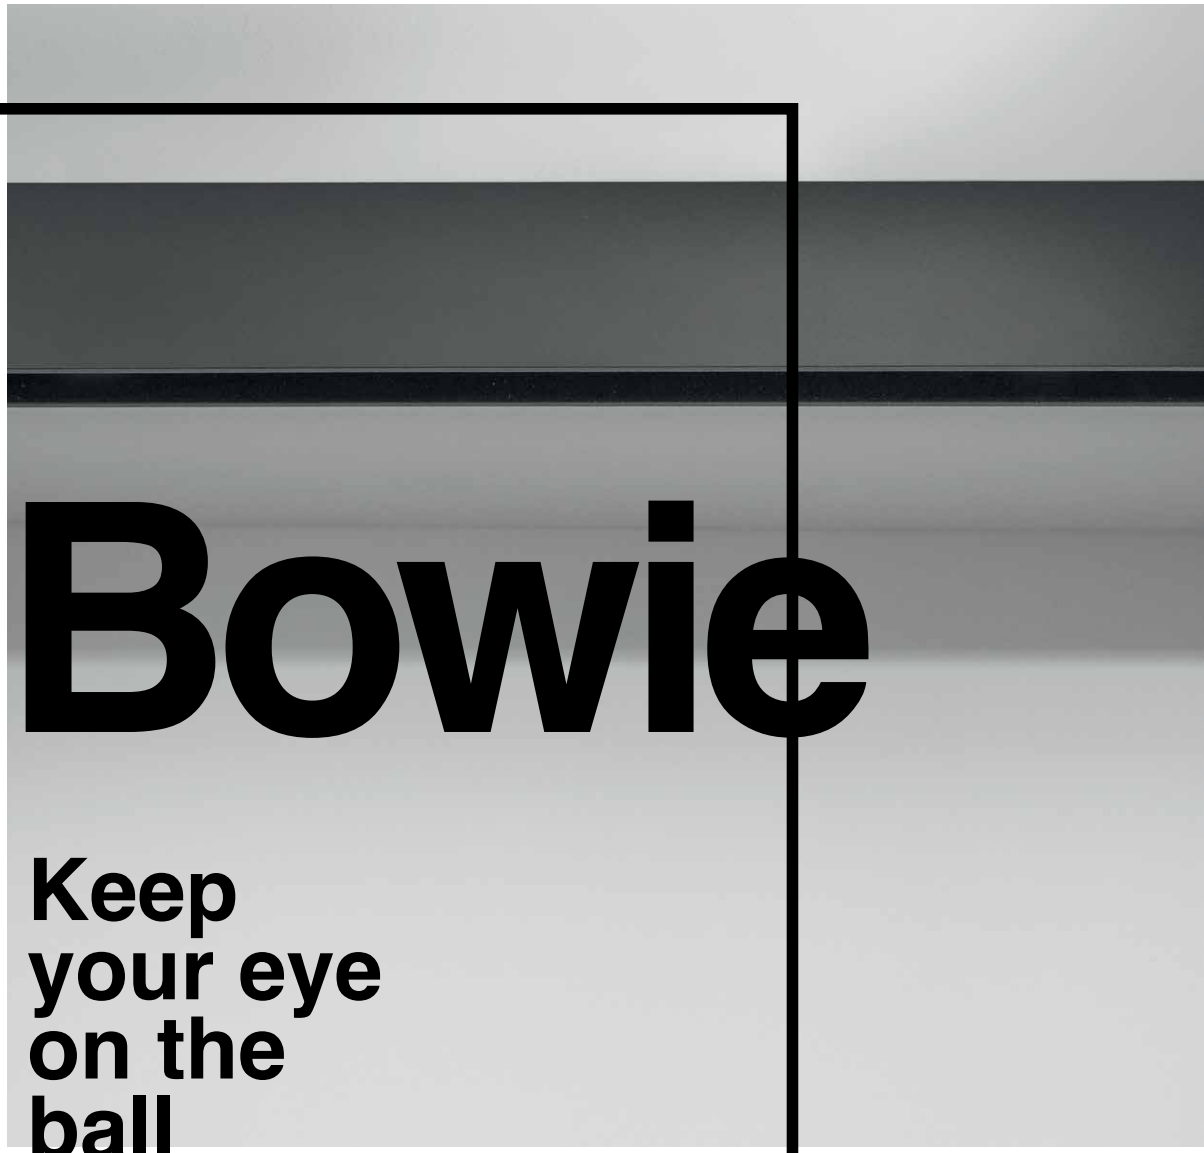

Bowie

Keep your eye on the ball

FIND ME
ON PAGE 222 / 394



Twist and turn, tilt and aim, Bowie will always look the same,
whatever its direction and no matter the angle you look at it.
Bowie in pure white or black easily fits in any interior
and adds a touch of richness to the room.




Dot.Com

Since 2004

First introduced in 2004 as a single LED luminaire, upscaled in 2008 as a multiple LED luminaire with 4 or 6 LED dots, implemented in the profile section in 2010 as a module with 4 or 6 LEDs, the history of Dot.Com within the Delta Light range goes way back.

FIND ME
ON PAGE
206 / 390 / 420

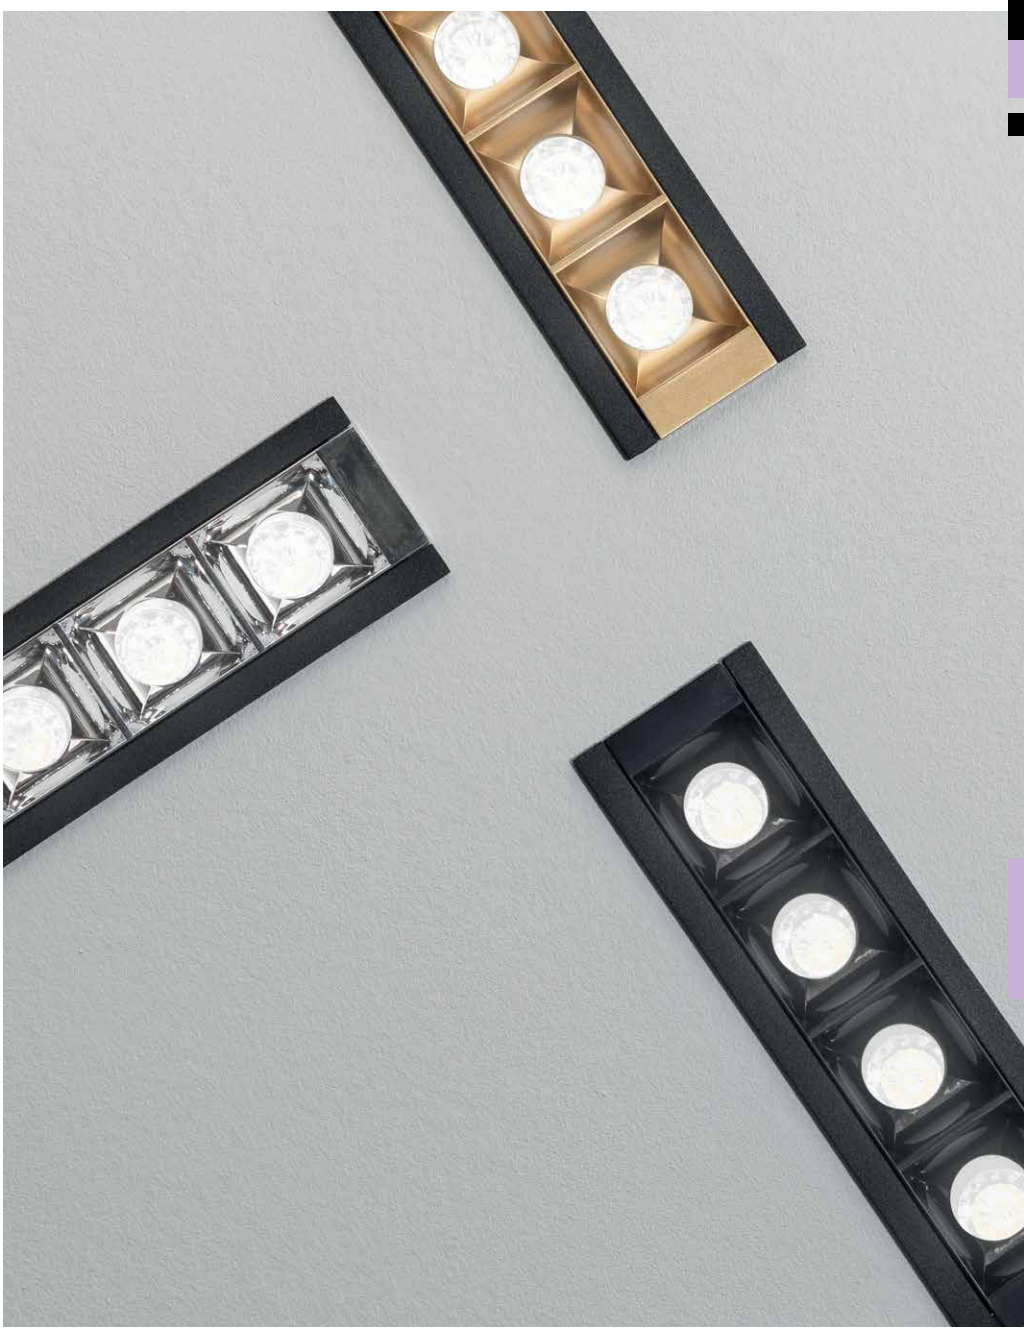




Designed around its flat optics, Haloscan combines ultraminimalistic looks with a pleasurable light effect. The light is softly spread by the plane lens and to smoothly turn and tilt, Haloscan uses the Ex-Centric Rotation System combining rotating and tilting in one swift move.

FIND ME
ON PAGE 212 / 396

Haloscan

Play with light, shape and texture


Initially created as an XXL version of our award winning Tweeter.

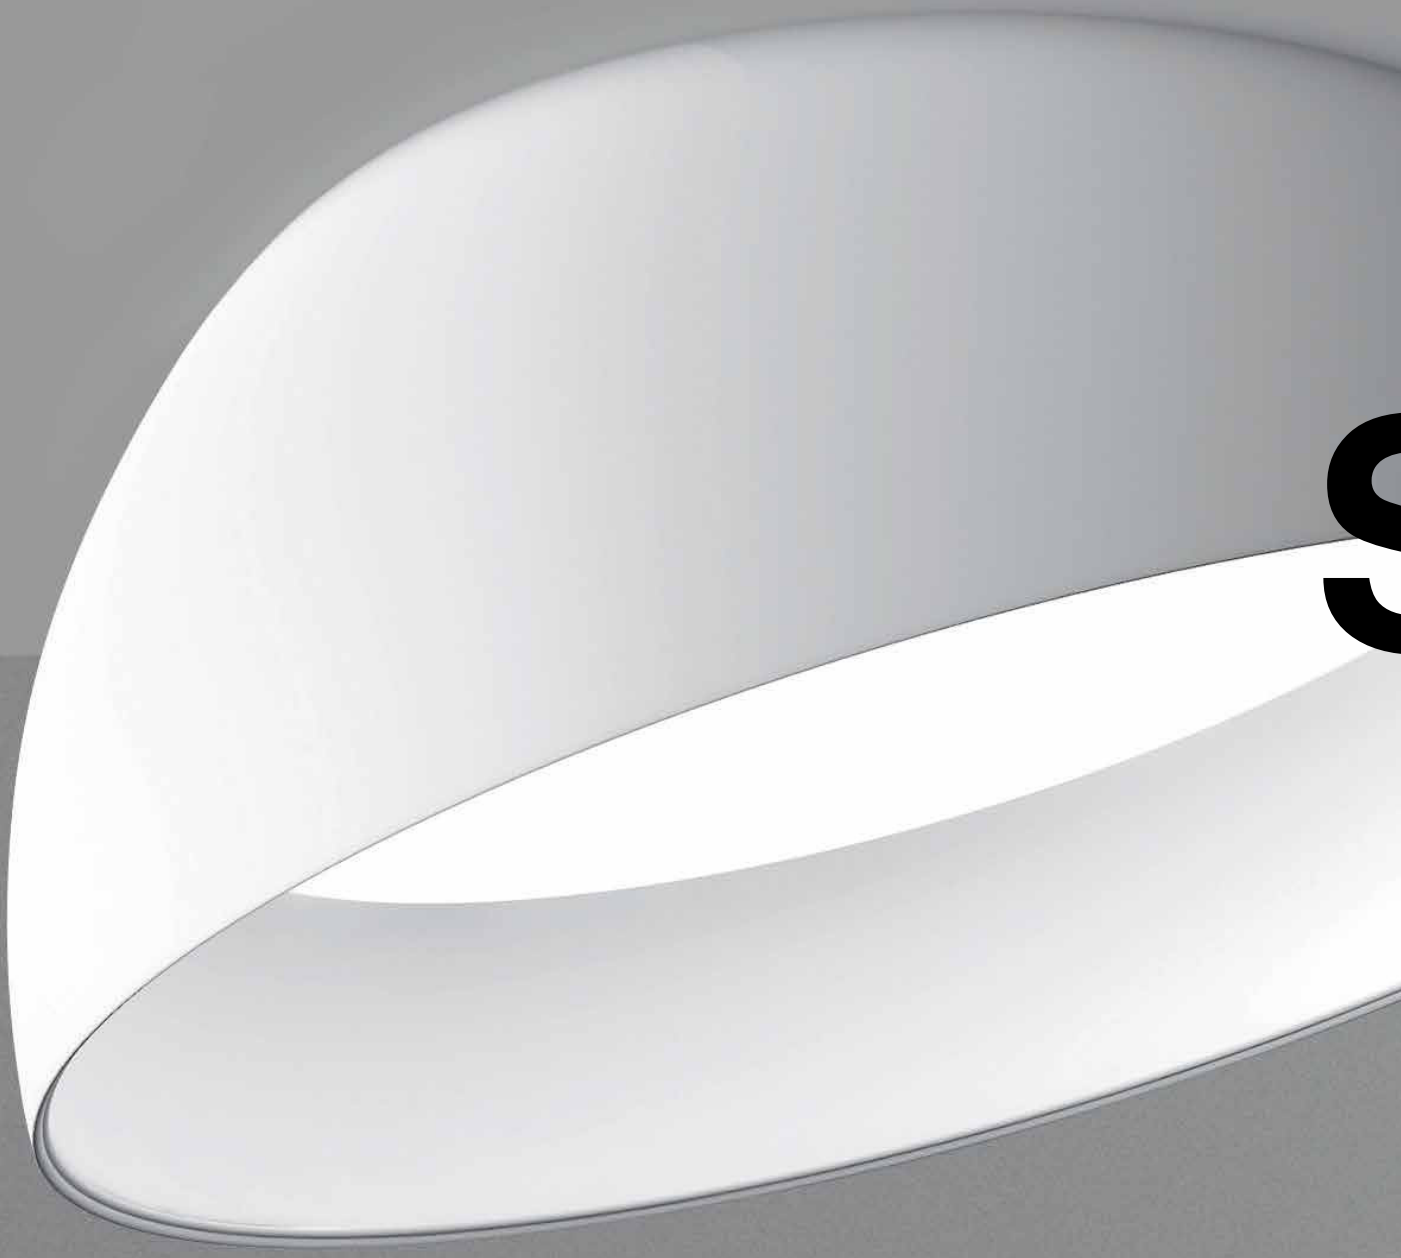

FIND ME
ON PAGE 182




Superdome

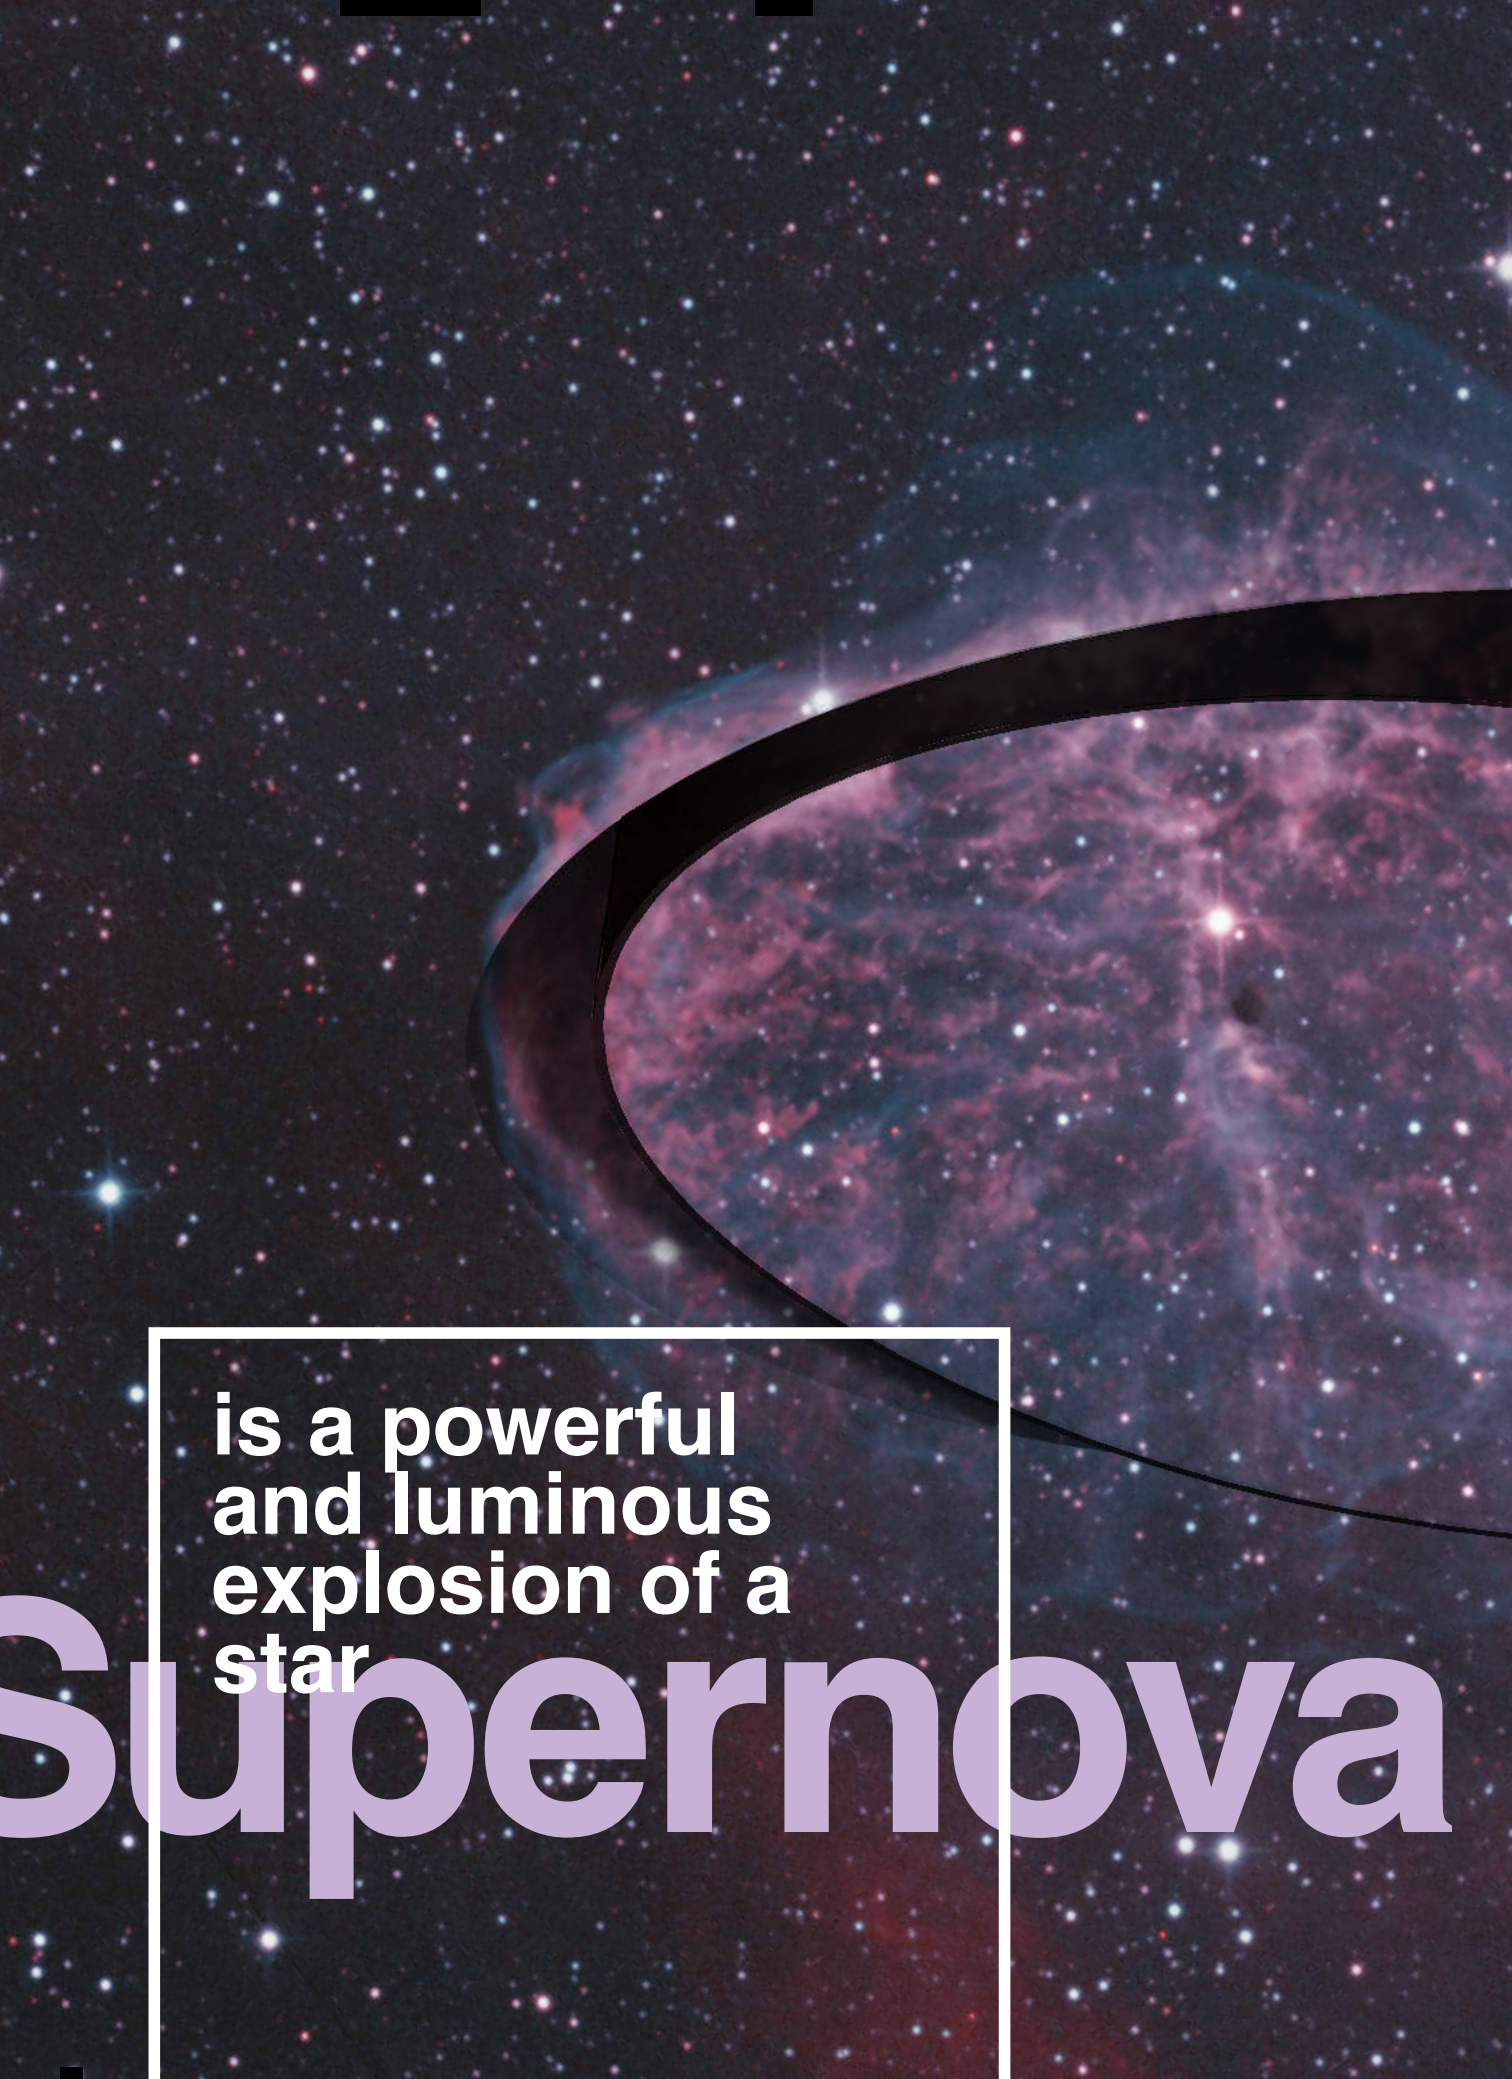

is a powerful and luminous explosion of a star

Supernova

FIND ME
ON PAGE 172

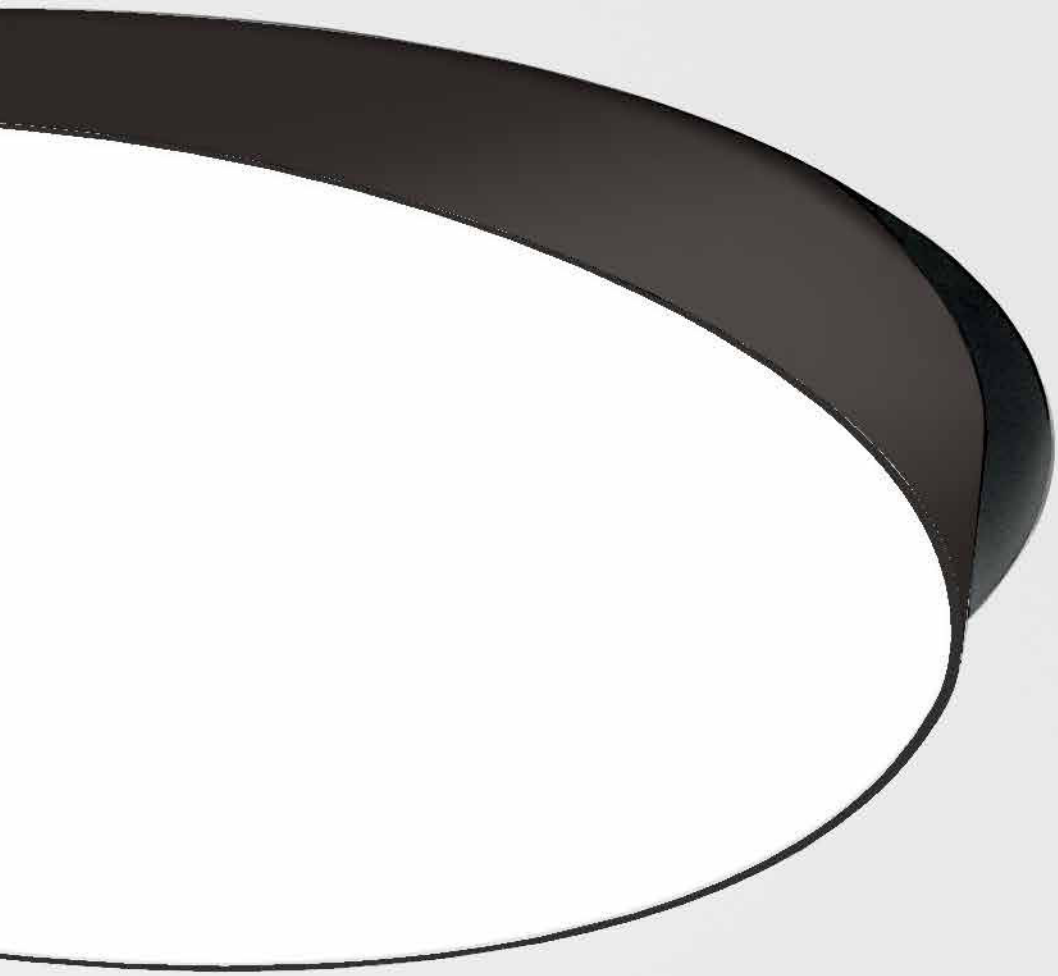

And a star it is! Supernova is an extensive range of pure geometrically formed lighting fixtures that guarantee powerful illumination and atmosphere. Small to large, recessed to suspended, for general lighting to office applications, the Supernova range features all you need.



The double shell ~~design prevents~~ ceiling exposure, while the flexible inner shell tailors for any lighting need.

With Tweeter Delta Light introduced the ERS – Ex-centric Rotation System®, characterized by an asymmetrical hinge joint, combining extreme rotation and tilting abilities, all in one swift whirling motion.

FIND ME
ON PAGE 218



Tweeter


DAO
One And Only
Powerful blend of
form and function

FIND ME
ON PAGE 306 / 438



A peculiar profile, both functional as decorative. The soft glow of the light along the sides of the profile makes One-And-Only float through the air, a powerful blend of form and function for an eye-catching look.

A collection of 4 purely handcrafted glass shapes, each in 4 different colours, each recognizable yet unique in all respects.
A family of suspensions that play on the visual contrast between the coloured and white blown glass, combined with different shapes and colours, also ideal for multiple compositions.
All shapes and finishes are inspired by the interplay of opacity, translucency and transparency.

Miles



FIND ME
ON PAGE 312




Inspired by the interplay of opacity, translucency and transparency



FIND ME
ON PAGE 268

SOLISCAPE

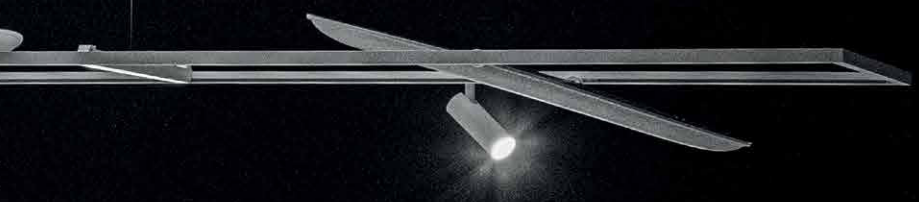

Ben van Berkel
UNSTUDIO

X

DELTALIGHT®

UNStudio and **Delta Light**
have joined forces to endeavour to improve the wellbeing of people in our rapidly changing work environments, where human health and the war on talent have become a primary focus for employers. Soliscape is an extremely versatile and flexible system, specifically designed to create human-centric environments.

The base of this family is a combination of Delta Light's Melanopic Light Technology (MLT) with high efficient louvre optics.



FIND ME
ON PAGE 280



The Inform family is an extensive range of linear and curved lighting solutions, designed to be used in applications that include task areas, like landscape offices, meeting rooms, reception desks, home office,… Areas which need technical architectural lighting at its best: eye for design, eye for the user and eye for performance.

Inform



As a set of tools, Mikaline let's you paint lines of light without limits, with the room as a blank canvas and the wall, floor or ceiling as a starting point, you can go any direction you want. Create frameworks that light up the room completely, opt for a cosy setting with only indirect light towards the wall or go for a pure linear pattern with dedicated task lighting, possibilities are endless and customizable to individual preferences.

Mikaline

Like brush strokes on a blank canvas


FIND ME
ON PAGE 264
I'm new
to the
range.



Lines of light

Have a look at our profile range. It's not only about linear lighting, it's aout the right linear light matching the needs of the project. How we contribute to this? By offering various designs, small guidance light or big performers, continuous light without interruptions or combined with spotlights, cut to the exact length you prefer.



FIND ME
ON PAGE 264

Femtoline

The range of Femtoline profiles is very extensive, with each family member having its own specific design and application area. Small or wider profile design, down or down-up lighting, wall, ceiling or floor mounted, flush or tilted plexi, ... the Femtoline family offers a solution to any lighting problem. As diverse applications ask for diverse optics, Femtoline 35F HE comes in 3 different optial finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from aside.



FIND ME
ON PAGE 422



Diverse applications ask for diverse optics



1 + 1 = 3

The combination of ultimate flexibility with the fine line of light running next to it adds to possible applications for the Shiftline M26 H, as accent lights can be combind with general light without limitations. Boost your creativity by plugging in any light module you want in the magnetic profile without interrupting the continuous light of Tagline that runs along.
A perfect example of 1 + 1 = 3.

Go for **ALL ON** and light up all light modules at the same time, including the linear Tagline
Go for **ONLY ACCENT** to switch on the magnetic modules and create a cosy setting by highlighting the accents you prefer
Go for **ONLY GENERAL** and use the fine line of light for a soft general light effect

FIND ME
ON PAGE 382

I'm new to the range.



SLM26H

+ SBL



Our Splitline and Shiftline profiles combine refinement and clean lines with a boost of flexibility thanks to the magnetic mounting of the light modules. All modules - spots, linear LED lines and pendants - can easily be positioned or repositioned into the profile without the need of any tools. But flexibility is also visible within the profiles itself as they can be used to draw various sets of black lines into the ceiling:multiple curves, corners, T- and X-sections allow the user to freely create any desired structure.

Splitline

Curves in all the right places

FIND ME
ON PAGE 380





SLMF

Make it your own. Our SLM26 F builds on the endless flexibility of our magnetic profiles, which allow a simple toolfree (re) positoning of the lights onto your ceiling. Now also available as stand-alone solution, you can easliy personalize the room to your preferences. Opt for simple accent lighting or combine with indirect light for the more cosy settings, your choice!

FIND ME
ON PAGE 260

I'm new to the range.



A personalized floor lamp



FIND ME
ON PAGE 232



Panache

Put some dash into it! We've added some colours for you to explore and to experiment with. 5 new brushed colours ranging from grey to copper, accompanied with the shiny Piano Black finish. Allowing you to play with finishes, be it for a more classy look and feel or to create a modern twist within contemporary architecture.

Flamboyant confidence of style



Layers of light

Shape your wall into a piece of art. The layers of light generated by Band-Oh! provide a sense of depth onto the surface its being installed on. The light not only hits the wall for a V-shaped down-up light effect, it also creates a play of light on the fixture itself.

FIND ME
ON PAGE 334

I'm new to the range.



Band-Oh!

A highly original interpretation of an archetypical concept

The Montur not only breathes new life into a classic concept, it also adds a detailed element of refinement. The sharply profiled framing in aluminium is utterly devoid of welding seams. For both the indoor and outdoor versions, there is a choice of finishing with either hand pressed transparent or opal glass. The opal glass version contains a milky, cone shaped core, with a transparent glass surface, creating a pleasantly diffused light that gives the lamp extra cachet.

FIND ME
ON PAGE 330 / 490




Montur

Skov

Light as a Guide



FIND ME
ON PAGE 478

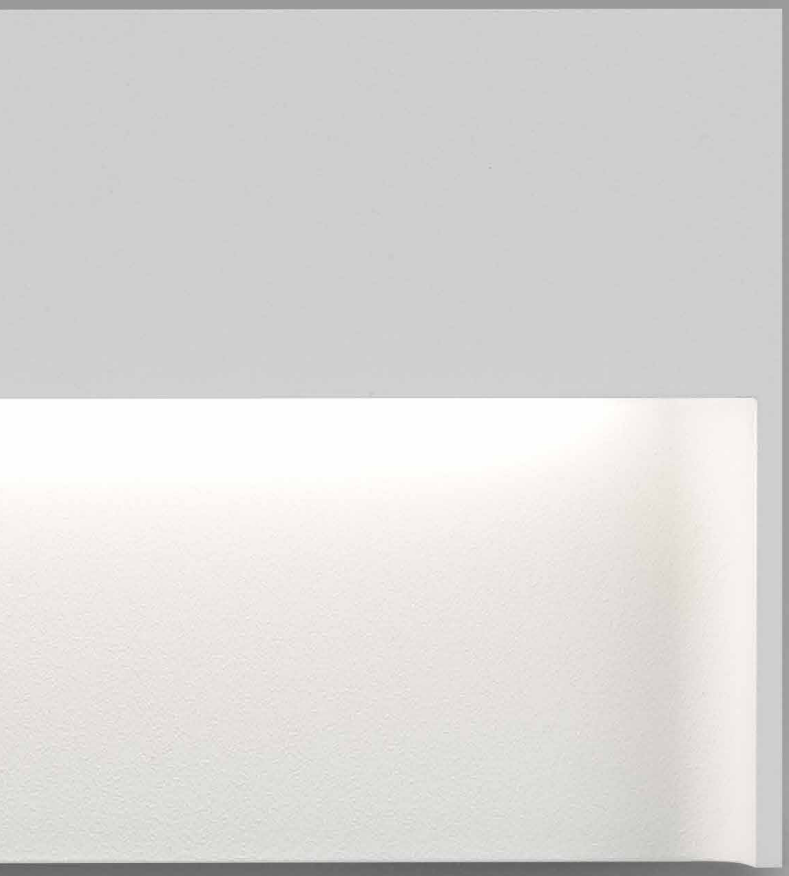

The combination of a recessed LED array with the specific design of Skov generates visibility along the path without being obtrusive for the passer-by. The light leaving the luminaire gently falls onto the veil of Skov, revealing a soft light effect to guide you wherever the path may take you.



A soft glow of light during golden hour, at the end of a sky-blue summers day

FIND ME
ON PAGE 216

I'm new to the range.



Oono

Built in first instance as a family of exterior products,
Oono is a family of dualities.
It combines elegant looks with a warm diffused light effect.
It couples the sturdy look of metal with the pureness of glass.
It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with staraightforward surface mounted and pendant luminaires for indoors.
It unites a play of straight lines with perfect circular shapes.
It merges black and white, by adding a touch of gold.
It brings together the shimmer of dusk with the fresh start of dawn.



FIND ME
ON PAGE 184



XY180

OMA

X

DELTALIGHT®

Inspired by a fascination with point, line and surface


XY180 is a 3-piece lighting collection designed by OMA. The collection was inspired by a fascination with point, line and surface; key architectural elements. The floor, wall and ceiling lights are meant for individual and shared workspaces, but can also be applied to domestic and public interior spaces.



Octav

However you look at it, Octav draws the attention. Its design catches the eye, and after a first glimpse for sure you will be intrigued to look at it again. Depending on the inclination angle of the adjustable spotlight, other design elements stand out.

FIND ME
ON PAGE 196

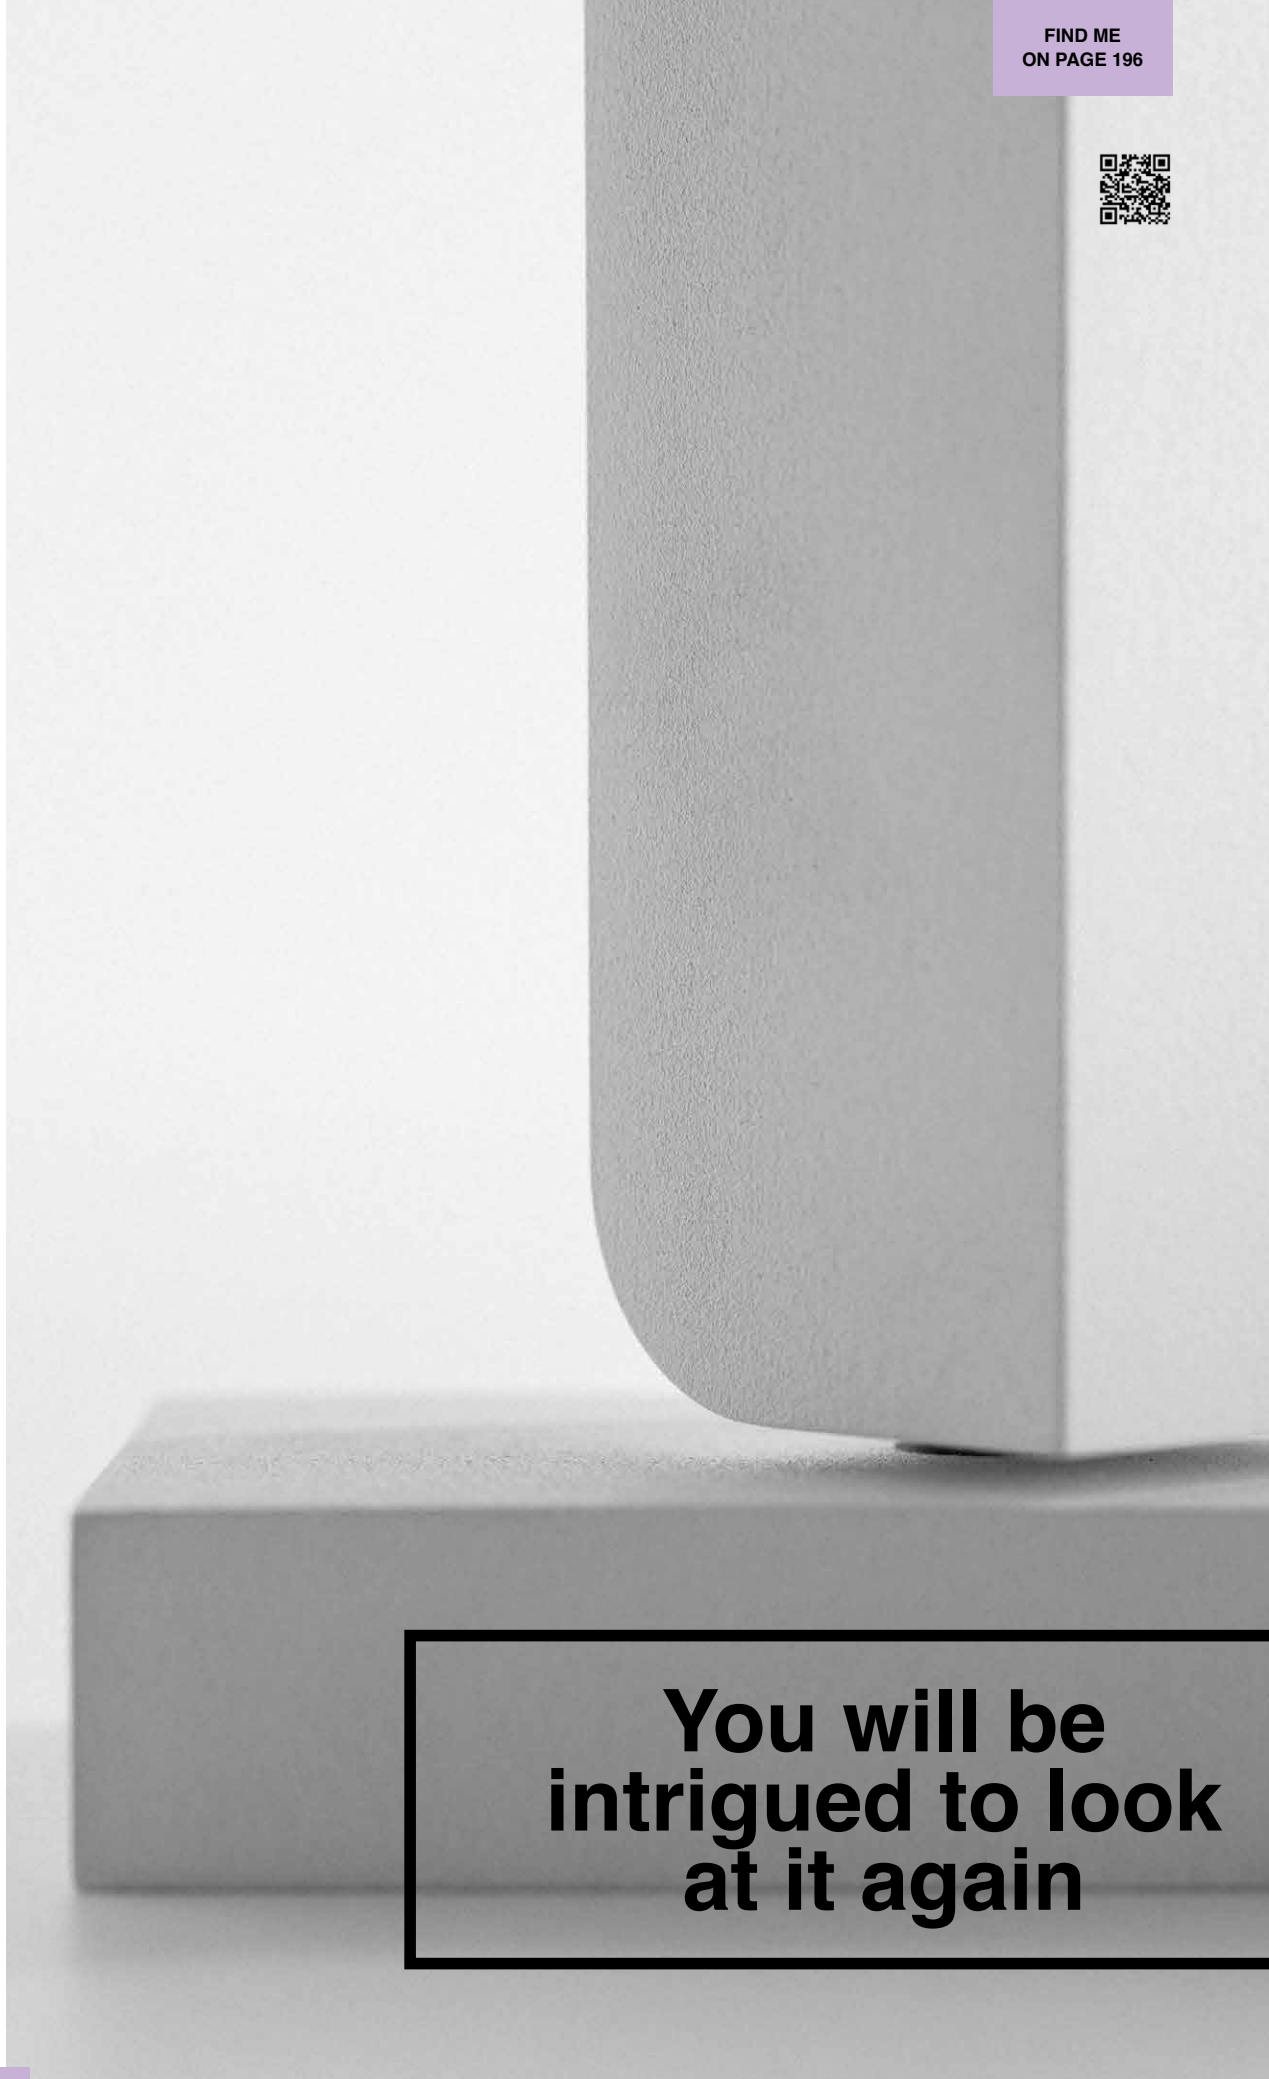


You will be intrigued to look at it again

Showing off its slim cylindrical contour



FIND ME
ON PAGE 262

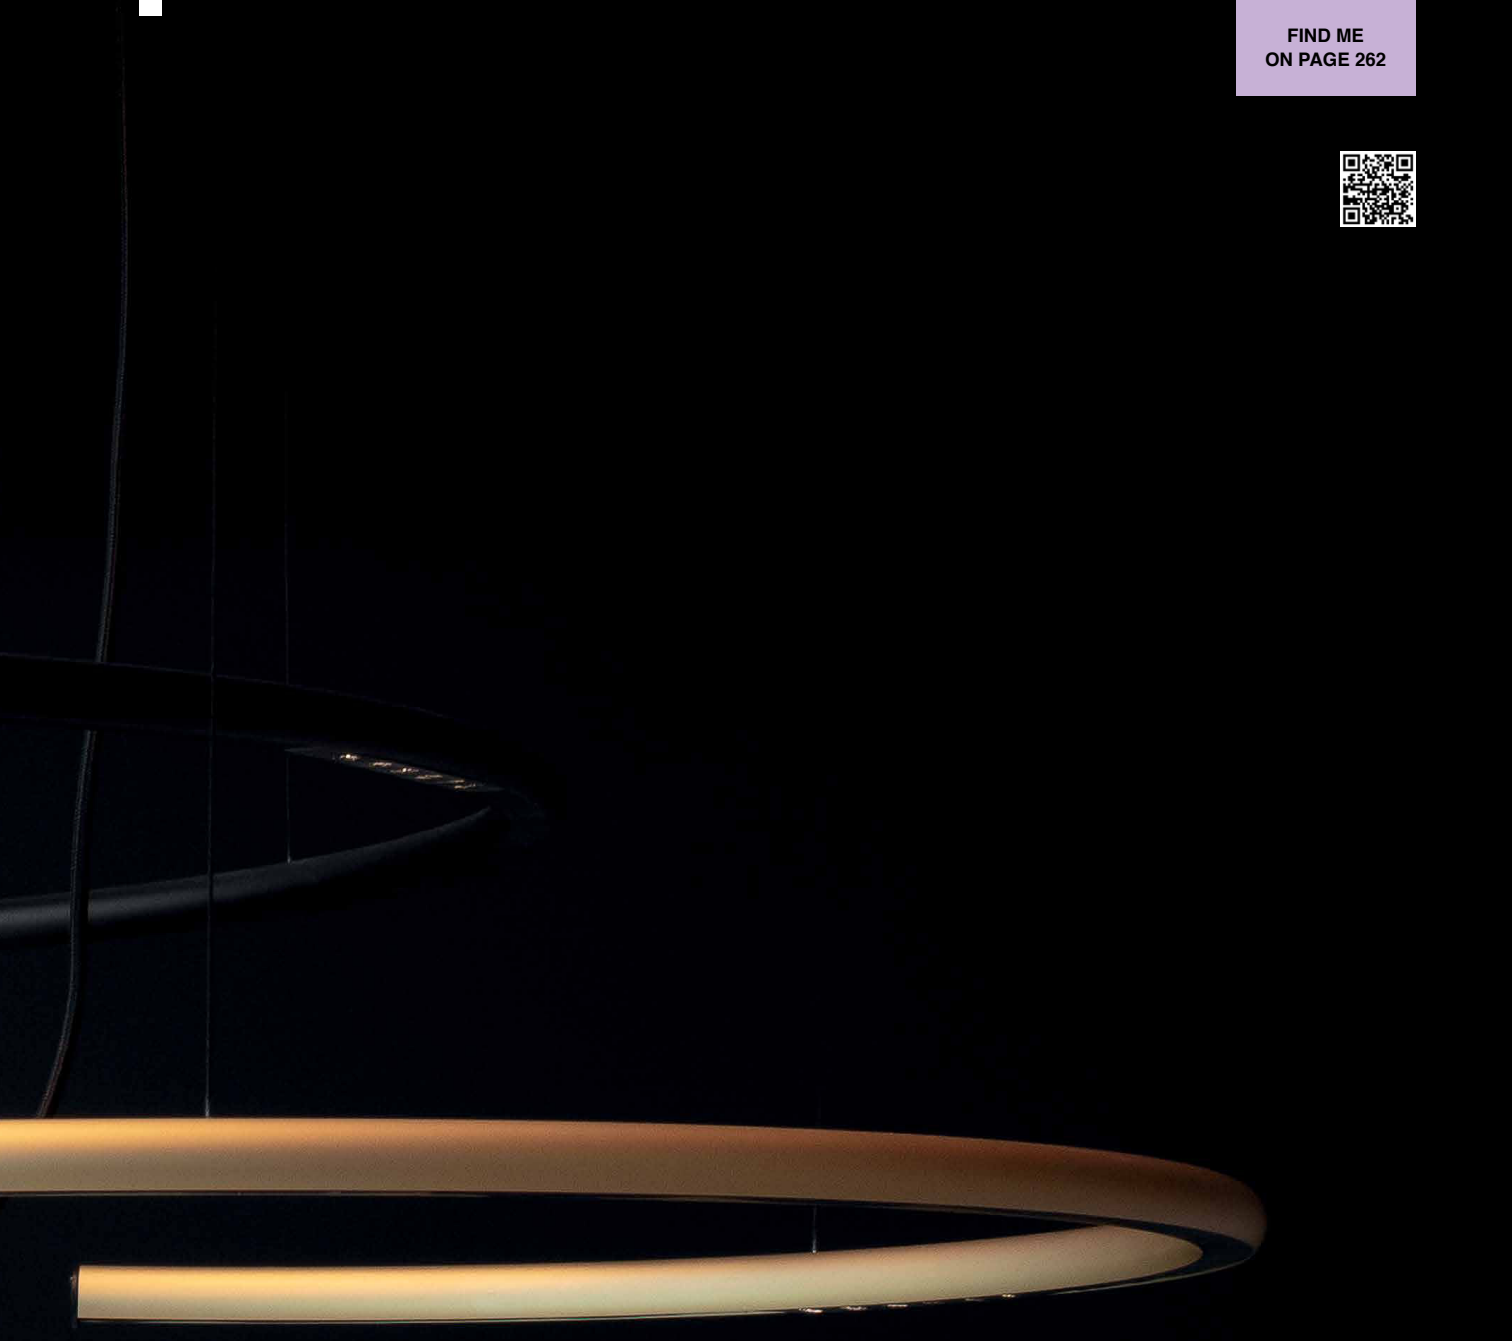

Lass-Oh!

Lass-Oh! glides trough the room as a snake sliding through the greensward, showing off its slim cylindrical contours in combination with the miniature LED clusters hidden inside its body. The variety in shape - straight lines, circles or curved rectangles - in combination with the optional shades make of Lass-Oh! a very decorative lighting solution.




FIND ME
ON PAGE 514

I'm new to the range.

Light and ambiance not only fit indoors, by combining light and architecture, outdoor settings also remains vibrant at night. With 7 different light effects and multiple installation options, Frax has been designed for every aspect of the urban architecture: any form, any material or any composition.

Frax P

Optical precision

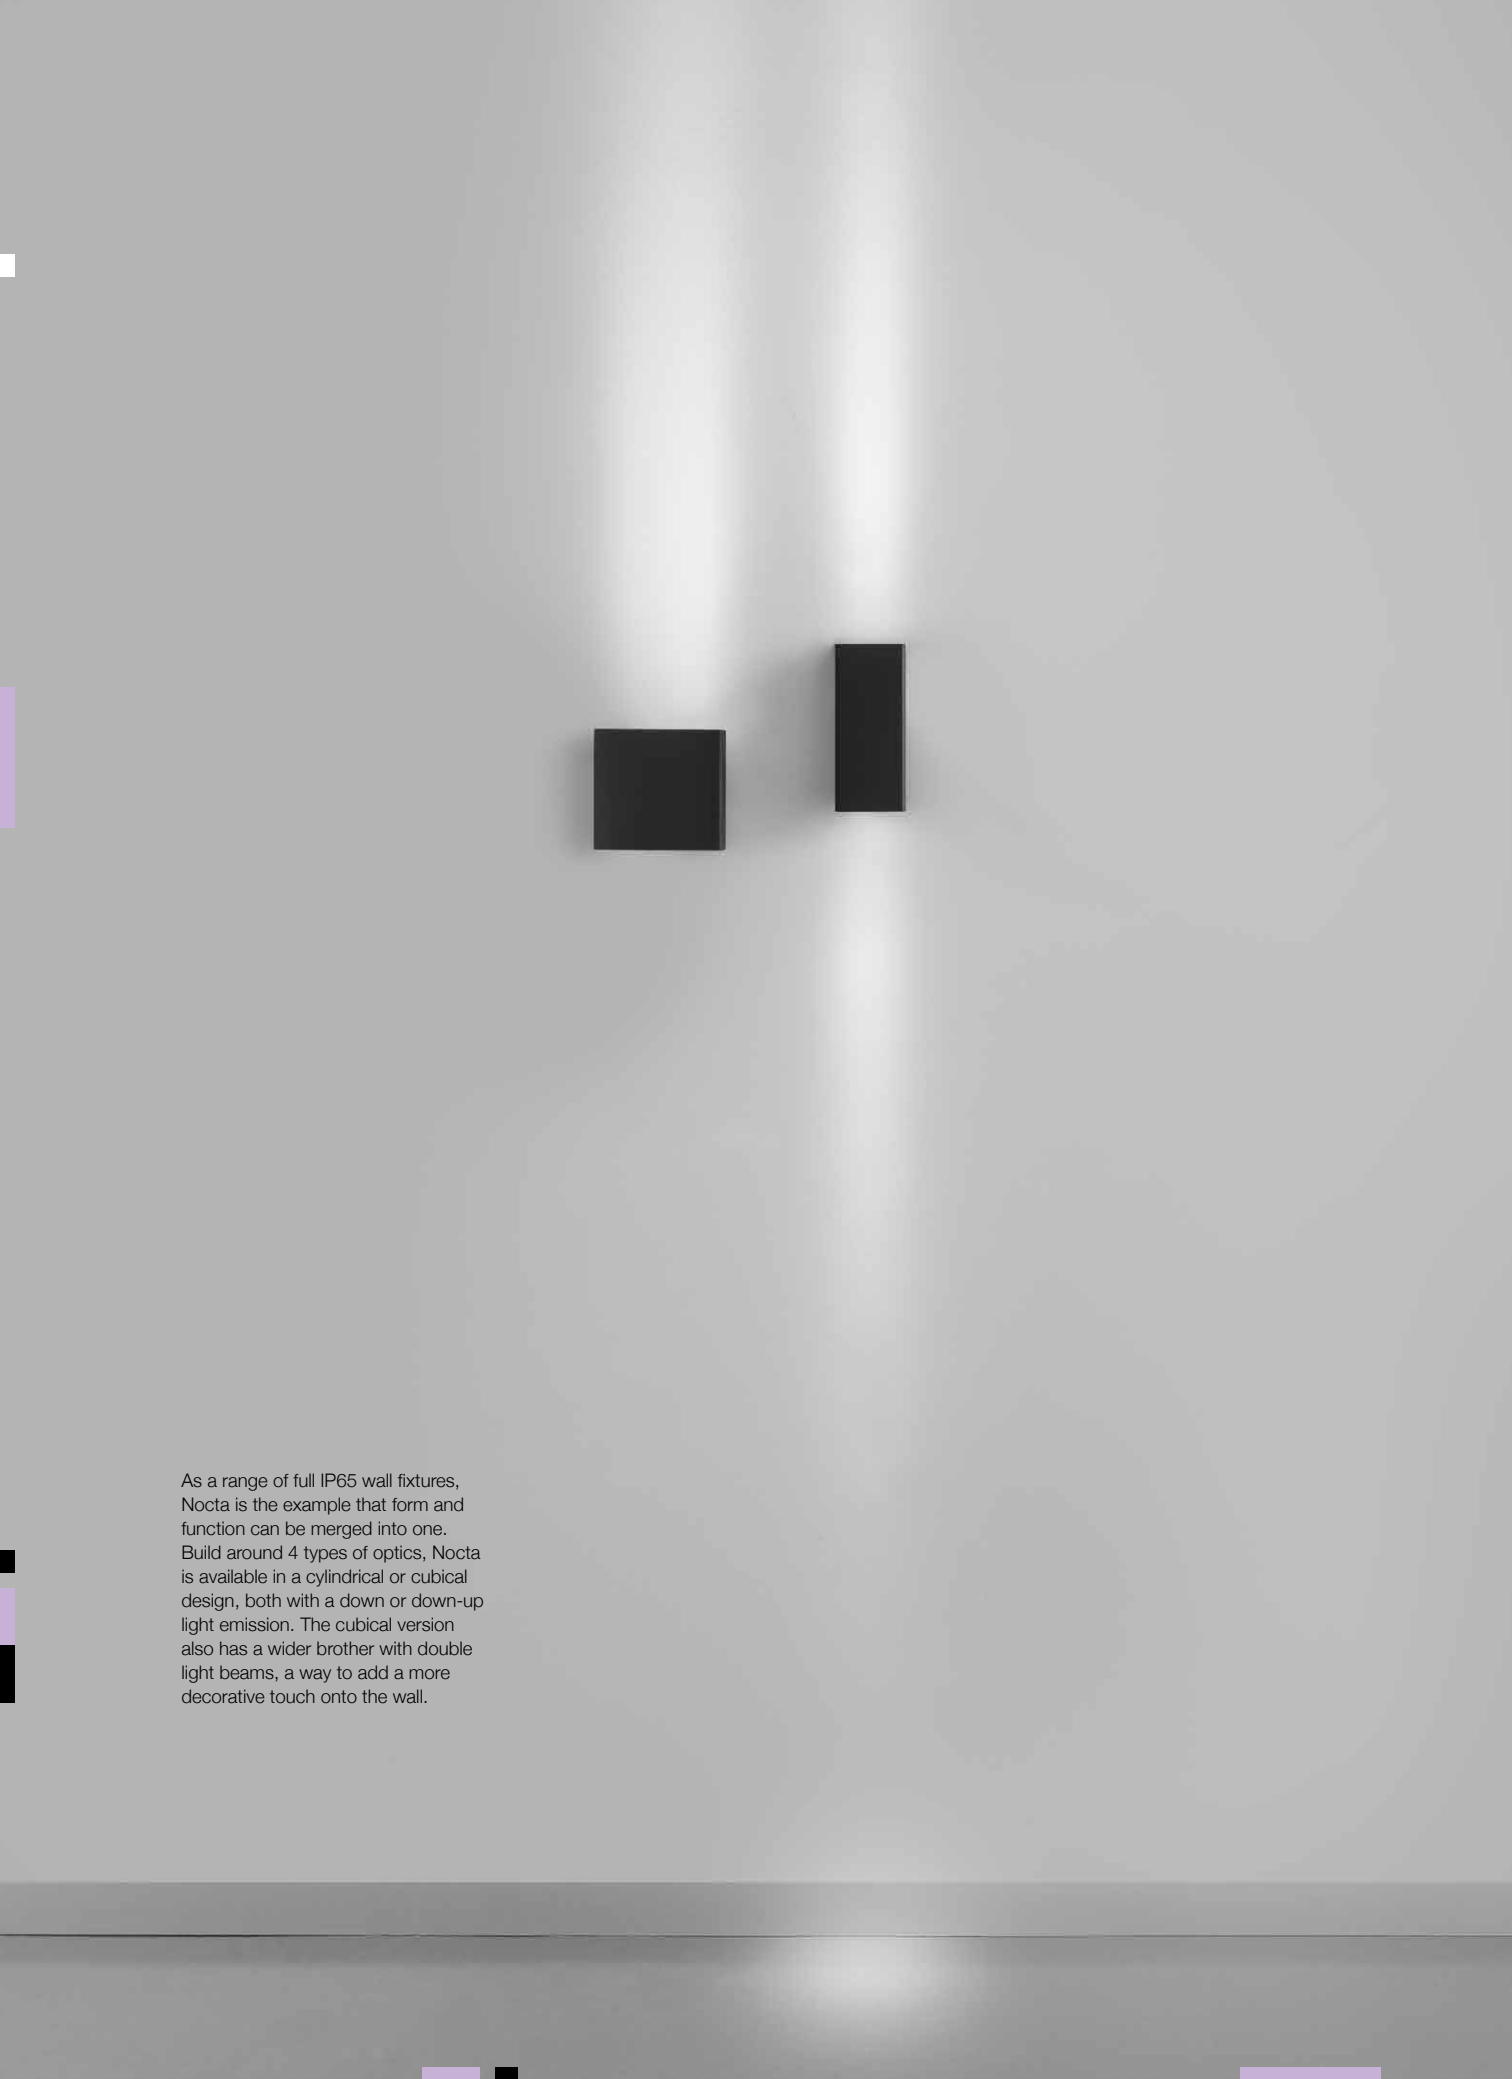


As a range of full IP65 wall fixtures, Nocta is the example that form and function can be merged into one. Build around 4 types of optics, Nocta is available in a cylindrical or cubical design, both with a down or down-up light emission. The cubical version also has a wider brother with double light beams, a way to add a more decorative touch onto the wall.

FIND ME
ON PAGE 484

I'm new to the range.


Nocta

Variety in shapes and optics

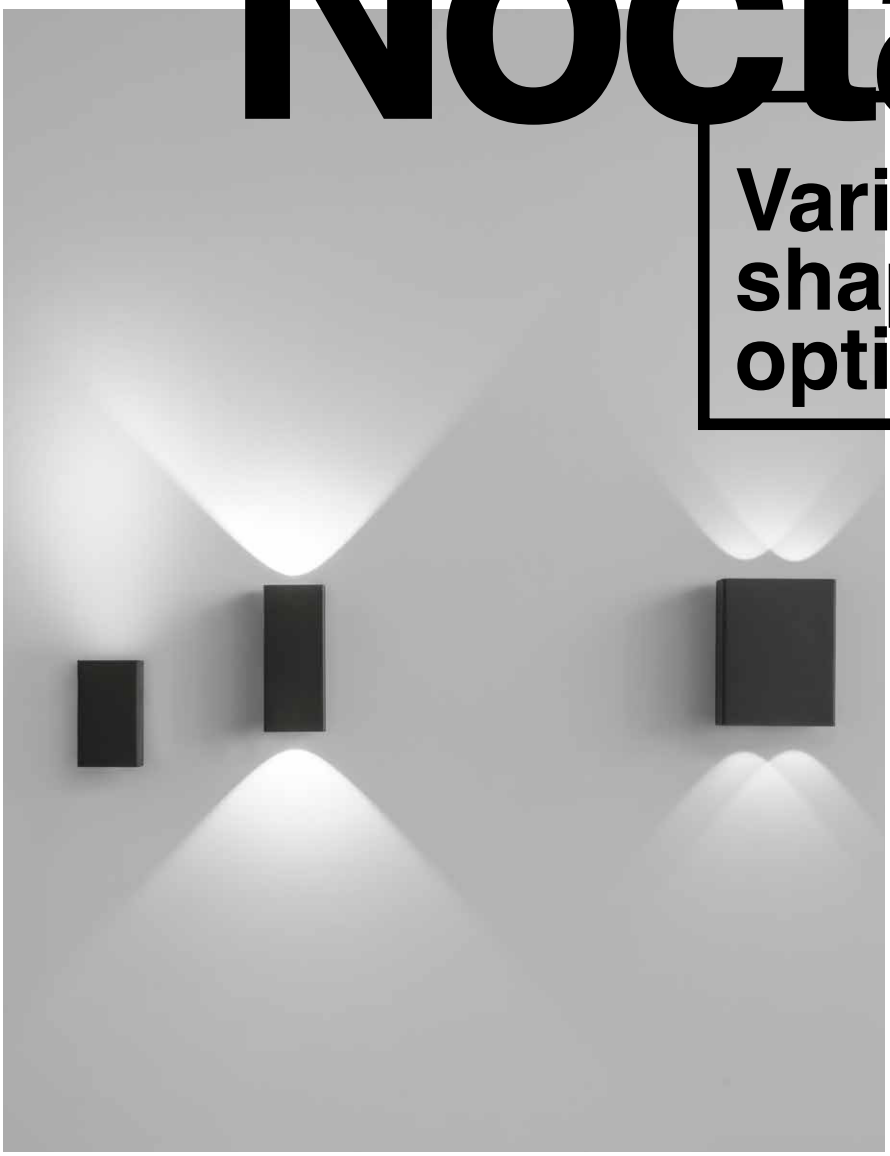

Like a spear thrown into the lawn

Stievie

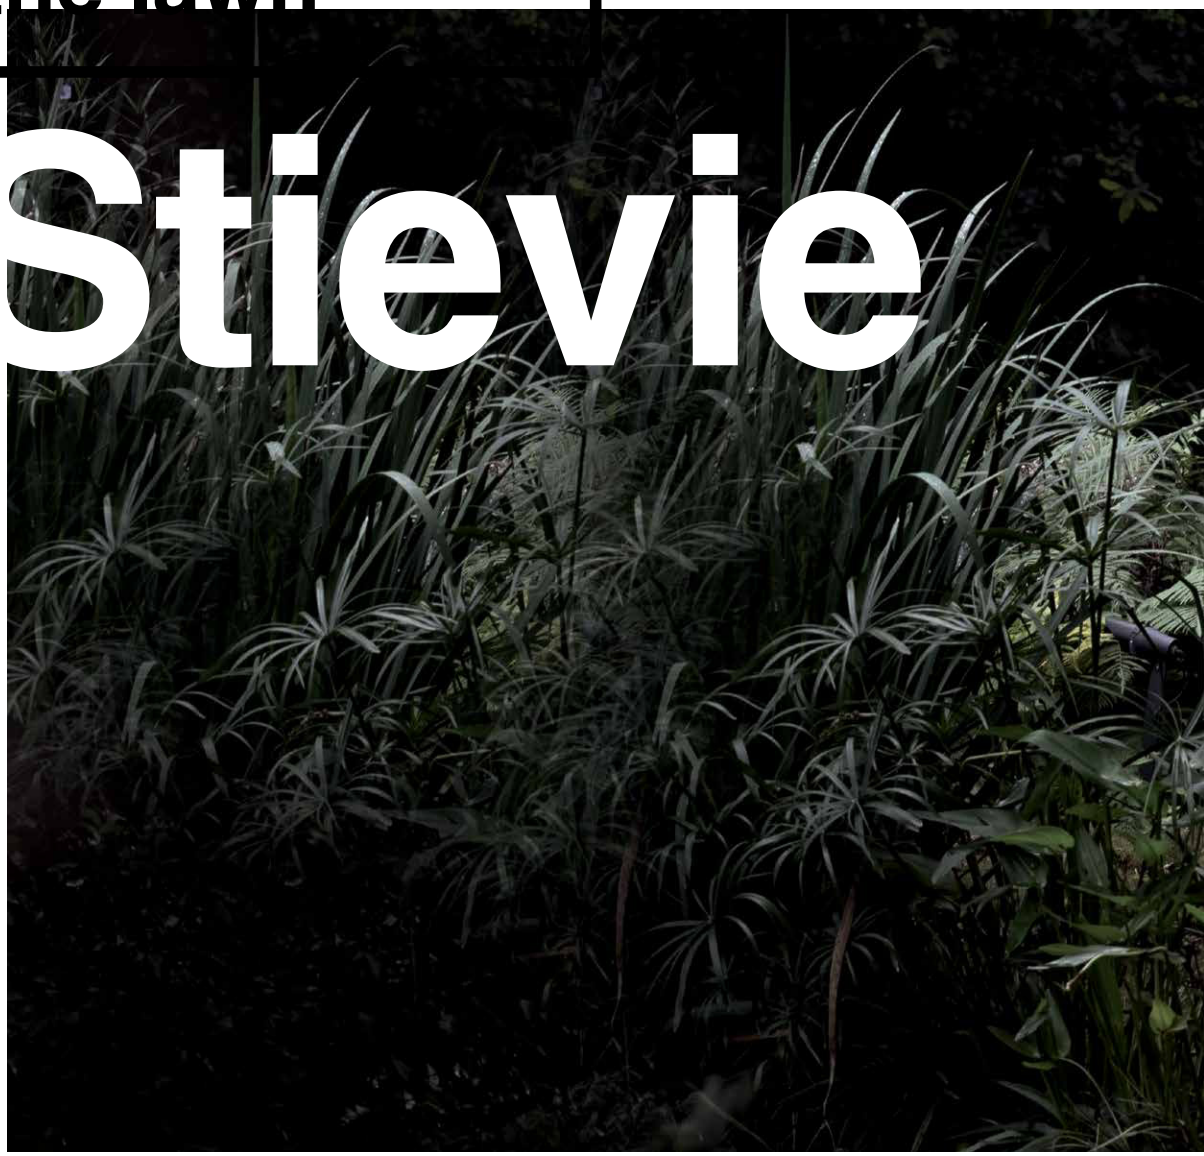

Stievie is not your typical lighting bollard. The sharp pin underneath the luminaire allows you to install it in many different ways, like a spear has been thrown into the lawn. Its linear light generates a pleasant and warm light effect.

FIND ME
ON PAGE 522





FIND ME
ON PAGE 520

Green is fertility
Green is yellow, green is blue
Green is growth
Green is young, green is fresh
Green is calming
Green is life
Green is new,
Pine Green is new

Pine

Green, the prime colour of the world



Logic

FIND ME
ON PAGE 500

I'm new to the range.

Our Logic extensions are the perfect example of our continuous quest to innovate. A range that breaths quality, shows our idea of family thinking, makes use of clever design and most of all adds to our Delta Light outdoor range. With the Logic 190 R OK as masterpiece - fully adjustable on-site without the need of opening the luminaire.

Smart, clever, Logic!

Logic Linear

Brings any architecture to life

Based on the same principles as Logic 190 R, Logic Linear offers additional options in linear upligting. As an individual projector or installed in a continuous line, these fittings are perfect to install around facades or other architectural elements. With its wallgrazing optics, Logic Linear easily lights up structured vertical surfaces to enhance the sence of depth of the structure and make them more lively.



FIND ME
ON PAGE 500

I'm new to the range.

SAND / SOLI-SHHH

SCARLET / SOLI-SHHH

PINK GLASS

ARCTIC / SOLI-SHHH

LILAC / SOLI-SHHH

SMOKE GLASS

DARK GREY / SOLI-SHHH

LIGHT GREY / SOLI-SHHH

OPAL / MIST

AMBER GLASS

LIGHT GREY / PET FELT

DARK GREY / PET FELT

The Delta Light range has more to it than light alone. We play with light that seems intangible and combine it with materials and textures to make it tangible. Only like that it is possible to talk about “look and feel”, “a touch of light” or “light that embraces you”. We give an extra dimension to light.

Tactile

Play with light and textures





BRB / BRUSHED BRONZE

PA / POLISHED ALU

ANO / ANODIZED

GC / GOLD COLOURED

W / WHITE RAL 9003

BL / BARRIER BLUE

G / GREY BROWN

PGR / PINE GREEN

BP / BLACK PURE

MMAT / GOLD MATT

GM / GOLD MARBLED

B / BLACK RAL 9005

FBR / FLEMISH BRONZE

FG / FLEMISH GOLD

AM / ALU MARBLED

BBR / BLACK BRONZE

A / ALU GREY

PB / PIANO BLACK

BRAT / BRUSHED ANTHRACITE

BRA / BRUSHED ALU

BRG / BRUSHED GOLD

BROB / BRUSHED OLD BRONZE

BRCU / BRUSHED COPPER

N / DARK GREY

RW / RAW WHITE

It’s also about how good the light looks

Finish

Light means a lot, and light can do a lot. Light is there to create an atmosphere, light can energize and light can calm down. Light can lift up a space, light can make you feel good. Light canmake you look good. But who thinks about the light? It’s not only about how the light makes you look, it’s also about how good the light looks.

Index.

Impressions.

Have a look on page 3-86 to see product details, finishing colours & to get a first impression of our latest novelties.

Create on paper.
Imagine online.

Projects.

Browse to page 571-634
to get an idea on how our
products are being
applied into residetial, hos-
pitality, office, retail and
public settings,
both in- and outdoors.

INDEX

Interior Ceiling Recessed

New members to the family!



NIME P 116



IMAX P 126

New members to the family!



ENTERO P 118



HOLE IN ONE P 130



SPLITBOX P 132



CARREE P 134



REO P 136



ARTUUR P 140



PLAT-OH! P 144



New members to the family!

DEEP RINGO P 146



GYN P 150



PARTOU P 152



TWENTY-7 P 154



DIRO SBL P 156



GRID P 158

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



MULTINOVA P 164



SUPERNOVA P 172



SUPERDOME P 182



DOT.COM P 206



HALOSCAN P 212



TWEETER P 218


New members to the family!



SPY P 226



UHO P 224

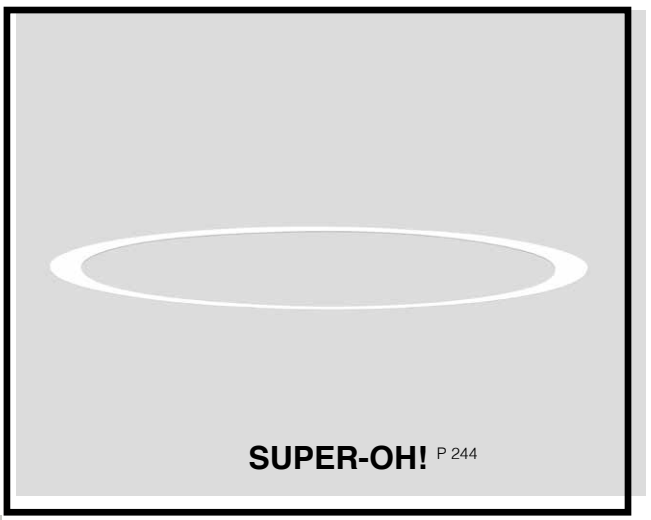

SUPER-OH! P 244

New members to the family!



INFORM P 280



D-LINER P 294

I'm not alone. You can find me in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface


DIRO SBL P 156


XY180 P 184


PUNK P 188


VIZIR P 190


HEDRA P 192


OCTAV P 196


NEEDLE P 198


BOXY P 200


DOT.COM P 206


HALOSCAN P 212

New members to the family!


OONO P 216


TWEETER P 218


Hi! I'm new to the range.

OBIN P 220


ODRON P 222


BOWIE P 222

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



UHO P 224

New members to the family!



SPY P 226



RAND P 242



SUPER-OH! P 244



SUPERLOOP P 250




SUPERNOVA P 172



GRID P 158



LASS-OH! P 262

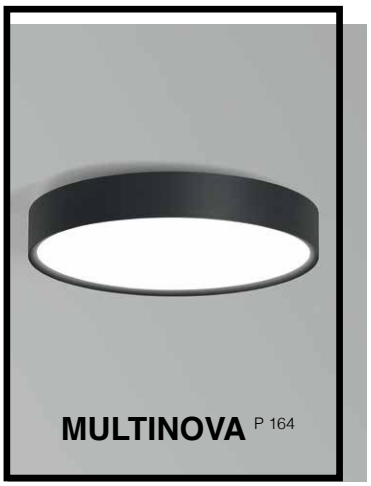

MULTINOVA P 164



Hi! I'm new to the range.

MIKALINE P 264



SOLISCAPE P 268

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface


New members to the family!

INFORM P 280



CONFORM P 304



ONE-AND-ONLY P 306



GIBBO P 308



STILL P 310



MILES P 312



MANTELLO P 314


New members to the family!

CUPPA P 316



SOIREE P 318



ZOOVER P 320


Hi! I'm new to the range.

HIGH PROFILE P 372

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

INDEX

Interior Wall Recessed



HELI 1 P 324



GYN W P 324



LOGIC W P 326



INLET P 328

INDEX

Interior Wall Surface




MONTUR P 330



OONO W P 332




BAND-OH! P 334

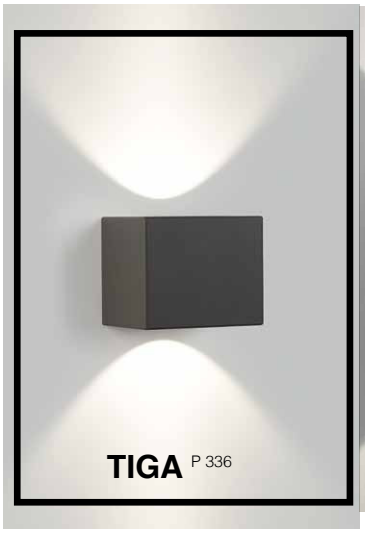

TIGA P 336



WANT-IT P 336

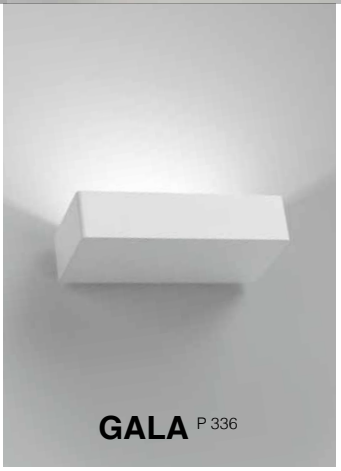

GALA P 336



ORBIT P 338

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.















INDEX

Interior Track Lighting



FRAGMA P 358



MULTINOVA P 362



SUPER-OH! P 364



SPY P 350



LED LINE P 366



INFORM P 366

INDEX


Interior Floor



SLM F P 260



XY180 F P 184

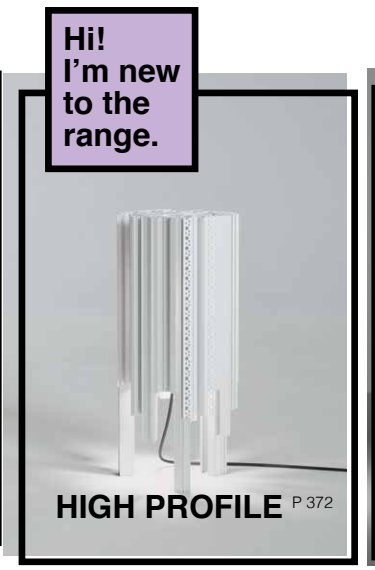

HIGH PROFILE P 372



OONO T P 216


C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.


INDEX

Profiles




SPLITLINE M P 380


New members to the family!




SHIFTLINE M P 384




SPLITLINE 14
SHIFTLINE 19 P 406




SPLIT-IT P 410




TAGLINE P 414




CONNECT P 418



DOT.COM P 420



FEMTOLINE 25 P 424




FEMTOLINE 35 P 426




FEMTOLINE 35
WALLGRAZER P 430

New members to the family!



FEMTOLINE 35
TR / TRW P 424




FEMTOLINE W P 432



FEMTOLINE 45 P 432

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



ONE AND ONLY P 438




BORDERLINE P 434




OUTLINER P 436



SHELFLINE P 440



MICROLINE P 442



STREAMLINER P 446



Find out what we create with leftovers of our made-to-measure profiles P 372

I'm not alone. You can find me in other chapters within this Lighting Bible.

INDEX

Exterior Ceiling Recessed


REO X P 456


DEEP RINGO X P 458


ENTERO X P 460



CARREE X P 462

INDEX

Exterior Ceiling Surface


BOXY X P 464


SUPENOVA XS P 466

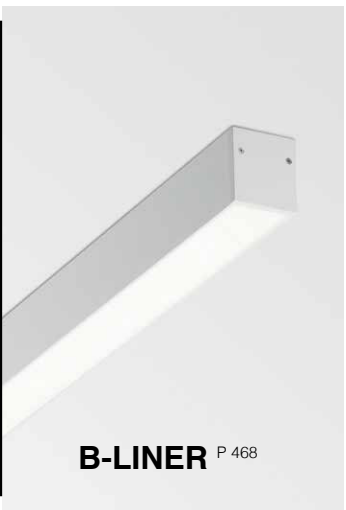
B-LINER P 468


C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

INDEX

Exterior Wall Recessed

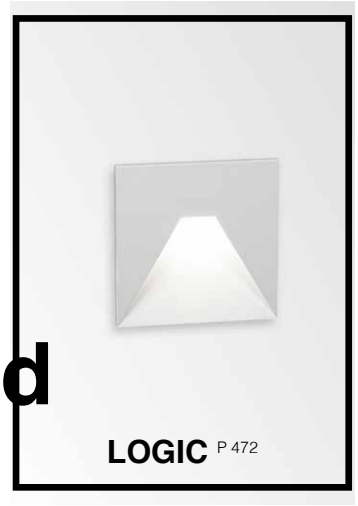

LOGIC P 472



LEDS C / GO P 474



HELI X P 474

INDEX

Exterior Wall Surface

New members to the family!



OONO P 476



STIP P 478



SKOV P 478



VISION OUT P 480



TOPIX P 480



TIGA P 482



MONO II P 482



ULTRA P 492

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.


I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.



NOCTA P 484



BACKSPACE P 488

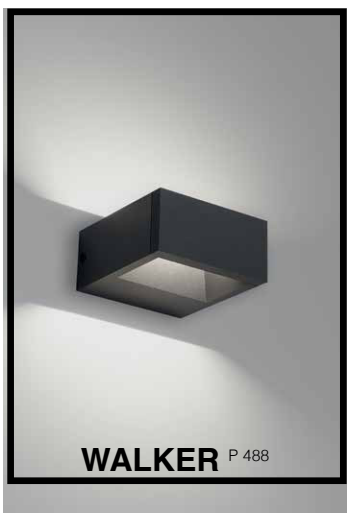

WALKER P 488



MONTUR P 490




SPY 39W P 492



KIX P 494



SOIREE P 496

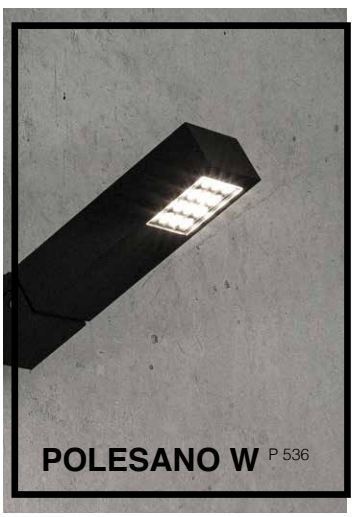


POLESANO W P 536

INDEX

Exterior Floor Recessed


Hi!
We are new to the range.
LOGIC P 500

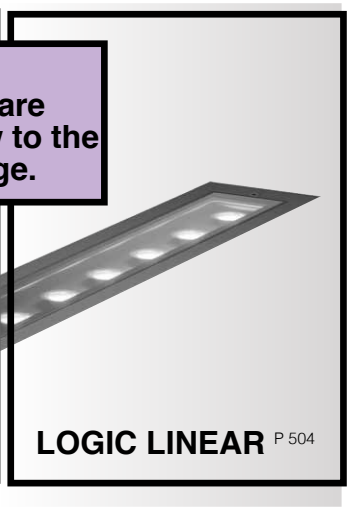
LOGIC LINEAR P 504


LEDS C / GO P 510

INDEX

Exterior Floor Surface


KIX P 512


New members to the family!
FRAX P 514


OONO P 518


SPIX P 520


OUTLINER P 522


STIEVIE P 522


MONTUR P 524

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.



ELBO P 526



WALKER P 526



OBLIX P 528



STRIPER P 530



MONOPOL P 530



BAZIL P 532



POLESANO P 534

Interior

INDEX

Interior Ceiling Recessed

New members to the family!



NIME P 116



IMAX P 126

New members to the family!



ENTERO P 118



HOLE IN ONE P 130



SPLITBOX P 132



CARREE P 134



REO P 136



ARTUUR P 140



PLAT-OH! P 144

New members to the family!



DEEP RINGO P 146



GYN P 150



PARTOU P 152



TWENTY-7 P 154



DIRO SBL P 156



GRID P 158

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



MULTINOVA P 164



SUPERNOVA P 172



SUPERDOME P 182



DOT.COM P 206



HALOSCAN P 212



TWEETER P 218


New members to the family!



SPY P 226



UHO P 224

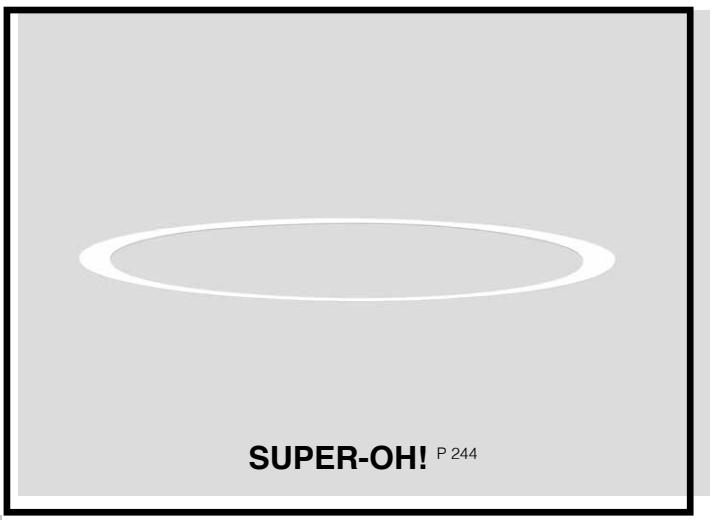

SUPER-OH! P 244

New members to the family!



INFORM P 280



D-LINER P 294

I'm not alone. You can find me in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface


DIRO SBL P 156


XY180 P 184


PUNK P 188


VIZIR P 190


HEDRA P 192


OCTAV P 196


NEEDLE P 198


BOXY P 200


DOT.COM P 206


HALOSCAN P 212

New members to the family!


OONO P 216


TWEETER P 218


Hi! I'm new to the range.

OBIN P 220


ODRON P 222


BOWIE P 222

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



UHO P 224

New members to the family!



SPY P 226



RAND P 242



SUPER-OH! P 244



SUPERLOOP P 250




SUPERNOVA P 172



GRID P 158



LASS-OH! P 262

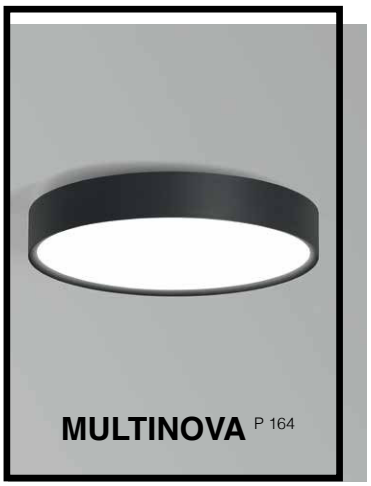

MULTINOVA P 164



Hi! I'm new to the range.

MIKALINE P 264



SOLISCAPE P 268

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

INDEX

Interior Ceiling Surface


New members to the family!

INFORM P 280



CONFORM P 304



ONE-AND-ONLY P 306



GIBBO P 308



STILL P 310



MILES P 312



MANTELLO P 314


New members to the family!

CUPPA P 316



SOIREE P 318



ZOOVER P 320


Hi! I'm new to the range.

HIGH PROFILE P 372

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

NIME PATENTED

Design by **DEAN SKIRA** & Delta Light

The black hole reflects no light, but the light of Nime finds its way out.
The tangible part disappears inside its heart, and the intangible part illuminates the object.

deltalight.com/nime

1/1

SCALE 1:1
10 100

The fifth form of light

The first form of light is
in the source.


The second is
the invisible form of light itself.

The third is the form of the object revealed
by light before it touches it,
the fourth is the form of the shadow.

And the fifth is the form of the consequence that
comprises all the previous four forms, as well as the
way we feel and experience the space considering
the four forms.


FOCUS

A




Requires acces
above ceiling


Ø54 x 90
max.9,5-12,5




ØKIT x 90



Ø67 x 90
max.12,5



ØKIT x 90



ØKIT x 150


NIME				NEW II TRIMLESS	NEW II TRIMLESS OK	NEW II	NEW II AIR	TRIMLESS
3000K CRI>90	LED [E] 5.7W / 519lm / 500mA	IP20	35°				**26412 9320** ◇	
	LED [E] 8.2W / 677lm / 700mA			**26413 9320** ◇	**26415 9320** ◇	**26414 9320** ◇		
	LED [E] 5.7W / 519lm / 500mA		52°				**26412 9330** ◇	
	LED [E] 8.2W / 677lm / 700mA			**26413 9330** ◇	**26415 9330** ◇	**26414 9330** ◇		
	LED [E] 10.7W / 814lm / 900mA		FOCUS 20°-50°					**26411 9300** ◇
2700K CRI>90	LED [E] 5.7W / 519lm / 500mA		35°				**26412 9220** ◇	
	LED [E] 8.2W / 677lm / 700mA			**26413 9220** ◇	**26415 9220** ◇	**26414 9220** ◇		
	LED [E] 5.7W / 519lm / 500mA		52°				**26412 9230** ◇	
	LED [E] 8.2W / 677lm / 700mA			**26413 9230** ◇	**26415 9230** ◇	**26414 9230** ◇		
	LED [E] 10.7W / 814lm / 900mA		FOCUS 20°-50°					**26411 9200** ◇
				◇ PRIM	◇ PRIM	◇ B ● / W ○	◇ PRIM	◇ PRIM

The abscence in its presence, the presence in its abscence.

A GLIMPSE OF ME ON PAGE 6

C

FIND ME ONLINE

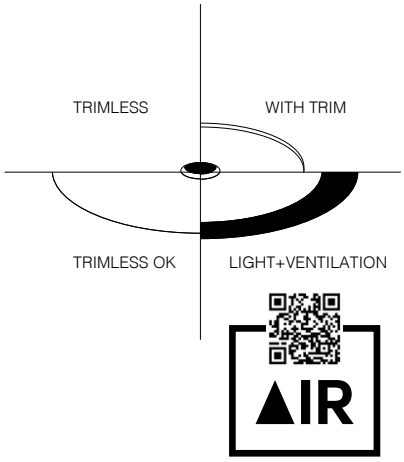


Better not underestimate Nime,
as the aperture of only 10mm is only the façade that hides away a host of possibilities to control your beam. Within the same opening and thanks to an ingenious set of custom optics, Nime allows you to focus the beam from 20° up to 40° and offers rotation up to 355° and tilting up to 30°, without changing its looks. With this magic trick, Nime lets you:
Emphasize objects on vertical and horizontal surfaces, without visual appearance of the fitting or its source

Light up small to large objects,
even when they are not aligned with the luminaire.

Perfectly address the light where
it is needed, even in slope ceilings.

Create equal circles of light from
both low and higher ceilings.

Furthermore Nime can also be used as light unit in our **AIR** range, a toolset that combines light and ventilation in one.

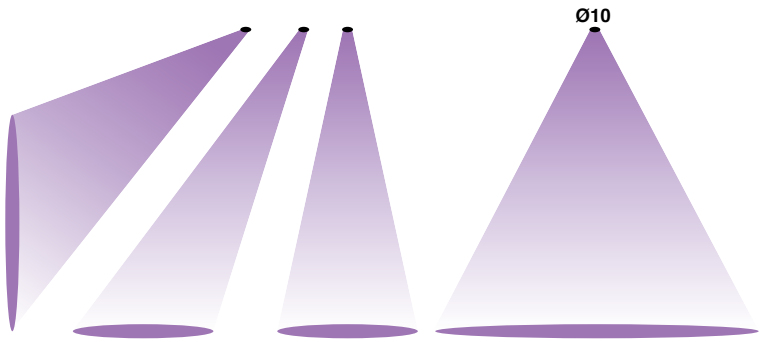

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY				
			NIME				
			II TRIMLESS	II TRIMLESS OK	II	II AIR	TRIMLESS
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R	R	R *	R
1-10V DIM 15	**300 90 124**	min. 55	R *	R	R	R *	R
DALI DIM 14	**300 90 125**	min. 55	R *	R	R	R *	R
MOUNTING KIT TRIMLESS							
CONCRETE / PLASTERBOARD	**26410 0010**			R			R
MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTERR							
PLASTERBOARD SIDE AIR	**29810 0110**	Light+Ventilation				R	
	29810 0120	Light				R	
	29810 0100	Ventilation				O	
CONCRETE TOP AIR	**29810 0130**	Light+Ventilation				R	
	29810 0120	Light				R	
	29810 0200	Ventilation				O	

* REMOTE INSTALLATION

B

ENTERO


FAMILY

Inside. Outside.
Entero is engineered to perfection,
both for interior and exterior applications. It enables architects and designers to achieve style continuity throughout the entire project, applying the same clean sightlines and minimal appearance to damp locations, outside ceilings and cantilevers.

Intense Energy.
Entero was designed as an answer to the energy of creation. Crafted to add value to spaces and experiences, bringing intensity to lighting schemes. A fusion of power and elegance, comfort and precision.
One single range of luminaires to illuminate with power or for atmosphere, from low and high.

Furthermore Entero can also be used as light unit in our **▲IR** range, a toolset that combines light and ventilation in one.


deltalight.com/entero

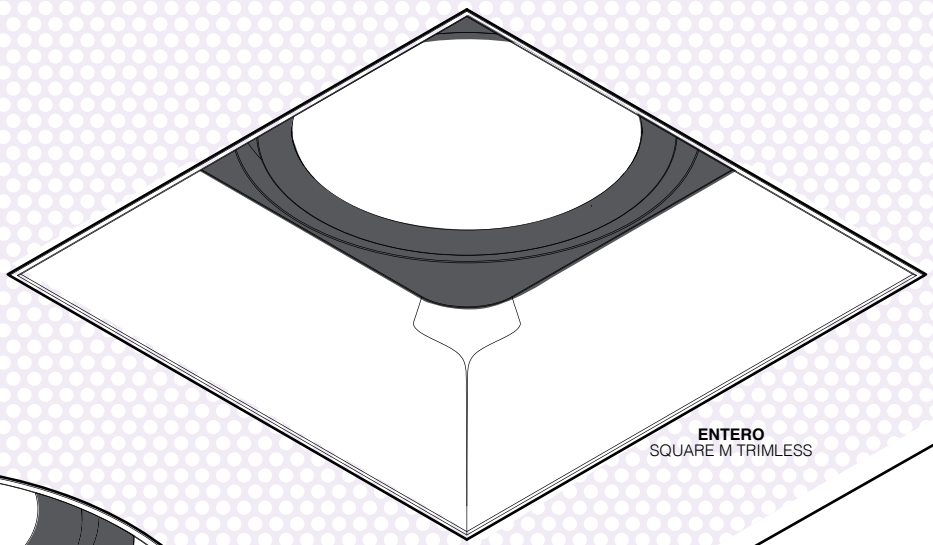

ENTERO
SQUARE M TRIMLESS

1/1

SCALE 1:1
10 100

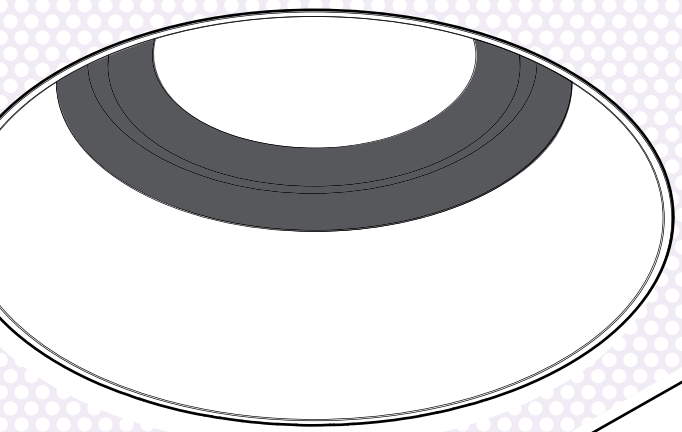



ENTERO
ROUND M TRIMLESS

What if there is only one?

One for All.
Entero is a set of lighting tools enabling architects and designers to create discrete but diverse lighting schemes, using only one luminaire type throughout the entire project.
Any project. Retail, residential, public, hospitality, art… Any need.
Any size. Anywhere.
It is the most complete family, created to excel in any environment.



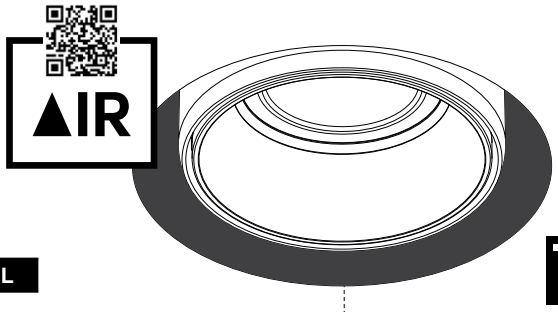

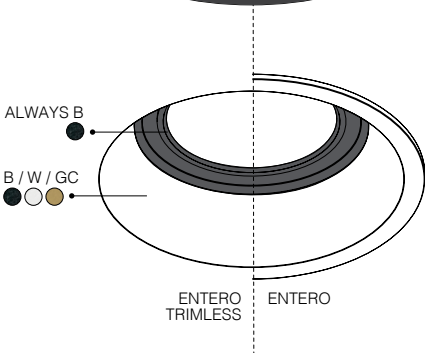

	ENTERO S	ENTERO M	ENTERO L
LIGHT EFFECT			
LED	5,7W - 519lm 8,6W - 1089lm 12,4W - 1467lm	8,2W - 677lm 17,1W - 2125lm 24,6W - 2907lm	10,7W - 814lm 36,5W - 4579lm
OPTICS			
10°	•	•	•
18°		•	•
20°	•		
30°		•	•
45°	•	•	•
WALLWASH	◦	◦	◦
COLOUR TEMPERATURE			
2700K	•	•	•
3000K	•	•	•
SOFT DIM 3000-1800K	◦	◦	
TUNABLE WHITE 1800-4000K	◦	◦	◦
TUNABLE WHITE 2700-6500K	◦	◦	◦
CONTROL			
EXCL. POWER SUPPLY	•	•	•
NON DIM			
MAINS DIM			
1-10V DIM			
DALI DIM			
WIRELESS DIM			
COLOUR			
WHITE	•	•	•
BLACK	•	•	•
GOLD COLOURED		◦	◦
SHAPE			
ROUND	•	•	•
SQUARE	•	•	•
INSTALLATION			
INTERIOR — RECESSED	•	•	•
INTERIOR — RECESSED TRIMLESS	•	•	•
EXTERIOR — RECESSED	•	•	•
IP VALUE			
IP20 - SUITABLE FOR DRY LOCATIONS	•	•	•
IP44 - SUITABLE FOR DAMP LOCATION	•	•	•
IP65 - SUITABLE FOR EXTERIOR	•	•	•
ACCESSORIES			
HONEYCOMB	•	•	•
SPREAD LENS	•	•	•
LINEAR SPREAD LENS	•	•	•
SOFTENING LENS	•	•	•
GLASS SANDBLASTED SBL	•	•	•
MOUNTING KITS			
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)	◦	◦	◦
DEEP CURVED (PLASTERBOARD)	◦		
▲IR (LIGHT + VENTILATION)	◦		
CSC (COLD STRETCHED CEILING)	◦	◦	◦
WSC (WARM STRETCHED CEILING)	◦	◦	◦


R & S

IP20


IP44


IP65


• STANDARD
◦ NOT FOR ALL VERSIONS

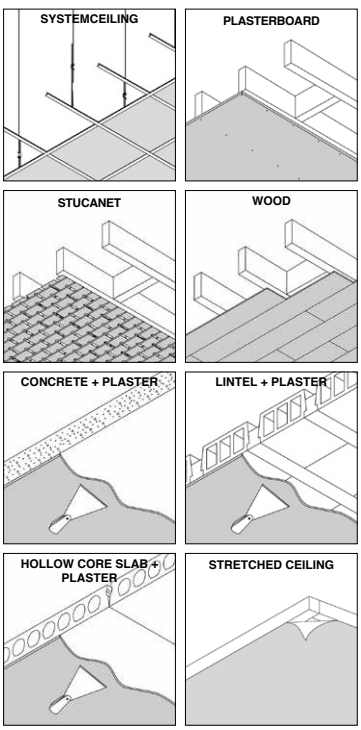


ENTERO S









0-30°355° | 0-30°355° | 0-30°355° | 0-30°355°

NEW


ØKIT x 105 | Ø76 x 100 / max.16 | KIT x 110 | 76 x 76 x 100 / 12,5 or 25


ENTERO SMALL


				ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [E] 5.7W / 519lm / 500mA	IP20	10°	**28424 9310** ◇	**28401 9310** ◇	**28524 9310** ◇	**28501 9310** ◇
	LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA		20°	**28425 9320** ◇	**28402 9320** ◇	**28525 9320** ◇	**28502 9320** ◇
			45°	**28425 9330** ◇	**28402 9330** ◇	**28525 9330** ◇	**28502 9330** ◇
2700K CRI>90	LED [E] 5.7W / 519lm / 500mA		10°	**28424 9210** ◇	**28401 9210** ◇	**28524 9210** ◇	**28501 9210** ◇
	LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA		20°	**28425 9220** ◇	**28402 9220** ◇	**28525 9220** ◇	**28502 9220** ◇
			45°	**28425 9230** ◇	**28402 9230** ◇	**28525 9230** ◇	**28502 9230** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		20°	**28482 9020** ◇	**28480 9020** ◇	**28582 9020** ◇	**28580 9020** ◇
			45°	**28482 9030** ◇	**28480 9030** ◇	**28582 9030** ◇	**28580 9030** ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA		20°	**28464 9020** ◇	**28456 9020** ◇	**28564 9020** ◇	**28556 9020** ◇
			45°	**28464 9030** ◇	**28456 9030** ◇	**28564 9030** ◇	**28556 9030** ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		20°	**28427 9020** ◇	**28404 9020** ◇	**28527 9020** ◇	**28504 9020** ◇
			45°	**28427 9030** ◇	**28404 9030** ◇	**28527 9030** ◇	**28504 9030** ◇

◇ B ● / GC ● / W ○









0-20°355° | 0-20°355° | 0-20°355° | 0-20°355°


NEW


ØKIT x 115 | Ø76 x 115 / max.16 | KIT x 120 | 76 x 76 x 115 / 12,5 or 25


ENTERO SMALL IP


				ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA	IP44	20°	**28450 9320** ◇	**28406 9320** ◇	**28550 9320** ◇	**28506 9320** ◇
			45°	**28450 9330** ◇	**28406 9330** ◇	**28550 9330** ◇	**28506 9330** ◇
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA		20°	**28450 9220** ◇	**28406 9220** ◇	**28550 9220** ◇	**28506 9220** ◇
			45°	**28450 9230** ◇	**28406 9230** ◇	**28550 9230** ◇	**28506 9230** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		20°	**28484 9020** ◇	**28481 9020** ◇	**28584 9020** ◇	**28581 9020** ◇
			45°	**28484 9030** ◇	**28481 9030** ◇	**28584 9030** ◇	**28581 9030** ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA		20°	**28472 9020** ◇	**28459 9020** ◇	**28572 9020** ◇	**28559 9020** ◇
			45°	**28472 9030** ◇	**28459 9030** ◇	**28572 9030** ◇	**28559 9030** ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		20°	**28452 9020** ◇	**28408 9020** ◇	**28552 9020** ◇	**28508 9020** ◇
			45°	**28452 9030** ◇	**28408 9030** ◇	**28552 9030** ◇	**28508 9030** ◇

◇ B ● / GC ● / W ○










NEW

ØKIT x 95 | Ø76 x 95 / max.16 | KIT x 95 | 76 x 76 x 95 / 12,5 or 25

ENTERO SMALL WALLWASH


				ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA	IP20	WALL-WASH	**28428 9300** ◇	**28405 9300** ◇	**28528 9300** ◇	**28505 9300** ◇
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA			**28428 9200** ◇	**28405 9200** ◇	**28528 9200** ◇	**28505 9200** ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA			**28465 9000** ◇	**28457 9000** ◇	**28565 9000** ◇	**28557 9000** ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA			**28466 9000** ◇	**28458 9000** ◇	**28566 9000** ◇	**28558 9000** ◇

◇ B ● / GC ● / W ○

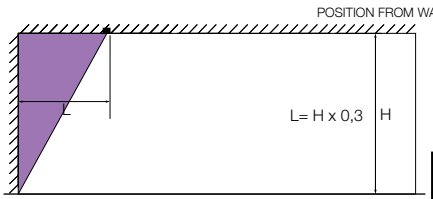


example: H=3000 mm → L= 3000 mm x 0,30 = 900 mm


WALLWASH

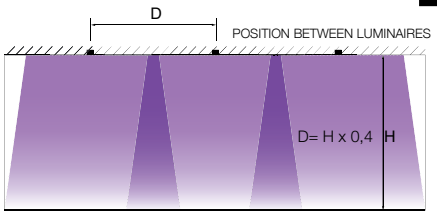

example: H=3000 mm → D= 3000 mm x 0,4 = 1200 mm

CURVED

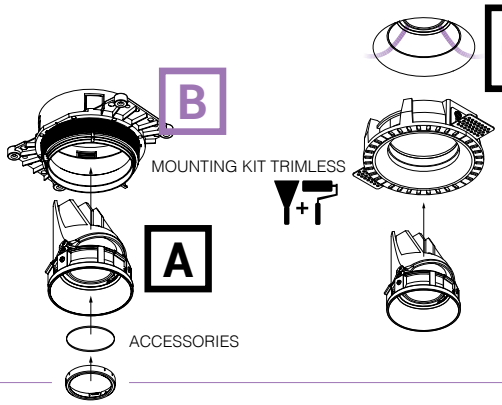

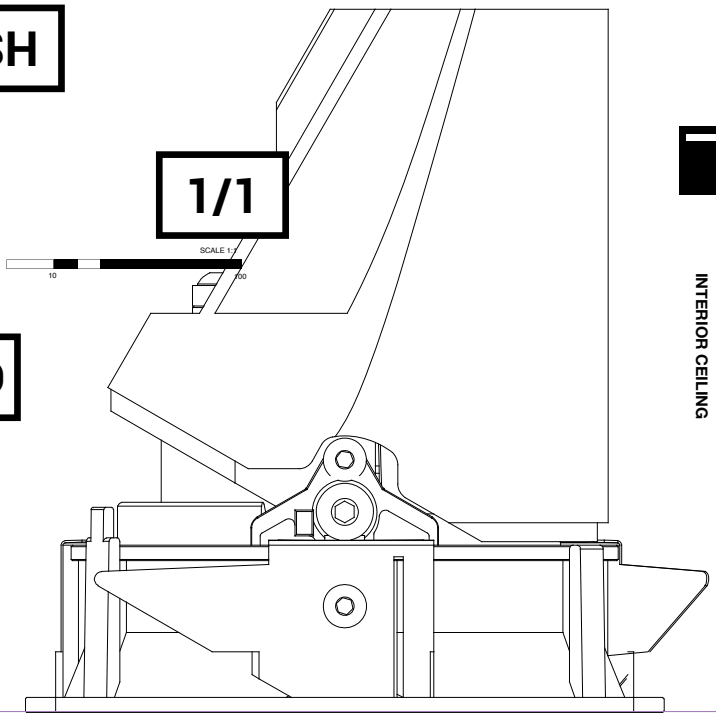


FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY											
			SMALL				SMALL IP				SMALL WALLWASH			
			TRIMLESS				TRIMLESS				TRIMLESS			
			●	■	●	■	●	■	●	■	●	■	●	■
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
MAINS DIM (FE) 11	21012 0298	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
1-10V DIM 15	300 90 124	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
DALI DIM 14	300 90 125	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
TUNABLE WHITE DALI DT8 20	21012 0355	min. 86	R	R	R	R	R	R	R	R	R	R	R	R
MOUNTING KIT TRIMLESS														
CONCRETE / PLASTERBOARD	28400 0010		R				R				R			
	28400 0040			R				R				R		
PLASTERBOARD	28500 0220	Curved shaped	R											
COLD STRETCHED CEILING	28400 0070		R				R				R			
	28400 0100			R				R				R		
WARM STRETCHED CEILING	28400 0130		R				R				R			
	28400 0160			R				R				R		
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTERR														
PLASTERBOARD SIDE AIR	29810 0110	Light+Ventilation	R				R				R			
	29810 0120	Light	R				R				R			
	29810 0100	Ventilation	O				O				O			
CONCRETE TOP AIR	29810 0130	Light+Ventilation	R								R			
	29810 0120	Light	R								R			
	29810 0200	Ventilation	O								O			
HONEYCOMB / GLASS / LENS														
HONEYCOMB SINGLE USE	28500 0050 B	Max.500mA	A	A	A	A								
HONEYCOMB DOUBLE USE	28500 0060 B	Max.500mA	A *	A *	A *	A *								
LINEAR SPREAD LENS	28500 0010	Max.500mA	A *	A *	A *	A *								
SPREAD LENS	28500 0020	Max.500mA	A *	A *	A *	A *								
SOFTENING LENS	28500 0030	Max.500mA	A *	A *	A *	A *								
GLASS SBL	28500 0040	Max.500mA	A *	A *	A *	A *								
INSTALLATION														
MOUNTING SET S2 FOR CONCRETE	28500 0190				O				O				O	


* NOT FOR 10° BEAM ANGLE


B

ENTERO M










NEW


ENTERO MEDIUM


ØKIT x 135 | Ø92 x 130 / max.16 | KIT x 130 | 92 x 92 x 130 / 12,5 or 25


				ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [E] 8.2W / 677lm / 700mA	IP20	10°	28429 9310 ◇	28409 9310 ◇	28529 9310 ◇	28509 9310 ◇
	LED [R] 17.2W / 2101lm / 500mA LED [R] 25W / 2811lm / 700mA		18°	28430 9310 ◇	28410 9310 ◇	28530 9310 ◇	28510 9310 ◇
			30°	28430 9320 ◇	28410 9320 ◇	28530 9320 ◇	28510 9320 ◇
			45°	28430 9330 ◇	28410 9330 ◇	28530 9330 ◇	28510 9330 ◇
2700K CRI>90	LED [E] 8.2W / 677lm / 700mA		10°	28429 9210 ◇	28409 9210 ◇	28529 9210 ◇	28509 9210 ◇
	LED [R] 17.2W / 2009lm / 500mA LED [R] 25W / 2688lm / 700mA		18°	28430 9210 ◇	28410 9210 ◇	28530 9210 ◇	28510 9210 ◇
			30°	28430 9220 ◇	28410 9220 ◇	28530 9220 ◇	28510 9220 ◇
			45°	28430 9230 ◇	28410 9230 ◇	28530 9230 ◇	28510 9230 ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 16.1W / 1618lm / 450mA		18°	28431 9010 ◇	28411 9010 ◇	28531 9010 ◇	28511 9010 ◇
			30°	28431 9020 ◇	28411 9020 ◇	28531 9020 ◇	28511 9020 ◇
			45°	28431 9030 ◇	28411 9030 ◇	28531 9030 ◇	28511 9030 ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA		18°	28467 9010 ◇	28460 9010 ◇	28567 9010 ◇	28560 9010 ◇
			30°	28467 9020 ◇	28460 9020 ◇	28567 9020 ◇	28560 9020 ◇
			45°	28467 9030 ◇	28460 9030 ◇	28567 9030 ◇	28560 9030 ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		18°	28432 9010 ◇	28412 9010 ◇	28532 9010 ◇	28512 9010 ◇
			30°	28432 9020 ◇	28412 9020 ◇	28532 9020 ◇	28512 9020 ◇
			45°	28432 9030 ◇	28412 9030 ◇	28532 9030 ◇	28512 9030 ◇

◇ B ● / GC ● / W ○










NEW


ENTERO MEDIUM IP


ØKIT x 150 | Ø92 x 145 / max.16 | KIT x 150 | 92 x 92 x 145 / 12,5 or 25


				ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [R] 17.2W / 2101lm / 500mA	IP44	18°	28453 9310 ◇	28414 9310 ◇	28553 9310 ◇	28514 9310 ◇
			30°	28453 9320 ◇	28414 9320 ◇	28553 9320 ◇	28514 9320 ◇
2700K CRI>90	LED [R] 17.2W / 2009lm / 500mA		18°	28453 9210 ◇	28414 9210 ◇	28553 9210 ◇	28514 9210 ◇
			30°	28453 9220 ◇	28414 9220 ◇	28553 9220 ◇	28514 9220 ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 16.1W / 1618lm / 450mA		18°	28454 9010 ◇	28415 9010 ◇	28554 9010 ◇	28515 9010 ◇
			30°	28454 9020 ◇	28415 9020 ◇	28554 9020 ◇	28515 9020 ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA		18°	28473 9010 ◇	28463 9010 ◇	28573 9010 ◇	28563 9010 ◇
			30°	28473 9020 ◇	28463 9020 ◇	28573 9020 ◇	28563 9020 ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		18°	28455 9010 ◇	28416 9010 ◇	28555 9010 ◇	28516 9010 ◇
			30°	28455 9020 ◇	28416 9020 ◇	28555 9020 ◇	28516 9020 ◇

◇ B ● / GC ● / W ○









NEW

ENTERO MEDIUM WALLWASH

ØKIT x 95 | Ø92 x 95 / max.16 | KIT x 95 | 92 x 92 x 95 / 12,5 or 25


				ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
3000K CRI>90	LED [U] 12.4W / 1467lm / 700mA	IP20	WALL-WASH	28433 9300 ◇	28413 9300 ◇	28533 9300 ◇	28513 9300 ◇
2700K CRI>90	LED [U] 12.4W / 1403lm / 700mA			28433 9200 ◇	28413 9200 ◇	28533 9200 ◇	28513 9200 ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA			28468 9000 ◇	28461 9000 ◇	28568 9000 ◇	28561 9000 ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA			28469 9000 ◇	28462 9000 ◇	28569 9000 ◇	28562 9000 ◇

◇ B ● / GC ● / W ○


A GLIMPSE OF ME ON PAGE 8


C

FIND ME ONLINE

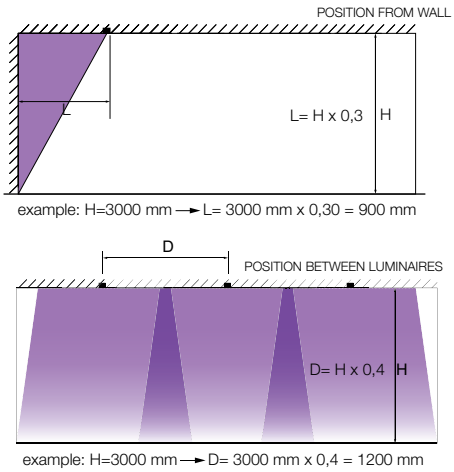

WALLWASH

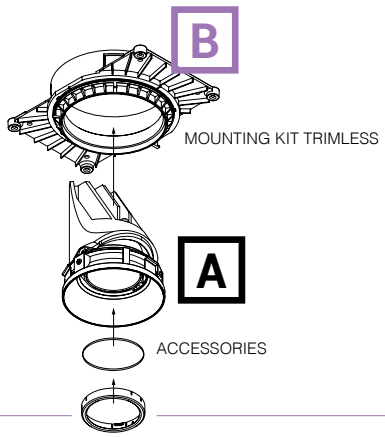

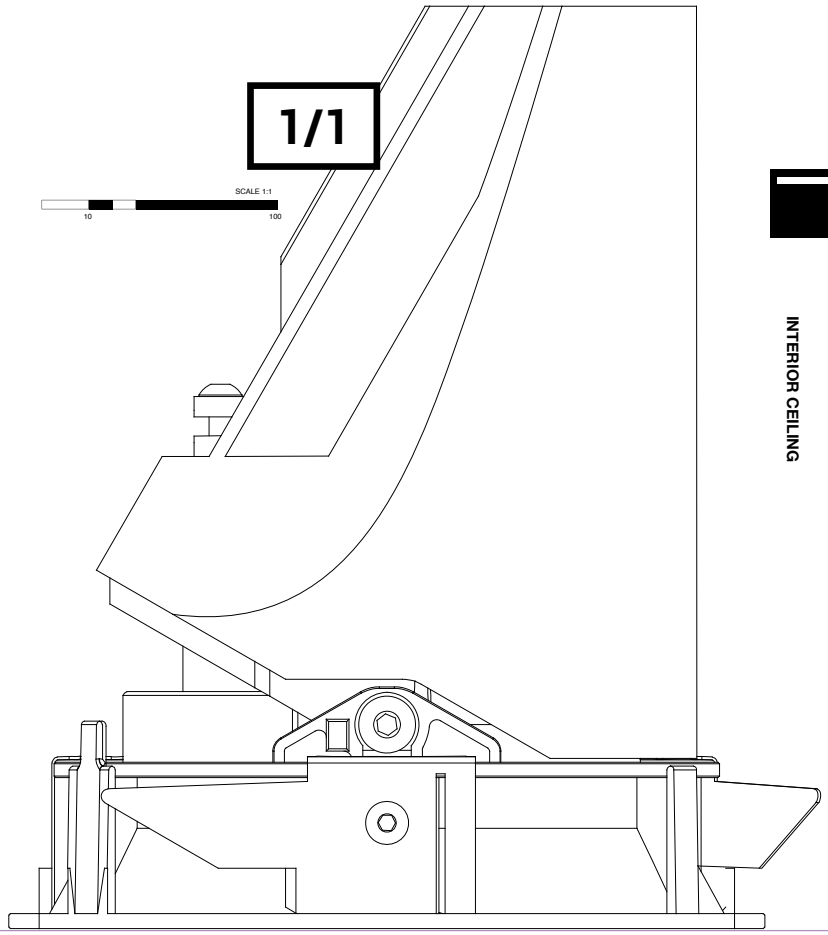


FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY											
			MEDIUM				MEDIUM IP				MEDIUM WALLWASH			
			TRIMLESS				TRIMLESS				TRIMLESS			
			●	■	●	■	●	■	●	■	●	■	●	■
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R	R	R	R	R	R	R	R	R	R	R	R
TUNABLE WHITE DALI DT8 20	**21012 0355**	min. 86	R	R	R	R	R	R	R	R	R	R	R	R
MOUNTING KIT TRIMLESS														
CONCRETE / PLASTERBOARD	**28400 0020**		R				R				R			
	28400 0050			R				R				R		
COLD STRETCHED CEILING	**28400 0080**		R				R				R			
	28400 0110			R				R				R		
WARM STRETCHED CEILING	**28400 0140**		R				R				R			
	28400 0170			R				R				R		
HONEYCOMB / GLASS / LENS														
HONEYCOMB SINGLE USE	**28500 0110 B**	Max.500mA for 1 accessory Max.450mA for 2 accessories	A	A	A	A								
HONEYCOMB DOUBLE USE	**28500 0120 B**		A *	A *	A *	A *								
LINEAR SPREAD LENS	**28500 0070**		A *	A *	A *	A *								
SPREAD LENS	**28500 0080**		A *	A *	A *	A *								
SOFTENING LENS	**28500 0090**		A *	A *	A *	A *								
GLASS SBL	**28500 0100**		A *	A *	A *	A *								
INSTALLATION														
MOUNTING SET S2 FOR CONCRETE	**28500 0200**				O				O				O	


* NOT FOR 10° BEAM ANGLE


B

ENTERO L










NEW


ENTERO LARGE

ØKIT x 165 | KIT x 165 | Ø112 x 160 / max.16 | 112 x 112 x 160 / 12,5 or 25

				TRIMLESS ROUND	TRIMLESS SQUARE	ROUND	SQUARE
3000K CRI>90	LED [E] 10.7W / 814lm / 900mA	IP20	10°	**28434 9310** ◇	**28534 9310** ◇	**28417 9310** ◇	**28517 9310** ◇
	LED [I] 36.5W / 4579lm / 1050mA		18°	**28435 9310** ◇	**28535 9310** ◇	**28418 9310** ◇	**28518 9310** ◇
			30°	**28435 9320** ◇	**28535 9320** ◇	**28418 9320** ◇	**28518 9320** ◇
			45°	**28435 9330** ◇	**28535 9330** ◇	**28418 9330** ◇	**28518 9330** ◇
2700K CRI>90	LED [E] 10.7W / 814lm / 900mA		10°	**28434 9210** ◇	**28534 9210** ◇	**28417 9210** ◇	**28517 9210** ◇
	LED [I] 36.5W / 4380lm / 1050mA		18°	**28435 9210** ◇	**28535 9210** ◇	**28418 9210** ◇	**28518 9210** ◇
			30°	**28435 9220** ◇	**28535 9220** ◇	**28418 9220** ◇	**28518 9220** ◇
			45°	**28435 9230** ◇	**28535 9230** ◇	**28418 9230** ◇	**28518 9230** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED [Z] 17.8W / 2054lm / 500mA		18°	**28437 9010** ◇	**28537 9010** ◇	**28420 9010** ◇	**28520 9010** ◇
			30°	**28437 9020** ◇	**28537 9020** ◇	**28420 9020** ◇	**28520 9020** ◇
			45°	**28437 9030** ◇	**28537 9030** ◇	**28420 9030** ◇	**28520 9030** ◇

◇ B ● / GC ● / W ○






NEW


ENTERO LARGE IP

Ø112 x 180 / max.16 | 112 x 112 x 180 / 12,5 or 25

				ROUND	SQUARE
3000K CRI>90	LED [I] 30.8W / 3974lm / 900mA	IP44	18°	**28421 9310** ◇	**28521 9310** ◇
			30°	**28421 9320** ◇	**28521 9320** ◇
2700K CRI>90	LED [I] 30.8W / 3802lm / 900mA		18°	**28421 9210** ◇	**28521 9210** ◇
			30°	**28421 9220** ◇	**28521 9220** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED [Z] 17.8W / 2054lm / 500mA		18°	**28423 9010** ◇	**28523 9010** ◇
			30°	**28423 9020** ◇	**28523 9020** ◇

◇ B ● / GC ● / W ○





NEW

ENTERO LARGE WALLWASH

ØKIT x 165 | Ø112 x 160 / max.16


				TRIMLESS ROUND	ROUND
3000K CRI>90	LED [I] 16.4W / 2294lm / 500mA	IP20	WALL-WASH	**28477 9300** ◇	**28474 9300** ◇
2700K CRI>90	LED [I] 16.4W / 2195lm / 500mA			**28477 9200** ◇	**28474 9200** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED [Z] 17.8W / 2054lm / 500mA			**28479 9000** ◇	**28476 9000** ◇

◇ B ● / GC ● / W ○


A GLIMPSE OF ME ON PAGE 8

C

FIND ME ONLINE

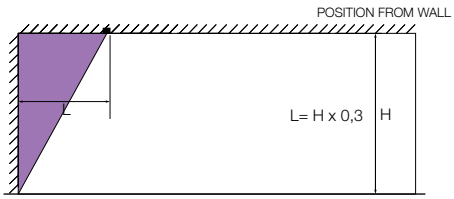

example: H=3000 mm → L= 3000 mm x 0,30 = 900 mm

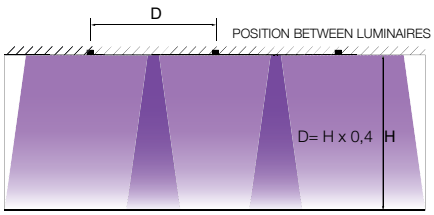


example: H=3000 mm → D= 3000 mm x 0,4 = 1200 mm


1/1

SCALE 1:1

10 100

WALLWASH

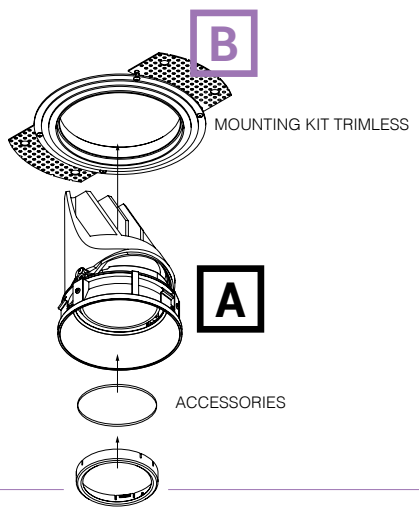

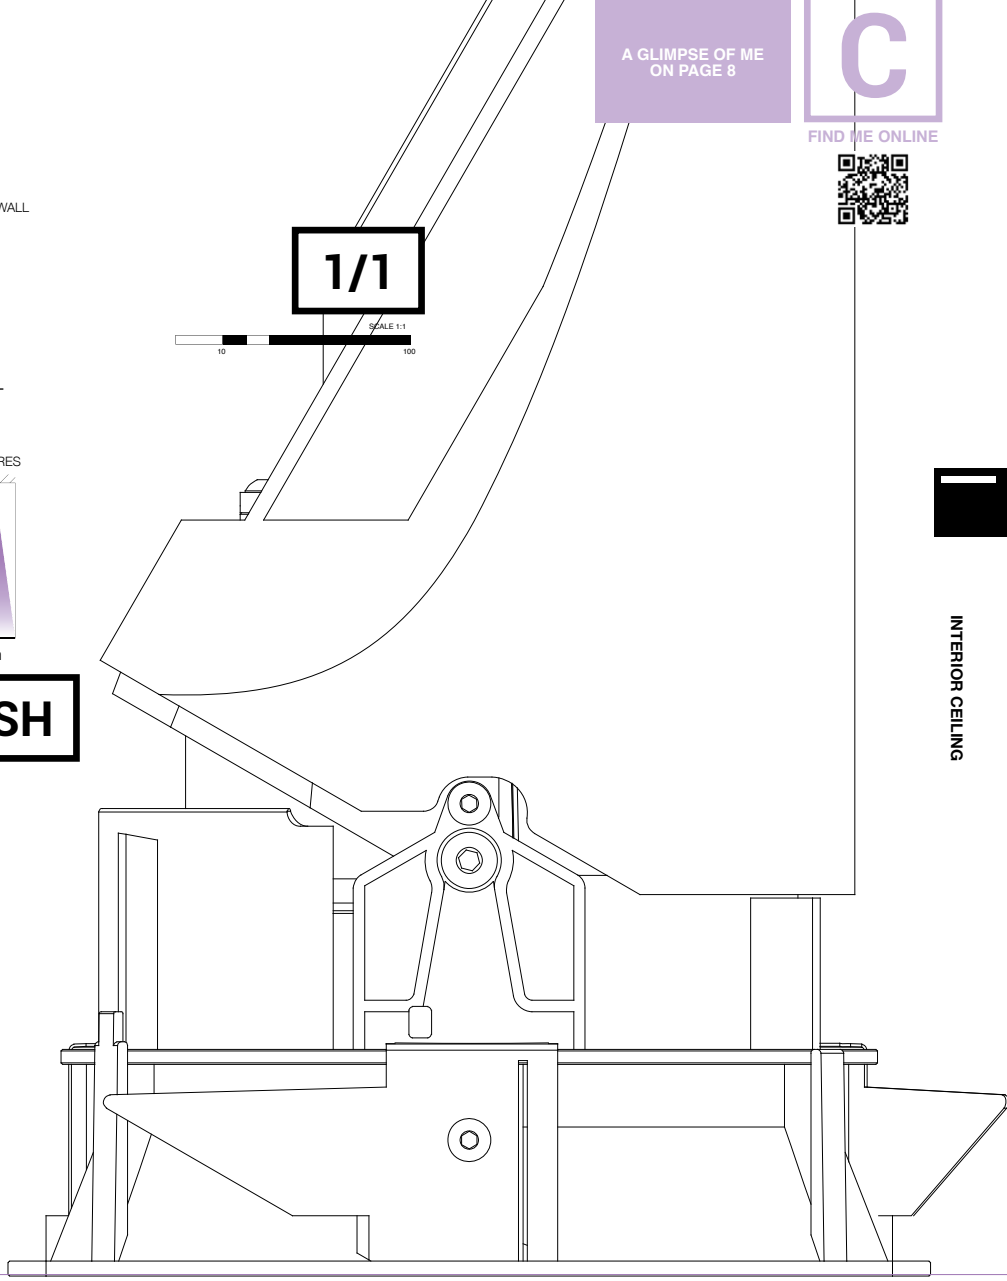

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY											
			LARGE				LARGE IP				LARGE WALLWASH			
			TRIMLESS				TRIMLESS				TRIMLESS			
			●	■	●	■	●	■	●	■	●	■	●	■
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
1-10V DIM 16	300 90 63	min. 84	R	R	R	R	R	R	R	R	R		R	
DALI DIM 16	300 90 63	min. 84	R	R	R	R	R	R	R	R	R		R	
TUNABLE WHITE DALI DT8 20	21012 0355	min. 86	R	R	R	R	R	R	R	R	R		R	
MOUNTING KIT TRIMLESS														
CONCRETE / PLASTERBOARD	28400 0030		R				R				R			
	28400 0060			R				R						
COLD STRETCHED CEILING	28400 0090		R				R				R			
	28400 0120			R				R						
WARM STRETCHED CEILING	28400 0150		R				R				R			
	28400 0180			R				R						
HONEYCOMB / GLASS / LENS														
HONEYCOMB SINGLE USE	28500 0170 B	Max.900mA for 1 accessory Max.800mA for 2 accessories	A	A	A	A								
HONEYCOMB DOUBLE USE	28500 0180 B		A *	A *	A *	A *								
LINEAR SPREAD LENS	28500 0130		A *	A *	A *	A *								
SPREAD LENS	28500 0140		A *	A *	A *	A *								
SOFTENING LENS	28500 0150		A *	A *	A *	A *								
GLASS SBL	28500 0160		A *	A *	A *	A *								
INSTALLATION														
MOUNTING SET S2 FOR CONCRETE	28500 0210				O				O				O	

* NOT FOR 10° BEAM ANGLE


B

IMAX

Where the initial evolution in LED and optics focused on better output, smaller chips and longer lifetime, the second evolution is again shifting to user comfort with more precise optics and better light control. As the purpose of the iMax II family is to provide the best visual comfort to the user - thanks to its recessed LED engine - this range is perfect to build further on this evolution: improved efficiency, improved beam angles and the possibility to combine all versions as they use uniform LED engines.

deltalight.com/imax


FAMILY

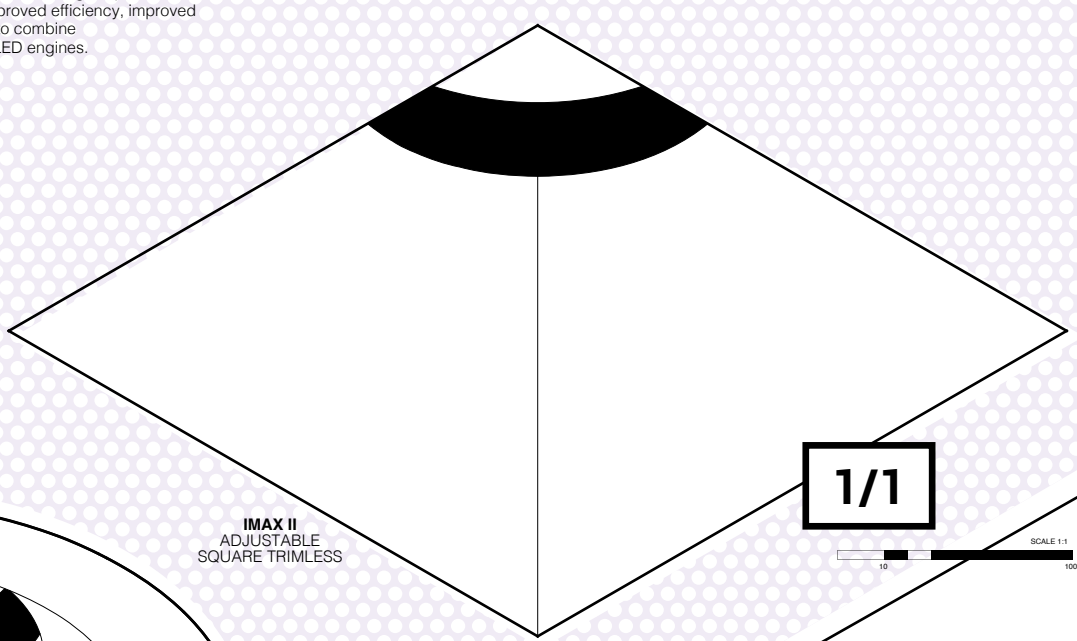

IMAX II
ADJUSTABLE
SQUARE TRIMLESS

1/1

SCALE 1:1
10
100

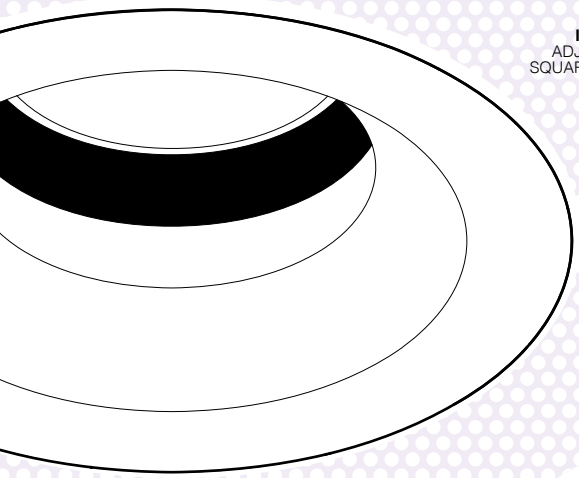

IMAX II
ADJUSTABLE ROUND

The round versions with trim within the range are available with a clear glass, offering IP54. This enables you to continue minimalism and uniformity throughout bathrooms, wellness areas and other indoor damp locations.

iMax II fits in The Soft Ceiling concept from Delta Light, as it focuses on minimal appearance, giving focus to the light instead of the fixture. As such, the collection fuses Delta Light's aspirations for design sophistication and attention to detail, with precise engineering and premium materials, resulting in minimal fixtures with maximum impact. The interchangeable tubes and colour finishes allow you to apply luminaires that disappear into the background.W




		IMAX II ADJUSTABLE		
		CL	LP	MP
LIGHT SOURCE				
LED		3,2W - 319lm	6,1W - 775lm 9W - 1076lm	11,7W - 1522lm 17,1W - 2125lm
OPTICS				
6°		•		
12°			•	
18°				•
20°			•	
26°				•
33°			•	
39°				•
45°				•
COLOUR TEMPERATURE				
2700K		•	•	•
3000K		•	•	•
SOFT DIM 3000-1800K				•
CONTROL				
EXCL. POWER SUPPLY		•	•	•
NON DIM				
MAINS DIM				
1-10V DIM				
DALI DIM				
WIRELESS DIM				
SHAPE				
ROUND		•	•	•
SQUARE		•	•	•
COLOUR LUMINAIRE				
WHITE		•	•	•
BLACK		•	•	•
COLOUR TUBE				
WHITE		•	•	•
BLACK		•	•	•
GOLD MATT		•	•	•
INSTALLATION				
INTERIOR	RECESSED	•	•	•
	RECESSED TRIMLESS	•	•	•
IP VALUE				
IP20 - FOR DRY LOCATIONS		•	•	•
IP54 - FOR DAMP LOCATIONS (+IP TUBE)		•	•	•
ACCESSORIES				
HONEYCOMB		•	•	•
SPREAD LENS			•	•
LINEAR SPREAD LENS			•	•
SOFTENING LENS			•	•
GLASS SBL			•	•
MOUNTING KITS				
O.F.A. ONE FOR ALL		•	•	•
CSC COLD STRETCHED CEILING		•	•	•
WSC WARM STRETCHED CEILING		•	•	•

• STANDARD
• NOT FOR ALL VERSIONS

HIGH EFFICIENCY

Apart from the high light transmission of the lens for optimum efficiency, its specific construction creates a focal point that is not inside the luminaire, but at the height of the opening in the ceiling. In this way, every single ray of light produced by the LED engine is being directed through the lens towards the opening of the iMax II luminaire. This reduces the spill light inside the luminaire and increases its efficiency.

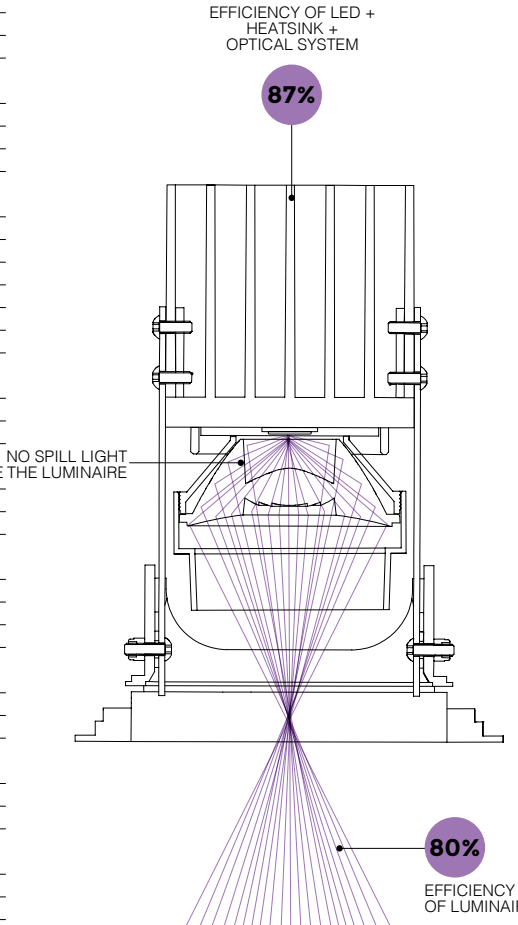


UGR <16


VISUAL COMFORT

IMAX


The iMax II range combines premium LED engines with precise optics, delivering high performance, maximum efficacy and high quality illumination. iMax II is using lenses out of plexiglass HW55, a material able to withstand high temperatures and allowing lumen packages up to 2000lm. Next to the high output, the lenses allow for a perfect control of the beam angle and a high uniformity on the light emitting surface, which results in reduced glare. Furthermore, if a different beam angle is required, the lenses can easily be interchanged.



Ø98 x 125 / max.25
Min. recessed volume 200 x 200 x 125mm




Ø98 x 125 / max.25
Min. recessed volume 200 x 200 x 125mm




ØKIT x 160
Min. recessed volume 180 x 180 x 160mm

iMAX II ADJUSTABLE LP


			UGR <16	ROUND	SQUARE	TRIMLESS
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500m	IP20	12°	**24210 9310** ◇	**24217 9310** ◇	**24214 9310**
			20°	**24210 9320** ◇	**24217 9320** ◇	**24214 9320**
			33°	**24210 9330** ◇	**24217 9330** ◇	**24214 9330**
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		12°	**24210 9210** ◇	**24217 9210** ◇	**24214 9210**
			20°	**24210 9220** ◇	**24217 9220** ◇	**24214 9220**
			33°	**24210 9230** ◇	**24217 9230** ◇	**24214 9230**
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		45°	**24227 9030** ◇	**24229 9030** ◇	**24231 9030**
				◇ B ● / W ○		-



Ø98 x 155 / max.25
Min. recessed volume 350 x 350 x 155mm




Ø98 x 155 / max.25
Min. recessed volume 350 x 350 x 155mm




ØKIT x 190
Min. recessed volume 300 x 300 x 190mm

iMAX II ADJUSTABLE MP


			UGR <16	ROUND	SQUARE	TRIMLESS
3000K CRI>90	LED [R] 11.6W / 1524lm / 350mA LED [R] 17.2W / 2101lm / 500mA	IP20	18°	**24211 9310** ◇	**24218 9310** ◇	**24215 9310**
			26°	**24211 9320** ◇	**24218 9320** ◇	**24215 9320**
			39°	**24211 9330** ◇	**24218 9330** ◇	**24215 9330**
2700K CRI>90	LED [R] 11.6W / 1458lm / 350mA LED [R] 17.2W / 2009lm / 500mA		18°	**24211 9210** ◇	**24218 9210** ◇	**24215 9210**
			26°	**24211 9220** ◇	**24218 9220** ◇	**24215 9220**
			39°[3]	**24211 9230** ◇	**24218 9230** ◇	**24215 9230**
				◇ B ● / W ○		-



Ø98 x 110 / max.25




Ø98 x 110 / max.25




ØKIT x 145

iMAX II ADJUSTABLE CL


			UGR <16	ROUND	SQUARE	TRIMLESS
3000K CRI>90	LED [F] 3.2W / 319lm / 1050mA	IP20	6°	**24220 9310** ◇	**24225 9310** ◇	**24224 9310**
2700K CRI>90	LED [F] 3.2W / 280lm / 1050mA			**24220 9210** ◇	**24225 9210** ◇	**24224 9210**
				◇ B ● / W ○		-

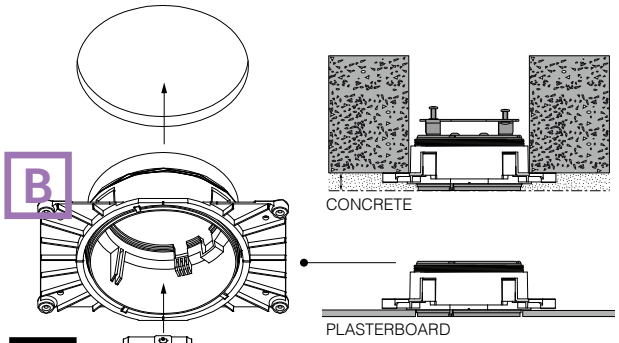



To offer even more flexibility and design freedom to the lighting designer, a range of light refining accessories is available to alter the light effect to the specific needs of the setting. A honeycomb to further minimize the direct glare from the light source, a sandblasted glass to create a diffuse general light effect and 3 specific lenses to either create a more oval or a wider light distribution or to smoothen the edges and create a softer transition.

A range of light refining accessories

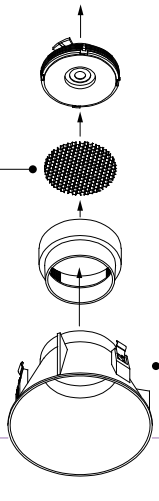



FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY											
			ADJUSTABLE LP				ADJUSTABLE MP				ADJUSTABLE CL			
					TRIMLESS				TRIMLESS				TRIMLESS	
			●	■	●	■	●	■	●	■	●	■	●	■
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
MAINS DIM (FE) 11	21012 0298	min. 55	R	R	R	R	R	R	R	R				
1-10V DIM 16	300 90 63	min. 84									R	R	R	R
1-10V DIM 15	300 90 124	min. 55	R	R	R	R	R	R	R	R				
DALI DIM 16	300 90 63	min. 84									R	R	R	R
DALI DIM 14	300 90 125	min. 55	R	R	R	R	R	R	R	R				
FINISH														
iMAX II TUBE ROUND	24213 0010 B/MMAT/W		R				R				R			
or iMAX II TUBE ROUND IP	24213 0040 B/MMAT/W		R				R				R			
iMAX II TUBE ROUND TRIMLESS	24213 0020 B/MMAT/W				R				R				R	
iMAX II TUBE SQUARE	24213 0080 B/MMAT/W			R				R				R		
iMAX II TUBE SQUARE TRIMLESS	24213 0030 B/MMAT/W					R				R				R
MOUNTING KIT TRIMLESS														
CONCRETE / PLASTERBOARD	15212 2010				R				R				R	
	400 92 00 OFA					R				R				R
PLASTERBOARD	400 92 00					R				R				R
COLD STRETCHED CEILING	15212 0090				R				R				R	
WARM STRETCHED CEILING	15212 0170				R				R				R	
HONEYCOMB / GLASS / LENS														
HONEYCOMB	24213 0050 B		A*	A*	A*	A*	A*	A*	A*	A*				
	400 03 01 B										A*	A*	A*	A*
LINEAR SPREAD LENS	24213 0070		A*	A*	A*	A*	A*	A*	A*	A*				
SPREAD LENS	24213 0100		A*	A*	A*	A*	A*	A*	A*	A*				
SOFTENING LENS	24213 0090		A*	A*	A*	A*	A*	A*	A*	A*				
GLASS SBL	24213 0060		A*	A*	A*	A*	A*	A*	A*	A*				

* MAX. 350MA FOR 39° BEAM ANGLE

HOLE IN ONE

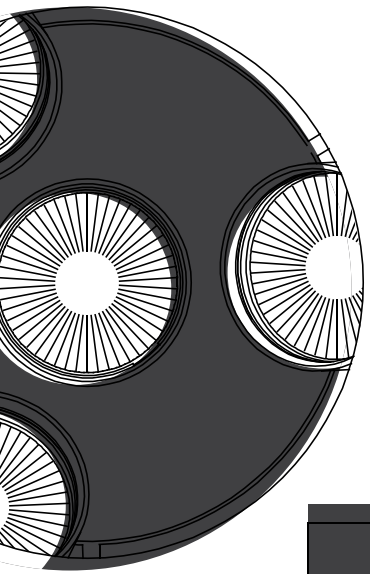

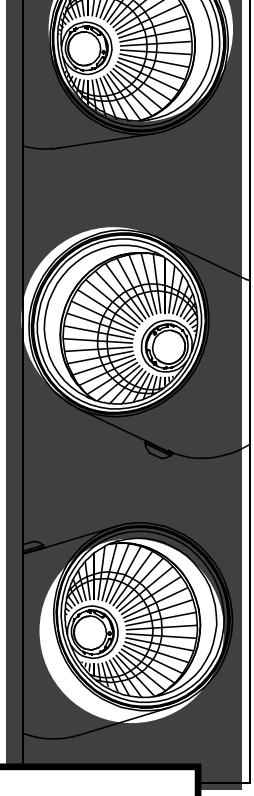


The name of this product says it all.
The Hole In One - available in both rectangular, square and circular shape - lets you see a hole in the ceiling and nothing else. That is as long as you don't stand underneath this lighting fixture. This fitting offers enough space for different modules being able to point at different directions, all from within the same hole in your ceiling, making it very discreet.

Light and space are inextricably linked with one another, something that the Hole In One plays on so ingeniously. Intended in the first place to be functional lighting, this contemporary design pokes a little fun at its surroundings at the same time. The black background in the fitting creates the illusion of an unfathomable unendingness around the light source. The magnetic mounting of the modules makes it easy to quickly adapt the lighting to a new setting.

deltalight.com/hole-in-one


Unfathomable unendingness a.k.a. black box :-)

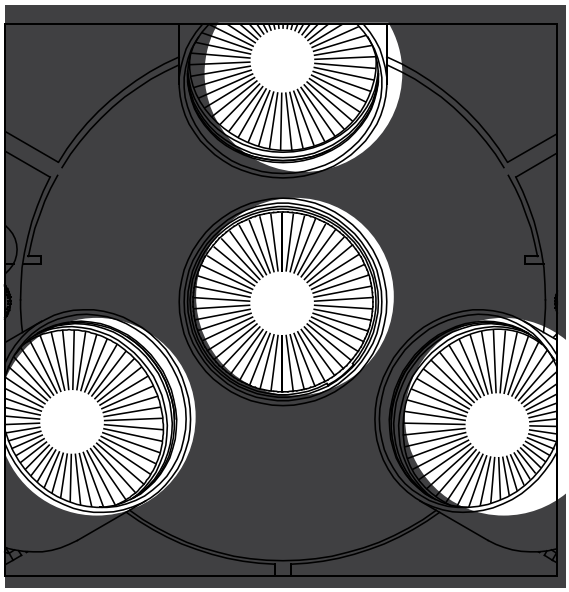


1/1

SCALE 1:1
10 100

A

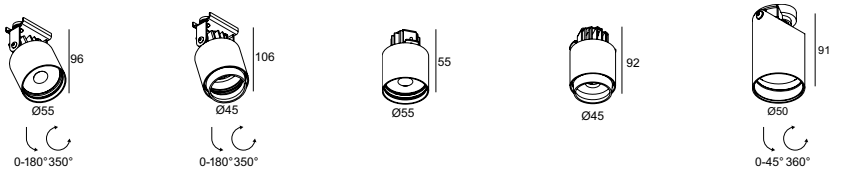


PUT				MAGNETIC 20°	MAGNETIC 6°	CENTER 20°	CENTER 6°	S6 MAGNETIC
3000K CRI>90	LED [F] 3.2W / 319lm / 1050mA	IP20	6°		**202 913 939**		**202 914 939**	
	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA		20°	**202 911 811 939**		**202 912 811 939**		
			24°					**12817 9320**
			40°					**12817 9330**
2700K CRI>90	LED [F] 3.2W / 280lm / 1050mA		6°		**202 913 929**		**202 914 929**	
	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA		20°	**202 911 811 929**		**202 912 811 929**		
			24°					**12817 9220**
			40°					**12817 9230**

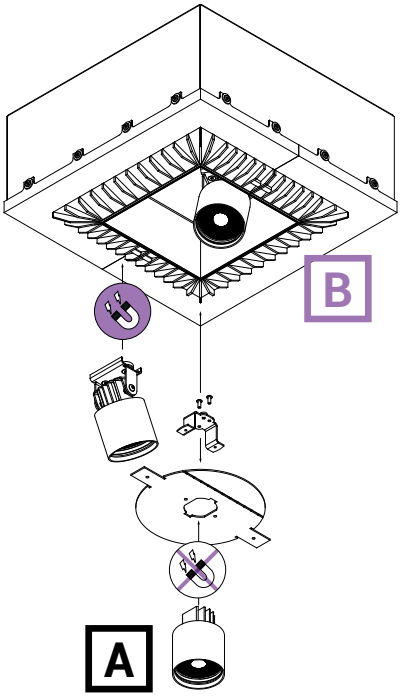


HOLE IN ONE
R15

222 x 145 +
(50 for PUT CENTER)
max.12




HOLE IN ONE
S6



222 x 222 x 145 +
(50 for PUT CENTER)
max.12

HOLE IN ONE
S15

310 x 170 x 105



FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY				
			PUT				
			MAGNETIC 20°	MAGNETIC 6°	CENTER 20°	CENTER 6°	S6 MAGNETIC
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	**21012 0298**	min. 55	R		R		R
1-10V DIM 16	**300 90 63**	min. 84		R		R	
1-10V DIM 15	**300 90 124**	min. 55	R		R		R
DALI DIM 16	**300 90 63**	min. 84		R		R	
DALI DIM 14	**300 90 125**	min. 55	R		R		R
MOUNTING KIT TRIMLESS							
HOLE IN ONE R15 or HOLE IN ONE S15	**202 91 97 01**		R *	R *	R *	R *	
	202 91 97 11		R *	R *	R *	R *	
HOLE IN ONE S6	**12816 0000**						R **
HONEYCOMB / GLASS / LENS							
HONEYCOMB	**413 03 01 B**		A	A	A	A	
	12820 0050 B						A
SOFTENING LENS	**12820 0090**						A
CONE PUT LED	**201 50 50 B**		A		A		


* MAX.6 PUT LED 350 OR 1050mA-DC - MAX.4 PUT LED 500mA-DC
** MAX.3 PUT S6

SPLITBOX


Splitbox is a trimless integrated lighting system, with the full flexibility of surface mounted lighting.
A black minimalistic cove of 80mm wide and 225mm or 315mm long can be equipped with one, two or three highly flexible spot modules. These Spy modules can remain encapsulated in the ceiling or emerge in its entirety and be tilted 90° while rotate 355°, allowing focused illumination in one swift move.

The black background inside the cove creates an illusion of unendingness around the light spots,
enforcing the fully integrated architectural lighting concept.
A range of light refining accessories is available to guarantee optimal optic performance and maximum eye comfort.
The outside of the Spy modules is available either black or white, which can be combined with exchangeable inserts in multiple colour finishes.


deltalight.com/splitbox

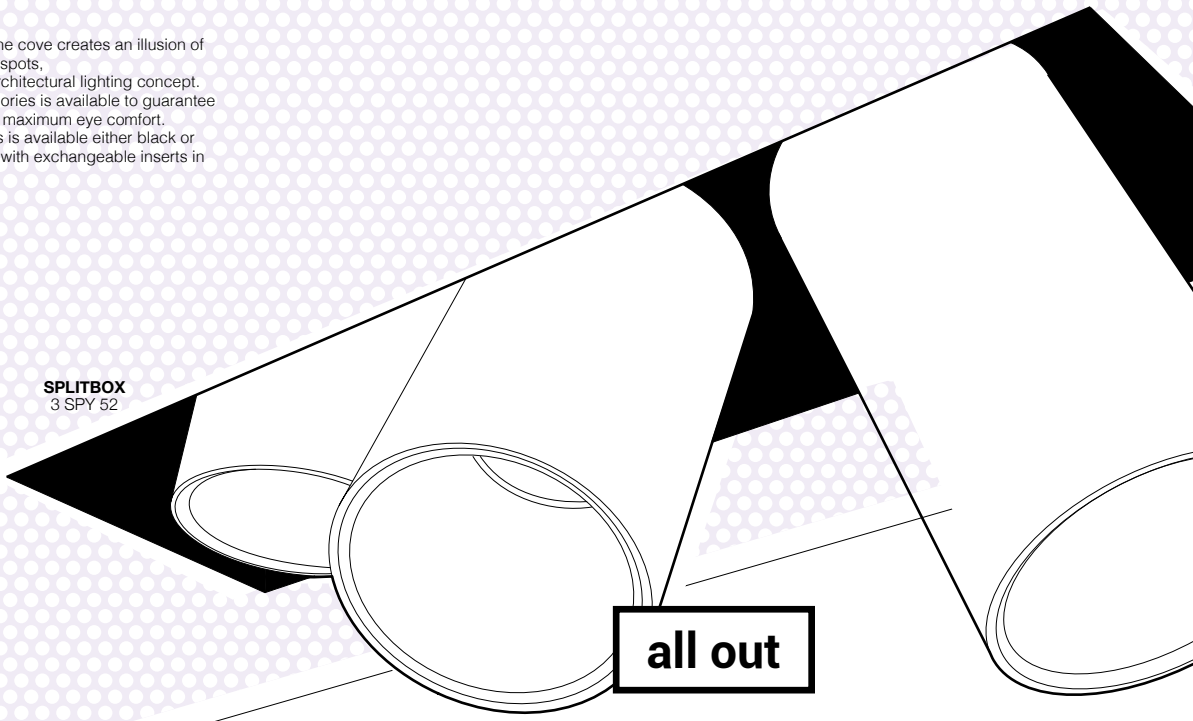


SPLITBOX
3 SPY 52




275 x 150 x 180 / max.12



275 x 150 x 180 / max.12




365 x 150 x 180 / max.12





365 x 150 x 180 / max.12

SPLITBOX				2 SPY 52	2 SPY FOCUS LP	3 SPY 52	3 SPY FOCUS LP
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA	IP20	20°	**100070 9320** ◇		**100074 9320** ◇	
			45°	**100070 9330** ◇		**100074 9330** ◇	
	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500m		8-43°		**100069 9300** ◇		**100073 9300** ◇
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA		20°	**100070 9220** ◇		**100074 9220** ◇	
			45°	**100070 9230** ◇		**100074 9230** ◇	
	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		8-43°		**100069 9200** ◇		**100073 9200** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		20°	**100071 9020** ◇		**100075 9020** ◇	
			45°	**100071 9030** ◇		**100075 9030** ◇	
TUNABLE WHITE	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		20°	**100072 9020** ◇		**100076 9020** ◇	
			45°	**100072 9030** ◇		**100076 9030** ◇	


◇ B ● / W ○



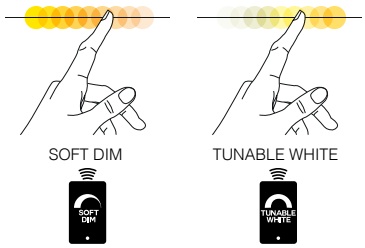

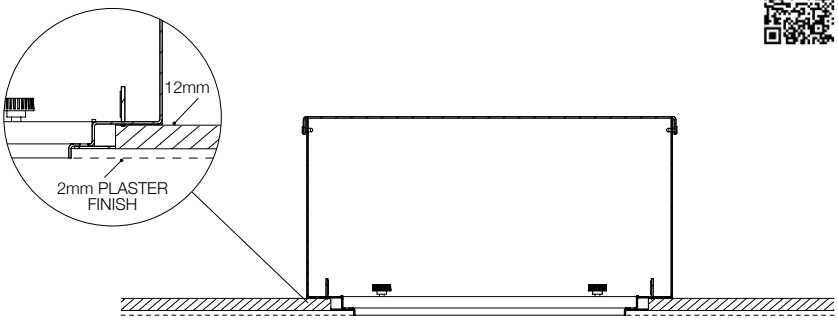



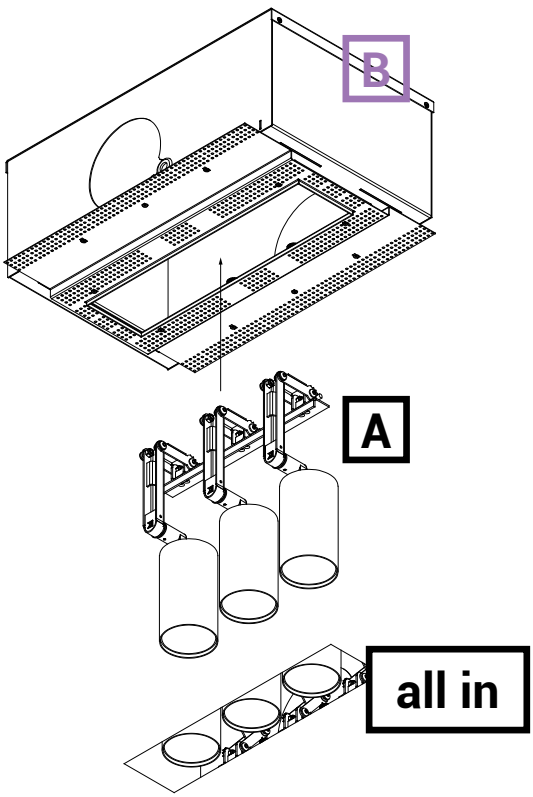

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			SPLITBOX			
			SPY 52 2	SPY FOCUS LP 2	SPY 52 3	SPY FOCUS LP 3
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	2 x R	2 x R
1-10V DIM 15	**300 90 124**	min. 55	R	R	2 x R	2 x R
DALI DIM 14	**300 90 125**	min. 55	R	R	2 x R	2 x R
TUNABLE WHITE DALI DT8 20	**21012 0355**	min. 86	2 x R		3 x R	
FINISH						
SPY 52 TUBE	**19810 0100 B / FBR / FG / GC / W**		R		R	
HONEYCOMB / GLASS / LENS						
HONEYCOMB SINGLE USE	**19810 0010 B**		A *		A *	
HONEYCOMB DOUBLE USE	**19810 0060 B**		A *		A *	
LINEAR SPREAD LENS	**19810 0020**		A *		A *	
SPREAD LENS	**19810 0030**		A *		A *	
SOFTENING LENS	**19810 0040**		A *		A *	
GLASS SBL	**19810 0050**		A *		A *	


* MAX. 500mA

CARREE

The Carree range is Delta Light's answer for easy-to-install, timeless and functional recessed spots, as it has been a Delta Light classic for many years. This family of square recessed luminaires offers refined solutions with integrated LED, either with or without trim. The straight lines in the design make a contemporary spot out of Carree, not only useful in modern architecture but also in many other applications. Carree can be used throughout the entire project, as it also includes IP44 solutions for bathrooms and even IP65 luminaires for outdoor use

deltalight.com/carree


IP23 IP44

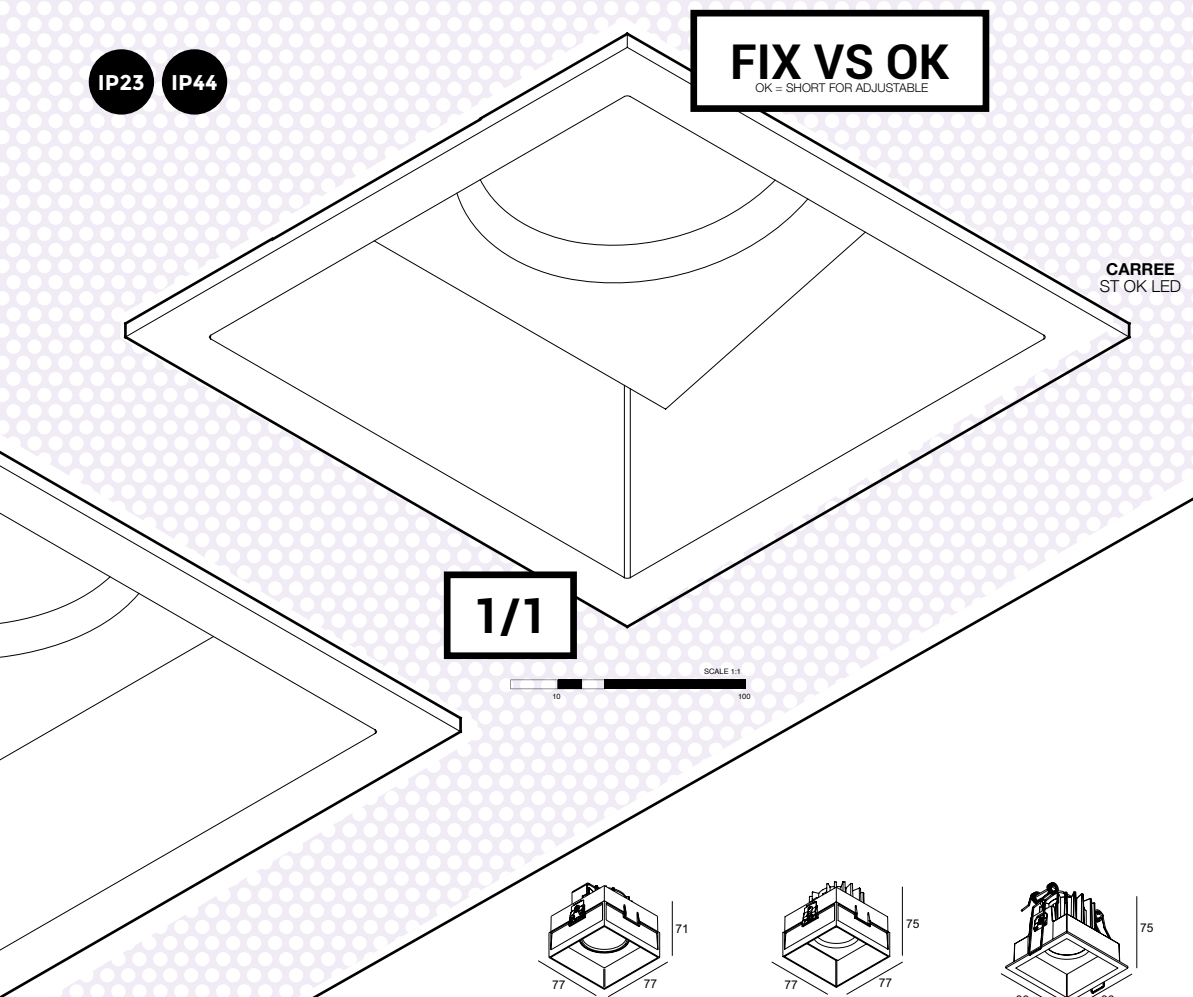

Ø KIT x 75 | Ø KIT x 85 | 75 x 75 x 80 / max.35 | 75 x 75 x 80 / max.35

CARREE				TRIMLESS LED IP	TRIMLESS OK LED	ST LED IP	ST OK LED
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP44	33°	**202 511 811 932** ◇		**11045 9320** ◇	
	LED [H] 10.4W / 1128lm / 500mA	IP23			**202 510 811 932** ◇		**11046 9320** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP44		**202 511 811 922** ◇		**11045 9220** ◇	
	LED [H] 10.4W / 1083lm / 500mA	IP23			**202 510 811 922** ◇		**11046 9220** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP23	45°		**11049 9030** ◇		**11048 9030** ◇
				◇ W ◯	◇ B ● / W ◯	◇ W ◯	◇ B ● / W ◯




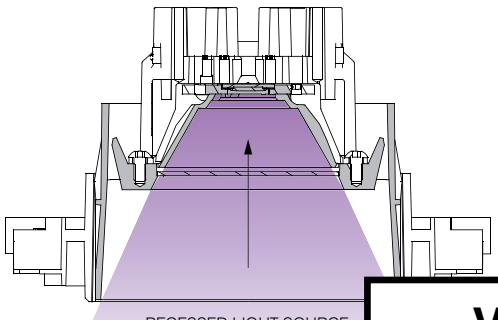

VISUAL COMFORT

B

O.F.A.
ONE FOR ALL
MOUNTING KIT TRIMLESS
FOR CONCRETE
& PLASTERBOARD



FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			CARREE			
			TRIMLESS		ST	
			LED IP	OK LED	LED IP	OK LED
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R	R	R	R
MOUNTING KIT TRIMLESS						
CONCRETE / PLASTERBOARD	**202 01 75 OFA**		R	R		
PLASTERBOARD	**202 01 75**		R	R		
	202 00 75				O	O
INSTALLATION						
PLASTERKIT	**207 01 161**				O	O
CONCRETE BOX	**270 11 161**				O	O

REO

FAMILY


The Reo collection is more than one product, it is a family which offers a solution for many lighting demands, from residential to hotel, restaurant to retail and much more. In line with this philosophy, Reo comes in single and double fixtures, round or square, orientable or fixed, in multiple finishing colours, for both indoor and outdoor use. The design of these recessed conical spots delivers a hardly visible transition from the intense light to the ceiling, resulting in a halo-like effect, ideal to give the space an extra dimension.

MICRO REO
Being the smallest member of the family, Micro Reo excels in minimalism in design and excellence in performance as it offers a 7,1W LED solution. It comes as an IP20 version and as a luminaire with higher IP-rating that can be used in bathrooms and other wet areas.

MINI REO
Mini Reo offers a multitude of lighting solutions, as it combines multiple beam angles in both non- adjustable and adjustable luminaires. Spot, Medium or Flood can be combined to fit the specific needs of the project.

REO
Similar to Mini Reo, Reo offers adjustable and non-adjustable downlights in multiple beam angles. With an output up to 10,4W, Reo can easily be integrated into hospitality and residential projects, especially when using the Soft Dim version which creates a warm and cosy atmosphere when dimming down the luminaire. Reo comes in a round and square design.

deltalight.com/reo

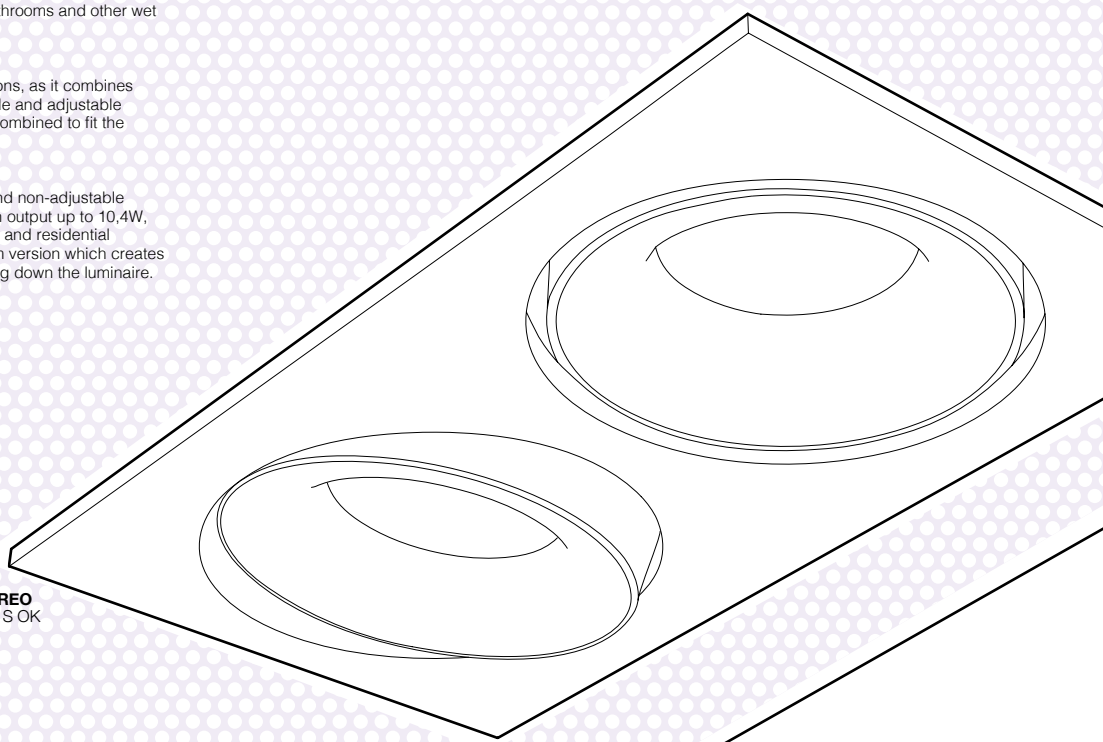


REO
2 S OK





1/1

SCALE 1:1
10 100

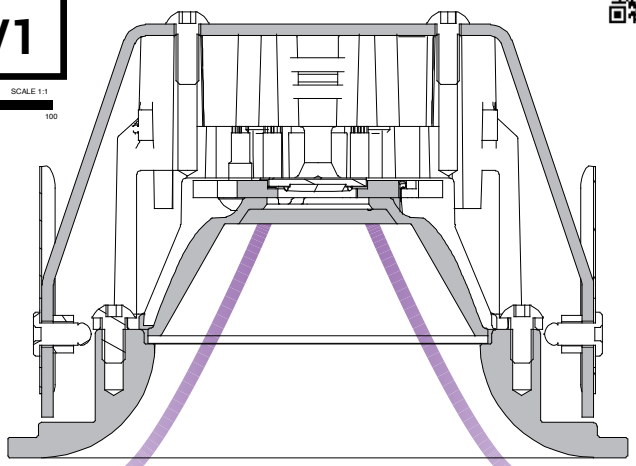

CURVES
a halo-like effect









		MICRO REO	MINI REO		REO	
		FIX	FIX	ADJUSTABLE	FIX	ADJUSTABLE
LIGHT SOURCE						
LED		7,1W - 812lm	6,1W - 775lm 9W - 1076lm		7,1W - 812lm 10,4W - 1128lm	
OPTICS						
18°			•	•		
25°			•	•		
33°						
35°		•			•	•
37°			•	•		
40°					•	•
50°					•	•
COLOUR TEMPERATURE						
2700K		•	•	•	•	•
3000K		•	•	•	•	•
SOFT DIM 3000-1800K					•	•
CONTROL						
EXCL. POWER SUPPLY		•	•	•	•	•
NON DIM						
MAINS DIM						
1-10V DIM						
DALI DIM						
WIRELESS DIM						
SHAPE						
ROUND		•	•	•	•	•
SQUARE						•
COLOUR						
WHITE ◯		•	•	•	•	•
BLACK ●		•	•	•	•	•
INSTALLATION						
INTERIOR	RECESSED	•	•	•	•	•
EXTERIOR	RECESSED	•	•	•	•	

• STANDARD
• NOT FOR ALL VERSIONS


REO




46 x 90 / min.5



46 x 90 / min.5



Ø56x 60 / min.5




Ø70x 60 / min.5

MICRO REO / MINI REO


				MICRO REO	MICRO REO X	MINI REO II	MINI REO II OK
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP20	35°	**302 22 811 932** ◇			
		IP43			**302 23 811 932** ◇		
	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP20	18°			**19351 9310** ◇	**19353 9310** ◇
			25°			**19351 9320** ◇	**19353 9320** ◇
			37°			**19351 9330** ◇	**19353 9330** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP20	35°	**302 22 811 922** ◇			
		IP43			**302 23 811 922** ◇		
	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA	IP20	18°			**19351 9210** ◇	**19353 9210** ◇
			25°			**19351 9220** ◇	**19353 9220** ◇
			37°			**19351 9230** ◇	**19353 9230** ◇

◇ B ● / W ○


A




76 x 55 / max.22



76 x 55



98 x 65 / max.30




98 x 65


REO

				S1	S2	OK S1	OK S2
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP43	33°	**202 26 811 932** ◇	**202 262 811 932** ◇		
		IP23				**202 37 811 932** ◇	**202 372 811 932** ◇
		IP43	50°	**202 26 811 933** ◇	**202 262 811 933** ◇		
		IP23				**202 37 811 933** ◇	**202 372 811 933** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA	IP43	33°	**202 26 811 922** ◇	**202 262 811 922** ◇		
		IP23				**202 37 811 922** ◇	**202 372 811 922** ◇
		IP43	50°	**202 26 811 923** ◇	**202 262 811 923** ◇		
		IP23				**202 37 811 923** ◇	**202 372 811 923** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP43	45°	**15411 9030** ◇	**15412 9030** ◇		
		IP23				**15413 9030** ◇	**15414 9030** ◇

◇ B ● / W ○



98 x 70 / max.30





190 x 98 x 70 / max.30


REO

				S OK	2 S OK
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP23	33°	**202 38 811 932** ◇	**202 38 812 932** ◇
			50°	**202 38 811 933** ◇	**202 38 812 933** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA		33°	**202 38 811 922** ◇	**202 38 812 922** ◇
			50°	**202 38 811 923** ◇	**202 38 812 923** ◇

◇ W ○

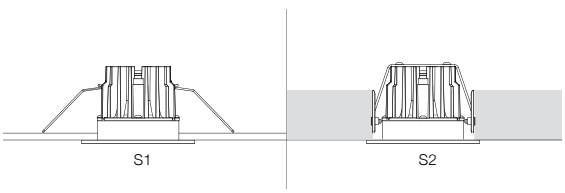





FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY									
			MICRO REO		MINI REO		REO					
				X	II	II OK	S1	S2	OK S1	OKS2	S OK	2 S OK
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT												
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R	R	R	R	R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R	R	R	R	R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R	R	R	R	R	R	R	R
INSTALLATION												
PLASTERKIT	**202 11 19**						O					
	207 01 170								O		O	

* REMOTE INSTALLATION

ARTUUR

FAMILY

Everything about Artuur catches the eye, be it its design, its optical compartment or its small protrusion when installed into the ceiling. Artuur comes as a downlight with sloping edges towards the center, both round and square. The design twist is in the asymmetrical square version, easily deceiving the eye but inspiring you to present creative layouts.

Another design element is the sophisticated lens on top of the deeply placed LED. While offering an outstanding quality of light, its remarkable aesthetics wow you, even when Artuur is not turned on.
Additionally, Artuur can combine pleasant general lighting with uniform wall washing, as a secondary LED module softly throws its light on vertical surfaces.


When installed into the ceiling, Artuur adds depth into the room owing to its gentle protruding ring. Small enough to be noticed, big enough to make a difference. Put the complete luminaire into a recessing kit and Artuur goes from protruding to trimless, refinement at best!

deltalight.com/artuur


1/1

SCALE 1:1

10 100

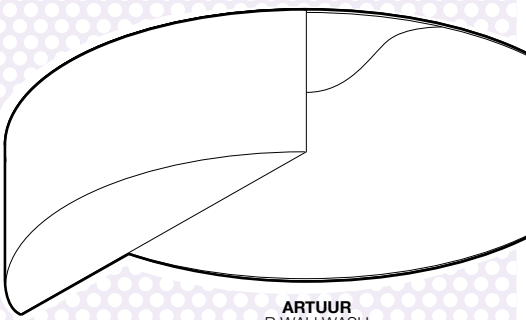


ARTUUR
R WALLWASH

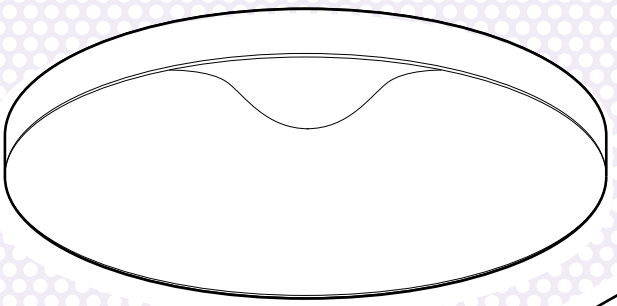

ARTUUR
R




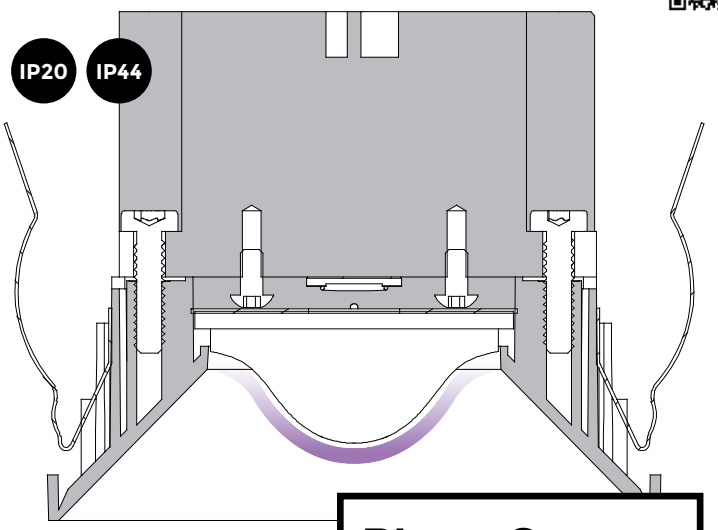


Plane-Convex Aspherical lens

		ARTUUR	
		DOWN	DOWN + WALLWASH
LIGHT SOURCE			
LED		5,8W - 787lm 8,6W - 1089lm	5,8W - 787lm 8,6W - 1089lm + 5,8W - 787lm
OPTICS			
30°		•	
60°		•	
50° by 105°		•	
30° + WALLWASH			•
COLOUR TEMPERATURE			
2700K		•	•
3000K		•	•
SOFT DIM 3000-1800K		•	
CONTROL			
EXCL. POWER SUPPLY		•	•
NON DIM			
MAINS DIM			
1-10V DIM			
DALI DIM			
WIRELESS DIM			
SHAPE			
ROUND		•	•
SQUARE		•	•
COLOUR			
WHITE		•	•
BLACK		•	•
GOLD COLOURED		•	•
INSTALLATION			
INTERIOR	RECESSED	•	•
	RECESSED TRIMLESS	•	•
IP VALUE			
IP20 - FOR DRY LOCATIONS		•	•
IP44 - FOR DAMP LOCATIONS		•	•
MOUNTING KITS			
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)		•	•


• STANDARD
• NOT FOR ALL VERSIONS

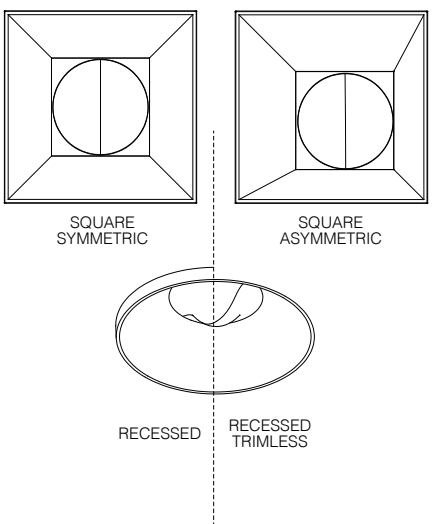


ARTUUR



72 x 70 / min.5



72 x 72 x 70 / min.5




72 x 72 x 70 / min.5


ARTUUR				R	S	SA
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA	IP20	30°	**27711 9310** ◇	**27719 9310** ◇	**27723 9310** ◇
			60°	**27711 9320** ◇	**27719 9320** ◇	**27723 9320** ◇
			50-105°*	**27711 9330** ◇	**27719 9330** ◇	**27723 9330** ◇
		IP44	30°	**27713 9310** ◇	**27721 9310** ◇	**27725 9310** ◇
			60°	**27713 9320** ◇	**27721 9320** ◇	**27725 9320** ◇
			50-105°*	**27713 9330** ◇	**27721 9330** ◇	**27725 9330** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA	IP20	30°	**27711 9210** ◇	**27719 9210** ◇	**27723 9210** ◇
			60°	**27711 9220** ◇	**27719 9220** ◇	**27723 9220** ◇
			50-105°*	**27711 9230** ◇	**27719 9230** ◇	**27723 9230** ◇
		IP44	30°	**27713 9210** ◇	**27721 9210** ◇	**27725 9210** ◇
			60°	**27713 9220** ◇	**27721 9220** ◇	**27725 9220** ◇
			50-105°*	**27713 9230** ◇	**27721 9230** ◇	**27725 9230** ◇
SOFT DIM	3000-1800K / CRI>90 LED [W] 6W / 623lm / 350mA	IP20	60°	**27712 9020** ◇	**27720 9020** ◇	**27724 9020** ◇
		IP44		**27714 9020** ◇	**27722 9020** ◇	**27726 9020** ◇

◇ B ● / GC ● / W ○

III



72 x 70 / min.5



72 x 72 x 70 / min.5


ARTUUR WALLWASH				R	S
3000K CRI>90	DOWN: LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA ⊕ WALLWASH: LED [U] 5.8W / 787lm / 350mA	IP20	30°	**27715 9310** ◇	**27727 9310** ◇
		IP44		**27717 9310** ◇	**27729 9310** ◇
2700K CRI>90	DOWN: LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA ⊕ WALLWASH: LED [U] 5.8W / 753lm / 350mA	IP20		**27715 9210** ◇	**27727 9210** ◇
		IP44		**27717 9210** ◇	**27729 9210** ◇


◇ B ● / GC ● / W ○


III


A

WALLWASH

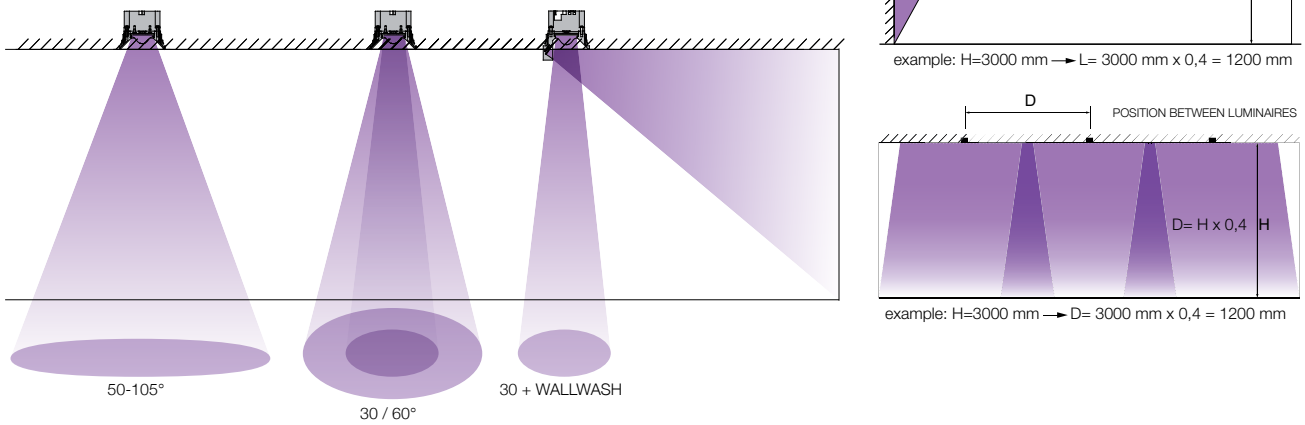

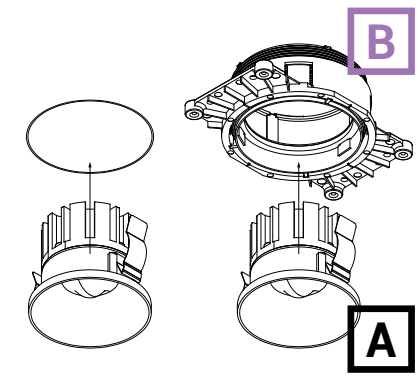

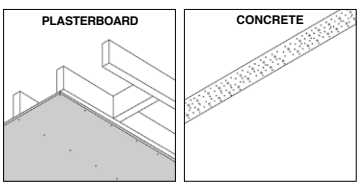

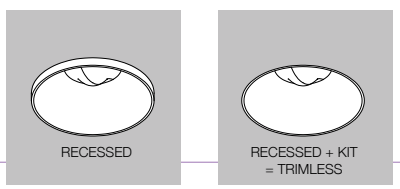


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY				
			ARTUUR			ARTUUR WALLWASH	
			R	S	SA	R	S
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R	R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R	R	R	R	R
MOUNTING KIT TRIMLESS							
CONCRETE / PLASTERBOARD	**27710 0010**		O			O	
	27710 0020			O	O		O

B


PLAT-OH!

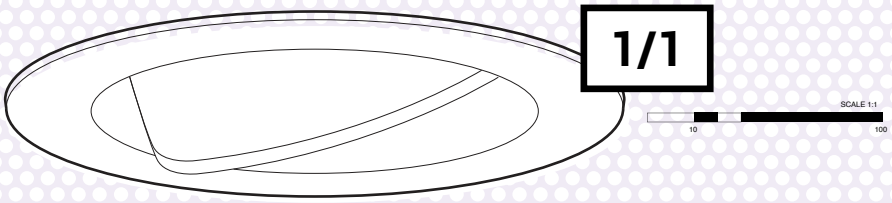


PLAT-OH!



PLAT-OH!
TRIMLESS



Ø KIT x 55 / max.12,5




76 x 55 / max.12,5

NEW

PLAT-OH!				PLAT-OH! TRIMLESS	PLAT-OH!
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	23°	**29513 9310** ◇	**29511 9310** ◇
	LED [U] 8.6W / 1089lm / 500mA		36°	**29513 9320** ◇	**29511 9320** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA		23°	**29513 9210** ◇	**29511 9210** ◇
	LED [U] 8.6W / 1041lm / 500mA		36°	**29513 9220** ◇	**29511 9220** ◇
SOFT DIM	3000-1800K / CRI>90		23°	**29514 9010** ◇	**29512 9010** ◇
	LED [W] 6W / 623lm / 350mA		36°	**29514 9020** ◇	**29512 9020** ◇
				◇ B / GC / W	◇ B-B / B-GC / W-W

A




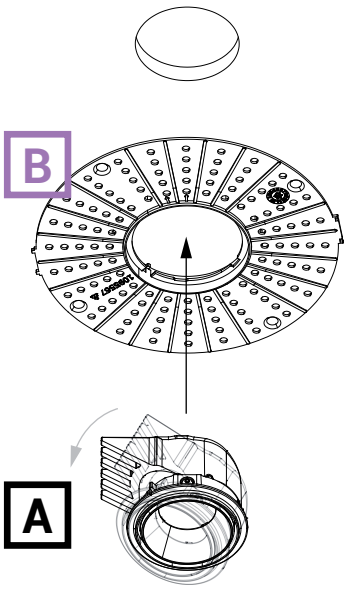

Our Plat-Oh! family is the answer to a present-day problem. The constant evolution within the world of construction on the level of energy savings, sustainability and legislation forces changes in the way there is being build. One of the results is building more compact, and compact in size means less room in installation depth also when using hollow ceilings.

Plat-Oh! is designed to fit in these new building concepts as it offers a family of tiltable downlights that only require 55mm of recessing depth. Even within these limits, Plat-Oh! can be tilted up to 30°. Together with its 2 different beam angles, 3 finishing colours and the choice between trimless or with trim, Plat-Oh! offers a flexible lighting solution for demanding environments.

deltalight.com/plat-oh

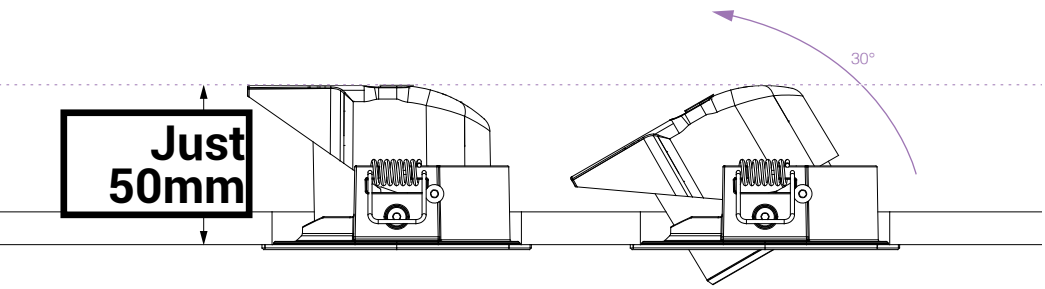

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY	
			PLAT-OH! TRIMLESS	PLAT-OH!
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R
1-10V DIM 15	**300 90 124**	min. 55	R	R
DALI DIM 14	**300 90 125**	min. 55	R	R
MOUNTING KIT TRIMLESS				
PLASTERBOARD	**29510 0020**		R	

DEEP RINGO

FAMILY


The conical shaped design of the Deep Ringo fixtures and its deeper placed LED source make sure that glare is reduced to a minimum when Deep Ringo is installed in the ceiling. The small trim gives a refined touch to this elegant luminaire.
Available in 3 sizes, with trim or trimless, fix or adjustable, a range of beam angles and multiple finishing colours, Deep Ringo is an easy-to-use downlight throughout the project. Its golden or bronze finish is perfect to add a sniff of luxury to the room.

MINI DEEP RINGO
Mini Deep Ringo is playful, as it comes in a multitude of finishing colours, has 3 different beam angles to choose from and can be fix or adjustable. A range of possibilities in a slender design.

DEEP RINGO
Deep Ringo is the most elaborate of the family, offering LED and halogen solutions, for use in both dry and wet areas. Similar as the Reo family, Deep Ringo also offers a ribbed version that reduces the glare thanks to its cascading transition from light source to ceiling.

Furthermore Deep Ringo can also be used as light unit in our **▲IR** range, a toolset that combines light and ventilation in one.


deltalight.com/deepringo

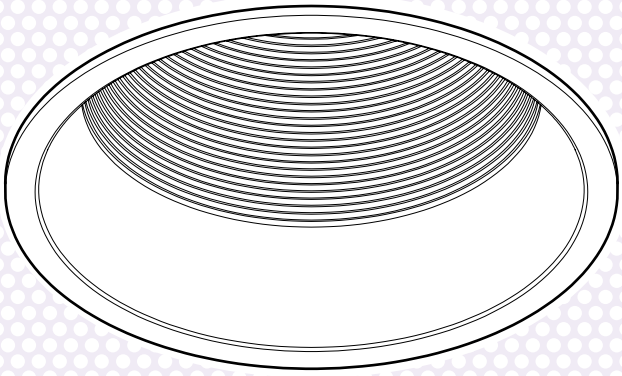

DEEP RINGO
RIBS


1/1

SCALE 1:1
10 100

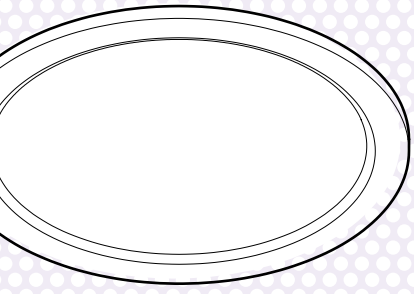


MINI
DEEP RINGO II

VISUAL COMFORT



TR VS ST




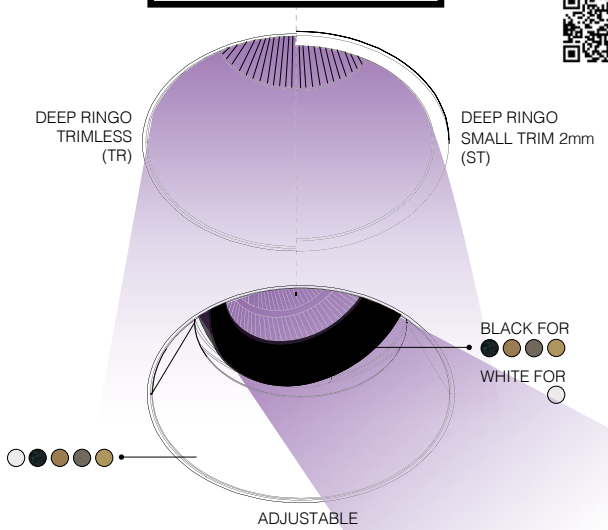


		MINI		LED		RIBS	HI
		FIX	ADJUSTABLE	FIX	ADJUSTABLE	FIX	FIX
LIGHT SOURCE							
LED		6,1W - 775lm 9W - 1076lm		7,1W - 812lm 10,4W - 1128lm		7,1W - 812lm 10,4W - 1128lm	
GU10							•
OPTICS							
18°		•	•				
25°		•	•				
33°				•	•	•	
37°		•	•				
40°				◦	◦	◦	
COLOUR TEMPERATURE							
2700K		•	•	•	•	•	
3000K		•	•	•	•	•	
SOFT DIM 3000-1800K				◦	◦	◦	
CONTROL							
EXCL. POWER SUPPLY		•	•	•	•	•	
NON DIM							
MAINS DIM							•
1-10V DIM							
DALI DIM							
WIRELESS DIM							
COLOUR							
WHITE		•	•	•	•	•	•
BLACK		•	•	•	•	•	•
FLEMISH GOLD		•	•	•	•	•	
FLEMISH BRONZE		•	•	•	•	•	
GOLD COLOURED		•	•	•	•		
BRUSHED GREY				•			
BRUSHED COPPER				•			
BRUSHED GOLD				•			
BRUSHED OLD BRONZE				•			
BRUSHED ANTHRACITE				•			
PIANO BLACK				•			
INSTALLATION							
INTERIOR	RECESSED	•	•	•	•	•	•
	RECESSED TRIMLESS	•	•	•	•		
EXTERIOR	RECESSED	•		•			
IP VALUE							
IP20 - FOR DRY LOCATIONS		•		•		•	•
IP44 - FOR DAMP LOCATIONS		◦		◦		◦	◦
MOUNTING KITS							
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)				◦	◦		
CSC (COLD STRETCHED CEILING)				◦	◦		
WSC (WARM STRETCHED CEILING)				◦	◦		
▲IR (LIGHT + VENTILATION)				◦	◦		

• STANDARD
◦ NOT FOR ALL VERSIONS


DEEP RINGO



ØKIT x 95



56 x 80 / min.5




71 x 80 / min.5


MINI DEEP RINGO

NEW


				II TRIMLESS	II	II OK
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500m	IP20	18°		**19423 9310** ◇	**19425 9310** ◇
			25°		**19423 9320** ◇	**19425 9320** ◇
			37°	**19439 9330** ◇	**19423 9330** ◇	**19425 9330** ◇
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		18°		**19423 9210** ◇	**19425 9210** ◇
			25°		**19423 9220** ◇	**19425 9220** ◇
			37°	**19439 9230** ◇	**19423 9230** ◇	**19425 9230** ◇
				◇ B ● / W ○	◇ B ● / FBR ● / FG ● / W ○	




ØKIT x 95




ØKIT x 105



76 x 90 / min.5



76 x 100 / min.5




76 x 90 / min.5

DEEP RINGO


				TRIMLESS	TRIMLESS OK	LED	LED OK	RIBS
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP20	33°		**202 145 811 932** ◇			
		IP23		**202 144 811 932** ◇ **			**19435 9320** ◇	
		IP43				**202 272 811 932** ◇ **		**202 274 811 932** ◇
		IP44		**202 146 811 932** ◇ **		**202 273 811 932** ◇ **		**202 275 811 932** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA	IP20			**202 145 811 922** ◇			
		IP23		**202 144 811 922** ◇ **			**19435 9220** ◇	
		IP43				**202 272 811 922** ◇ **		**202 274 811 922** ◇
		IP44		**202 146 811 922** ◇ **		**202 273 811 922** ◇ **		**202 275 811 922** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP23	45°	**19436 9030** ◇ **				
		IP43				**19437 9030** ◇ **		**19438 9030** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○ (GC NOT FOR DEEP RINGO RIBS)

** + NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●



76 x 105 / max.15



76 x 105

DEEP RINGO

			HI S1	HI S2
QPAR51 max.35W	IP20		**202 11 26** ◇	**202 01 26** ◇
	IP44			**202 014 26** ◇

◇ B ● / W ○

GU10 / 100-240V / 50-60Hz


0,5

deltalight.com/deepringo


A GLIMPSE OF ME ON PAGE 12


C

FIND ME ONLINE

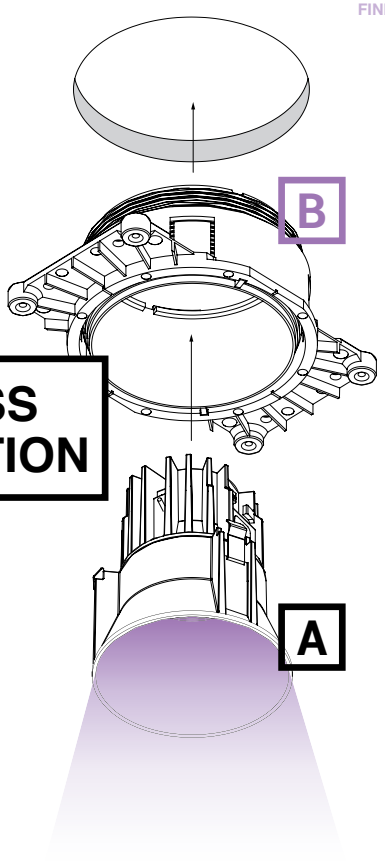

TRIMLESS INSTALLATION

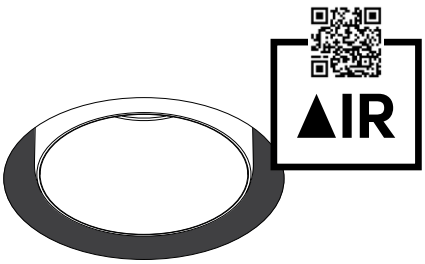

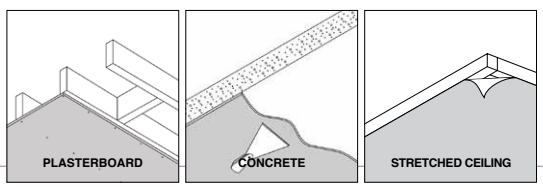

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY									
			MINI DEEP RINGO			DEEP RINGO						
			II TR	II	II OK	TR	TR OK	LED	LED OK	RIBS	HI S1	HI S2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT												
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R	R	R	R	R	R	R		
1-10V DIM 15	**300 90 124**	min. 55	R *	R	R	R	R	R	R	R		
DALI DIM 14	**300 90 125**	min. 55	R *	R	R	R	R	R	R	R		
FINISH												
SPY 52 TUBE II	**19810 0230 FBR/FG/GC**		O									
MOUNTING KIT TRIMLESS												
CONCRETE / PLASTERBOARD	**19410 0010**		R									
	15212 2000					R	R					
COLD STRETCHED CEILING	**15212 0070**					R	R					
WARM STRETCHED CEILING	**15212 0150**					R	R					
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTERR												
PLASTERBOARD SIDE AIR	**29810 0010**	Light+Ventilation				R						
	29810 0050	Light				R						
	29810 0020	Light+Ventilation					R					
	29810 0060	Light					R					
	29810 0100	Ventilation				O	O					
CONCRETE TOP AIR	**29810 0210**	Light+Ventilation				R						
	29810 0050	Light				R						
	29810 0220	Light+Ventilation					R					
	29810 0060	Light					R					
	29810 0200	Ventilation				O	O					
INSTALLATION												
PLASTERKIT 101	**202 11 19**										O	
LED LAMP MORE INFO TECHNICAL CHAPTERR											O	O

* REMOTE INSTALLATION

B

GYN

The Gyn family is a range of gypsum luminaires that complete Delta Light's elaborate range of downlights. The possibility of finishing these products on site in any desired colour makes them suitable for many applications.

The curved shape of the Gyn frame provides a smooth transition from ceiling to luminaire. When Gyn is turned on, the curve provides a soft glow on the ceiling, similar to Reo fixtures.

As a round or square gypsum luminaire, Gyn D steps away from the curved edges and goes straight into the ceiling. With a deeply recessed LED module, Gyn D offers additional visual comfort as it shields off the light source from directly being looked into.

deltalight.com/gyn




1/1


SCALE 1:1

10 100


GYN
ROUND OK




130 x 130 x 120
min.5-max.16



130 x 130 x 120
min.5-max.16



140 x 140 x 80
min.7-max.18



0-20° 350°

155 x 155 x 85
min.7-max.18


A

GYN


				D SQUARE	D ROUND	ROUND	ROUND OK
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP20	33°	**100052 9320** ◇	**100051 9320** ◇		
		IP23	18°			**100066 9310** ◇	**100068 9310** ◇
			33°			**100066 9320** ◇	**100068 9320** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA	IP20	33°	**100052 9220** ◇	**100051 9220** ◇		
		IP23	18°			**100066 9210** ◇	**100068 9210** ◇
			33°			**100066 9220** ◇	**100068 9220** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA	IP23	45°			**100085 9030** ◇	**100086 9030** ◇

◇ W ◯




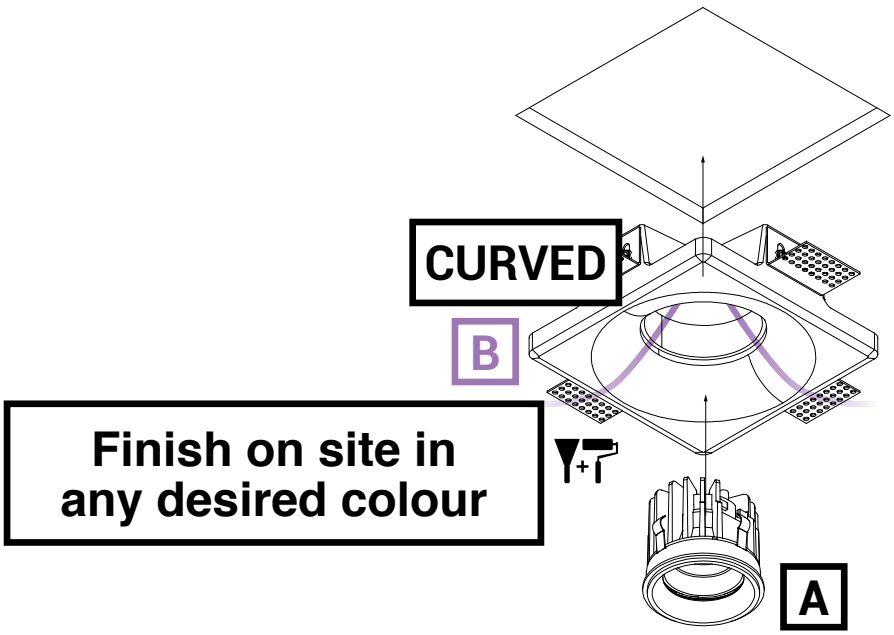


Finish on site in any desired colour




GYN
D SQUARE



GYN
D ROUND



GYN
ROUND OK



GYN
ROUND

VISUAL COMFORT

B

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY GYN			
			D SQUARE	D ROUND	ROUND	ROUND OK
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R *
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R *	R *
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R *	R *


* REMOTE INSTALLATION

PARTOU

Partou? Oui oui! The Partou family has countless application possibilities, as it combines round and square shapes, fix and adjustable luminaires and offers an
IP44 protection rate from below. Easy to fit in everywhere – partout in French -,from residential to hospitality, from dining room to bathroom.


ADAPTIVE DESIGN
The clever design of Partou offers a multitude of finishing options on 1 and the same LED module. Complete your LED module with the cover you want: round or square, small or bigger, white or black, the choice is up to you!

deltalight.com/partou

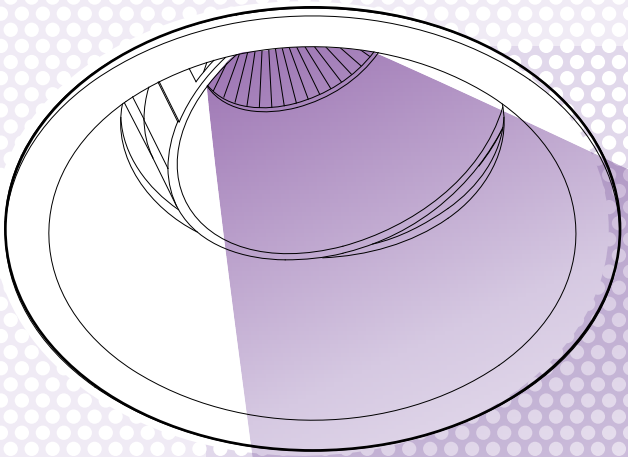


PARTOU
OK


A




64 x 85



76 x 100




76 x 90



76 x 76 x 100

PARTOU				MINI IP	IP	OK	S IP
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500m	IP20	25°			**25214 9320** ◇	
			37°			**25214 9330** ◇	
		IP44	25°	**25211 9320** ◇	**25213 9320** ◇		**25216 9320** ◇
			37°	**25211 9330** ◇	**25213 9330** ◇		**25216 9330** ◇
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA	IP20	25°			**25214 9220** ◇	
			37°			**25214 9230** ◇	
		IP44	25°	**25211 9220** ◇	**25213 9220** ◇		**25216 9220** ◇
			37°	**25211 9230** ◇	**25213 9230** ◇		**25216 9230** ◇
					◇ B-B ●● / W-W ○○		◇ B ● / W ○

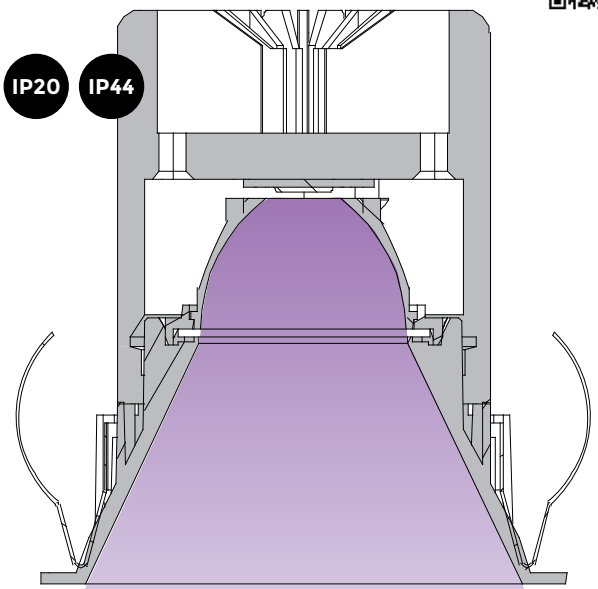

1/1

SCALE 1:1
10
100

VISUAL COMFORT


FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY			
			MINI PARTOU	PARTOU		
			IP	IP	OK	S IP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R	R	R	R
INSTALLATION						
PLASTERKIT	**202 11 19**			O	O	

B

TWENTY-7


Despite the many advantages of LED as a lighting solution, the incandescence light bulb still recalls characteristics as warmth and cosiness to many people. As a flashback on how it used to be, Twenty-7 brings these characteristics back to live.
As a recessed luminaire where only the light bulb is coming out of the ceiling, Twenty-7 throws light throughout the room, enlighting the space from ceiling to floor.
By using a LED filament lighting bulb, Twenty-7 gives you not only warmth and cosiness, but at the same time adds the advantages of LED.

deltalight.com/twenty7

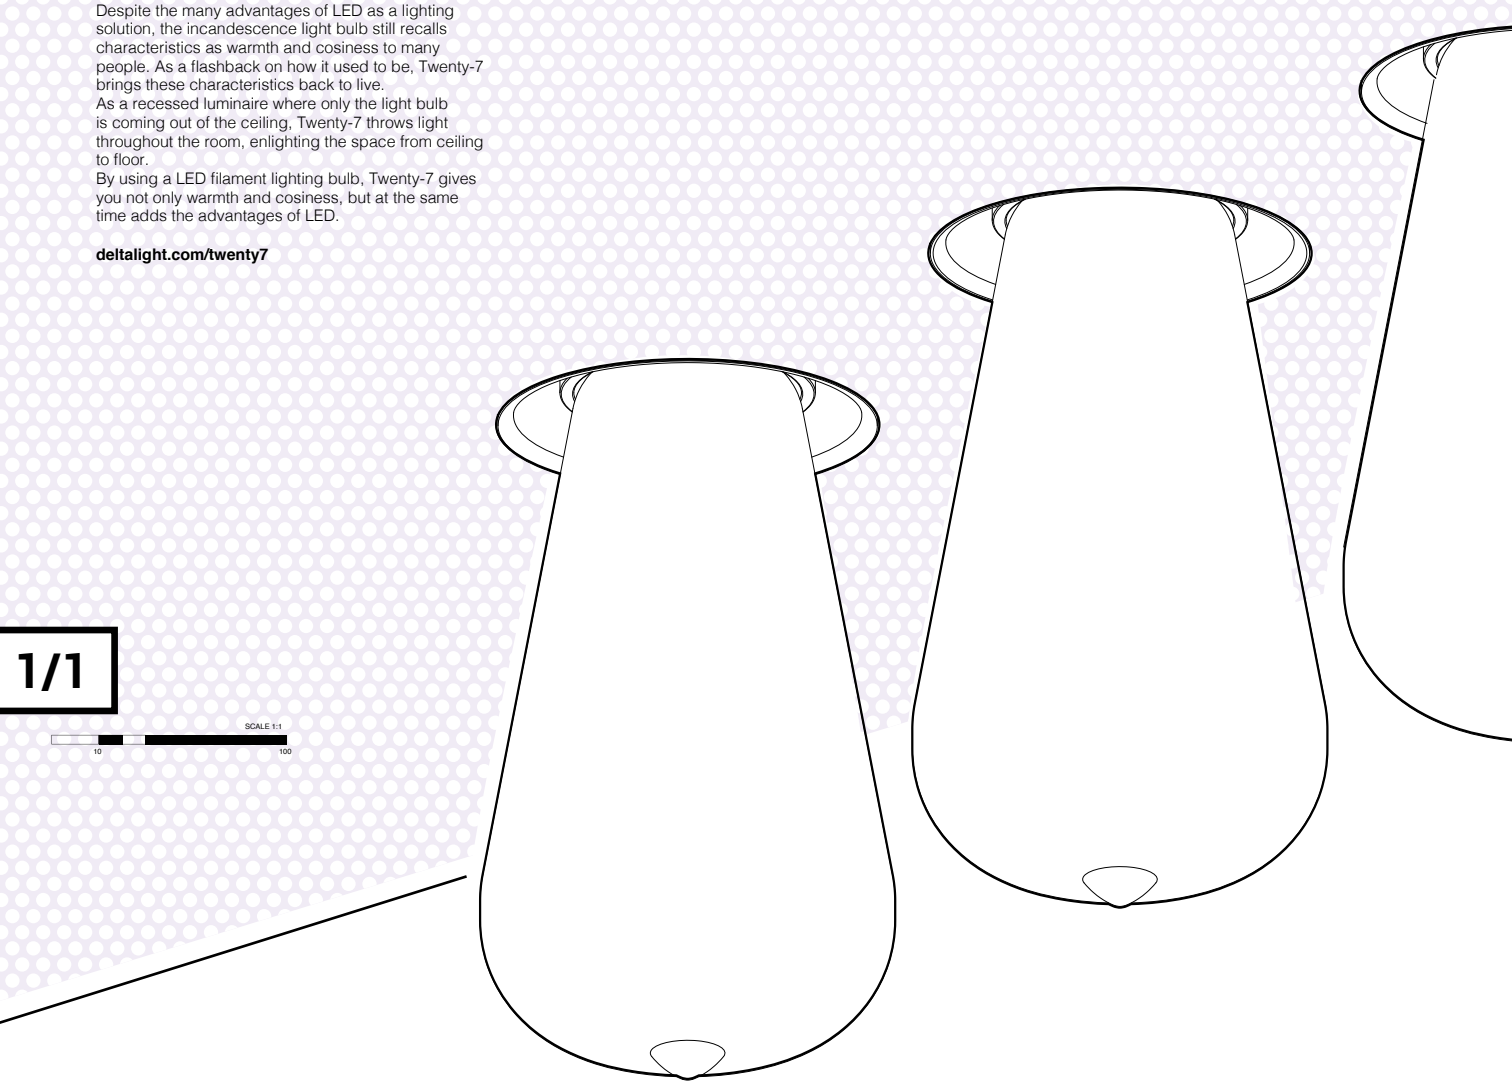

1/1

SCALE 1:1
10 100




ØKIT x 100

A

TWENTY-7			TRIMLESS
1 x A60 max.20W	IP20		**415 35 00**

INCL.1 x SPY TUBE B
E27Ls / 100-240V / 50-60Hz

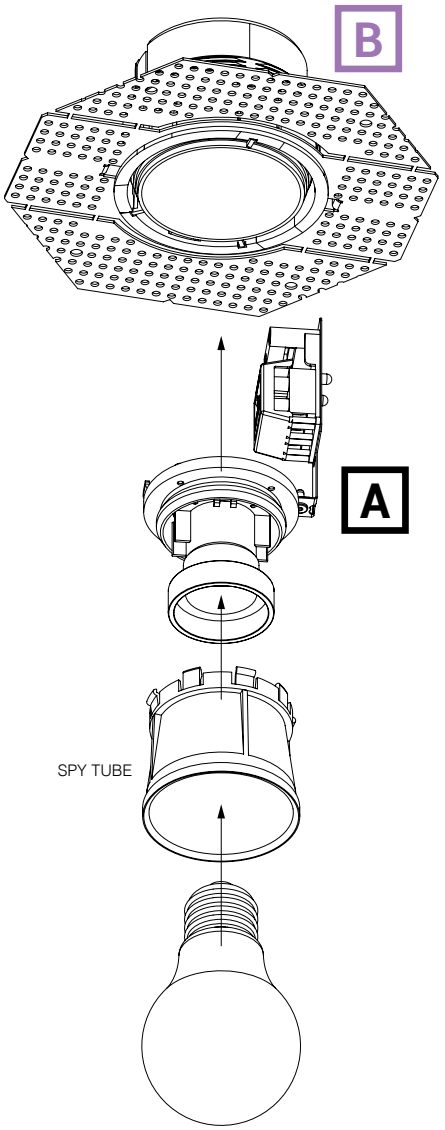


FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY TWENTY-7 TRIMLESS
MOUNTING KIT TRIMLESS			
CONCRETE / PLASTERBOARD	**15212 2050**		R
COLD STRETCHED CEILING	**15212 0060**		R
WARM STRETCHED CEILING	**15212 0140**		R
FINISH			
SPY TUBE	**414 01 00 FBR / FG / MMAT / SG / W**		O
LED LAMP MORE INFO TECHNICAL CHAPTERR			O


DIRO SBL

NOT YOUR REGULAR DOWNLIGHTER.
Diro SBL is a range of recessed and surface mounted luminaires, designed with an eye for visual comfort, as it has a multi layered optic finished with a prismatic plexi at the front.
It has a driver included and its reduced height allows you to install it anywhere, either built in or built on.
With finishes in black and white and IP44 versions available, Diro SBL is also suitable for use in damp locations like bathrooms.


deltalight.com/dirosbl



121 x 65 / max.25





156 x 70 / max.25




208 x 70 / max.25

DIRO SBL			S IP	M	L
3000K CRI>80	LED 5,9W / 1020lm / 350mA	IP44	**11436 8300** ◇		
	LED 9,8W / 1500lm / 350mA	IP43		**202 296 83** ◇	
	LED 17,5W / 3000lm / 1050mA				**202 297 83** ◇
2700K CRI>80	LED 5,9W / 1020lm / 350mA	IP44	**11436 8200** ◇		
	LED 9,8W / 1500lm / 350mA	IP43		**202 296 82** ◇	
	LED 17,5W / 3000lm / 1050mA				**202 297 82** ◇
			◇ B ● / W ○		
			100-240V / 50-60Hz		







DIRO SBL ON			S	L
3000K CRI>80	LED 5,9W / 1020lm / 350mA	IP43	**251 77 83** ◇	
	LED 5,9W / 1020lm / 350mA	IP44	**11435 8300** ◇	
	LED 17,5W / 3000lm / 1050mA	IP43		**251 81 83** ◇
2700K CRI>80	LED 5,9W / 1020lm / 350mA	IP43	**251 77 82** ◇	
	LED 5,9W / 1020lm / 350mA	IP44	**11435 8200** ◇	
	LED 17,5W / 3000lm / 1050mA	IP43		**251 81 82** ◇
			◇ B ● / W ○	
			100-240V / 50-60Hz	

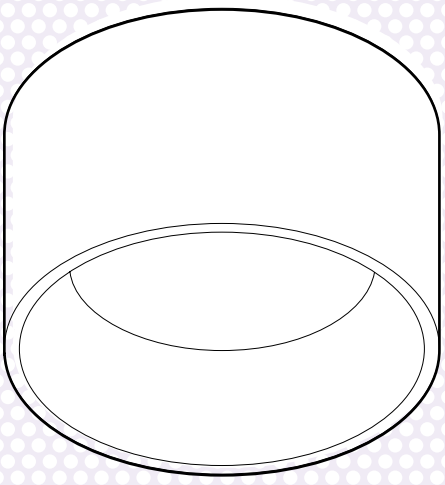

DIRO SBL
S ON

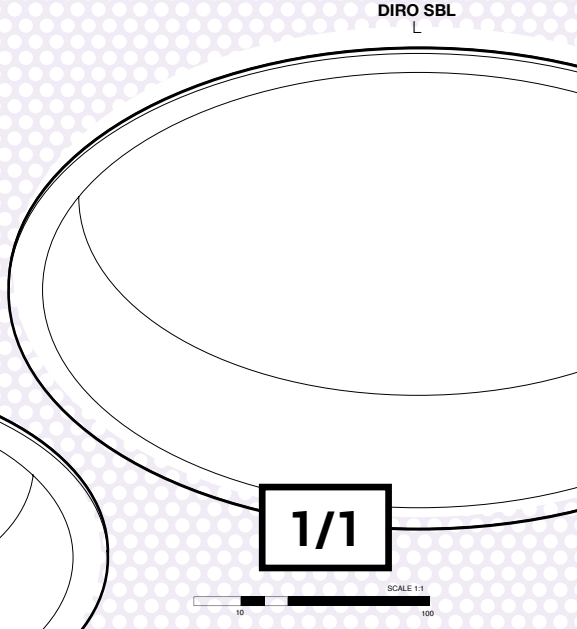

DIRO SBL
L

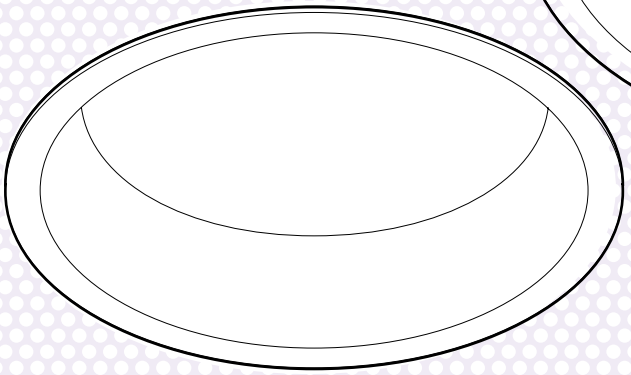

DIRO SBL
M

GRID


FAMILY

The Grid product family is a longstanding classic in the collection. First as halogen and discharge solutions, later as LED downlight and afterwards updated to the Snap-In principle, a smart and easy way of separating the mounting frame from the LED module, with comfortable installation as a result. This grid range is all about flexibility, as the single or double light units can be directed any way you want.


MICROGRID IN
Microgrid In completes the Snap-In range as it uses a similar principle of dividing the light unit into a mounting frame and a light module that can be snapped into the frame after installation. Microgrid comes in single, double and triple set-ups with trim.
A visor is available to further reduce the impact of the intense light coming from the miniature light source, shielding the light source from directly looking into.

SNAP-IN
The Snap-In principle equals modularity and flexibility at its best, it grants the opportunity to the lighting designer to use his creativity: combine single and double units, use multiple beam angles or play with colour. All to use as surface mounted luminaire or as recessed spotlights, both with or without trim.
Dividing a luminaire into multiple modular parts not only creates uniformity within one family, it also facilitates the installation by giving the opportunity to the installer to place the frame in advance. No need to worry for the lighting modules in further finishing of the room, as the modules can be clicked into the frame afterwards.


deltalight.com/grid

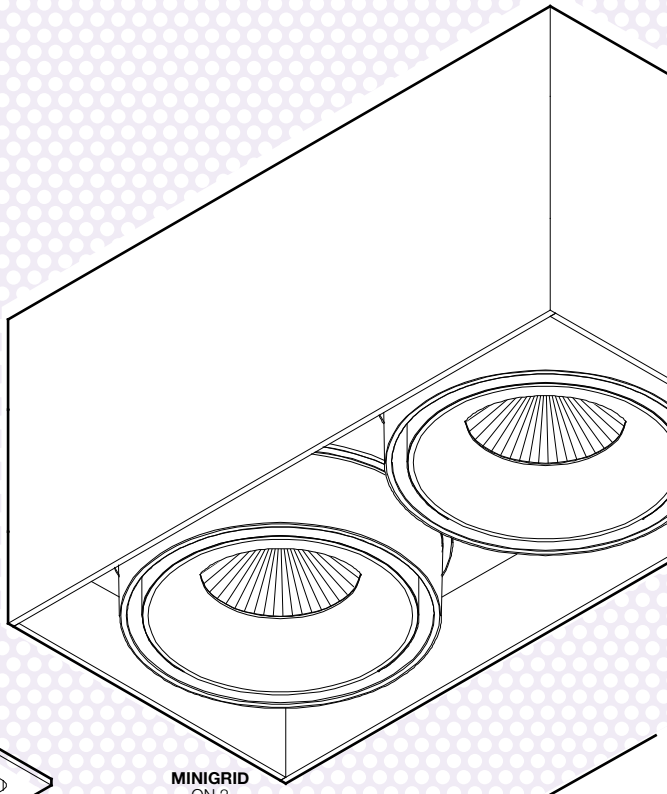

MINIGRID
ON 2

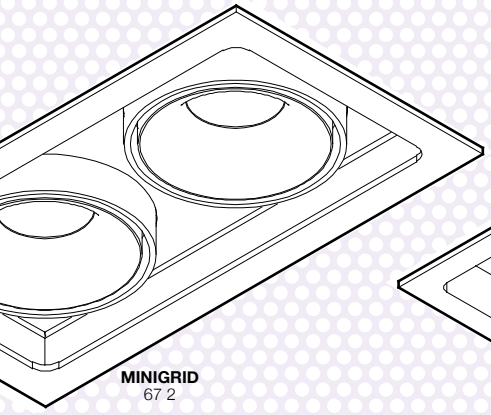


MINIGRID
67 2

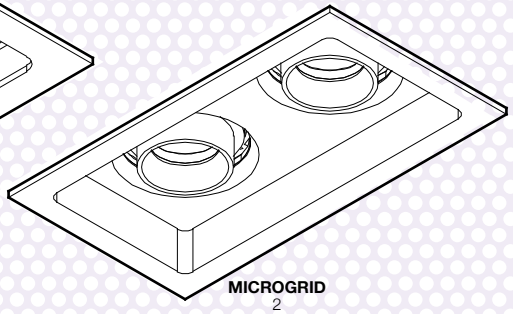

MICROGRID
2



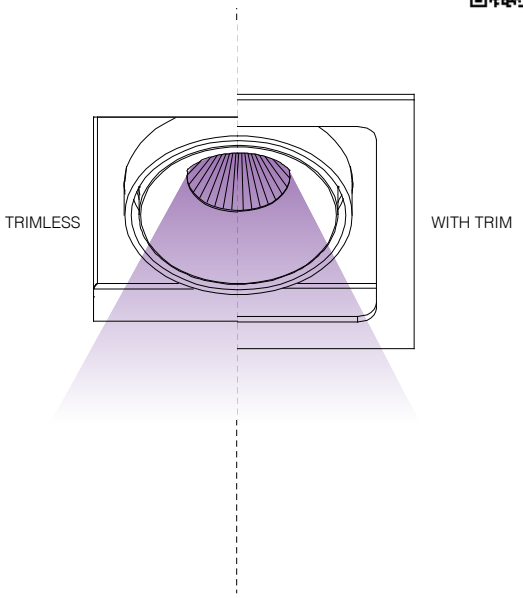






		MICROGRID	MINIGRID 67	MINIGRID		
				CL		HP
LIGHT SOURCE						
LED		3,9W - 385lm	6,1W - 775lm 8W - 976lm 9W - 1076lm	2W - 201lm 4,3W - 351lm	7,1W - 812lm 10,4W - 1128lm	16,3W - 2309lm 23,2W - 3169lm
OPTICS						
6°				•		
15°		•				
18°			•		•	
20°						•
25°			•			
30°		•				
33°					•	
37°			•			•
40°					◦	
50°					•	•
COLOUR TEMPERATURE						
2700K		•	•	•	•	•
3000K		•	•	•	•	•
SOFT DIM 3000-1800K					◦	
CONTROL						
EXCL. POWER SUPPLY		•	•	•	•	•
NON DIM						
MAINS DIM			◦	◦	◦	
1-10V DIM						
DALI DIM						
WIRELESS DIM						
COLOUR						
WHITE ○		•	•	•	•	•
BLACK ●		•	•	•	•	•
INSTALLATION						
INTERIOR	RECESSED	•	•	•	•	•
	RECESSED TRIMLESS		•	•	•	•
	SURFACE MOUNTED		•	•	•	
ACCESSORIES						
VISOR		•				
HONEYCOMB						•
SOFTNENING LENS						•

• STANDARD
◦ NOT FOR ALL VERSIONS

GRID










62 x 59 x 75 min.12-max.25 | 62 x 114 x 75 min.12-max.25 | 62 x 168 x 75 min.12-max.25


MICROGRID IN

				1	2	3
3000K CRI>90	1, 2 or 3x LED [E] 3.9W / 385lm / 350mA	IP20	15°	**100055 9310** ◇	**100057 9310** ◇	**100059 9310** ◇
			30°	**100055 9320** ◇	**100057 9320** ◇	**100059 9320** ◇
2700K CRI>90	1, 2 or 3x LED [E] 3.9W / 385lm / 350mA		15°	**100055 9210** ◇	**100057 9210** ◇	**100059 9210** ◇
			30°	**100055 9220** ◇	**100057 9220** ◇	**100059 9220** ◇
				◇ B-B ●● / B-W ●○ / W-B ○● / W-W ○		
				III		











KIT x 70 | KIT x 70 | 84 x 84 x 70 / max.25 | 155 x 84 x 70 / max.25

MINIGRID 67


				TRIMLESS 1	TRIMLESS 2	1	2
3000K CRI>90	1 or 2x LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP20	18°	**100001 9310** ◇	**100002 9310** ◇	**100003 9310** ◇	**100004 9310** ◇
			25°	**100001 9320** ◇	**100002 9320** ◇	**100003 9320** ◇	**100004 9320** ◇
			37°	**100001 9330** ◇	**100002 9330** ◇	**100003 9330** ◇	**100004 9330** ◇
2700K CRI>90	1 or 2x LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		18°	**100001 9210** ◇	**100002 9210** ◇	**100003 9210** ◇	**100004 9210** ◇
			25°	**100001 9220** ◇	**100002 9220** ◇	**100003 9220** ◇	**100004 9220** ◇
			37°	**100001 9230** ◇	**100002 9230** ◇	**100003 9230** ◇	**100004 9230** ◇
				◇ B-B ●● / W-B ○● / W-W ○○ / B-W ●○		◇ B-B ●● / W-B ○● / W-W ○○	
				III		III	





MINIGRID 67 ON

				1	2
3000K CRI>90	1 or 2x LED 5.8W / 734lm / 350mA LED 7.7W / 925lm / 450mA	MAINS DIM	18°	**100005 9318** ◇	**100006 9318** ◇
			25°	**100005 9328** ◇	**100006 9328** ◇
			37°	**100005 9338** ◇	**100006 9338** ◇
2700K CRI>90	1 or 2x LED 5.8W / 702lm / 350mA LED 7.7W / 885lm / 450mA		18°	**100005 9218** ◇	**100006 9218** ◇
			25°	**100005 9228** ◇	**100006 9228** ◇
			37°	**100005 9238** ◇	**100006 9238** ◇
				◇ B-B ●● / W-B ○● / W-W ○○ / B-W ●○	
				220-240V / 50-60Hz	
				I IP20	

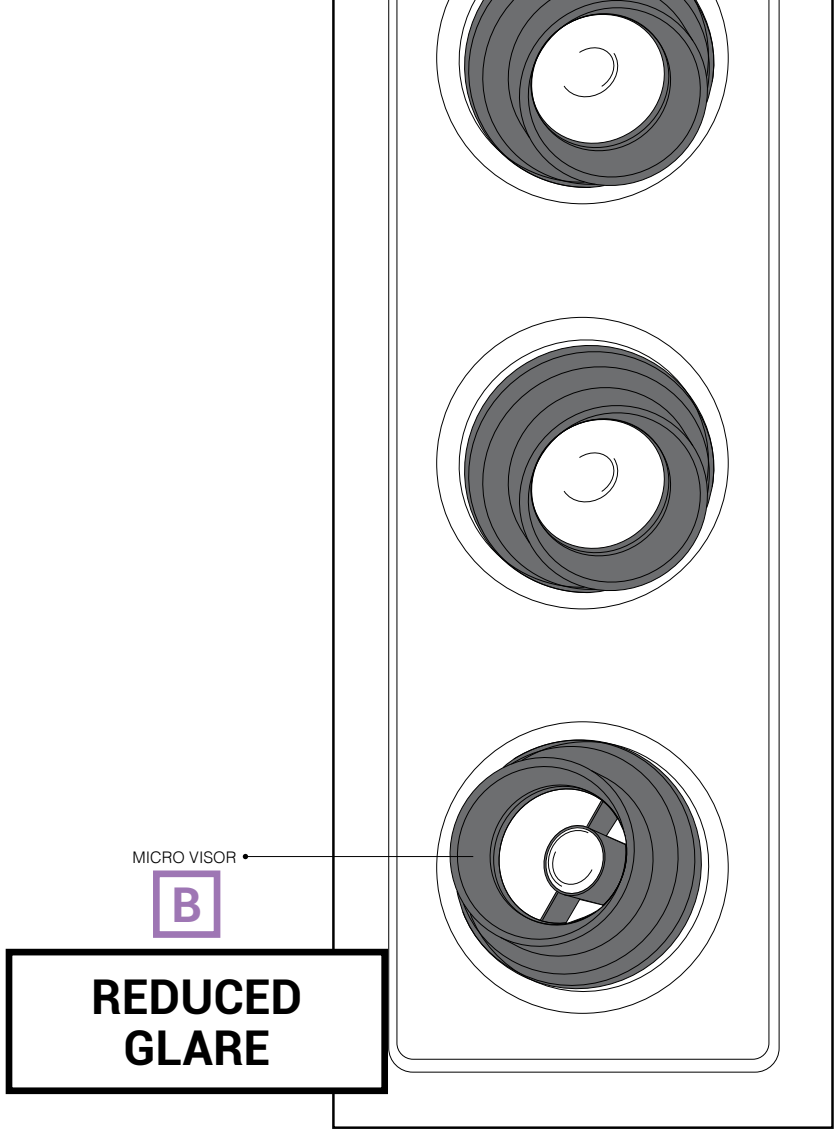

MICROGRID
3


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY								
			MICROGRID			MINIGRID 67					
			IN			TRIMLESS		TRIM		ON	
			1	2	3	1	2	1	2	1	2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT											
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	R	R	R	R	R		
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R *	R	R	R	R		
DALI DIM 14	**300 90 125**	min. 55	R	R	R	R	R	R	R		
MOUNTING KIT TRIMLESS											
CONCRETE	**19310 0110**					R					
	19310 0120						R				
PLASTERBOARD	**19310 0050**					R					
	19310 0060						R				
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT											
MICRO VISOR	**10034 0010 B**		A	A	A						

* MIN. 2 x LED E


B

GRID




0-20° 350°

KIT x 85




0-20° 350°

KIT x 85



0-20° 350°

111 x 111 x 85 / max.22




0-20° 350°


214 x 111 x 85 / max.22

MINIGRID IN


				TRIMLESS 1	TRIMLESS 2	1	2
3000K CRI>90	1 or 2x LED [F] 2W / 229lm / 700mA LED [F] 4.3W / 400lm / 1400mA	IP23	6°	**100013 9310** ◇	**100017 9310** ◇	**100025 9310** ◇	**100036 9310** ◇
	1 or 2x LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA		18°	**100009 9310** ◇	**100016 9310** ◇	**100024 9310** ◇	**100035 9310** ◇
			33°	**100009 9320** ◇	**100016 9320** ◇	**100024 9320** ◇	**100035 9320** ◇
			50°	**100009 9330** ◇	**100016 9330** ◇	**100024 9330** ◇	**100035 9330** ◇
2700K CRI>90	1 or 2x LED [F] 2W / 201lm / 700mA LED [F] 4.3W / 351lm / 1400mA		6°	**100013 9210** ◇	**100017 9210** ◇	**100025 9210** ◇	**100036 9210** ◇
	1 or 2x LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA		18°	**100009 9210** ◇	**100016 9210** ◇	**100024 9210** ◇	**100035 9210** ◇
			33°	**100009 9220** ◇	**100016 9220** ◇	**100024 9220** ◇	**100035 9220** ◇
			50°	**100009 9230** ◇	**100016 9230** ◇	**100024 9230** ◇	**100035 9230** ◇
SOFT DIM	1 or 2x 3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		45°	**100081 9030** ◇	**100082 9030** ◇	**100083 9030** ◇	**100084 9030** ◇
	1 or 2x QPAR51 max.10W	IP20		**100008 0000** ◇	**100015 0000** ◇	**100023 0000** ◇	**100034 0000** ◇
				◇ B-B ●● / B-W ●○ / W-B ○● / W-W ○○		◇ B-B ●● / W-B ○● / W-W ○○	
				LED 220-240V / 50-60Hz QPAR51 GU10 / 100-240V / 50-60Hz			



0-20° 350°




0-20° 350°




0-20° 350°

MINIGRID ON


				1	2	3
3000K CRI>90	1, 2 or 3x LED 7.1W / 812lm / 350mA LED 10.4W / 1128lm / 500mA	MAINS DIM	18°	**100044 9318** ◇	**100045 9318** ◇	**100046 9318** ◇
			33°	**100044 9328** ◇	**100045 9328** ◇	**100046 9328** ◇
			50°	**100044 9338** ◇	**100045 9338** ◇	**100046 9338** ◇
2700K CRI>90	1, 2 or 3x LED 7.1W / 779lm / 350mA LED 10.4W / 1083lm / 500mA		18°	**100044 9218** ◇	**100045 9218** ◇	**100046 9218** ◇
			33°	**100044 9228** ◇	**100045 9228** ◇	**100046 9228** ◇
			50°	**100044 9238** ◇	**100045 9238** ◇	**100046 9238** ◇
SOFT DIM	1, 2 or 3x 3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA		45°	**100087 9038** ◇	**100088 9038** ◇	**100089 9038** ◇
				◇ B-B ●● / B-W ●○ / W-B ○● / W-W ○○		
				220-240V / 50-60Hz		
				IP20		




0-25° 350°



0-25° 350°



0-25° 350°



0-25° 350°

KIT x 160

KIT x 160

111 x 111 x 160 / max.25


214 x 111 x 160 / max.25

MINIGRID IN HP

				TRIMLESS 1	TRIMLESS 2	1	2
3000K CRI>90	1 or 2x LED [J] 16.3W / 2309lm / 500mA LED [J] 23.2W / 3169lm / 700mA	IP23	20°	**100049 9310** ◇	**100050 9310** ◇	**100047 9310** ◇	**100048 9310** ◇
			37°	**100049 9320** ◇	**100050 9320** ◇	**100047 9320** ◇	**100048 9320** ◇
			50°	**100049 9330** ◇	**100050 9330** ◇	**100047 9330** ◇	**100048 9330** ◇
2700K CRI>90	1 or 2x LED [J] 16.3W / 2209lm / 500mA LED [J] 23.2W / 3031lm / 700mA		20°	**100049 9210** ◇	**100050 9210** ◇	**100047 9210** ◇	**100048 9210** ◇
			37°	**100049 9220** ◇	**100050 9220** ◇	**100047 9220** ◇	**100048 9220** ◇
			50°	**100049 9230** ◇	**100050 9230** ◇	**100047 9230** ◇	**100048 9230** ◇
				◇ B-B ●● / B-W ●○ / W-B ○● / W-W ○○		◇ W-B ○● / W-W ○○	

C

FIND ME ONLINE

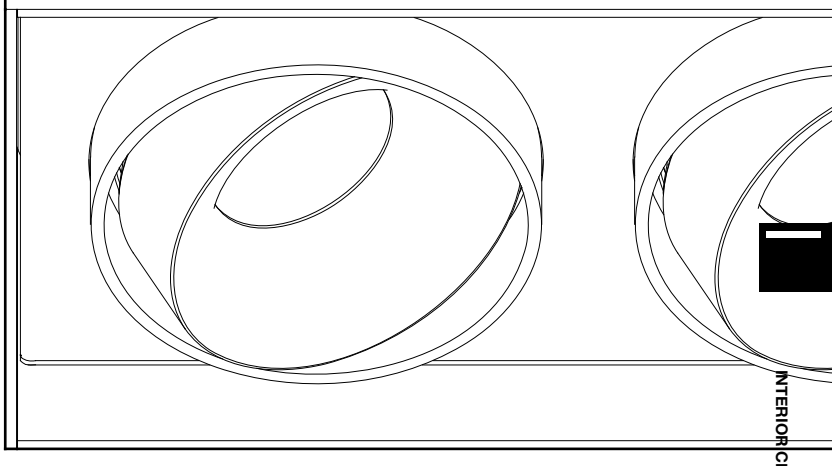

MINIGRID
ON 2

INTERIOR CEILING


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY										
			MINIGRID										
			IN				ON			IN HP			
			TRIMLESS							TRIMLESS			
			1	2	1	2	1	2	3	1	2	1	2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT													
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	R	R							
MAINS DIM (FE) 10	**21012 0288**	min. 55								R	R	R	R
1-10V DIM 16	**300 90 63**	min. 84	R *	R *	R *	R *				R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R	R	R	R							
DALI DIM 16	**300 90 63**	min. 84	R *	R *	R *	R *				R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R	R	R	R							
MOUNTING KIT TRIMLESS													
CONCRETE	**202 71 95 01L**		R										
	202 71 95 02L			R									
POURED CONCRETE	**202 71 96 01**		R										
	202 71 96 02			R									
PLASTERBOARD	**202 71 95 01**		R										
	202 71 95 02			R									
	202 71 95 01 HP									R			
	202 71 95 02 HP										R		
INSTALLATION													
PLASTERKIT	**202 72 99 01**				O							O	
	202 72 99 02					O							O
HONEYCOMB / GLASS / LENS													
HONEYCOMB SINGLE USE	**201 05 01 B**									A	A	A	A
SOFTENING LENS	**201 05 04**									A	A	A	A


* ONLY FOR 6° VERSION

B

Two different diameters, a down and down-up version and a limited height of only 69mm.

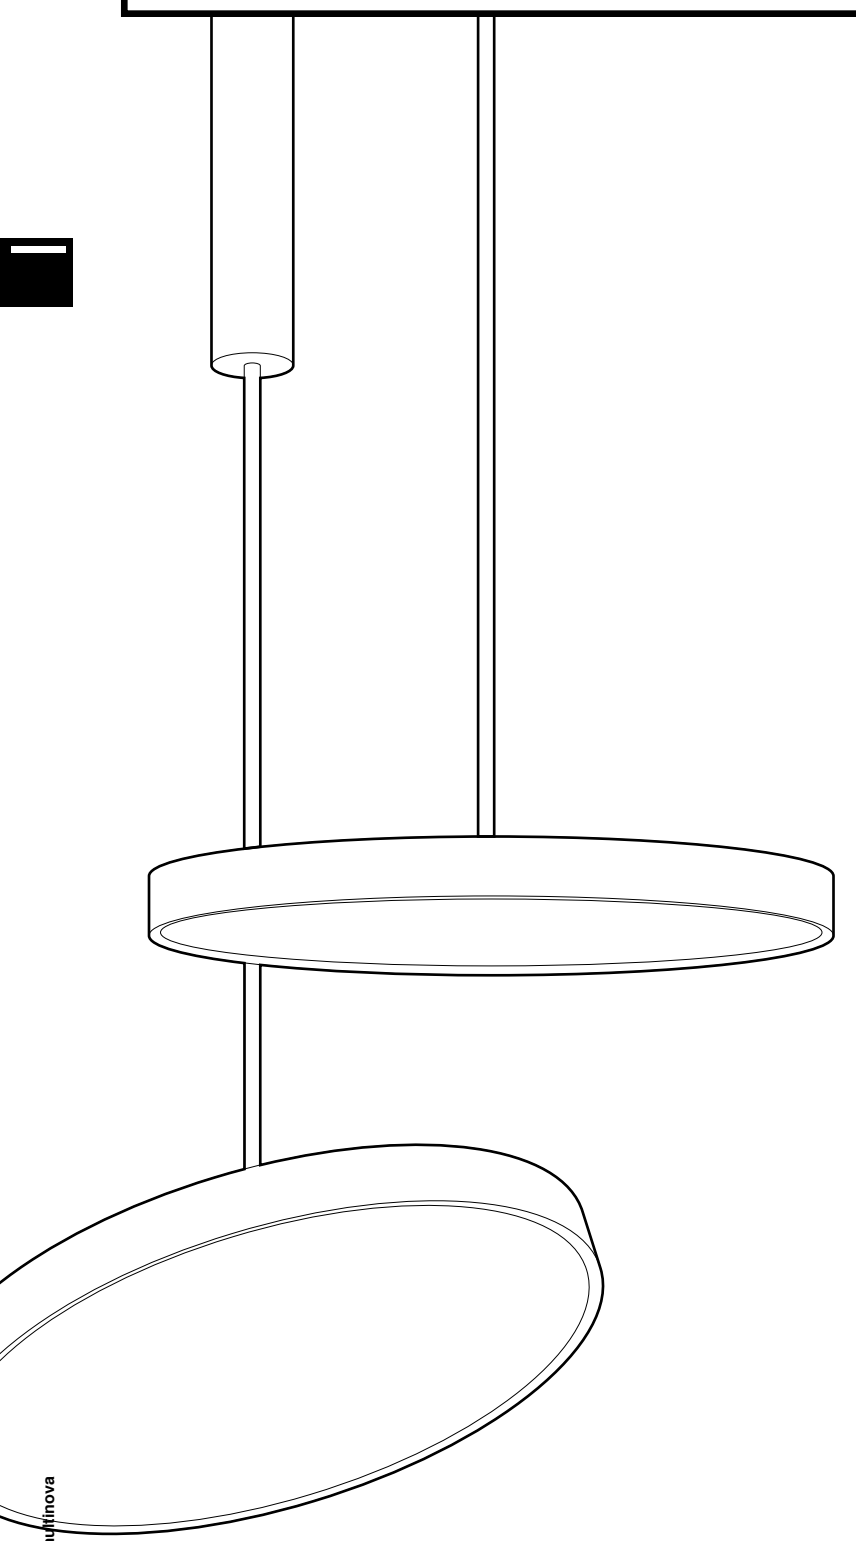

deltalight.com/multinova

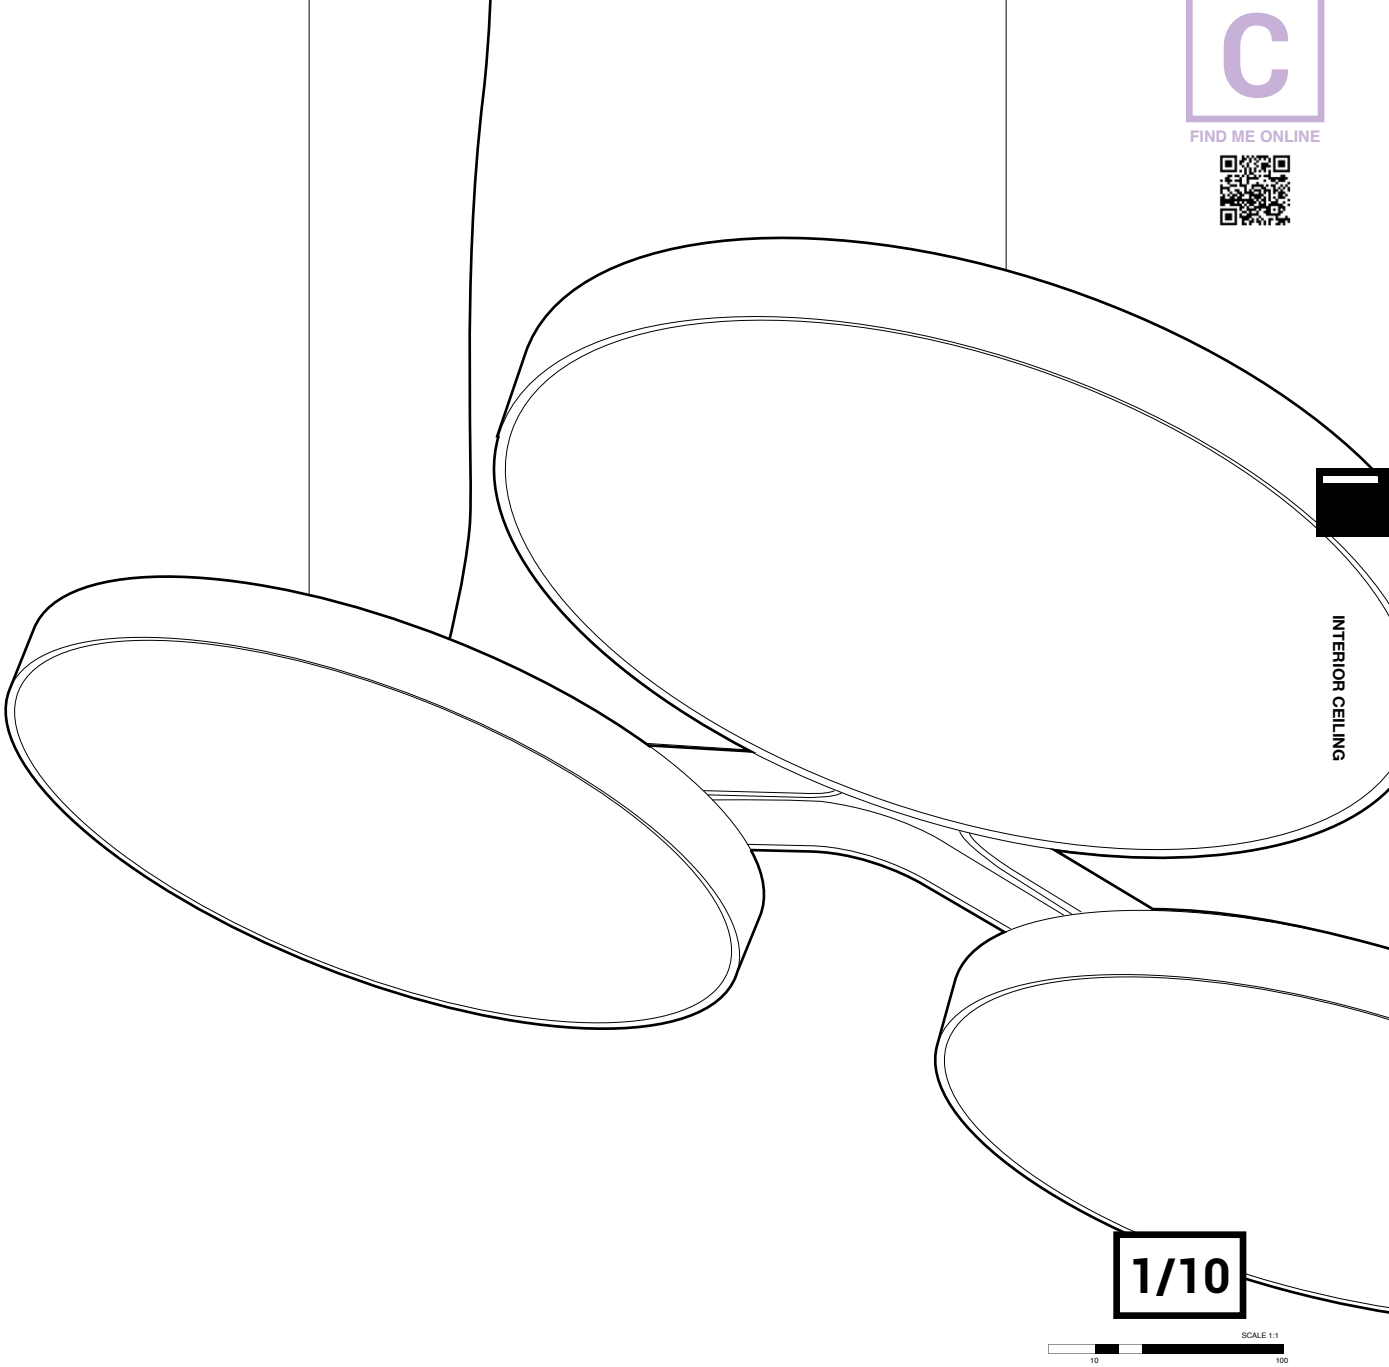

MULTINOVA

MULTINOVA


Multinova has something familiar and something fresh at the same time. As a disc of light, Nova refers to the Supernova range, as both families share similarities in looks and ways of installation. But Multinova has some additional features to make it multi-applicable, hence Multi in the name.

With 2 different diameters, a down and down-up version and a limited height of only 69mm, Multinova is perfect to use in different ways. Its small dimensions fit in any residential or hospitality project, as a track mounted luminaire it suits any retail environment and with a prismatic sheet for reduced glare it even adapts in office settings.
Moreover, Multinova can be used on our Magnetic profiles for general lighting.


Multinova comes in our standard black or white and can also be finished in the warmer Gold Coloured to enrich its surroundings. To top it off – next to a sandblasted or prismatic optic – one can opt for a smoked sheet at the front for a more decorative touch. When turned on the disc is fully lit, when turned off a deep dark arises, ideal in combination with a Gold Coloured Multinova.


deltalight.com/multinova


FAMILY

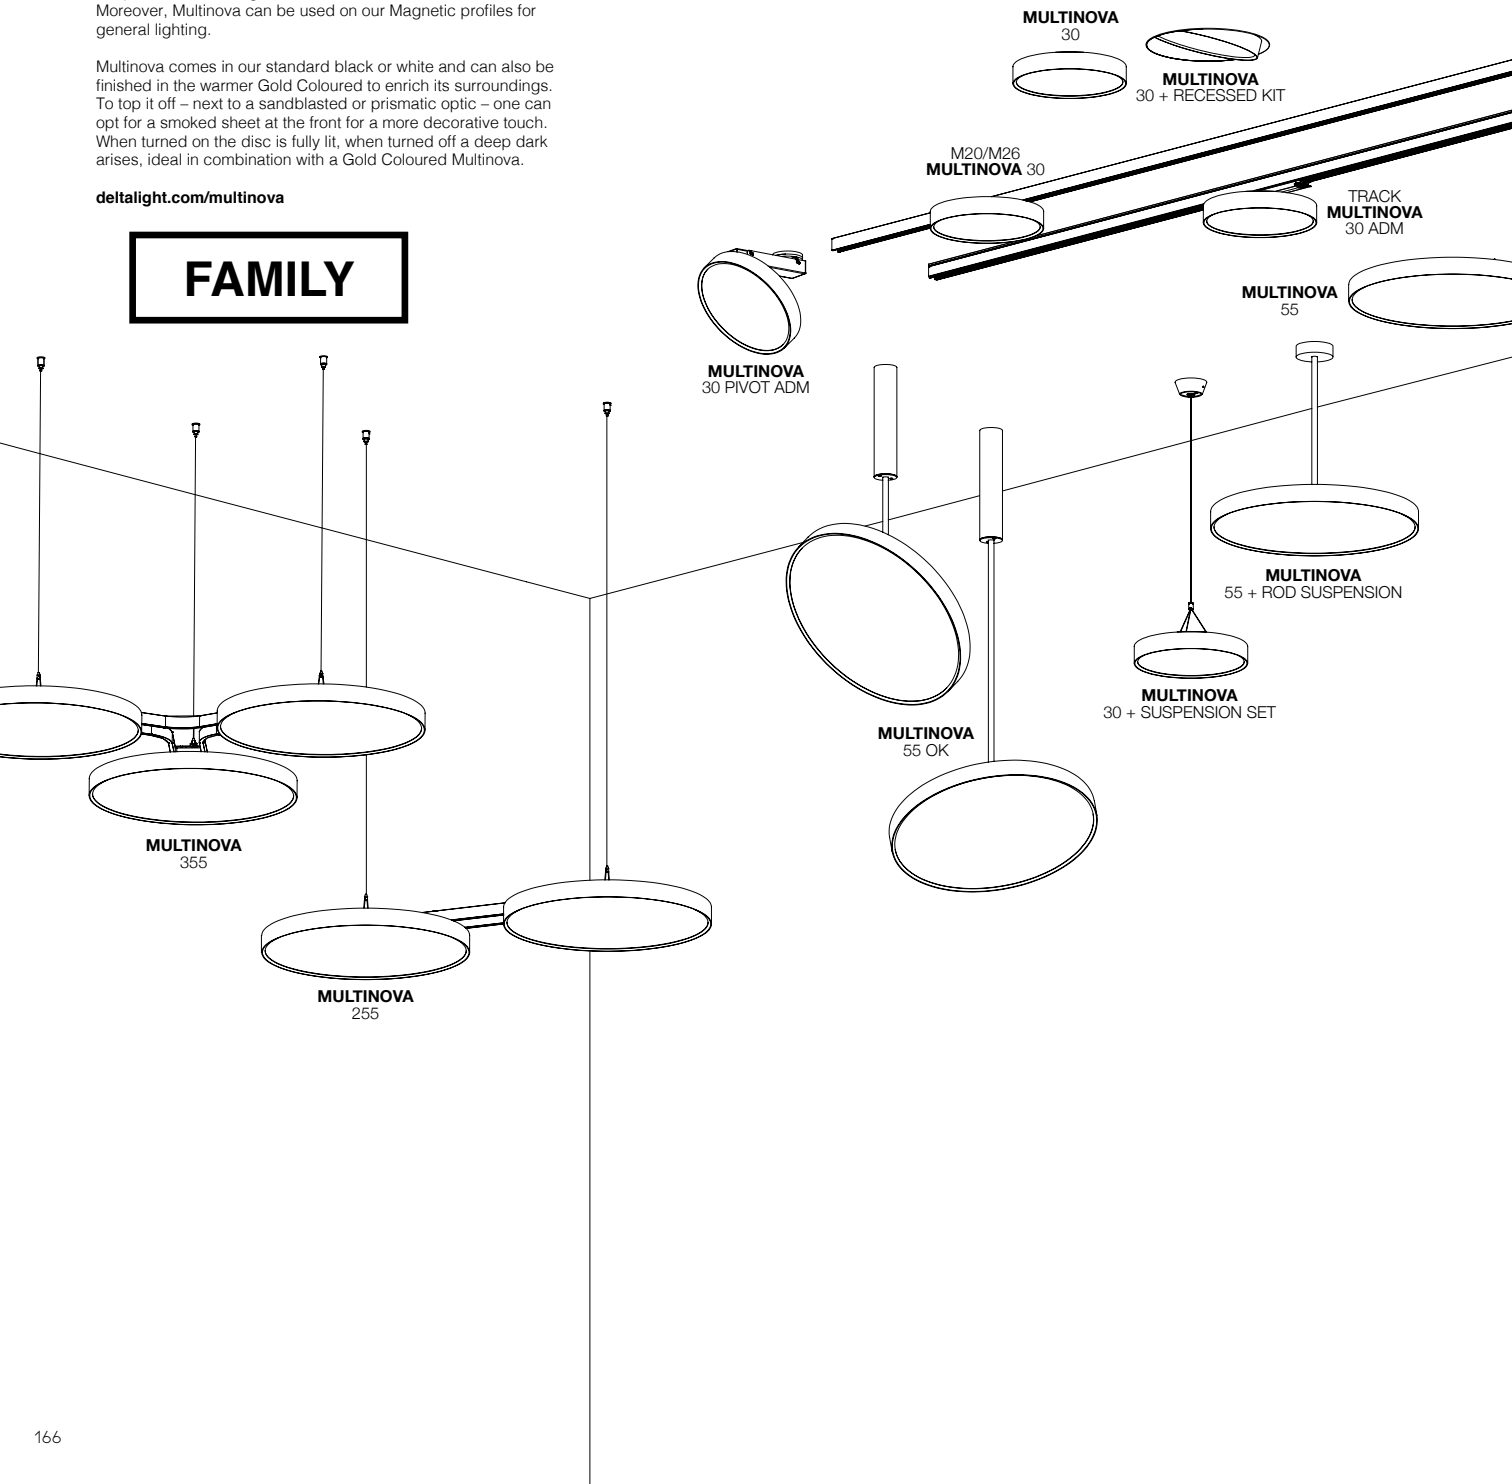

SMOKE
When turned on the disc is fully lit, when turned off a deep dark arises.

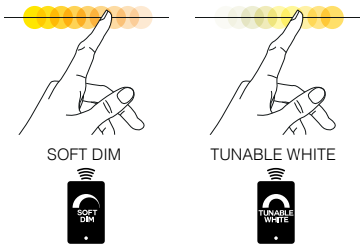

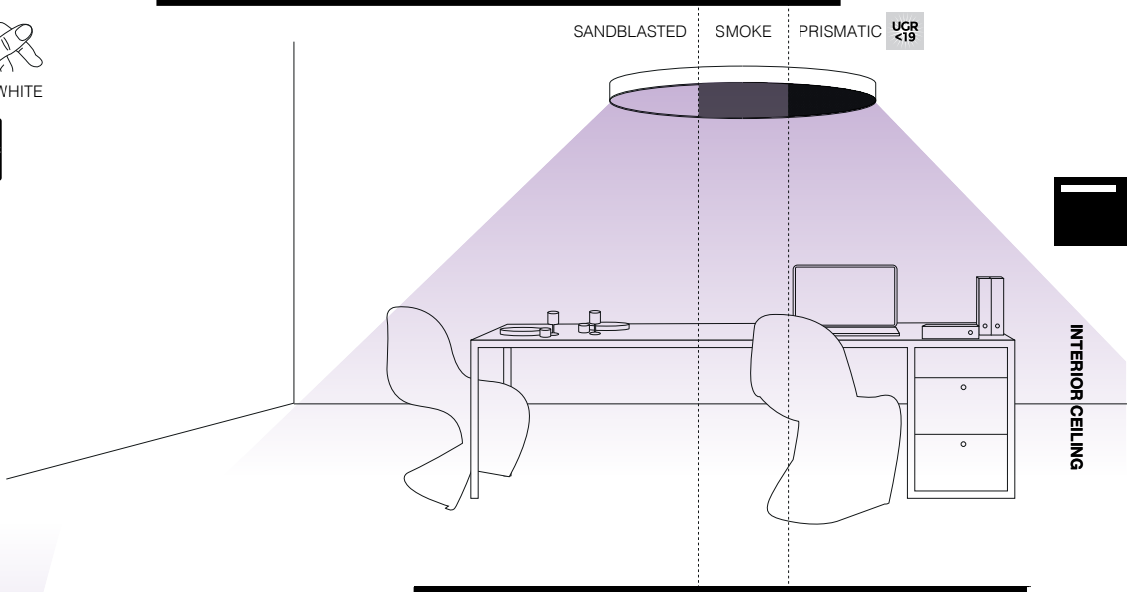


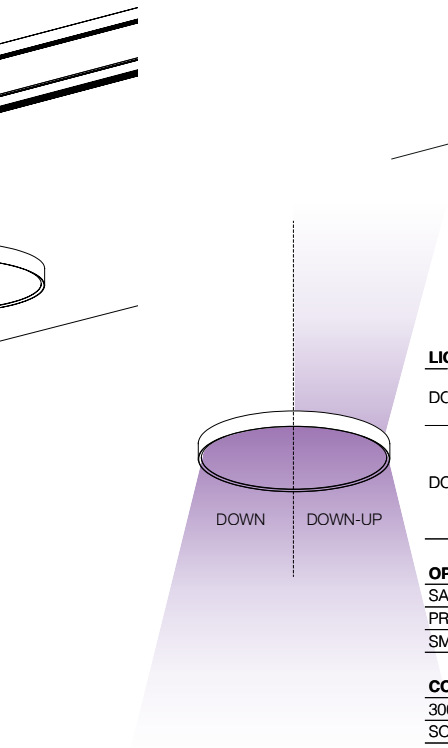


		MULTINOVA			
		30	55	255	355
LIGHT EFFECT					
DOWN		9,4W - 1367lm 14,8W - 2148lm	33,2W - 4824lm	2 x 33,2W - 4824lm	3 x 33,2W - 4824lm
DOWN-UP		DOWN 9,4W - 1367lm 14,8W - 2148lm UP 2,8W - 406lm 4,3W - 631lm	DOWN 33,2W - 4824lm UP 5W - 721lm		
OPTICS					
SANDBLASTED SBL		•	•	•	•
PRISMATIC PR - UGR<19		•	•	•	•
SMOKE		•	•	•	•
COLOUR TEMPERATURE					
3000K		•	•	•	•
SOFT DIM 3000-1800K		•	•	•	•
TUNABLE WHITE 2700-5700K		•	•	•	•
CONTROL					
EXCL. POWER SUPPLY					
NON DIM		•	•		
MAINS DIM					
1-10V DIM					
DALI DIM		•	•	•	•
WIRELESS DIM					
COLOUR					
WHITE ○		•	•	•	•
BLACK ●		•	•	•	•
GOLD COLOURED ●		•	•	•	•
INSTALLATION					
INTERIOR	RECESSED TRIMLESS	•	•		
	RECESSED TILTABLE	•	•		
	SURFACE MOUNTED	•	•		
	SUSPENDED TILTABLE		•		
	SUSPENDED CABLE	•	•	•	•
	SUSPENDED ROD	•	•		
	TRACK	•	•		
	PROFILES	•			

• STANDARD
• NOT FOR ALL VERSIONS

MULTINOVA







MULTINOVA

			30			55		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
				UGR <19			UGR <19	
3000K CRI>90	LED 9,8W / 1358lm (HO) 14,9W / 2174lm	NON DIM	**27911 9300** ◇	**27912 9300** ◇	**27913 9300** ◇			
		DALI DSI	**27911 9304** ◇	**27912 9304** ◇	**27913 9304** ◇			
	LED 34,4W / 4767lm	NON DIM				**28011 9300** ◇	**28012 9300** ◇	**28013 9300** ◇
		DALI DSI				**28011 9304** ◇	**28012 9304** ◇	**28013 9304** ◇
SOFT DIM	LED 3000-1800K / CRI>90 (HO) 14,5W / 2188lm	DALI	**27916 9005** ◇					
	LED 3000-1800K / CRI>90 32,3W / 4567lm					**28016 9005** ◇		
TUNABLE WHITE	LED 9,4W / CRI>90 6500K /1428lm - 2700K / 1338lm	DALI DT8	**27914 9005** ◇	**27915 9005** ◇				
	LED 31,1W / CRI>90 6500K /4746lm - 2700K / 4430lm					**28014 9005** ◇	**28015 9005** ◇	
			◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○

220-240V / 0 | 50-60Hz

IP20







MULTINOVA DOWN-UP


			30			55		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
				UGR <19			UGR <19	
3000K CRI>90	LED UP 2,8W / 385lm LED UP (HO) 4,5W / 598lm LED DOWN 9,2W / 1284lm LED DOWN (HO) 15W / 1994lm	NON DIM	**27917 9300** ◇	**27918 9300** ◇	**27919 9300** ◇			
		DALI DSI	**27917 9304** ◇	**27918 9304** ◇	**27919 9304** ◇			
	LED UP 5,1W / 706lm LED DOWN 34,4W / 4767lm	NON DIM				**28017 9300** ◇	**28018 9300** ◇	**28019 9300** ◇
		DALI DSI				**28017 9304** ◇	**28018 9304** ◇	**28019 9304** ◇
TUNABLE WHITE	LED UP 2,7W / CRI>90 6500K /406lm - 2700K / 379lm LED DOWN 8,9W / CRI>90 6500K /1352lm - 2700K / 1262lm	DALI DT8	**27920 9005** ◇	**27921 9005** ◇				
	LED UP 4,3W / CRI>90 6500K /661lm - 2700K / 621lm LED DOWN 29,2W / CRI>90 6500K /4465lm - 2700K / 4191lm					**28020 9005** ◇	**28021 9005** ◇	
			◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○

220-240V / 0 | 50-60Hz

IP20

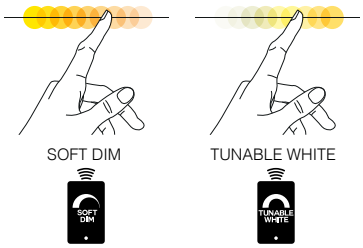

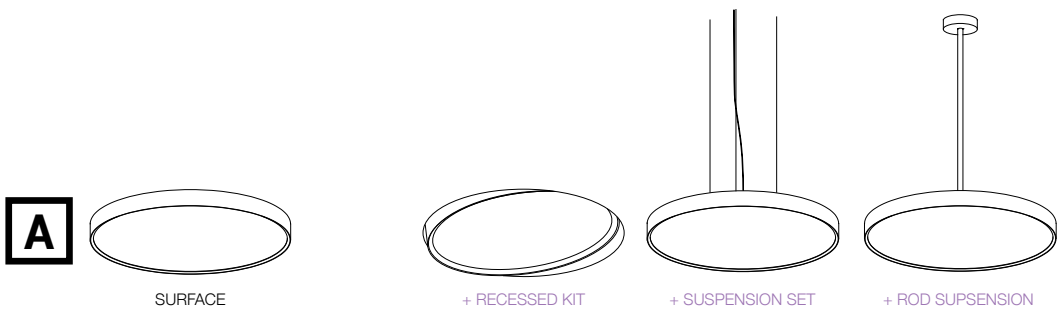


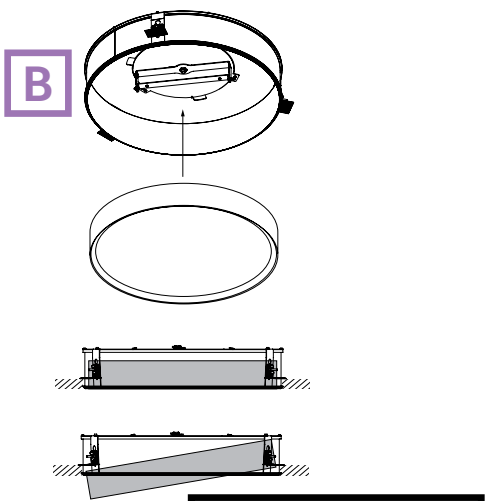

FINISH YOUR SPECIFICATION


		REQUIREMENT / OPTION / ACCESSORY			
		MULTINOVA			
		30	55	30 DOWN-UP	55 DOWN-UP
INSTALLATION RECESSED					
MULTINOVA 30 RECESSED KIT	**27910 0050**	R			
MULTINOVA 55 RECESSED KIT	**28010 0050**		R		
INSTALLATION SUSPENDED					
SUSPENSION SET 3m	**27910 0020**	R		R	
	27910 0010		R		R
or ROD SUSPENSION 0,4m	**27910 0030 B / W**		R		R
or ROD SUSPENSION 0,8m	**27910 0040 B / W**		R		R
CONNECTION ST	**15225 0360 B / W**	O	O	O	O
SUSPENSION ST	**15225 0340 B / W**	O	O	O	O
CABLE BASE R	**203 99 55 ANO / B / W**	O	O	O	O
COVERSET R Ø100	**204 00 100 B / W**	O	O	O	O


MULTINOVA



MULTINOVA OK


			55					
			SBL		PRISMATIC		SMOKE	
			L= 400mm	L= 800mm	L= 400mm	L= 800mm	L= 400mm	L= 800mm
					UGR <19			
3000K CRI>90	LED 34,4W / 4767lm	NON DIM	**28022 9300** ◇	**28025 9300** ◇	**28023 9300** ◇	**28026 9300** ◇	**28024 9300** ◇	**28027 9300** ◇
		DALI DSI	**28022 9304** ◇	**28025 9304** ◇	**28023 9304** ◇	**28026 9304** ◇	**28024 9304** ◇	**28027 9304** ◇
			◇ B ● / GC ● / W ○		◇ B ● / W ○		◇ B ● / GC ● / W ○	
			220-240V / 0 | 50-60Hz					
			IP20					






MULTINOVA PIVOT


			30			55 PIVOT		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
				UGR <19			UGR <19	
3000K CRI>90	LED 9,8W / 1358lm (HO) 14,9W / 2174lm	NON DIM	**27928 9300** ◇	**27929 9300** ◇	**27930 9300** ◇			
		DALI DSI	**27928 9304** ◇	**27929 9304** ◇	**27930 9304** ◇			
	LED 34,4W / 4767lm	NON DIM				**28028 9300** ◇	**28029 9300** ◇	**28030 9300** ◇
		DALI DSI				**28028 9304** ◇	**28029 9304** ◇	**28030 9304** ◇
			◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○
			220-240V / 50-60Hz			220-240V / 0 | 50-60Hz		
			IP20					

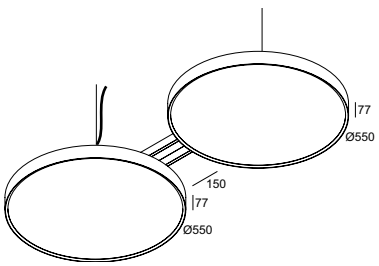


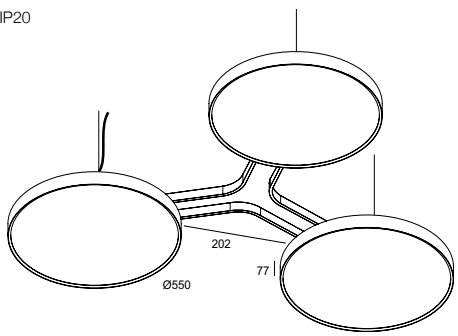

MULTINOVA


			255			355		
			SBL	PRISMATIC	SMOKE	SBL	PRISMATIC	SMOKE
				UGR <19			UGR <19	
3000K CRI>90	2X LED 34,4W / 4767lm	DALI DSI	**28056 9304** ◇	**28057 9304** ◇	**28058 9304** ◇			
	3X LED 34,4W / 4767lm					**28062 9304** ◇	**28063 9304** ◇	**28064 9304** ◇
SOFT DIM	3000-1800K / CRI>90 2X LED 32,3W / 4567lm	DALI	**28061 9005** ◇					
	3000-1800K / CRI>90 3X LED 32,3W / 4567lm					**28067 9005** ◇		
TUNABLE WHITE	2x LED 31,1W / CRI>90 6500K /4746lm - 2700K / 4430lm	DALI DT8	**28059 9005** ◇	**28060 9005** ◇				
	3x LED 31,1W / CRI>90 6500K /4746lm - 2700K / 4430lm					**28065 9005** ◇	**28066 9005** ◇	
			◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / GC ● / W ○
			INCL.1 x CABLE 5 x 0,75mm² INCL.2 x CABLE SUSP. SINGLE AUTO. 3m			INCL.1 x CABLE 5 x 0,75mm² INCL.3 x CABLE SUSP. SINGLE AUTO. 3m		
			220-240V / 50-60Hz					
			IP20					

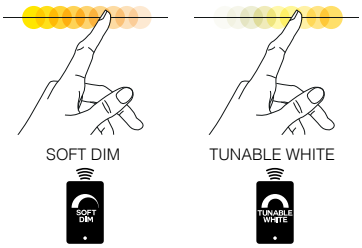

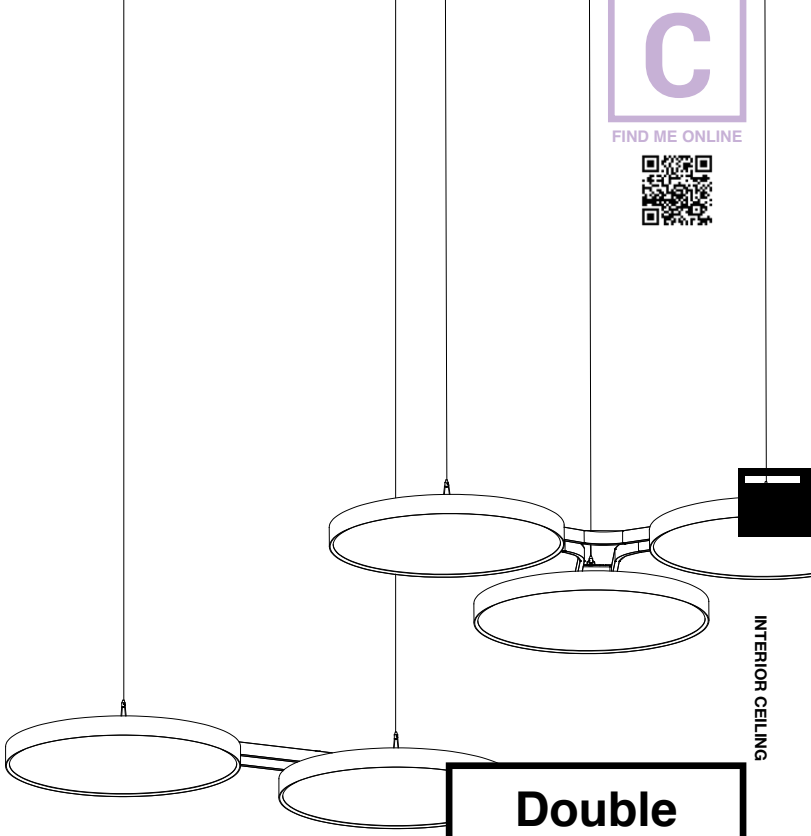

Double or Triple?

Go for the ultimate statement by opting for these clustered Multinova suspensions, coupled together in pairs or as a trio of enlightened discs. Use them in bigger spaces like lobbies, above reception desks or in open plan offices and combine beauty with functionality in one.

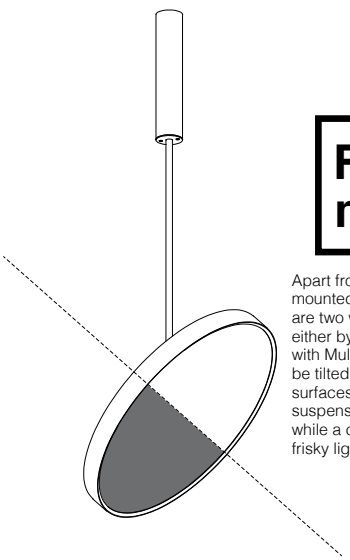


Flip me, I'm made for it!

Apart from the recessed, surface mounted and track version, there are two ways to suspend Multinova, either by cable or rod. Moreover, with Multinova 55 OK, Multinova can be tilted up to 90° to face vertical surfaces as well. As such, one single suspension can dress up any room while a cluster of these serve to create frisky light settings.

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY				
		MULTINOVA				
		55 OK	30 PIVOT	55 PIVOT	255	355
INSTALLATION SUSPENDED						
CONNECTION ST	**15225 0360 B / W**				O	O
SUSPENSION ST	**15225 0340 B / W**				O	O
CABLE BASE R	**203 99 55 ANO / B / W**				O	O
COVERSET R Ø100	**204 00 100 B / W**	O			O	O

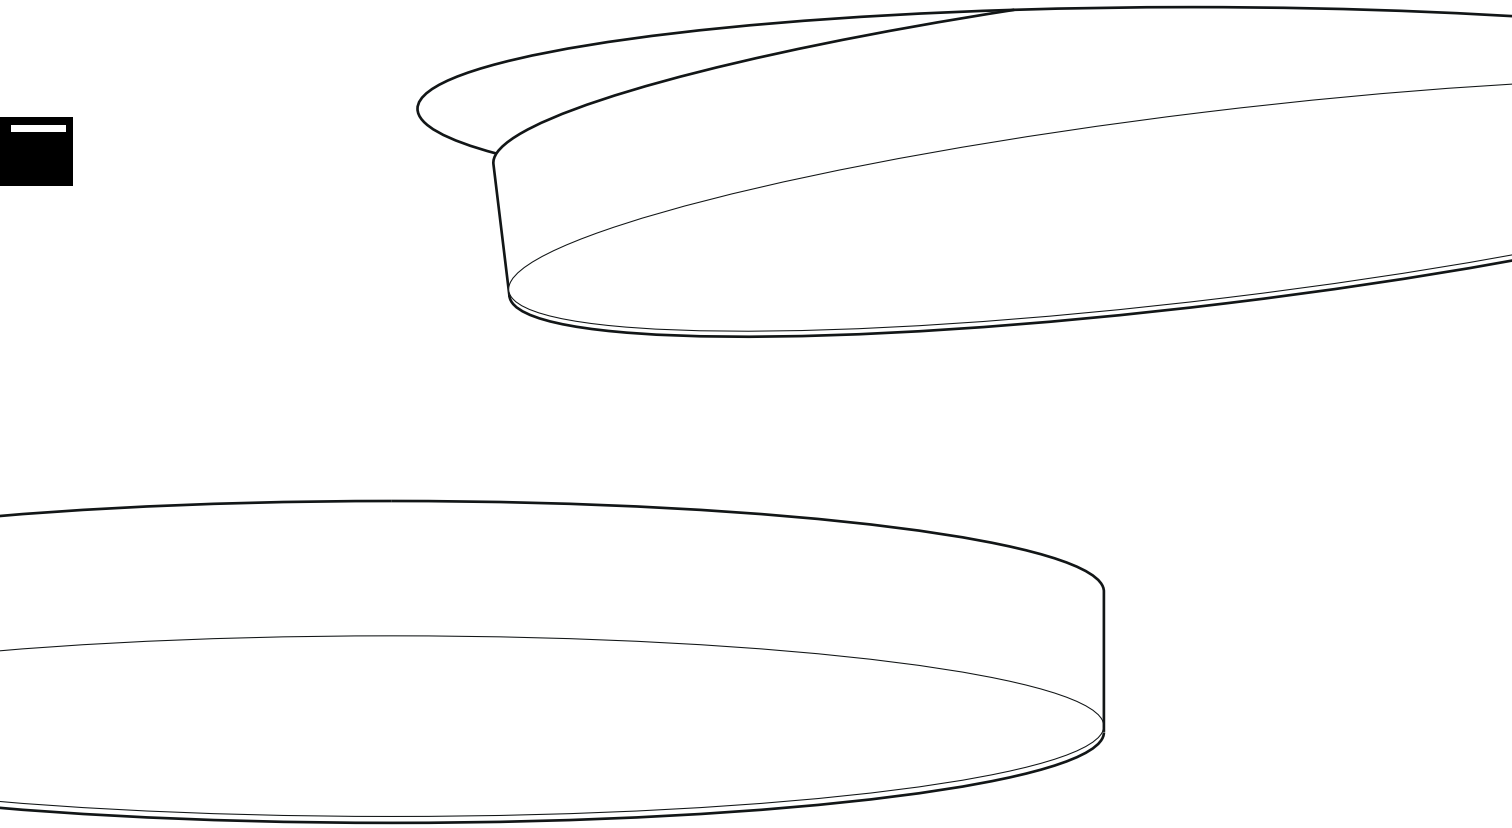

1/10


SCALE 1:1

10 100

A GLIMPSE OF ME
ON PAGE 30

FIND ME ONLINE

Small to large, recessed to suspended, for general lighting to office applications, the Supernova range features all you need.

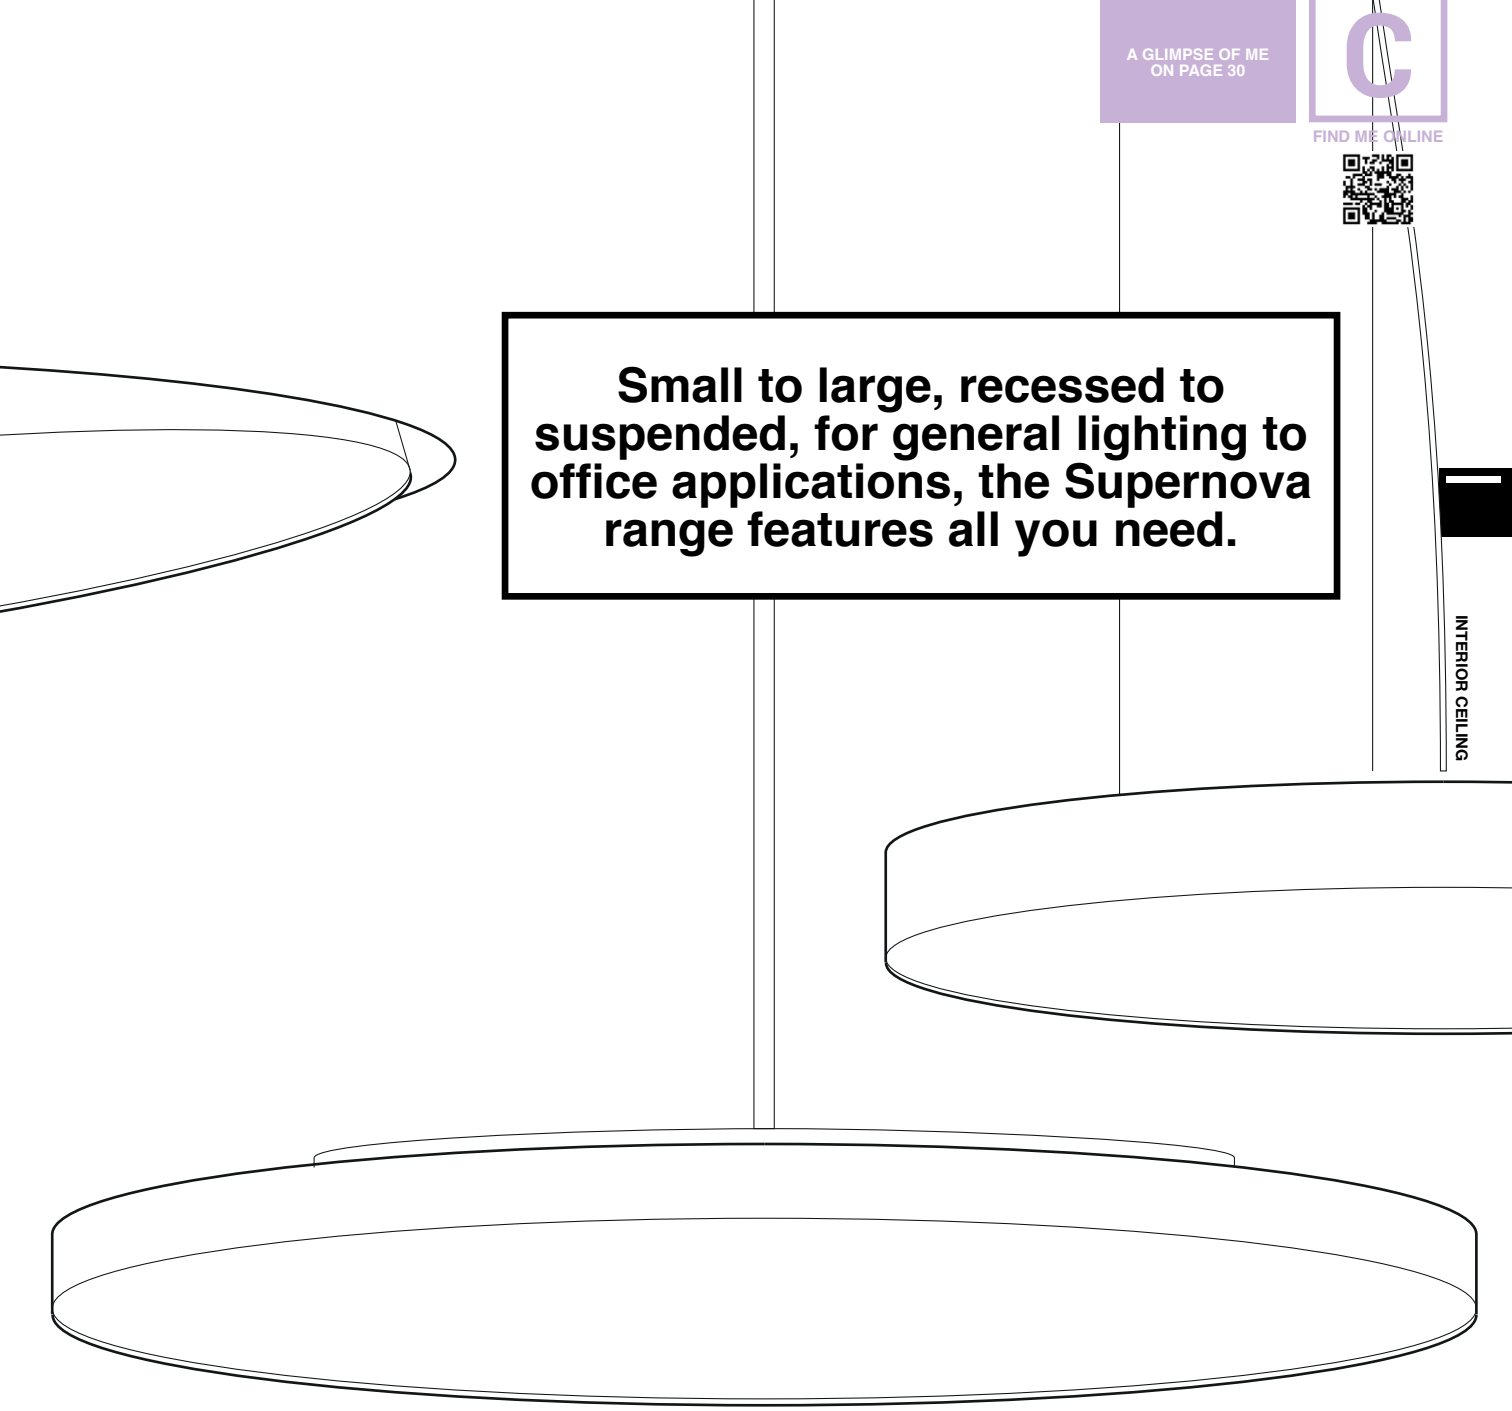


SUPERNOVA


SUPERNOVA

FAMILY

Supernova is an extensive range of pure geometrically formed lighting fixtures that guarantee powerful illumination and atmosphere. The range comes in different diameters and application possibilities. Supernova features in-house developed printed circuit boards specifically engineered to provide a uniform illumination of the polycarbonate. Small to large, recessed to suspended, for general lighting to office applications, the Supernova range features all you need.
As a plus, presence control and daylight simulation can be done thanks to the optional presence detection and the tunable white versions of the Supernova.


deltalight.com/supernova

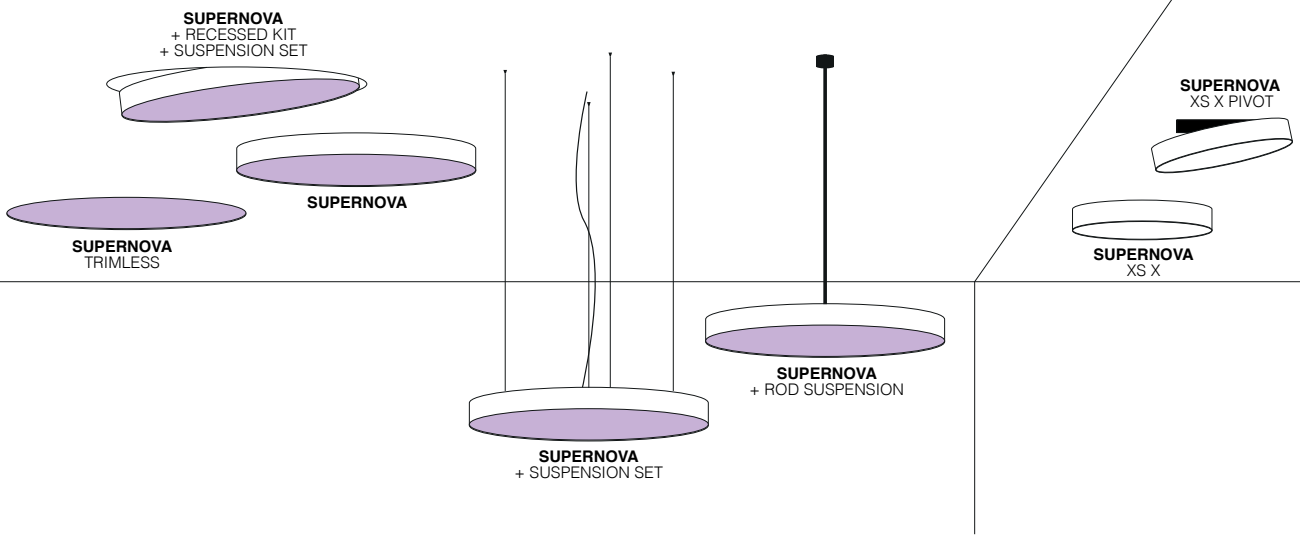

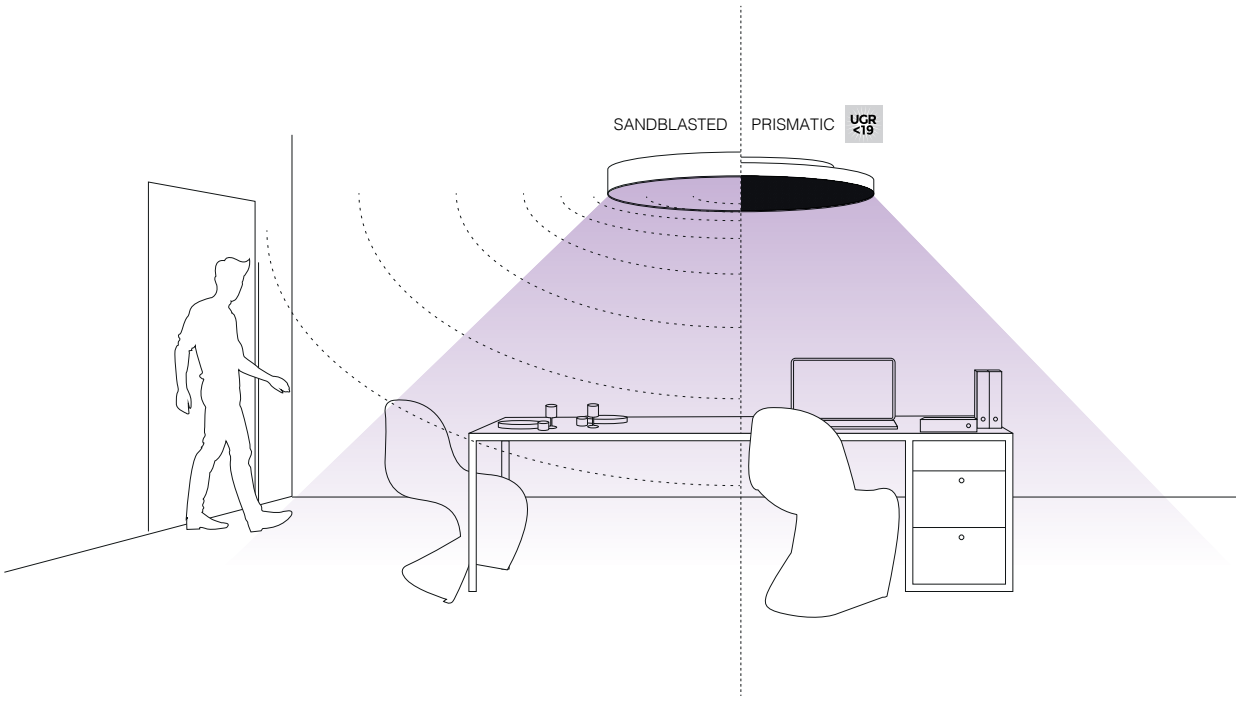




TUNABLE WHITE

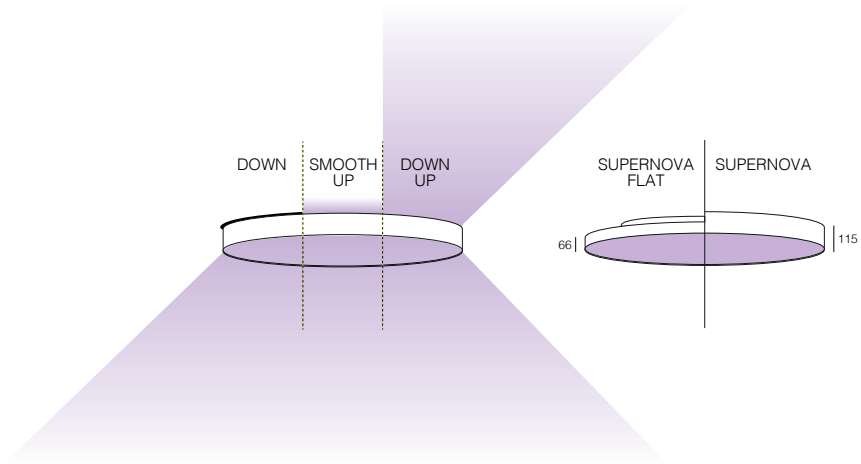


		XS	SUPERNOVA			FLAT	
		260	650	950	1250	650	950
LIGHT EFFECT							
DOWN		15W - 1580lm	57W - 9200lm	143W - 23000lm	239W - 36800lm	62W - 7568lm	132W - 16227lm
SMOOTH-UP						62W - 7568lm	132W - 16227lm
DOWN-UP			DOWN 57W - 9200lm UP 14W - 2300lm	DOWN 143W - 23000lm UP 29W - 4600lm	DOWN 239W - 36800lm UP 43W - 6900lm	DOWN 62W - 7568lm UP 21,4W - 3200lm	DOWN 132W - 16227lm UP 21,4W + 3200lm
OPTICS							
SANDBLASTED SBL		•	•	•	•	•	•
PRISMATIC PR - UGR<19						•	•
COLOUR TEMPERATURE							
3000K		•	•	•	•	•	•
TUNABLE WHITE 2700-5700K			•	•	•		
CONTROL							
EXCL. POWER SUPPLY							
NON DIM		•	•	•	•	•	•
MAINS DIM							
1-10V DIM			•	•	•	•	•
DALI DIM			•	•	•	•	•
WIRELESS DIM			◦	◦	◦	◦	◦
COLOUR							
WHITE ○		•	•	•	•	•	•
BLACK ●			•	•	•	•	•
DARK GREY ●		•					
RAL COLOUR (ON REQUEST)			◦	◦	◦	◦	◦
INSTALLATION							
INTERIOR	RECESSED TRIMLESS		•	•	•		
	RECESSED TILTABLE		•	•	•		
	SURFACE MOUNTED		•	•	•	•	•
	SUSPENDED CABLE		•	•	•	•	•
	SUSPENDED ROD		◦	◦		◦	◦
EXTERIOR	SURFACE MOUNTED	•					
	SURFACE MOUNTED TILTABLE	•					
OTHER							
PRESENCE DETECTION			•	•	•		

• STANDARD
◦ NOT FOR ALL VERSIONS


SUPERNOVA



685 x 200 / max.25



985 x 200 / max.25



1285 x 200 / max.25

SUPERNOVA TRIMLESS			65	95	125
			LINE / SBL	LINE / SBL	LINE / SBL
3000K CRI>90	LED 58,8W / 8635lm	NON DIM	**20628 9300**		
		1-10V	**20628 9301**		
		DALI	**20628 9305**		
	LED 147W / 21588lm	NON DIM		**20629 9300**	
		1-10V		**20629 9301**	
		DALI		**20629 9305**	
	LED 235,2W / 34541lm	NON DIM			**20630 9300**
		1-10V			**20630 9301**
		DALI			**20630 9305**
TUNABLE WHITE	LED 45W / CRI>90 5700K /4841lm - 2700K /4208lm	DALI DT6	**274 89 06 26 ED5**		
		WIRELESS	**274 89 06 26 WD**		
	LED 112W / CRI>80 5700K /12103lm - 2700K /10520lm	DALI DT6		**274 89 09 26 ED5**	
		WIRELESS		**274 89 09 26 WD**	
	LED 179W / CRI>90 5700K /19338lm - 2700K /16942lm	DALI DT6			**274 89 12 26 ED5**
		WIRELESS			**274 89 12 26 WD**


3000K 220-240V / 0 | 50-60Hz
TUNABLE WHITE 120-240V / 0 | 50-60Hz

IP20

FOR WIRELESS

CTRL DELTA

FOR TUNABLE WHITE VERSION:
DALI: 2 DALI CONTROL CHANNELS DT6
WIRELESS: HUMAN CENTRIC LIGHT CONTROL (MORE INFO IN TECHNICAL CHAPTER)

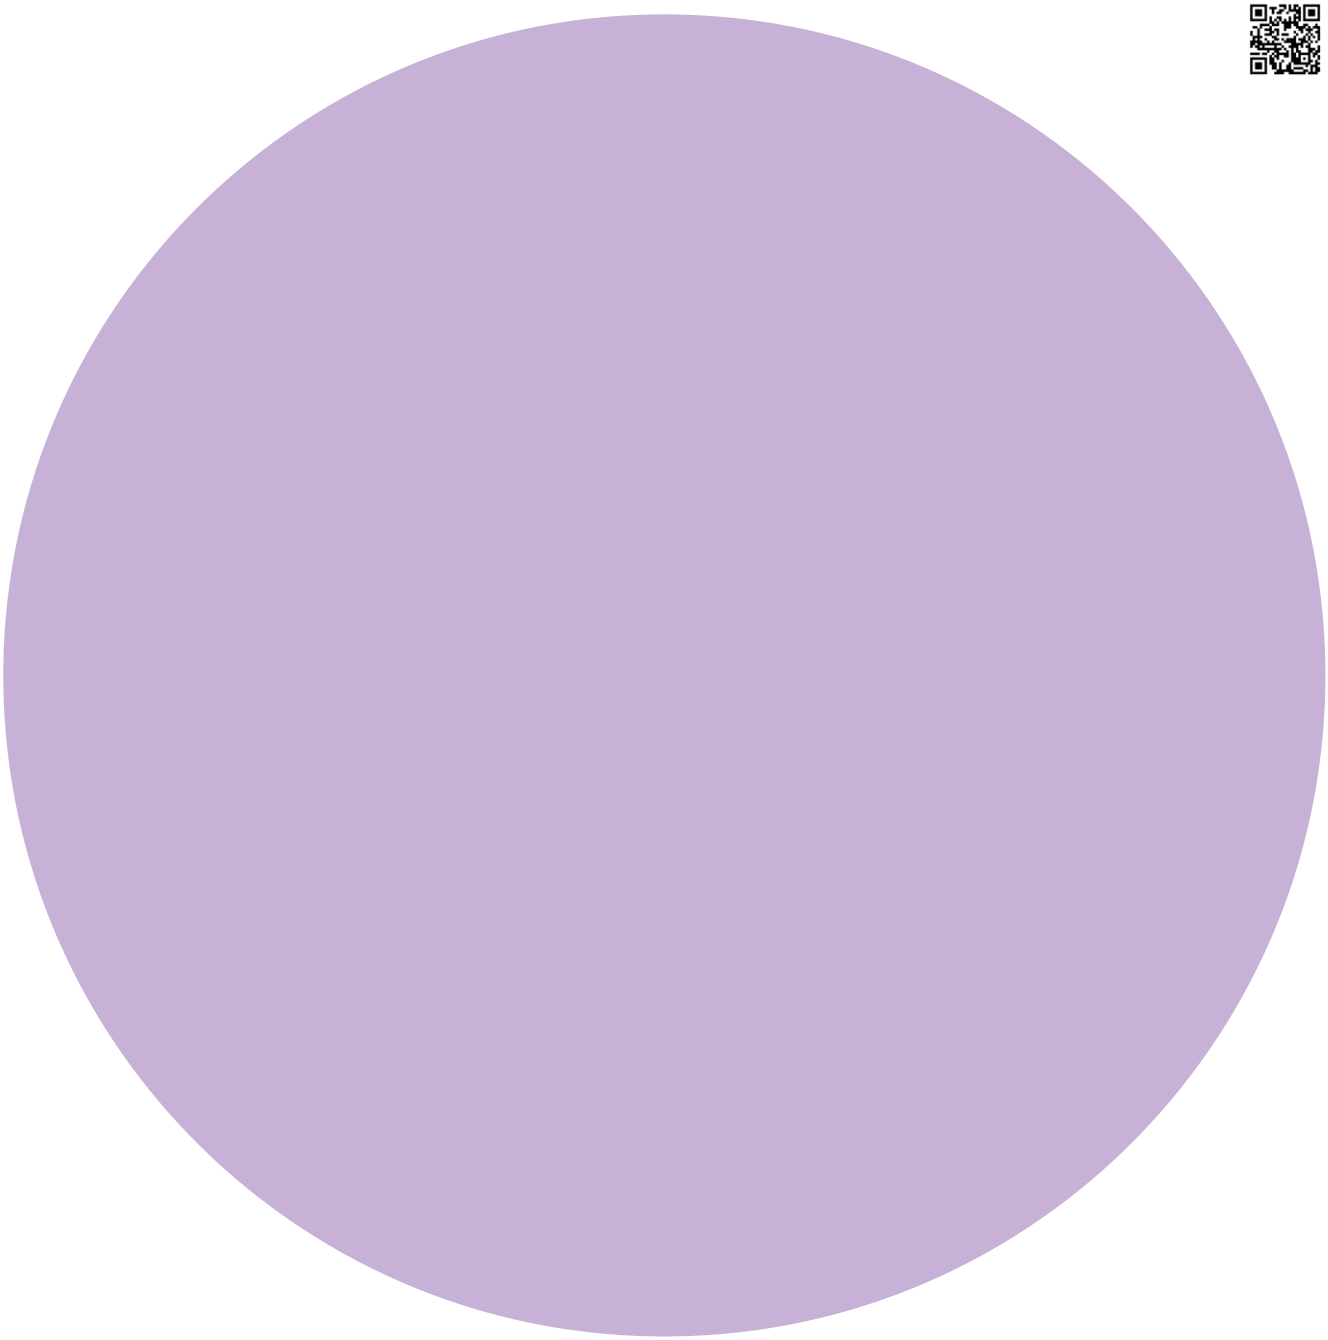


B


FINISH YOUR SPECIFICATION


		REQUIREMENT / OPTION / ACCESSORY		
		SUPERNOVA TRIMLESS		
		65	95	125
INSTALLATION				
PRESENCE DETECTION HF SENSOR	**300 90 311**	O	O	O

INVISIBLE BEHIND POLYCARBONATE
NOT FOR TW VERSION

SUPERNOVA







SUPERNOVA LINE SBL			65	95	125
3000K CRI>90	LED 58,8W / 8635lm	NON DIM	**20622 9300** ◇		
		1-10V	**20622 9301** ◇		
		DALI	**20622 9305** ◇		
	LED 147W / 21588lm	NON DIM		**20624 9300** ◇	
		1-10V		**20624 9301** ◇	
		DALI		**20624 9305** ◇	
	LED 235,2W / 34541lm	NON DIM			**20626 9300** ◇
		1-10V			**20626 9301** ◇
		DALI			**20626 9305** ◇
TUNABLE WHITE	LED 45W / CRI>90 5700K /4841lm - 2700K /4208lm	DALI DT6	**274 95 06 26 ED5** ◇		
		WIRELESS	**274 95 06 26 WD** ◇		
	LED 112W / CRI>80 5700K /12103lm - 2700K /10520lm	DALI DT6		**274 95 09 26 ED5** ◇	
		WIRELESS		**274 95 09 26 WD** ◇	
	LED 179W / CRI>90 5700K /19338lm - 2700K /16942lm	DALI DT6			**274 95 12 26 ED5** ◇
		WIRELESS			**274 95 12 26 WD** ◇

◇ B ● / W ○


3000K 220-240V / 0 | 50-60Hz
TUNABLE WHITE 120-240V / 0 | 50-60Hz


FOR WIRELESS




FOR TUNABLE WHITE VERSION:
DALI: 2 DALI CONTROL CHANNELS DT6
WIRELESS: HUMAN CENTRIC LIGHT CONTROL (MORE INFO IN TECHNICAL CHAPTER)

IP20







SUPERNOVA LINE SBL DOWN-UP			65	95	125
3000K CRI>90	LED UP 14,8W / 2158lm LED DOWN 58,8W / 8635lm	NON DIM	**20616 9300** ◇		
		1-10V	**20616 9301** ◇		
		DALI	**20616 9305** ◇		
	LED UP 29,6W / 4316lm LED DOWN 147W / 21588lm	NON DIM		**20618 9300** ◇	
		1-10V		**20618 9301** ◇	
		DALI		**20618 9305** ◇	
	LED UP 44,4W / 6474lm LED DOWN 235,2W / 34541lm	NON DIM			**20620 9300** ◇
		1-10V			**20620 9301** ◇
		DALI			**20620 9305** ◇
TUNABLE WHITE	LED UP 17W / CRI>90 5700K /1510lm - 2700K / 1374lm LED DOWN 45W / CRI>90 5700K /4841lm - 2700K / 4208lm	DALI DT6	**274 96 06 26 ED5** ◇		
	LED UP 33W / CRI>80 5700K /3020lm - 2700K / 2748lm LED DOWN 112W / CRI>80 5700K /12103lm - 2700K / 10520lm			**274 96 09 26 ED5** ◇	
	LED UP 50W / CRI>90 5700K /4530lm - 2700K / 4122lm LED DOWN 179W / CRI>90 5700K /19338lm - 2700K / 16942lm				**274 96 12 26 ED5** ◇

◇ B ● / W ○

3000K 220-240V / 0 | 50-60Hz
TUNABLE WHITE 120-240V / 0 | 50-60Hz

IP20

FOR 3000K VERSION:
4 x CABLE SUSPENSION 3m
1 x CABLE 3 x 0,75mm² (NON DIM)
2 x CABLE 5 x 0,75mm² (1-10V DIM)
1 x CABLE 3 x 0,75mm² +1 x CABLE 2 x 0,75mm² (DALI)
CABLING 2 CIRCUITS (only DIM versions)


FOR TUNABLE WHITE VERSION:
4 x CABLE SUSPENSION 3m
2 x CABLE 5 x 0,75mm²
4 DALI CONTROL CHANNELS DT6

The recessed version is a particularly eye-catching option in the Supernova range, thanks to its tilted application. A recessed kit facilitates installation, allows you to customize the depth and angle of the Supernova, and ensures the inner workings of the fitting are concealed within the ceiling.

Surface mounted, Supernova is a timeless lighting solution that guarantees powerful illumination and striking atmosphere, blending harmonically into its space. Its uninterrupted circular form and neutral character enhance any room, from hotel lobbies to corridors to shops, or any other type of project.

A suspended Supernova uses four delicate steel cords to enable an easy suspension. The down-up version features a polycarbonate on top to avoid dust entering the fixture and guaranteeing a pleasant and an immaculate indirect light effect. Thanks to the transparent supply cable and the trimless suspension kit you can opt for a very clean and minimalistic ceiling suspension.

RECESSED INSTALLATION

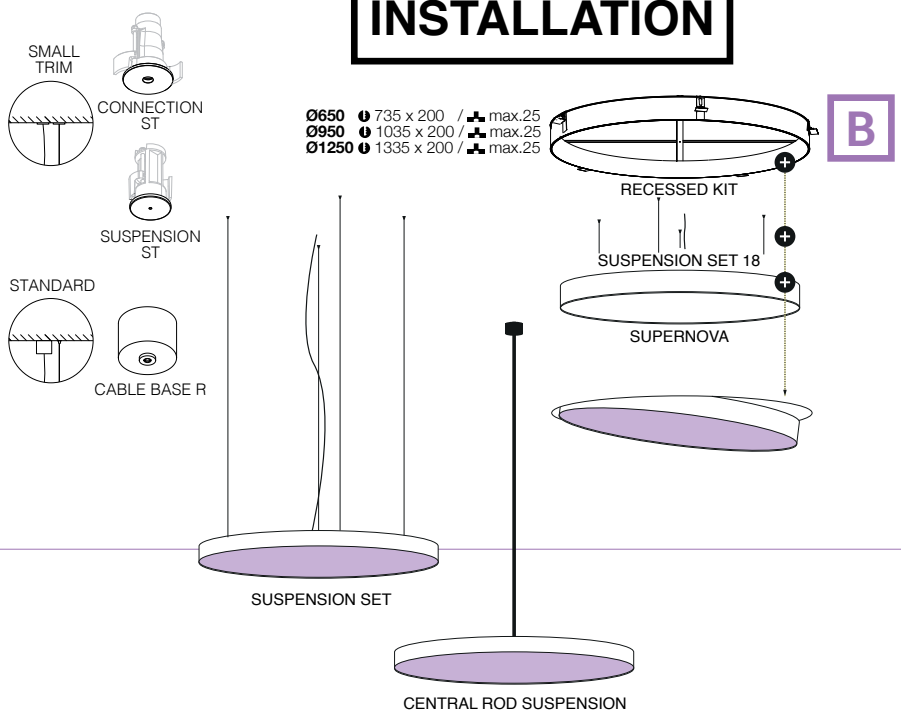


B


FINISH YOUR SPECIFICATION


		REQUIREMENT / OPTION / ACCESSORY					
		SUPERNOVA LINE					
		65	95	125	65 DOWN-UP	95 DOWN-UP	125 DOWN-UP
INSTALLATION RECESSED							
65 RECESSED KIT	**274 94 0710**	R					
95 RECESSED KIT	**274 94 1010**		R				
125 RECESSED KIT	**274 94 1310**			R			
+ SUSPENSION SET 3m NON-DIM / WD	**328 18 43**	R	R	R			
+ SUSPENSION SET 3m 1-10V / DALI	**328 18 43 ED1**	R	R	R			
+ SUSPENSION SET 3m TW	**328 18 43 TW ED5**	R	R	R			
INSTALLATION SUSPENDED							
SUSPENSION SET 3m NON-DIM / WD	**328 18 43**	R	R	R			
SUSPENSION SET 3m 1-10V / DALI	**328 18 43 ED1**	R	R	R			
SUSPENSION SET 3m TW	**328 18 43 TW ED5**	R	R	R			
or ROD SUSPENSION 1m	**328 24 61 B / W**	R					
	328 24 91 B / W		R				
CONNECTION ST	**15225 0360 B / W**	O	O	O	O	O	O
SUSPENSION ST	**15225 0340 B / W**	O	O	O	O	O	O
CABLE BASE R	**203 99 55 ANO / B / W**	O	O	O	O	O	O
COVERSET R Ø100	**204 00 100 B / W**	O	O	O	O	O	O
PRESENCE DETECTION HF SENSOR	**300 90 311**	O	O	O	O	O	O


B

SUPERNOVA FLAT










SUPERNOVA FLAT			65		95		65 SMOOTH UP		95 SMOOTH UP	
			SBL	PRISMATIC	SBL	PRISMATIC	SBL	PRISMATIC	SBL	PRISMATIC
				UGR <19		UGR <19		UGR <19		UGR <19
3000K CRI>90	LED 37,4W /5360lm / 930mA* LED 58,5W / 7776lm / 1400mA*	NON DIM	**20631 9300** ◇				**20632 9300** ◇			
		1-10V	**20631 9301** ◇				**20632 9301** ◇			
		DALI	**20631 9305** ◇				**20632 9305** ◇			
	LED 37,4W /5360lm / 930mA	NON DIM		**20633 9300** ◇				**20634 9300** ◇		
		1-10V		**20633 9301** ◇				**20634 9301** ◇		
		DALI		**20633 9305** ◇				**20634 9305** ◇		
	LED 54,2W / 8273lm / 1300mA* LED 79,4W / 11477lm / 1860mA* LED 123,7W / 16507lm / 2800mA*	NON DIM			**20635 9300** ◇				**20636 9300** ◇	
		1-10V			**20635 9301** ◇				**20636 9301** ◇	
		DALI			**20635 9305** ◇				**20636 9305** ◇	
	LED 54,2W / 8273lm / 1300mA* LED 79,4W / 11477lm / 1860mA*	NON DIM				**20637 9300** ◇				**20638 9300** ◇
		1-10V				**20637 9301** ◇				**20638 9301** ◇
		DALI				**20637 9305** ◇				**20638 9305** ◇


◇ B ● / W ○

220-240V / 0 | 50-60Hz

IP20

*MULTIPLE SETTINGS ONLY FOR NON DIM VERSION
DIMMABLE VERSION = HIGHEST CURRENT





SUPERNOVA FLAT			65 DOWN-UP		95 DOWN-UP	
			SBL	PRISMATIC	SBL	PRISMATIC
				UGR <19		UGR <19
3000K CRI>90	LED UP 22,2W / 2974lm - DOWN 37,4W / 5360lm / 930mA* DOWN 58,5W / 7776lm / 1400mA*	NON DIM	**20612 9300** ◇			
		1-10V	**20612 9301** ◇			
		DALI	**20612 9305** ◇ **			
	LED UP 22,2W / 2974lm - LED 37,4W /5360lm / 930mA*	NON DIM		**20613 9300** ◇		
		1-10V		**20613 9301** ◇		
		DALI		**20613 9305** ◇ **		
	LED UP 22,2W / 2974lm - DOWN 54,2W / 8273lm / 1300mA* DOWN 79,4W / 11477lm / 1860mA* LED 123,7W / 16507lm / 2800mA*	NON DIM			**20614 9300** ◇	
		1-10V			**20614 9301** ◇	
		DALI			**20614 9305** ◇ **	
	LED UP 22,2W / 2974lm - DOWN 54,2W / 8273lm / 1300mA* DOWN 79,4W / 11477lm / 1860mA*	NON DIM				**20615 9300** ◇
		1-10V				**20615 9301** ◇
		DALI				**20615 9305** ◇ **

◇ B ● / W ○

220-240V / 0 | 50-60Hz

IP20

*MULTIPLE SETTINGS ONLY FOR NON DIM VERSION
DIMMABLE VERSION = HIGHEST CURRENT


** 2 DALI ADDRESSES

A GLIMPSE OF ME
ON PAGE 30

C


FIND ME ONLINE


The evolution in LED allowed for a more minimalistic design, visible within Supernova Flat. It combines the Supernova characteristics with a more subtle housing, creating a neat and modern look. Combined with a prismatic cover, Supernova Flat offers a lighting solution suitable for office and school application as its UGR remains below 19. Available for direct or direct-indirect lighting or with a soft uplight accent in Supernova Flat Smooth Up.

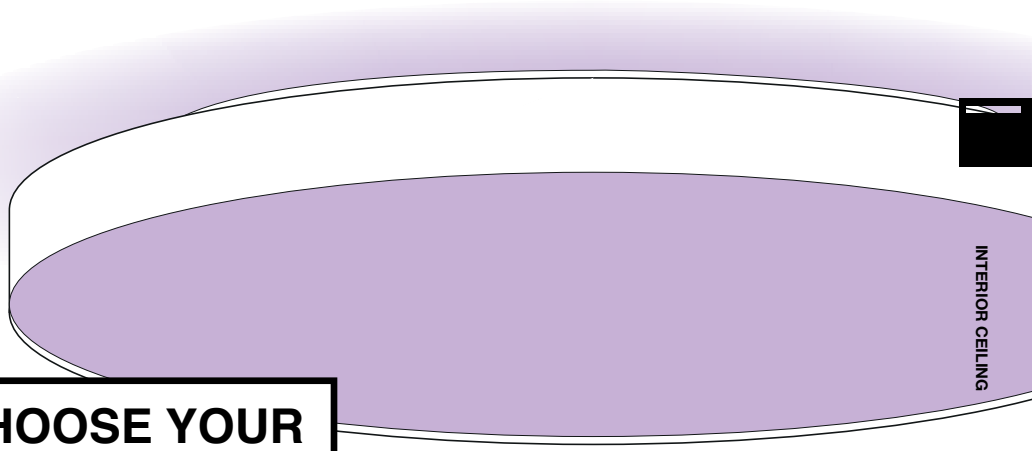

CHOOSE YOUR INSTALLATION



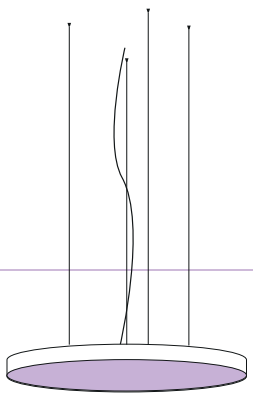

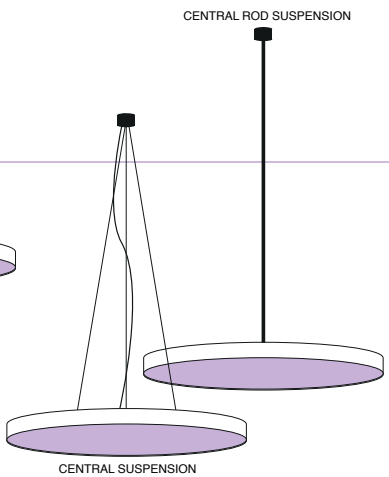

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY					
		SUPERNOVA FLAT					
		65	95	65 SMOOTH UP	95 SMOOTH UP	65 DOWN-UP	95 DOWN-UP
INSTALLATION SUSPENDED							
SUSPENSION SET 3m NON-DIM	**328 25 43**	R	R	R	R	R	R
SUSPENSION SET 3m 1-10V / DALI	**328 25 43 ED**	R	R	R	R	R	R
or CENTRAL ROD SUSPENSION 1m	**274 97 10 B / W**	R	R	R	R	R	R
or CENTRAL SUSPENSION 3m	**328 26 23 B / W**	R	R	R	R	R	R
CONNECTION ST	**15225 0360 B / W**	O	O	O	O	O	O
SUSPENSION ST	**15225 0340 B / W**	O	O	O	O	O	O
CABLE BASE R	**203 99 55 ANO / B / W**	O	O	O	O	O	O
COVERSET R Ø100	**204 00 100 B / W**	O	O	O	O	O	O


B


SUPERDOME


Cosiness is large and round; of that the Superdome is proof.
This luminaire was initially created as an XXL version of Tweeter, one of the award winners in the collection. The Superdome is perfectly at home in double ceiling heights, or just as an atmospheric dome over the dining table or as an eye-catcher in the hall at home or the office.

The body made from polyester is available with a black or white exterior, the interior is white for optimal light diffusion. At first glance the Superdome looks very simple, but it is well thought-out. The light source is concealed behind a large diffuser, recessed into the dome obscured direct from view and preventing glare.

deltalight.com/superdome

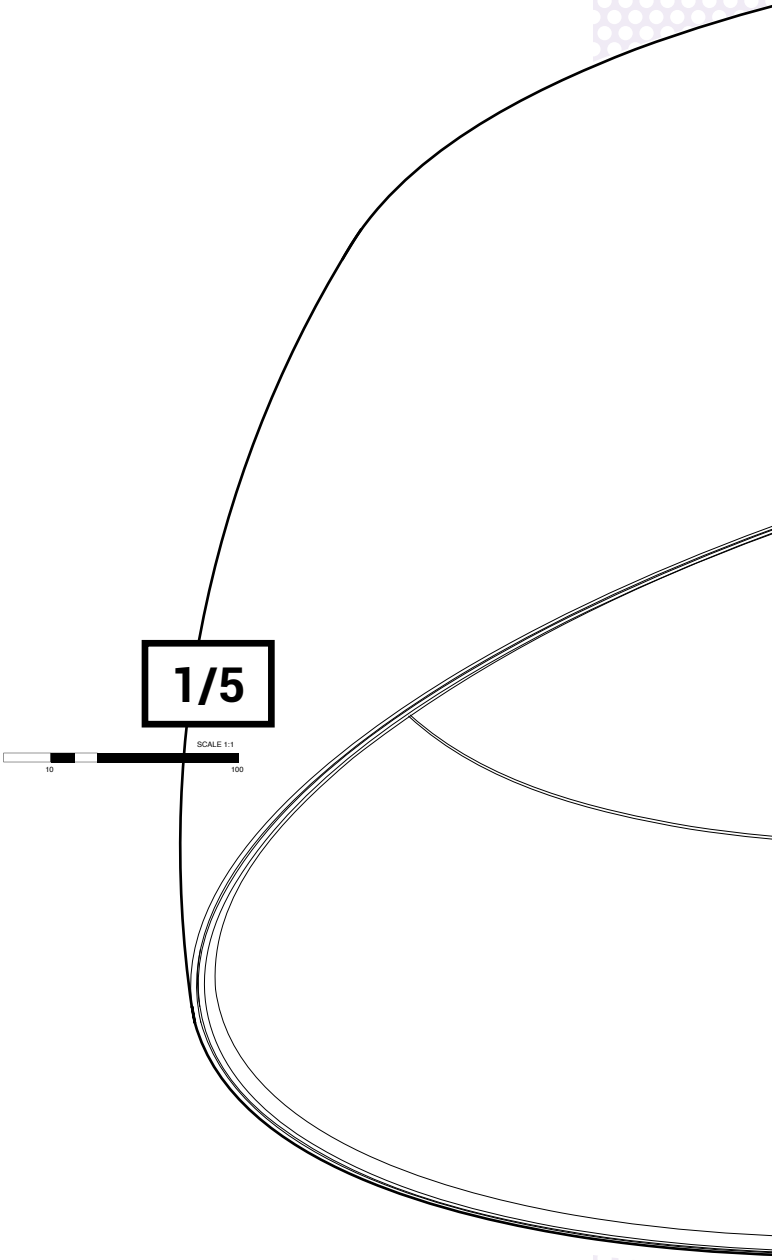

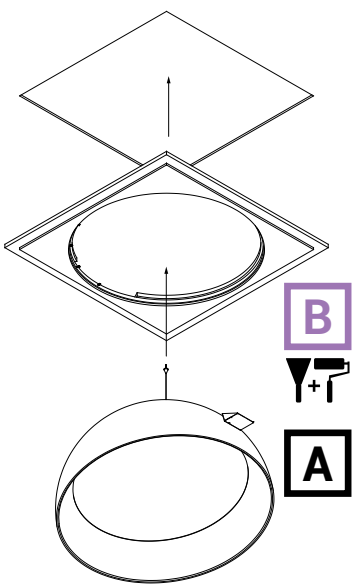




KIT x 350

SUPERDOME			RECESSED
			SBL
3000K CRI>90	LED 105W / 3000K / 16950lm	1-10V	**321 96 9528 ED1** ◇
			◇ B-W ●○ / W-W ○○
			120-240V / 50-60Hz
			IP20


A GLIMPSE OF ME
ON PAGE 28

C

FIND ME ONLINE

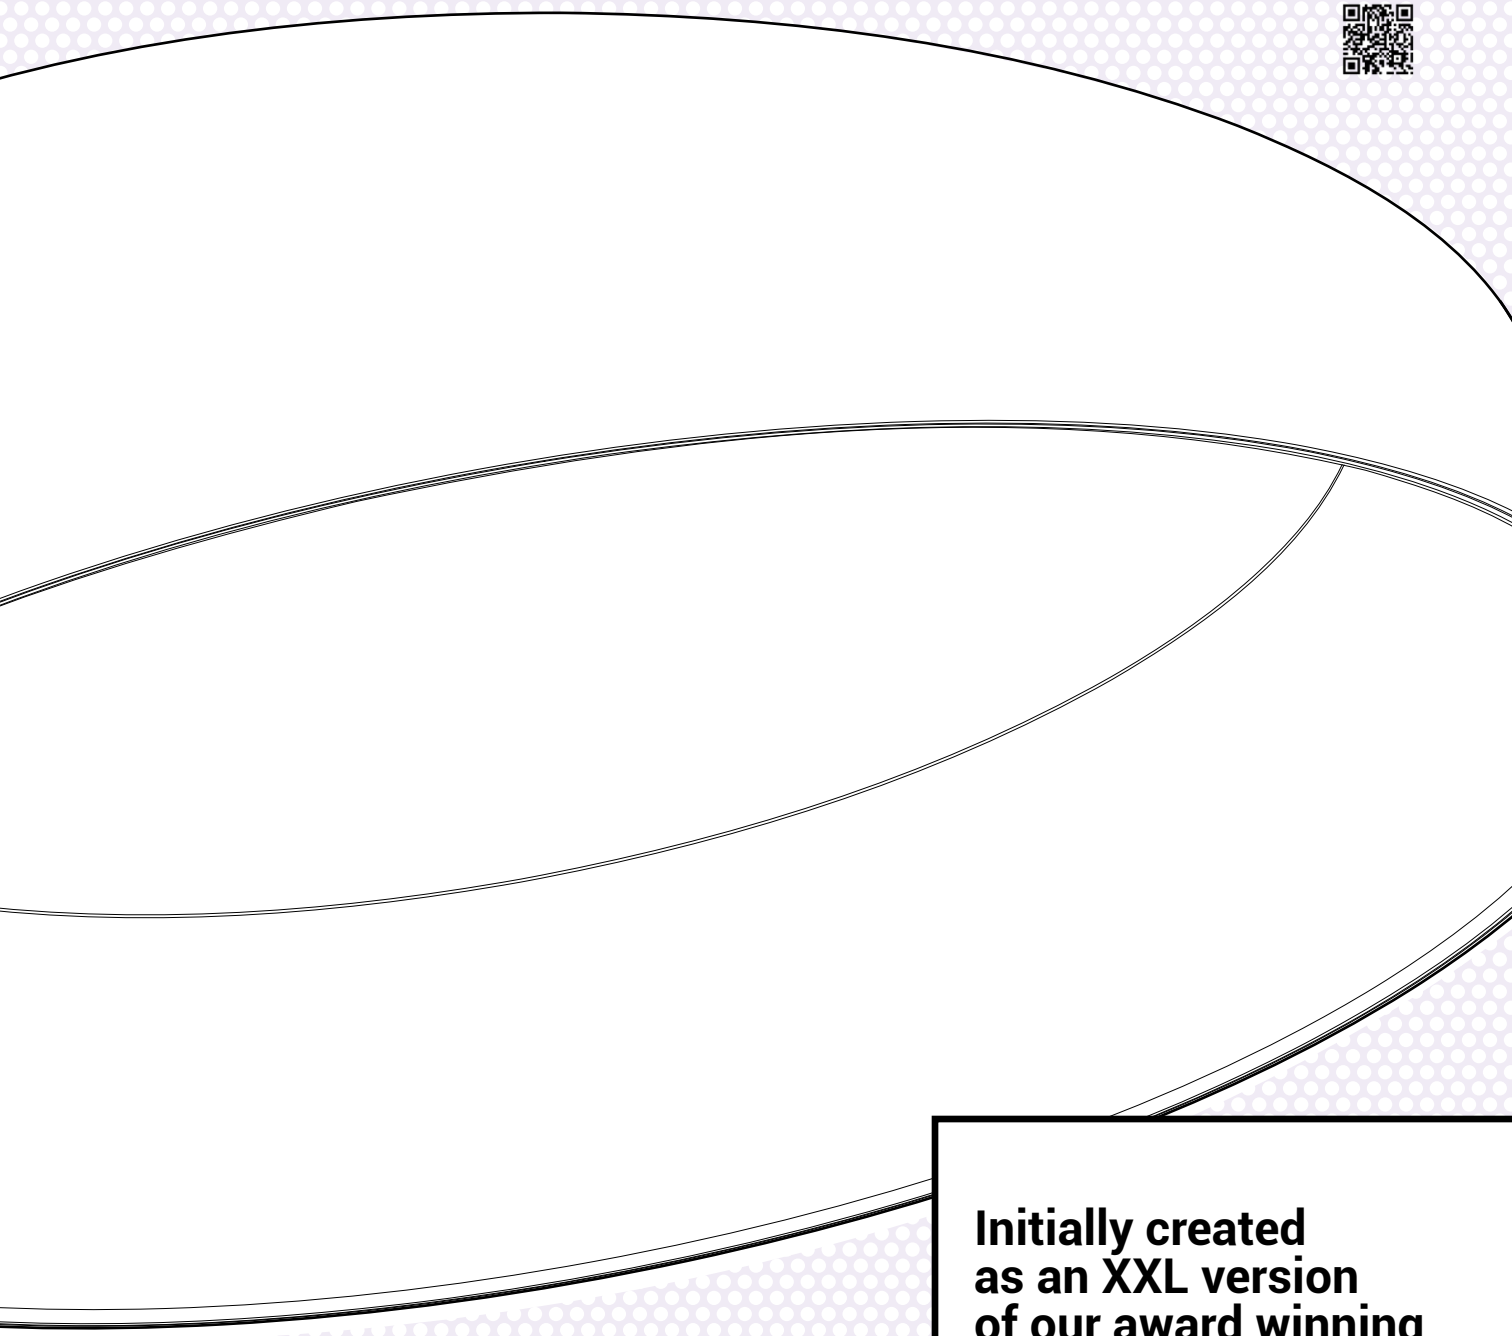

Initially created as an XXL version of our award winning Tweeter.



B

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY SUPERDOME RECESSED
MOUNTING KIT TRIMLESS			
PLASTERBOARD	**321 96 1036**		R

XY180

Design by **OMA** & Delta Light


XY180 is a 3-piece lighting collection designed by OMA. The collection was inspired by a fascination with point, line and surface; key architectural elements. The floor, wall and ceiling lights are meant for individual and shared workspaces, but can also be applied to domestic and public interior spaces.

The line uses precise geometric dimensions while the base elements - which include tube lights and a spotlight in either a discreet 3,9W or a powerful 7,1W - can be combined with a hinge to generate countless lighting conditions. As individual components, each part is familiar. When assembled however, they can take on unpredictable and asymmetrical positions.

deltalight.com/xy180

The tube lights create diffuse ambient lighting, while the spotlights provide focused lighting. By exposing the light and allowing it to pivot, the fixture becomes the main feature as it shifts into multiple configurations; a product that contributes to the creation of space, not only by the light it emits, but also by its physical presence.


“Through the choreography of movement and multiplication, the luminaire can manipulate three-dimensional space, entering the domain of architectural space. The modularity of XY180 allows each module or set of modules to be reconfigured and change its impact on the surrounding space.”

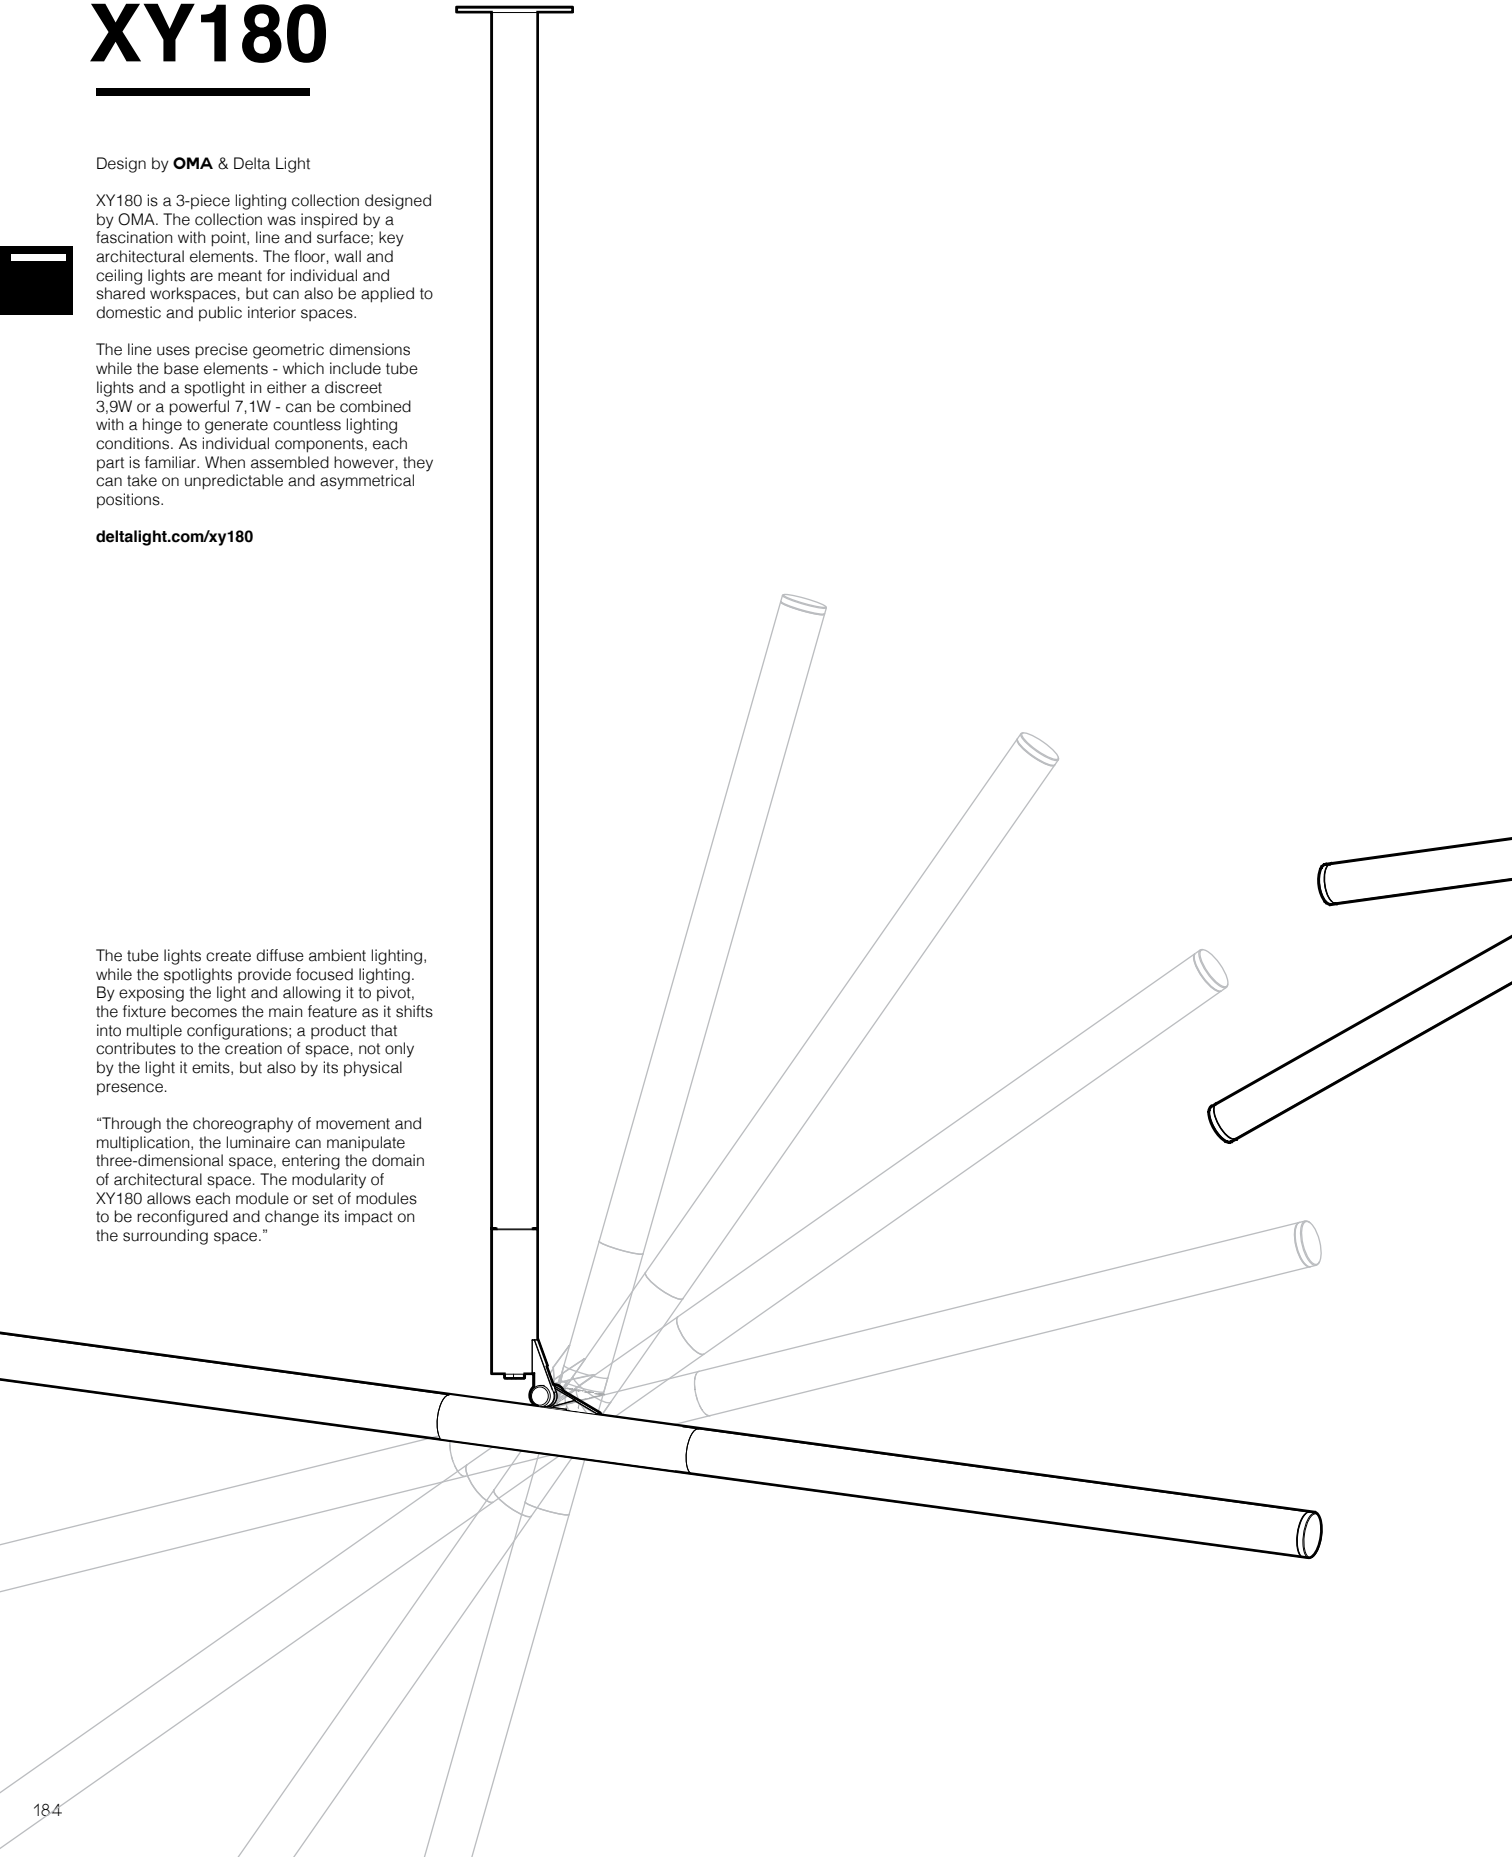


A GLIMPSE OF ME
ON PAGE 64


C


FIND ME ONLINE

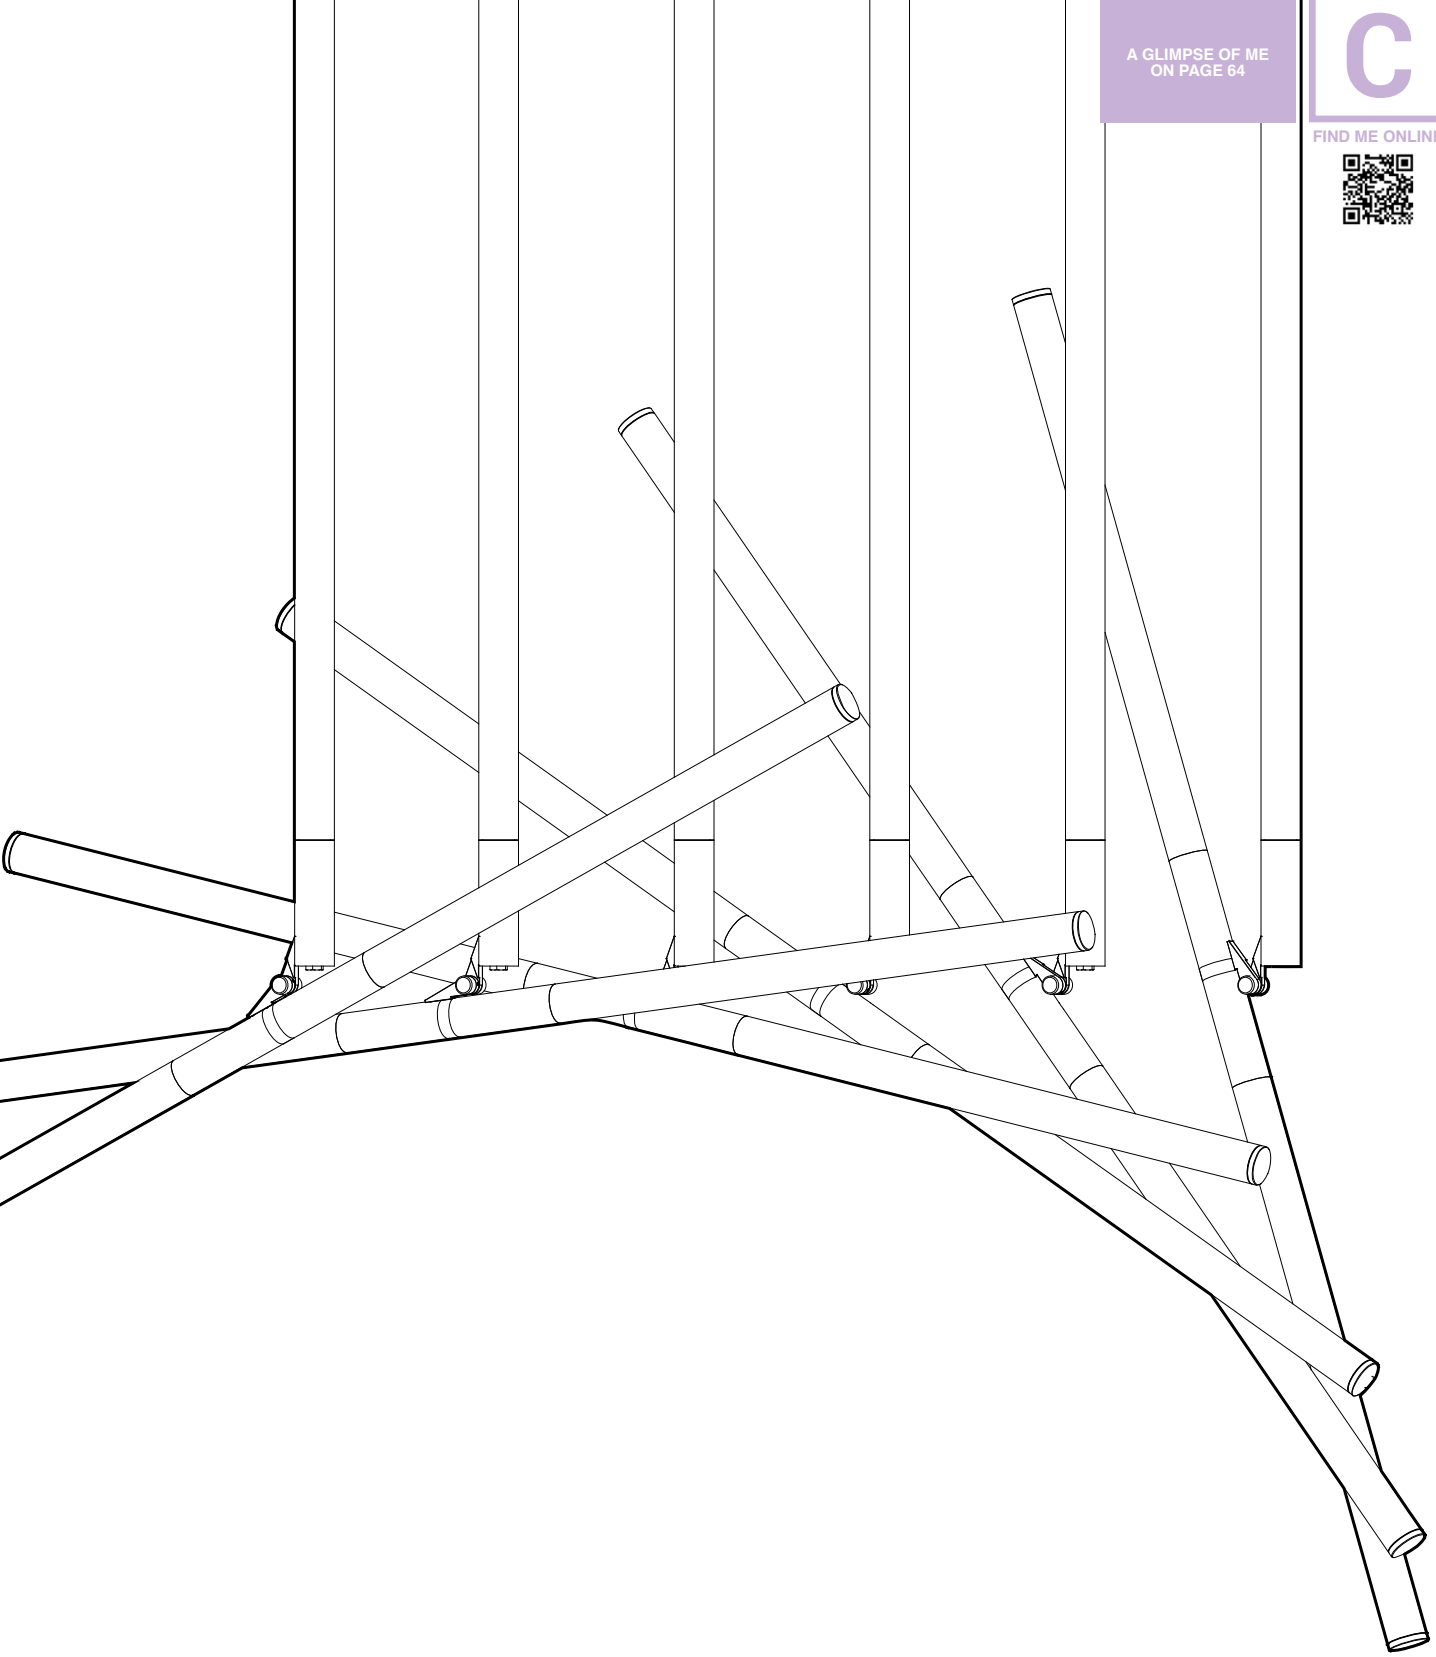


XY180











XY180			S80 MINI	S120 MINI	S81 MINI	S121 MINI	S81	S121	S82	S122
			L 895mm	L 1295mm	L 895mm	L 1295mm	L 895mm	L 1295mm	L 895mm	L 1295mm
3000K	CRI > 80 LED 4.1W / 420lm / 350mA	NON DIM	**422 131 83** ◇	**422 132 83** ◇						
		1-10V								
		DALI								
	CRI > 90 LED 8,9W / 1050lm CRI > 80 LED 4.1W / 420lm / 350mA	NON DIM			**422 141 93** ◇	**422 142 93** ◇				
		1-10V			**422 141 93 ED1** ◇	**422 142 93 ED1** ◇				
		DALI			**422 141 93 ED5** ◇	**422 142 93 ED5** ◇				
	CRI > 90 LED 8,9W / 1050lm	NON DIM					**422 111 93** ◇	**422 112 93** ◇		
		1-10V					**422 111 93 ED1** ◇	**422 112 93 ED1** ◇		
		DALI					**422 111 93 ED5** ◇	**422 112 93 ED5** ◇		
	CRI > 90 2 x LED 8,9W / 1050lm	NON DIM							**422 121 93** ◇	**422 122 93** ◇
		1-10V							**422 121 93 ED1** ◇	**422 122 93 ED1** ◇
		DALI							**422 121 93 ED5** ◇	**422 122 93 ED5** ◇
			◇ B ●							
			220-240V / 50-60Hz							
			IP20							






XY180			S81 PUNK	S121 PUNK	F120 WDL
			L 895mm	L 1295mm	
3000K CRI>90	LED 8,9W / 1050lm LED 7.1W / 812lm / 350mA	NON DIM	**422 161 811 932** ◇	**422 162 811 932** ◇	
		1-10V	**422 161 811 932 ED1** ◇	**422 162 811 932 ED1** ◇	
		DALI	**422 161 811 932 ED5** ◇	**422 162 811 932 ED5** ◇	
	LED 8,9W / 1050lm	WIRELESS			**422 912 93 WDL** ◇
			◇ B ●		
			220-240V / 50-60Hz		220-240V / 50-60Hz
			IP20		MARBLE BASE INCL.CORD 2m + PLUG CEE 7/7 INCL.WIRELESS DIMMABLE CONTROL
					IP20

A GLIMPSE OF ME
ON PAGE 64

C

FIND ME ONLINE

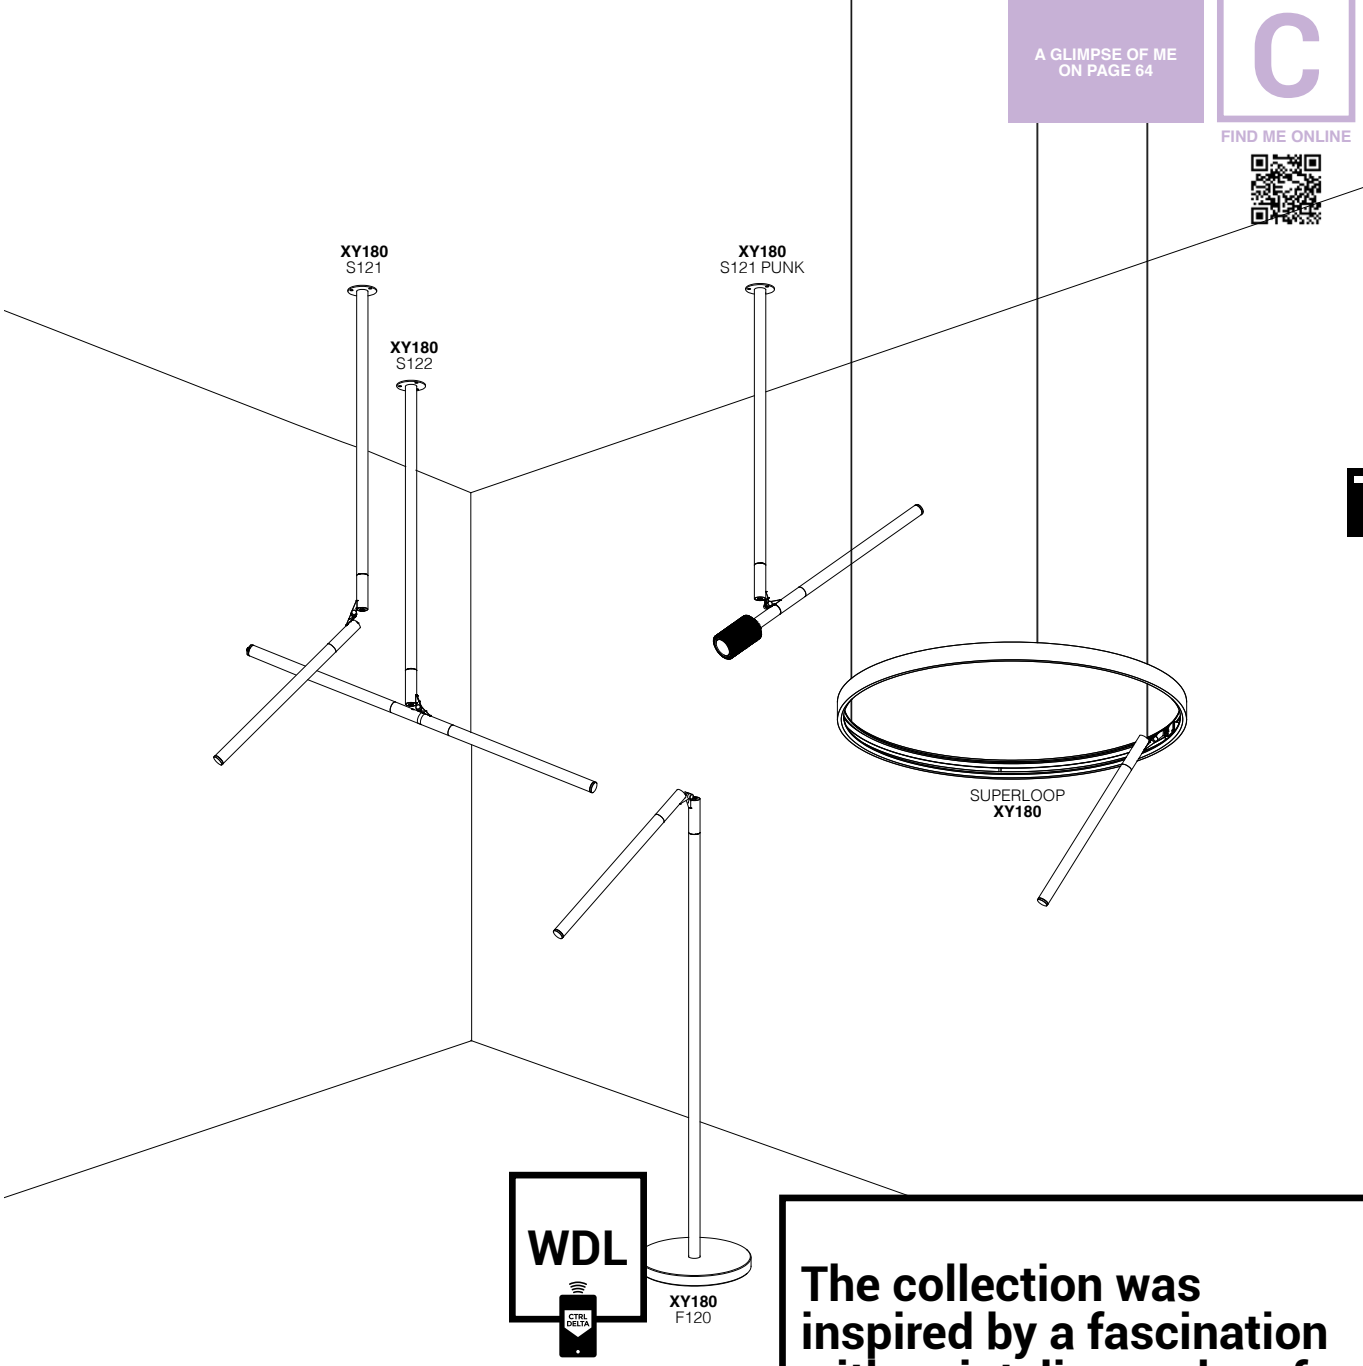

The collection was inspired by a fascination with point, line and surface; key architectural elements.

FINISH YOUR SPECIFICATION		REQUIREMENT / OPTION / ACCESSORY					
		XY180					
		S80 MINI S120 MINI	S81 MINI S121 MINI	S81 S121	S82 S122	S81 PUNK S121 PUNK	F120 WDL
FINISH							
SPY TUBE	**414 01 00 B/FBR/FG/MMAT/SG/W**					R	
INSTALLATION							
CONNECTION BOX	**422 99 01 B**	O	O	O	O	O	
COVERSET R Ø100	**204 00 100 B / W**	O	O	O	O	O	
HONEYCOMB / LENS / GLASS							
HONEYCOMB	**413 03 01 B**					A	
LINEAR SPREAD LENS	**413 03 02**					A	
SPREAD LENS	**413 03 03**					A	
SOFTENING LENS	**413 03 04**					A	
GLASS SBL	**413 03 05**					A	


B

PUNK


Design by **OMA** & Delta Light


Step away from brave, alter yourself and dare to dare. This spiked design family breathes creativity and allows you to play with light and texture. To integrate the Punk experience throughout your project, the Punk design is available as a Clip version, as pendants, wall luminaires and in the XY180 range. Available in Black, Gold Coloured and Black Pure, a Black coloured finish with pure aluminum topped spikes.
Don't be deceived: Punk Clip may look small with its diameter of only 39mm, its performance is big! The Clip system lets you install Punk as a semi-recessed light, only letting the luminaire head peeking out of the ceiling.
With its particular design, the pendant versions of Punk make a statement on their own, but hanging them in a cluster make them look like a real eye-catcher. Combining different Punk lengths and different finishing colours makes a unique setting out of every Punk cluster.

deltalight.com/punk

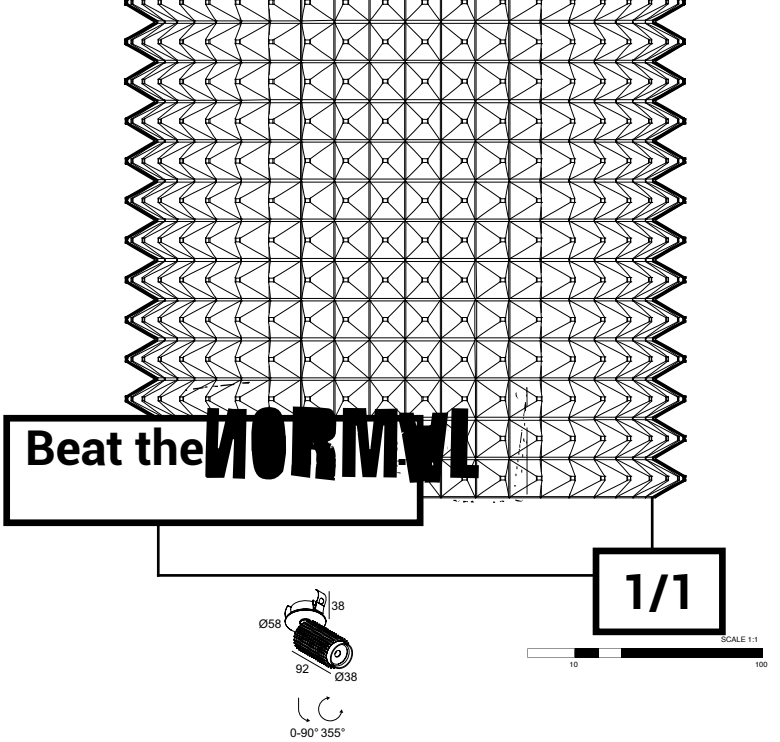

PUNK				39 CLIP
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP20	45°	**471 111 811 931** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA			**471 111 811 921** ◇
				◇ B-B








PUNK				451 C	452 C
3000K CRI>90	LED 6.4W / 587lm / 350mA	MAINS	40°	**471 221 932 ED8** ◇	**471 222 932 ED8** ◇
2700K CRI>90	LED 6.4W / 587lm / 350mA			**471 221 922 ED8** ◇	**471 222 922 ED8** ◇
				◇ B / BP / GC	◇ B / GC


220-240V / 50-60Hz
INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m + 1 x CABLE 2 x 0.75mm²

IP20










PUNK				621 C	621 C Hi	622 C	622 C Hi
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	MAINS	33°	**471 321 811 932 ED8** ◇		**471 322 811 932 ED8** ◇	
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA			**471 321 811 922 ED8** ◇		**471 322 811 922 ED8** ◇	
	1 x QPAR51 max.35W	-	-		**471 321 00** ◇		**471 322 00** ◇
				◇ B / BP / GC		◇ B / GC	

220-240V / 50-60Hz
QPAR51 GU10 / 100-240V / 50-60Hz
INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m + 1 x CABLE 2 x 0.75mm²

IP20 | IP20 0,5 | IP20 | IP20 0,5

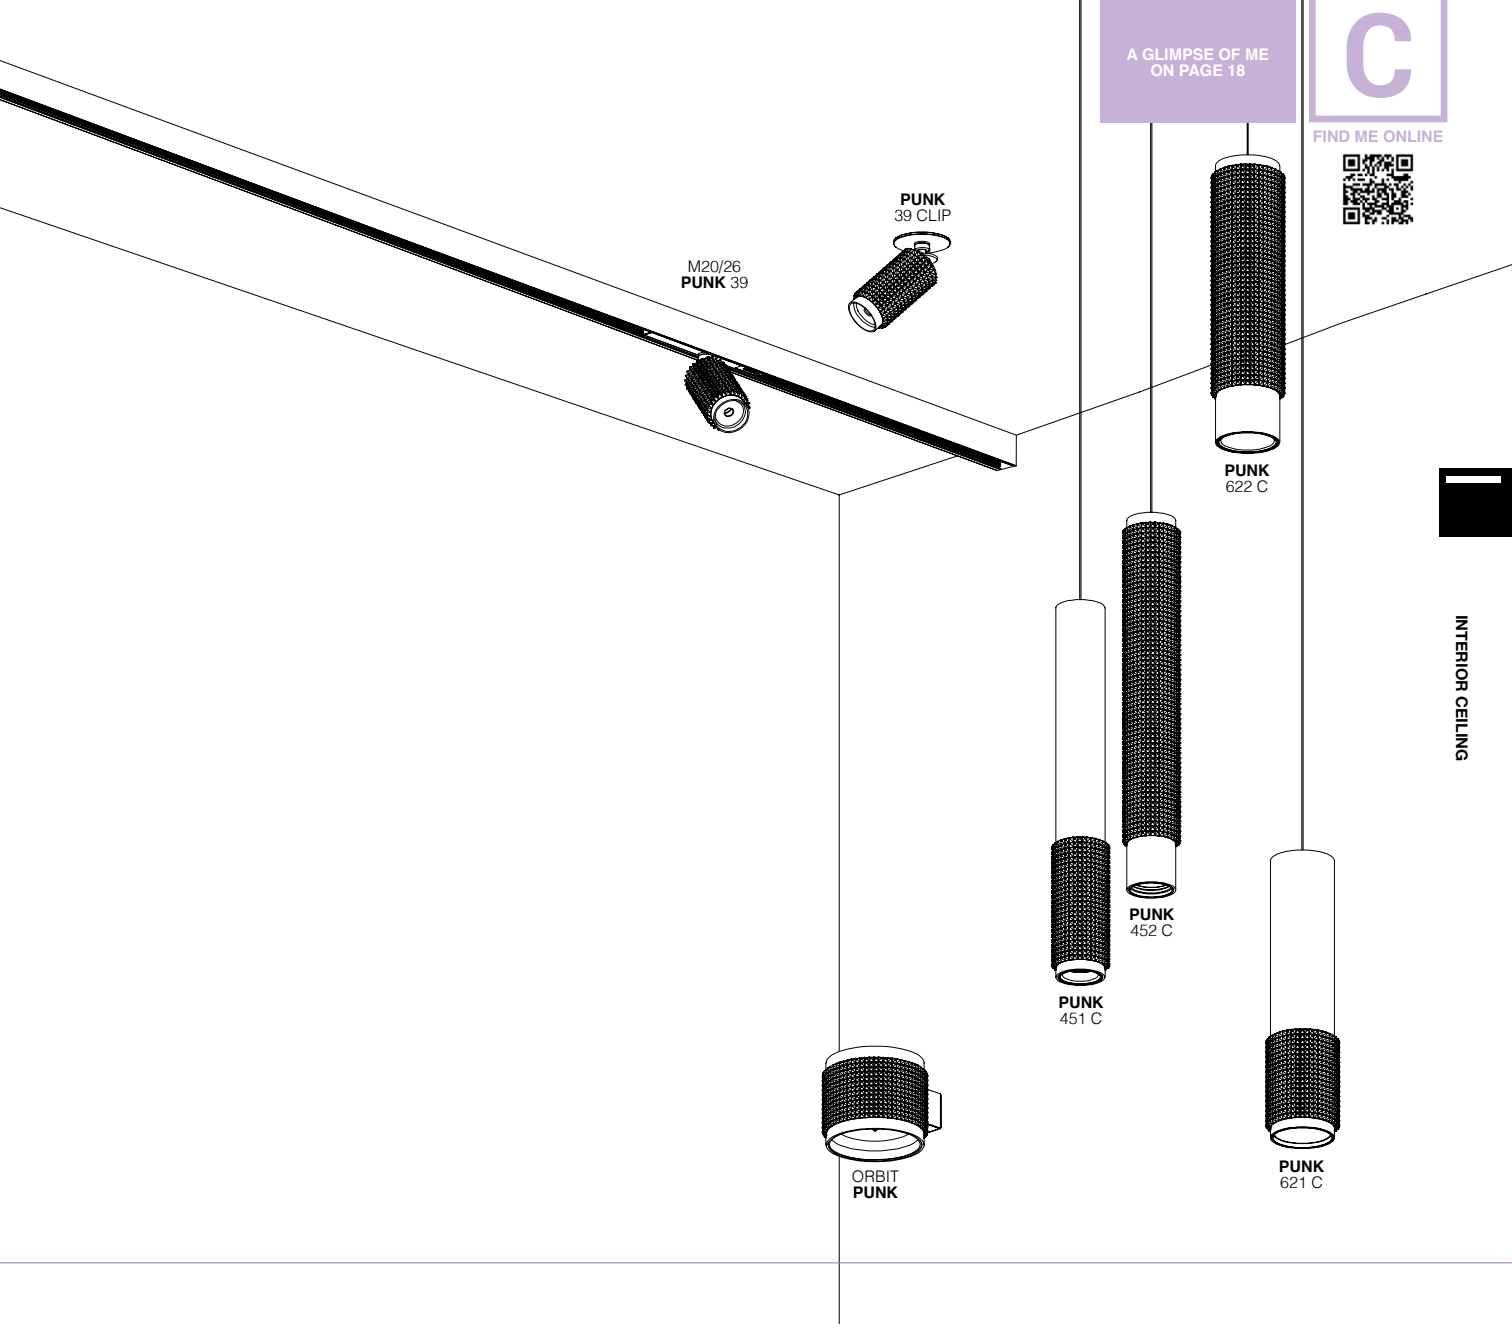


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY						
			PUNK						
			39 CLIP	451 C	452 C	621 C	621 C Hi	622 C	622 C Hi
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
MAINS DIM (FE) 11	21012 0298	min. 55	R *						
1-10V DIM 15	300 90 124	min. 55	R *						
DALI DIM 14	300 90 125	min. 55	R *						
FINISH									
SPY TUBE	414 01 00 B/FBR/FG/MMAT/SG/W					R		R	
MIDISPY TUBE	414 03 00 B/FBR/FG/MMAT/SG/W			R	R				
MOUNTING KIT									
MOUNTING KIT FLUSH SPY	414 90 01		O						
INSTALLATION									
SUSPENSION + CONNECTION TRIMLESS	328 10 02			O	O	O	O	O	O
COVERSET R Ø100	204 00 100 B / W			O	O	O	O	O	O
HONEYCOMB / LENS / GLASS									
HONEYCOMB	413 03 01 B					A		A	
LINEAR SPREAD LENS	413 03 02					A		A	
SPREAD LENS	413 03 03					A		A	
SOFTENING LENS	413 03 04					A		A	
GLASS SBL	413 03 05					A		A	
LED LAMP MORE INFO TECHNICAL CHAPTERR							O		O

* REMOTE INSTALLATION

B

VIZIR / HEDRA

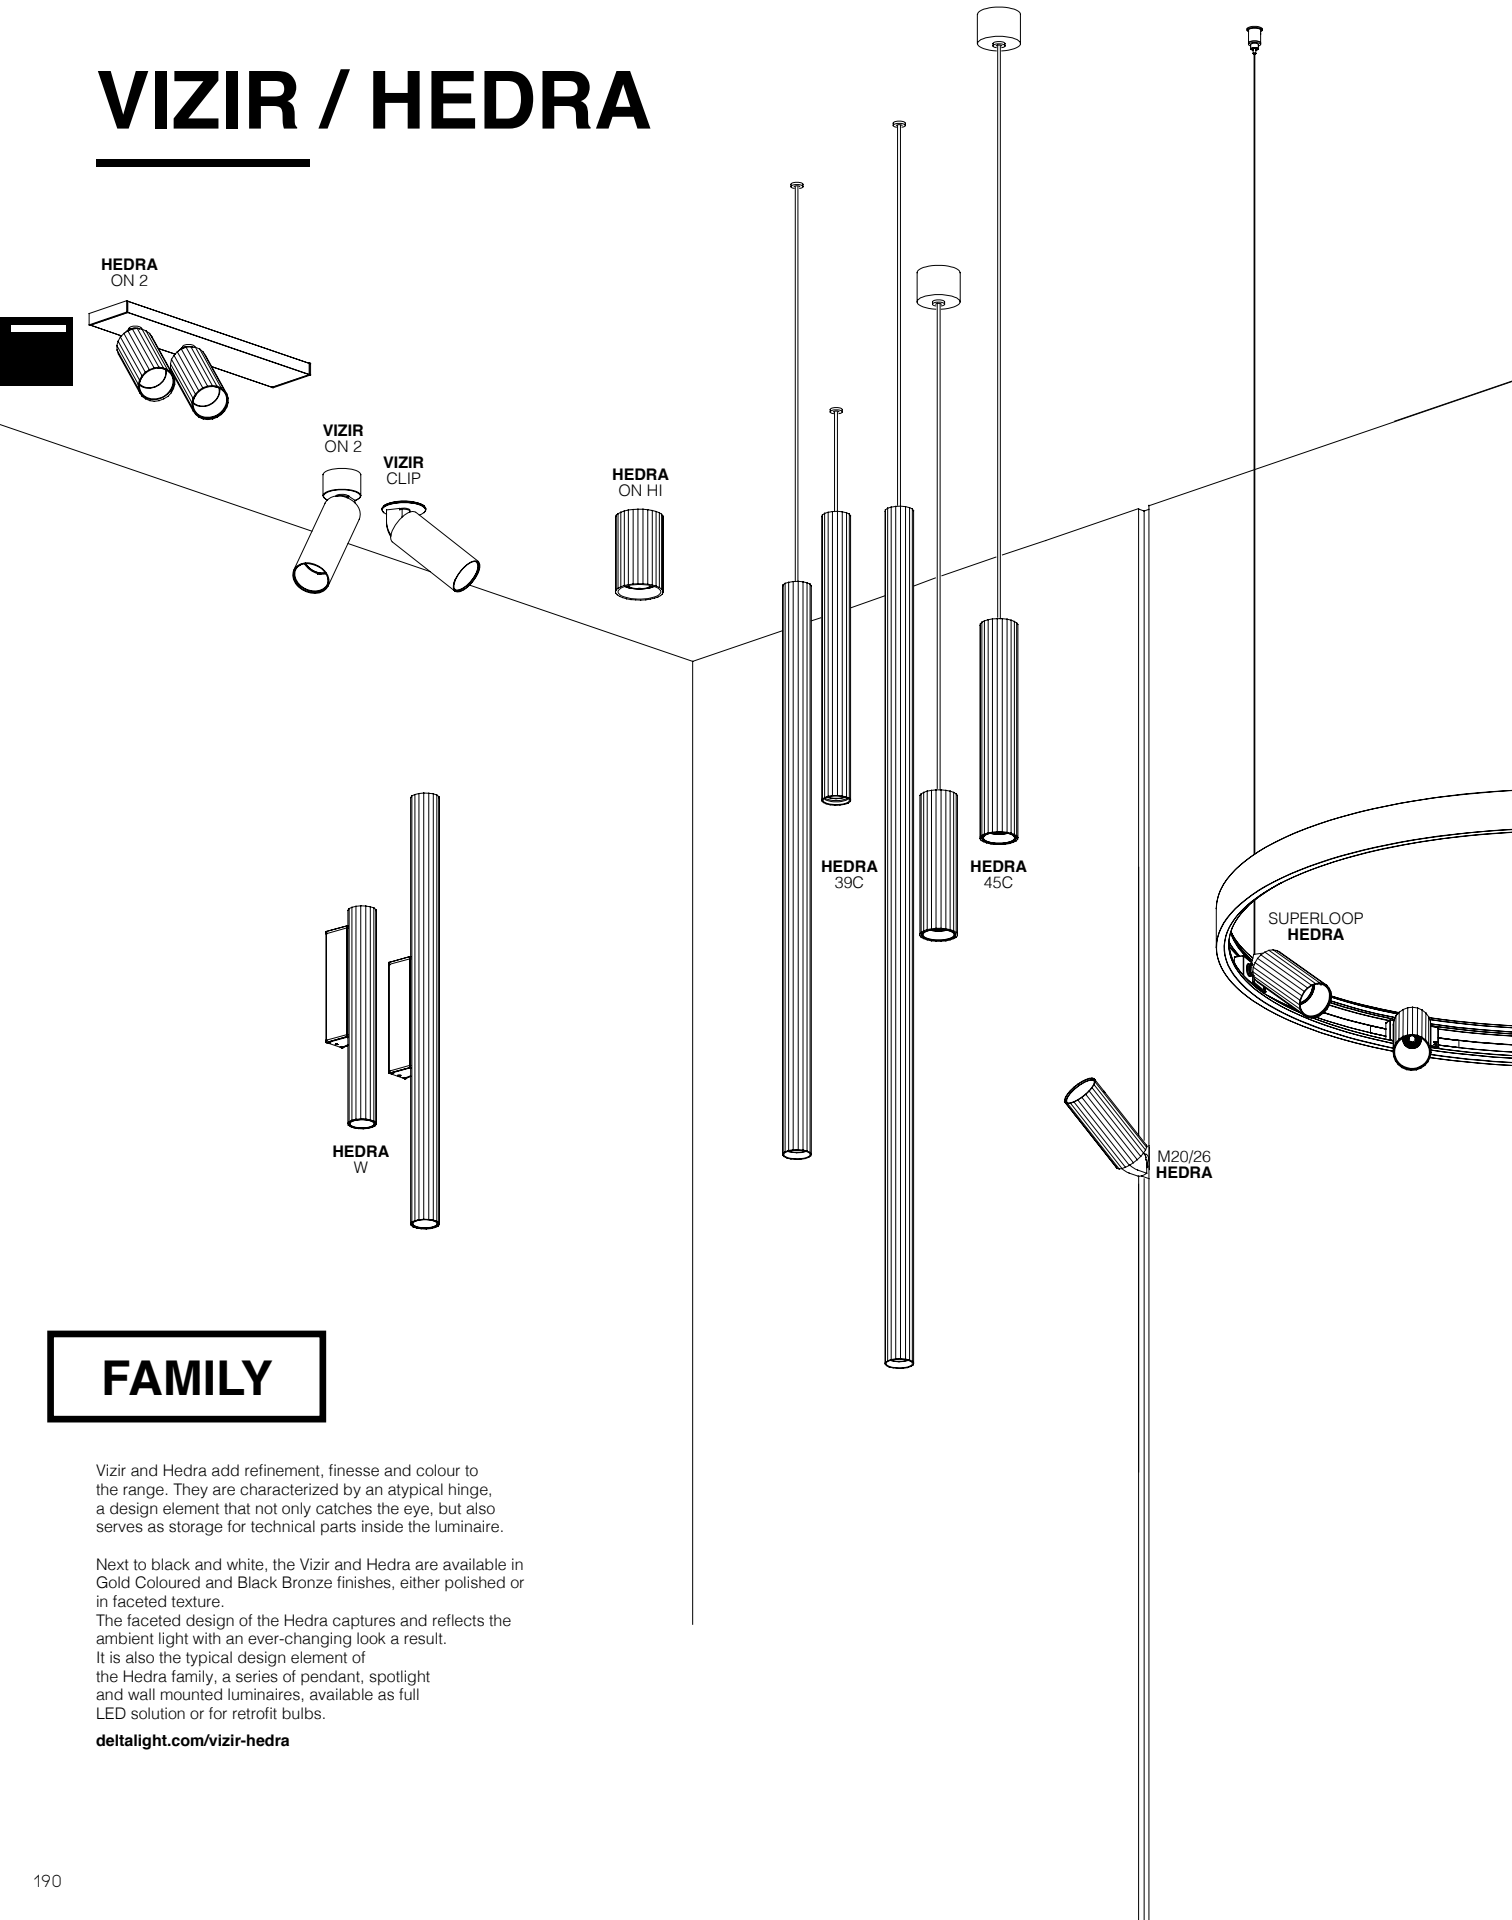

FAMILY

Vizir and Hedra add refinement, finesse and colour to the range. They are characterized by an atypical hinge, a design element that not only catches the eye, but also serves as storage for technical parts inside the luminaire.


Next to black and white, the Vizir and Hedra are available in Gold Coloured and Black Bronze finishes, either polished or in faceted texture.
The faceted design of the Hedra captures and reflects the ambient light with an ever-changing look a result.
It is also the typical design element of the Hedra family, a series of pendant, spotlight and wall mounted luminaires, available as full LED solution or for retrofit bulbs.

deltalight.com/vizir-hedra

A GLIMPSE OF ME
ON PAGE 10

C

FIND ME ONLINE

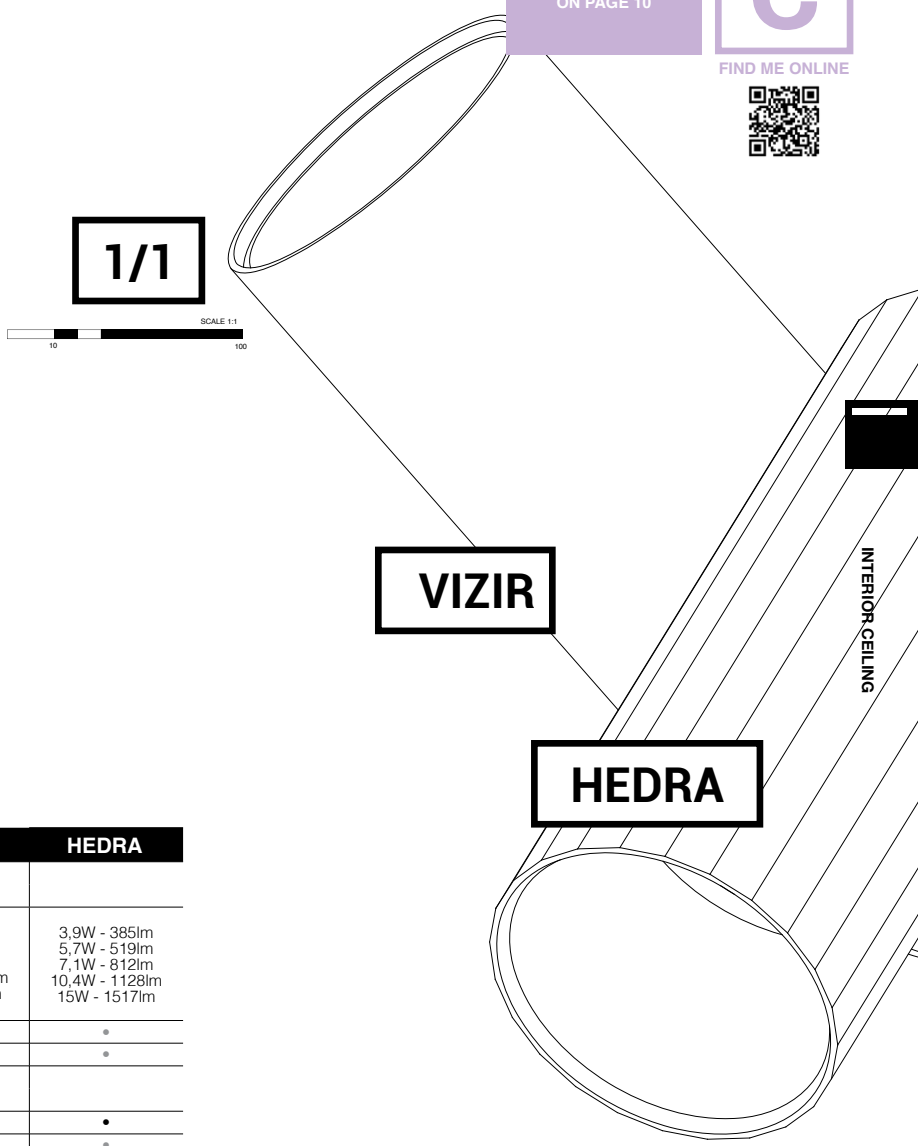

		VIZIR	HEDRA
LIGHT EFFECT			
LED		3,9W - 385lm 5,7W - 519lm 7,1W - 812lm 10,4W - 1128lm 15W - 1517lm	3,9W - 385lm 5,7W - 519lm 7,1W - 812lm 10,4W - 1128lm 15W - 1517lm
GU10			•
E27			•
OPTICS			
8°		•	•
24°			•
33°		•	•
40°			•
COLOUR TEMPERATURE			
2700K		•	•
3000K		•	•
CONTROL			
EXCL. POWER SUPPLY		•	•
NON DIM			•
MAINS DIM			•
1-10V DIM		•	•
DALI DIM		•	•
WIRELESS DIM		•	•
COLOUR			
WHITE		•	•
BLACK			•
BRUSHED BRONZE		•	•
GOLD COLOURED		•	•
INSTALLATION			
INTERIOR	SEMI-RECESSED	•	•
	SURFACE MOUNTED	•	•
	SUSPENDED CABLE		•
	WALL MOUNTED		•
	PROFILES	•	•
ACCESSORIES			
HONEYCOMB		•	•
SOFTNEING LENS		•	•


• STANDARD
• NOT FOR ALL VERSIONS

VIZIR - HEDRA CLIP / ON
The high-quality finishing on Hedra and Vizir instantly adds a touch of class to the room. The two installation possibilities - surface mounted or semi-recessed - allow to use these directable spotlights in any kind of application. Furthermore, the very slender base with integrated power supply of Vizir and Hedra 2 On bring extra flair and elegance.


VIZIR - HEDRA C
The pendants within Vizir and Hedra make you play with light and design.
By combining decorative E27 bulbs with integrated LED, short with longer tubes, Vizir and Hedra or Black Bronze finish with Gold Coloured, every set-up will be different and unique.

VIZIR / HEDRA


A




51 x 40



51 x 40





51 x 40





51 x 40

VIZIR / HEDRA				VIZIR CLIP	VIZIR L CLIP	HEDRA CLIP	HEDRA L CLIP
3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA	IP20	8°	**22528 9310** ◇		**22519 9310** ◇	
	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA LED [H] 15W / 1517lm / 700mA		33°	**473 111 811 932** ◇ *	**473 112 811 932** ◇	**473 211 811 932** ◇ *	**473 212 811 932** ◇
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA		8°	**22528 9210** ◇		**22519 9210** ◇	
	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA LED [H] 15W / 1456lm / 700mA		33°	**473 111 811 922** ◇ *	**473 112 811 922** ◇	**473 211 811 922** ◇ *	**473 212 811 922** ◇
* max. 500mA				◇ BBR-B ●● / GC-B ●● / W-W ○○		◇ B-B ●● / BBR-B ●● / GC-B ●● / W-W ○○	










VIZIR ON / HEDRA ON				VIZIR ON	VIZIR L ON	HEDRA ON	HEDRA L ON
3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA	IP20	8°	**22532 9310** ◇		**22525 9310** ◇	
	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA LED [H] 15W / 1517lm / 700mA		33°	**473 131 811 932** ◇ *	**473 132 811 932** ◇	**473 231 811 932** ◇ *	**473 232 811 932** ◇
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA		8°	**22532 9210** ◇		**22525 9210** ◇	
	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA LED [H] 15W / 1456lm / 700mA		33°	**473 131 811 922** ◇ *	**473 132 811 922** ◇	**473 231 811 922** ◇ *	**473 232 811 922** ◇
* max. 500mA				◇ BBR-B ●● / GC-B ●● / W-W ○○		◇ B-B ●● / BBR-B ●● / GC-B ●● / W-W ○○	


A GLIMPSE OF ME
ON PAGE 10

C

FIND ME ONLINE

Black, White, Gold Coloured or Black Bronze finishes, polished or in faceted texture

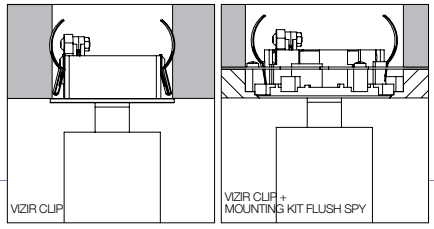

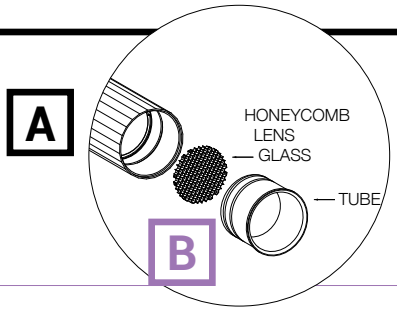


FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY							
			VIZIR		HEDRA		VIZIR		HEDRA	
			CLIP	L CLIP	CLIP	L CLIP	ON	L ON	ON	L ON
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R *	R *	R *	R *	R *
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R *	R *	R *	R *	R *	R *
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R *	R *	R *	R *	R *	R *
FINISH										
VIZIR TUBE	**473 01 00 B / FBR / FG / W**		R	R	R	R	R	R	R	R
MOUNTING KIT										
MOUNTING KIT FLUSH SPY	**414 90 01**		O	O	O	O				
INSTALLATION										
COVERSET R Ø100	**204 00 100 B / W**						O	O	O	O
HONEYCOMB / LENS / GLASS										
HONEYCOMB	**473 03 01 B**		A	A	A	A	A	A	A	A
SOFTENING LENS	**473 03 04**		A	A	A	A	A	A	A	A


* REMOTE INSTALLATION

B


VIZIR / HEDRA









VIZIR ON / HEDRA ON				VIZIR ON 2	HEDRA ON 2	HEDRA 62 ON Hi
3000K CRI>90	2 x LED 7.1W / 812lm / 350mA	1-10V	33°	**473 131 812 932 ED1** ◇	**473 231 812 932 ED1** ◇	
2700K CRI>90	2 x LED 7.1W / 779lm / 350mA			**473 131 812 922 ED1** ◇	**473 231 812 922 ED1** ◇	
	QPAR51 max.10W					**472 331 00** ◇
				◇ B-B ● ● / BBR-B ● ● / GC-B ● ● / W-W ○ ○ (B-B ONLY FOR HEDRA)		◇ B ● / BBR ● / GC ● / W ○
				220-240V / 50-60Hz		GU10 / 100-240V / 50-60Hz
				IP20		IP20 0,5








HEDRA				39 C			45 C		45 C E27	
				400mm	800mm	1200mm	195mm	300mm	150mm	300mm
3000K CRI>90	LED 7.1W / 812lm / 350mA		45°	**472 121 811 931** ◇	**472 122 811 931** ◇	**472 123 811 931** ◇				
	LED 6.4W / 587lm / 350mA	MAINS	40°				**472 221 932 ED8** ◇	**472 222 932 ED8** ◇		
2700K CRI>90	LED 7.1W / 779lm / 350mA		45°	**472 121 811 921** ◇	**472 122 811 921** ◇	**472 123 811 921** ◇	**472 221 922 ED8** ◇	**472 222 922 ED8** ◇		
	1 x A60 max.20W								**472 221 01** ◇	**472 222 01** ◇
				◇ B ● / BBR ● / GC ● / W ○						
				220-240V / 50-60Hz					E27Ls / 100-240V / 50-60Hz	
				INCL.1 x CABLE 2 x 0.75mm² / 1.6m					INCL.1 x CABLE 2 x 0.75mm² / 1.6m	

A

deltalight.com/vizir-hedra

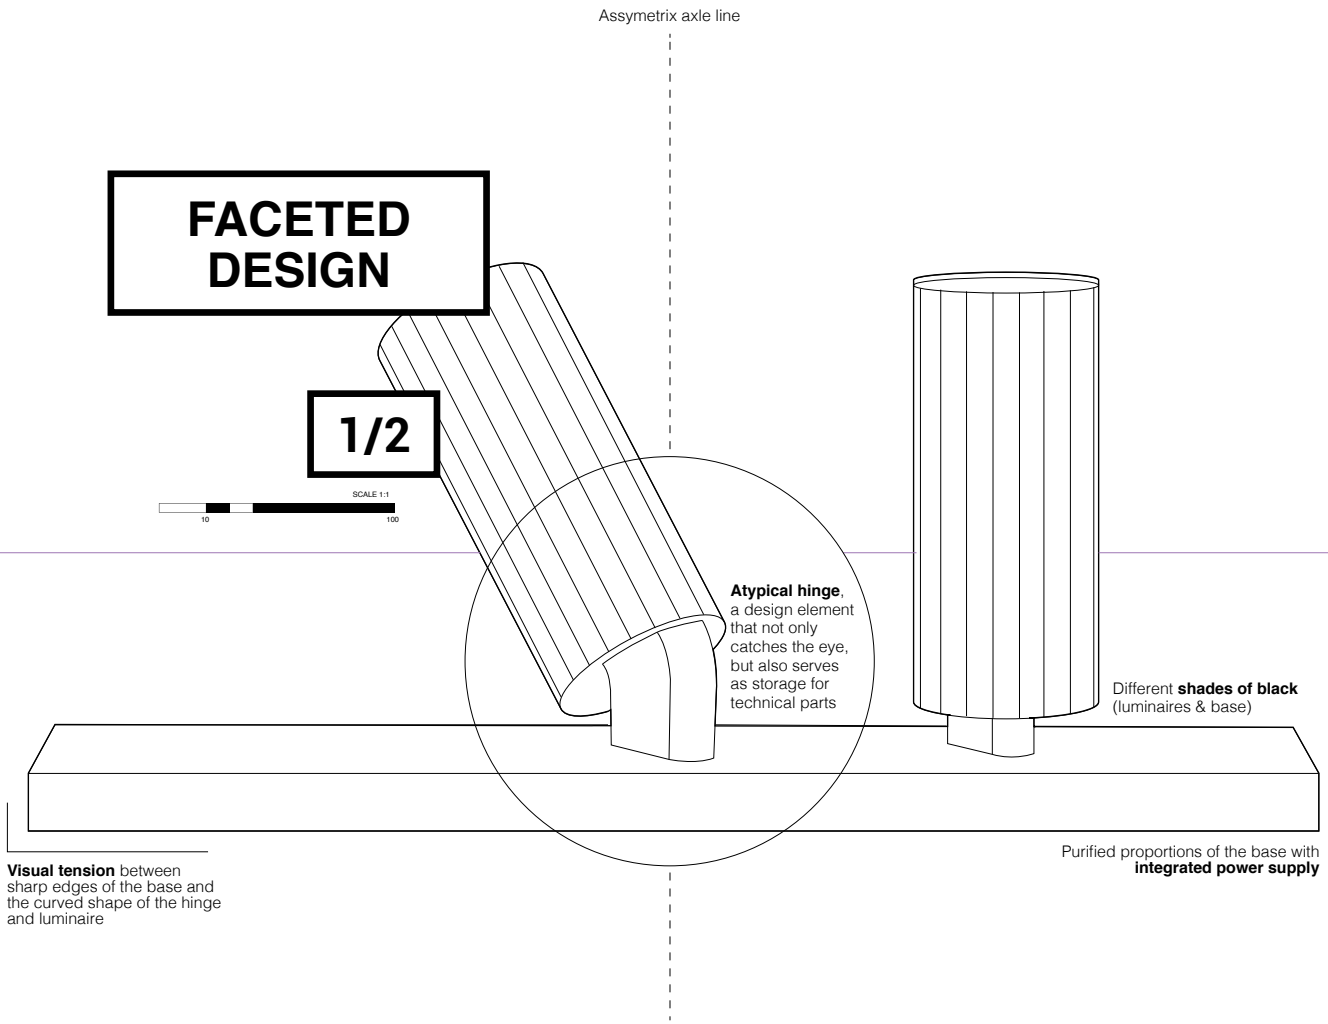


FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY					
		VIZIR	HEDRA				
		ON 2	ON 2	62 ON Hi	39 C	45 C	45 C E27
FINISH							
VIZIR TUBE	**473 01 00 B/FBR/FG/W**	R	R				
MIDISPY TUBE	**414 03 00 B/FBR/FG/MMAT/SG/W**					R	
INSTALLATION							
CONNECTION TRIMLESS	**328 10 03**				O	O	O
HONEYCOMB / LENS / GLASS							
HONEYCOMB	**473 03 01 B**	A	A				
SOFTENING LENS	**473 03 04**	A	A				
LED LAMP MORE INFO TECHNICAL CHAPTERR				O			O

B


OCTAV

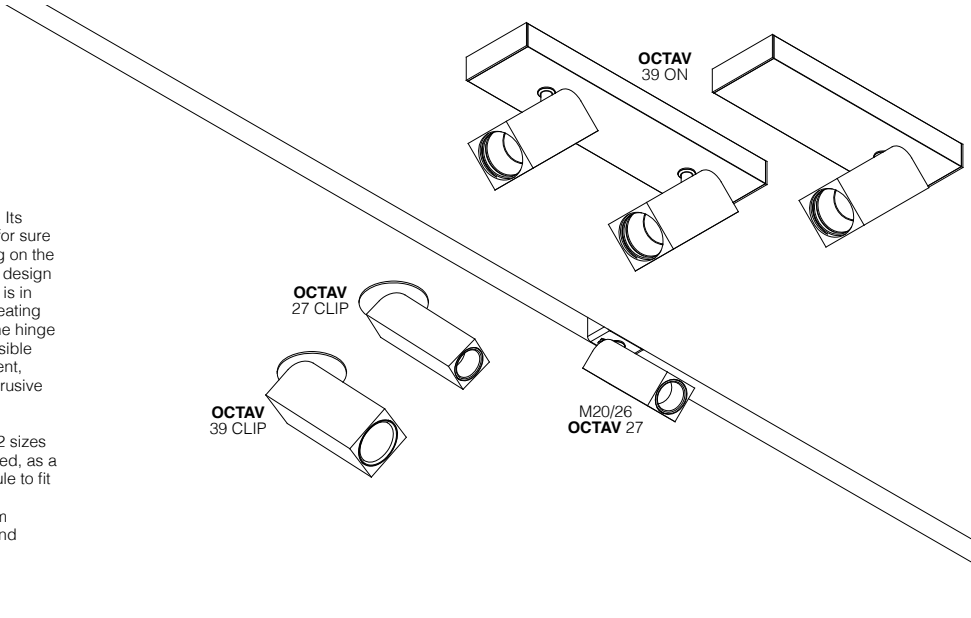


However you look at it, Octav draws the attention. Its design catches the eye, and after a first glimpse for sure you will be intrigued to look at it again. Depending on the inclination angle of the adjustable spotlight, other design elements stand out. Be it the squared design that is in complete contrast with the rounded back part, creating some visual tension. Or be it the details on how the hinge is being camouflaged inside the body, nearly invisible yet very functional. Or be it the optical compartment, hidden away comfortably into the spotlight, unobtrusive for the eye.

As an extreme flexible spotlight, Octav comes in 2 sizes and multiple installation possibilities: semi-recessed, as a single or double surface mounted unit or as module to fit into our magnetic profiles.
With up to 5 different finishing colours and 3 beam angles, Octav is highly applicable in residential and hospitality surroundings.

deltalight.com/octav





NEW

OCTAV


43 x 40


43 x 40

				27 CLIP	39 CLIP
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	30°	**29011 9320** ◇	
	LED [U] 5.8W / 787lm / 350mA LED [U] 8.6W / 1089lm / 500mA		20°		**29016 9320** ◇
			40°		**29016 9330** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA		30°	**29011 9220** ◇	
	LED [U] 5.8W / 753lm / 350mA LED [U] 8.6W / 1041lm / 500mA		20°		**29016 9220** ◇
			40°		**29016 9230** ◇

*Selection by DIP switch on internal driver

◇ B-B / FBR-B / FG-B / GC-B / W-W





NEW

OCTAV

				39 ON 1	39 ON 2
3000K CRI>90	1 or 2x LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA *	MAINS	20°	**29018 9328** ◇	**29019 9328** ◇
			40°	**29018 9338** ◇	**29019 9338** ◇
2700K CRI>90	1 or 2x LED 5.8W / 753lm / 350mA * LED 8.6W / 1041lm / 500mA *		20°	**29018 9228** ◇	**29019 9228** ◇
			40°	**29018 9238** ◇	**29019 9238** ◇


*Selection by DIP switch on internal driver

◇ B-B / W-W

220-240V / 50-60Hz

IP20

INVISIBLE HINGE

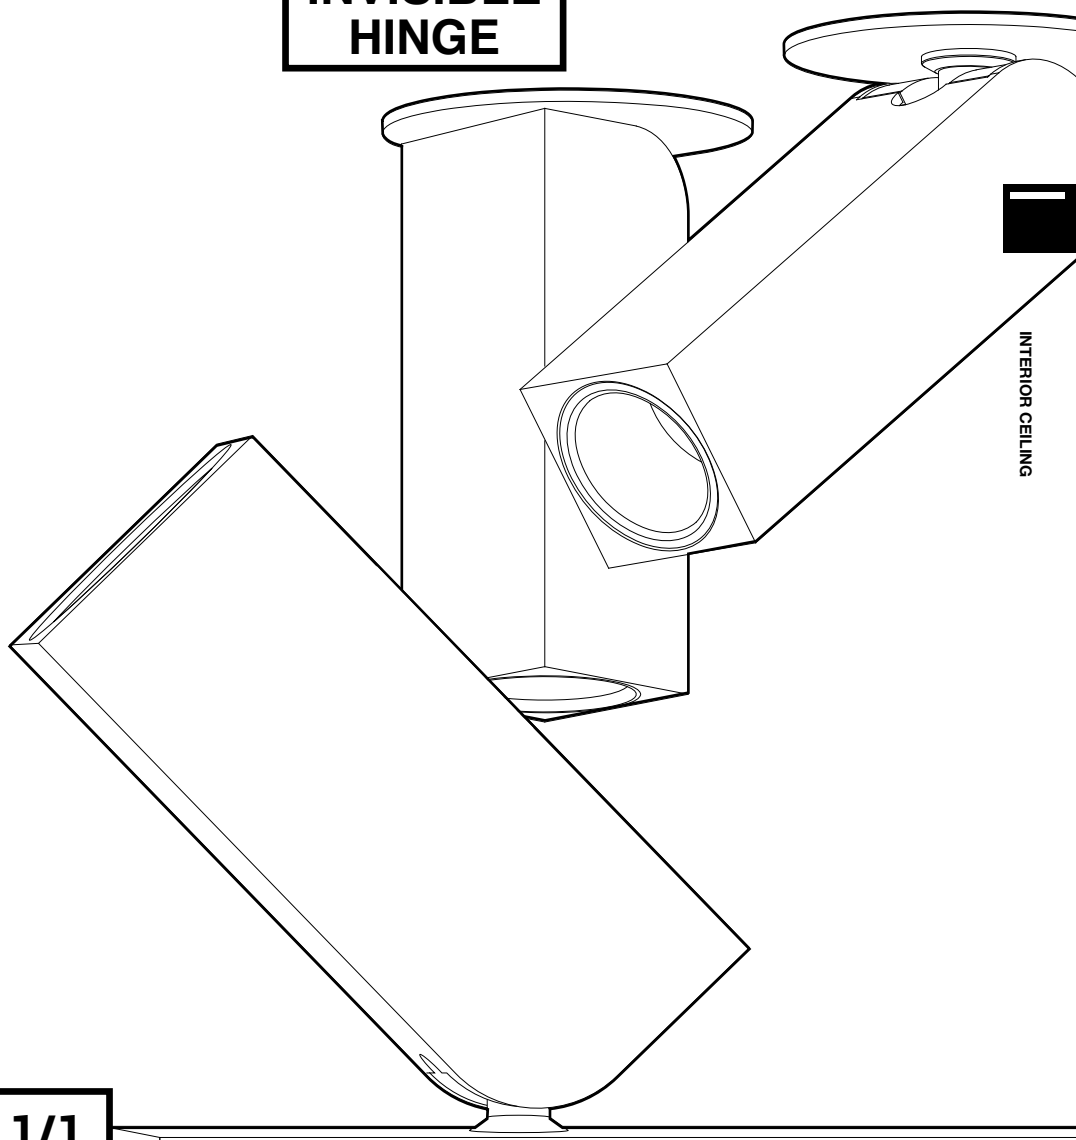

INTERIOR CEILING

1/1

SCALE 1:1
10 100

VISUAL TENSION

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			OCTAV			
			27 CLIP	39 CLIP	39 ON 1	39 ON 2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R		
1-10V DIM 15	**300 90 124**	min. 55	R	R		
DALI DIM 14	**300 90 125**	min. 55	R	R		
FINISH						
SPY 39 L TUBE	**24144 0020 B / FBR / FG / GC / W**			R	R	R


NEEDLE


Design by **NITEO LIGHTING** & Delta Light


The slender shape of the Needle family brings a touch of elegance into any project. Slim tubes, just carelessly hanging down from the ceiling or cleverly peeking around to throw a highlight wherever needed. Combine multiple fixtures to create playful clusters or use it as a single luminaire in all its simplicity, surface mounted or as module to put on our magnetic profiles.


deltalight.com/needle

A











NEEDLE				1 TRC	1 OK TRC	1	1 OK
3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA LED [E] 8.2W / 677lm / 700mA	IP20	13°	**25014 9310** ◇	**25015 9310** ◇ *	**25010 9310** ◇	**25011 9310** ◇ *
			33°	**25014 9320** ◇	**25015 9320** ◇ *	**25010 9320** ◇	**25011 9320** ◇ *
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.7W / 519lm / 500mA LED [E] 8.2W / 677lm / 700mA		13°	**25014 9210** ◇	**25015 9210** ◇ *	**25010 9210** ◇	**25011 9210** ◇ *
			33°	**25014 9220** ◇	**25015 9220** ◇ *	**25010 9220** ◇	**25011 9220** ◇ *

* max. 500mA

◇ BBR ● / FG ●

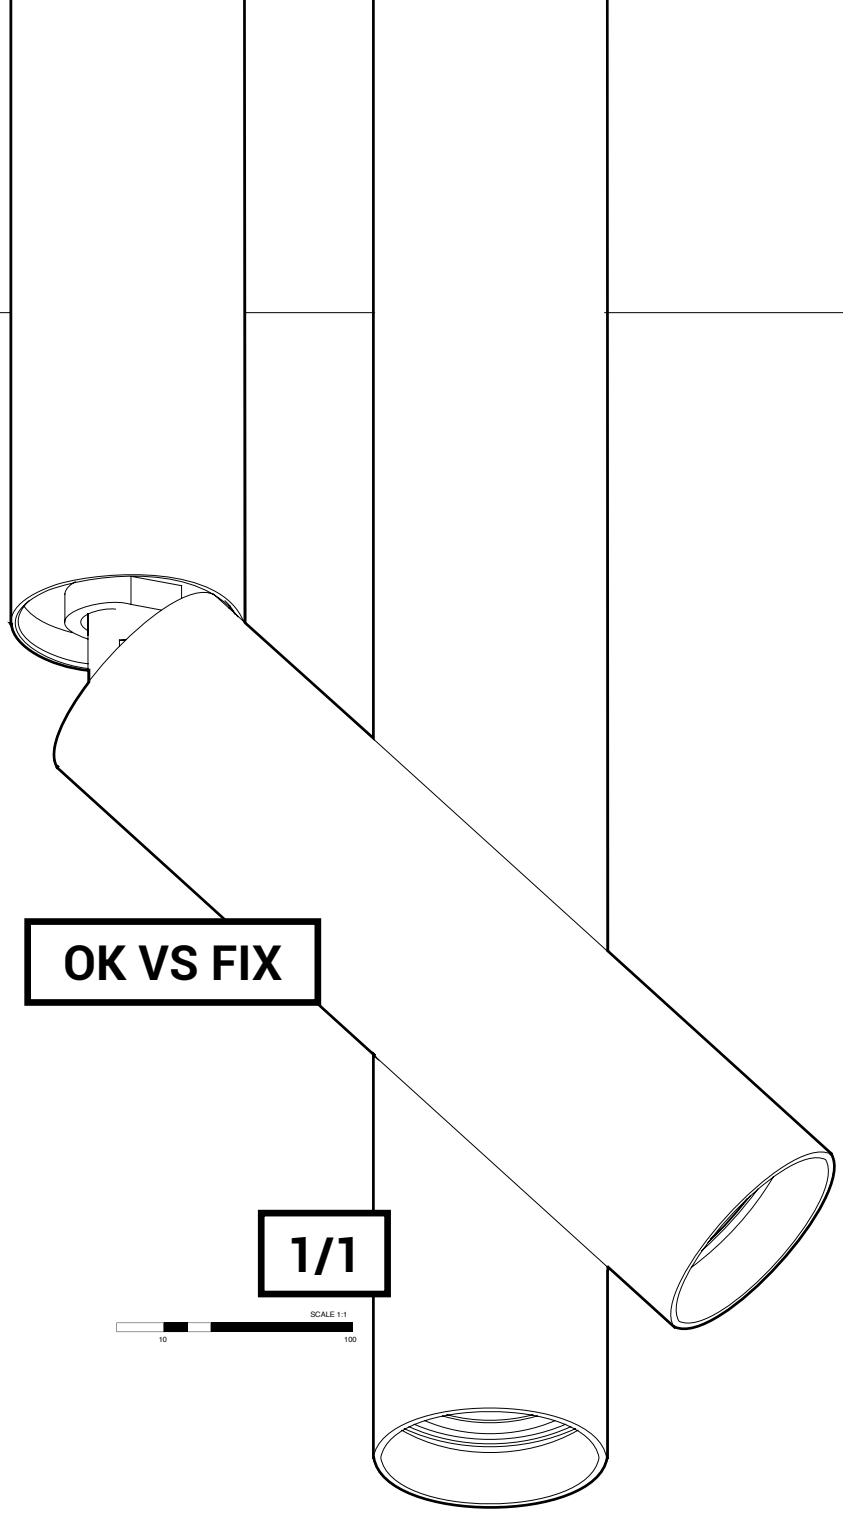

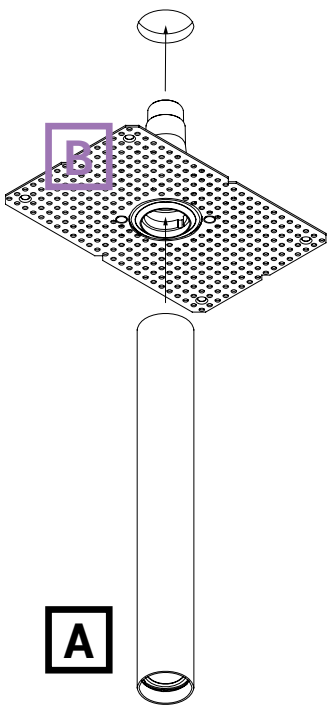

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			NEEDLE			
			1 TRC	1 OK TRC	1	1 OK
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R *
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R *	R *
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R *	R *
INSTALLATION						
CONCRETE / PLASTERBOARD	**328 10 03**		R	R		

* REMOTE INSTALLATION


B

BOXY

What once began as a cubic luminaire is now an elaborate family of surface mounted luminaires, both cubic and cylindrical shaped. Though different in shape they are still uniform in look, as both shapes have a deeper recessed LED module with a conical, coloured insert in front. While the deeper recessed LED module reduces the glare, the choice in colour creates possibilities for playful and attractive lighting solutions. Alongside the different shapes, this family offers indoor and outdoor luminaires, a perfect solution when recessing is not an option. Furthermore, the WDL versions of Boxy are standalone luminaires for an easy wireless CTRL Delta lighting set-up.


deltalight.com/boxy

FAMILY

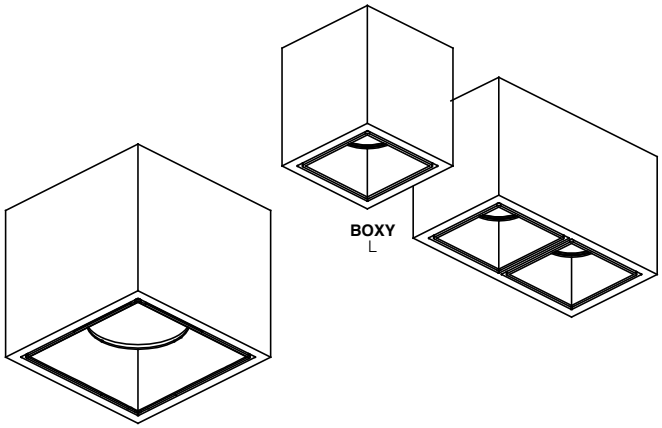

BOXY
L


BOXY
XL S

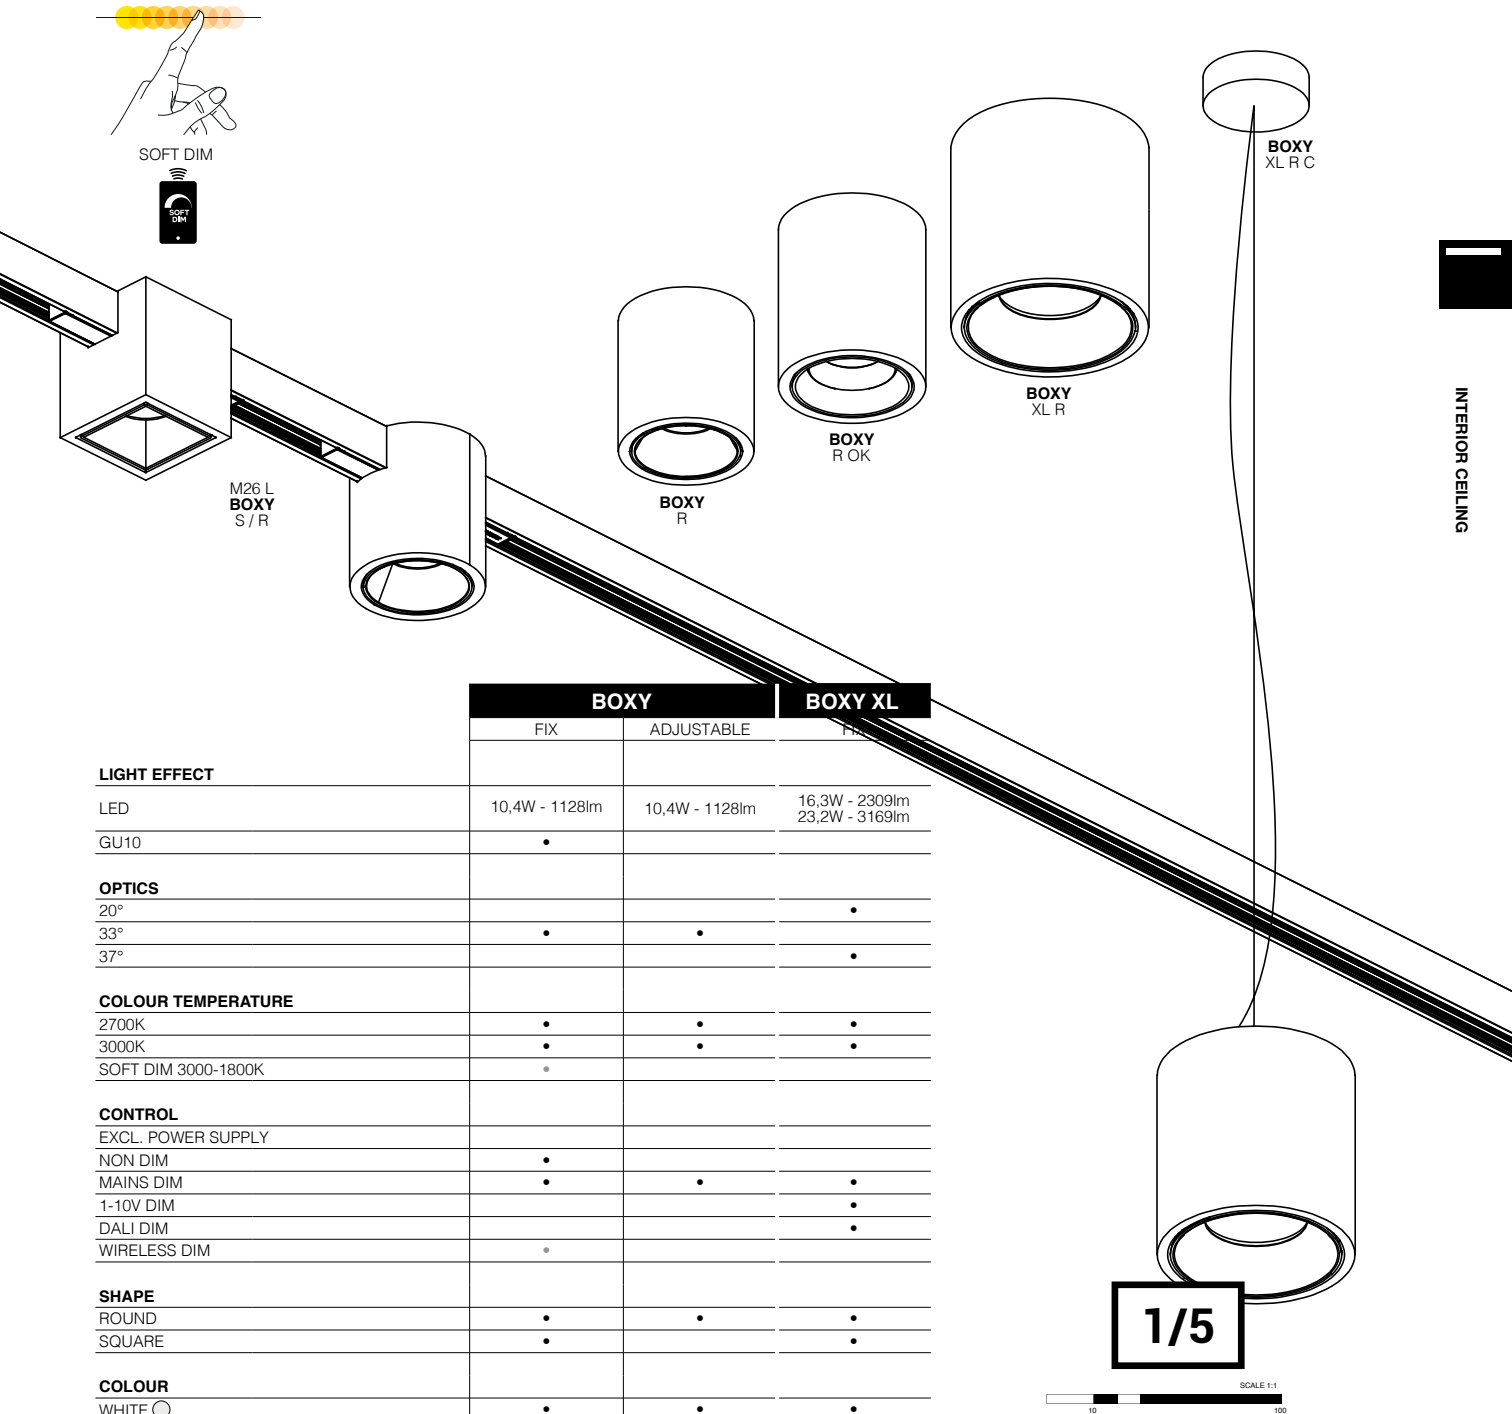



		BOXY		BOXY XL
		FIX	ADJUSTABLE	FIX
LIGHT EFFECT				
LED		10,4W - 1128lm	10,4W - 1128lm	16,3W - 2309lm 23,2W - 3169lm
GU10		•		
OPTICS				
20°				•
33°		•	•	
37°				•
COLOUR TEMPERATURE				
2700K		•	•	•
3000K		•	•	•
SOFT DIM 3000-1800K		•		
CONTROL				
EXCL. POWER SUPPLY				
NON DIM		•		
MAINS DIM		•	•	•
1-10V DIM				•
DALI DIM				•
WIRELESS DIM		•		
SHAPE				
ROUND		•	•	•
SQUARE		•		•
COLOUR				
WHITE		•	•	•
WHITE-BLACK		•	•	•
BLACK		•	•	•
BLACK-GOLD MATT		•	•	
BLACK-FLEMISH GOLD		•		
BLACK-FLEMISH BRONZE		•		
INSTALLATION				
INTERIOR	SURFACE MOUNTED	•	•	•
	SUSPENDED CABLE			•
	PROFILES	•		
EXTERIOR	SURFACE MOUNTED	•		

• STANDARD
• NOT FOR ALL VERSIONS


BOXY R








BOXY					R		R WDL	R OK	R Hi
3000K CRI>90	10.4W / 1128lm / 500mA	IP40	NON DIM	33°	**251 70 811 932** ◇				
		IP53	MAINS			**251 70 811 932 ED8** ◇			
		IP20	MAINS					**251 77 811 932 ED8** ◇	
	10.4W / 1128lm / 48V-DC	IP20	WIRELESS				**251 70 811 932 WDL** ◇		
2700K CRI>90	10.4W / 1083lm / 500mA	IP40	NON DIM		**251 70 811 922** ◇				
		IP53	MAINS			**251 70 811 922 ED8** ◇			
		IP20	MAINS					**251 77 811 922 ED8** ◇	
	10.4W / 1083lm / 48V-DC	IP20	WIRELESS				**251 70 811 922 WDL** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA	IP20	MAINS	45°		NEW **10745 9038** ◇			
	1 x QPAR51 max.35W	IP20							**279 72 20** ◇
			FOR WIRELESS		◇ B-B / B-MMAT / W-B / W-W ADDITIONAL FOR MAINS & WIRELESS ◇ B-FBR / B-FG				◇ W
					110-240V / 50-60Hz	220-240V / 50-60Hz	INCL. CONVERTER 48V-DC TO 500mA	220-240V / 50-60Hz	GU10 / 100-240V / 50-60Hz
									0,5





BOXY XL					R	R DIM1	R DIM5	R C
3000K CRI>90	16.3W / 2309lm / 500mA	IP20	MAINS	20°	**251 71 21 931** ◇			**251 73 21 931** ◇
				37°	**251 71 21 933** ◇			**251 73 21 933** ◇
			DALI	20°			**10722 9315** ◇	
				37°			**10722 9335** ◇	
	23.2W / 3169lm / 700mA		1-10V	20°		**251 71 21 931 ED1** ◇		
				37°		**251 71 21 933 ED1** ◇		
2700K CRI>90	16.3W / 2209lm / 500mA		MAINS	20°	**251 71 21 921** ◇			**251 73 21 921** ◇
				37°	**251 71 21 923** ◇			**251 73 21 923** ◇
			DALI	20°			**10722 9215** ◇	
				37°			**10722 9235** ◇	
	23.2W / 3031lm / 700mA		1-10V	20°		**251 71 21 921 ED1** ◇		
				37°		**251 71 21 923 ED1** ◇		
					◇ B-B / W-B / W-W			
					220-240V / 50-60Hz	120-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz INCL.1 x CABLE 2 x 0,75mm² INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m

A GLIMPSE OF ME
ON PAGE 20

C

FIND ME ONLINE

WDL

CTRL DELTA


READ MY COLOUR

OUTER COLOUR
B

B-MMAT

INNER COLOUR
MMAT

FIX VS OK



1/1

SCALE 1:1
10 100


B


FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY							
			BOXY				BOXY XL			
			R	R WDL	R OK	R Hi	R	R DIM1	R DIM5	R C
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR										
NON DIM 48V-DC / 100W / DIN	**300 89 48 100**	100 x 55 x 90		R						
HONEYCOMB / LENS / GLASS (NOT FOR SOFT DIM)										
HONEYCOMB	**251 70 03 01 B / W**		A	A						
	201 02 01 B						A	A	A	A
SOFTENING LENS	**251 70 03 04 B / W**		A	A						
	201 02 04						A	A	A	A
GLASS SBL	**251 70 03 05 B / W**		A	A						
	201 02 05						A	A	A	A
LED LAMP MORE INFO TECHNICAL CHAPTERR						O				

BOXY

A








BOXY L

					L	WDL	2L	HI
3000K CRI>90	7.1W / 812lm / 350mA	IP20	MAINS	33°	**10726 9328** ◇			
			WIRELESS			**251 67 811 932 WDL** ◇		
	2 x 7.1W / 812lm / 350mA		MAINS				**10727 9328** ◇	
2700K CRI>90	7.1W / 779lm / 350mA		MAINS		**10726 9228** ◇			
			WIRELESS			**251 67 811 922 WDL** ◇		
	2 x 7.1W / 779lm / 350mA		MAINS				**10727 9228** ◇	
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA		MAINS	45°	**10744 9038** ◇			
	QPAR51 max.50W			-				**251 67 20** ◇
					◇ B-B / B-FBR / B-FG / B-MMAT / W-W			◇ B / W (max.35W)
					220-240V / 50-60Hz	INCL. CONVERTER 48V-DC TO 350mA	220-240V / 50-60Hz	GU10 / 100-240V / 50-60Hz

FOR WIRELESS

CTRL DELTA




BOXY XL

					S	S DIM1	S DIM5
3000K CRI>90	16.3W / 2309lm / 500mA	IP20	MAINS	20°	**251 72 21 931** ◇		
				37°	**251 72 21 933** ◇		
			DALI	20°			**10723 9315** ◇
				37°			**10723 9335** ◇
	23.2W / 3169lm / 700mA		1-10V	20°		**251 72 21 931 ED1** ◇	
				37°		**251 72 21 933 ED1** ◇	
2700K CRI>90	16.3W / 2209lm / 500mA		MAINS	20°	**251 72 21 921** ◇		
				37°	**251 72 21 923** ◇		
			DALI	20°			**10723 9215** ◇
				37°			**10723 9235** ◇
	23.2W / 3031lm / 700mA		1-10V	20°		**251 72 21 921 ED1** ◇	
				37°		**251 72 21 923 ED1** ◇	
					◇ B-B / W-B / W-W		
					220-240V / 50-60Hz		

A GLIMPSE OF ME
ON PAGE 20

C

FIND ME ONLINE

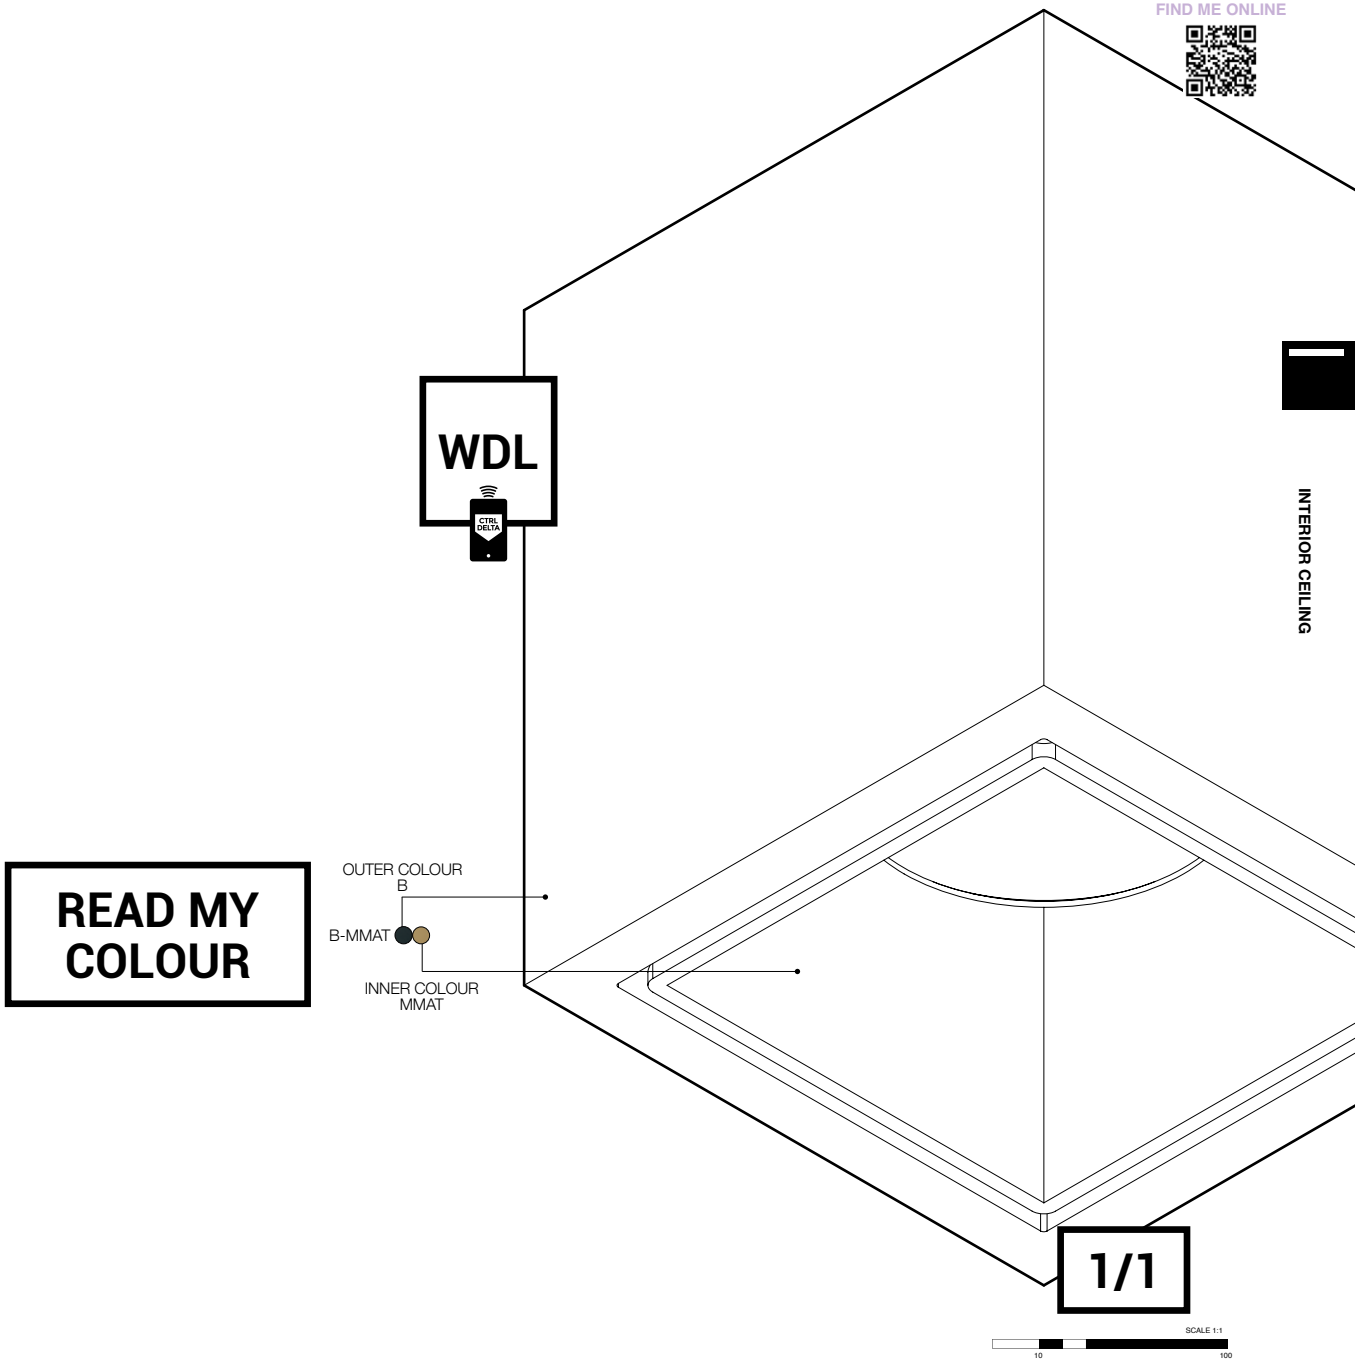

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY						
			BOXY L				BOXY XL		
			L	WDL	2L	HI	S	S DIM1	S DIM5
LED POWER SUPPLY MORE INFO IN TECNICAL CHAPTER									
NON DIM 48V-DC / 100W / DIN	**300 89 48 100**	100 x 55 x 90		R					
HONEYCOMB / LENS / GLASS									
HONEYCOMB	**251 70 03 01 B / W**		A *	A *					
	201 02 01 B						A *	A *	A *
SOFTENING LENS	**251 70 03 04 B / W**		A *	A *					
	201 02 04						A *	A *	A *
GLASS SBL	**251 70 03 05 B / W**		A *	A *					
	201 02 05						A *	A *	A *
LED LAMP MORE INFO TECHNICAL CHAPTERR						O			

* NOT FOR SOFT DIM


B

DOT.COM

FAMILY

First introduced in 2004 as a single LED luminaire, upscaled in 2008 as a multiple LED luminaire with 4 or 6 LED dots, implemented in the profile section in 2010 as a module with 4 or 6 LEDs, the history of Dot.Com within the Delta Light range goes way back. With LEDs being utterly functional and performant nowadays, Dot.Com is up to its second revival, coming as a complete family of luminaires with multiple LED dots to create the most discreet, yet highly functional light settings.

deltalight.com/dotcom

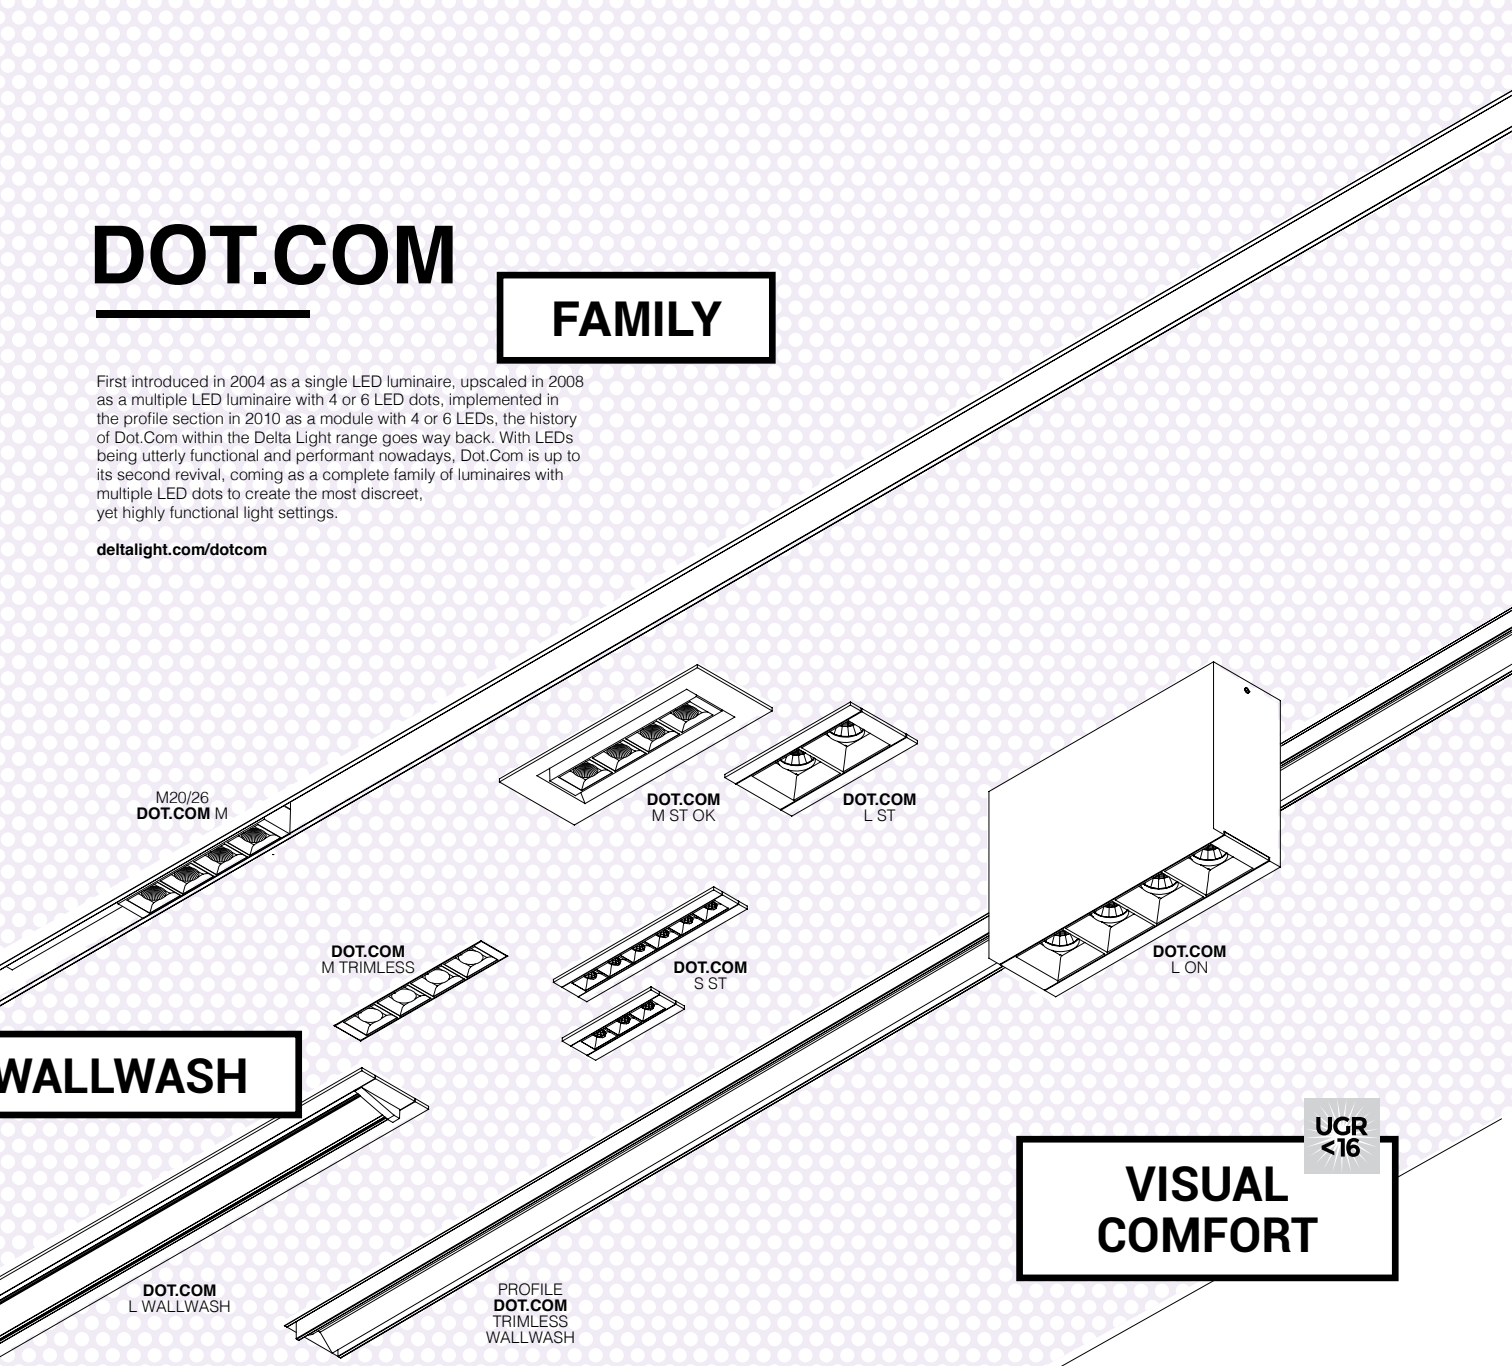

WALLWASH

UGR <16

VISUAL COMFORT

DOT.COM S
The Small version only needs 25mm of width, a nearly invisible appearance yet with visible impact.

DOT.COM M
The Medium range includes an adjustable version with trim and a trimless solution. The adjustable Dot.Com M – with tilting possibility up to 30° - is ideal for instance to emphasize an artwork on the wall. The specific design of the trimless luminaire grants the opportunity to install it either completely into the ceiling or semi-recessed, to evoque more expression into the room.


DOT.COM L
With an output up to 12W per luminaire, the Large range is the most powerful within the Dot.Com series. The Large version is the only version within the Dot.Com range that also offers surface mounted alternatives. Similar as for recessed installation, Dot.Com L brings a 2 LED and a 4 LED version within a compact design. With its low glare - thanks to the combination of individual reflectors per LED - Dot.Com L is perfectly applicable for office use.




		DOT.COM S	DOT.COM M		DOT.COM L	
		FIX	FIX	ADJUSTABLE	FIX	WALLWASH
LIGHT EFFECT						
LED		3W - 303lm 6W - 606lm	5,6W - 628lm	5,6W - 628lm	6,2W - 592lm 12,4W - 1184lm	10W - 1000lm 12,8W - 1500lm 18,4W - 2200lm 25,2W - 3000lm
OPTICS						
14°			•	•		
16°					•	
32°					•	
33°			•	•		
34°		•				
46°					•	
49°			•	•		
59°		•				
WALLWASH						•
COLOUR TEMPERATURE						
2700K		•	•	•	•	•
3000K		•	•	•	•	•
CONTROL						
EXCL. POWER SUPPLY		•	•	•	•	•
NON DIM						◦
MAINS DIM					◦	
1-10V DIM						
DALI DIM						
WIRELESS DIM						
COLOUR						
WHITE		•	•	•	•	•
WHITE-BLACK		•	•	•	•	•
WHITE-CHROME		•	•	•	•	•
WHITE-GOLD MATT		•	•	•	•	•
GOLD MATT		•	•	•	•	•
BLACK		•	•	•	•	•
BLACK-GOLD MATT		•		•		•
BLACK-CHROME		◦				
CHROME		◦				
INSTALLATION						
INTERIOR	RECESSED	•		•	•	•
	RECESSED TRIMLESS		•			
	SURFACE MOUNTED				•	•
	PROFILES		•			•
MOUNTING KITS						
CSC (COLD STRETCHED CEILING)			◦			
WSC (WARM STRETCHED CEILING)			◦			


• STANDARD
◦ NOT FOR ALL VERSIONS

DOT.COM

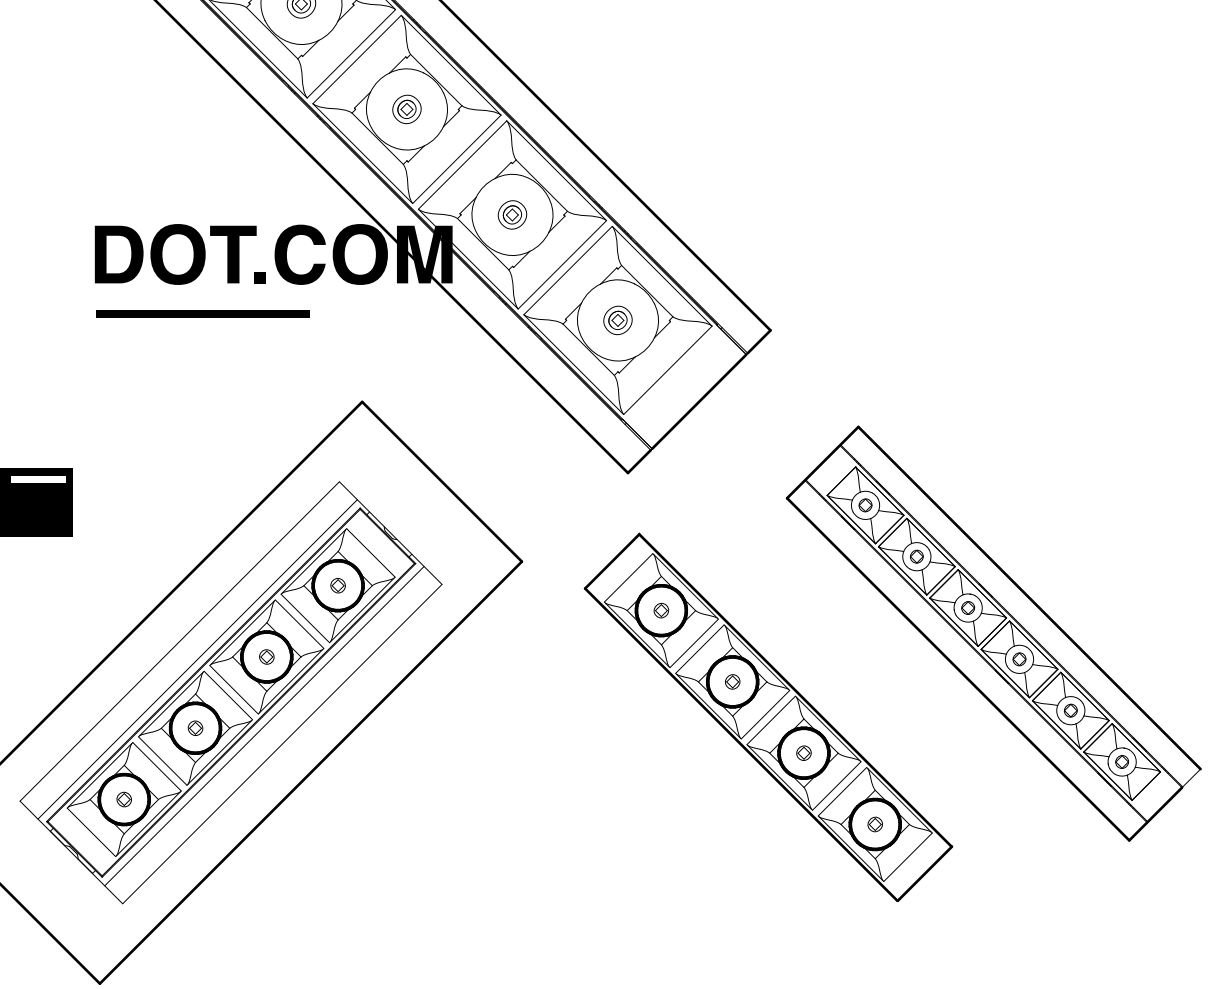




58 x 20 x 50 / min.8




112 x 20 x 50 / min.8

DOT.COM S			UGR <16	S3 ST	S6 ST
3000K CRI>90	LED 3,1W / 341lm / 350mA	IP20	34°	**424 211 03 932** ◇	
			59°	**424 211 03 933** ◇	
	LED 6,1W / 683lm / 350mA		34°		**424 211 06 932** ◇
			59°		**424 211 06 933** ◇
2700K CRI>90	LED 3,1W / 333lm / 350mA		34°	**424 211 03 922** ◇	
			59°	**424 211 03 923** ◇	
	LED 6,1W / 665lm / 350mA		34°		**424 211 06 922** ◇
			59°		**424 211 06 923** ◇
				◇ B-B ● ● / W-B ○ ●	

A




KIT x 60




136 x 40 x 58 / max.25

DOT.COM M			UGR <16	M4 TRIMLESS	M4 ST OK
3000K CRI>90	LED 5,7W / 648lm / 500mA	IP20	14°	**424 512 04 931** ◇	**424 222 04 931** ◇
			33°	**424 512 04 932** ◇	**424 222 04 932** ◇
			49°	**424 512 04 933** ◇	**424 222 04 933** ◇
2700K CRI>90	LED 5,7W / 631lm / 500mA		14°	**424 512 04 921** ◇	**424 222 04 921** ◇
			33°	**424 512 04 922** ◇	**424 222 04 922** ◇
			49°	**424 512 04 923** ◇	**424 222 04 923** ◇
				◇ B ● / C ● / MMAT ●	◇ B-B ● ● / W-B ○ ● / B-C ● ● / B-MMAT ● ● / W-C ○ ● / W-MMAT ○ ●

deltalight.com/dotcom




84 x 40 x 62 / max.30




158 x 40 x 62 / max.30

DOT.COM L


			UGR <16	L2 ST	L4 ST
3000K CRI>90	LED 6,3W / 613lm / 1050mA	IP20	16°	**424 213 02 931** ◇	
			32°	**424 213 02 932** ◇	
			46°	**424 213 02 933** ◇	
	LED 12,6W / 1226lm / 1050mA		16°		**424 213 04 931** ◇
			32°		**424 213 04 932** ◇
			46°		**424 213 04 933** ◇
2700K CRI>90	LED 6,3W / 597lm / 1050mA		16°	**424 213 02 921** ◇	
			32°	**424 213 02 922** ◇	
			46°	**424 213 02 923** ◇	
	LED 12,6W / 1194lm / 1050mA		16°		**424 213 04 921** ◇
			32°		**424 213 04 922** ◇
			46°		**424 213 04 923** ◇
				◇ B-B / B-C / B-MMAT / W-B / W-C / W-MMAT	





DOT.COM L ON

				UGR <16	L2 ON	L4 ON
3000K CRI>90	LED 4,1W / 436lm / 700mA	MAINS	16°		**424 113 02 931 ED8** ◇	
			32°		**424 113 02 932 ED8** ◇	
			46°		**424 113 02 933 ED8** ◇	
	LED 12,6W / 1226lm / 1050mA	NON DIM	16°			**11525 9310** ◇
			32°			**11525 9320** ◇
			46°			**11525 9330** ◇
2700K CRI>90	LED 4,1W / 425lm / 700mA	MAINS	16°		**424 113 02 921 ED8** ◇	
			32°		**424 113 02 922 ED8** ◇	
			46°		**424 113 02 923 ED8** ◇	
	LED 12,6W / 1194lm / 1050mA	NON DIM	16°			**11525 9210** ◇
			32°			**11525 9220** ◇
			46°			**11525 9230** ◇
					◇ B-B / W-B	
					220-240V / 50-60Hz	110-240V / 50-60Hz
					IP20	IP20



DOT.COM M4 TR
SEMI RECESSED

DOT.COM M4 TR
TRIMLESS RECESSED

FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY							
			DOT.COM							
			S3 ST	S6 ST	M4 TRIMLESS	M4 ST OK	L2 ST	L4 ST	L2 ON	L4 ON
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R	R *	R		
1-10V DIM 16	**300 90 63**	min. 84	R *	R *	R *	R	R *	R		
DALI DIM 16	**300 90 63**	min. 84	R *	R *	R *	R	R *	R		
MOUNTING KIT TRIMLESS										
CONCRETE / PLASTERBOARD	**424 512 04 00**				R					
COLD STRETCHED CEILING	**15212 0110**				R					
WARM STRETCHED CEILING	**15212 0180**				R					


* REMOTE INSTALLATION

DOT.COM WALLWASH

DOT.COM WALLWASH
Dot.Com is not only limited to spotlight beam angles, it also has linear wallwashers in its range for a soft, even light effect on vertical surfaces. These come as single luminaires both recessed as surface mounted, as modules to fit in the magnetic profiles and as a bespoke trimless profile solution, perfect to adapt the light to your specific desires.


A







220 x 40 x 50 / min.10 | 624 x 40 x 50 / min.10 | 824 x 40 x 50 / min.10 | 1224 x 40 x 50 / min.10

DOT.COM L WALLWASH			02 ST HO	06 ST HO	08 ST HO	12 ST HO
3000K CRI>90	LED 9,6W / 1068lm / 350mA	IP43	**424 242 02 93** ◇			
	LED 12,6W / 1500lm / 350mA			**11522 9300** ◇		
	LED 18W / 2240lm / 500mA				**11523 9300** ◇	
	LED 25,2W / 3000lm / 700mA					**11524 9300** ◇
2700K CRI>90	LED 9,6W / 998lm / 350mA		**424 242 02 92** ◇			
	LED 12,6W / 1500lm / 350mA			**11522 9200** ◇		
	LED 18W / 2240lm / 500mA				**11523 9200** ◇	
	LED 25,2W / 3000lm / 700mA					**11524 9200** ◇
			◇ W-B ○●			



DOT.COM ON WALLWASH			06 HO	08 HO	12 HO
3000K CRI>90	LED 12,6W / 1500lm / 350mA	IP20	**16313 9300** ◇		
	LED 18W / 2240lm / 500mA			**16314 9300** ◇	
	LED 25,2W / 3000lm / 700mA				**16315 9300** ◇
2700K CRI>90	LED 12,6W / 1500lm / 350mA		**16313 9200** ◇		
	LED 18W / 2240lm / 500mA			**16314 9200** ◇	
	LED 25,2W / 3000lm / 700mA				**16315 9200** ◇
			◇ B ● / W ○		

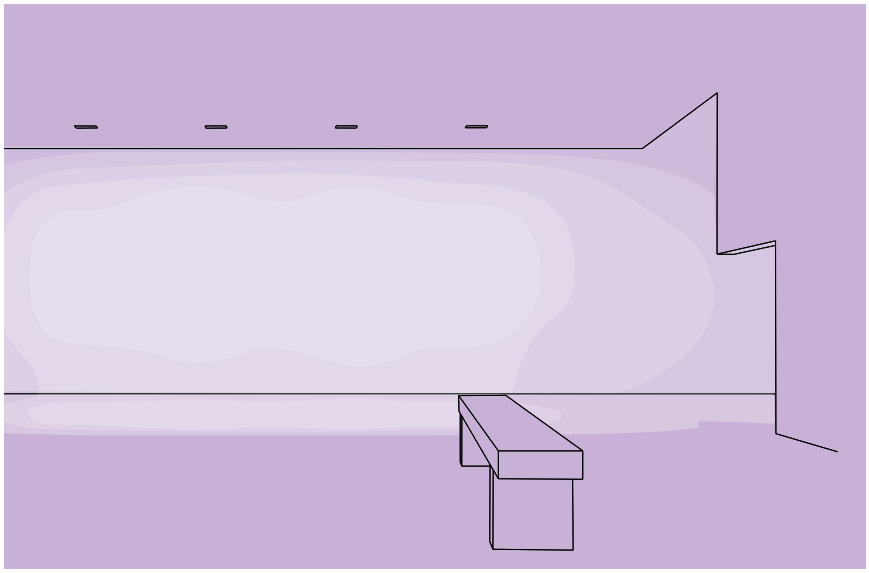

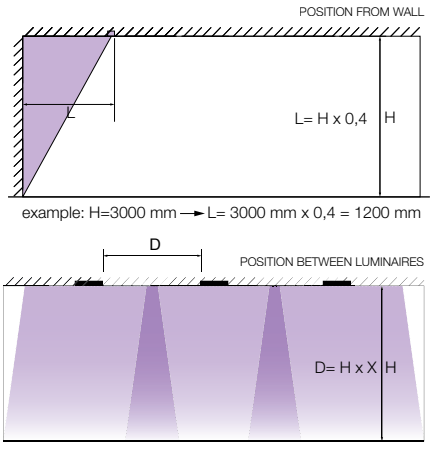

	X
DOT.COM L WALLWASH 02	0,5
DOT.COM L WALLWASH 06	0,25
DOT.COM L WALLWASH 08	0,33
DOT.COM L WALLWASH 12	0,5

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY						
			DOT.COM L WALLWASH				DOT.COM ON WALLWASH		
			02	06	08	12	06	08	12
			ST HO				HO		
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
MAINS DIM (FE) 11	21012 0298	min. 45	R	R	R	R	R	R	
1-10V DIM 16	300 90 63	min. 84	R	R	R	R	R	R	R
DALI DIM 16	300 90 63	min. 84	R	R	R	R	R	R	R
INSTALLATION									
FTL35-SUSPENSION SINGLE 1.6m	391 09 01						O	O	O
CURRENT SUPPLY 1,6m	391 97 51						O	O	O


B

HALOSCAN PATENTED


Haloscan is a family of accent lights that come semi-recessed, surface mounted or as modules on the magnetic profiles. Designed around its flat optics, Haloscan combines ultra-minimalistic looks with a pleasurable light effect. The light is softly spread by the plane lens, creating up to 4 different beam angles, from spot to floodlight and even linear light.
To smoothly turn and tilt, Haloscan uses the Ex-Centric Rotation System, an asymmetrical hinge that combines rotating and tilting abilities in one swift move.

deltalight.com/haloscan

FAMILY

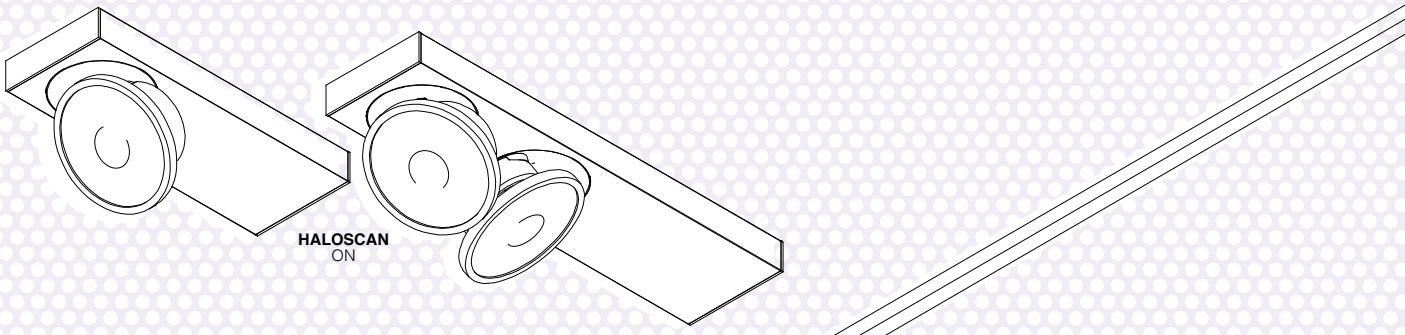


HALOSCAN
ON

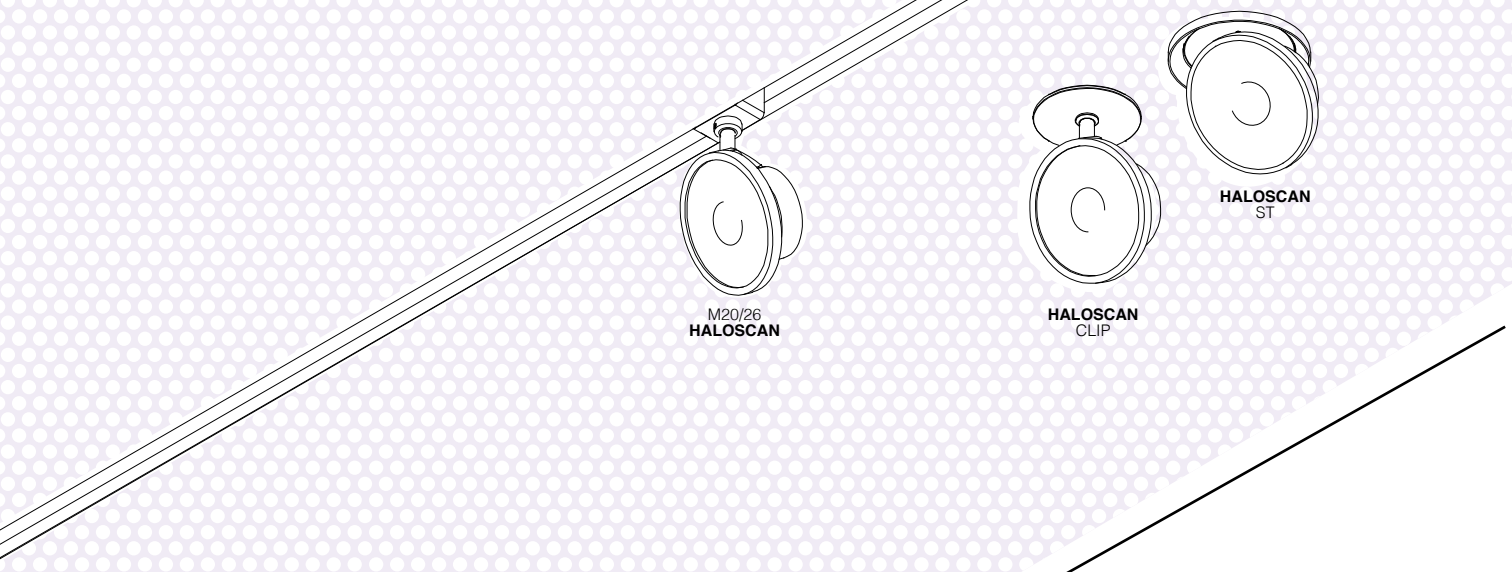

M20/26
HALOSCAN

HALOSCAN
CLIP

HALOSCAN
ST

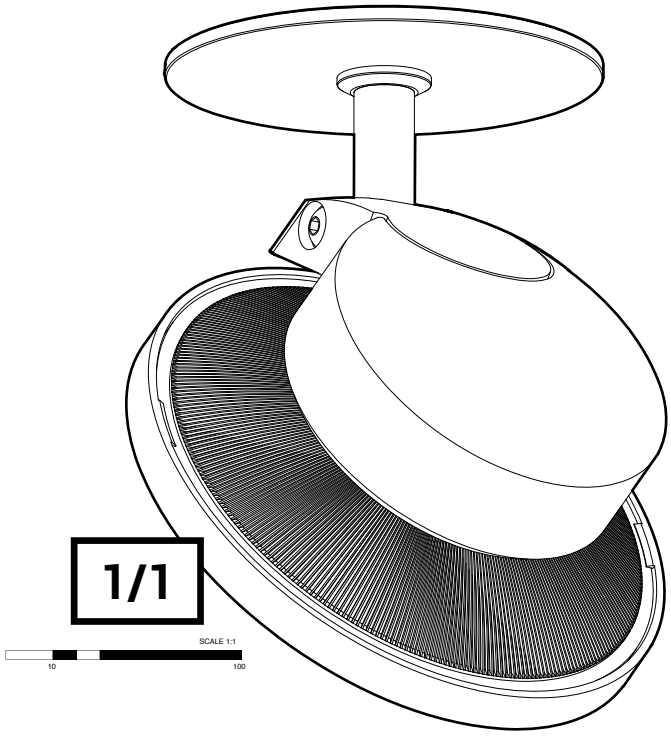

With its different finishing colours, multiple beam angles and single or double versions, Haloscan On is perfect for creative compositions throughout an entire project. Play around with Black, White or Gold colour combinations, put together single or double units and use different optics to generate a synergy between light and dark.


		HALOSCAN	
		MP	HP
LIGHT EFFECT			
LED		8,6W - 1089lm	11,7W - 1522lm
OPTICS			
14°		•	•
21°		•	•
35°		•	•
COLOUR TEMPERATURE			
2700K		•	•
3000K		•	•
SOFT DIM 3000-1800K		•	•
CONTROL			
EXCL. POWER SUPPLY		•	•
NON DIM			
MAINS DIM		•	
1-10V DIM			
DALI DIM			
WIRELESS DIM			
COLOUR			
WHITE ○		•	•
BLACK ●		•	•
GOLD COLOURED ●		•	
INSTALLATION			
INTERIOR	RECESSED	•	•
	SEMI-RECESSED	•	•
	SURFACE MOUNTED	•	
	PROFILES	•	•
ACCESSORIES			
HONEYCOMB		•	•
LINEAR SPREAD LENS		•	•
KAP		•	

• STANDARD
• NOT FOR ALL VERSIONS


Play with light, shape and texture.

Designed around its flat optics, Haloscan combines ultra-minimalistic looks with a pleasurable light effect.


HALOSCAN PATENTED




70 x 55



70 x 55



51 x 40





51 x 40

HALOSCAN				ST MP	ST HP	CLIP MP	CLIP HP
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA	IP20	14°	**23111 9310** ◇		**23117 9310** ◇	
			21°	**23111 9320** ◇		**23117 9320** ◇	
			35°	**23111 9330** ◇		**23117 9330** ◇	
	LED [R] 11.6W / 1524lm / 350mA		14°		**23114 9310** ◇		**23120 9310** ◇
			21°		**23114 9320** ◇		**23120 9320** ◇
			35°		**23114 9330** ◇		**23120 9330** ◇
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA		14°	**23111 9210** ◇		**23117 9210** ◇	
			21°	**23111 9220** ◇		**23117 9220** ◇	
			35°	**23111 9230** ◇		**23117 9230** ◇	
	LED [R] 11.6W / 1458lm / 350mA		14°		**23114 9210** ◇		**23120 9210** ◇
			21°		**23114 9220** ◇		**23120 9220** ◇
			35°		**23114 9230** ◇		**23120 9230** ◇
SOFT DIM	3000-1800K / CRI>90 LED [W] 6W / 623lm / 350mA		14°	**23112 9010** ◇		**23118 9010** ◇	
			21°	**23112 9020** ◇		**23118 9020** ◇	
			35°	**23112 9030** ◇		**23118 9030** ◇	
	3000-1800K / CRI>90 LED [X] 11.8W / 1307lm / 350mA		14°		**23115 9010** ◇		**23121 9010** ◇
			21°		**23115 9020** ◇		**23121 9020** ◇
			35°		**23115 9030** ◇		**23121 9030** ◇

◇ B ● / W ○

Ⅲ







HALOSCAN ON				1 MP	2 MP
3000K CRI>90	LED 8.6W / 1089lm / 500mA	MAINS	14°	**23147 9318** ◇	
			21°	**23147 9328** ◇	
			35°	**23147 9338** ◇	
	2x LED 5.8W / 787lm / 350mA		14°		**23149 9318** ◇
			21°		**23149 9328** ◇
			35°		**23149 9338** ◇
2700K CRI>90	LED 8.6W / 1041lm / 500mA		14°	**23147 9218** ◇	
			21°	**23147 9228** ◇	
			35°	**23147 9238** ◇	
	2x LED 5.8W / 753lm / 350mA		14°		**23149 9218** ◇
			21°		**23149 9228** ◇
			35°		**23149 9238** ◇
SOFT DIM	3000-1800K / CRI>90 LED 6W / 623lm / 350mA		14°	**23148 9018** ◇	
			21°	**23148 9028** ◇	
			35°	**23148 9038** ◇	
	3000-1800K / CRI>90 2x LED 6W / 623lm / 350mA		14°		**23150 9018** ◇
			21°		**23150 9028** ◇
			35°		**23150 9038** ◇


◇ B-B ●● / B-GC ●● / W-W ○○

220-240V 50-60Hz

Ⅰ IP20

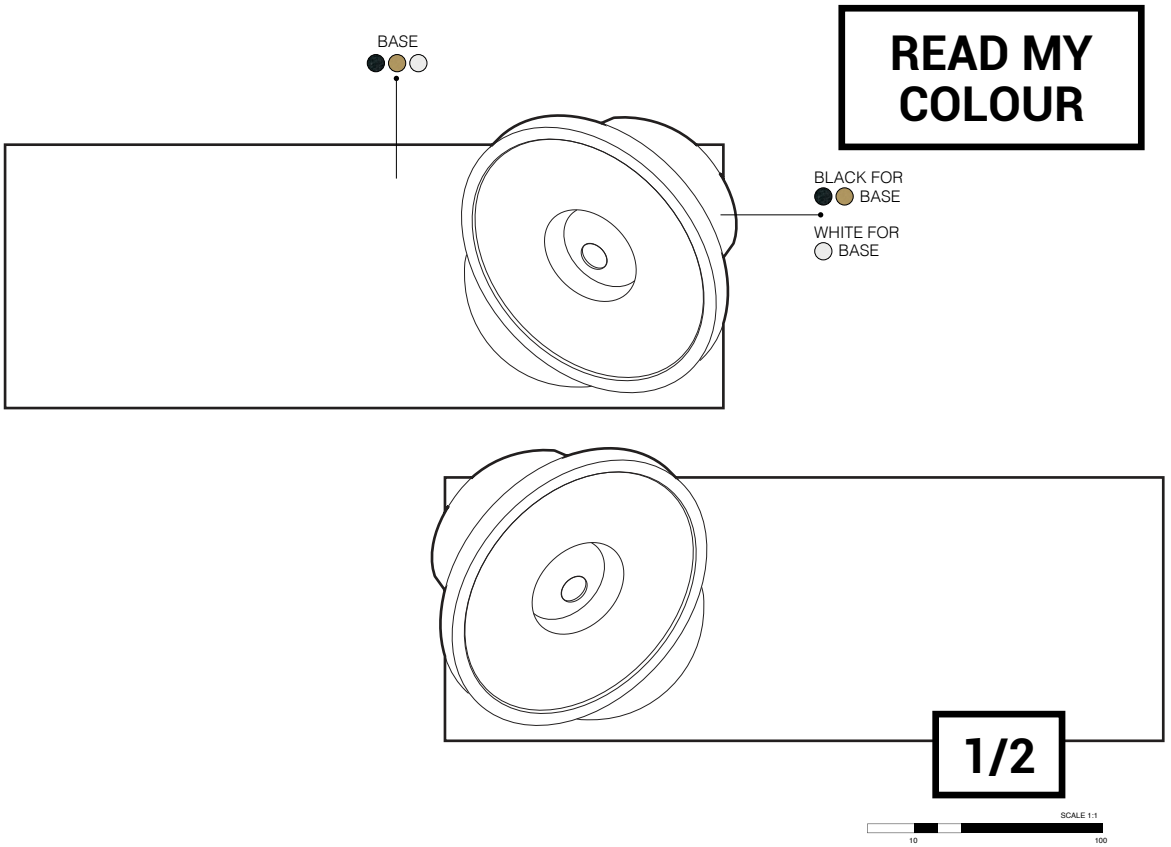

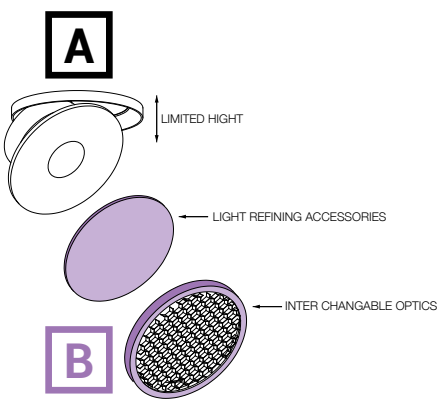

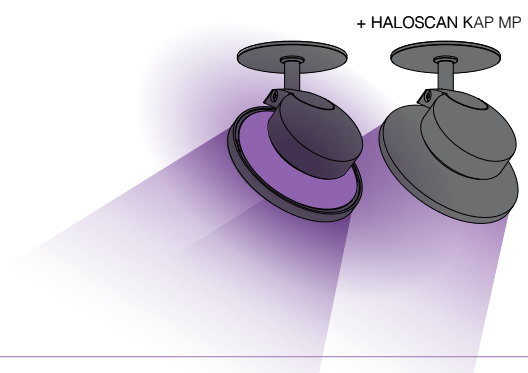

B

FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY					
			HALOSCAN				HALOSCAN ON	
			ST MP	ST HP	CLIP MP	CLIP HP	1 MP	2 MP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE) 11	21012 0298	min. 55	R	R	R *	R *		
1-10V DIM 15	300 90 124	min. 55	R	R	R *	R *		
DALI DIM 14	300 90 125	min. 55	R	R	R *	R *		
HONEYCOMB / LENS / GLASS								
HONEYCOMB	23110 0050 B		A	A	A	A	A	A
LINEAR SPREAD LENS	23110 0040		A	A	A	A	A	A
HALOSCAN KAP MP	23110 0060 B / W				A		A	A


* REMOTE INSTALLATION


OONO


1/2

SCALE 1:1
10
100










NEW

OONO

			T	ON 2	ON E27	C E27
3000K CRI>90	2x LED 8.6W / 1089lm / 500mA	NON DIM		**29614 9300** ◇		
2700K CRI>90	2x LED 8.6W / 1041lm / 500mA	NON DIM		**29614 9200** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 6W / 623lm / 350mA	DIM	**29624 9000** ◇			
1 x T45 max 8W					**29622 0000** ◇	**29621 0000** ◇
			AM ● / GM ●	◇ B ● / GC ● / W ○	◇ B ● / W ○	◇ GM ●
			220-240V / 50-60Hz	220-240V / 50-60Hz	100-240V / 50-60Hz	100-240V / 50-60Hz
			INCL.POWER ADAPTER	IP20 CEILING / IP44 WALL	IP20	INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m INCL.1 x CABLE 3 x 0,75mm² 1.6m
			IP20			IP20

A

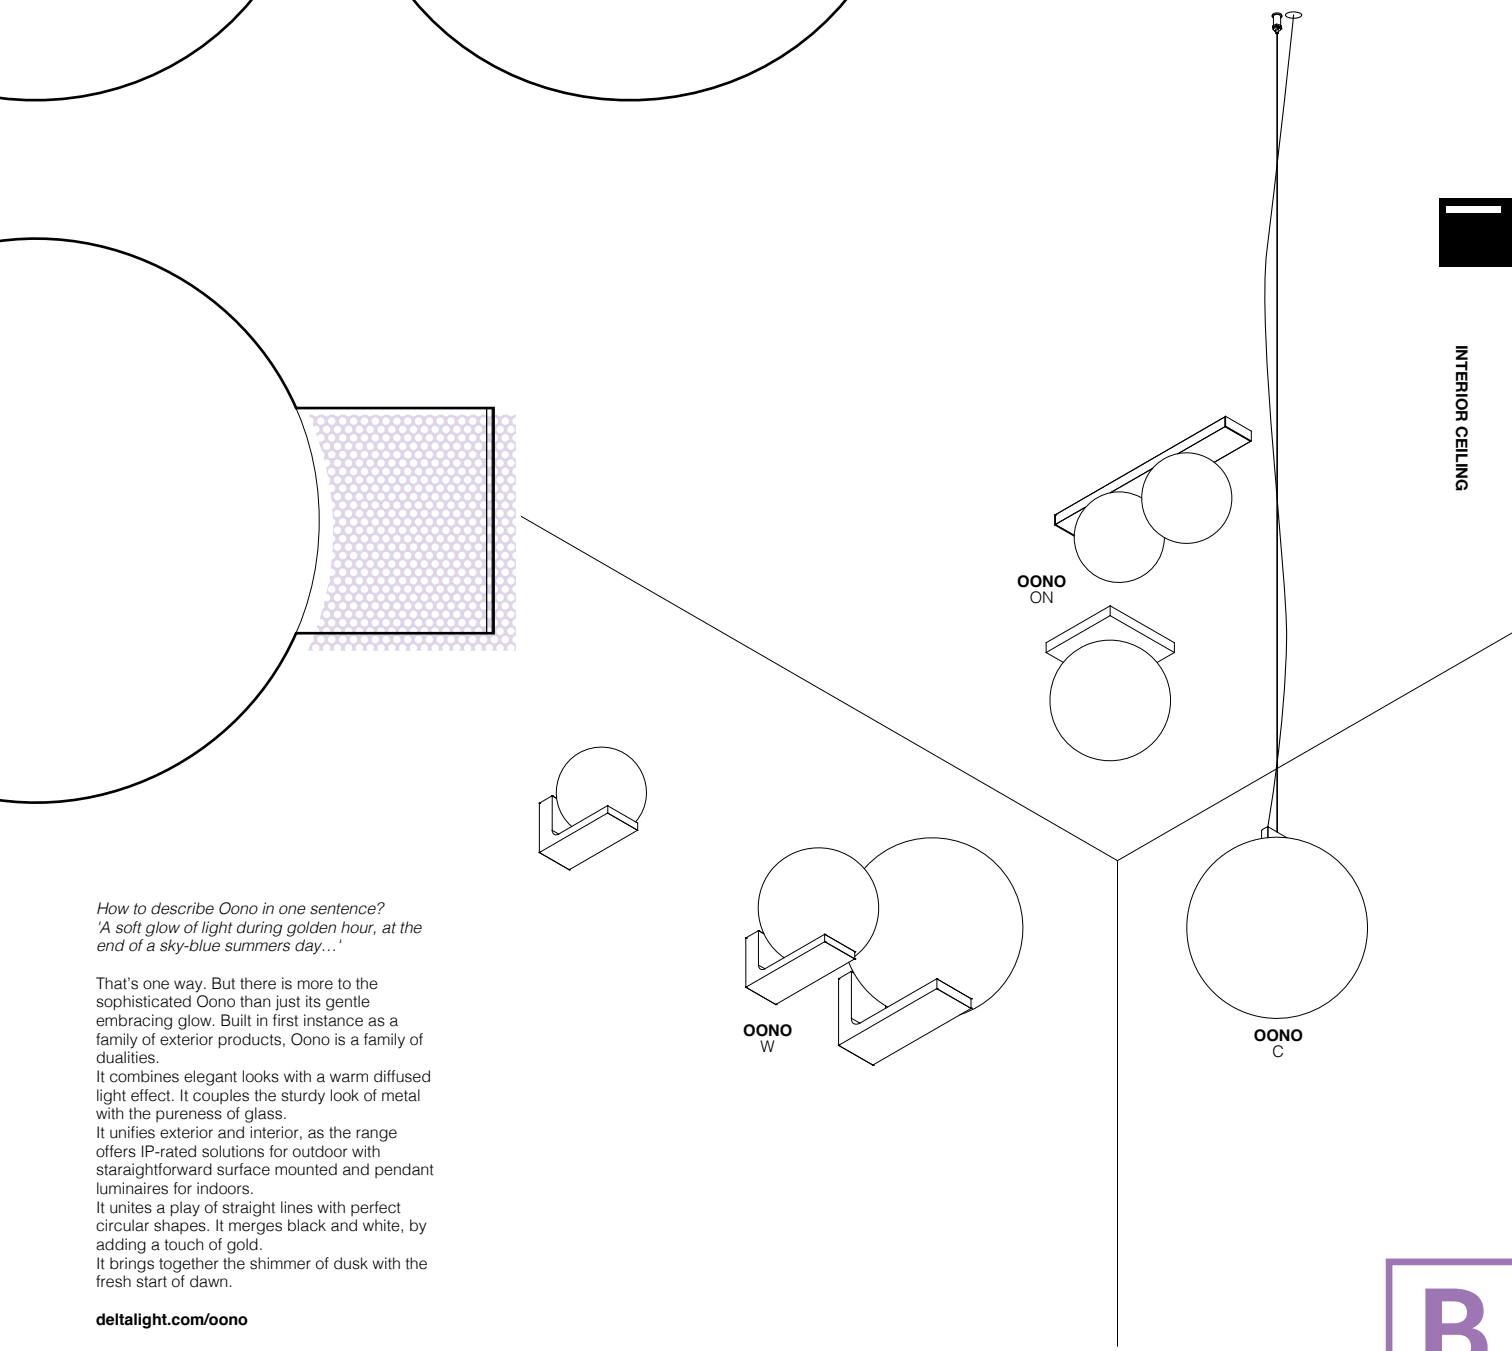

How to describe Oono in one sentence?
'A soft glow of light during golden hour, at the end of a sky-blue summers day…'

That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities.
It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass.
It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with staraightforward surface mounted and pendant luminaires for indoors.
It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold.
It brings together the shimmer of dusk with the fresh start of dawn.

deltalight.com/oono

B


FINISH YOUR SPECIFICATION		REQUIREMENT / OPTION / ACCESSORY		
		OONO		
		ON 2	ON E27	C E27
INSTALLATION				
CEILING BASE MULTI 1	**28700 0040 B / W**			R
or CEILING BASE MULTI 3	**28700 0070 B / W**			R
LAMP E27	**21024 0280**			O

TWEETER PATENTED

Tweeter has been one of the most remarkable families in the Delta Light collection for many years. Available as ceiling recessed and ceiling surface mounted, Tweeter introduces new levels in flexibility, both in movement as in lighting application. Tweeter is based on **Delta Light's Ex-centric Rotation System**, characterized by an asymmetrical hinge joint, combining extreme rotation and tilting abilities, all in one swift whirling motion.


The recessed Tweeter versions enable a maximum fuse of light and architecture. The spotlight heads are identical to the surface mounted installation and handling is simple and convenient. The double shell design prevents ceiling exposure, while the flexible inner shell tailors for any lighting need. Ultimate refinement is reached with a subtle aureole of light circling around the central led, offering improved lighting aesthetics. The application of the Ex-centric Rotation System not only upgrades movement of the fixture, but more importantly also provides advanced lighting abilities. The rotation mechanism was designed so that the light beam is not cut off, resulting in maximum efficiency.

deltalight.com/tweeter

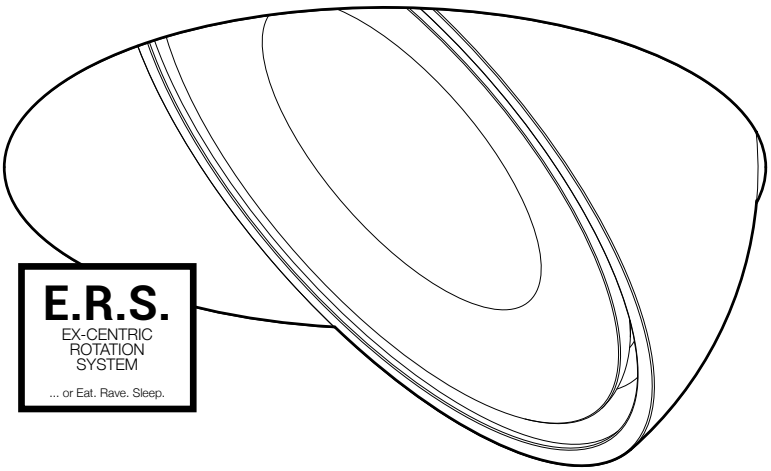


TWEETER
TRIMLESS

A



ØKIT x 80





114 x 80 / max.25


TWEETER M


				TRIMLESS	ST
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA	IP23	33°	**418 11 811 932** ◇	**418 21 811 932** ◇
			50°	**418 11 811 933** ◇	**418 21 811 933** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA		33°	**418 11 811 922** ◇	**418 21 811 922** ◇
			50°	**418 11 811 923** ◇	**418 21 811 923** ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA		45°	**21613 9030** ◇	**21612 9030** ◇

◇ B-C / W-W









TWEETER M ON

				1	2	1 WDL	2 WDL
3000K CRI>90	1 or 2 LED 10.4W / 1128lm / 500mA	MAINS	33°	**418 51 811 932 ED8** ◇	**418 51 812 932 ED8** ◇		
			50°	**418 51 811 933 ED8** ◇	**418 51 812 933 ED8** ◇		
	1 or 2 LED 10.4W / 1128lm / 48V-DC	WIRELESS	33°			**418 51 811 932 WDL** ◇	**418 51 812 932 WDL** ◇
			50°			**418 51 811 933 WDL** ◇	**418 51 812 933 WDL** ◇
2700K CRI>90	1 or 2 LED 10.4W / 1083lm / 500mA	MAINS	33°	**418 51 811 922 ED8** ◇	**418 51 812 922 ED8** ◇		
			50°	**418 51 811 923 ED8** ◇	**418 51 812 923 ED8** ◇		
	1 or 2 LED 10.4W / 1083lm / 48V-DC	WIRELESS	33°			**418 51 811 922 WDL** ◇	**418 51 812 922 WDL** ◇
			50°			**418 51 811 923 WDL** ◇	**418 51 812 923 WDL** ◇

◇ B-C / W-W

FOR WIRELESS



220-240V / 50-60Hz

IP20


INCL.WIRELESS DIMMABLE CONVERTER
48V-DC TO 500mA

IP20

A GLIMPSE OF ME
ON PAGE 32

C


FIND ME ONLINE




SOFT DIM





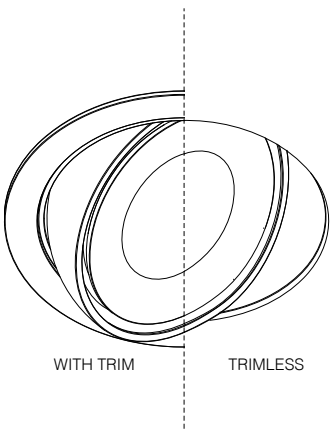

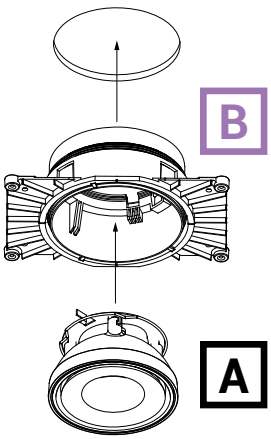

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY					
			TWEETER M		TWEETER M ON			
			TRIMLESS	ST	1	2	1 WDL	2 WDL
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM 48V-DC / 100W / DIN	**300 89 48 100**	100 x 55 x 90					R	R
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R				
1-10V DIM 15	**300 90 124**	min. 55	R	R				
DALI DIM 14	**300 90 125**	min. 55	R	R				
MOUNTING KIT TRIMLESS								
CONCRETE / PLASTERBOARD	**15212 2010**		R					
COLD STRETCHED CEILING	**15212 0090**		R					
WARM STRETCHED CEILING	**15212 0170**		R					

B

OBIN PATENTED


Introducing Obin, a cutting-edge lighting solution that embodies our commitment to quality and innovation.


Based on the patented ERS (Ex-Centriq Rotation System) and equipped with flat lenses, Obin fuses ultimate flexibility with supreme user comfort in a minimalistic surface mounted lighting fixture. By adjusting the rounded backside - using the ERS system - Obin is 360° rotatable and 45° tiltable without the need of an additional hinge. On the frontside, the sleek lenses create a sense of depth without the need of real physical space. Combining both results in free space on the inside to house a DALI power supply, perfect for an easy individual controllable surface mounted lighting scheme.

Obin comes as a single or double surface mounted unit or as module to install on our magnetic profiles. While the double versions comes in Black or White, the single spotlight is available in our delicate finishes Brushed Grey, Brushed Copper, Brushed Gold, Brushed Old Bronze and Brushed Anthracite and, easily adding refinement to any room.
To further improve on visual comfort, Obin can be provided with a honeycomb to reduce any rebundant glare to a minimum.


Whether you are looking to create a subtle and sophisticated ambiance in a residential space, or in need of a functional and versatile lighting solution for a hospitality project, Obin has you covered.

deltalight.com/obin

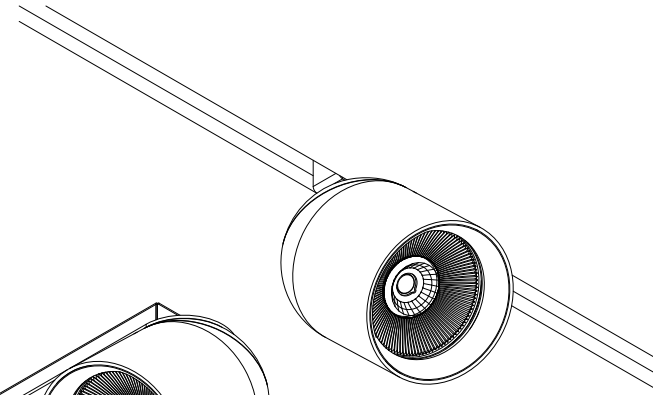

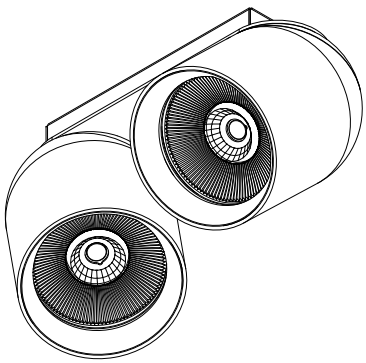


E.R.S.
EX-CENTRIC ROTATION SYSTEM
... or Eat. Rave. Sleep.




A

NEW

OBIN






				ON	**ON 2**
3000K CRI>90	1 or 2 x LED 11.6W / 1524lm / 350mA	MAINS	24°	**30511 9328** ◇	**30512 9328** ◇
		DALI		**30511 9325** ◇	
		MAINS	36°	**30511 9338** ◇	**30512 9338** ◇
		DALI		**30511 9335** ◇	
2700K CRI>90	1 or 2 x LED 11.6W / 1458lm / 350mA	MAINS	24°	**30511 9228** ◇	**30512 9228** ◇
		DALI		**30511 9225** ◇	
		MAINS	36°	**30511 9238** ◇	**30512 9238** ◇
		DALI		**30511 9235** ◇	
				◇ B ● / BRA ◐ / BRG ◐ / BROB ◐ / BRAT ◐ / W ○	◇ B ● / W ○
				MAINS 220-240V / 50-60Hz DALI 120-240V / 50-60Hz	220-240V / 50-60Hz
				IP20	IP20

A GLIMPSE OF ME
ON PAGE 4

C


FIND ME ONLINE

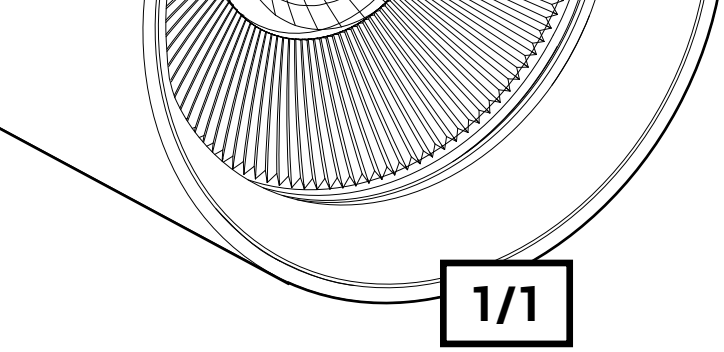

1/1

SCALE 1:1

10 100

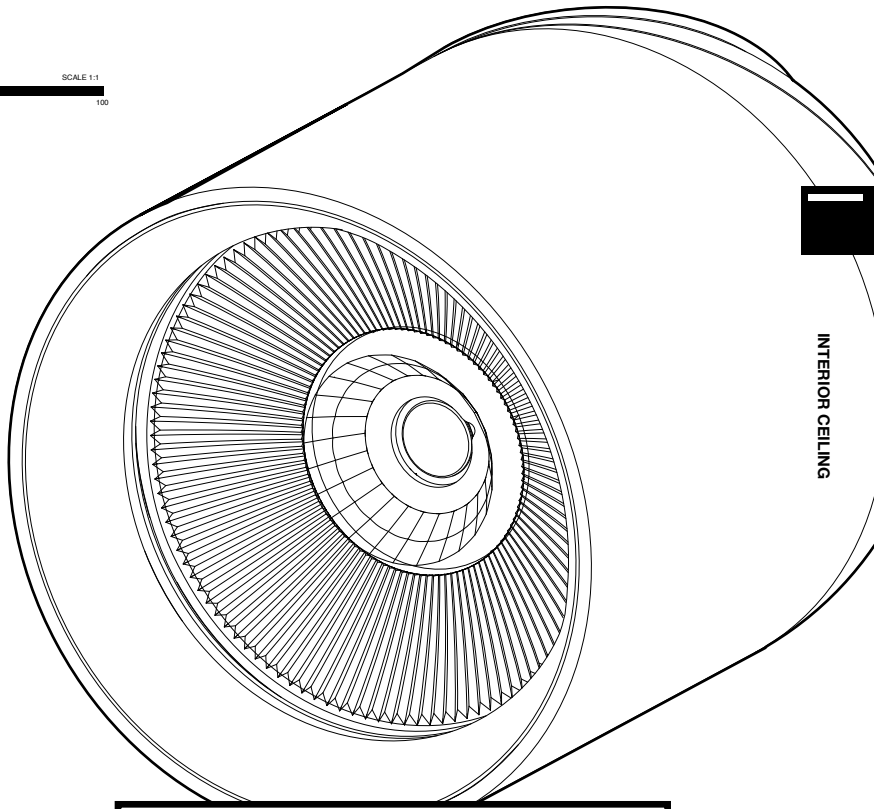


INTERIOR CEILING

Cute outside, functional inside.

INTEGRATED DALI POWER SUPPLY

A



B

B

REQUIREMENT / OPTION / ACCESSORY

		OBIN	
		ON	ON 2
FINISH			
SPY 90 TUBE	**19810 0170 B / FBR / FG / GC / W**	R	R
HONEYCOMB / LENS / GLASS			
HONEYCOMB 75	**19810 0110 B**	A	A

ODRON / BOWIE


HAVE ANOTHER LOOK
Don't be fooled: Odron may look peculiar at first sight, nevertheless its specific design is intended to create a compact yet powerful lighting solution.
A second look puts everything in perspective: the flat design of the disc in combination with the shallow base results in a highly functional luminaire within a limited height of 45mm.

As from now, any additional look on it makes you appreciate Odron more and more: its possibility to serve both as a straightforward downlight or as an omnidirectional spotlight, the shiny details of the cover in contrast with the structured lacquer of the body or the touch of colour it adds thanks to the additional golden cover, it is clear that Odron enriches the space in more than one way.


The elegant Odron is available as a clip version and as a single or double spot to be mounted onto the ceiling or as module for our Magnetic profile range.

KEEP YOUR EYE ON THE BALL
Add some body to the room with Bowie, it impresses through its spherical shape. Twist and turn, tilt and aim, Bowie will always look the same, whatever its direction and no matter the angle you look at it. Bowie in pure white or black easily fits in any interior and adds a touch of richness to the room.
Within its range, Bowie comes as a semi-recessed Clip version, as a single or double spotlight to be surface mounted or as module to fit into our Magnetic profile offer.

deltalight.com/odron
deltalight.com/bowie



51 x 40





51 x 40


				ODRON CLIP*	BOWIE CLIP
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500m	IP20	28°/41°	**26213 9300** ◇	
			25°		**26713 9320** ◇
			37°		**26713 9330** ◇
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		28°/41°	**26213 9200** ◇	
			25°		**26713 9220** ◇
			37°		**26713 9230** ◇


*INCL. 2 REFLECTORS

◇ B-B ●● / W-W ○○










				ODRON ON 1*	ODRON ON 2*	BOWIE ON 1	BOWIE ON 2
3000K CRI>90	1 or 2 LED 5.8W / 734lm / 350mA	MAINS	28°/41°	**26214 9308** ◇	**26215 9308** ◇		
			25°			**26714 9328** ◇	**26715 9328** ◇
			37°			**26714 9338** ◇	**26715 9338** ◇
2700K CRI>90	1 or 2 LED 5.8W / 702lm / 350mA		28°/41°	**26214 9208** ◇	**26215 9208** ◇		
			25°			**26714 9228** ◇	**26715 9228** ◇
			37°			**26714 9238** ◇	**26715 9238** ◇


*INCL. 2 REFLECTORS


◇ B ● / W ○

220-240V / 50-60Hz

IP20

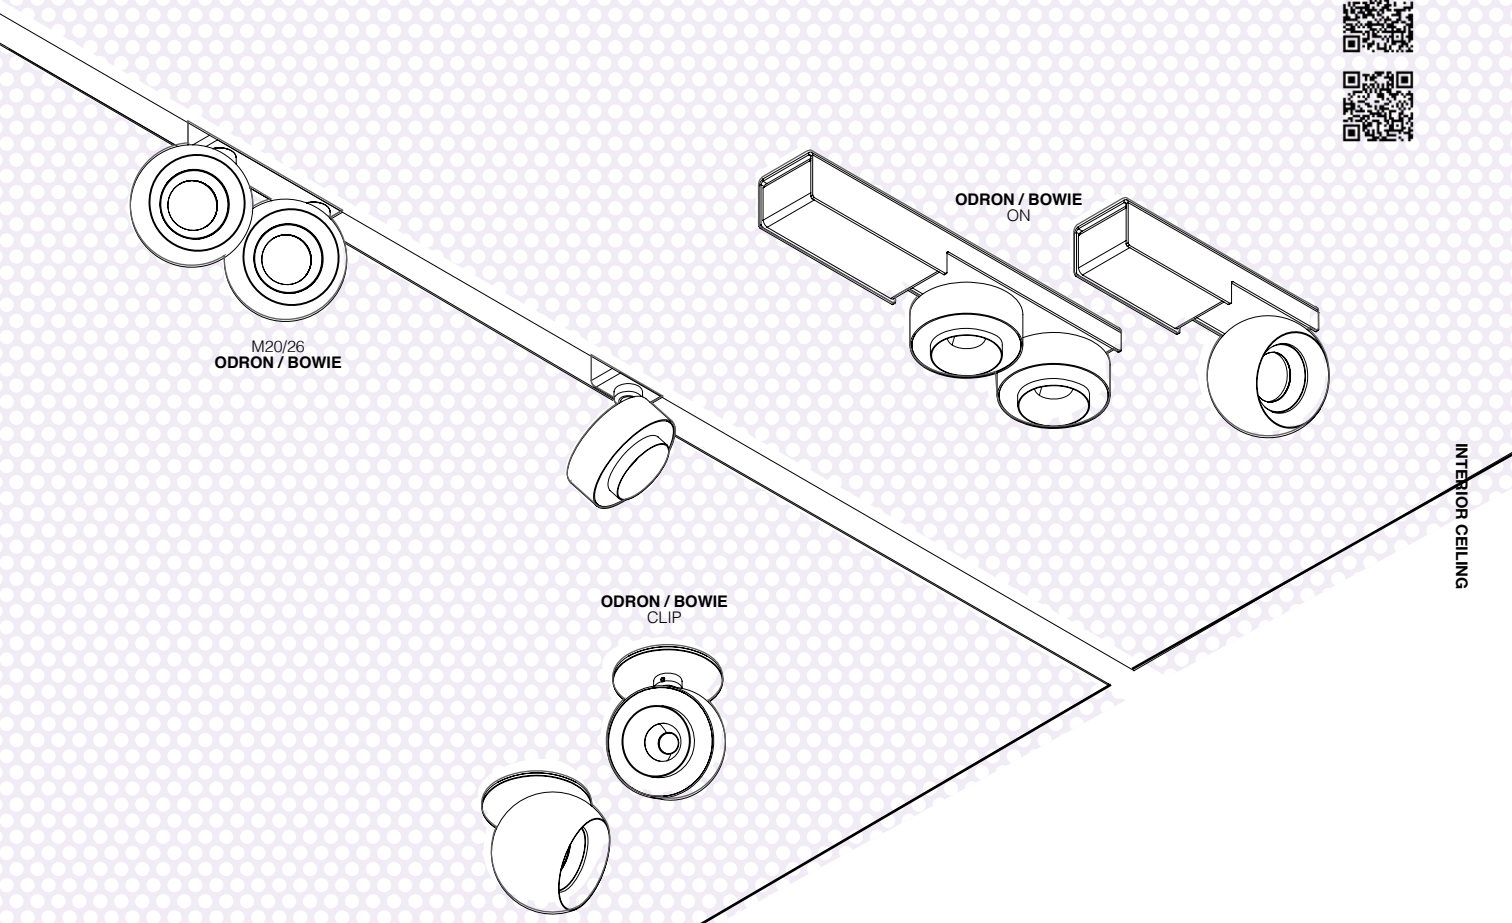

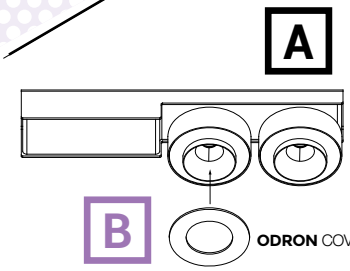

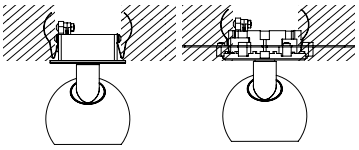


			REQUIREMENT / OPTION / ACCESSORY					
			ODRON			BOWIE		
			CLIP	ON 1	ON 2	CLIP	ON 1	ON 2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *			R *		
1-10V DIM 15	**300 90 124**	min. 55	R *			R *		
DALI DIM 14	**300 90 125**	min. 55	R *			R *		
MOUNTING KIT TRIMLESS								
MOUNTING KIT FLUSH SPY	**414 90 01**		O			O		
HONEYCOMB / LENS / GLASS								
ODRON COVER	**6210 0020 GC**		A	A	A			

* REMOTE INSTALLATION

B

UHO

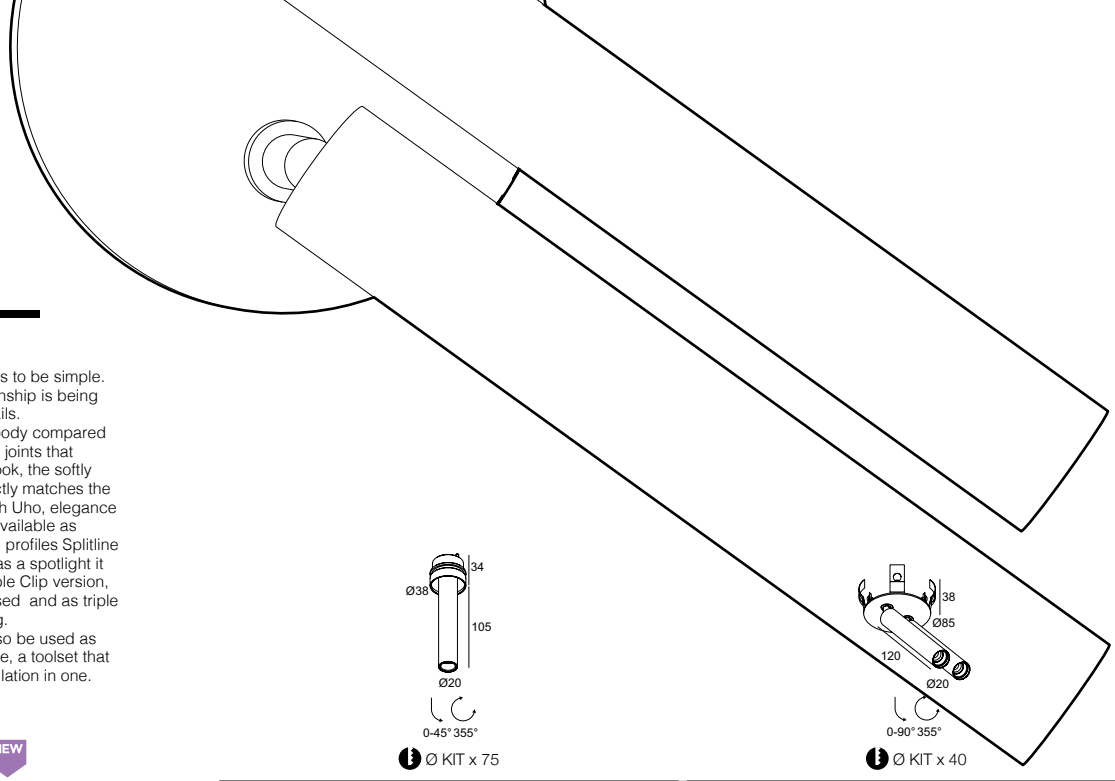

At first sight Uho appears to be simple. In close-up, the workmanship is being revealed in the little details.
The refined ratio of the body compared to its diameter, the small joints that create a sophisticated look, the softly curved hinge that perfectly matches the contours of its body. With Uho, elegance is in the details. Uho is available as accent light on our small profiles Splitline 14 and Shiftline 19 and as a spotlight it comes as single or double Clip version, as single trimless recessed and as triple unit for surface mounting.
Furthermore Uho can also be used as light unit in our **▲IR** range, a toolset that combines light and ventilation in one.

deltalight.com/uho


NEW

Ø KIT x 75


Ø KIT x 40

UHO


				L TRIMLESS	2 AIR
3000K CRI>90	LED [A] 3W / 327lm / 1050mA	IP20	30°	**27217 9320** ◇	
	2X LED [A] 3W / 327lm / 1050mA				**27218 9320** ◇
2700K CRI>90	LED [A] 3W / 303lm / 1050mA			**27217 9220** ◇	
	2X LED [A] 3W / 303lm / 1050mA				**27218 9220** ◇
				◇ B / FBR / FG / GC / W	◇ B-B / FBR-B / FG-B / GC-B / W-B




43 x 40



62 x 40




43 x 40



62 x 40

UHO

				CLIP	CLIP 2	L CLIP	L CLIP 2
3000K CRI>90	LED [A] 3W / 327lm / 1050mA	IP20	30°	**27211 9320** ◇		**27212 9320** ◇	
	2x LED [A] 3W / 327lm / 1050mA				**27215 9320** ◇		**27216 9320** ◇
2700K CRI>90	LED [A] 3W / 303lm / 1050mA			**27211 9220** ◇		**27212 9220** ◇	
	2x LED [A] 3W / 303lm / 1050mA				**27215 9220** ◇		**27216 9220** ◇
				◇ B-B / FBR-B / FG-B / GC-B / W-W			




UHO


			L ON 3
3000K CRI>90	3x LED 2.9W / 290lm / 1000mA	30°	**27214 9320** ◇
2700K CRI>90	3x LED 2.9W / 254lm / 1000mA		**27214 9220** ◇
			◇ B-B / W-W

220-240V / 50-60Hz

IP20

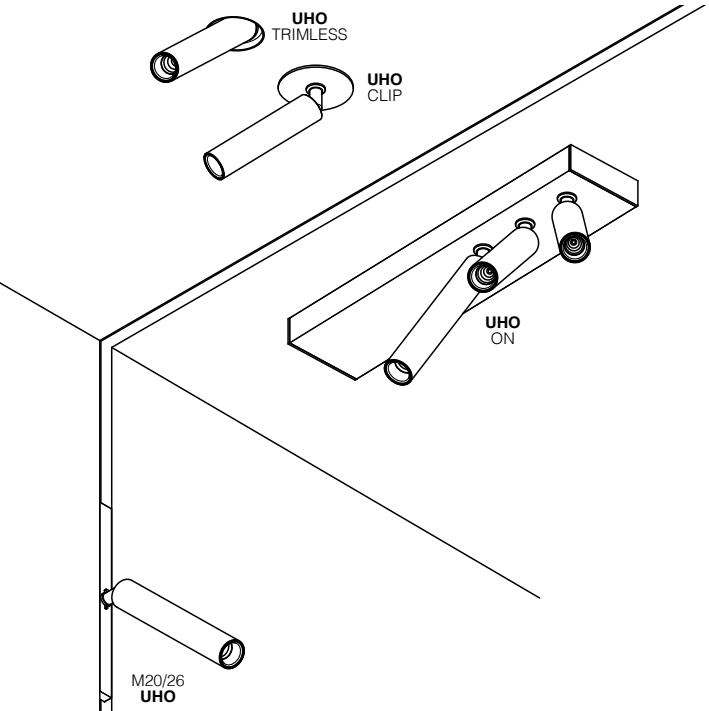


Softly curved hinge that perfectly matches the contours of the body.

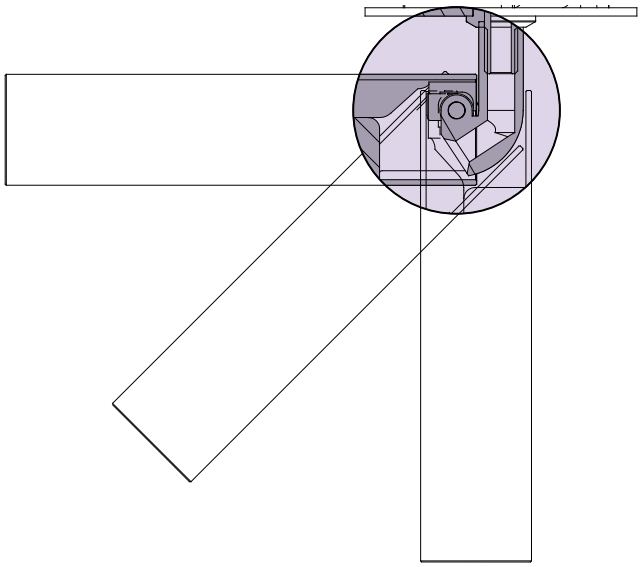

B

MOUNTING KIT
UHO L TRIMLESS






FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY						
			UHO L		UHO				
			TRIMLESS	2 AIR	CLIP	CLIP 2	L CLIP	L CLIP 2	L ON 3
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
1-10V DIM 16	**300 90 63**	min. 84	R *	R *	R *	R *	R *	R *	
DALI DIM 16	**300 90 63**	min. 84	R *	R *	R *	R *	R *	R *	
MOUNTING KIT TRIMLESS									
PLASTERBOARD	**15212 2060**		R						
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTERR									
PLASTERBOARD SIDE AIR	**29810 0040**	Light+Ventilation		R					
	29810 0080	Light		R					
	29810 0100	Ventilation		O					
CONCRETE TOP AIR	**29810 0240**	Light+Ventilation		R					
	29810 0080	Light		R					
	29810 0200	Ventilation		O					

* REMOTE INSTALLATION

SPY

FAMILY

Low to high output, narrow to wide optics, multiple LED colours, recessed to surface mounted and track applications, different colour finishes, light refining accessories

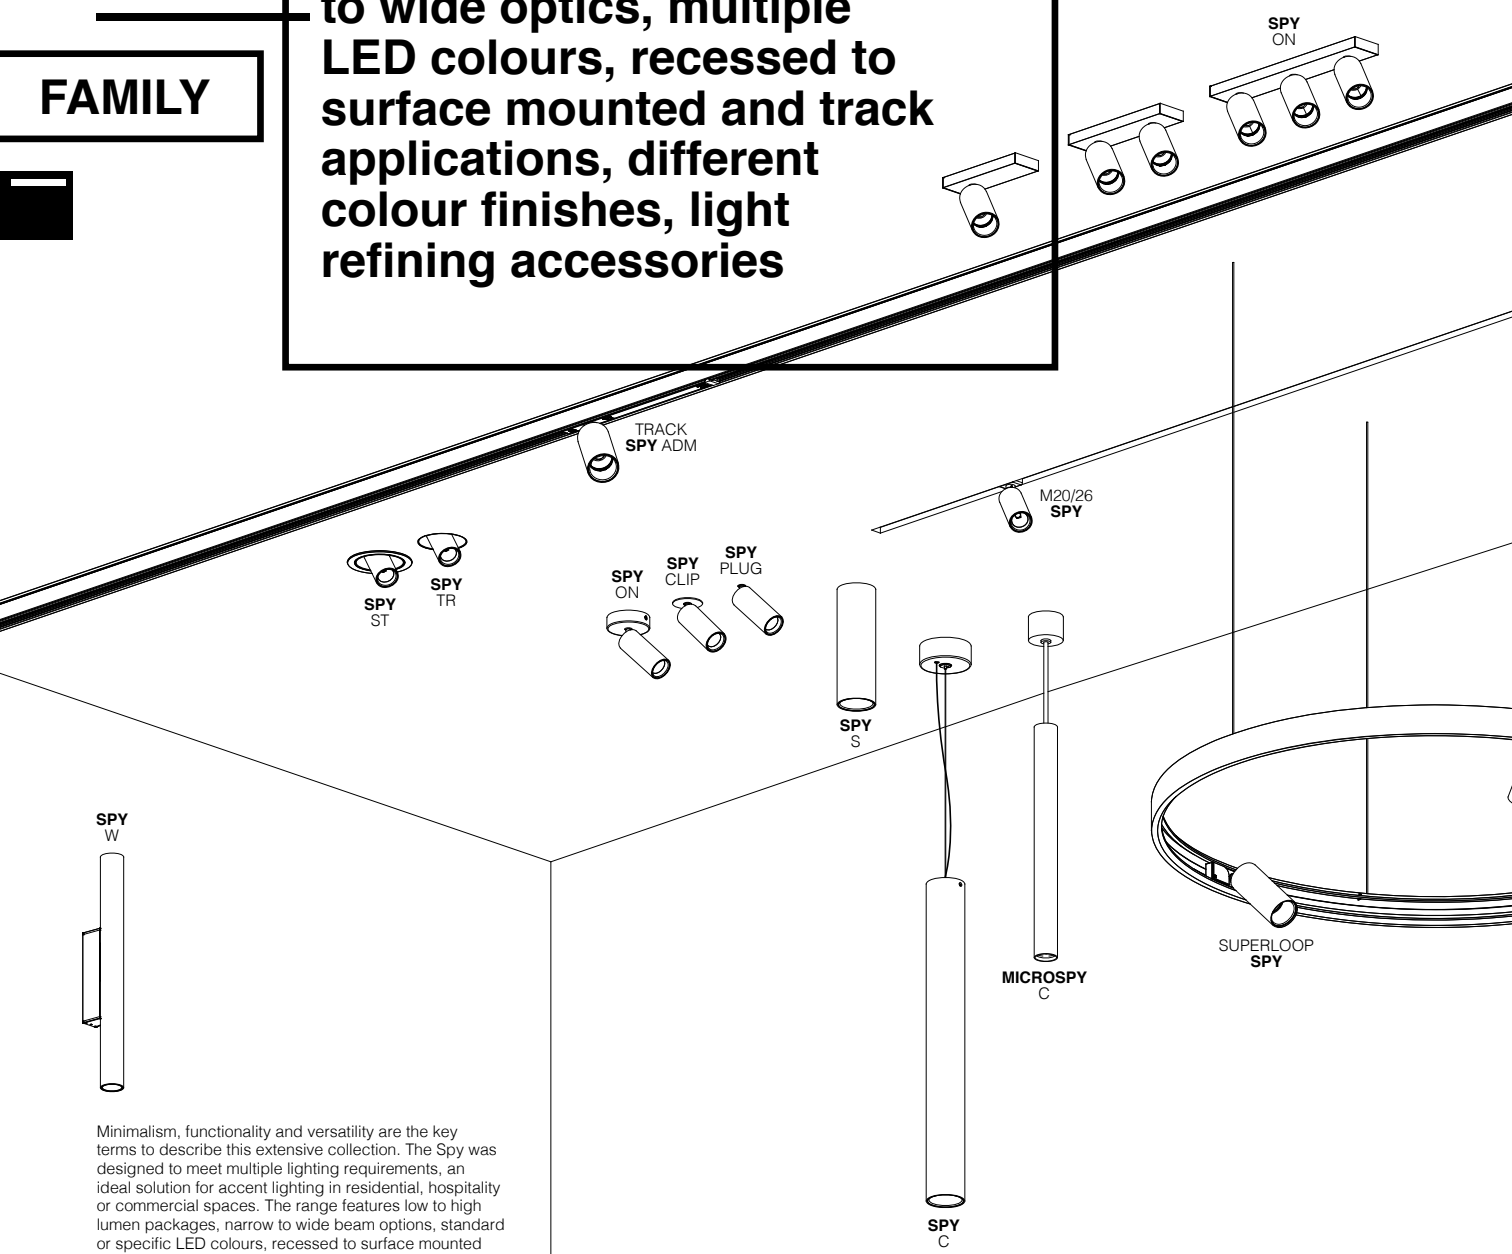

Minimalism, functionality and versatility are the key terms to describe this extensive collection. The Spy was designed to meet multiple lighting requirements, an ideal solution for accent lighting in residential, hospitality or commercial spaces. The range features low to high lumen packages, narrow to wide beam options, standard or specific LED colours, recessed to surface mounted and track applications, different colour finishes and combinations, and can be equipped with multiple light refining accessories.

Following the constant changes in the world of LEDs and optics and the evolution to better user comfort with more precise optics and better light control, the complete Spy range has been upgraded. The result? Fresh shapes and additional finishing colours, better light comfort through hybrid optics, improved LED colour consistency and new perspectives with Tunable White and Soft Dim.
The renewed Spy family comes in diameters of 27, 39, 52, 66 and 90 millimeters, a range of spotlights to fit any purpose. While the smaller versions come in the lively colours Flemish Bronze, Flemish Gold and Gold Coloured, the bigger Spy's offer Tunable White and Soft Dim solutions in multiple beam angles.

Furthermore Spy can also be used as light unit in our **▲IR** range, a toolset that combines light and ventilation in one.

deltalight.com/spy

A GLIMPSE OF ME
ON PAGE 54


C

FIND ME ONLINE

		MICRO SPY	SPY 27	SPY 39	SPY 52	SPY 66	SPY 90
LIGHT EFFECT							
LED		3,9W - 385lm 5,7W - 519lm	5,8W - 787lm	5,8W - 787lm 8,6W - 1089lm	8,6W - 1089lm 12,4W - 1467lm	9W - 1076lm 17,1W - 2125lm 24,6W - 2907lm	23,2W - 3169lm
OPTICS							
12°						•	
15°		•					
18°						•	•
20°				•	•		
24°				•			
26°						•	
30°		•	•			•	•
33°					•	•	
39°						•	
40°				•			
45°					•	•	•
▶▶▶▶▶ FOCUS					•		
COLOUR TEMPERATURE							
2700K		•	•	•	•	•	•
3000K		•	•	•	•	•	•
SOFT DIM 3000-1800K					◦		
TUNABLE WHITE 2700-5700K					◦	◦	
CONTROL							
EXCL. POWER SUPPLY		•	•	•	•	•	
NON DIM							◦
MAINS DIM			◦	◦	◦		◦
1-10V DIM							
DALI DIM							◦
WIRELESS DIM							
COLOUR							
WHITE		•	•	•	•	•	•
BLACK		•	•	•	•	•	•
FLEMISH BRONZE			◦	◦	◦		
FLEMISH GOLD			◦	◦	◦		
GOLD COLOURED			◦	◦	◦		
BRUSHED GREY				◦			
BRUSHED COPPER				◦			
BRUSHED GOLD				◦			
BRUSHED OLD BRONZE				◦			
BRUSHED ANTHRACITE				◦			
PIANO BLACK				◦			
COLOUR TUBE							
WHITE				•	•	•	•
BLACK				•	•	•	•
FLEMISH BRONZE				•	•	•	•
FLEMISH GOLD				•	•	•	•
GOLD COLOURED				•	•	•	•
MATT GOLD						•	
PIANO BLACK							•
INSTALLATION							
INTERIOR	RECESSED	•		•	•		
	RECESSED TRIMLESS	•		•	•		
	SEMI-RECESSED		•	•	•	•	
	SURFACE MOUNTED		•	•	•	•	•
	SUSPENDED CABLE			•	•		
	TRACK			•	•	•	•
	PROFILES			•	•	•	
EXTERIOR	WALL				•		
ACCESSORIES							
VISOR		•	•	•			
HONEYCOMB					•	•	•
SPREAD LENS					•	•	•
LINEAR SPREAD LENS					•	•	•
SOFTENING LENS					•	•	•
GLASS SANDBLASTED SBL					•	•	•
MOUNTING KITS							
O.F.A. ONE FOR ALL (CONCRETE / PLASTER)				◦	◦		
CSC (COLD STRETCHED CEILING)				◦	◦		
WSC (WARM STRETCHED CEILING)				◦	◦		
▲IR (LIGHT + VENTILATION)				◦	◦		

• STANDARD
◦ NOT FOR ALL VERSIONS


MICRO SPY

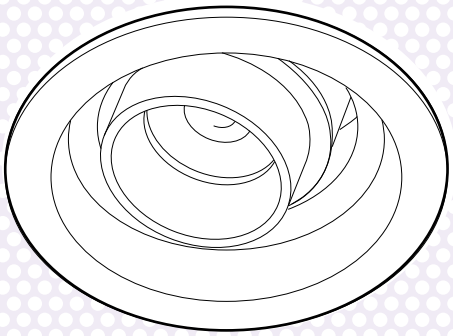


MICROSPY
IN OK

1/1

SCALE 1:1
10 100



MICROSPY
IN




MICROSPY TRIMLESS
+ MICROVISOR




MICROSPY TRIMLESS
IN OK




KIT x 75



KIT x 75 / max.12



36 x 75 / min.2-max.25



54 x 75 / min.2-max.25

MICRO				SPY IN TRIMLESS	SPY IN TRIMLESS OK	SPY IN	SPY IN OK
3000K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.1W / 480lm / 450mA LED [E] 5.7W / 519lm / 500mA	IP20	15°	**24113 9310** ◇	**24112 9310** ◇ *	**24110 9310** ◇ *	**24111 9310** ◇ *
			30°	**24113 9320** ◇	**24112 9320** ◇ *	**24110 9320** ◇ *	**24111 9320** ◇ *
2700K CRI>90	LED [E] 3.9W / 385lm / 350mA LED [E] 5.1W / 480lm / 450mA LED [E] 5.7W / 519lm / 500mA		15°	**24113 9210** ◇	**24112 9210** ◇ *	**24110 9210** ◇ *	**24111 9210** ◇ *
			30°	**24113 9220** ◇	**24112 9220** ◇ *	**24110 9220** ◇ *	**24111 9220** ◇ *


◇ B ● / W ○

* max. 450mA

A GLIMPSE OF ME
ON PAGE 54

C

FIND ME ONLINE

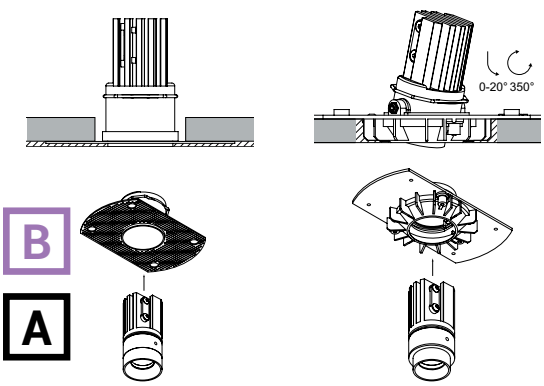

MICROSPY IN TRIMLESS
+ MOUNTING KIT TRIMLESS
MICROSPY IN

MICROSPY IN TRIMLESS OK
+ MOUNTING KIT TRIMLESS
MICROSPY IN OK


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			MICRO			
			SPY IN TRIMLESS	SPY IN TRIMLESS OK	SPY IN	SPY IN OK
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R *
MOUNTING KIT TRIMLESS						
PLASTERBOARD	**15212 2040**		R			
	15212 2020			R		
HONEYCOMB / LENS / GLASS						
MICRO VISOR	**10034 0010 B**	max. 350mA	A	A		A

* REMOTE INSTALLATION


B

SPY 27



0-85° 355°

43 x 40




0-85° 355°


43 x 40

SPY 27				CLIP	L CLIP
3000K CRI>90	1, 2 or 4 LED [U] 5.8W / 787lm / 350mA	IP20	30°	**24118 9320** ◇	**24133 9320** ◇
2700K CRI>90	1, 2 or 4 LED [U] 5.8W / 753lm / 350mA			**24118 9220** ◇	**24133 9220** ◇


◇ B-B / FBR-B / FG-B / GC-B / W-W



0-85° 360°



0-85° 360°



0-85° 355°


SPY 27				ON	2 ON	L 4 ON
3000K CRI>90	1, 2 or 4 LED 5.8W / 787lm / 350mA	MAINS	30°	**24119 9328** ◇	**24120 9328** ◇	**24145 9328** ◇
2700K CRI>90	1, 2 or 4 LED 5.8W / 753lm / 350mA			**24119 9228** ◇	**24120 9228** ◇	**24145 9228** ◇
				◇ B-B / B-GC / W-W		◇ B-B / W-W
				220-240V / 50-60Hz		220-240V / 50-60Hz
				IP20		IP20

A

A GLIMPSE OF ME
ON PAGE 54

C


FIND ME ONLINE

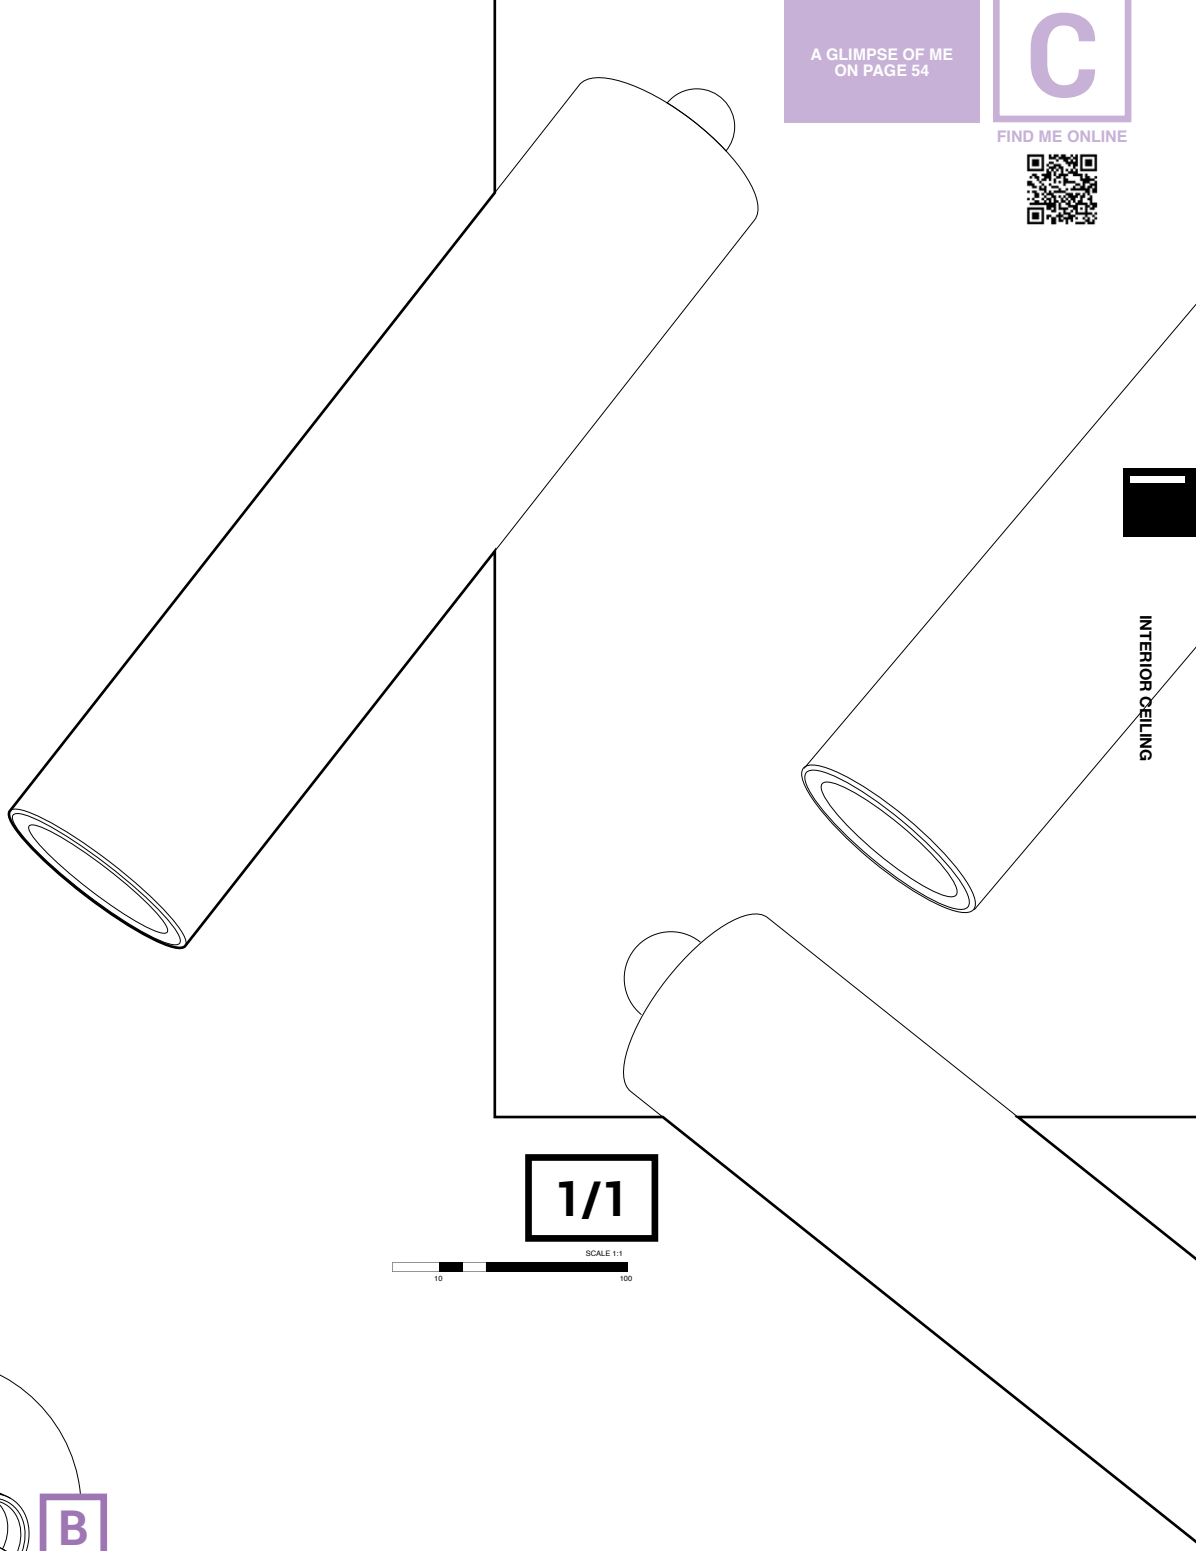

1/1

SCALE 1:1

10 100

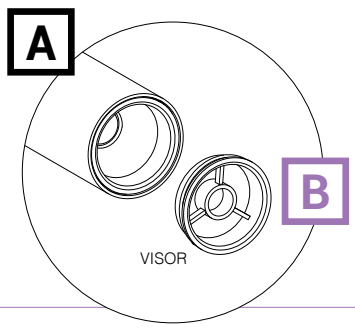


FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY				
			SPY 27				
			CLIP	L CLIP	ON	2 ON	L 4 ON
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *			
1-10V DIM 15	**300 90 124**	min. 55	R *	R *			
DALI DIM 14	**300 90 125**	min. 55	R *	R *			
HONEYCOMB / LENS / GLASS							
VISOR 27	**24144 0040 B**		A	A	A	A	A


* REMOTE INSTALLATION

B

SPY 39 PATENTED








ØKIT x 130 | ØKIT x 80 | 98 x 80 / max.25

SPY 39

				TRIMLESS IN	TRIMLESS	ST
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	20°	**24123 9320** ◇	**24121 9320** ◇	**24142 9320** ◇
	LED [U] 8.6W / 1089lm / 500mA		40°	**24123 9330** ◇	**24121 9330** ◇	**24142 9330** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA		20°	**24123 9220** ◇	**24121 9220** ◇	**24142 9220** ◇
	LED [U] 8.6W / 1041lm / 500mA		40°	**24123 9230** ◇	**24121 9230** ◇	**24142 9230** ◇

◇ B / FBR / FG / GC / W — ◇ W-W

+ NEW COLOURS: BRA / BRCU / BRG / BROB / BRAT / PB




ØKIT x 80


NEW


SPY 39 PLUG


				SPY 39 PLUG
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	20°	**24149 9320** ◇
	LED [U] 8.6W / 1089lm / 500mA		40°	**24149 9330** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA		20°	**24149 9220** ◇
	LED [U] 8.6W / 1041lm / 500mA		40°	**24149 9230** ◇

◇ B / BRA / BRCU / BRG / BROB / BRAT / PB / FBR / FG / GC / W









43 x 40 | 43 x 40


SPY 39


				CLIP	L CLIP	ON	L ON
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	20°	**24125 9320** ◇ **	**24134 9320** ◇	**24127 9320** ◇ ***	**24136 9320** ◇
	LED [U] 8.6W / 1089lm / 500mA		40°	**24125 9330** ◇ **	**24134 9330** ◇	**24127 9330** ◇ ***	**24136 9330** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA		20°	**24125 9220** ◇ **	**24134 9220** ◇	**24127 9220** ◇ ***	**24136 9220** ◇
	LED [U] 8.6W / 1041lm / 500mA		40°	**24125 9230** ◇ **	**24134 9230** ◇	**24127 9230** ◇ ***	**24136 9230** ◇


◇ B-B / FBR-B / FG-B / GC-B / W-W — ◇ B / FBR / FG / GC / W


** **+ NEW COLOURS:** BRA-B / BRCU-B / BRG-B / BROB-B / BRAT-B / PB-B

*** **+ NEW COLOURS:** BRA / BRCU / BRG / BROB / BRAT / PB









SPY 39


				ON 1	L ON 1	ON 2	L ON 2
3000K CRI>90	1 or 2 x LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA *	MAINS	20°	**24129 9328** ◇	**24138 9328** ◇	**24130 9328** ◇	**24140 9328** ◇
			40°	**24129 9338** ◇	**24138 9338** ◇	**24130 9338** ◇	**24140 9338** ◇
2700K CRI>90			20°	**24129 9228** ◇	**24138 9228** ◇	**24130 9228** ◇	**24140 9228** ◇
			40°	**24129 9238** ◇	**24138 9238** ◇	**24130 9238** ◇	**24140 9238** ◇


*Selection by DIP switch on internal driver


◇ B-B / W-W

220-240V / 50-60Hz

IP20

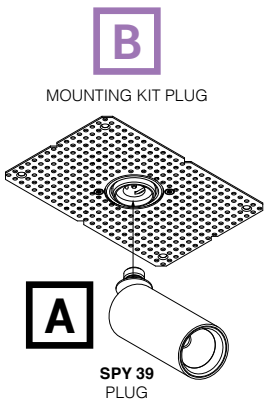


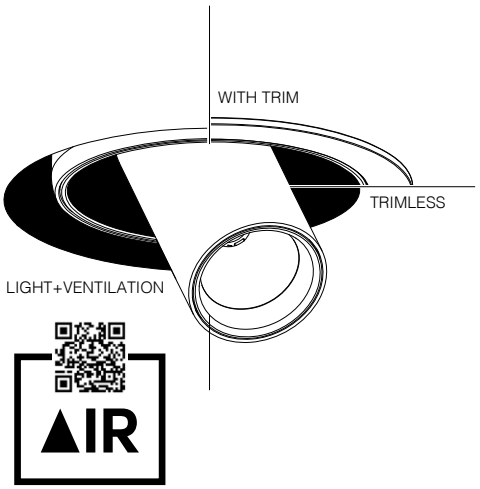



If you like it, then you shoulda put a tube on it.

OH, OH, OH, OH, OH, OH, OH, O-OHH

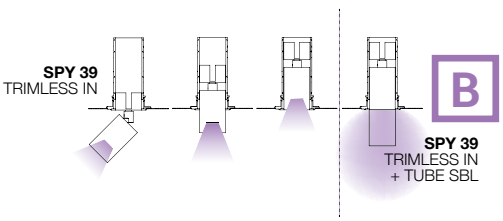


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY SPY 39											
			TR IN	TR	ST	PLUG	CLIP	L CLIP	ON	L ON	ON 1	L ON 1	ON 2	L ON 2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R	R *	R *	R *	R *	R *				
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R	R *	R *	R *	R *	R *				
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R	R *	R *	R *	R *	R *				
FINISH														
SPY 39 TUBE	**24144 0010 B / FBR / FG / GC / W**		R	R	R	R	R		R		R		R	
or SPY 39 TUBE SBL	**24144 0070**		R	R	R	R	R		R		R		R	
or VISOR 39	**24144 0030 B**		R	R	R	R	R		R		R		R	
SPY 39 L TUBE	**24144 0020 B / FBR / FG / GC / W**							R		R		R		R
MOUNTING KIT TRIMLESS														
CONCRETE / PLASTERBOARD	**15212 2030**			R										
PLASTERBOARD	**24144 0050**		R											
COLD STRETCHED CEILING	**15212 0080**			R										
WARM STRETCHED CEILING	**15212 0160**			R										
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTERR														
PLASTERBOARD SIDE AIR	**29810 0030**	Light+Ventilation		R										
	29810 0070	Light		R										
	29810 0100	Ventilation		O										
CONCRETE TOP AIR	**29810 0230**	Light+Ventilation		R										
	29810 0070	Light		R										
	29810 0200	Ventilation		O										
or MOUNTING KIT PLUG														
CONCRETE / PLASTERBOARD	**24144 0060**					R								
INSTALLATION														
COVERSET R Ø100	**204 00 100 B / W**								O	O				


* REMOTE INSTALLATION

B

SPY 52 PATENTED



ØKIT x 80




98 x 80 / max.25


A

SPY 52


				TRIMLESS	TRIMLESS FOCUS	ST
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA	IP20	20°	**19811 9320** ◇		**19814 9320** ◇
			45°	**19811 9330** ◇		**19814 9330** ◇
			26-46°		**19842 9300** ◇	
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA		20°	**19811 9220** ◇		**19814 9220** ◇
			45°	**19811 9230** ◇		**19814 9230** ◇
			26-46°		**19842 9200** ◇	
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		20°	**19896 9020** ◇		**19897 9020** ◇
			45°	**19896 9030** ◇		**19897 9030** ◇
			26-46°		**19843 9000** ◇	
TUNABLE WHITE	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		20°	**19813 9020** ◇ *		**19816 9020** ◇
			45°	**19813 9030** ◇ *		**19816 9030** ◇
				◇ B / FBR / FG / GC / W * ◇ B / W		◇ W-W



51 x 40





51 x 40




SPY 52

				CLIP (NEW)	CLIP FOCUS (NEW)	CLIP WALLWASH	ON
3000K CRI>90	LED [U] 8.6W / 1089lm / 500mA	IP20	WALLWASH			**19884 9300** ◇	
	LED [U] 8.6W / 1089lm / 500mA LED [U] 12.4W / 1467lm / 700mA		20°	**19820 9320** ◇			**19823 9320** ◇
			45°	**19820 9330** ◇			**19823 9330** ◇
			26-46°		**19840 9300** ◇		
2700K CRI>90	LED [U] 8.6W / 1041lm / 500mA		WALLWASH			**19884 9200** ◇	
	LED [U] 8.6W / 1041lm / 500mA LED [U] 12.4W / 1403lm / 700mA		20°	**19820 9220** ◇			**19823 9220** ◇
			45°	**19820 9230** ◇			**19823 9230** ◇
			26-46°		**19840 9200** ◇		
SOFT DIM	LED [X] 10.2W / 1038lm / 500mA		WALLWASH			**19891 9000** ◇	
	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		20°	**19898 9020** ◇			**19899 9020** ◇
			45°	**19898 9030** ◇			**19899 9030** ◇
			26-46°		**19841 9000** ◇		
TUNABLE WHITE	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		20°	**19822 9020** ◇ *			**19825 9020** ◇ *
			45°	**19822 9030** ◇ *			**19825 9030** ◇ *
				◇ B-B / B-FBR / B-FG / GC-B / W-W * ◇ B-B / W-W			◇ B / FBR / FG / GC / W * ◇ B / W









SPY 52 ON


				1	2	3
3000K CRI>90	1, 2 or 3 LED 5.8W / 787lm / 350mA * LED 8.6W / 1089lm / 500mA*	MAINS	20°	**19826 9328** ◇	**19827 9328** ◇	**19828 9328** ◇
			45°	**19826 9338** ◇	**19827 9338** ◇	**19828 9338** ◇
2700K CRI>90	1, 2 or 3 LED 5.8W / 753lm / 350mA * LED 8.6W / 1041lm / 500mA*		20°	**19826 9228** ◇	**19827 9228** ◇	**19828 9228** ◇
			45°	**19826 9238** ◇	**19827 9238** ◇	**19828 9238** ◇
SOFT DIM	1, 2 3000-1800K / CRI>90 LED 6W / 623lm / 350mA		20°	**19831 9028** ◇	**19832 9028** ◇	
			45°	**19831 9038** ◇	**19832 9038** ◇	
					◇ B-B / W-W 220-240V / 50-60Hz IP20	


*Selection by DIP switch on internal driver

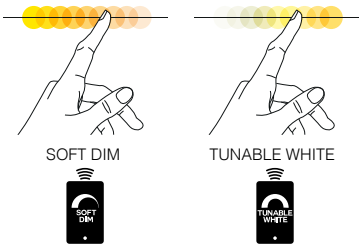

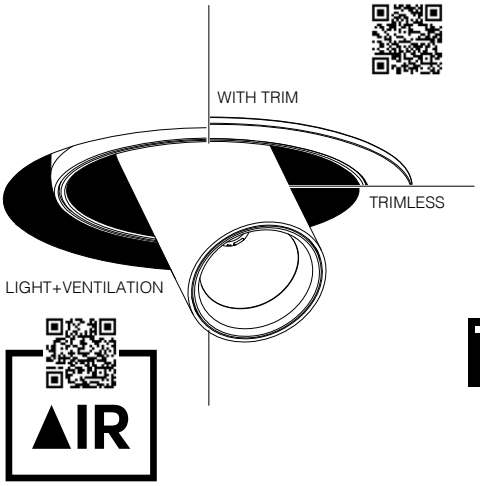


SPY 52 FOCUS

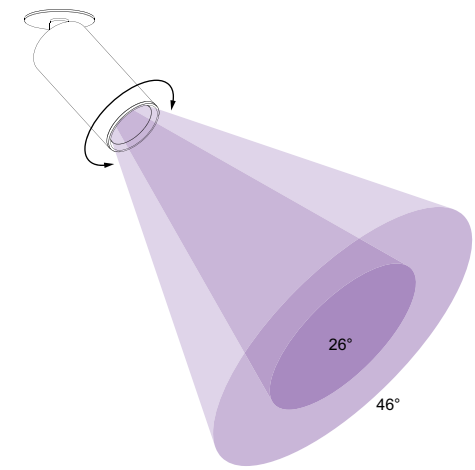


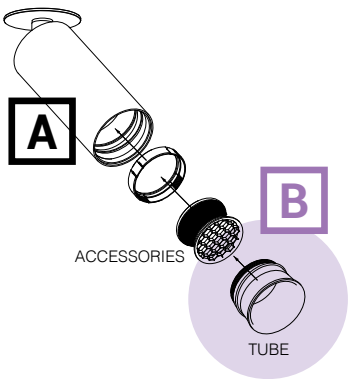

SPY 52 WALLWASH

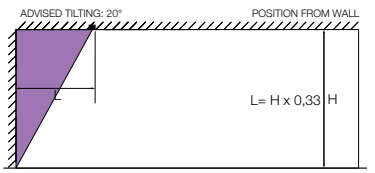

example: H=3000 mm → L= 3000 mm x 0,33 = 990 mm

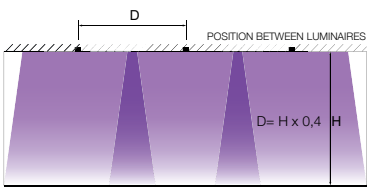

example: H=3000 mm → D= 3000 mm x 0,4 = 1200 mm


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY							
			SPY 52							
			TRIMLESS		ST	CLIP			ON	
				FOCUS			FOCUS	WALLWASH		1/2/3
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
MAINS DIM (FE) 11	21012 0298	min. 55	R *	R *	R	R *	R *	R *	R *	
1-10V DIM 15	300 90 124	min. 55	R *	R *	R	R *	R *	R *	R *	
DALI DIM 14	300 90 125	min. 55	R *	R *	R	R *	R *	R *	R *	
FINISH										
SPY 52 TUBE	19810 0100 B / FBR / FG / GC / W		R		R	R			R	R
MOUNTING KIT TRIMLESS										
CONCRETE / PLASTERBOARD	15212 2030		R	R						
COLD STRETCHED CEILING	15212 0080		R	R						
WARM STRETCHED CEILING	15212 0160		R	R						
MOUNTING KIT FLUSH SPY	414 90 01					O	O	O		
or MOUNTING KIT TRIMLESS + VENTILATION MORE INFO TECHNICAL CHAPTERR										
PLASTERBOARD SIDE AIR	29810 0030	Light+Ventilation	R	R						
	29810 0070	Light	R	R						
	29810 0100	Ventilation	O	O						
CONCRETE TOP AIR	29810 0230	Light+Ventilation	R	R						
	29810 0070	Light	R	R						
	29810 0200	Ventilation	O	O						
HONEYCOMB / LENS / GLASS (MAX 500mA FOR TRIMLESS AND ST)										
HONEYCOMB SINGLE USE	19810 0010 B		A		A	A			A	A
HONEYCOMB DOUBLE USE	19810 0060 B		A		A	A			A	A
LINEAR SPREAD LENS	19810 0020		A		A	A			A	A
SPREAD LENS	19810 0030		A		A	A			A	A
SOFTENING LENS	19810 0040		A		A	A			A	A
GLASS SBL	19810 0050		A		A	A			A	A
INSTALLATION										
COVERSET R Ø100	204 00 100 B / W								O	

* REMOTE INSTALLATION

B

SPY 66 / 90

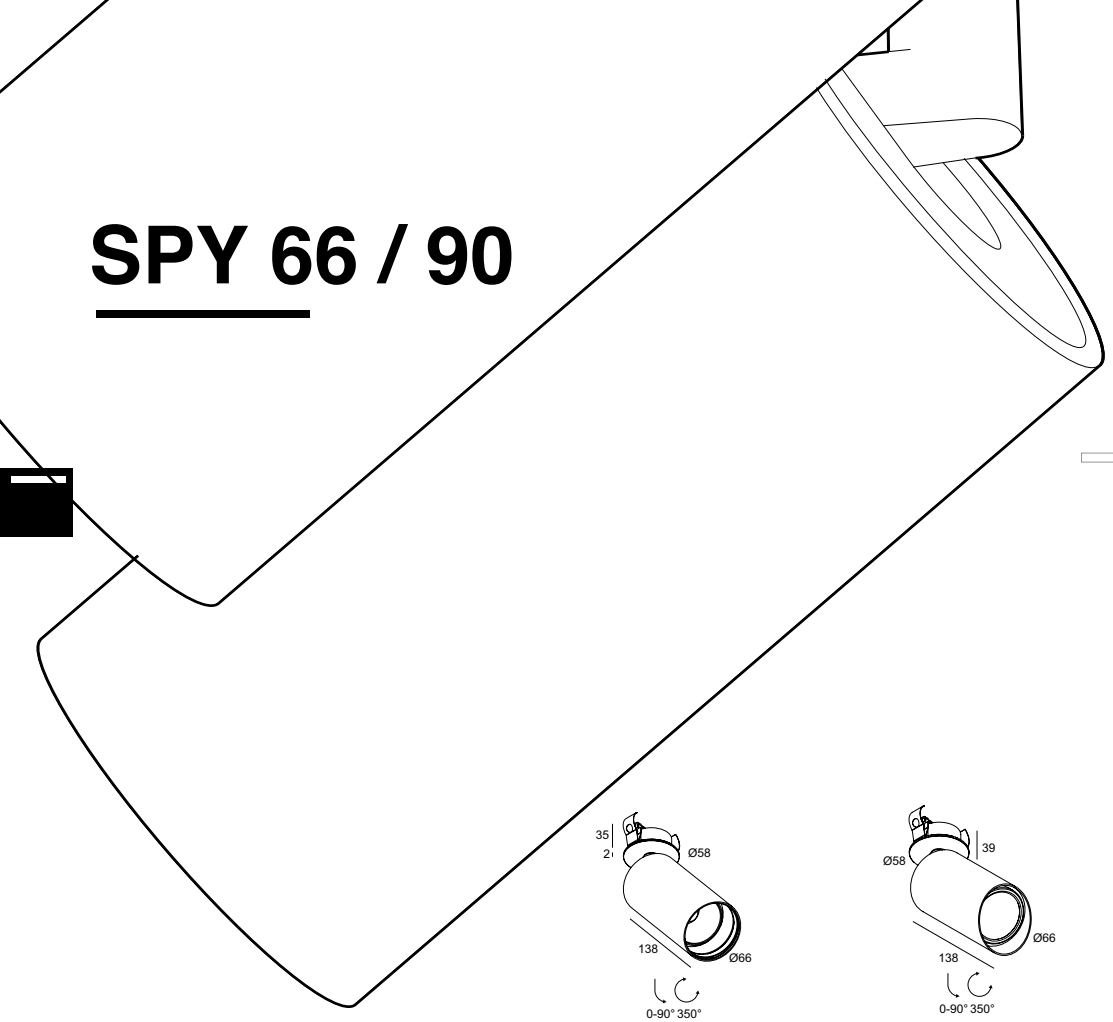


1/1

SCALE 1:1


10 100

51 x 40

51 x 40




SPY				66 CLIP	NEW 66 CLIP WALLWASH	66 ON
3000K CRI>90	LED [R] 17.2W / 2101lm / 500mA	IP20	WALLWASH		**24630 9300** ◇	
	LED [R] 17.2W / 2101lm / 500mA LED [R] 25W / 2811lm / 700mA		18°	**24621 9310** ◇		**24623 9310** ◇
			30°	**24621 9320** ◇		**24623 9320** ◇
			45°	**24621 9330** ◇		**24623 9330** ◇
2700K CRI>90	LED [R] 17.2W / 2009lm / 500mA		WALLWASH		**24630 9200** ◇	
	LED [R] 17.2W / 2009lm / 500mA LED [R] 25W / 2688lm / 700mA		18°	**24621 9210** ◇		**24623 9210** ◇
			30°	**24621 9220** ◇		**24623 9220** ◇
			45°	**24621 9230** ◇		**24623 9230** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		18°	**24622 9010** ◇		**24624 9010** ◇
			30°	**24622 9020** ◇		**24624 9020** ◇
			45°	**24622 9030** ◇		**24624 9030** ◇
				◇ B-B ● ● / W-W ○ ○		◇ B ● / W ○




A

NEW


SPY				90 ON
3000K CRI>90	23.2W / 3169lm / 700mA	1-10V	18°	**19882 9311** ◇
			30°	**19882 9321** ◇
			45°	**19882 9331** ◇
2700K CRI>90	23.2W / 3031lm / 700mA		18°	**19882 9211** ◇
			30°	**19882 9221** ◇
			45°	**19882 9231** ◇
				◇ B ● / W ○
				120-240V / 50-60Hz
				IP20




TUNABLE WHITE

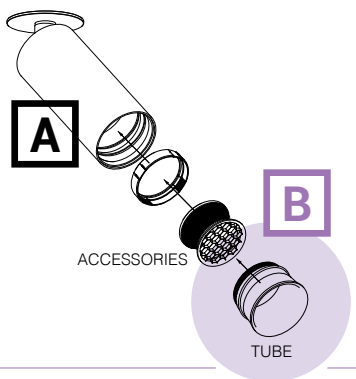

SPY 66 WALLWASH

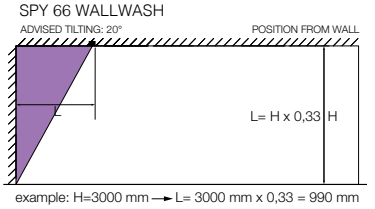

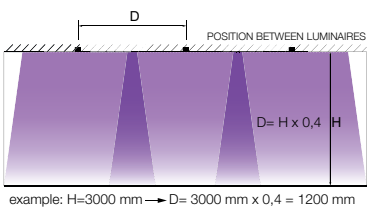


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			SPY 66			SPY 90
			CLIP	CLIP WALLWASH	ON	ON
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R *	
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R *	
FINISH						
SPY 66 TUBE	**24611 0100 B / FBR / FG / GC / W**		R		R	
SPY 90 TUBE	**19810 0170 B / FBR / FG / GC / W**					R
MOUNTING KIT TRIMLESS						
MOUNTING KIT FLUSH SPY	**414 90 01**		O	O		
HONEYCOMB / LENS / GLASS						
HONEYCOMB SINGLE USE	**24611 0150 B**		A		A	
	19810 0110 B					A
HONEYCOMB DOUBLE USE	**24611 0210 B**		A		A	
	19810 0120 B					A
LINEAR SPREAD LENS	**24611 0170**		A **		A **	
	19810 0140					A
SPREAD LENS	**24611 0200**		A **		A **	
	19810 0160					A
SOFTENING LENS	**24611 0190**		A **		A **	
	19810 0150					A
GLASS SBL	**24611 0160**		A **		A **	
	19810 0130					A


* REMOTE INSTALLATION


** MAX. 500mA

SPY



				SPY S
3000K CRI>90	LED 10.4W / 1128lm / 500mA	MAINS	33°	**19876 9328** ◇
2700K CRI>90	LED 10.4W / 1083lm / 500mA			**19876 9228** ◇
				◇ B ● / W ○
				220-240V / 50-60Hz
				IP20



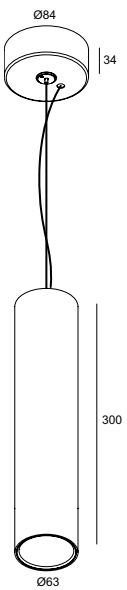



				MICROSPY 39 C	SPY C
3000K CRI>90	LED 7.1W / 812lm / 350mA	NON DIM	45°	**279 773 811 931** ◇	
		MAINS	33°		**279 776 811 932 ED8** ◇
2700K CRI>90	LED 7.1W / 779lm / 350mA	NON DIM	45°	**279 773 811 921** ◇	
		MAINS	33°		**279 776 811 922 ED8** ◇
				◇ B ● / W ○	
				110-240V / 50-60Hz INCL.1 x CABLE 2 x 0.75mm² / 1.6m IP20	110-240V / 50-60Hz INCL.1 x CABLE 2 x 0.75mm² INCL.1 x CABLE SUSP. SINGLE AUTO. 1.6m IP20


A GLIMPSE OF ME
ON PAGE 54

C

FIND ME ONLINE

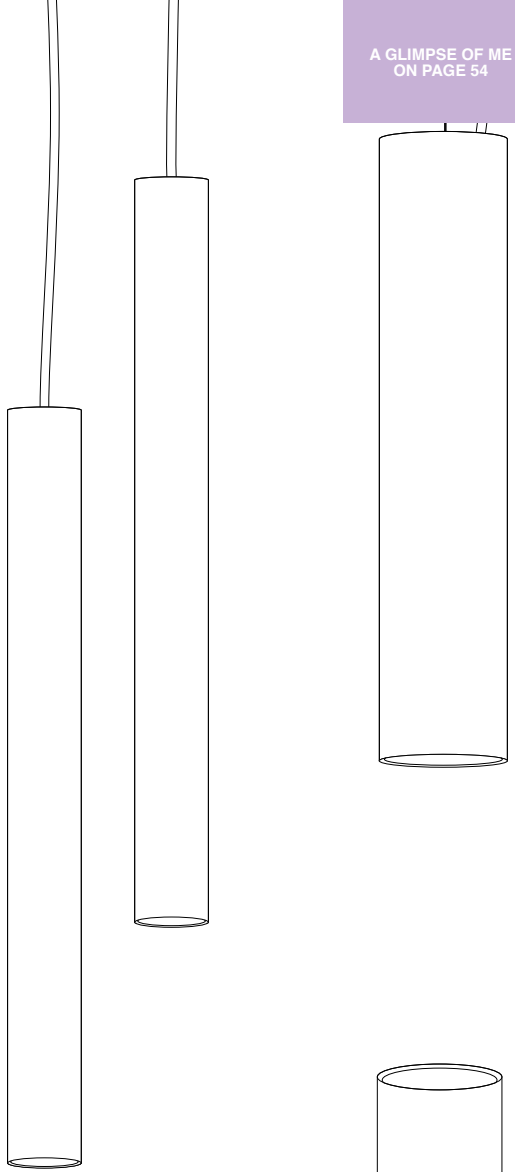

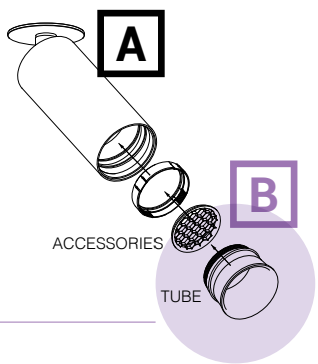

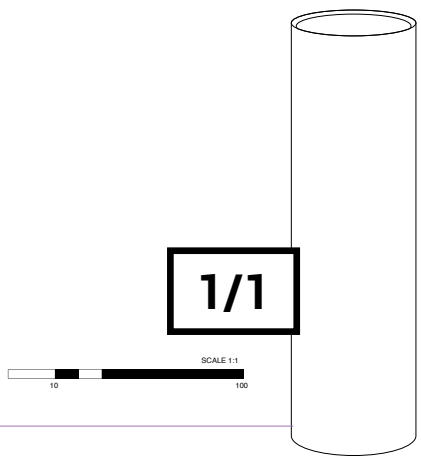



FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY		
		MICROSPY	SPY	
		39 C	C	S
FINISH				
SPY TUBE	**414 01 00 B/FBR/FG/MMAT/SG/W**		R	R
HONEYCOMB / LENS / GLASS				
HONEYCOMB	**413 03 01 B**		A	A
LINEAR SPREAD LENS	**413 03 02**		A	A
SPREAD LENS	**413 03 03**		A	A
SOFTENING LENS	**413 03 04**		A	A
GLASS SBL	**413 03 05**		A	A
INSTALLATION				
CONNECTION TRIMLESS	**328 10 03**	O		
SUSPENSION + CONNECTION TRIMLESS	**328 10 02**		O	
COVERSET R Ø100	**204 00 100 B / W**		O	


B

SPY FOCUS

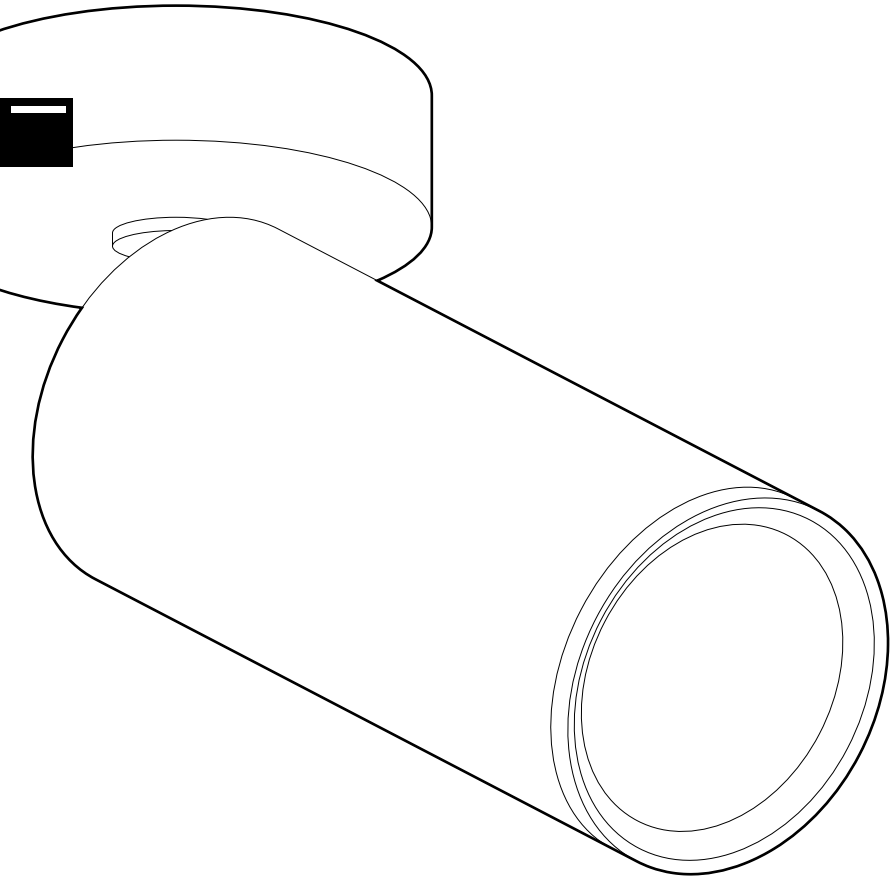





51 x 40




51 x 40





SPY FOCUS				CLIP LP	CLIP MP	ON LP	ON MP
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500m	IP20	8-43°	**19877 9300** ◇		**19878 9300** ◇	
	LED [R] 11.6W / 1524lm / 350mA LED [R] 17.2W / 2101lm / 500mA		12-45°		**19873 9300** ◇		**19874 9300** ◇
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		8-43°	**19877 9200** ◇		**19878 9200** ◇	
	LED [R] 11.6W / 1458lm / 350mA LED [R] 17.2W / 2009lm / 500mA		12-45°		**19873 9200** ◇		**19874 9200** ◇
				◇ B-B / FBR-B / FG-B / W-B / W-W		◇ B / FBR / FG / W	

deltalight.com/spy

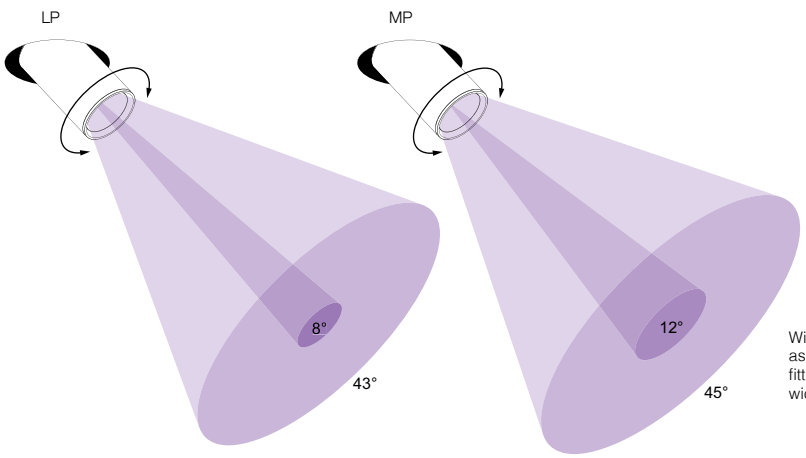

With Spy Focus one can opt for different beam angles out of only 1 luminaire, as the circle of light can be widened or narrowed by rotating the front of the fittings' body. As such, the beam angle can easily be altered from spot to wide flood and everything in between.

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			SPY FOCUS			
			CLIP LP	CLIP MP	ON LP	ON MP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R *
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R *	R *
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R *	R *
MOUNTING KIT TRIMLESS						
MOUNTING KIT FLUSH SPY	**414 90 01**		O	O		
INSTALLATION						
COVERSET R (Ø100	**204 00 100 B / W**				O	O


* REMOTE INSTALLATION

B


RAND


Rand is a longstanding classic in the Delta Light collection, confirming the company's philosophy for timeless design. Avoiding visible screws, Rand offers you a stylish and highly flexible lighting solution for both residential and non-residential projects. As a full LED version, Rand combines ecology and esthetics, and guarantees a perfect balance between lighting quality and energy efficiency.


deltalight.com/rand

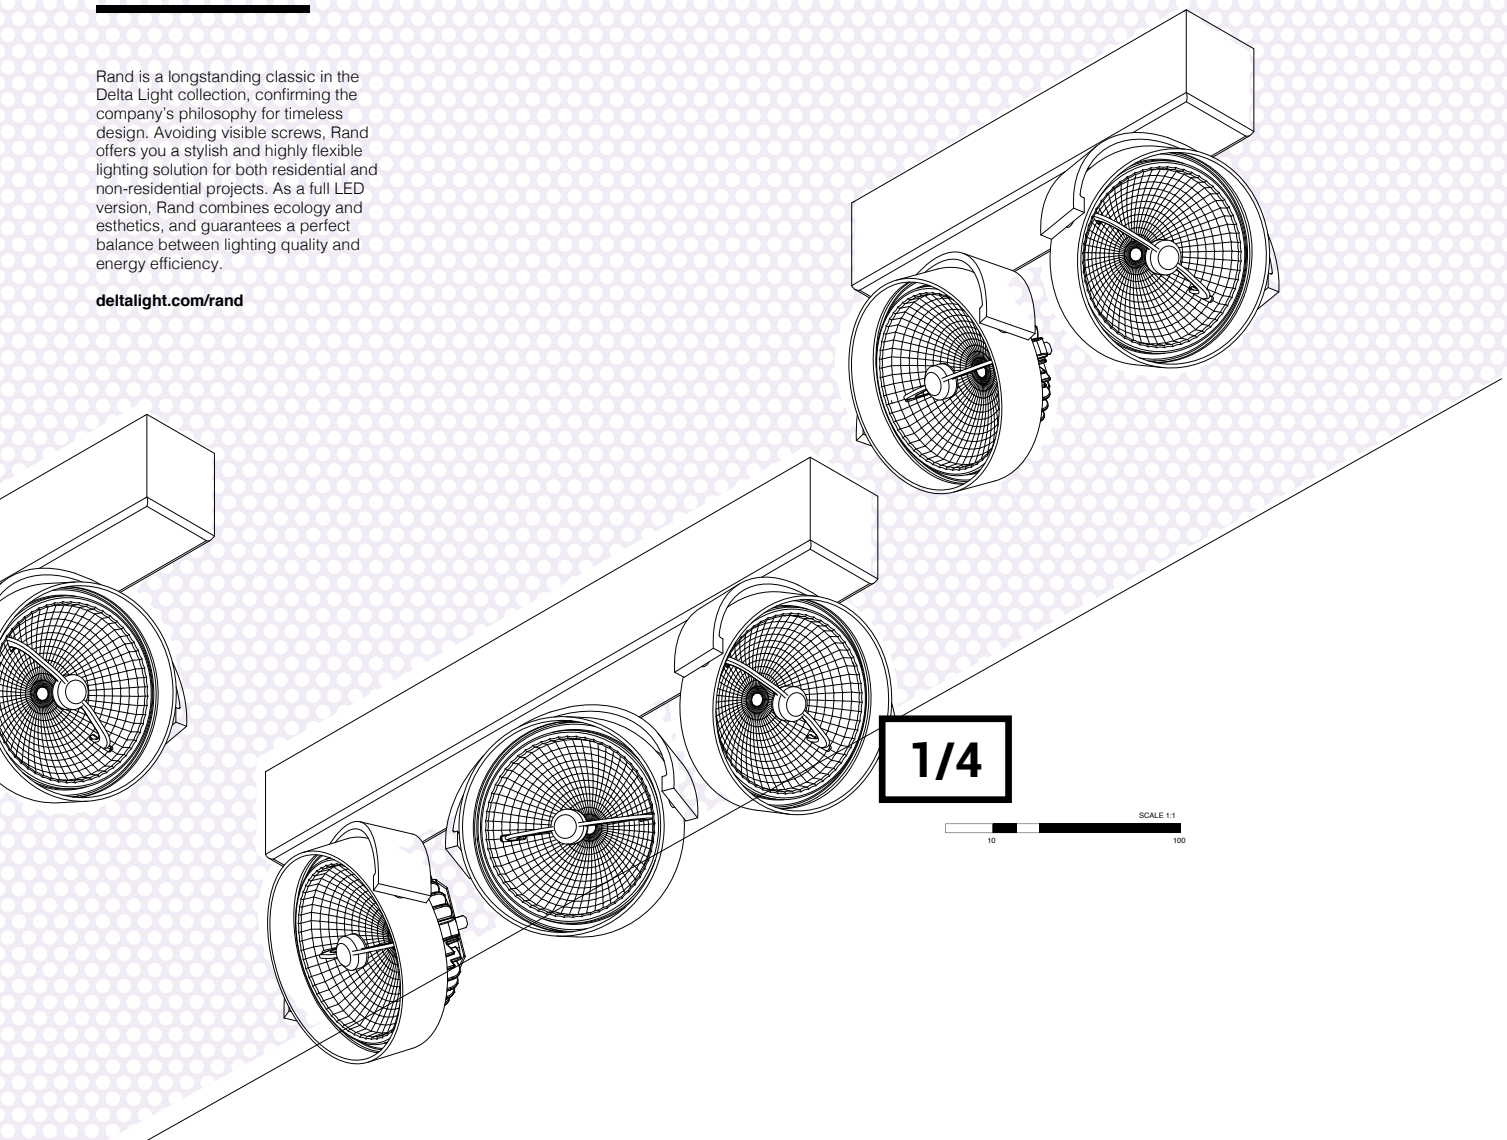

A







RAND				111 LED	211 LED	311 LED
2700K CRI>90	1, 2 or 3 LED 111 LAMP 13W / 730lm / 350mA	MAINS	24	**285 501 124 ED8** ◇	**285 501 224 ED8** ◇	**285 501 324 ED8** ◇

◇ A ● / B ● / W ○

G53 / 220-240V / 50-60Hz

IP20




SUPER-OH!


FAMILY

A series of slim black rings floating through space, finished either with integrated powerleds or the more retro-look version with classic light bulbs. The Super-Oh can also be combined with Delta Light's Wireless Control Dimming module, allowing you to manage your Super-Oh from your mobile device.


deltalight.com/super-oh

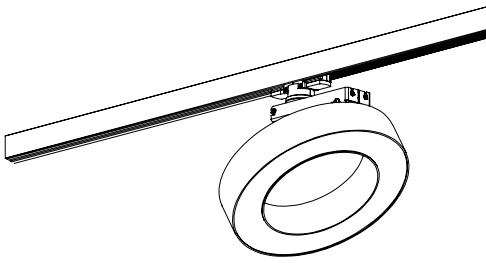


TRACK
SUPER-OH!
XS 39 PIVOT
ADM

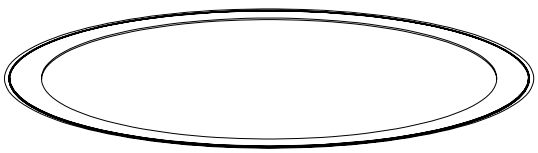


SUPER-OH!
TRIMLESS

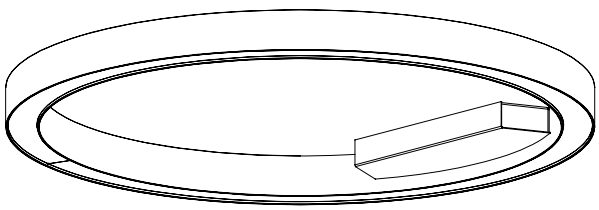


SUPER-OH!
SLIM

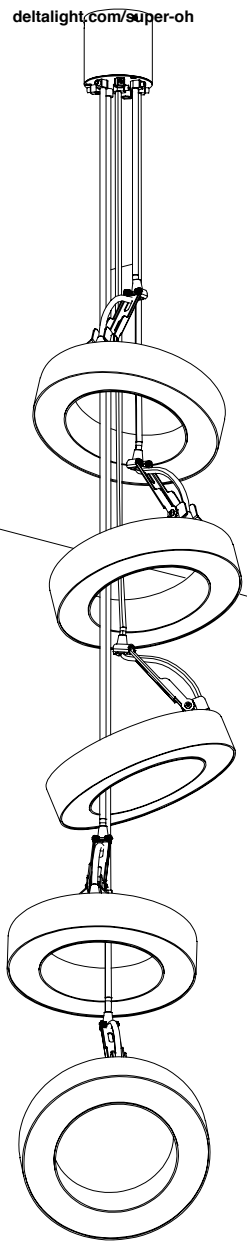

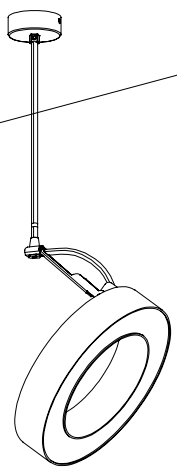


SUPER-OH!
XS 39 C



SUPER-OH!
XS 39

1/10

SCALE 1:1
10 100

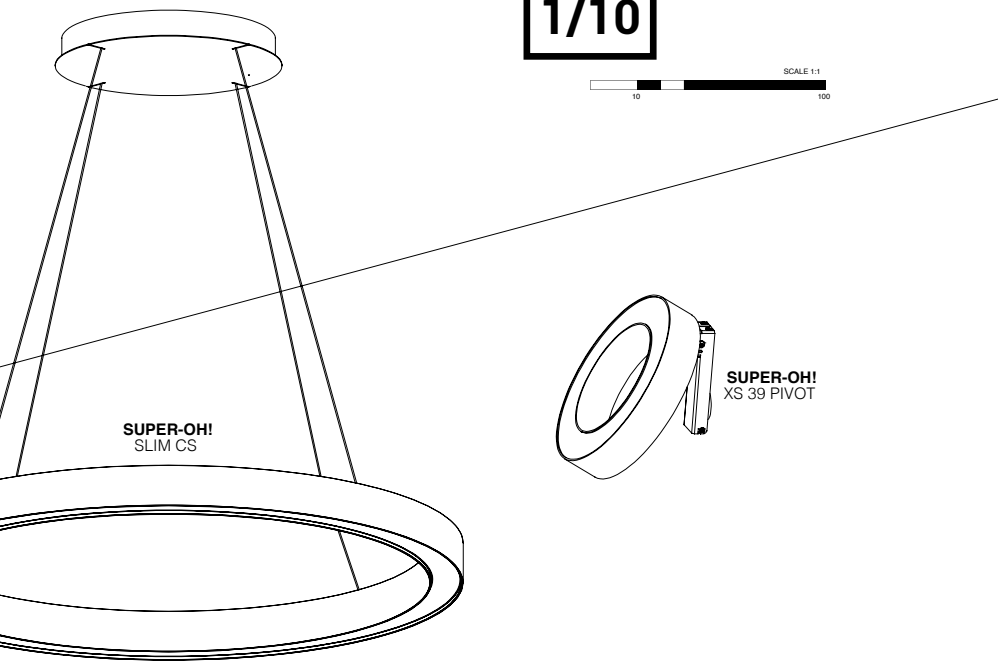

SUPER-OH!
SLIM CS

SUPER-OH!
XS 39 PIVOT


		XS	SUPER-OH!		SLIM			
		25 / 39	70	120	70	120	HP 70	HP 120
LIGHT EFFECT								
DOWN		13,5W - 1470lm 25W - 2940lm	43W - 6942lm	74W - 11728lm	30,6W - 4951lm	47,5W - 7702lm	47,5W - 7179lm	71,3W - 10769lm
DOWN-UP					DOWN 30,6W - 4951lm UP 23,8W - 3851lm	DOWN 47,5W - 7702lm UP 35,7W - 5776lm	DOWN 47,5W - 7179lm UP 23,8W - 3851lm	DOWN 71,3W - 10769lm UP 35,7W - 5776lm
OPTICS								
SANDBLASTED SBL		•	•	•	•	•	•	•
COLOUR TEMPERATURE								
3000K		•	•	•	•	•	•	•
CONTROL								
EXCL. POWER SUPPLY								
NON DIM					•	•	•	•
MAINS DIM		•						
1-10V DIM			•	•				
DALI DIM			•	•	•	•	•	•
WIRELESS DIM								
COLOUR								
WHITE ◯		•			•	•	•	•
BLACK ●		•			•	•	•	•
INSTALLATION								
INTERIOR	RECESSED TRIMLESS	•	•	•				
	SURFACE MOUNTED	•			•	•	•	•
	SURFACE MOUNTED TILTED	•						
	SUSPENDED CABLE	•			•	•	•	•
	TRACK	•						

• STANDARD
• NOT FOR ALL VERSIONS

SUPER-OH!

SUPER-OH! XS
With its 25cm or 39cm diameter, the Super-Oh XS (Extra Small) can be considered to be the “little one” of the family. With only 5cm height, this perfectly curved circle holds a polycarbonate, hiding an intense clustered inner circle of the latest powerleds. This circle of leds is specially designed to guarantee a uniform and perfectly balanced light output, resulting in a very enjoyable diffuse lighting effect.
The Super-Oh XS is available either for direct mounting, as a suspension or with a pivot, a flexible ceiling bracket enabling the user to tilt the disc up to 45°, and rotate 360°.


super-oh! trimless
To keep a consistent design code throughout your project you can also integrate a trimless Super-Oh. The result is a fully recessed, slim aureole.
A symbol of infinity, without beginning or end, perfect, the ultimate geometric symbol seamlessly integrated into architecture.

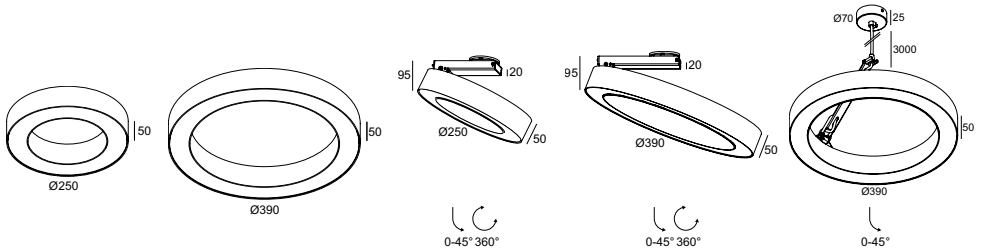

SUPER-OH! XS			25	39	PIVOT 25	PIVOT 39	39 C
3000K CRI>80	LED 13,5W / 1470lm	MAINS			**308 22 02 83 ED8** ◇		
			308 21 02 83 ED8 ◇				
	LED 25W / 2940lm					**308 22 03 83 ED8** ◇	**308 241 03 83 ED8** ◇
				308 21 03 83 ED8 ◇			
			◇ B ● / W ○				
			220-240V / 50-60Hz				
			IP40	IP40	IP20	IP20	IP20
							INCL.CABLE 3x 0,75mm² / 3m





SUPER-OH! TRIMLESS			735 x 150 / max.25	1240 x 150 / max.25
			70	120
3000K CRI>90	LED 44,1W / 6476lm	1-10V	**20729 9301**	
		DALI	**20729 9305**	
	LED 75,4W / 10920lm	1-10V		**20730 9301**
		DALI		**20730 9305**
			220-240V / 0 | 50-60Hz	
			IP20	

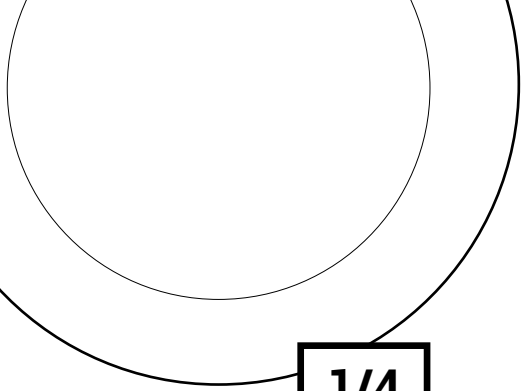

1/4

SCALE 1:1
10 100

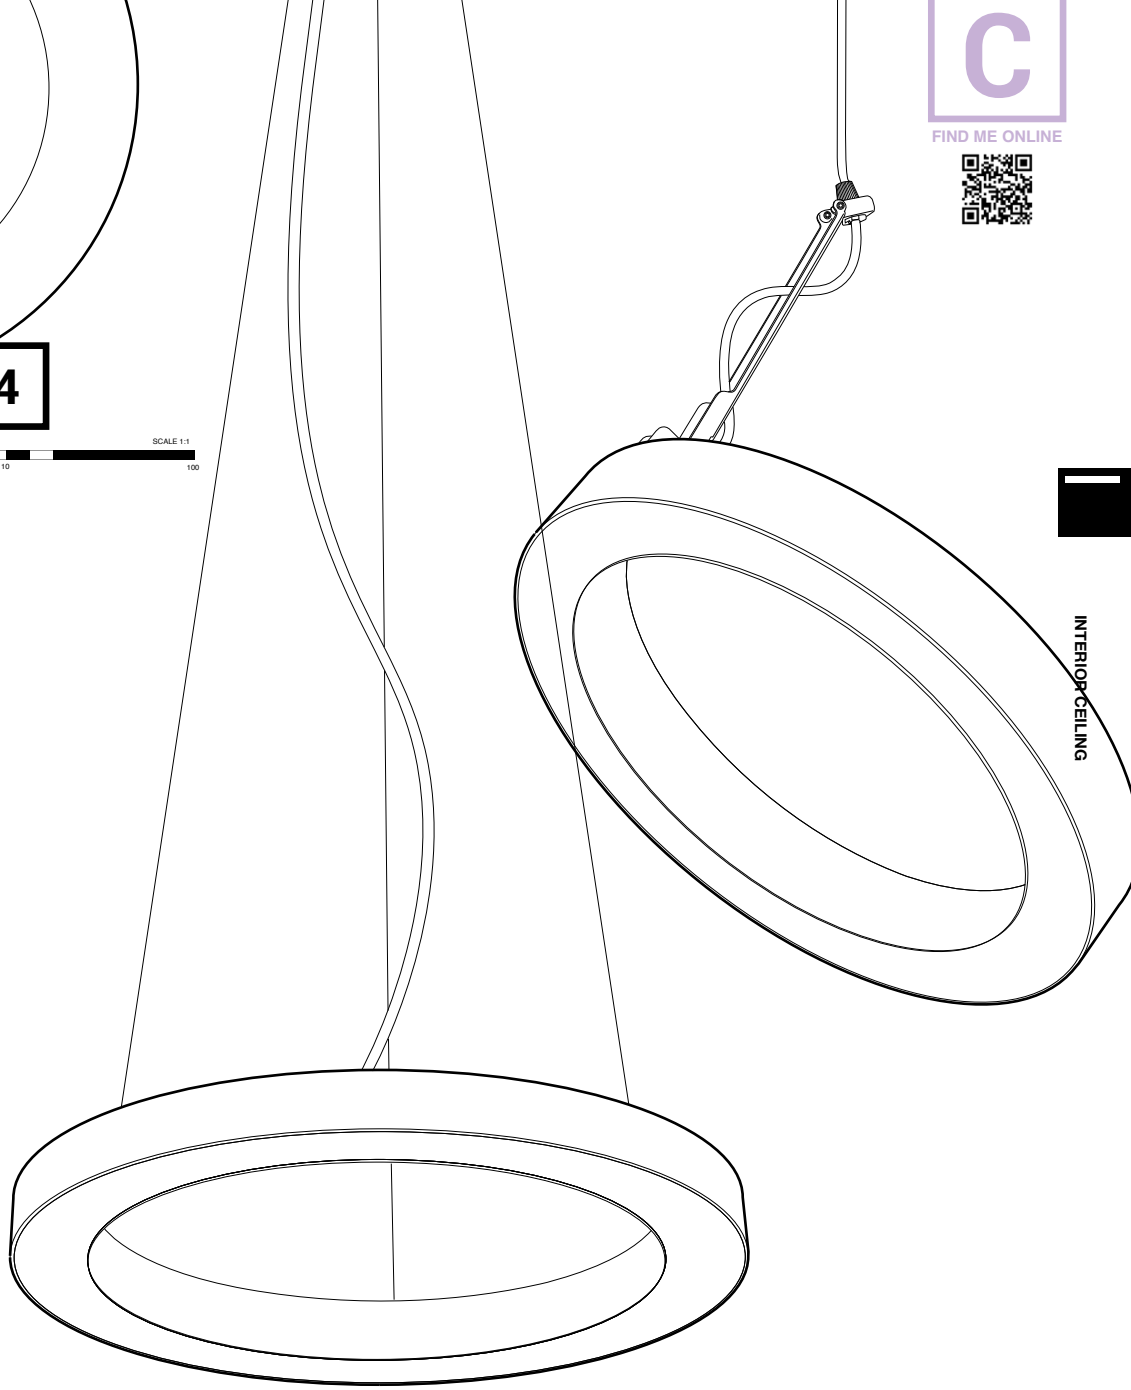

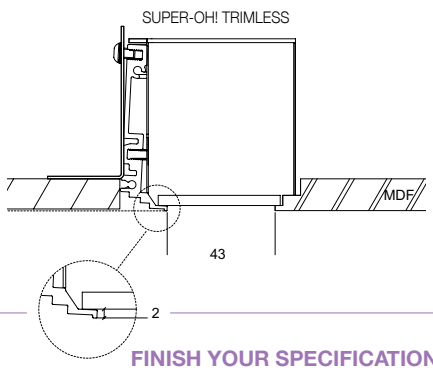


FINISH YOUR SPECIFICATION


		REQUIREMENT / OPTION / ACCESSORY						
		SUPER-OH!						
		TRIMLESS		XS				
		70	120	25	39	PIVOT 25	PIVOT 39	39 C
INSTALLATION								
SUPER-OH! XS CEILING BASE	**308 24 99 B** (max. 8 luminaires)							O

B


SUPER-OH! SLIM

Evolving from our existing Super-Oh! family, Super-Oh! Slim stands out in design and efficiency. With a width of only 44mm and a luminous efficacy up to 119lm/W, this family of halo's combines slender elegance with big performance. Super-Oh! Slim comes in 2 diameters - 800mm and 1200mm - and is available with only direct light or a combination of direct and indirect light. Two different designs allow you to either opt for clean lines in a soothing setting or either go for a design statement by choosing Super-Oh! Slim with an integrated powerbox. Apart from its functionality, the integrated powerbox acts as a rebel element, disrupting the perfect geometrical circle of light and adding a peculiar touch to the project.






SUPER-OH! SLIM			SBL		C SBL DOWN-UP	
			Ø779	Ø1179	Ø779	Ø1179
3000K CRI>90	LED 28,6W / 4570lm	NON DIM	**20737 9300** ◇			
		DALI DSI	**20737 9304** ◇			
	LED 44,6W / 7085lm	NON DIM		**20738 9300** ◇		
		DALI DSI		**20738 9304** ◇		
	LED 22,3W / 3542lm (UP) LED 28,6W / 4570lm (DOWN)	NON DIM			**20739 9300** ◇	
		DALI DSI			**20739 9304** ◇	
	LED 33,1W / 5304lm (UP) LED 44,6W / 7085lm (DOWN)	NON DIM				**20740 9300** ◇
		DALI DSI				**20740 9304** ◇
			◇ B ● / W ○		◇ B ● / W ○	
			220-240V / 50-60Hz		220-240V / 50-60Hz	
			IP20		INCL. 4 x CABLE SUSP. SINGLE AUTO 3m INCL. 1 x CABLE 5 x 0,75mm² CABLING 2 CIRCUITS IP20	



SUPER-OH! SLIM CS			SBL		SBL DOWN-UP		HP SBL		HP SBL DOWN-UP	
			Ø779	Ø1179	Ø779	Ø1179	Ø779	Ø1179	Ø779	Ø1179
3000K CRI>90	LED 28,6W / 4570lm	NON DIM	**20733 9300** ◇							
		DALI DSI	**20733 9304** ◇							
	LED 44,6W / 7085lm	NON DIM		**20734 9300** ◇						
		DALI DSI		**20734 9304** ◇						
	LED 45,9W / 7008lm	NON DIM					**20741 9300** ◇			
		DALI DSI					**20741 9304** ◇			
	LED 68,8W / 10512lm	NON DIM						**20742 9300** ◇		
		DALI DSI						**20742 9304** ◇		
	LED 22,3W / 3542lm (UP) LED 28,6W / 4570lm (DOWN)	NON DIM			**20735 9300** ◇					
		DALI DSI			**20735 9304** ◇					
	LED 22,3W / 3542lm (UP) LED 45,9W / 7008lm (DOWN)	NON DIM							**20743 9300** ◇	
		DALI DSI							**20743 9304** ◇	
	LED 33,1W / 5304lm (UP) LED 44,6W / 7085lm (DOWN)	NON DIM				**20736 9300** ◇				
		DALI DSI				**20736 9304** ◇				
	LED 33,1W / 5304lm (UP) LED 68,8W / 10512lm (DOWN)	NON DIM								**20744 9300** ◇
		DALI DSI								**20744 9304** ◇
			◇ B ● / W ○							
			220-240V / 50-60Hz							
			INCL. 4 x CABLE SUSP. SINGLE AUTO 3m POWER VIA CABLE SUSPENSION (DOWN/UP versions: CABLING 2 CIRCUITS) IP20							

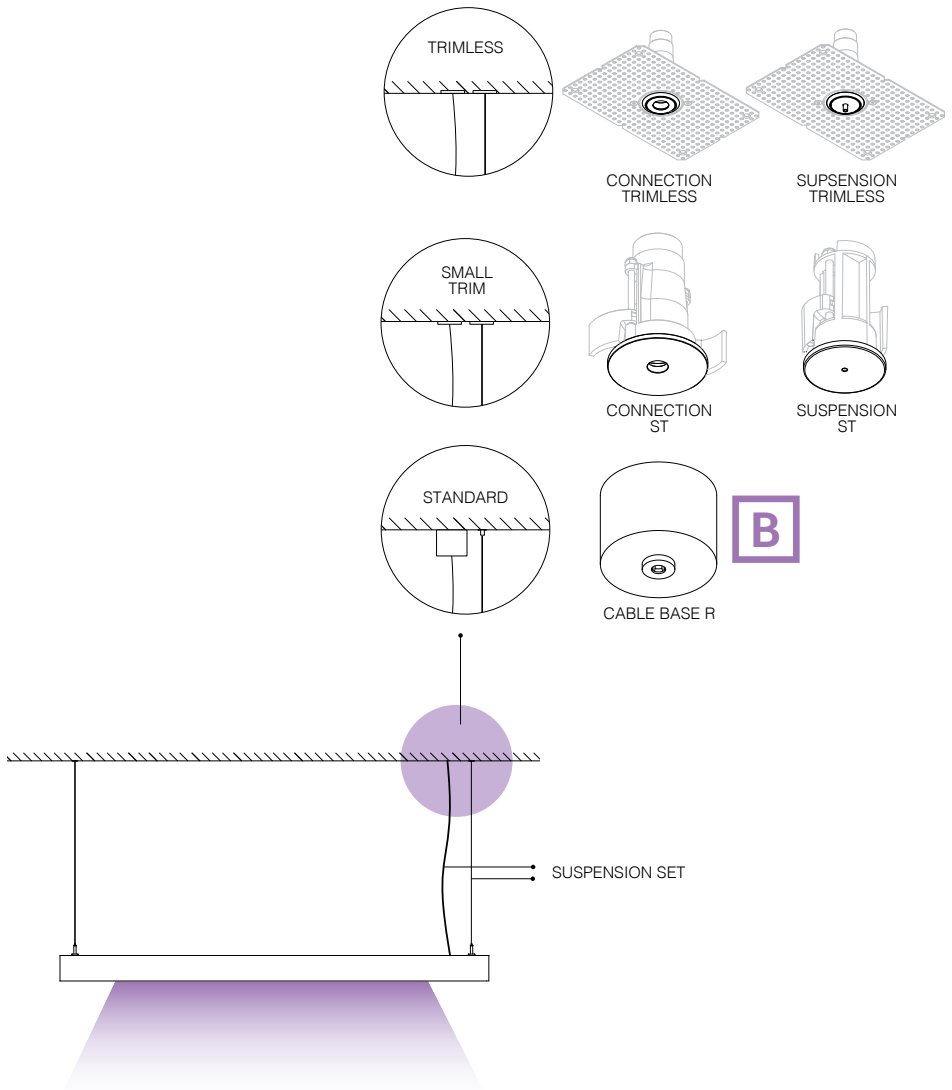


FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY					
		SUPER-OH! SLIM					
		SBL	C SBL		CS SBL		HP CS SBL
			DOWN-UP		DOWN-UP		DOWN-UP
INSTALLATION							
SUSPENSION SET 28 (NON DIM)	**15225 0280 B / W**	O					
SUSPENSION SET 29 (DALI DSI)	**15225 0290 B / W**	O					
CONNECTION ST	**15225 0360 B / W**	O	O				
SUSPENSION ST	**15225 0340 B / W**	O	O				
CONNECTION TRIMLESS O.F.A.	**328 10 03**	O	O				
SUSPENSION TRIMLESS O.F.A.	**328 10 01**	O	O				
CABLE BASE R	**203 99 55 B / W**	O	O				
COVERSET R Ø100	**204 00 100 B / W**	O	O				

SUPERLOOP

A luminaire can be more than light alone. It can be functional, it can be decorative, it can be an eye catcher. This family not only exists out of circles of light, it also brings circular and squared low voltage solutions for track lighting, so general and accent lighting can be combined within one family. In this way, Superloop allows you to choose 'functional', by mounting adjustable Spy modules on the round or square shaped base.
It allows you to choose 'decorative', by mounting the light emitting circle in a horizontal way, or it allows you to choose 'eye catcher', by carelessly hanging the circle of light vertical, as a statement.

deltalight.com/superloop

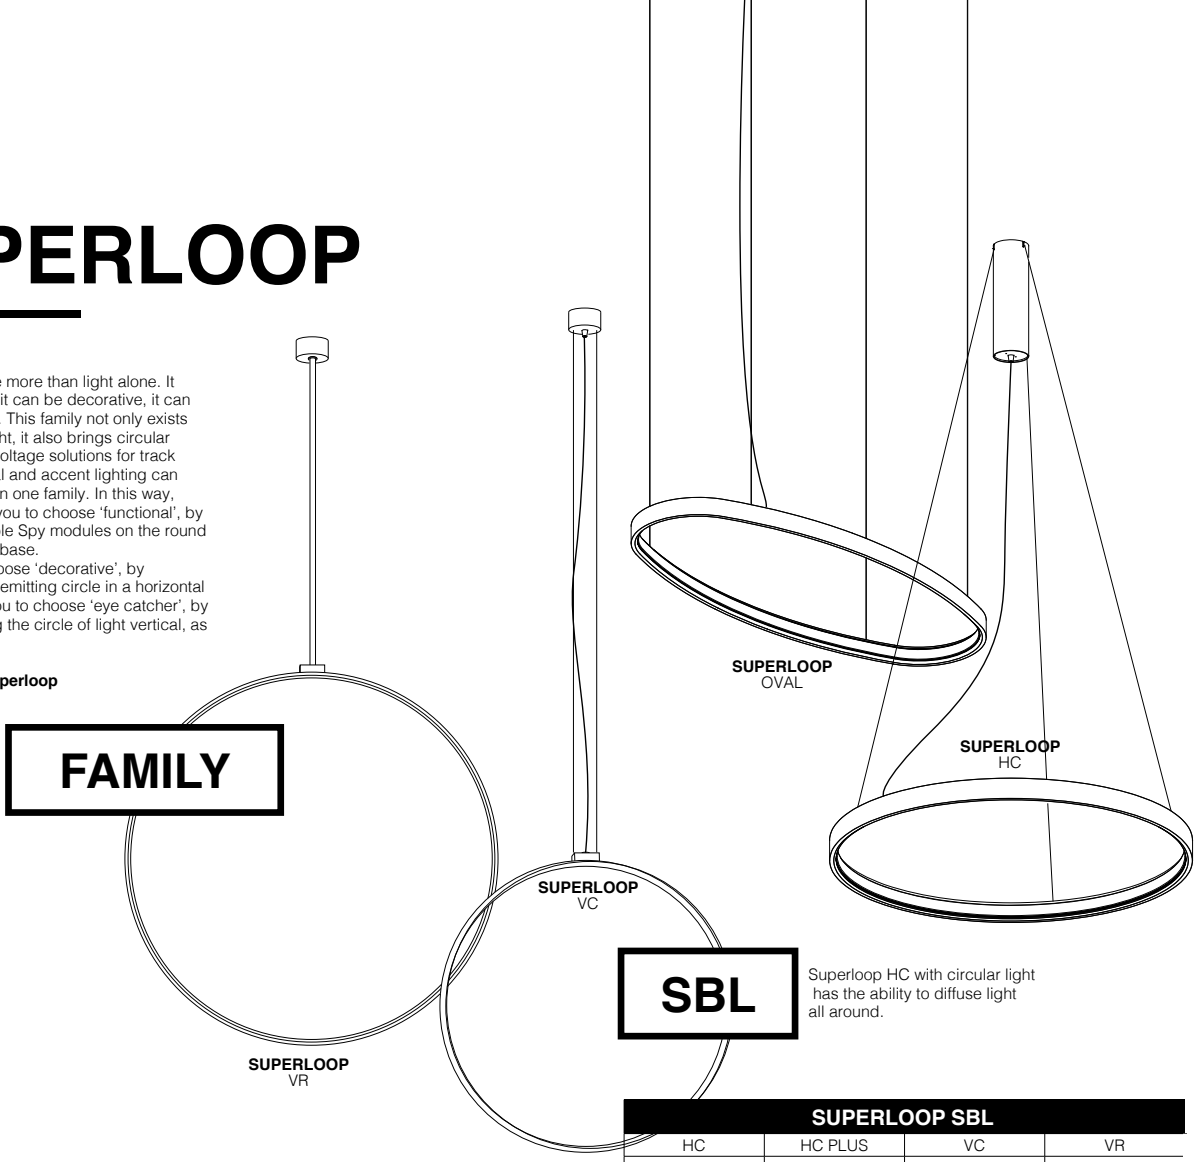

SBL


Superloop HC with circular light has the ability to diffuse light all around.

		SUPERLOOP SBL			
		HC	HC PLUS	VC	VR
LIGHT EFFECT					
DOWN-UP		DOWN 30,6W - 4951lm UP 23,8W - 3851lm	DOWN 47,5W - 7702lm UP 35,7W - 5776lm	DOWN 47,5W - 7179lm UP 23,8W - 3851lm	DOWN 71,3W - 10769lm UP 35,7W - 5776lm
OPTICS					
SANDBLASTED SBL		•	•	•	•
SEMI PRISMATIC SPR		•			
COLOUR TEMPERATURE					
3000K		•	•	•	•
CONTROL					
EXCL. POWER SUPPLY		•	•	•	•
NON DIM					
MAINS DIM					
1-10V DIM					
DALI DIM					
WIRELESS DIM					
COLOUR					
WHITE		•	•	•	•
BLACK		•	•	•	•
FLEMISH BRONZE		•	•	•	•
FLEMISH GOLD		•	•	•	•
COLOUR ACOUSTIC PANEL					
LIGHT GREY			•		
DARK GREY			•		
INSTALLATION					
INTERIOR	SUSPENDED CABLE	•	•	•	
	SUSPENDED ROD				•

A GLIMPSE OF ME
ON PAGE 10

C

FIND ME ONLINE

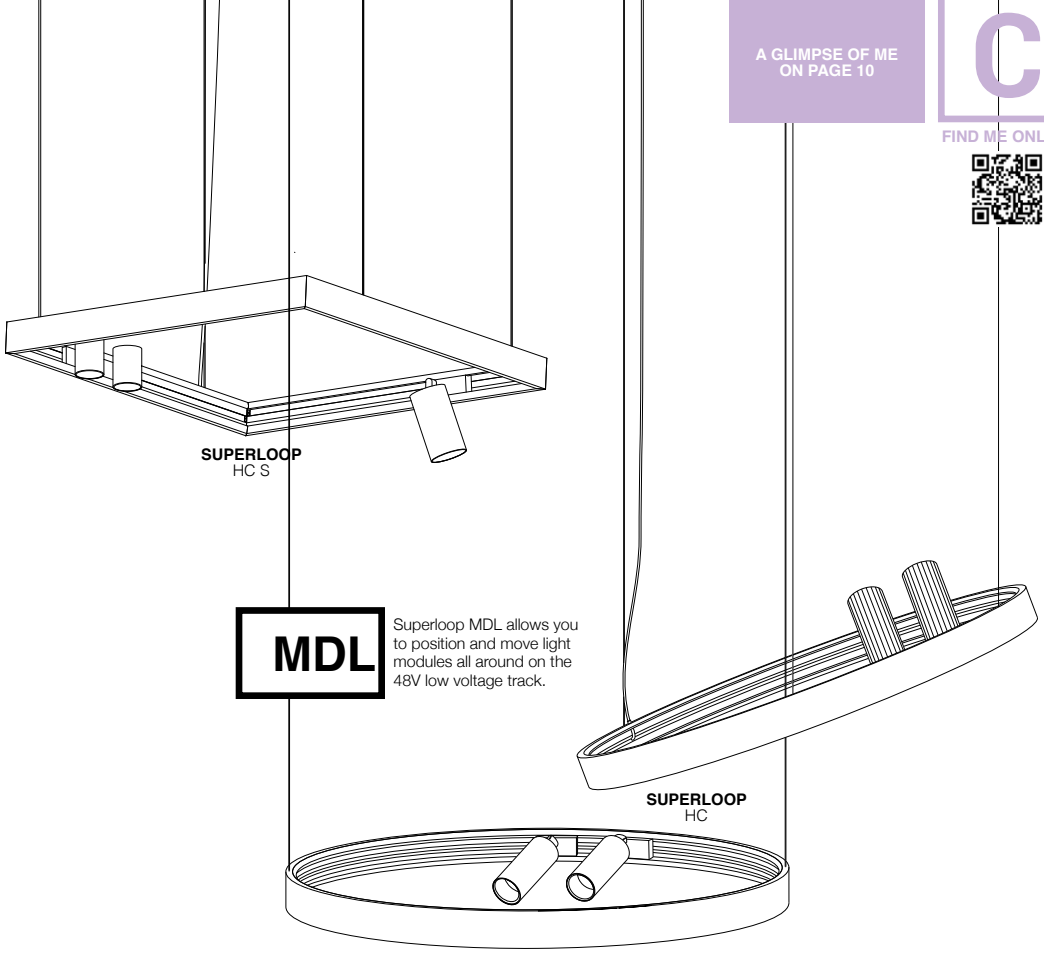

SUPERLOOP
HC S

SUPERLOOP
HC

MDL


Superloop MDL allows you to position and move light modules all around on the 48V low voltage track.

		SUPERLOOP MDL		
		HC		HC PLUS
		ROUND	SQUARE	ROUND
LIGHT EFFECT				
ACCENT LIGHT	SPY 52	•	•	•
	SPY 66	•	•	•
	SPY FOCUS	•	•	•
	VIZIR	•	•	•
	HEDRA	•	•	•
GENERAL LIGHT	FIX	•	•	
	FIX DOWN-UP	•	•	
	FIX DOWN-UP GT	•	•	
	XY180	•	•	
CONTROL				
EXCL. POWER SUPPLY		•	•	•
NON DIM				
MAINS DIM				
1-10V DIM				
DALI DIM				
WIRELESS DIM				
COLOUR				
BLACK		•	•	•
FLEMISH BRONZE		•		•
FLEMISH GOLD		•		•
COLOUR ACOUSTIC PANEL				
LIGHT GREY				•
DARK GREY				•
INSTALLATION				
INTERIOR	SUSPENDED CABLE	•		•


• STANDARD
• NOT FOR ALL VERSIONS


SUPERLOOP MDL PATENTED


Superloop is also available in a round or square shape with a Delta Light custom engineered 48V low voltage track on the inside. This allows you to position and move light modules all around, offering maximum flexibility and allowing you to meet any need of the project.
The modules enable you to move from subtle functionality to very expressive or timeless elegance. The Flemish Gold and Flemish Bronze finishes or the Spot modules Vizir and Hedra offer you a way to upgrade the minimal appearance of the loop. By adding the Fix modules with down- or down-up light, combined with a clear or frosted glass, you can transform your Superloop into a modern chandelier. Looking for a more expressive and unique statement? Just plug and play with the ledtubes of the XY180 collection.

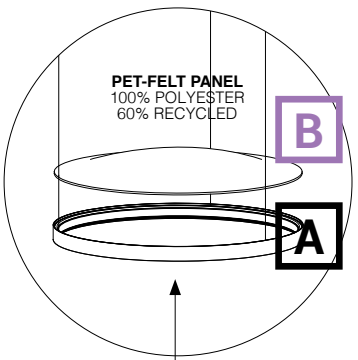

PLUS
Add a personal touch, improve acoustics or make a decorative element out of the minimalistic circle








SUPERLOOP MDL HC		ROUND	PLUS	SQUARE
70	Ø695	**418 481 07** ◇		
			20564 0000 ◇	
90	Ø924	**418 481 09** ◇		
			20565 0000 ◇	
120	Ø1191	**418 481 12** ◇		
			20566 0000 ◇	
170	Ø1688	**418 481 17** ◇		
200	Ø2000 2 SEGMENTS	**20555 0000** ◇		
250	Ø2500 3 SEGMENTS	**20556 0000** ◇		
300	Ø3000 3 SEGMENTS	**20557 0000** ◇		
350	Ø3500 4 SEGMENTS	**20558 0000** ◇		
400	Ø4000 4 SEGMENTS	**20559 0000** ◇		
500	Ø5000 4 SEGMENTS	**20560 0000** ◇		
S 106	600 x 600			**418 482 106** ◇
S 109	900 x 900			**418 482 109** ◇
S 211	250 x 1100			**418 482 211** ◇
S217	250 x 1700			**418 482 217** ◇
		◇ B ● / FBR ● / FG ●		◇ B ●
		48V		48V
		Ø695 - Ø1688: INCL.3 x CABLE SUSP. SINGLE AUTO. 3m INCL.1 x CABLE 2 x 0,75mm² – Ø2000 - Ø5000: INCL.2 x CABLE SUSP. SINGLE AUTO. 3m / SEGMENT INCL.1 x CABLE 2 x 0,75mm² / SEGMENT		INCL.4 x CABLE SUSP. SINGLE AUTO. 3m INCL.1 x CABLE 2 x 0,75mm²

B


GENERAL

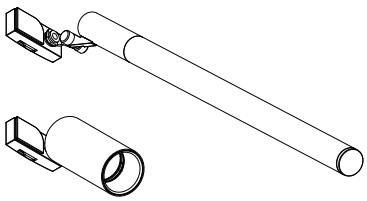

ACCENT




DOWN

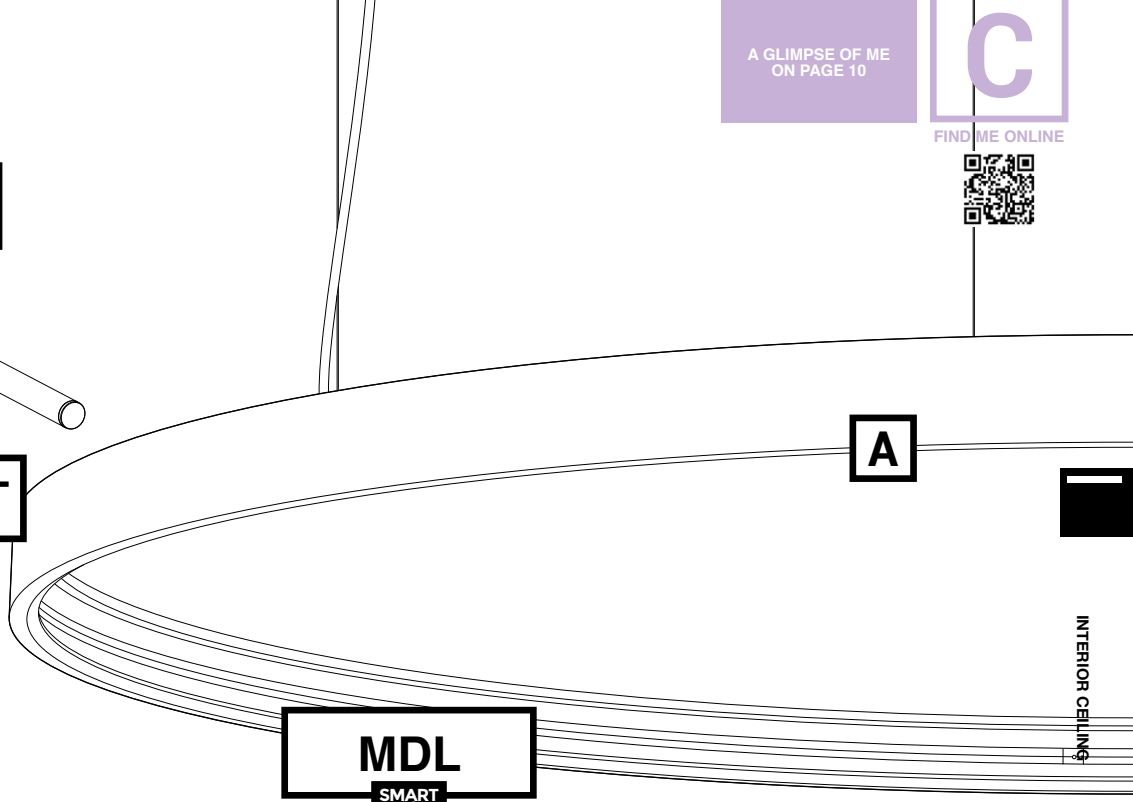


MDL

SMART 48

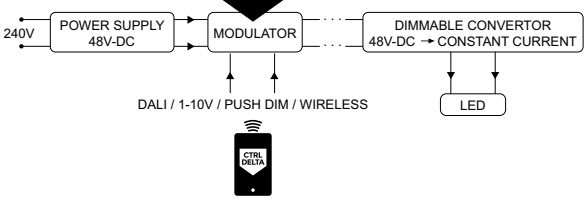

The carbon conductors inside the profile not only suffice for 48V power, Superloop MDL can also be dimmed with Smart 48.
It collects the power from the 48V power supply and combines it with a DALI, 1-10V or Push Dim input to send to the dimmable 48V converter in the luminaire. In this way dimming can be done by only using 2 wires - for both power and dimming - or it can even be done wireless when choosing for the Wireless Dimmable Modulator, based on CTRL DELTA.




FINISH YOUR SPECIFICATION

				REQUIREMENT / OPTION / ACCESSORY																
				SUPERLOOP MDL HC																
				ROUND										PLUS			SQUARE			
				70	90	120	170	200	250	300	350	400	500	70	90	120	S 106	S 109	S 211	S 217
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR																				
NON DIM	48V / 100W	**21012 0230**	298 x 30 x 17	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	48V / 100W / DIN	**300 89 48 100**	100 x 55 x 90	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	48V / 200W	**21012 0240**	392 x 30 x 22	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	48V / 240W / DIN	**300 89 48 240**	114 x 63 x 125	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
or POWERBOX																				
NON DIM	48V-DC / 50W	**418 48 050 B**	Ø80 x 200	R	R	R	R	R	R	R	R	R	R	R	R	R				
NON DIM	48V-DC / 100W	**418 48 100 B**	Ø80 x 300	R	R	R	R	R	R	R	R	R	R	R	R	R				
NON DIM	48V-DC / 60W	**300 48 060 B**	480 x 58 x 40														R	R	R	R
FINISH																				
LUMINAIRES		**NEXT PAGE**		R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
PANEL 70 LIGHT GREY		**20548 0030**												R						
PANEL 70 DARK GREY		**20548 0040**												R						
PANEL 90 LIGHT GREY		**20548 0050**													R					
PANEL 90 DARK GREY		**20548 0060**													R					
PANEL 120 LIGHT GREY		**20548 0070**														R				
PANEL 120 DARK GREY		**20548 0080**														R				
PANELS IN OTHER MATERIAL ON REQUEST																				
INSTALLATION																				
CONNECTION ST		**15225 0360 B / W**		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
SUSPENSION ST		**15225 0340 B / W**		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
CABLE BASE R		**203 99 55 ANO / B / W**		O	O	O	O	O	O	O	O	O	O	O	O	O				
COVERSET R Ø100		**204 00 100 B / W**		O	O	O	O	O	O	O	O	O	O	O	O	O				
CABLE BASE S		**203 99 56 ANO / B / W**															O	O	O	O
SMART 48 MODULATOR DIM9		**300 90 011**		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
SMART 48 MODULATOR WIRELESS DIM		**300 90 012**		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O


B


SUPERLOOP MDL PATENTED

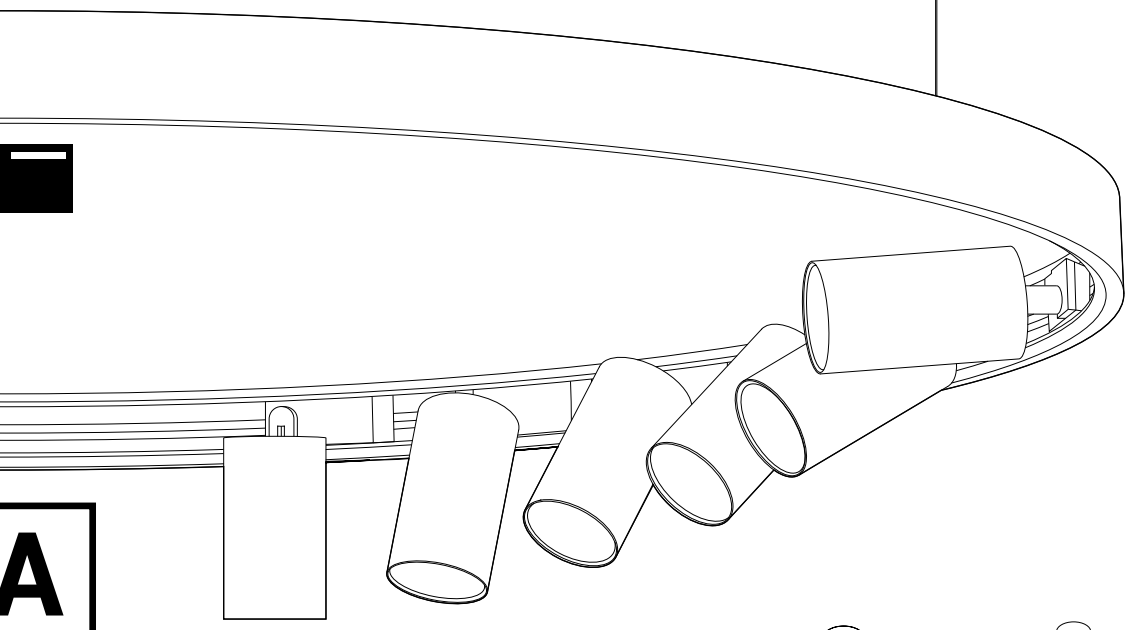





GLASS
CLEAR OR FROSTED












A

SUPERLOOP FIX *				40 MDL DOWN	45 MDL DOWN	40 DOWN-UP MDL	40 DOWN-UP GT MDL
3000K CRI>80	4.1W / 420lm / 48V-DC	IP20	20°	**418 161 832 MDL**◇			
	2,1W / 227lm (UP) / 48V-DC 4.1W / 420lm (DOWN) / 48V-DC					**418 162 832 MDL**◇	**418 163 832 MDL** ◇
3000K CRI>90	8.1W / 877lm / 48V-DC		40°		**418 263 933 MDL**◇		
2700K CRI>80	4.1W / 420lm / 48V-DC		20°	**418 161 822 MDL** ◇			
	2,1W / 213lm (UP) / 48V-DC 4.1W / 420lm (DOWN) / 48V-DC					**418 162 822 MDL** ◇	**418 163 822 MDL** ◇
2700K CRI>90	8.1W / 877lm / 48V-DC		40°		**418 263 923 MDL** ◇		
				◇ B ●			

* NOT FOR SUPERLOOP PLUS







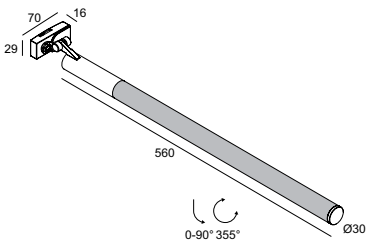



SUPERLOOP				VIZIR MDL	HEDRA MDL	XY180 MDL*
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	8°	**20543 9310** ◇	**20514 9310** ◇	
	LED 7.1W / 812lm / 48V-DC		33°	**418 367 811 932 MDL** ◇	**418 368 811 932 MDL** ◇	
	LED 8,9W / 1050lm / 48V-DC		-			**418 561 93 MDL** ◇
2700K CRI>90	LED 5.7W / 519lm / 48V-DC		8°	**20543 9210** ◇	**20514 9210** ◇	
	LED 7.1W / 779lm / 48V-DC		33°	**418 367 811 922 MDL** ◇	**418 368 811 922 MDL** ◇	
				◇ BBR ● / GC ●	◇ BBR ● / GC ●	◇ B ●

* NOT FOR SUPERLOOP PLUS










SUPERLOOP SPY				52 MDL	66 MDL	FOCUS LP MDL	FOCUS MP MDL
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	**20567 9320** ◇			
			45°	**20567 9330** ◇			
	LED 8.6W / 1018lr / 48V-DC		8-43°			**20547 9300** ◇	
	LED 17.2W / 2101lm / 48V-DC		18°		**20569 9310** ◇		
			30°		**20569 9320** ◇		
			45°		**20569 9330** ◇		
			12-45°				**20546 9300** ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	**20567 9220** ◇			
			45°	**20567 9230** ◇			
	LED 8.6W / 974lm / 48V-DC		8-43°			**20547 9200** ◇	
	LED 17.2W / 2009lm / 48V-DC		18°		**20569 9210** ◇		
			30°		**20569 9220** ◇		
			45°		**20569 9230** ◇		
			12-45°				**20546 9200** ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC		20°	**20583 9020** ◇			
			45°	**20583 9030** ◇			
				◇ B ● / FBR ● / FG ● / GC ● / W ○	◇ B ● / W ○	◇ B ● / FBR ● / FG ●	◇ B ● / FBR ● / FG ●




FINISH YOUR SPECIFICATION


		REQUIREMENT / OPTION / ACCESSORY										
		SUPERLOOP SPY				SUPERLOOP			SUPERLOOP FIX MDL			
		52	66	FOCUS		VIZIR	HEDRA	XY180	40	45	40	40
				LP	MP						D/U	D/U GT
FINISH												
SPY 52 TUBE	**19810 0100 B/FBR/FG/GC/W**	R										
SPY 66 TUBE	**24611 0100 B/FBR/FG/GC/W**		R									
MIDISPY TUBE	**414 03 00 B/FBR/FG/MMAT/SG/W**									R		
VIZIR TUBE	**473 01 00 B/FBR/FG/W**					R	R					
HONEYCOMB / LENS / GLASS												
HONEYCOMB SINGLE USE	**473 03 01 B**					A	A					
	19810 0010 B	A										
	24611 0150 B		A									
HONEYCOMB DOUBLE USE	**19810 0060 B**	A										
	24611 0210 B		A									
LINEAR SPREAD LENS	**19810 0020**	A										
	24611 0170		A									
SPREAD LENS	**19810 0030**	A										
	24611 0200		A									
SOFTENING LENS	**473 03 04**					A	A					
	19810 0040	A										
	24611 0190		A									
GLASS SBL	**19810 0050**	A										
	24611 0160		A									
INSTALLATION												
FIX 40 GLASS CLEAR	**418 163 01**											R
or FIX 40 GLASS FROSTED	**418 163 02**											R

SUPERLOOP SBL PATENTED

Superloop HC with circular light has the ability to diffuse light all around. It represents a universal symbol with extensive options, a perfect circle of light, rolled out of 1 aluminium profile and seamlessly welded together. The specially designed current controlled LEDflex inside Superloop SBL allows it to be dimmed in various ways. Diameters up to 1700mm and finishes in different colours let you create the setting you want.
Similar to Superloop SBL HC, but more dramatic in expression, Superloop SBL VC grants the opportunity to use light in a different way. The vertical circle of light draws the attention and stimulates creativity.
For a more bold and expressive application you can opt for the Superloop VR, mounting the circle of light with a steel rod. Sculptural in presence, resonating with symbolism and respecting pure minimalism, the Superloop VR offers a very airy and remarkable element to your interior concept.
Either as a single version or in a sequence to create striking vertical effects.

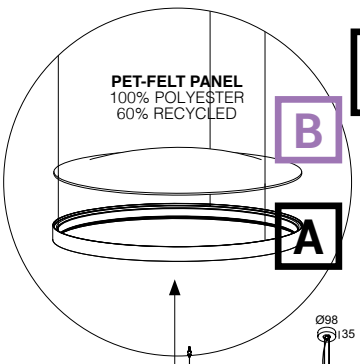

PLUS
Add a personal touch, improve acoustics or make a decorative element out of the minimalistic circle

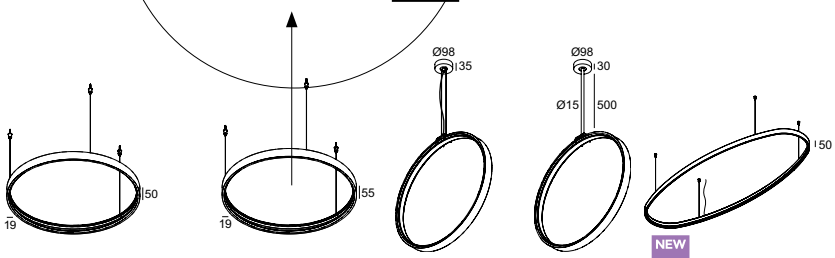

SUPERLOOP				HC SBL	HC SPR	HC PLUS	VC SBL	VR SBL	OVAL SBL
	21,2W / 2916lm / 500mA 29,2W / 3870lm / 700mA	**70**	Ø695	**321 107 93** ◇	**321 207 93** ◇	**20561 9300** ◇	**321 507 93** ◇	**321 407 93** ◇	
	28,2W / 3888lm / 700mA 39W / 5160lm / 900mA	**90**	Ø924	**321 109 93** ◇	**321 209 93** ◇	**20562 9300** ◇	**321 509 93** ◇	**321 409 93** ◇	
	36,4W / 5022lm / 900mA 50,3W / 6665lm / 1200mA	**120**	Ø1191	**321 112 93** ◇	**321 212 93** ◇	**20563 9300** ◇	**321 512 93** ◇	**321 412 93** ◇	
LED FLEX 3000K CRI>90	51,7W / 7128lm / 1200mA 71,4W / 9460lm / 1700mA	**170**	Ø1688	**321 117 93** ◇	**321 217 93** ◇				
	2 x 43,2W / 4200lm / 24V-DC	**200**	Ø2000 2 SEGMENTS	**20549 9300** ◇					
	3 x 37,4W / 3640lm / 24V-DC	**250**	Ø2500 3 SEGMENTS	**20550 9300** ◇					
	3 x 43,2W / 4200lm / 24V-DC	**300**	Ø3000 3 SEGMENTS	**20551 9300** ◇					
	4 x 38,9W / 3780lm / 24V-DC	**350**	Ø3500 4 SEGMENTS	**20552 9300** ◇					
	4 x 43,2W / 4200lm / 24V-DC	**400**	Ø4000 4 SEGMENTS	**20553 9300** ◇					
	5 x 43,2W / 4200lm / 24V-DC	**500**	Ø5000 5 SEGMENTS	**20554 9300** ◇					
	28,8W / 3888lm / 700mA 37,8W / 5160lm / 900mA	**OVAL S**	515 x 1167						**20570 9300** ◇
	36,3W / 5022lm / 900mA 49,5W / 6665lm / 1200mA	**OVAL M**	750 x 1925						**20571 9300** ◇


◇ B ● / FBR ● / FG ● / W ○


Ø695 - Ø1688: INCL.3 x CABLE SUSP. SINGLE AUTO. 3m INCL.1 x CABLE 2 x 0,75mm² – Ø2000 - Ø5000: INCL.2 x CABLE SUSP. SINGLE AUTO. 3m / SEGMENT INCL.1 x CABLE 2 x 0,75mm² / SEGMENT IP20	VC: INCL.2 x CABLE SUSP. SINGLE AUTO. 3m INCL.1 x CABLE 2 x 0,75mm² – VR: INCL.1 x ROD SUSPENSION 0,65m INCL.1 x CABLE 2 x 0,75mm² IP20	INCL.4 x CABLE SUSP. SINGLE AUTO. 3m INCL.1 x CABLE 2 x 0,75mm² IP20	


A GLIMPSE OF ME ON PAGE 10

C

FIND ME ONLINE

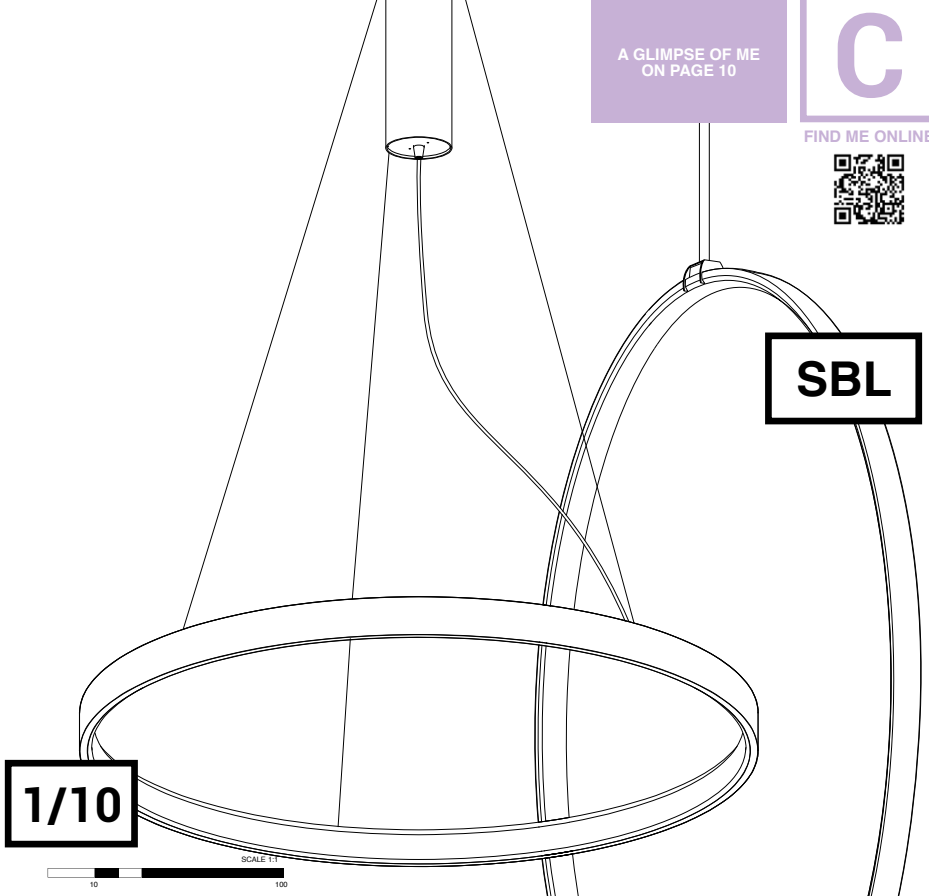





FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


				SUPERLOOP																							
				HC SBL										HC SPR				HC PLUS			VC SBL			VR SBL			HC SBL	
				70	90	120	170	200	250	300	350	400	500	70	90	120	170	70	90	120	70	90	120	70	90	120	OVAL S	OVAL M
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR																												
1-10V DIM	24V-DC / 60W	**21012 0171**	170 x 57 x 18					R *	R *	R	R *	R *	R *															
	500mA-DC / 27W	**300 90 127**	98 x 43 x 30	R										R				R			R			R				
	700mA-DC / 36W	**300 90 128**	98 x 43 x 30	R	R									R	R			R	R		R	R		R	R		R	
	1200mA-DC / 70W	**300 90 132**	240 x 59 x 40			R	R									R	R			R			R			R		R
	1700mA-DC / 90W	**300 90 133**	240 x 59 x 40				R										R						R			R		
DALI DIM	24V-DC / 60W	**21012 0205**	170 x 57 x 18					R *	R *	R	R *	R *	R *															
	700mA-DC / 38W	**300 90 131**	147 x 44 x 30	R	R									R	R			R	R		R	R		R	R		R	
	900mA-DC / 60W	**300 90 129**	124 x 79 x 22		R	R									R	R			R	R		R	R		R	R	R	R
	1200mA-DC / 60W	**300 90 130**	220 x 85 x 31			R	R									R	R			R			R			R		R
or POWERBOX																												
1-10V DIM	500mA-DC	**321 55 205 ED1 B/W**	Ø80 x 200	R										R				R			R							
	700mA-DC	**321 55 207 ED1 B/W**	Ø80 x 200	R	R									R	R			R	R		R	R					R	
	1200mA-DC	**321 55 312 ED1 B/W**	Ø80 x 300			R	R									R	R			R			R					R
	1700mA-DC	**321 55 317 ED1 B/W**	Ø80 x 300				R										R						R					
DALI DIM	700mA-DC	**321 55 307 ED5 B/W**	Ø80 x 300	R	R									R	R			R	R		R	R					R	
	900mA-DC	**20548 0015 B/W**	Ø90 x 300		R	R									R	R			R	R		R	R					R	R
	1200mA-DC	**20548 0025 B/W**	Ø90 x 300			R	R									R	R			R			R						R
FINISH																												
PANEL 70 LIGHT GREY		**20548 0030**																R										
PANEL 70 DARK GREY		**20548 0040**																R										
PANEL 90 LIGHT GREY		**20548 0050**																	R									
PANEL 90 DARK GREY		**20548 0060**																	R									
PANEL 120 LIGHT GREY		**20548 0070**																		R								
PANEL 120 DARK GREY		**20548 0080**																		R								
PANELS IN OTHER MATERIAL ON REQUEST																												
INSTALLATION																												
CONNECTION ST		**15225 0360 B / W**		O	O	O	O	O	O	O	O	O		O	O	O	O	O	O	O							O	O
SUSPENSION ST		**15225 0340 B / W**		O	O	O	O	O	O	O	O	O		O	O	O	O	O	O	O							O	O
CABLE BASE R		**203 99 55 ANO / B / W**		O	O	O	O	O	O	O	O	O		O	O	O	O	O	O	O							O	O
COVERSET R Ø100		**204 00 100 B / W**		O	O	O	O	O	O	O	O	O		O	O	O	O	O	O	O							O	O

* 1 POWER SUPPLY / SEGMENT

B

SUPERLOOP SLIM


Superloop Slim further explores the boundaries of circular general light, as it offers three different ways of diffusing light around a room. Within its small size, Superloop Slim hides away a specially designed current controlled LEDflex, covered by a sandblasted diffuser to evenly spread the light. The diffuser is either installed on the inside of the circle, on the outside or facing downwards, providing various looks and displaying a different take on a circle of light. Opt for simple settings with one single pendant or go wild and combine different sizes, colours and versions to generate an eye-catching play of light.

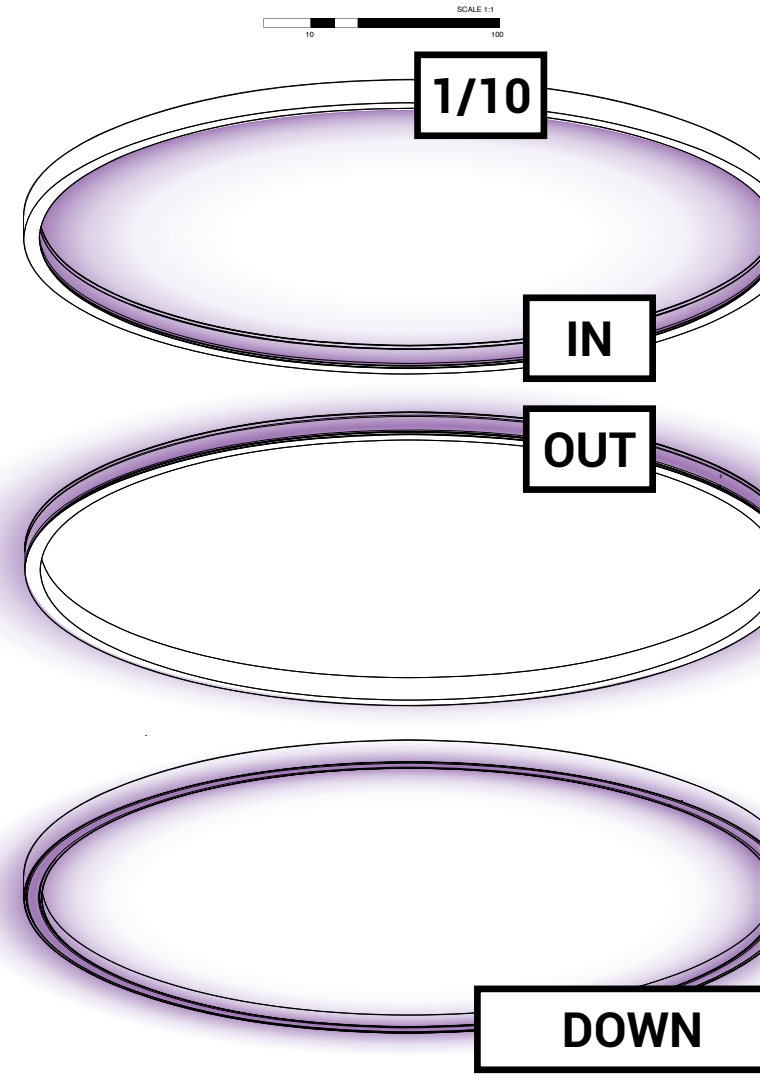



A

NEW

SUPERLOOP SLIM







				IN	OUT	DOWN
LED FLEX 3000K CRI>90	21,2W / 2916lm / 500mA 29,2W / 3870lm / 700mA	**70**	Ø694	**20572 9300** ◇	**20576 9300** ◇	**20580 9300** ◇
	28,2W / 3888lm / 700mA 39W / 5160lm / 900mA	**90**	Ø923	**20573 9300** ◇	**20577 9300** ◇	
	36,4W / 5022lm / 900mA 50,3W / 6665lm / 1200mA	**120**	Ø1191	**20574 9300** ◇	**20578 9300** ◇	**20582 9300** ◇
	51,7W / 7128lm / 1200mA 71,4W / 9460lm / 1700mA	**170**	Ø1688	**20575 9300** ◇	**20579 9300** ◇	

◇ B ● / FBR ● / FG ● / GC ● / W ○

INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 2 x 0,75mm²


IP20

deltalight.com/superloop

A GLIMPSE OF ME
ON PAGE 10

C

FIND ME ONLINE



FINISH YOUR SPECIFICATION

				REQUIREMENT / OPTION / ACCESSORY									
				SUPERLOOP SLIM									
				IN				OUT				DOWN	
				70	90	120	170	70	90	120	170	70	120
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR													
1-10V DIM	500mA-DC / 27W	**300 90 127**	98 x 43 x 30	R				R				R	
	700mA-DC / 36W	**300 90 128**	98 x 43 x 30	R	R			R	R			R	
	1200mA-DC / 70W	**300 90 132**	240 x 59 x 40			R	R			R	R		R
	1700mA-DC / 99W	**300 90 133**	240 x 59 x 40				R				R		
DALI DIM	700mA-DC / 38W	**300 90 131**	147 x 44 x 30	R	R			R	R			R	
	900mA-DC / 60W	**300 90 129**	124 x 79 x 22		R	R			R	R			R
	1200mA-DC / 60W	**300 90 130**	220 x 85 x 31			R	R			R	R		R
or POWERBOX													
1-10V DIM	500mA-DC	**321 55 205 ED1 B/W**	Ø80 x 200	R				R				R	
	700mA-DC	**321 55 207 ED1 B/W**	Ø80 x 200	R	R			R	R			R	
DALI DIM	700mA-DC	**321 55 307 ED5 B/W**	Ø80 x 300	R	R			R	R			R	
1-10V DIM	1200mA-DC	**321 55 312 ED1 B/W**	Ø80 x 300			R	R			R	R		R
	1700mA-DC	**321 55 317 ED1 B/W**	Ø80 x 300				R				R		
DALI DIM	900mA-DC	**20548 0015 B/W**	Ø90 x 300	R	R			R	R				R
	1200mA-DC	**20548 0025 B/W**	Ø90 x 300			R	R			R	R		R
INSTALLATION													
CONNECTION ST		**15225 0360 B / W**		O	O	O	O	O	O	O	O	O	O
SUSPENSION ST		**15225 0340 B / W**		O	O	O	O	O	O	O	O	O	O
CABLE BASE R		**203 99 55 ANO / B / W**		O	O	O	O	O	O	O	O	O	O
COVERSET R Ø100		**204 00 100 B / W**		O	O	O	O	O	O	O	O	O	O


B


SLM F

Make it your own. Our SLM26 F builds on the endless flexibility of our magnetic profiles, which allow a simple toolfree (re)positoning of the lights onto your ceiling. Now also available as stand-alone solution, you can easliy personalize the room to your preferences. Opt for simple accent lighting or combine with indirect light for the more cosy settings, your choice!

deltalight.com/shiftline

NEW






STANDALONE

				SLM26L F MDL	SLM26H F MDL WD
-	FLOORLAMP + LUMINAIRES (next page)	IP20	NON DIM	**29321 0010** ◇	
			WIRELESS	**29322 002W** ◇	
3000K CRI>90	FLOORLAMP + LED BACKLIGHT 27,7W / 3024lm / 48V-DC + LUMINAIRES (next page)		WIRELESS		**29323 930W** ◇
2700K CRI>90			WIRELESS		**29323 920W** ◇


◇ B ●

100-240V / 50-60Hz
INCL.ADAPTER 48V / 60W
INCL.CORD 2m + PLUG CEE 7/7
INCL.WIRELESS DIMMABLE CONTROL (for WIRELESS versions)

□











SPY 39

				1 M26H	1 M26L	2 M26H	2 M26L
3000K CRI>90	1 or 2x LED 8.6W / 1089lm / 48V-DC	IP20	20°	**23315 9320** ◇	**23258 9320** ◇	**23317 9320** ◇	**23260 9320** ◇
			40°	**23315 9330** ◇	**23258 9330** ◇	**23317 9330** ◇	**23260 9330** ◇
2700K CRI>90	1 or 2x LED 8.6W / 1041lm / 48V-DC		20°	**23315 9220** ◇	**23258 9220** ◇	**23317 9220** ◇	**23260 9220** ◇
			40°	**23315 9230** ◇	**23258 9230** ◇	**23317 9230** ◇	**23260 9230** ◇
				◇ B ● / FBR ● / FG ● / GC ● / W ○ + NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●		◇ B ● / W ○	









ODRON


				1 M26H	1 M26L	2 M26H	2 M26L
3000K CRI>90	1 or 2x LED 8.6W / 1018lm / 48V-DC	IP20	28 & 41° *	**26216 9300** ◇	**26220 9300** ◇	**26218 9300** ◇	**26222 9300** ◇
2700K CRI>90	1 or 2x LED 8.6W / 974lm / 48V-DC			**26216 9200** ◇	**26220 9200** ◇	**26218 9200** ◇	**26222 9200** ◇
				◇ B ● / W ○			

* INCL. 2 REFLECTORS

A GLIMPSE OF ME
ON PAGE 52

C

FIND ME ONLINE

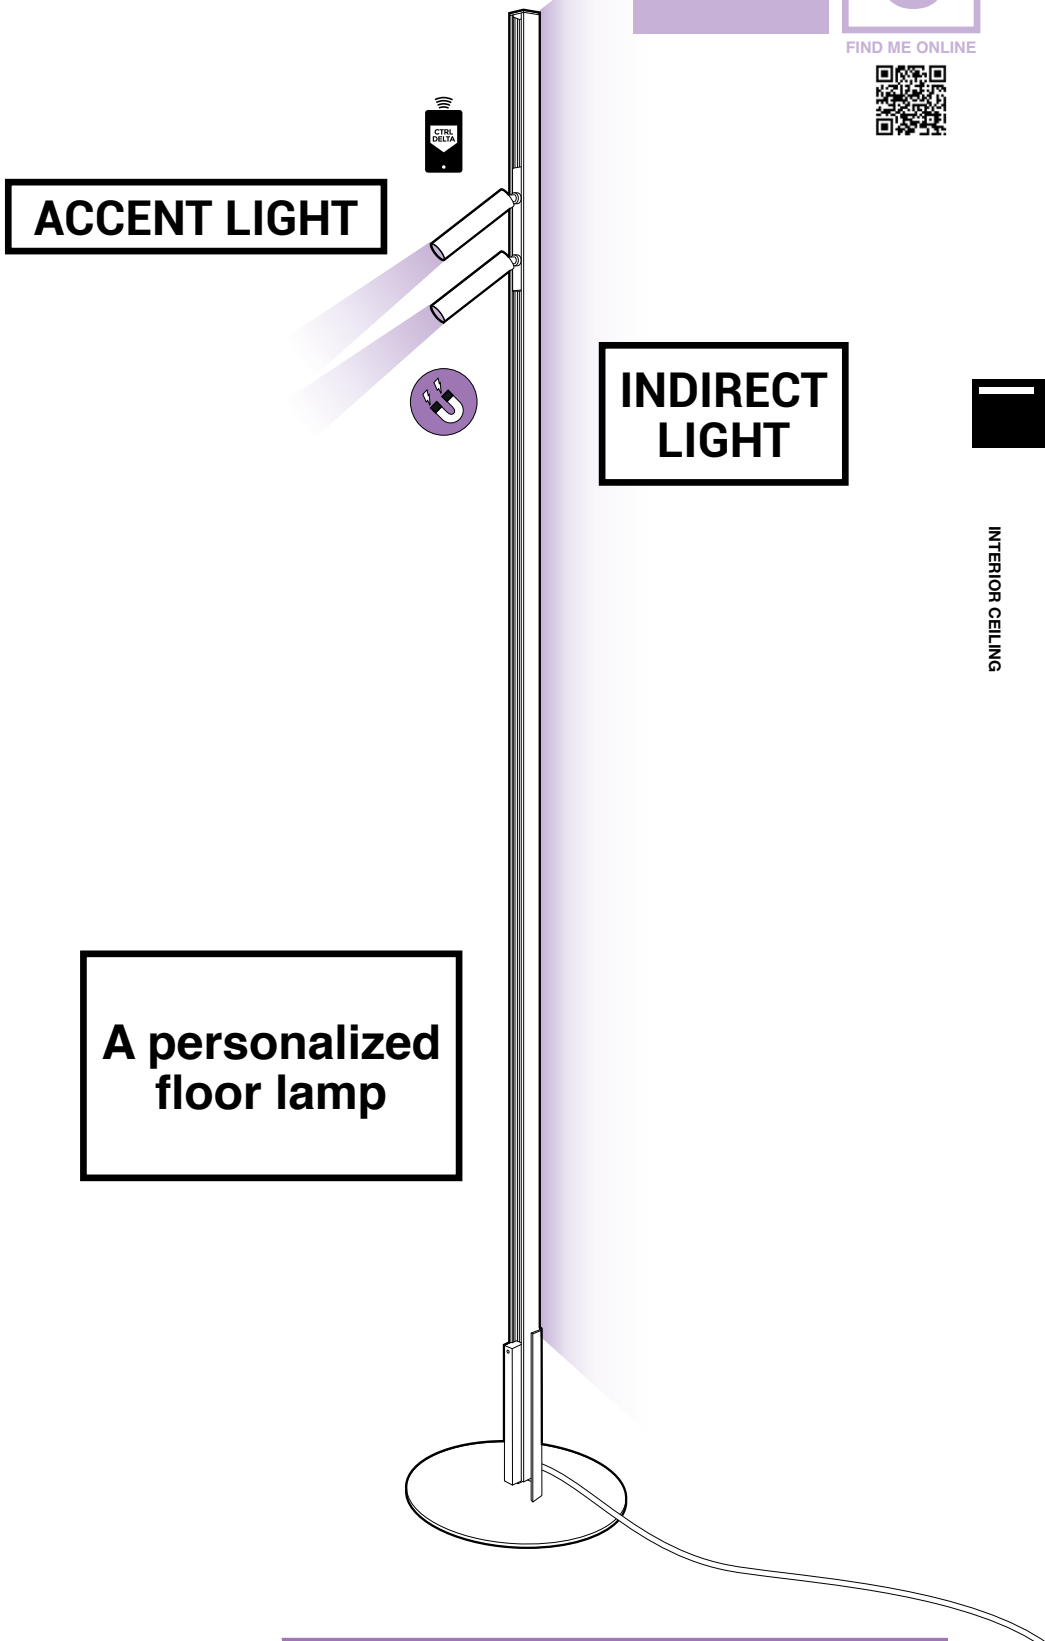

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY			
		SPY 39		ODRON	
		1	2	1	2
FINISH					
SPY 39 TUBE	**24144 0010 B / FBR / FG / GC / W**	R	2 x R		
VISOR 39	**216 12 02**	A	2 x A		
ODRON COVER	**26210 0020 GC**			A	2 x A


* REMOTE INSTALLATION


B


LASS-OH!


Lass-Oh! glides through the room as a snake sliding through the greensward, showing off its slim cylindrical contour in combination with the miniature LED clusters hidden inside its body. The variety in shape - straight lines, circles or curved squares and rectangles - in combination with the optional shades make of Lass-Oh! a very decorative lighting solution. Nevertheless, Lass-Oh! can easily be hung in every residential, retail or office project thanks to its low-glare LED dots that are hidden away into the profile.


deltalight.com/lass-oh













LASS-OH!				6060	60110	60160	R65-3 NEW	R90-4 NEW
3000K CRI>90	3 x LED 6,1W / 683lm / 350mA	IP20	34°				**24821 9320** ◇	
	4 x LED 6,1W / 683lm / 350mA			**24811 9320** ◇	**24812 9320** ◇			**24822 9320** ◇
	6 x LED 6,1W / 683lm / 350mA					**24813 9320** ◇		
2700K CRI>90	3 x LED 6,1W / 665lm / 350mA						**24821 9220** ◇	
	4 x LED 6,1W / 665lm / 350mA			**24811 9220** ◇	**24812 9220** ◇			**24822 9220** ◇
	6 x LED 6,1W / 665lm / 350mA					**24813 9220** ◇		
				◇ B ● / GC ●			◇ B ● / GC ●	
				INCL.4 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL.1 x CABLE 2 x 0,75mm²			INCL.3 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL.1 x CABLE 2 x 0,75mm²	








LASS-OH!				L150	L210	L330
3000K CRI>90	3 x LED 6,1W / 683lm / 350mA	IP20	34°	**24816 9320** ◇		
	4 x LED 6,1W / 683lm / 350mA				**24818 9320** ◇	
	6 x LED 6,1W / 683lm / 350mA					**24819 9320** ◇
2700K CRI>90	3 x LED 6,1W / 665lm / 350mA			**24816 9220** ◇		
	4 x LED 6,1W / 665lm / 350mA				**24818 9220** ◇	
	6 x LED 6,1W / 665lm / 350mA					**24819 9220** ◇
					◇ B ● / GC ●	
				INCL.2 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL.1 x CABLE 2 x 0,75mm²		INCL.3 x CABLE SUSP. SINGLE AUTO. 1.6m BLACK INCL.1 x CABLE 2 x 0,75mm²

A GLIMPSE OF ME
ON PAGE 68

C

FIND ME ONLINE

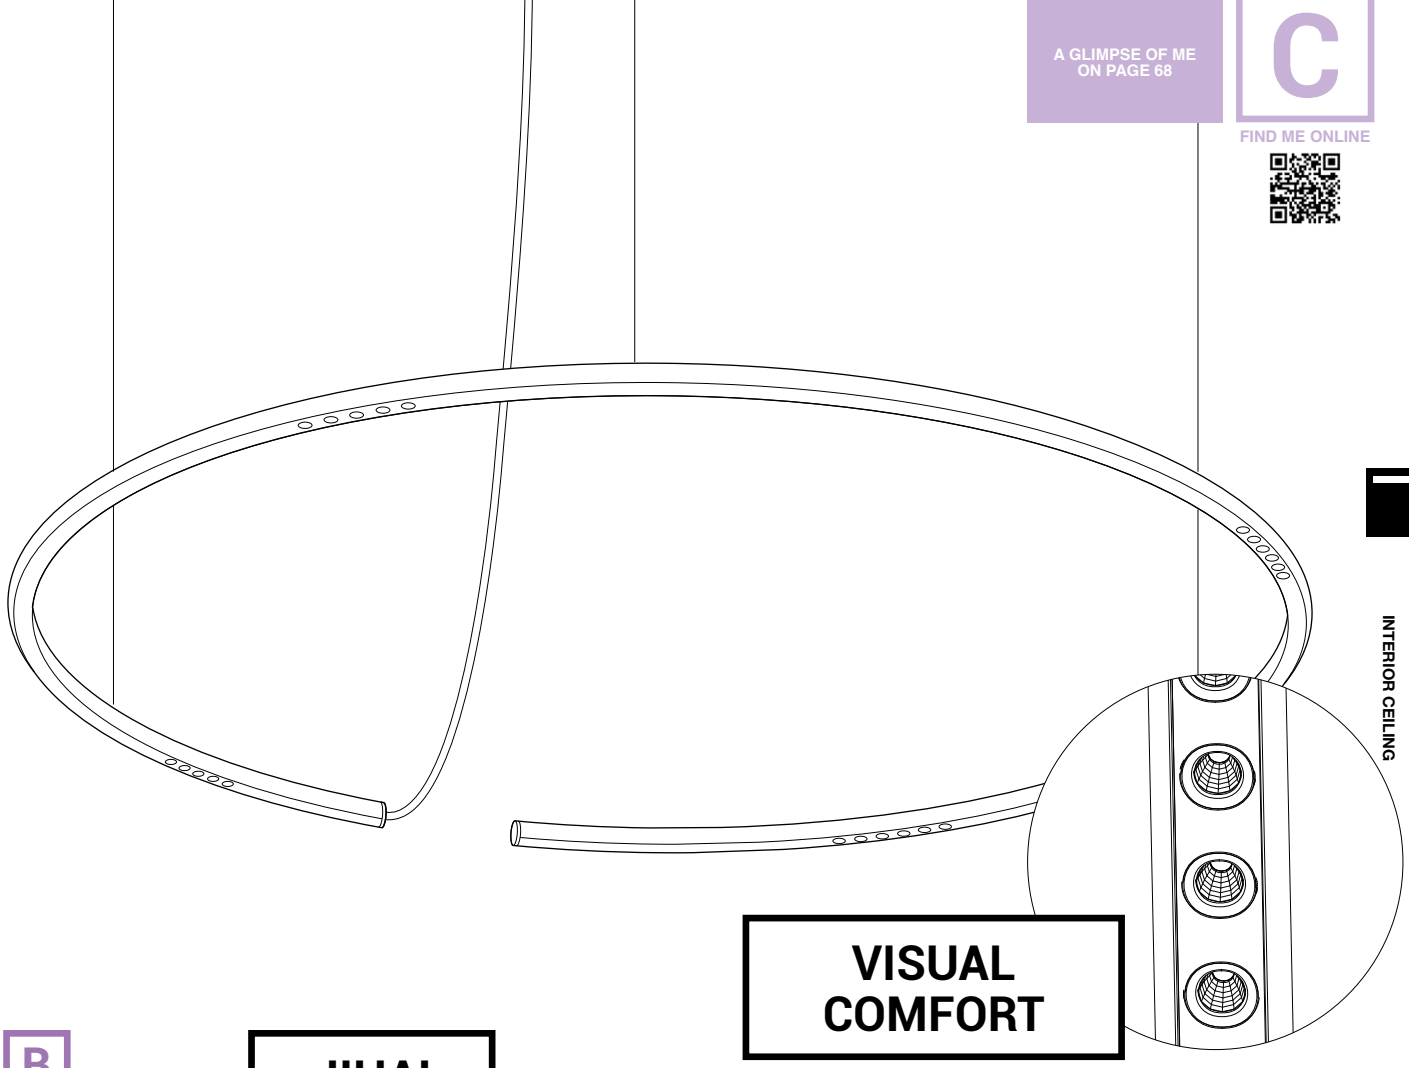



VISUAL COMFORT

B

DECORATIVE SHIELD

JIHA!






FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY							
			LASS-OH!							
			6060	60110	60160	R65-3	R90-4	L150	L210	L330
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR										
NON DIM	**21012 0010**	147 x 44 x 22	R	R	R	R	R	R	R	R
1-10V DIM	**21012 0021**	130 x 42 x 30	R	R	R	R	R	R	R	R
DALI DIM	**21012 0035**	147 x 44 x 30	R	R	R	R	R	R	R	R
or POWERBOX										
NON DIM	**24814 0010 B**	250 x 58 x 39	R	R	R			R	R	R
1-10V DIM	**24814 0011 B**	250 x 58 x 39	R	R	R			R	R	R
DALI DIM	**24814 0015 B**	250 x 58 x 39	R	R	R			R	R	R
NON DIM	**24814 0080 B**	Ø60 x 150				R	R			
DALI DIM	**24814 0075 B**	Ø60 x 150				R	R			
INSTALLATION										
CONNECTION ST	**15225 0360 B / W**		O	O	O	O	O	O	O	O
SUSPENSION ST	**15225 0340 B / W**		O	O	O	O	O	O	O	O
CABLE BASE R	**203 99 55 ANO / B / W**		O	O	O	O	O	O	O	O
COVERSET R Ø100	**204 00 100 B / W**		O	O	O	O	O	O	O	O
ACCESSORIES										
JIHA! R	**24814 0030 B**			A	A			A	A	A
JIHA! S	**24814 0020 B**			A	A			A	A	A


B

MIKALINE

Uplift your creativity with Mikaline! As a set of tools, Mikaline let's you paint lines of light without limits, with the room as a blank canvas and the wall, floor or ceiling as a starting point, you can go any direction you want.

deltalight.com/mikaline

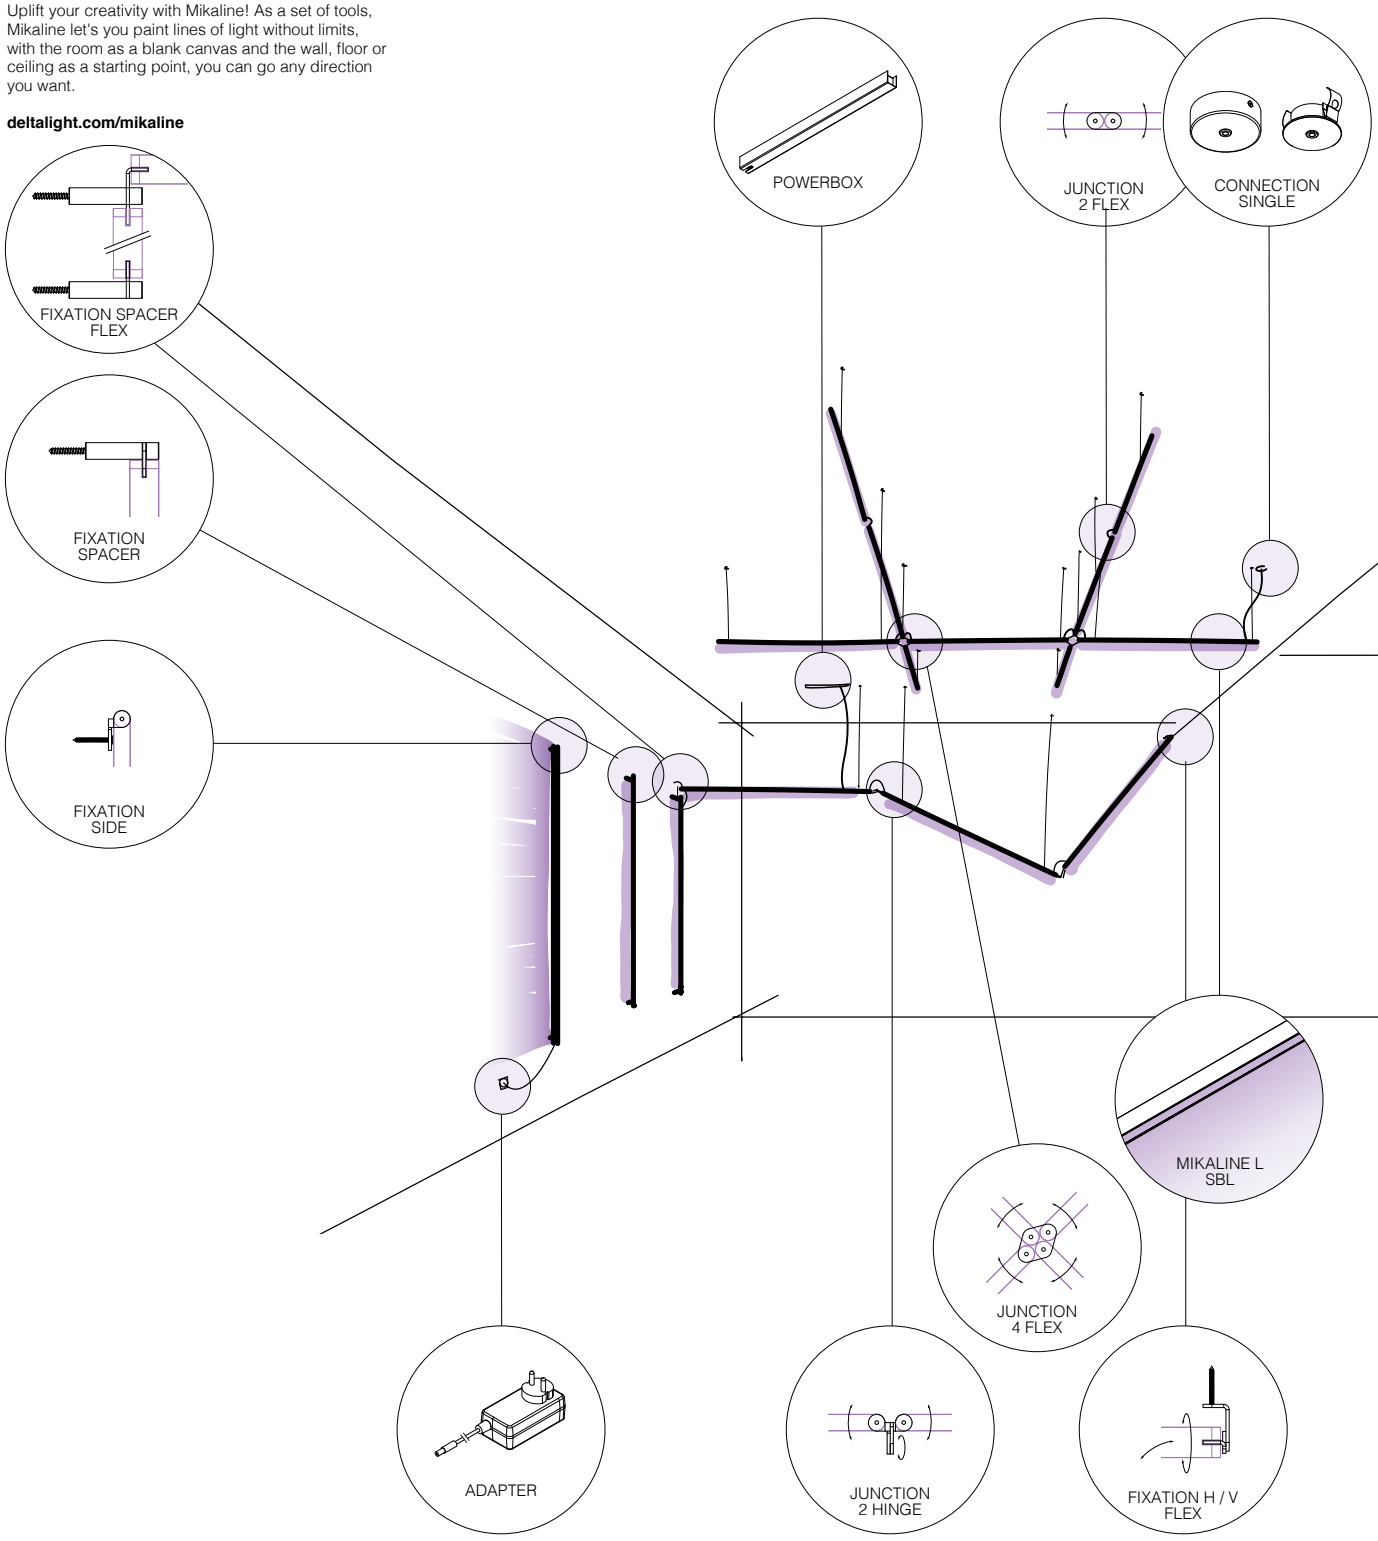

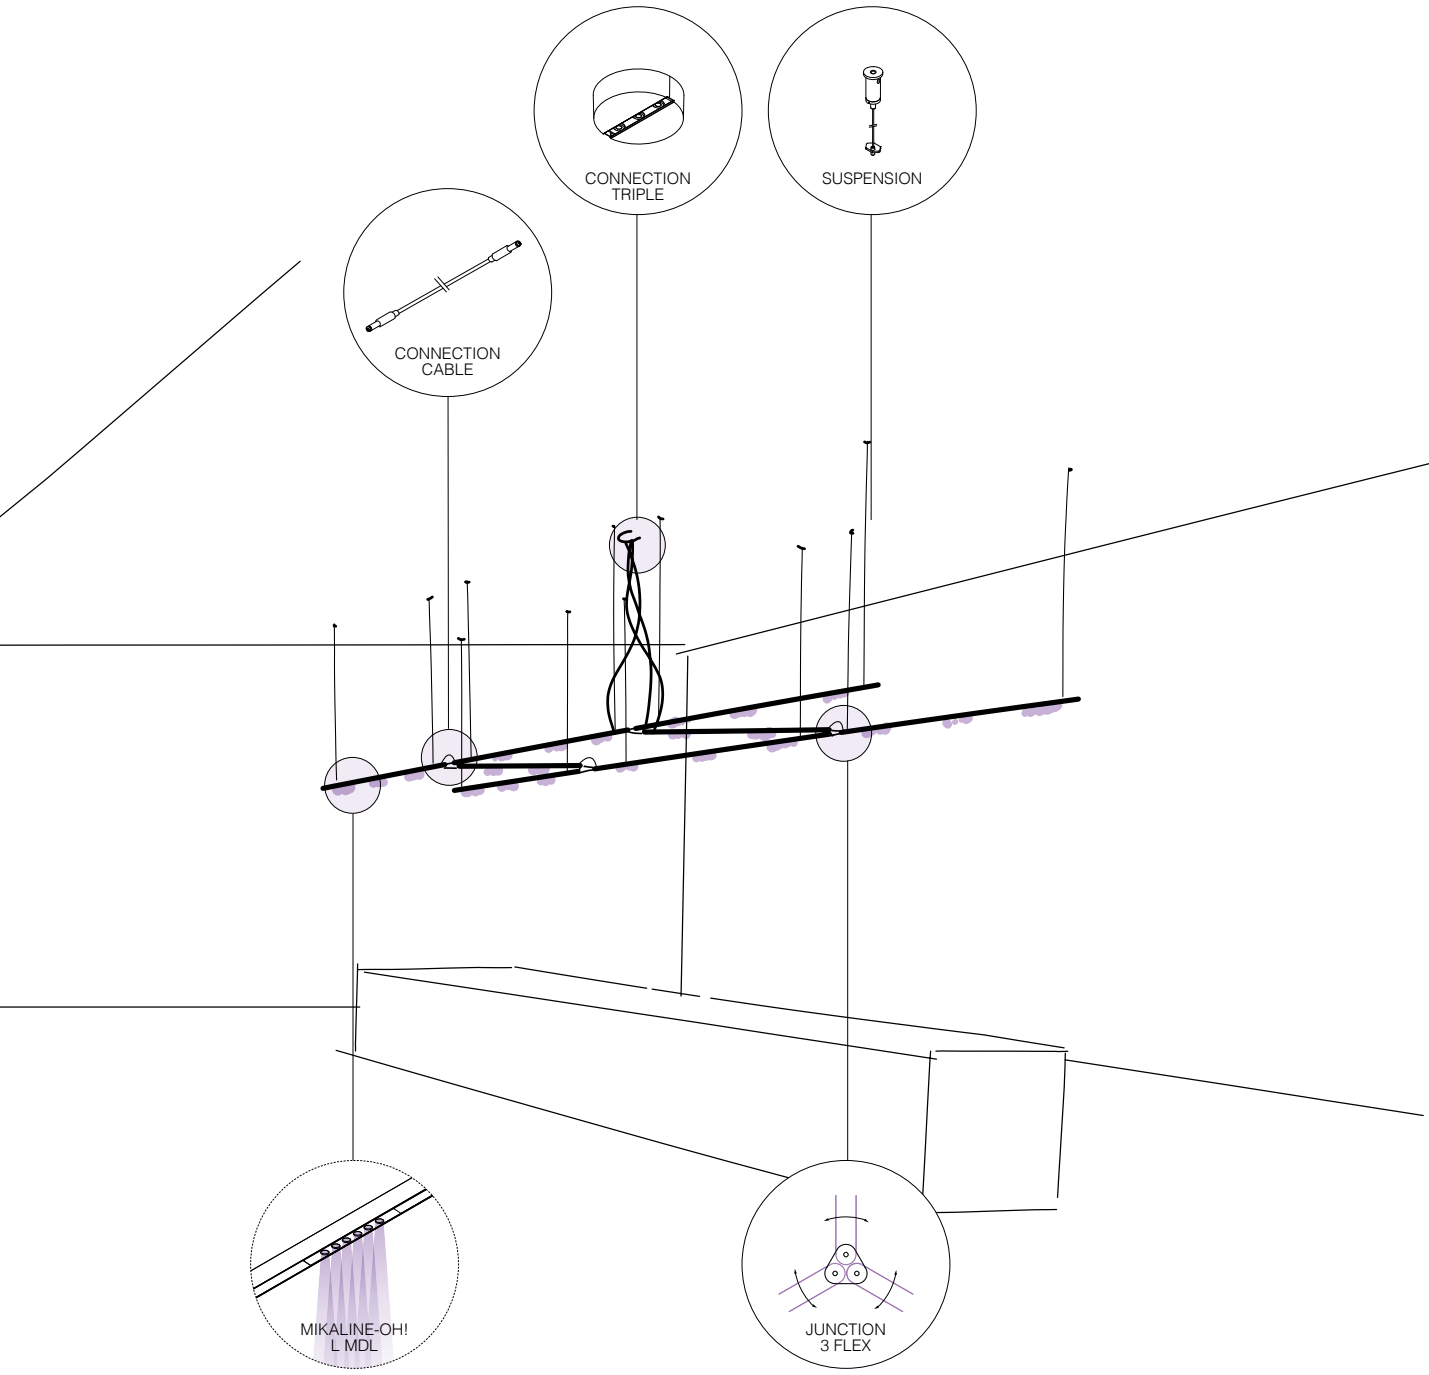


Like brush strokes on a blank canvas...


MIKALINE

The toolset consists of a range of profiles with sandblasted optics for general lighting or shielded LED dots with a low UGR for task lighting, several connectors to couple up to 4 profiles together, a handful of fixations to joint the profiles with wall or ceiling and a series of plug-in cables for an easy electrical supply of the system.

With up to 10m of profile from 1 feeding point, the 48V powered Mikaline is perfect to build structures for spacious environments and at the same time easily fits in smaller scaled rooms. Create frameworks that light up the room completely, opt for a cosy setting with only indirect light towards the wall or go for a pure linear pattern with dedicated task lighting, possibilities are endless and customizable to individual preferences.

Mikaline is not only appealing as a structure, also the design of the toolset itself is pure eyecandy. The dark black structured lines are in powerful contrast with the shiny chromed connection sets. The playful shape of the cable connectors add a joyful element into the linear patters and the options of Gold Coloured as a finish add a luxurious touch and feel to it. Like brush strokes on a black canvas.





GENERAL LIGHT


NEW


MIKALINE

			L148	L198	L298
3000K CRI>90	LED 20W / 1568lm / 48V-DC	IP20	**30611 9300** ◇		
	LED 27W / 2138lm / 48V-DC			**30612 9300** ◇	
	LED 41W / 3278lm / 48V-DC				**30613 9300** ◇
2700K CRI>90	LED 20W / 1485lm / 48V-DC		**30611 9200** ◇		
	LED 27W / 2025lm / 48V-DC			**30612 9200** ◇	
	LED 41W / 3105lm / 48V-DC				**30613 9200** ◇

◇ B ● / GC ●

INCL.1 x PLUG-IN 48V CABLE 11cm





TASK LIGHT

NEW

MIKALINE-OH! MDL


				L148	L198	L298
3000K CRI>90	2 x LED 5,2W / 596lm / 48V-DC	IP20	34°	**30614 9320** ◇		
	3 x LED 5,2W / 596lm / 48V-DC				**30615 9320** ◇	
	4 x LED 5,2W / 596lm / 48V-DC					**30616 9320** ◇
2700K CRI>90	2 x LED 5,2W / 581lm / 48V-DC			**30614 9220** ◇		
	3 x LED 5,2W / 581lm / 48V-DC				**30615 9220** ◇	
	4 x LED 5,2W / 581lm / 48V-DC					**30616 9220** ◇

◇ B ● / GC ●

INCL.1 x PLUG-IN 48V CABLE 11cm


A

JUNCTION




2 FLEX SET | 3 FLEX | 4 FLEX | 2 HINGE

FIXATION

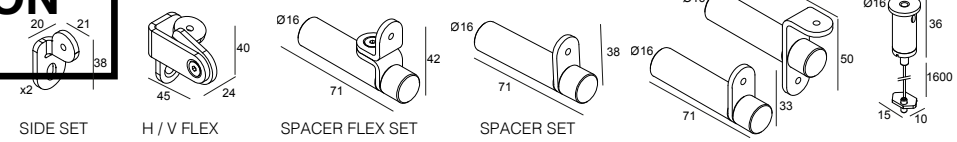

SIDE SET | H / V FLEX | SPACER FLEX SET | SPACER SET | SPACE 90° 2 SET | SUPSENSION

CONNECTION

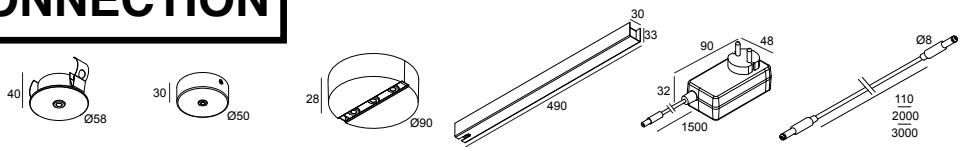

CLIP | CEILING BASE 1 | CEILING BASE 3 | POWERBOX 100W | ADAPTER 60W | CABLE

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY					
			MIKALINE			MIKALINE-OH! MDL		
			L148	L198	L298	L148	L198	L298
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *
1-10V DIM - 48V-DC - 90W	**21032 0331**	171 x 63 x 38	R *	R *	R *			
DALI DIM - 48V-DC - 90W	**21032 0345**	171 x 63 x 38	R *	R *	R *			
or POWERBOX								
or POWERBOX 100W	NON DIM **30610 0170 B**		R	R	R	R	R	R
or POWER ADAPTER 60W	NON DIM **30610 0190 B**		R	R	R	R	R	R
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56				R *	R *	R *
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56				R *	R *	R *
JUNCTION								
2 FLEX SET	**30610 0010 C**	4 PCS.	O	O	O	O	O	O
3 FLEX	**30610 0020 C**	1 PC.	O	O	O	O	O	O
4 FLEX	**30610 0030 C**	1 PC.	O	O	O	O	O	O
2 HINGE	**30610 0040 C**	1 PC.	O	O	O	O	O	O
FIXATION								
SIDE SET	**30610 0050 C**	2 PCS.	R	R	R	R	R	R
or SPACER FLEX SET	**30610 0060 B**	2 PCS.	R	R	R	R	R	R
or V/H FLEX	**30610 0070 C**	1 PC.	R	R	R	R	R	R
or SPACER SET	**30610 0090 B**	2 PCS.	R	R	R	R	R	R
or SPACER 90° 2 SET	**30610 0180 B**	2 PCS.	R	R	R	R	R	R
or SUSPENSION	**30610 0080 B**	1 PC.	R	R	R	R	R	R
CONNECTION								
CONNECTION CLIP	**30610 0140 B**	Ø51 x 40	R **	R **	R **	R **	R **	R **
or CONNECTION CEILING BASE 1	**30610 0160 B**		R **	R **	R **	R **	R **	R **
or CONNECTION CEILING BASE 3	**30610 0150 B**		R **	R **	R **	R **	R **	R **
PLUG-IN 48V CABLE 11CM	**30610 0100**	max.120W (3A)	R	R	R	R	R	R
or PLUG-IN 48V CABLE 1,5M	**30610 0110**	max.120W (3A)	R	R	R	R	R	R
or PLUG-IN 48V CABLE 3M	**30610 0120**	max.120W (3A)	R	R	R	R	R	R


* REMOTE INSTALLATION
** REQUIRED IN COMBINATION WITH POWER SUPPLY

Shape your SOLISCAPE

A GLIMPSE OF ME
ON PAGE 38

C


FIND ME ONLINE

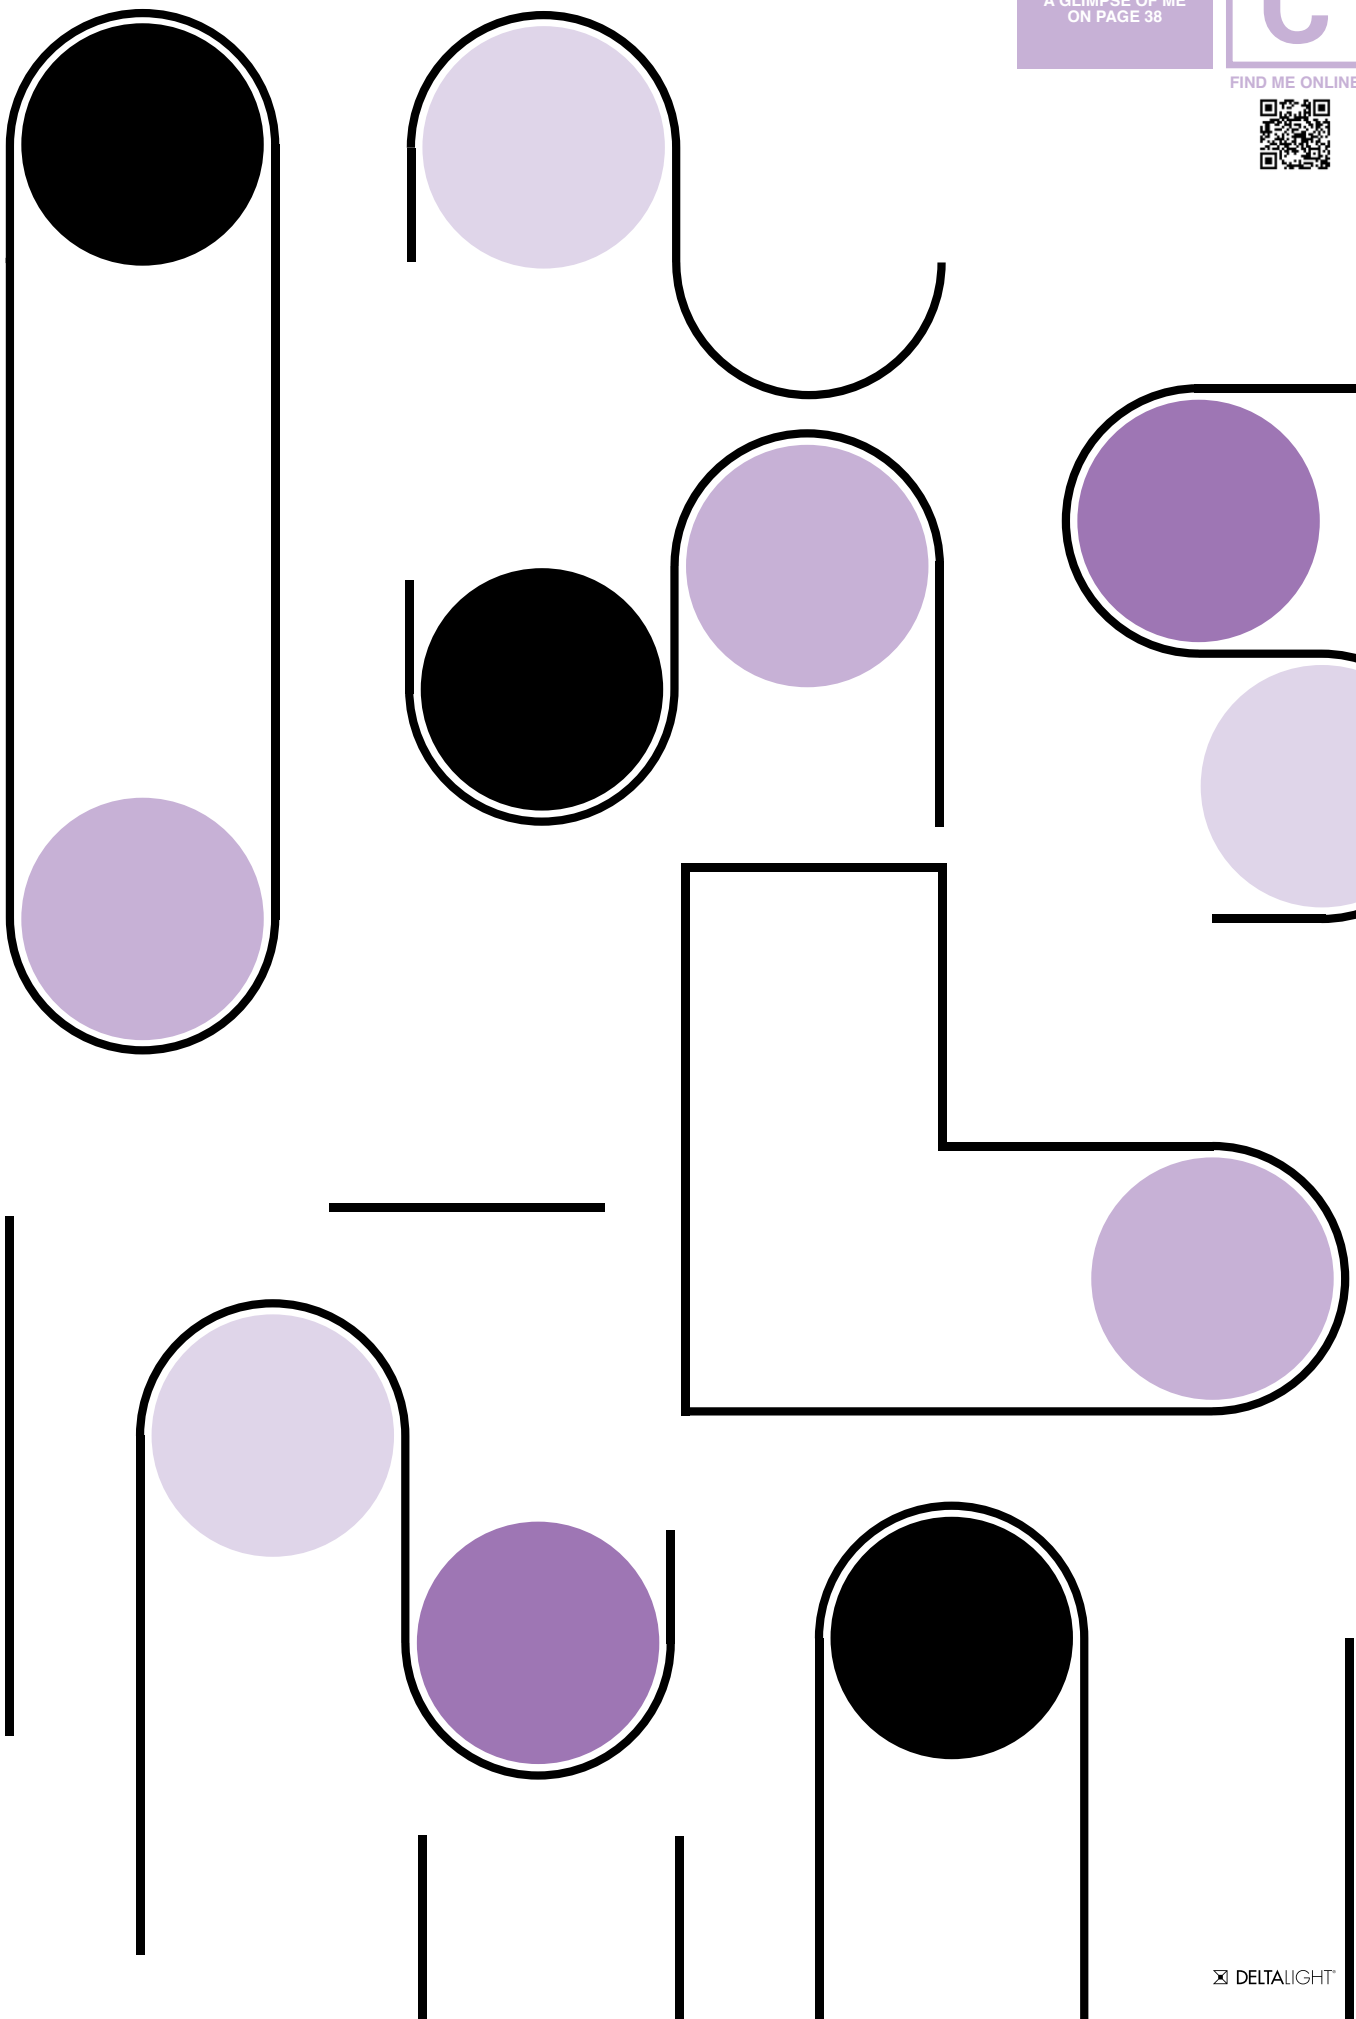


SOLISCAPE

The intention of Soliscape is to create flexible lightscapes that are responsive to the user's ever-changing needs and activities, where design is no longer imposed by the designers, but guided by the user, resulting in responsive and adaptive design. The Soliscape system combines miniaturisation and personalisation, in a unique design language.

deltalight.com/soliscape



SOLI-SENSE
The Soli-Sense module is key in the user-centric approach of Soliscape,
as it captures relevant data from its surroundings that serve to interact with the modules of the system or – by extension – with the complete Building Management System.
Detecting presence, adapting the light intensity based on incoming daylight, adjusting the HVAC system according to the temperature, humidity and air quality in the room to obtain an optimal user environment are some examples.
By integrating all modules in our Smart Q environment, Soliscape becomes the basis that interacts with all smart systems in its surroundings.

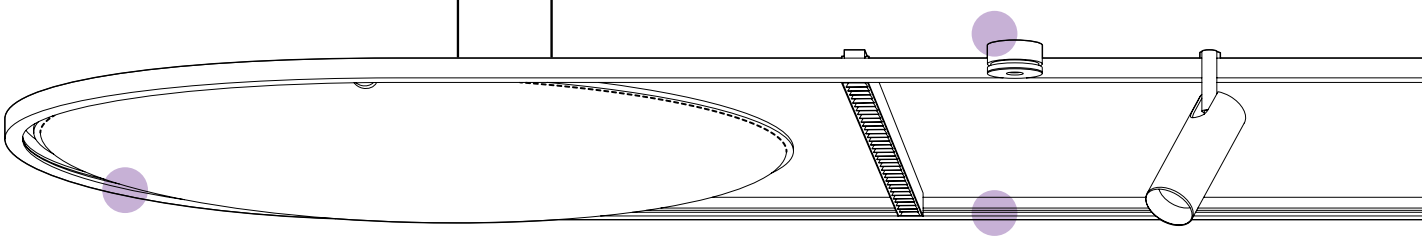


SOLI-SHHH
For additional optimization of room acoustics, Soliscape enables you to combine user focused lighting with Soli-Shhh panels. The sound-absorbing panels can easily be added or removed, positioned flat or tilted, guaranteeing noise reduction to office spaces and meetings rooms in the most aesthetical way.

These sound-absorbing panels are created to solve the problem of indoor reverberation to guarantee the best acoustic comfort and wellbeing.

Absorbing the noises in the field of typical speech frequencies (between 500 Hz and 2000 Hz)


These sound absorbing panels can be applied to facilitate for specific functionalities, from acoustic to decorative and illuminous atmospheric scenes.

Soli-Shhh panels can be used as an add-on to the Soliscape toolbox or as a separate sound absorbing element, be it with or without additional spot modules mounted around the circle.



PROFILE
The slender Soliscape profile is the structural base to custumize your Soliscape configurations. With dimensions reduced to 19mm x 23mm, it is minimalism at its purest, allowing you to create unique "graphical" configurations. In contrast to common track or profile suspensions, all modules are plugged in from above, maintaining a smooth appearance from below.


The linear elements can be combined with the signature Soliscape curved or 90° corners, upgrading its surroundings with dynamism and attitude.




A GLIMPSE OF ME
ON PAGE 38

C

FIND ME ONLINE

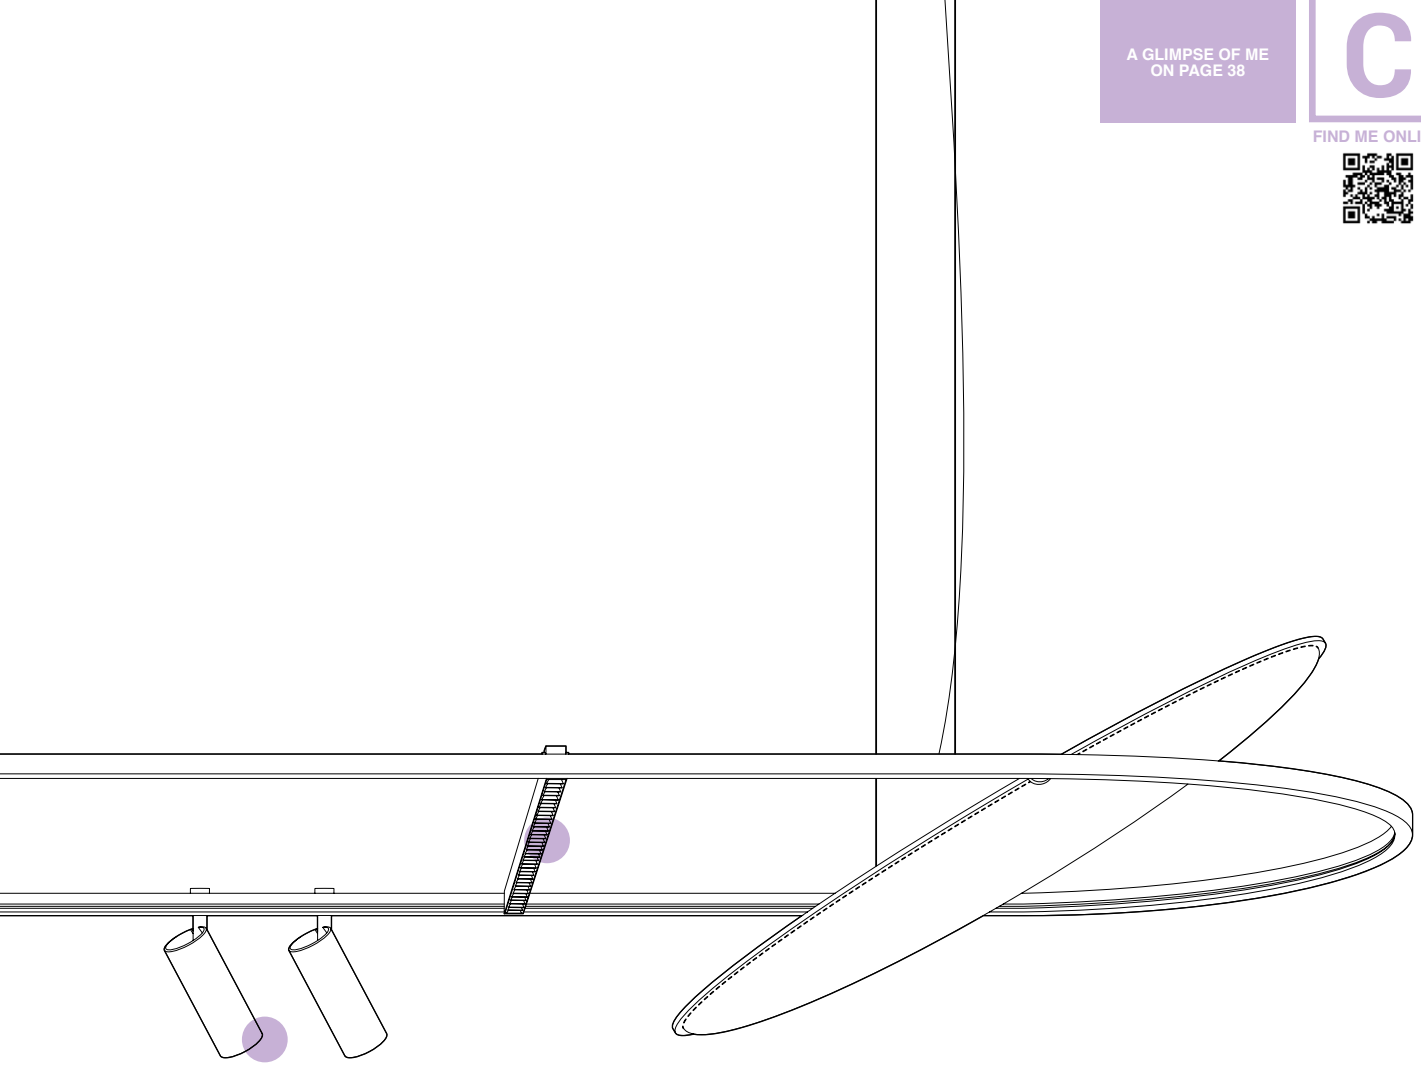

SOLI-52 / SOLI-66
The Soliscape spot modules enable you to illuminate any part of the room where Soliscape is applied. The hybrid optics guarantee a precise beam, as the lens controls and shapes the light that is reflected from the high-quality reflector. The spot modules have a colour rendering of CRI ≥ 90, or come in a CRI ≥ 95 version with Delta Light's unique Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity. As so, helping to control the circadian rhythm to further stimulate the human well-being.
The Soliscape spot modules makes its connection on the top of the profile, keeping a very clean and refined appearance without compromising on flexibility and performance.




SOLI-FORM
The core strength of the Soli-Form is a combination of Delta Light's Melanopic Light Technology (MLT) with high efficient louvre optics. The reflector is designed to perfectly embrace every individual LED module in a way to boost the efficiency of the complete luminaire, while maintaining a high level of visual comfort, as every LED dot is shielded from being looked into.


The Soli-Form profile breaths refinement in all its aspects. Its slender dimensions of 28 by 28mm weld in seamlessly with the slim dimensions of the Soliscape. The human aspect is the central topic for Soli-Form. It offers LEDs that help control the circadian rhythm via a unique spectrum meant to stimulate activity. The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

Despite its minimalistic design, Soli-Form does not compromise on performance. With a delivered lumen package downwards of up to 3045lm per meter, Soli-Form is perfect for illuminating task areas like office desks or reception counters. Within the same dimensions one can also opt for a down-up version, enhancing the sense of space and creating a uniform glow on both vertical as horizontal surfaces, which leads to a reduced contrast and relaxes the eye.


The Soli-Form profiles can be positioned alongside the structure or across, connecting both sides.



SOLI-LINE
Apart from task lighting and focused accent lighting, Soliscape offers linear solutions for general lighting as well. In line with the complete set-up, the design is minimalist and straightforward. Installed in line with the profile or connecting two opposite profiles, these straight lines are finished of with a sandblasted optic to diffuse the light around the room, both as down- or uplight.




SOLISCAPE




	SOLISCAPE
1 PROFILE	
PROFILE 2m	27111 0020 ◇ ◇ B ● / W ○
PROFILE 3m	27111 0030 ◇ ◇ B ● / W ○
48V-DC (2 CONDUCTORS) - 2 CONDUCTORS FOR INDIVIDUAL DIMMING/DATA ◇III◇ IP20	
2 DIMENSIONS	
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.	
3 JUNCTION / CORNER	
CORNER 180°	27111 0620 B / W
CORNER 180° MIRROR	27111 0630 B / W
CORNER SET 90°	27111 0640 B / W
CORNER SET 90° OUT	27111 0650 B / W
CORNER SET R 60	27111 0720 B / W
CORNER SET R 90°	27111 0730 B / W
4 ENDCAP	
ENDCAP SET (2 PCS.)	27111 0410 B / W
5 FIXATION	
SUSPENDED	
SUSPENSION SINGLE 3M (1 PC.)	27111 0530 B / W
SUSPENSION ST	15225 0340 B / W
6 CONNECTION	
POWERBOX	
NON DIM 48V-DC / 200W - R	27110 0090 B / W
NON DIM 48V-DC / 200W - L	27110 0100 B / W
SUPPLY 48V-DC (max.200W/supply/max.50m) Incl. cable 3,5m - 2x 1,5mm² + 2x 0,34mm² BLACK for B, GREY for W	27111 9960 B / W
CONNECTION ST	15225 0360 B / W
CONNECTOR 48V-DC - 180° (max.200W/supply/max.50m)	27011 9910
CONNECTOR 48V-DC - 90° (max.200W/supply/max.50m)	27011 9920
CONNECTOR 48V-DC - R 60 (max.200W, incl. cable)	27111 9940
CONNECTOR 48V-DC - R 90 (max.200W, incl. cable)	27111 9950
7 ACOUSTIC PANEL	
SOLI-SHHH 60-	
LIGHT GREY	27110 0010 B / W
DARK GREY	27110 0020 B / W
SCARLET	27110 0110 B / W
SAND	27110 0120 B / W
LILAC	27110 0130 B / W
ARCTIC	27110 0140 B / W
SOLI-SHHH 90-	
LIGHT GREY	27110 0030 B / W
DARK GREY	27110 0040 B / W
SCARLET	27110 0150 B / W
SAND	27110 0160 B / W
LILAC	27110 0170 B / W
ARCTIC	27110 0180 B / W
	MODULES
8	**SEE NEXT PAGES**


TOOLBOX




5
SUSPENSION
SINGLE

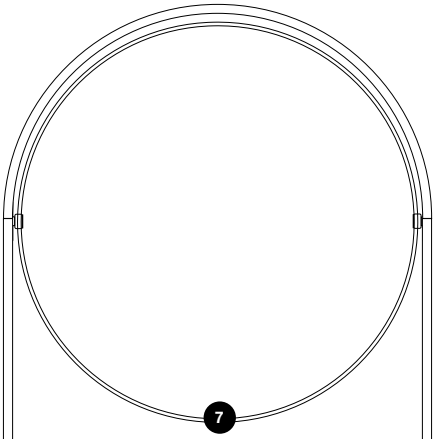


7

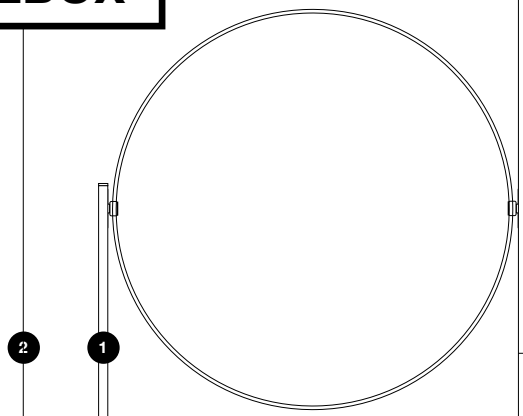


2 1




3 **CORNER 180°**
MIRROR




4 3 **CORNER SET 90°**



8

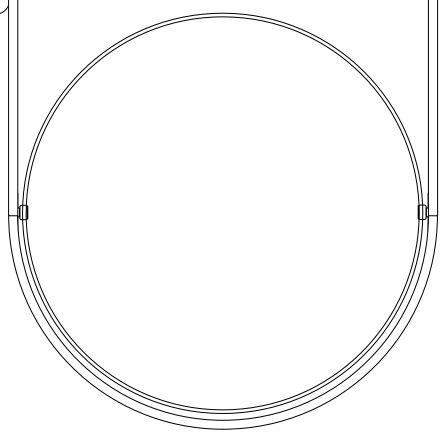


3
CORNER SET R 60 / 90




6
POWERBOX
48V-DC

R





L



6
CONNECTORS
48V-DC


180°






90°

R 60 / 90





SOLISCAPE

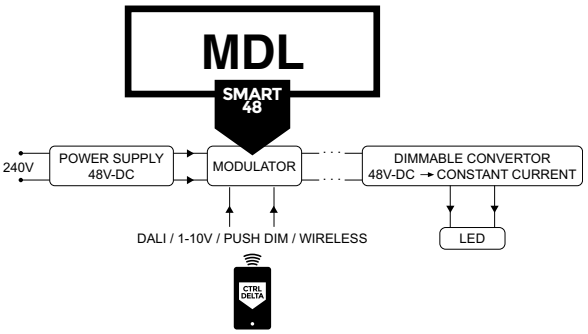

NLT - NATURAL LIGHT TECHNOLOGY

Soli 52 / 66 make use of Delta Light's Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity.






A


SOLI				52			66		
				MDL	DALI DIM	Q DIM	MDL	DALI DIM	Q DIM
3000K CRI>90	LED 10.3W / 1281lm ./ 48V-DC	IP20	20°	**27112 9320** ◇	**27115 9325** ◇	**27118 932Q** ◇			
			45°	**27112 9330** ◇	**27115 9335** ◇	**27118 933Q** ◇			
	LED 20.5W / 2499lm / 48V-DC		18°				**27121 9310** ◇	**27123 9315** ◇	**27125 931Q** ◇
			30°				**27121 9320** ◇	**27123 9325** ◇	**27125 932Q** ◇
			45°				**27121 9330** ◇	**27123 9335** ◇	**27125 933Q** ◇
3000K CRI>98	**NLT** LED 10.7W / 1040lm ./ 48V-DC		20°	**27113 7320** ◇	**27116 7325** ◇	**27119 732Q** ◇			
			45°	**27113 7330** ◇	**27116 7335** ◇	**27119 733Q** ◇			
3000K CRI>95	**NLT** LED 21.1W / 2068lm / 48V-DC		18°				**27122 7310** ◇	**27124 7315** ◇	**27126 731Q** ◇
			30°				**27122 7320** ◇	**27124 7325** ◇	**27126 732Q** ◇
			45°				**27122 7330** ◇	**27124 7335** ◇	**27126 733Q** ◇
2700K CRI>90	LED 10.3W / 1224lm ./ 48V-DC		20°	**27112 9220** ◇	**27115 9225** ◇	**27118 922Q** ◇			
			45°	**27112 9230** ◇	**27115 9235** ◇	**27118 923Q** ◇			
	LED 20.5W / 2432lm / 48V-DC		18°				**27121 9210** ◇	**27123 9215** ◇	**27125 921Q** ◇
			30°				**27121 9220** ◇	**27123 9225** ◇	**27125 922Q** ◇
			45°				**27121 9230** ◇	**27123 9235** ◇	**27125 923Q** ◇
2700K CRI>98	**NLT** LED 10.7W / 967lm / / 48V-DC		20°	**27113 7220** ◇	**27116 7225** ◇	**27119 722Q** ◇			
			45°	**27113 7230** ◇	**27116 7235** ◇	**27119 723Q** ◇			
2700K CRI>95	**NLT** LED 21.1W / 1925lm / 48V-DC		18°				**27122 7210** ◇	**27124 7215** ◇	**27126 721Q** ◇
			30°				**27122 7220** ◇	**27124 7225** ◇	**27126 722Q** ◇
			45°				**27122 7230** ◇	**27124 7235** ◇	**27126 723Q** ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC		20°	**27184 9020** ◇	**27185 9025** ◇	**27186 902Q** ◇			
			45°	**27184 9030** ◇	**27185 9035** ◇	**27186 903Q** ◇			
				◇ B ● / GC ● / W ○			◇ B ● / W ○		

NLT - NATURAL LIGHT TECHNOLOGY

MLT - MELANOPIC LIGHT TECHNOLOGY

The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.






SOLI-FORM

				UGR <19	DOWN			DOWN-UP		
					MDL	DALI DIM	Q DIM	MDL	DALI DIM	Q DIM
LED 3000K CRI>80	10,1W / 1651lm / 48V-DC	67°	L564		**27127 8320** ◇	**27130 8325** ◇	**27133 832Q** ◇			
	15,2W / 2477lm / 48V-DC		L840		**27128 8320** ◇	**27131 8325** ◇	**27134 832Q** ◇			
	20,3W / 3302lm / 48V-DC		L1104		**27129 8320** ◇	**27132 8325** ◇	**27135 832Q** ◇			
	UP 6,6W / 1126lm / 48V-DC DOWN 6,6W / 1126lm / 48V-DC		L564					**27136 8320** ◇	**27139 8325** ◇	**27144 832Q** ◇
			2 circuits						**27140 8325** ◇	**27145 832Q** ◇
	UP 9,8W / 1688lm / 48V-DC DOWN 9,8W / 1688lm / 48V-DC		L840					**27137 8320** ◇	**27141 8325** ◇	**27146 832Q** ◇
			2 circuits						**27142 8325** ◇	**27147 832Q** ◇
	UP 13,1W / 2251lm / 48V-DC DOWN 13,1W / 2251lm / 48V-DC		L1104					**27138 8320** ◇		
			2 circuits						**27143 8325** ◇	**27148 832Q** ◇

◇ B-B ●● / B-MMAT ●● / W-W ○○ / W-B ○●


IP20


POSITION FOR SOLI-FORM/LINE

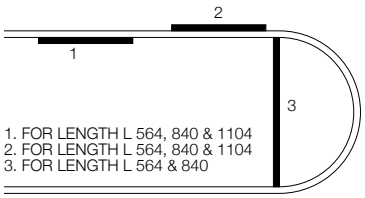

1. FOR LENGTH L 564, 840 & 1104
2. FOR LENGTH L 564, 840 & 1104
3. FOR LENGTH L 564 & 840

LIGHTSCAPES





SOLI-LINE

				DOWN			UP		
				MDL	DALI DIM	Q DIM	MDL	DALI DIM	Q DIM
LED 3000K CRI>90	11,7W / 1500lm / 48V-DC	67°	L564	**27149 9300** ◇	**27152 9305** ◇	**27155 930Q** ◇	**27158 9300** ◇	**27161 9305** ◇	**27164 930Q** ◇
	18W / 2240lm / 48V-DC		L840	**27150 9300** ◇	**27153 9305** ◇	**27156 930Q** ◇	**27159 9300** ◇	**27162 9305** ◇	**27165 930Q** ◇
	23,4W / 3000lm / 48V-DC		L1128	**27151 9300** ◇	**27154 9305** ◇	**27157 930Q** ◇	**27160 9300** ◇	**27163 9305** ◇	**27166 930Q** ◇

◇ B ● / W ○


IP20

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY											
			SOLI 52			SOLI 66			SOLI-FORM			SOLI-LINE		
			MDL	DALI	Q	MDL	DALI	Q	MDL	DALI	Q	MDL	DALI	Q
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *	R *	R *	R *	R *	R *	R *
or POWERBOX														
NON DIM - 48V-DC - 200W	**27110 0090**	Ø 263 x 40	R	R	R	R	R	R	R	R	R	R	R	R
NON DIM - 48V-DC - 200W	**27110 0100**	530 x 30 X 33	R	R	R	R	R	R	R	R	R	R	R	R
MODULATOR MORE INFO TECHNICAL CHAPTER														
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *			R *			R *			R *		
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *			R *			R *			R *		
CONTROL MORE INFO TECHNICAL CHAPTER														
Q CONTROL	**21032 0150**	72 X 90 X 62			R			R			R			R
Q GATEWAY	**21032 0160**	110 x 110 x 35			R			R			R			R
Q PUSH BUTTON INTERFACE	**21032 0170**	38 x 38 x 15			O			O			O			O
FINISH														
SPY 52 TUBE	**19810 0100 B / FBR / FG / GC / W**		R	R	R									
SPY 66 TUBE	**24611 0100 B / FBR / FG / GC / W**					R	R	R						
HONEYCOMB / LENS / GLASS														
HONEYCOMB SINGLE USE	**19810 0010 B**		A	A	A									
HONEYCOMB DOUBLE USE	**19810 0060 B**		A	A	A									
LINEAR SPREAD LENS	**19810 0020**		A	A	A									
SPREAD LENS	**19810 0030**		A	A	A									
SOFTENING LENS	**19810 0040**		A	A	A									
GLASS SBL	**19810 0050**		A	A	A									
HONEYCOMB SINGLE USE	**24611 0150 B**					A	A	A						
HONEYCOMB DOUBLE USE	**24611 0210 B**					A	A	A						
LINEAR SPREAD LENS	**24611 0170**					A	A	A						
SPREAD LENS	**24611 0200**					A	A	A						
SOFTENING LENS	**24611 0190**					A	A	A						
GLASS SBL	**24611 0160**					A	A	A						


* REMOTE INSTALLATION

SOLISCAPE




SOLI-SHHH C	600	900	1200
LIGHT GREY	**27167 0000** ◇	**27169 0000** ◇	**27171 0000** ◇
DARK GREY	**27168 0000** ◇	**27170 0000** ◇	**27172 0000** ◇
SCARLET	**21401 0000** ◇	**21405 0000** ◇	**21409 0000** ◇
SAND	**21402 0000** ◇	**21406 0000** ◇	**21410 0000** ◇
LILAC	**21403 0000** ◇	**21407 0000** ◇	**21411 0000** ◇
ARCTIC	**21404 0000** ◇	**21408 0000** ◇	**21412 0000** ◇
	◇ B ● / W ○		
	INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m		

A



SOLI-SHHH PLUS	600	900	1200	
	FOR 4 x SOLI 52-SHHH	FOR 4 x SOLI 52-SHHH	FOR 4 x SOLI 52-SHHH	FOR 8 x SOLI 52-SHHH
	DALI DIM	DALI DIM	DALI DIM	DALI DIM
LIGHT GREY	**27173 0005** ◇	**27175 0005** ◇	**27177 0005** ◇	**27179 0005** ◇
DARK GREY	**27174 0005** ◇	**27176 0005** ◇	**27178 0005** ◇	**27180 0005** ◇
SCARLET	**21413 0005** ◇	**21417 0005** ◇	**21421 0005** ◇	**21425 0005** ◇
SAND	**21414 0005** ◇	**21418 0005** ◇	**21422 0005** ◇	**21426 0005** ◇
LILAC	**21415 0005** ◇	**21419 0005** ◇	**21423 0005** ◇	**21427 0005** ◇
ARCTIC	**21416 0005** ◇	**21420 0005** ◇	**21424 0005** ◇	**21428 0005** ◇
	◇ B ● / W ○			
	INCL. POWER SUPPLY 110-240V / 50-60Hz INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m INCL. 1 x CABLE 4 x 0,75mm²			

NLT - NATURAL LIGHT TECHNOLOGY



SOLI				52-SHHH
				MDL
3000K CRI>90	LED 10.3W / 1281lm / 600mA	IP20	20°	**27181 9320** ◇
			45°	**27181 9330** ◇
3000K CRI>98	**NLT** LED 10.7W / 1040lm / 600mA		20°	**27182 7320** ◇
			45°	**27182 7330** ◇
2700K CRI>90	LED 10.3W / 1224lm / 600mA		20°	**27181 9220** ◇
			45°	**27181 9230** ◇
2700K CRI>98	**NLT** LED 10.7W / 967lm / 600mA		20°	**27182 7220** ◇
			45°	**27182 7230** ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA		20°	**27187 9020** ◇
			45°	**27187 9030** ◇
				◇ B ● / GC ● / W ○


deltalight.com/soliscape

A GLIMPSE OF ME
ON PAGE 38

C

FIND ME ONLINE

SOLI-SHHH VS SOLI-SHHH PLUS

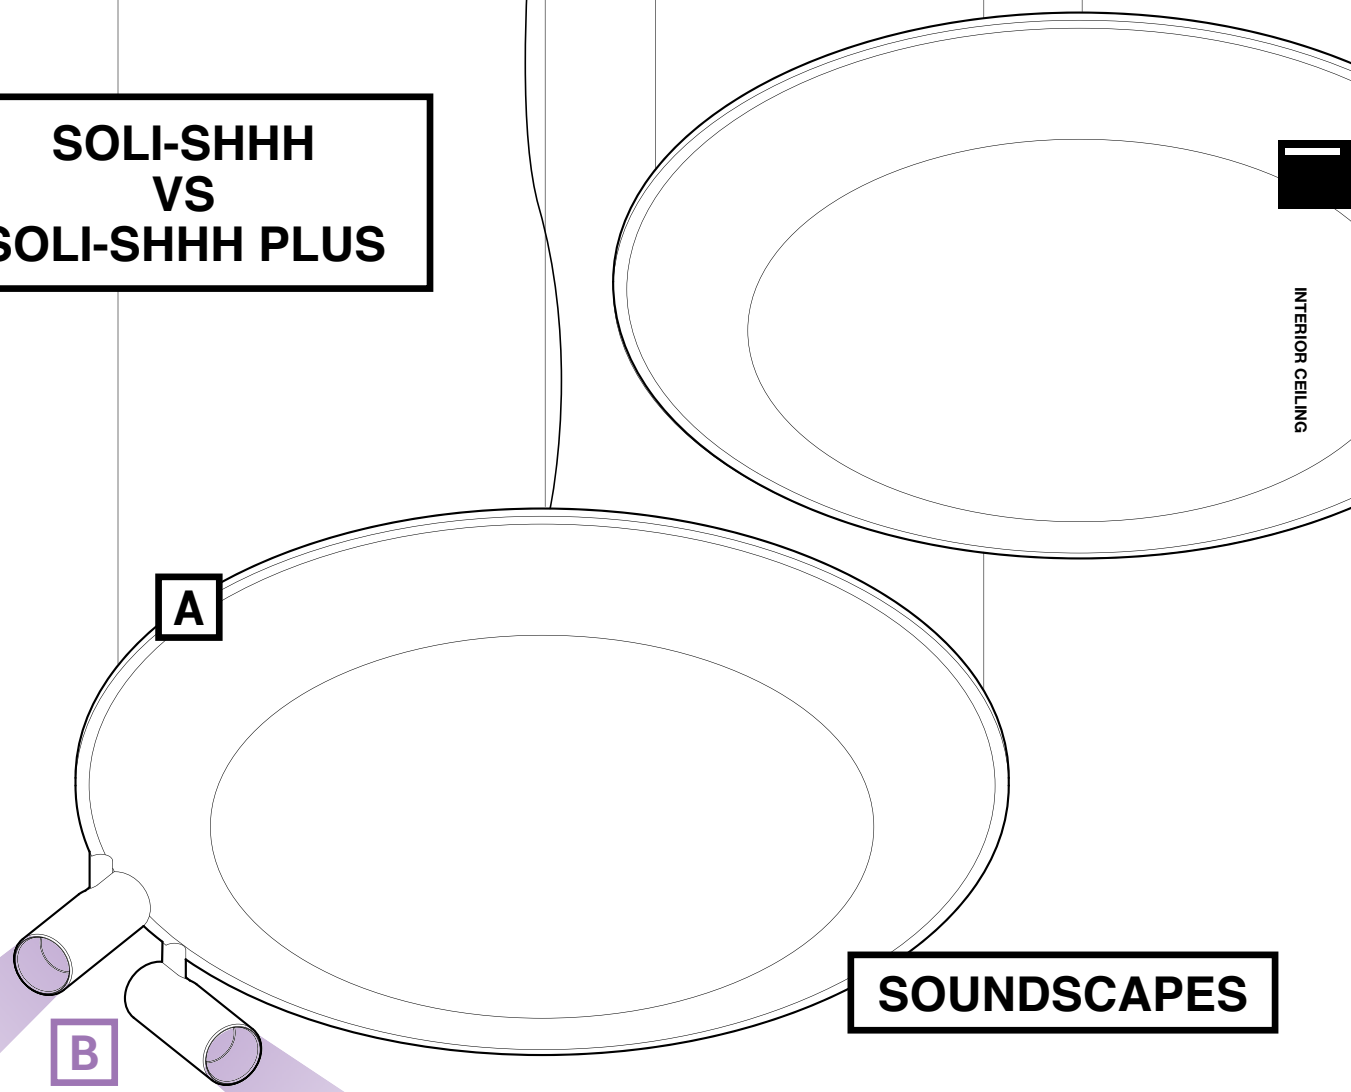

SOUNDSCAPES

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY		
			SOLI-SHHH C	SOLI-SHHH PLUS	SOLI 52-SHHH
FINISH					
SPY 52 TUBE	**19810 0100 B / FBR / FG / GC / W**				R
HONEYCOMB / LENS / GLASS					
HONEYCOMB SINGLE USE	**19810 0010 B**				A
HONEYCOMB DOUBLE USE	**19810 0060 B**				A
LINEAR SPREAD LENS	**19810 0020**				A
SPREAD LENS	**19810 0030**				A
SOFTENING LENS	**19810 0040**				A
GLASS SBL	**19810 0050**				A
INSTALLATION					
SOLI-SHHH PLUS 600	for max. 4x SOLI 52-SHHH				R
or SOLI-SHHH PLUS 900	for max. 4x SOLI 52-SHHH				R
or SOLI-SHHH PLUS 1200	for max. 4x SOLI 52-SHHH				R
or SOLI-SHHH PLUS 1200	for max. 8x SOLI 52-SHHH				R
SUSPENSION ST	**15225 0340 B / W**			O	
CONNECTION ST	**15225 0360 B / W**			O	
CABLE BASE R	**203 99 55 ANO / B / W**			O	

B


SOLISCAPE


How to control SOLISCAPE


SMART 48

CTRL DELTA


Sensorial responsive




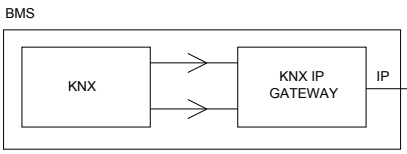




CONNECTION TO
Q-BUS, KNX, SONOS, ALEXA, ...






Q-PUSH BUTTON INTERFACE

Hey Google,...

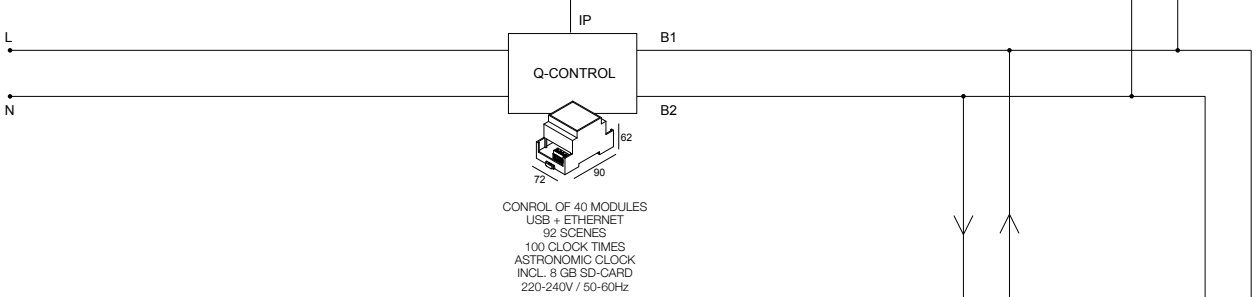

CONROL OF 40 MODULES
USB + ETHERNET
92 SCENES
100 CLOCK TIMES
ASTRONOMIC CLOCK
INCL. 8 GB SD-CARD
220-240V / 50-60Hz

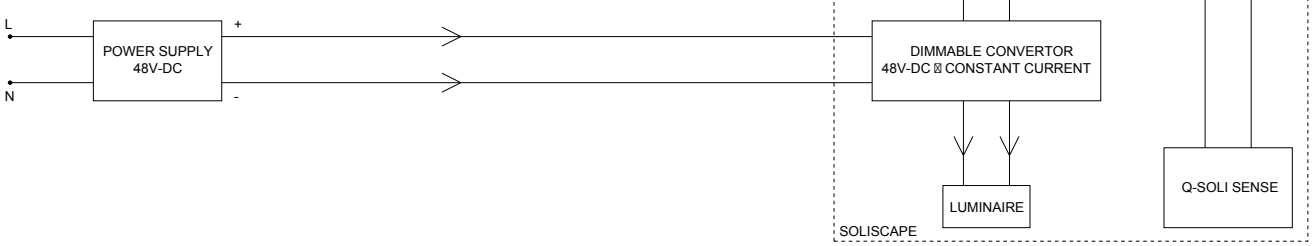

SOLISCAPE	
VOICE CONTROL	
SOLI-VOICE COMMAND GOOGLE HOLDER *	21032 0220 B/W
SENSOR	
DALI PRESENCE & DAYLIGHT SENSOR	27110 0055 B
WIRELESS SENSOR HUB **	27110 0070 B
Q SENSOR HUB **	27110 0080 B
Q CONTROL	
Q CONTROL 40-1	21032 0150
Q GATEWAY	21032 0160
Q PUSH BUTTON INTERFACE	21032 0170

* FOR GOOGLE NEST 2ND GENERATION SPEAKER
** PRESENCE & DAYLIGHT / TEMPERATURE / HUMIDITY / AIR QUALITY

			REQUIREMENT / OPTION / ACCESSORY			
			VOICE COMMAND GOOGLE HOLDER	DALI PRESENCE & DAYLIGHT SENSOR	WIRELESS SENSOR HUB	Q SENSOR HUB
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *
CONTROL MORE INFO TECHNICAL CHAPTER						
WIRELESS MODULATOR	**300 90 012**				R *	
Q CONTROL	**21032 0150**		R	R		R
Q GATEWAY	**21032 0160**		R	R		R


* REMOTE INSTALLATION

INFORM

A WORKING TOOL
The Inform family is an extensive range of linear and curved lighting solutions, designed to be used in applications that include task areas, like landscape offices, meeting rooms, reception desks, home office,… Areas which need technical architectural lighting at its best: eye for design, eye for the user and eye for performance.
The base of this family is a combination of Delta Light's Melanopic Light Technology (MLT) with high efficient louvre optics.

ULTIMATE VISUAL COMFORT
Different from the fluorescent tubes, a LED array is build up out of multiple LEDs. Therefore, the reflector is designed to perfectly embrace every individual LED module in a way to boost the efficiency of the complete luminaire while maintaining a high level of visual comfort as every LED dot is shielded from being looked into.

deltalight.com/inform

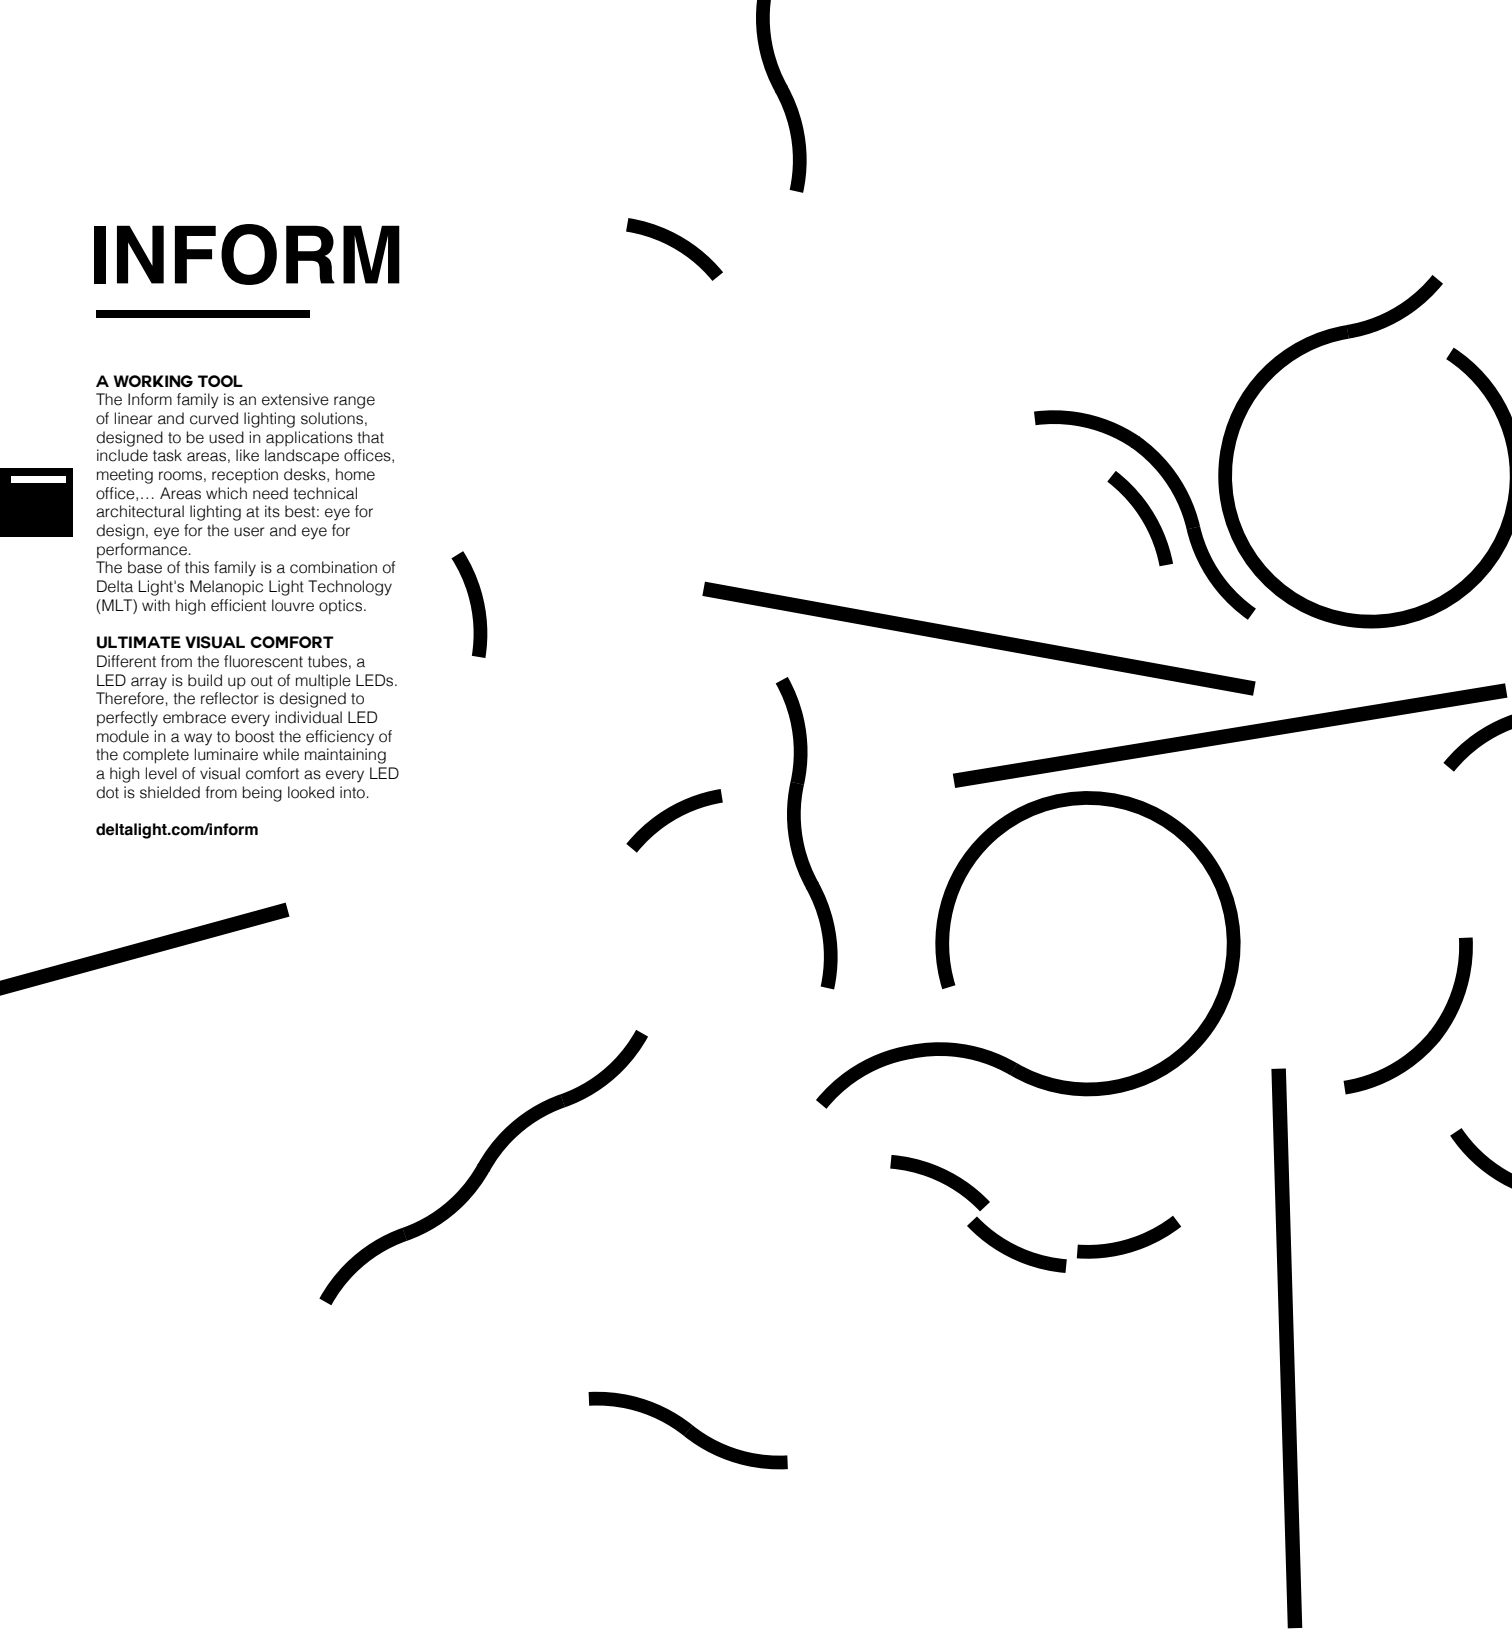


		INFORM SQ		INFORM R			
		28	40	R1	R2	R3	R4
LIGHT EFFECT							
DOWN		10,2W - 1765lm up to 51W - 8364lm	16,8W - 2643lm up to 48W - 7398lm	23,8W - 3594lm	23,8W - 3594lm	35,7W - 5391lm	23,8W - 3594lm
DOWN-UP		DOWN 10,2W - 1765lm up to 34W - 5882lm UP 13,6W - 2462lm up to 27,2W - 4706lm	DOWN 16,8W - 2643lm UP 24W - 3699lm	DOWN 23,8W - 3594lm UP 11,9W - 1797lm	DOWN 23,8W - 3594lm UP 11,9W - 1797lm	DOWN 35,7W - 5391lm UP 11,9W - 1797lm	DOWN 23,8W - 2695lm UP 17,9W - 1797lm
UP			16,8W - 2643lm up to 48W - 7398lm				
OPTICS							
45°							
63° - UGR<16			•				
67° - UGR<16		•					
71° - UGR<19				•	•	•	•
COLOUR TEMPERATURE							
2700K				•	•	•	•
3000K				•	•	•	•
3000K - MLT (MELANOPIC LIGHT TECHNOLOGY)		•	•				
4000K							
4000K - MLT (MELANOPIC LIGHT TECHNOLOGY)		•	•				
5000K - 2700K TUNABLE WHITE			•				
CONTROL							
EXCL. POWER SUPPLY		•		•	•	•	•
NON DIM							
MAINS DIM							
1-10V DIM							
DALI DIM			•	•	•	•	
WIRELESS DIM							
COLOUR							
WHITE		•	•	•	•	•	•
WHITE-BLACK		•	•	•	•	•	•
BLACK		•		•	•	•	•
BLACK-GOLD MATT		•		•	•	•	•
FLEMISH GOLD-BLACK				•	•	•	•
INSTALLATION							
INTERIOR	RECESSED	•					
	SURFACE MOUNTED	•	•	•	•	•	•
	SUSPENDED CABLE	•	•	•	•	•	•
OTHER							
PRESENCE & DAYLIGHT SENSOR			•				


• STANDARD
• NOT FOR ALL VERSIONS

INFORM

MLT - MELANOPIC LIGHT TECHNOLOGY



The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.



38 x (L - 7) x 40 max.12,5

NEW


INFORM

				UGR <19	ST		
					L848mm	L1124mm	L1400mm
LED * 3000K CRI>80	9,8W / 1688lm (HP) 15,2W / 2477lm	67°	848-3		**25501 8320** ◇		
	13,1W / 2251lm (HP) 20,3W / 3302lm		1124-4			**25502 8320** ◇	
	16,4W / 2814lm (HP) 25,3W / 4128lm		1400-6				**25503 8320** ◇

* Power selection to be set on driver

◇ B-B / B-MMAT / W-B / W-W

IP20



INFORM

				UGR <19	SQ F		
					L1440mm	L2000mm	L2820mm
LED * 4000K CRI>80	9,8W / 1768lm (HP) 15,2W / 2596lm	67°	144-3		**25523 8420** ◇		
	16,4W / 2946lm (HP) 25,3W / 4326lm		144-5		**25524 8420** ◇		
	13,2W / 2356lm (HP) 20,2W / 3460lm		200-4			**25525 8420** ◇	
	22,9W / 4124lm (HP) 35,4W / 6056lm		200-7			**25526 8420** ◇	
	19,8W / 3534lm (HP) 30,3W / 5190lm		282-6				**25527 8420** ◇
	32,8W / 5892lm (HP) 50,6W / 8652lm		282-10				**25528 8420** ◇
LED * 3000K CRI>80	9,8W / 1688lm (HP) 15,2W / 2477lm		144-3		**25523 8320** ◇		
	16,4W / 2814lm (HP) 25,3W / 4128lm		144-5		**25524 8320** ◇		
	13,2W / 2252lm (HP) 20,2W / 3302lm		200-4			**25525 8320** ◇	
	22,9W / 3940lm (HP) 35,4W / 5779lm		200-7			**25526 8320** ◇	
	19,8W / 3378lm (HP) 30,3W / 4953lm		282-6				**25527 8320** ◇
	32,8W / 5628lm (HP) 50,6W / 8256lm		282-10				**25528 8320** ◇

* Power selection to be set on driver


◇ B-B / B-MMAT / W-B / W-W

IP20

A GLIMPSE OF ME
ON PAGE 40

C

FIND ME ONLINE

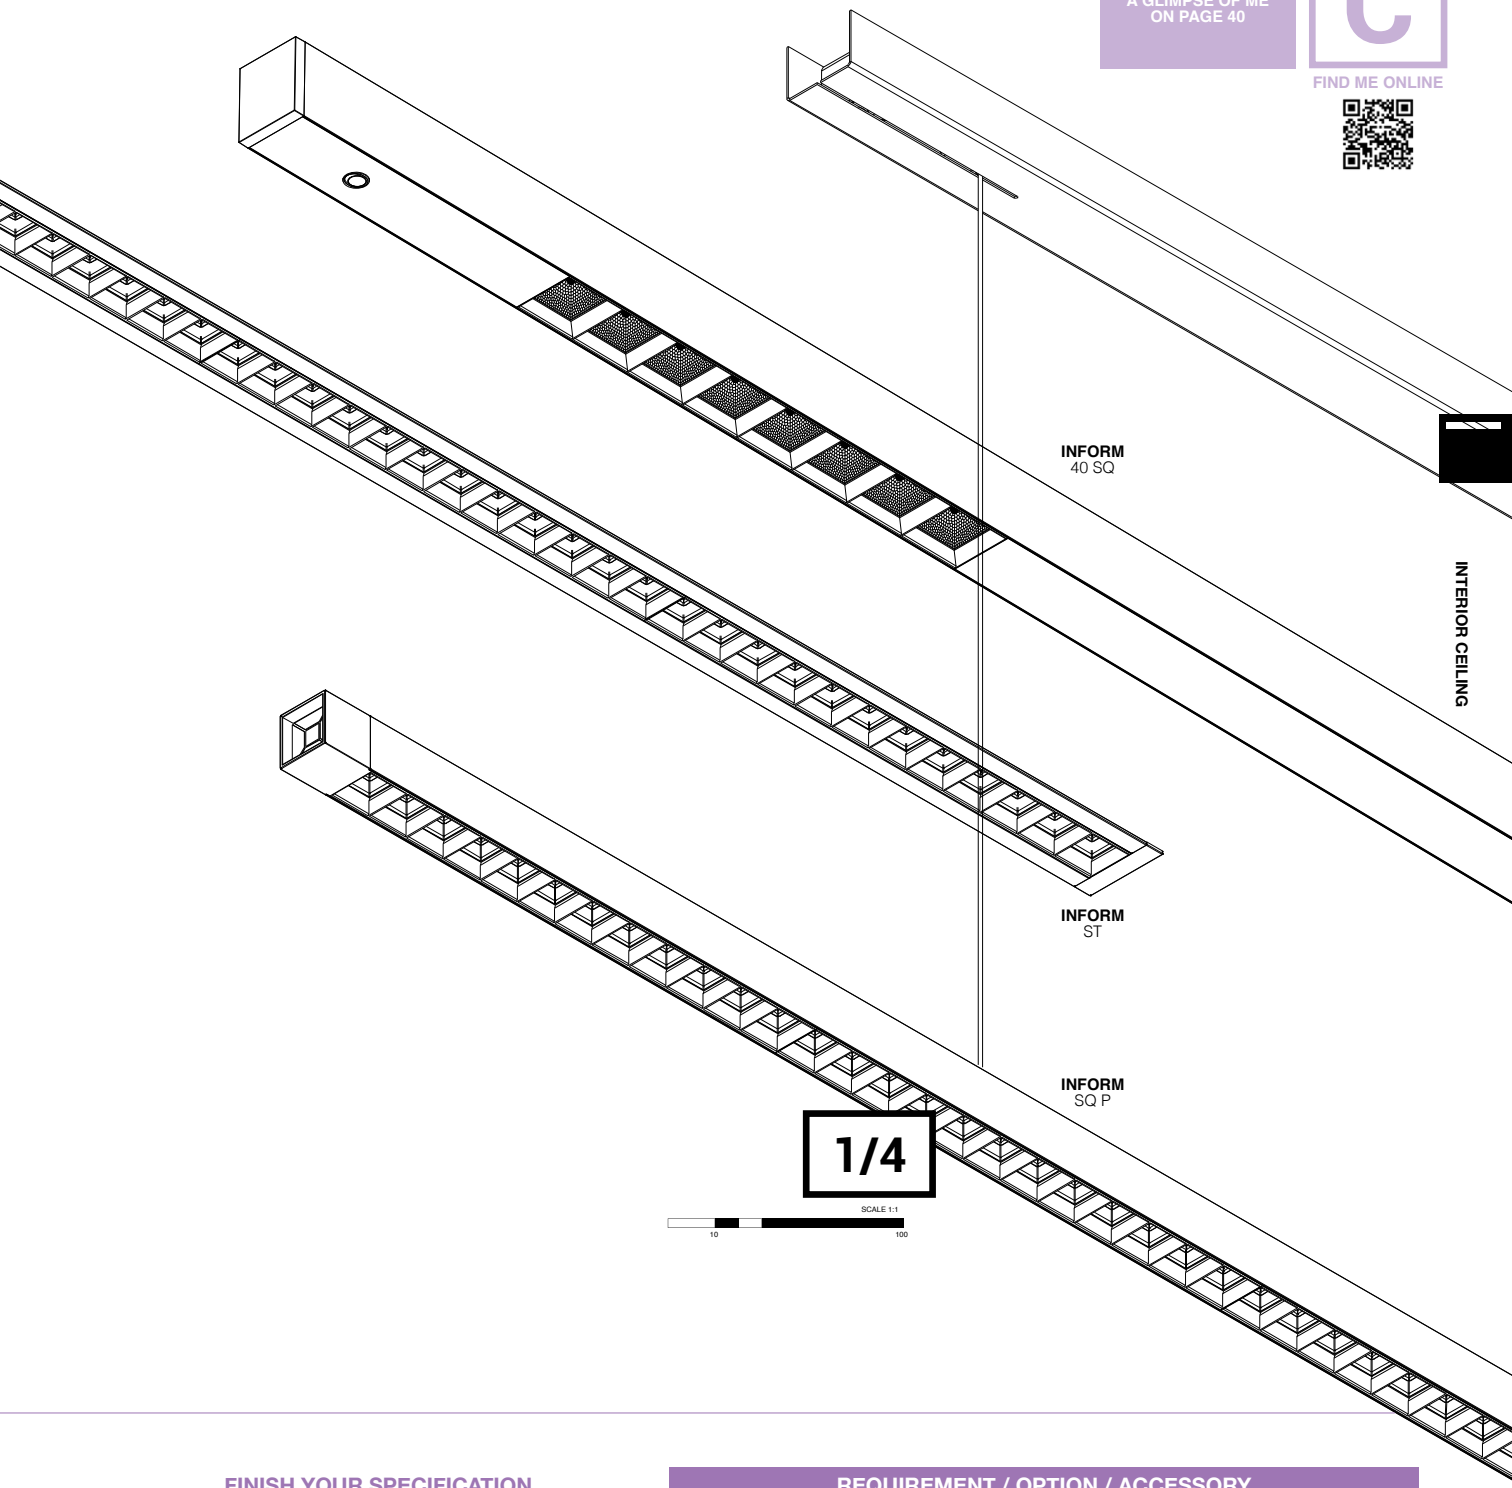

FINISH YOUR SPECIFICATION


				REQUIREMENT / OPTION / ACCESSORY								
				INFORM ST			INFORM SQ					
				848-3	1124-4	1400-6	144-3	144-5	200-4	200-7	282-6	282-10
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR												
NON DIM	17W	**25510 0420**	min. 78	R			R					
	25W	**25510 0440**	min. 78		R				R			
	45W	**25510 0430**	min. 78			R		R		R	R	
	60W	**25510 0450**	min. 92									R
DALI DIM	17W	**25510 0375**	min. 78	R			R					
	25W	**25510 0395**	min. 78		R				R			
	45W	**25510 0385**	min. 78			R		R		R	R	
	60W	**25510 0405**	min. 92									R

B

INFORM SQ

A

INFORM




				SQ P DOWN L1440mm	SQ P DOWN L2000mm	SQ P DOWN L2820mm
LED * 4000K CRI>80	9,8W / 1768lm (HP) 15,2W / 2596lm	67°	144-3	**25511 8420** ◇		
	16,4W / 2946lm (HP) 25,3W / 4326lm		144-5	**25513 8420** ◇		
	13,2W / 2356lm (HP) 20,2W / 3460lm		200-4		**25515 8420** ◇	
	22,9W / 4124lm (HP) 35,4W / 6056lm		200-7		**25517 8420** ◇	
	19,8W / 3534lm (HP) 30,3W / 5190lm		282-6			**25519 8420** ◇
	32,8W / 5892lm (HP) 50,6W / 8652lm		282-10			**25521 8420** ◇
LED * 3000K CRI>80	9,8W / 1688lm (HP) 15,2W / 2477lm		144-3	**25511 8320** ◇		
	16,4W / 2814lm (HP) 25,3W / 4128lm		144-5	**25513 8320** ◇		
	13,2W / 2252lm (HP) 20,2W / 3302lm		200-4		**25515 8320** ◇	
	22,9W / 3940lm (HP) 35,4W / 5779lm		200-7		**25517 8320** ◇	
	19,8W / 3378lm (HP) 30,3W / 4953lm		282-6			**25519 8320** ◇
	32,8W / 5628lm (HP) 50,6W / 8256lm		282-10			**25521 8320** ◇

* Power selection to be set on driver

◇ B-B / B-MMAT / W-B / W-W

POWER VIA CABLE SUSPENSION
INCL.2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L1440 & L2000
INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L2820

IP20



NEW

INFORM

UGR <16

				SQ P DOWN L3920mm	SQ P DOWN L4750mm	SQ P DOWN L5850mm
LED * 3000K CRI>80	19,6W / 3376lm (HP) 30,4W / 4954lm	67°	392-6	**25570 8320** ◇		
	29,4W / 5064lm (HP) 45,6W / 7431lm		475-9		**25572 8320** ◇	
	29,4W / 5064lm (HP) 45,6W / 7431lm		585-9			**25574 8320** ◇

* Power selection to be set on driver

◇ B-B / B-MMAT / W-B / W-W


INCL.1 x CABLE 2 x 0,75mm²
INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L392-6
INCL.4 x CABLE SUSP. SINGLE AUTO 1,6m FOR L475-9 & L585-9

IP20


A GLIMPSE OF ME
ON PAGE 40

C

FIND ME ONLINE

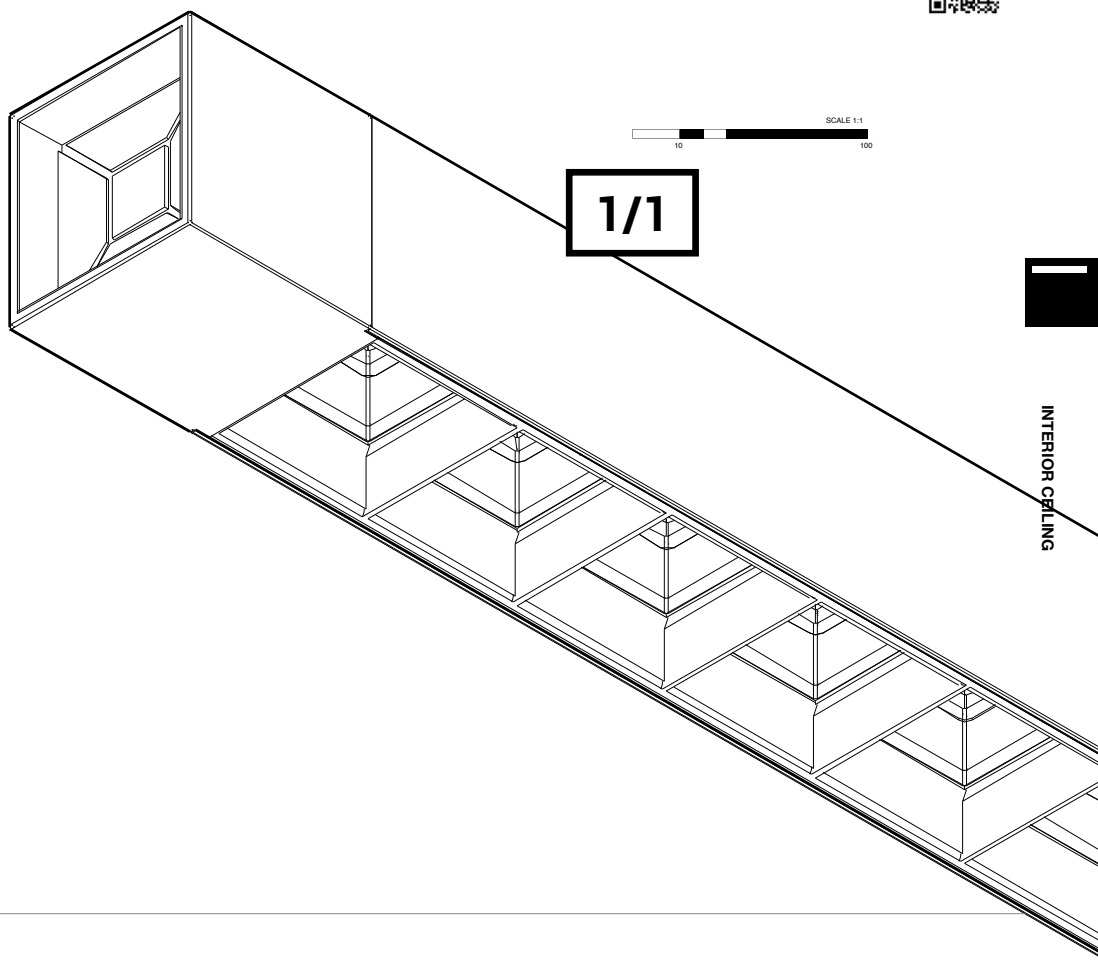

MLT
Melanopic Light Technology



FINISH YOUR SPECIFICATION


				REQUIREMENT / OPTION / ACCESSORY INFORM SQ P DOWN								
				144-3	144-5	200-4	200-7	282-6	282-10	392-6	475-9	585-9
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR												
NON DIM	17W	**25510 0420**	min. 78	R								
	25W	**25510 0440**	min. 78			R						
	45W	**25510 0430**	min. 78		R		R	R		R		
	60W	**25510 0450**	min. 92						R		R	R
DALI DIM	17W	**25510 0375**	min. 78	R								
	25W	**25510 0395**	min. 78			R						
	45W	**25510 0385**	min. 78		R		R	R		R		
	60W	**25510 0405**	min. 92						R		R	R
or POWERBOX												
NON DIM	25W	**25510 0030 B / W**	800 x 40 x 30	R								
	50W	**25510 0010 B / W**	800 x 40 x 30		R	R	R	R				
		25510 0480 B / W	570 x 48 x 40							R		
	75W	**25510 0020 B / W**	800 x 40 x 30						R			
		25510 0500 B / W	570 x 48 x 40								R	R
DALI DIM	35W	**25510 0045 B / W**	800 x 40 x 30	R								
	50W	**25510 0015 B / W**	800 x 40 x 30		R	R	R	R				
		25510 0495 B / W	800 x 40 x 30							R		
	75W	**25510 0025 B / W**	800 x 40 x 30						R			
		25510 0515 B / W	800 x 40 x 30								R	R
INSTALLATION												
SUSPENSION + CONNECTION ST		**15225 0350 B / W**		R *	R *	R *	R *	R *	R *			
CONNECTION ST		**15225 0360 B / W**								O	O	O
SUSPENSION ST		**15225 0340 B / W**								O	O	O

* REQUIRED IN COMBINATION WITH POWER SUPPLY

B

INFORM SQ

MLT
Melanopic Light Technology




INFORM				UGR <16	SQ P DOWN-UP		
					L1440mm	L2000mm	L2820mm
LED 4000K CRI>80	UP 13,1W / 2357lm DOWN 9,8W / 1768lm	67° DOWN IP20	144-3		**25512 8420** ◇		
	UP 13,1W / 2357lm DOWN 16,4W / 2946lm		144-5		**25514 8420** ◇		
	UP 19,7W / 3535lm DOWN 13,2W / 2356lm		200-4			**25516 8420** ◇	
	UP 19,7W / 3535lm DOWN 22,9W / 4124lm		200-7			**25518 8420** ◇	
	UP 26,2W / 4714lm DOWN 19,8W / 3534lm		282-6				**25520 8420** ◇
	UP 26,2W / 4714lm DOWN 32,8W / 5892lm		282-10				**25522 8420** ◇
LED 3000K CRI>80	UP 13,1W / 2252lm DOWN 9,8W / 1688lm		144-3		**25512 8320** ◇		
	UP 13,1W / 2252lm DOWN 16,4W / 2814lm		144-5		**25514 8320** ◇		
	UP 19,7W / 3377lm DOWN 13,2W / 2252lm		200-4			**25516 8320** ◇	
	UP 19,7W / 3377lm DOWN 22,9W / 3940lm		200-7			**25518 8320** ◇	
	UP 26,2W / 4502lm DOWN 19,8W / 3378lm		282-6				**25520 8320** ◇
	UP 26,2W / 4502lm DOWN 32,8W / 5628lm		282-10				**25522 8320** ◇

◇ B-B / B-MMAT / W-B / W-W

POWER VIA CABLE SUSPENSION
INCL.2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L1440 & L2000
INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L2820

IP20



NEW


INFORM				UGR <16	SQ P DOWN-UP		
					L3920mm	L4750mm	L5850mm
LED 3000K CRI>80	UP 33,2W / 5548lm DOWN 19,6W / 3376lm	67°	392-6		**25571 8320** ◇		
	UP 39,6W / 6756lm DOWN 29,4W / 5064lm		475-9			**25573 8320** ◇	
	UP 45W / 7860lm DOWN 29,4W / 5064lm		585-9				**25575 8320** ◇


◇ B-B / B-MMAT / W-B / W-W

INCL.1 x CABLE 4 x 0,75mm²
INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L392-6
INCL.4 x CABLE SUSP. SINGLE AUTO 1,6m FOR L475-9 & L585-9

IP20

Position for Installation



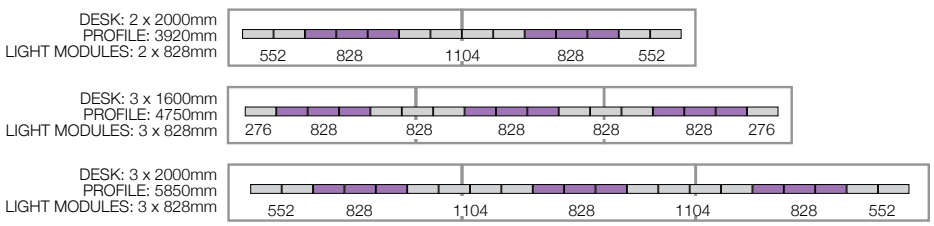

FINISH YOUR SPECIFICATION

				REQUIREMENT / OPTION / ACCESSORY INFORM SQ P DOWN-UP								
				144-3	144-5	200-4	200-7	282-6	282-10	392-6	475-9	585-9
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR												
NON DIM	45W	**25510 0430**	min. 78	R	R	R				R **	R **	
	60W	**25510 0450**	min. 92				R	R		R		R **
	100W	**25510 0460**	min. 106						R		R	
DALI DIM	45W	**25510 0385**	min. 78	R	R	R				R **	R **	
	60W	**25510 0405**	min. 92				R	R		R		R **
	100W	**25510 0415**	min. 106						R		R	
or POWERBOX												
NON DIM	50W	**25510 0010 B / W**	800 x 40 x 30	R	R	R						
	75W	**25510 0020 B / W**	800 x 40 x 30				R	R	R			
		20548 0500 B / W	570 x 48 x 40							R		R
DALI DIM	50W	**25510 0015 B / W**	800 x 40 x 30	R	R	R						
	75W	**25510 0025 B / W**	800 x 40 x 30				R	R	R			
		25510 0515 B / W	800 x 40 x 30							R		R
	85W	**25510 0475 B / W**	570 x 48 x 40								R	
INSTALLATION												
SUSPENSION + CONNECTION ST		**15225 0350 B / W**		R *	R *	R *	R *	R *	R *			
CONNECTION ST		**15225 0360 B / W**								O	O	O
SUSPENSION ST		**15225 0340 B / W**								O	O	O

* REQUIRED IN COMBINATION WITH POWER SUPPLY
** 1 DRIVER FOR UP + 1 DRIVER FOR DOWN

B


INFORM 40

MLT - MELANOPIC LIGHT TECHNOLOGY


The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

Batwing Curve for evenly lit ceilings

Tutututututu Batwiiiiiiiiing

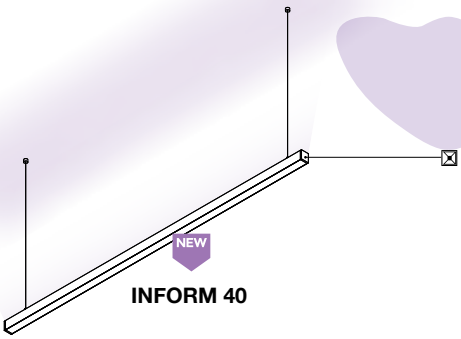

INFORM 40




SQ UP

				L1800mm	L3200mm
LED *	16,8W / 2771lm (HP) 26,4W / 4249lm	DALI DT6**	180	**30729 8405** ◇	
4000K CRI>80	33,6W / 5542lm (HP) 48W / 7756lm		320		**30731 8405** ◇
LED *	16,8W / 2643lm (HP) 26,4W / 4051lm		180	**30729 8305** ◇	
3000K CRI>80	33,6W / 5286lm (HP) 48W / 7398lm		320		**30731 8305** ◇
LED CRI>80	14,4W / 5000K /2336lm - 2700K /1952lm		180	**30730 8005** ◇	
TUNABLE WHITE	28,8W / 5000K /4672lm - 2700K /3904lm		320		**30732 8005** ◇

* POWER SELECTION TO BE SET ON DRIVER
** DALI DT8 TUNABLE WHITE

◇ B-B ●● / W-B ○●

INCL.2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L180
INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L320
1 x CABLE 5 x 0,75mm²
220-240V / 0I50-60Hz
IP20



PDS
Presence and Daylight Sensor

NEW

INFORM 40

UGR <19

SQ DOWN

					L1600mm		L1800mm		L3200mm		L3600mm	
						PDS		PDS		PDS		PDS
LED *	16,8W / 2771lm (HP) 26,4W / 4249lm	DALI DT6**	63°	160	**30711 8435** ◇	**30712 8435** ◇						
				180			**30713 8435** ◇	**30714 8435** ◇				
4000K CRI>80	33,6W / 5542lm (HP) 48W / 7756lm			320					**30716 8435** ◇	**30717 8435** ◇		
				360							**30719 8435** ◇	**30720 8435** ◇
LED *	16,8W / 2643lm (HP) 26,4W / 4051lm			160	**30711 8335** ◇	**30712 8335** ◇						
				180			**30713 8335** ◇	**30714 8335** ◇				
3000K CRI>80	33,6W / 5286lm (HP) 48W / 7398lm			320					**30716 8335** ◇	**30717 8335** ◇		
				360							**30719 8335** ◇	**30720 8335** ◇
LED CRI>80	28,8W / 5000K /4672lm - 2700K /3904lm			320					**30715 8035** ◇			
TUNABLE WHITE				360							**30718 8035** ◇	

* POWER SELECTION TO BE SET ON DRIVER
** DALI DT8 TUNABLE WHITE

◇ B-B ●● / W-B ○●


PDS: PRESENCE AND DAYLIGHT SENSOR
220-240V / 0I50-60Hz
IP20

A

deltalight.com/inform

NEW

INFORM 40



UGR <16

SQ DOWN-UP

					L1600mm		L1800mm		L3200mm		L3600mm	
						PDS		PDS		PDS		PDS
LED * 4000K CRI>80	UP 16,8W / 2771lm (HP) 24W / 3878lm DOWN 16,8W / 2771lm (HP) 24W / 3878lm	DALI DT6**	63°	160	**30721 8435◇**	**30722 8435◇**						
				180			**30723 8435◇**	**30724 8435◇**				
	UP 33,6W / 5542lm (HP) 48W / 7757lm DOWN 33,6W / 5542lm (HP) 48W / 7757lm			320 2 CHANNELS 1 UP + 1 DOWN					**30733 8435◇**	**30734 8435◇**		
	UP 40,8W / 6736lm (HP) 60W / 9696lm DOWN 33,6W / 5542lm (HP) 48W / 7757lm			360 2 CHANNELS 1 UP + 1 DOWN							**30735 8435◇**	**30736 8435◇**
LED * 3000K CRI>80	UP 16,8W / 2643lm (HP) 24W / 3699lm DOWN 16,8W / 2643lm (HP) 24W / 3699lm			160	**30721 8335◇**	**30722 8335◇**						
				180			**30723 8335◇**	**30724 8335◇**				
	UP 33,6W / 5286lm (HP) 48W / 7398lm DOWN 33,6W / 5286lm (HP) 48W / 7398lm			320 2 CHANNELS 1 UP + 1 DOWN					**30733 8335◇**	**30734 8335◇**		
	UP 40,8W / 6432lm (HP) 60W / 9248lm DOWN 33,6W / 5286lm (HP) 48W / 7398lm			360 2 CHANNELS 1 UP + 1 DOWN							**30735 8335◇**	**30736 8335◇**
LED CRI>80	UP 28,8W / 5000K /4672lm - 2700K /3904lm DOWN 28,8W / 5000K /4672lm -			320					**30725 8035◇**			
				320					**30726 8035◇**			
TUNABLE WHITE	UP 28,8W / 5000K /4712lm - 2700K /3992lm DOWN 28,8W / 5000K /4672lm -			360							**30727 8035◇**	
				360							**30728 8035◇**	


* POWER SELECTION TO BE SET ON DRIVER
** DALI DT8 TUNABLE WHITE

◇ B-B ●● / W-B ○●

PDS: PRESENCE AND DAYLIGHT SENSOR
INCL.2 x CABLE SUSP. SINGLE AUTO 1,6m FOR L160 & L180
INCL.3 x CABLE SUSP. SINGLE AUTO 1,6m FOR L320 & L360
1 x CABLE 5 x 0,75mm²
220-240V / 0l50-60Hz
IP20


Position for Installation

DESK: 1 x 1600mm
LIGHT MODULES:
2 x 328mm




INFORM
INFORM + PDS

DESK: 1 x 1800mm
LIGHT MODULES:
2 x 328mm




INFORM
INFORM + PDS

DESK: 2 x 1600mm
LIGHT MODULES:
4 x 328mm



INFORM
INFORM + PDS

DESK: 2 x 1800mm
LIGHT MODULES:
4 x 328mm



INFORM
INFORM + PDS


REQUIREMENT / OPTION / ACCESSORY


		INFORM 40									
		SQ UP		SQ DOWN				SQ DOWN-UP			
		L180	L320	L160	L180	L320	L360	L160	L180	L320	L360
INSTALLATION											
INF40 SQ 160/180 SUSPENSION SET 1,6m	**30710 0010 B / W**			1 x O	1 x O						
INF40 SQ 160/180 SUSPENSION SET 3m	**30710 0030 B / W**			1 x O	1 x O						
INF40 SQ 320/360 SUSPENSION SET 1,6m	**30710 0020 B / W**					1 x O	1 x O				
INF40 SQ 320/360 SUSPENSION SET 3m	**30710 0040 B / W**					1 x O	1 x O				
CONNECTION ST	**15225 0360 B / W**	O	O	O	O	O	O	O	O	O	O
CABLE BASE S	**203 99 56 B / W**	O	O	O	O	O	O	O	O	O	O
PDS REMOTE CONTROL	**26510 0010**			R *	R *	R *	R *	R *	R *	R *	R *
or PDS SENSOR PROGRAMMER	**26510 0020**			R *	R *	R *	R *	R *	R *	R *	R *


* ONLY FOR PDS VERSIONS

INFORM R


PATENTED










INFORM		UGR <19	R1	R2	R3
3000K CRI>90	LED 22,9W / 3504lm / 700mA	71°	**26811 9320** ◇	**26817 9320** ◇	
	LED 33,9W / 5275lm / 1050mA				**26822 9320** ◇
2700K CRI>90	LED 22,9W / 3456lm / 700mA		**26811 9220** ◇	**26817 9220** ◇	
	LED 33,9W / 5208lm / 1050mA				**26822 9220** ◇
			◇ B-B / B-MMAT / FG-B / W-B / W-W		
			IP20		










INFORM			UGR <19	R1+	R2+	R3+
3000K CRI>90	LED 22,9W / 3504lm	DALi	71°	**26813 9325** ◇	**26819 9325** ◇	
	LED 33,9W / 5275lm					**26821 9325** ◇
2700K CRI>90	LED 22,9W / 3456lm			**26813 9225** ◇	**26819 9225** ◇	
	LED 33,9W / 5208lm					**26821 9225** ◇
				◇ B-B / B-MMAT / FG-B / W-B / W-W		
				220-240V / 50-60Hz		
				IP20		










INFORM			UGR <16	R1 DOWN-UP	R2 DOWN-UP	R3 DOWN-UP
3000K CRI>90	LED UP 11,5W / 1752lm / 700mA LED 22,9W / 3504lm / 700mA	71°		**26812 9320** ◇	**26818 9320** ◇	
	LED UP 17W / 2638lm / 1050mA LED 33,9W / 5275lm / 1050mA					**26823 9320** ◇
2700K CRI>90	LED UP 11,5W / 1728lm / 700mA LED 22,9W / 3456lm / 700mA			**26812 9220** ◇	**26818 9220** ◇	
	LED UP 17W / 2604lm / 1050mA LED 33,9W / 5208lm / 1050mA					**26823 9220** ◇
				◇ B-B / B-MMAT / FG-B / W-B / W-W		
				INCL.1 x CABLE 5 x 0.75mm² + 4 x CABLE SUSP. SINGLE AUTO 1,6m		INCL.1 x CABLE 5 x 0.75mm² + 7 x CABLE SUSP. SINGLE AUTO 1,6m
				IP20		IP20










INFORM			UGR <16	R1+ DOWN-UP	R2+ DOWN-UP	R1+ DOWN	R1+ CS DOWN-UP
3000K CRI>90	LED UP 11,5W / 1752lm LED DOWN 22,9W / 3504lm	DALi	71°	**26814 9325** ◇	**26820 9325** ◇		**26816 9325** ◇
	LED 22,9W / 3504lm					**26815 9325** ◇	
2700K CRI>90	LED UP 11,5W / 1728lm LED DOWN 22,9W / 3456lm			**26814 9225** ◇	**26820 9225** ◇		**26816 9225** ◇
	LED 22,9W / 3456lm					**26815 9225** ◇	
				◇ B-B / B-MMAT / FG-B / W-B / W-W			
				220-240V / 50-60Hz			
				INCL.1 x CABLE 5 x 0.75mm² + 4 x CABLE SUSP. SINGLE AUTO 1,6m		POWER VIA CABLE SUSPENSION 4 x CABLE SUSP. SINGLE AUTO 1,6m	
				IP20		IP20	

A GLIMPSE OF ME
ON PAGE 40

C

FIND ME ONLINE

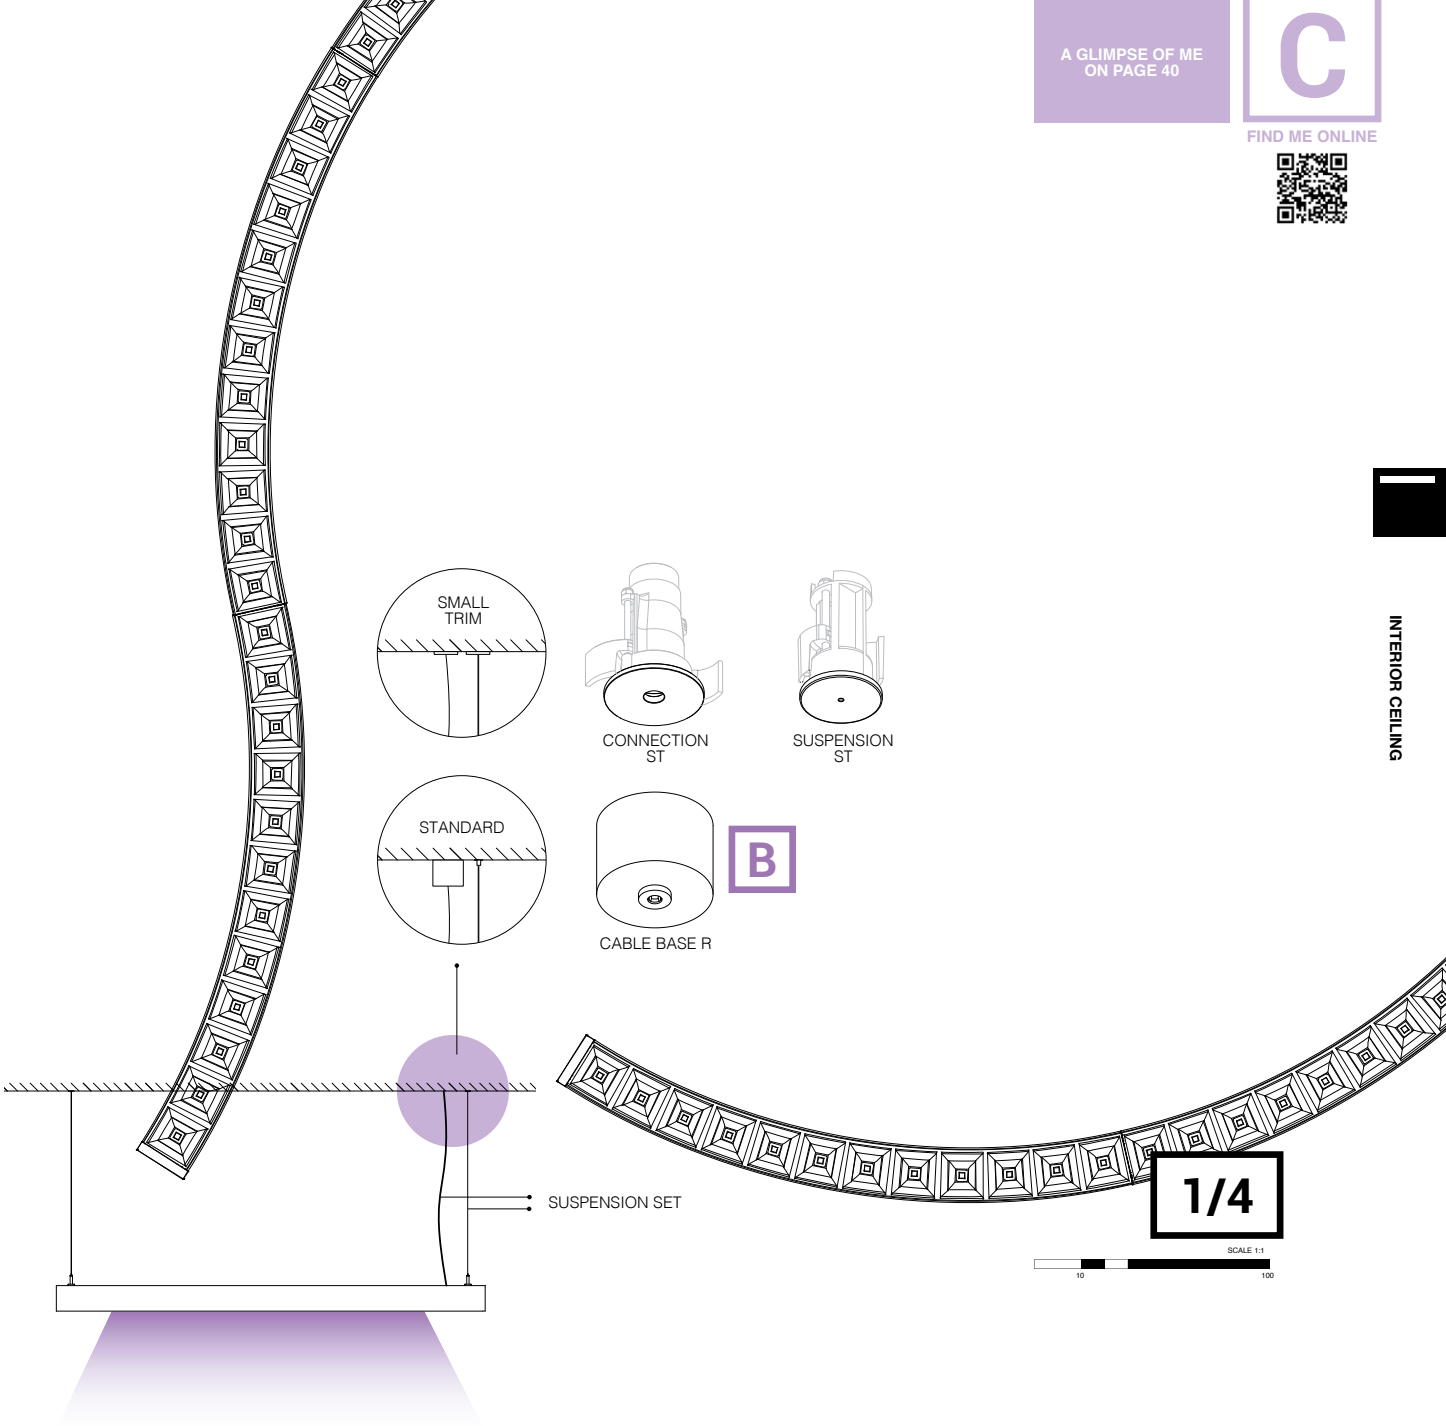


FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY												
			INFORM												
									DOWN-UP					R1+ CS	
			R1	R2	R3	R1+	R2+	R3+	R1	R2	R3	R1+	R2+	DOWN	D/U
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT															
DALI DIM 13	**300 90 68**	min. 72	R	R					2 x R	2 x R					
DALI DIM 16	**300 90 63**	min. 84			R						2 x R				
INSTALLATION															
CONNECTION ST	**15225 0360 B / W**		O	O	O	O	O	O	O	O	O	O	O		
SUSPENSION ST	**15225 0340 B / W**		O	O	O	O	O	O	O	O	O	O	O		
CABLE BASE R	**203 99 55 ANO / B / W**		O	O	O	O	O	O	O	O	O	O	O		
COVERSET R Ø100	**204 00 100 B / W**		O	O	O	O	O	O	O	O	O	O	O		
SUSPENSION SET 30	**15225 0300 B / W**		O	O					O	O					
SUSPENSION SET 31	**15225 0310 B / W**					O	O								
SUSPENSION SET 32	**15225 0320 B / W**							O							
SUSPENSION SET 33	**15225 0330 B / W**				O						O				


B

INFORM R PATENTED

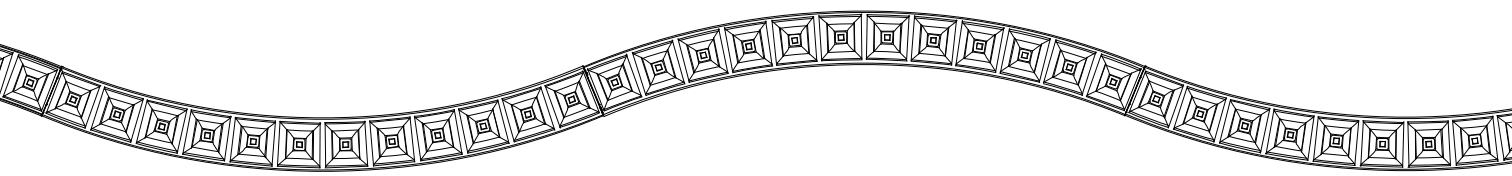

A

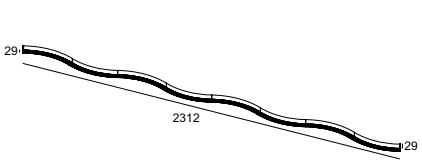

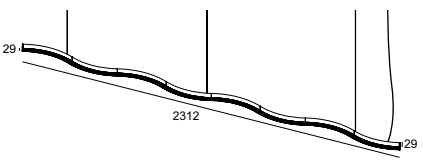



	INFORM	UGR <16	R4	R4 C DOWN	R4 C DOWN-UP
3000K CRI>90	LED 22,9W / 3504lm / 700mA	71°	**26824 9320** ◇	**26825 9320** ◇	
	LED UP 11,5W / 1752lm / 700mA DOWN 22,9W / 3504lm / 700mA				**26826 9320** ◇
2700K CRI>90	LED 22,9W / 3456lm / 700mA		**26824 9220** ◇	**26825 9220** ◇	
	LED UP 11,5W / 1728lm / 700mA DOWN 22,9W / 3456lm / 700mA				**26826 9220** ◇
			◇ B-B / B-MMAT / FG-B / W-B / W-W		
				INCL.1 x CABLE 2 x 0.75mm² + 3 x CABLE SUSP. SINGLE AUTO 1,6m	INCL.1 x CABLE 5 x 0.75mm² + 3 x CABLE SUSP. SINGLE AUTO 1,6m
				IP20	IP20

A GLIMPSE OF ME
ON PAGE 40

C

FIND ME ONLINE

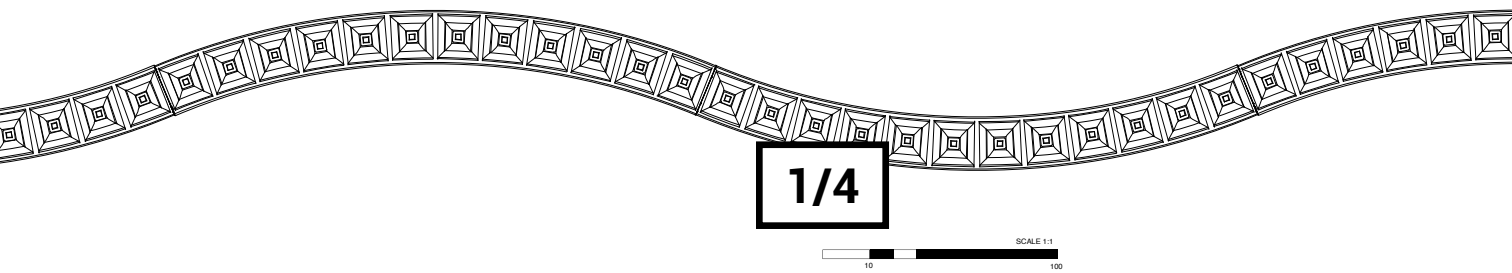




FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY INFORM R4	R4 C DOWN	R4 C DOWN-UP
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
DALI DIM 13	**300 90 68**	min. 72	R	R	R *
or POWERBOX					
DALI DIM	**26810 0015 B / W**	186 x 35 x 66		R	
	26810 0025 B / W	320 x 35 x 66			R
INSTALLATION					
CONNECTION ST	**15225 0360 B / W**		O	O	O
SUSPENSION ST	**15225 0340 B / W**		O	O	O
CABLE BASE R	**203 99 55 ANO / B / W**		O	O	O
COVERSET R Ø100	**204 00 100 B / W**		O	O	O


* 1 DRIVER FOR UP + 1 DRIVER FOR DOWN

B

D-LINER

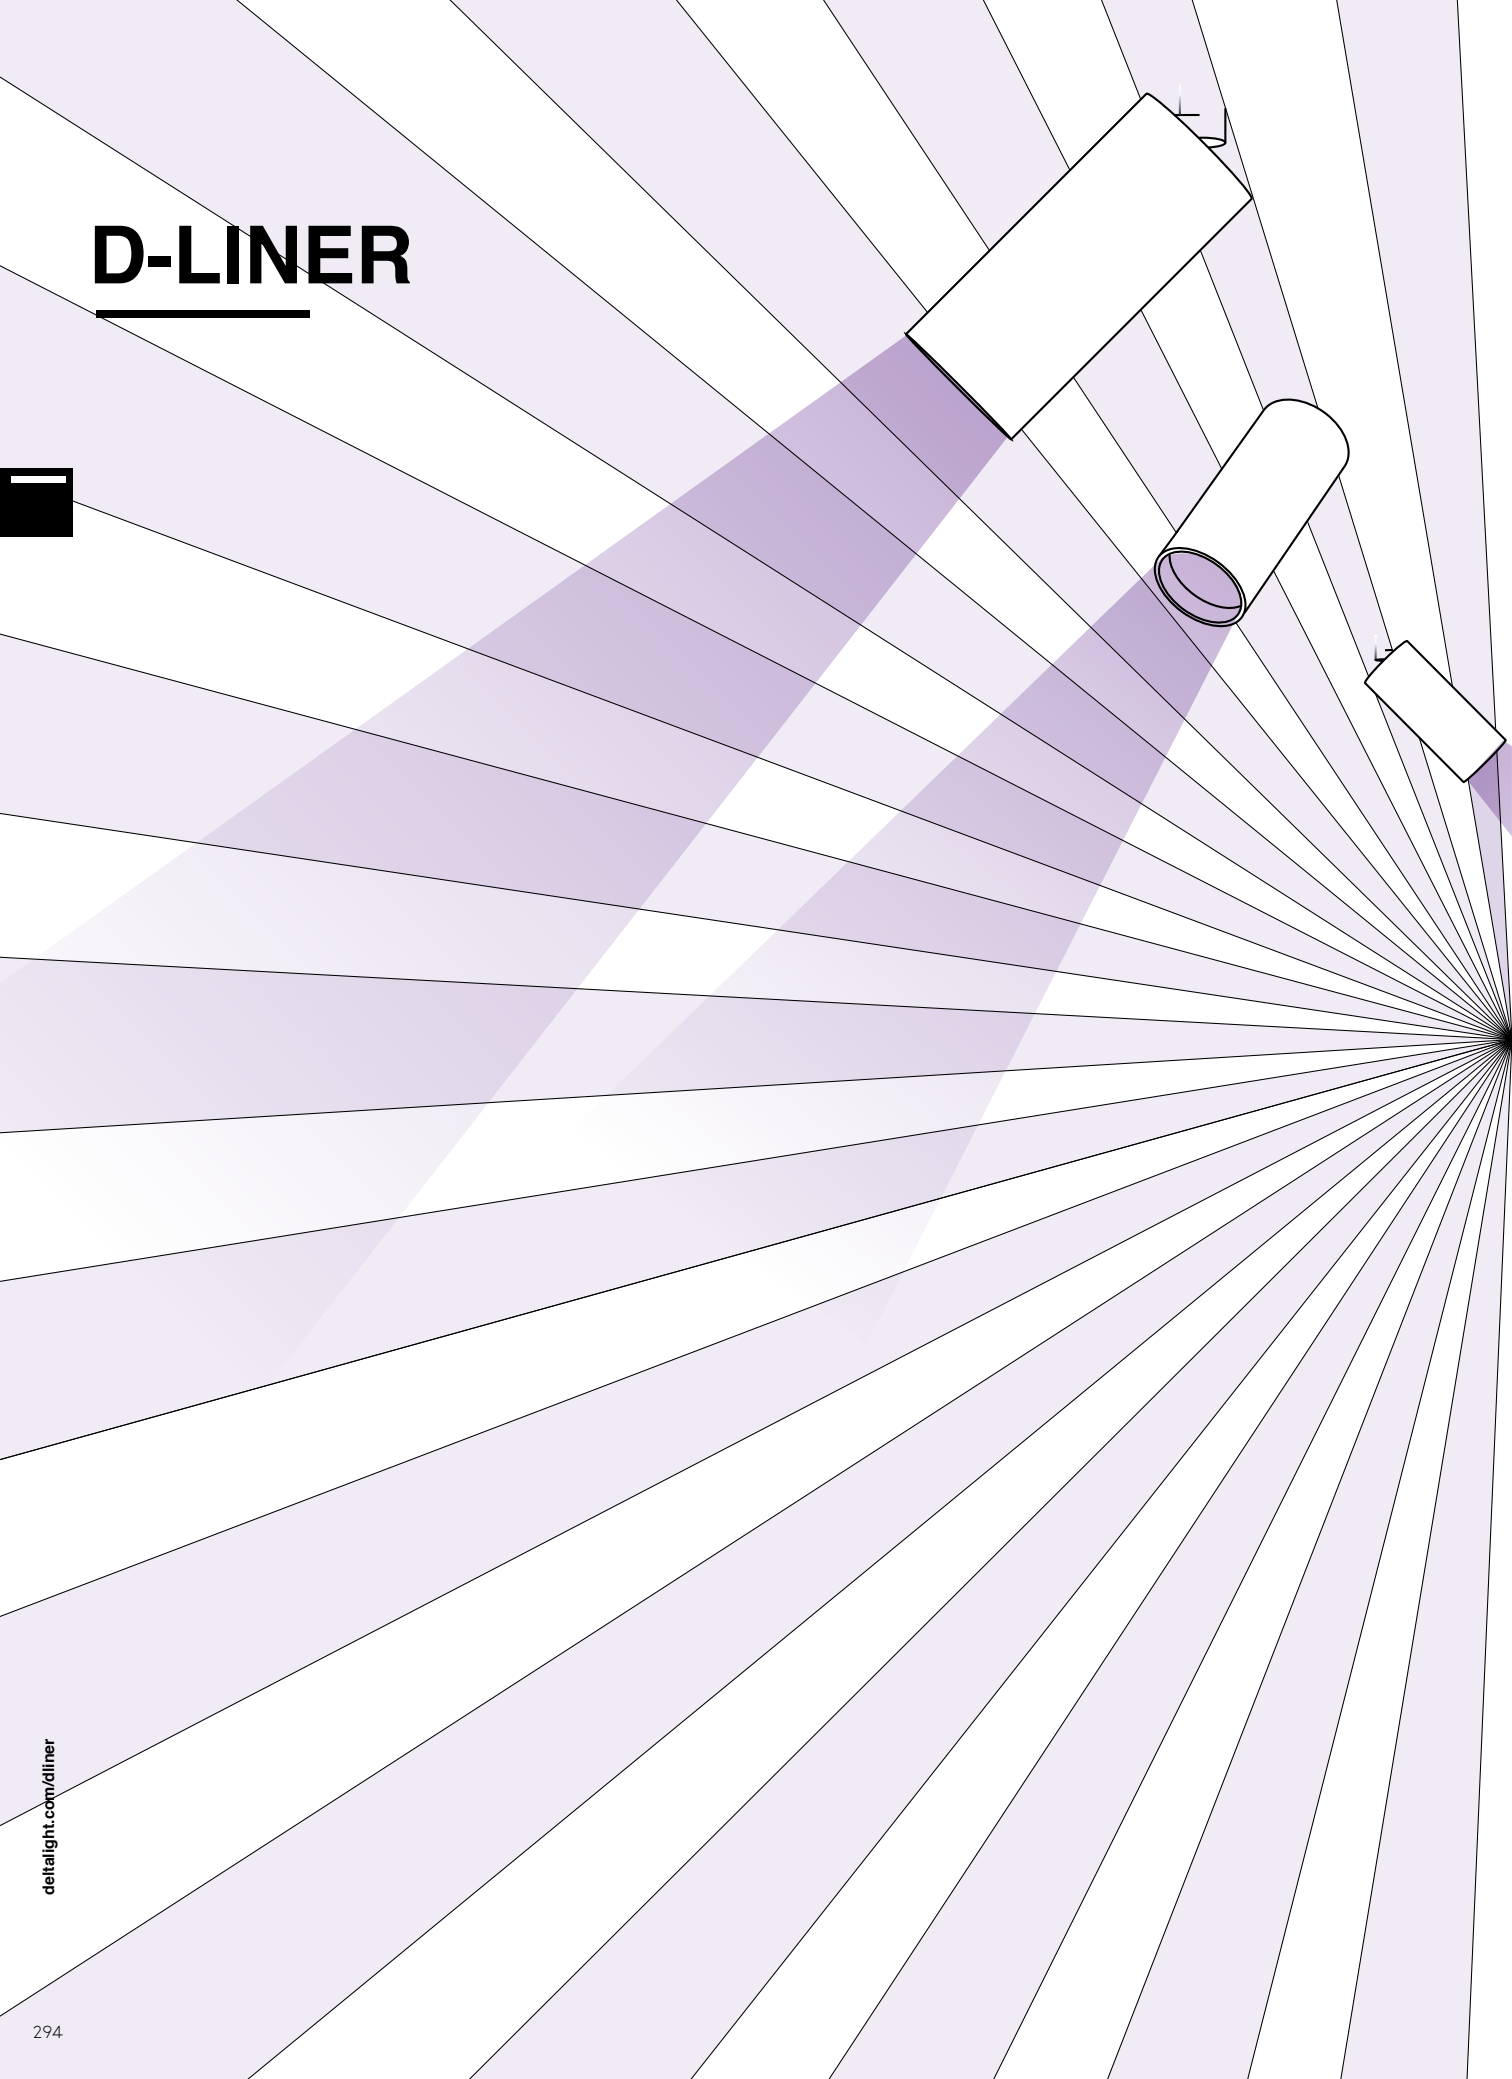

deltalight.com/dliner

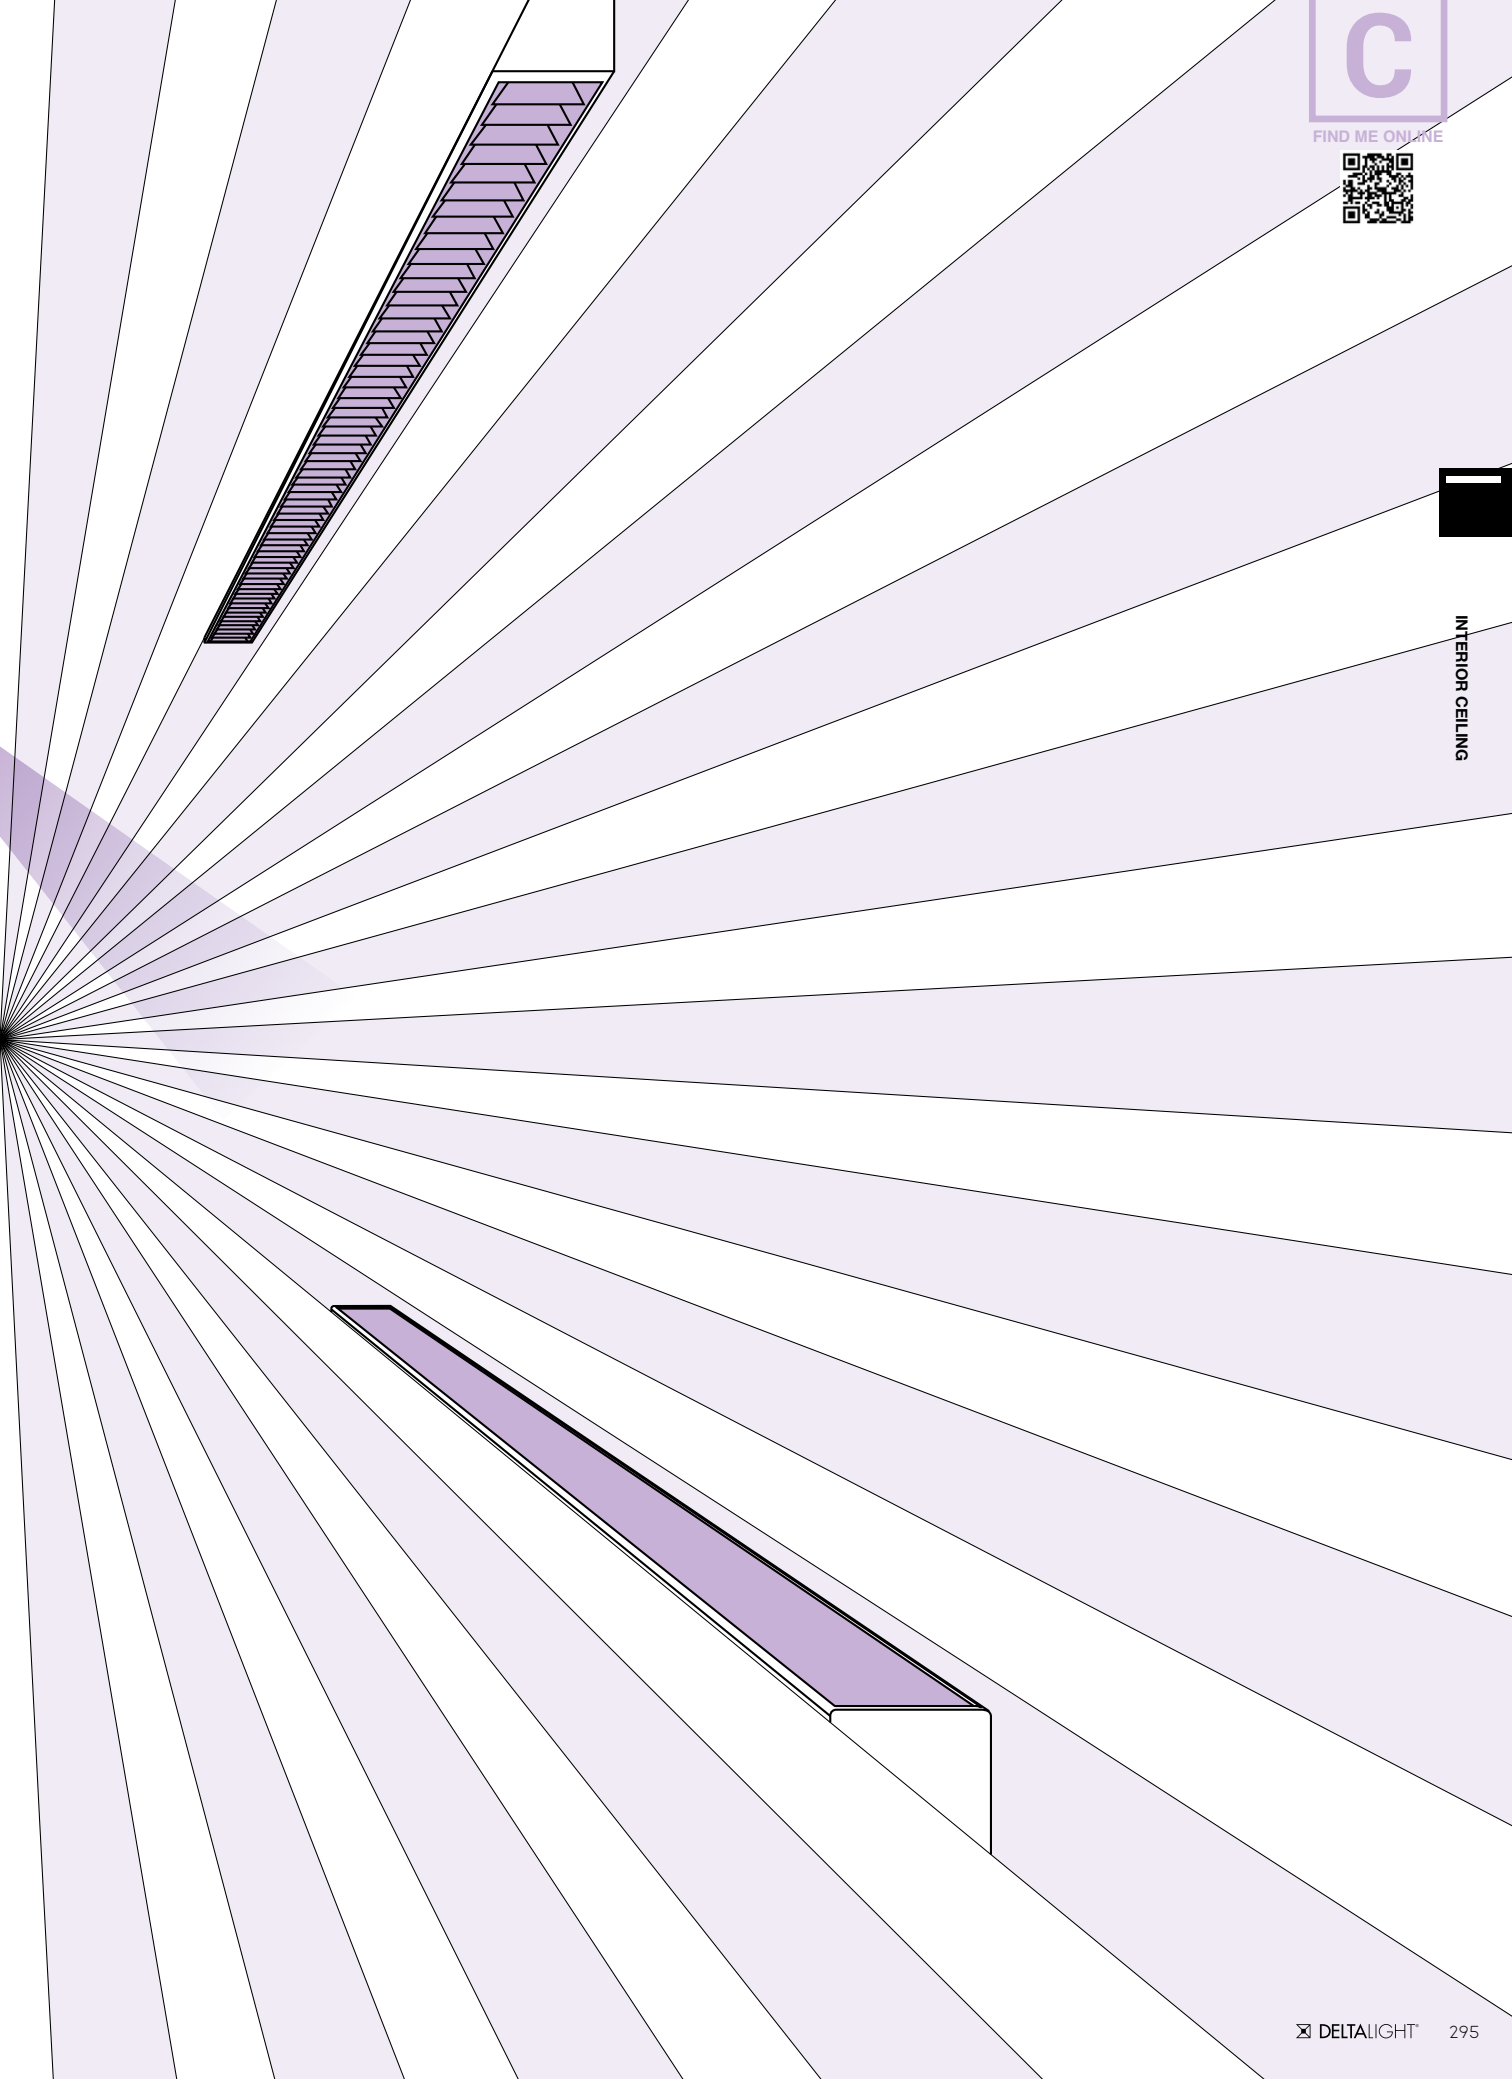

for climate ceilings & acoustic ceilings

D-LINER


Every year, regulations on building and renovation get stricter in terms of energy-efficiency, eco-friendliness and sustainability. Apart from lighting, this also impacts cooling and heating, ventilation, acoustics, … As a consequence, trends and challenges arise to combine lighting with ventilation, acoustics and technical or smart ceiling solutions.

Two examples of high-end technical ceilings are the SAPP ceiling of Interalu and **HeartFelt** ceiling of **Hunter-Douglas. SAPP** stands for Smart Acoustic Passive Power, it combines an aesthetic design and optimal acoustics into a climate-control ceiling. The HeartFelt ceiling is a felt ceiling system with great acoustic characteristics. Both ceiling systems build on modularity and allow for a linear lighting solution in between or in line with the panels.
With D-Liner, Delta Light offers 3 types of lighting solutions that match these ceiling types.

deltalight.com/dliner


HD 30BD

1 D-Liner 19 SL 30BD
2 D-Liner 19 INFORM SAPP/ 30BD
3 D-Liner Sensor
4 D-Liner 30 SBL 30BD + Dali Driver
5 D-Liner 30 SBL 30BD Remote Driver
6 D-Liner 30 INFORM 30BD + Dali Driver
7 D-Liner 30 INFORM 30BD Remote Driver

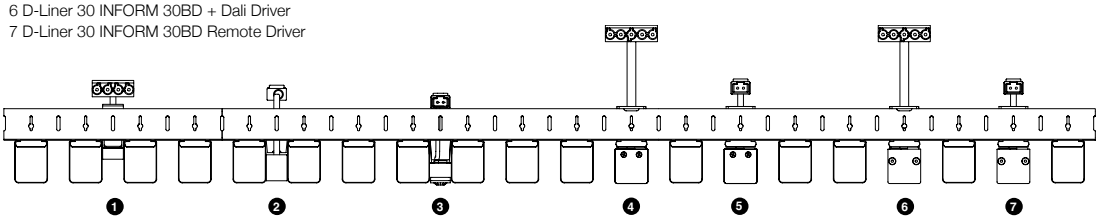


SAPP 30/20

1 D-Liner 19 SL SAPP
2 D-Liner 19 INFORM SAPP/ 30BD
3 D-Liner Sensor
4 D-Liner 30 SBL SAPP + Dali Driver
5 D-Liner 30 SBL SAPP Remote Driver
6 D-Liner 30 INFORM SAPP + Dali Driver
7 D-Liner 30 INFORM SAPP Remote Driver

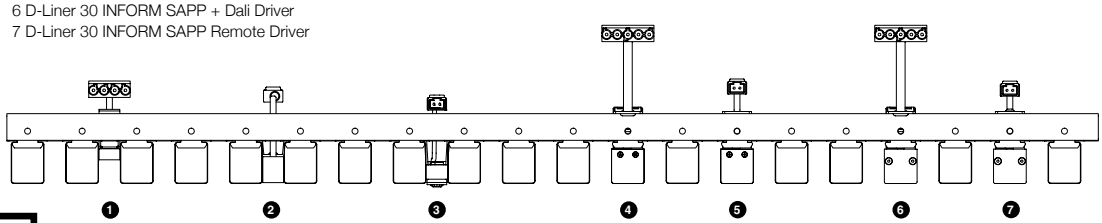

HD HEARTFELT


1 D-Liner 30 SBL HF40 + Dali Driver
2 D-Liner 30 SBL HF40 Remote Driver
3 D-Liner 30 INFORM HF40 + Dali Driver
4 D-Liner 30 INFORM HF40 Remote Driver

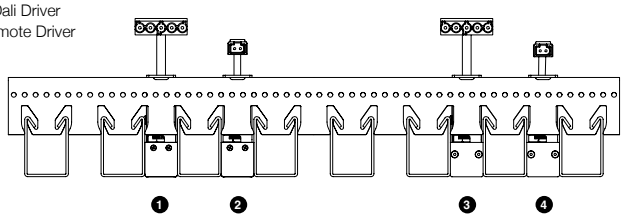


TASK LIGHTING

NEW

D-LINER 19 INFORM





UGR <19	SAPP/30BD		
	L838mm	L1114mm	L1390mm
	EXCL.POWER SUPPLY	EXCL.POWER SUPPLY	EXCL.POWER SUPPLY

LED * 4000K / CRI>80	9,8W / 1768lm (HP) 15,2W / 2596lm	67°	P08	**29129 8420** ◇		
	13,1W / 2357lm (HP) 20,3W / 3461lm		P11		**29130 8420** ◇	
	16,4W / 2946lm (HP) 25,3W / 4326lm		P13			**29131 8420** ◇
LED * 3000K CRI>80	9,8W / 1688lm (HP) 15,2W / 2477lm		P08	**29129 8320** ◇		
	13,1W / 2251lm (HP) 20,3W / 3302lm		P11		**29130 8320** ◇	
	16,4W / 2814lm (HP) 25,3W / 4128lm		P13			**29131 8320** ◇

* Power selection to be set on driver

◇ B ●

INCL.1 x CABLE 2 x 0,75mm² 1m BLACK + WIELAND PLUG 2P (FOR REMOTE DRIVER)
INCL.2 x BUTTERFLY BRACKET SAPP/30BD
IP20


INTERIOR CEILING

MLT - MELANOPIC LIGHT TECHNOLOGY


The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

B

PRESENCE & DAYLIGHT SENSOR
DALI 2 BUS CONNECTION
INCL.1 x CABLE 2 x 0,75mm² 1m
BLACK + WIELAND PLUG 2P



DETECTION PATTERN 84°

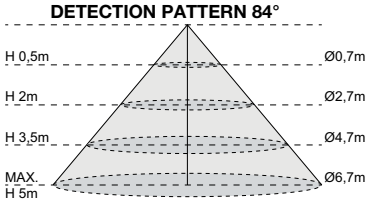

FINISH YOUR SPECIFICATION


				REQUIREMENT / OPTION / ACCESSORY		
				D-LINER 19 INFORM		
				SAPP/30BD		
				L838mm	L1114mm	L1390mm
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR						
DALI DIM	17W	**25510 0375**	200 x 70 x 31	R *		
	25W	**25510 0395**	200 x 70 x 31		R *	
	45W	**25510 0385**	215 x 70 x 31			R *
CONTROL						
D-LINER PRESENCE & DAYLIGHT SENSOR DIM5		**29110 0065 B/W**		O	O	O


* REMOTE INSTALLATION

B

D-LINER

TASK LIGHTING





NEW

D-LINER 30 INFORM

UGR <19

				SAPP					
				L840mm		L1116mm		L1392mm	
				EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
LED * 4000K / CRI>80	9,8W / 1768lm (HP) 15,2W / 2596lm	67° IP20	P08	**29111 8420** ◇	**29114 8425** ◇				
	13,1W / 2357lm (HP) 20,3W / 3461lm		P11			**29112 8420** ◇	**29115 8425** ◇		
	16,4W / 2946lm (HP) 25,3W / 4326lm		P13					**29113 8420** ◇	**29116 8425** ◇
LED * 3000K CRI>80	9,8W / 1688lm (HP) 15,2W / 2477lm		P08	**29111 8320** ◇	**29114 8325** ◇				
	13,1W / 2251lm (HP) 20,3W / 3302lm		P11			**29112 8320** ◇	**29115 8325** ◇		
	16,4W / 2814lm (HP) 25,3W / 4128lm		P13					**29113 8320** ◇	**29116 8325** ◇

* Power selection to be set on driver


◇ B-B ●● / B-MMAT ●● / W-B ○● / W-W ○○


INCL.2 x SUSPENSION BRACKETS SAPP

FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P Ⅲ

FOR DALI: INCL.1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz Ⅰ

A





NEW

D-LINER 30 INFORM

UGR <19

				30BD HUNTER DOUGLAS					
				L840mm		L1116mm		L1392mm	
				EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
LED * 4000K / CRI>80	9,8W / 1768lm (HP) 15,2W / 2596lm	67° IP20	P08	**29117 8420** ◇	**29120 8425** ◇				
	13,1W / 2357lm (HP) 20,3W / 3461lm		P11			**29118 8420** ◇	**29121 8425** ◇		
	16,4W / 2946lm (HP) 25,3W / 4326lm		P13					**29119 8420** ◇	**29122 8425** ◇
LED * 3000K CRI>80	9,8W / 1688lm (HP) 15,2W / 2477lm		P08	**29117 8320** ◇	**29120 8325** ◇				
	13,1W / 2251lm (HP) 20,3W / 3302lm		P11			**29118 8320** ◇	**29121 8325** ◇		
	16,4W / 2814lm (HP) 25,3W / 4128lm		P13					**29119 8320** ◇	**29122 8325** ◇

* Power selection to be set on driver


◇ B-B ●● / B-MMAT ●● / W-B ○● / W-W ○○

INCL.2 x SUSPENSION BRACKETS 30BD


FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm² 1m black + WIELAND PLUG 2P Ⅲ

FOR DALI: INCL.1 x CABLE 5 x 0,75mm² 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz Ⅰ

MLT - MELANOPIC LIGHT TECHNOLOGY



HEARTFELT 40/30



NEW

D-LINER 30 INFORM

UGR <19

HF40 HEARTFELT									
				L840mm		L1116mm		L1392mm	
				EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
LED * 4000K / CRI>80	9,8W / 1768lm (HP) 15,2W / 2596lm	67° IP20	P08	**29123 8420** ◇	**29126 8425** ◇				
	13,1W / 2357lm (HP) 20,3W / 3461lm		P11			**29124 8420** ◇	**29127 8425** ◇		
	16,4W / 2946lm (HP) 25,3W / 4326lm		P13					**29125 8420** ◇	**29128 8425** ◇
LED * 3000K CRI>80	9,8W / 1688lm (HP) 15,2W / 2477lm		P08	**29123 8320** ◇	**29126 8325** ◇				
	13,1W / 2251lm (HP) 20,3W / 3302lm		P11			**29124 8320** ◇	**29127 8325** ◇		
	16,4W / 2814lm (HP) 25,3W / 4128lm		P13					**29125 8320** ◇	**29128 8325** ◇

* Power selection to be set on driver

◇ B-B ●● / B-MMAT ●● / W-B ○● / W-W ○○


INCL.2 x SUSPENSION BRACKETS HF40

FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm2 1m black + WIELAND PLUG 2P


FOR DALI: INCL.1 x CABLE 5 x 0,75mm2 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz

B

PRESENCE & DAYLIGHT SENSOR
DALI 2 BUS CONNECTION
INCL.1 x CABLE 2 x 0,75mm² 1m
BLACK + WIELAND PLUG 2P



DETECTION PATTERN 84°

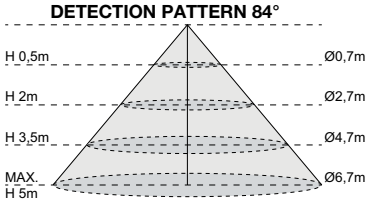

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY												
				D-LINER 30 INFORM								
				SAPP			30BD			HF40		
				L840mm	L1116mm	L1392mm	L840mm	L1116mm	L1392mm	L840mm	L1116mm	L1392mm
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR												
DALI DIM	17W	**25510 0375** *	200 x 70 x 31	R *			R *			R *		
	25W	**25510 0395** *	200 x 70 x 31		R *			R *			R *	
	45W	**25510 0385** *	215 x 70 x 31			R *			R *			R *
CONTROL												
D-LINER PRESENCE & DAYLIGHT SENSOR DIM5		**29110 0065 B/W**		O	O	O	O	O	O			


* REMOTE INSTALLATION

D-LINER


GENERAL LIGHTING

NEW

D-LINER 30 SBL



SAPP 30/20



				SAPP					
				L838mm		L1114mm		L1390mm	
				EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
4000K / CRI>90	LED 27,3W / 3549lm	IP20	P08	**29211 9400** ◇	**29214 9405** ◇				
	LED 36,4W / 4732lm		P11			**29212 9400** ◇	**29215 9405** ◇		
	LED 45,5W / 5915lm		P13					**29213 9400** ◇	**29216 9405** ◇
3000K CRI>90	LED 27,3W / 3413lm		P08	**29211 9300** ◇	**29214 9305** ◇				
	LED 36,4W / 4550lm		P11			**29212 9300** ◇	**29215 9305** ◇		
	LED 45,5W / 5688lm		P13					**29213 9300** ◇	**29216 9305** ◇


◇ B ● / W ○

INCL.2 x SUSPENSION BRACKETS SAPP
FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm2 1m black + WIELAND PLUG 2P
FOR DALI: INCL.1 x CABLE 5 x 0,75mm2 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz


A

NEW

D-LINER 30 SBL




BD 30/20




				30BD HUNTER DOUGLAS					
				L838mm		L1114mm		L1390mm	
				EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
4000K / CRI>90	LED 27,3W / 3549lm	IP20	P08	**29217 9400** ◇	**29220 9405** ◇				
	LED 36,4W / 4732lm		P11			**29218 9400** ◇	**29221 9405** ◇		
	LED 45,5W / 5915lm		P13					**29219 9400** ◇	**29222 9405** ◇
3000K CRI>90	LED 27,3W / 3413lm		P08	**29217 9300** ◇	**29220 9305** ◇				
	LED 36,4W / 4550lm		P11			**29218 9300** ◇	**29221 9305** ◇		
	LED 45,5W / 5688lm		P13					**29219 9300** ◇	**29222 9305** ◇

◇ B ● / W ○

INCL.2 x SUSPENSION BRACKETS 30BD
FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm2 1m black + WIELAND PLUG 2P
FOR DALI: INCL.1 x CABLE 5 x 0,75mm2 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz



HEARTFELT 40/30



NEW

D-LINER 30 SBL


				HF40 HEARTFELT					
				L838mm		L1114mm		L1390mm	
				EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI	EXCL.POWER SUPPLY	DALI
4000K / CRI>90	LED 27,3W / 3549lm	IP20	P08	**29223 9400** ◇	**29226 9405** ◇				
	LED 36,4W / 4732lm		P11			**29224 9400** ◇	**29227 9405** ◇		
	LED 45,5W / 5915lm		P13					**29225 9400** ◇	**29228 9405** ◇
3000K CRI>90	LED 27,3W / 3413lm		P08	**29223 9300** ◇	**29226 9305** ◇				
	LED 36,4W / 4550lm		P11			**29224 9300** ◇	**29227 9305** ◇		
	LED 45,5W / 5688lm		P13					**29225 9300** ◇	**29228 9305** ◇

◇ B ● / W ○


INCL.2 x SUSPENSION BRACKETS HF40
FOR REMOTE DRIVER: INCL.1 x CABLE 2 x 0,75mm2 1m black + WIELAND PLUG 2P
FOR DALI: INCL.1 x CABLE 5 x 0,75mm2 1m black + WIELAND PLUG 5P • 220-240V / 0|50-60Hz

B

PRESENCE & DAYLIGHT SENSOR
DALI 2 BUS CONNECTION
INCL.1 x CABLE 2 x 0,75mm² 1m
BLACK + WIELAND PLUG 2P



DETECTION PATTERN 84°

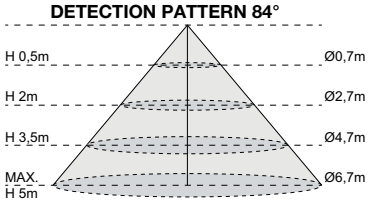


FINISH YOUR SPECIFICATION

				REQUIREMENT / OPTION / ACCESSORY								
				D-LINER 30 SBL								
				SAPP			30BD			HF40		
				L838mm	L1114mm	L1390mm	L838mm	L1114mm	L1390mm	L838mm	L1114mm	L1390mm
LED POWER SUPPLY MORE INFO TECHNICAL CHAPTERR												
DALI DIM	50W	**25510 0075**	360 x 30 x 21	R *	R *		R *	R *		R *	R *	
	75W	**25510 0085**	360 x 30 x 21			R *			R *			R *
CONTROL												
D-LINER PRESENCE & DAYLIGHT SENSOR DIM5		**29110 0065 B/W**		O	O	O	O	O	O			

* REMOTE INSTALLATION


D-LINER


ACCENT LIGHTING

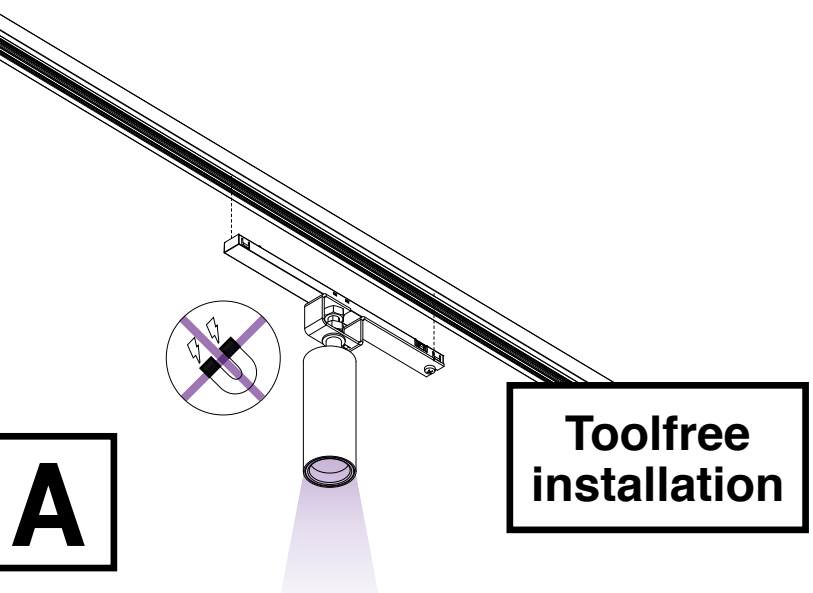

Toolfree installation

A

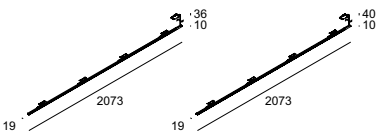





NEW

D-LINER 19 SL	SAPP	30BD
	L2000mm	L2000mm
IP20	**29110 0010** ◇	**29110 0030** ◇
	◇ B ●	
	INCL.4 x SUSPENSION BRACKET SAPP	INCL.4 x SUSPENSION BRACKET 30BD
	INCL.1 x CABLE 5 x 0,75mm2 1m black + WIELAND PLUG 4P MAX. DISTANCE BETWEEN BRACKETS 60CM	

NEW

UHO





0-90° 355°


0-90° 355°


				UHO		UHO L	
				MDL	DALI	MDL	DALI
3000K CRI>90	LED 2.3W / 260lm / 48V-DC	IP20	30°	**27311 9320** ◇	**27312 9325** ◇	**27319 9320** ◇	**27320 9325** ◇
2700K CRI>90	LED 2.3W / 245lm / 48V-DC	IP20	30°	**27311 9220** ◇	**27312 9225** ◇	**27319 9220** ◇	**27320 9225** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○

NEW

SPY 27





0-85° 355°


0-85° 355°


				SPY 27		SPY 27 L	
				MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	**27313 9320** ◇	**27314 9325** ◇	**27321 9320** ◇	**27322 9325** ◇
2700K CRI>90	LED 5.8W / 753lm / 48V-DC	IP20	30°	**27313 9220** ◇	**27314 9225** ◇	**27321 9220** ◇	**27322 9225** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○

NEW

SPY 39





0-85° 355°

0-85° 355°

				SPY 39		SPY 39 L	
				MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	**27315 9320** ◇	**27316 9325** ◇	**27323 9320** ◇	**27324 9325** ◇
			40°	**27315 9330** ◇	**27316 9335** ◇	**27323 9330** ◇	**27324 9335** ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC	IP20	20°	**27315 9220** ◇	**27316 9225** ◇	**27323 9220** ◇	**27324 9225** ◇
			40°	**27315 9230** ◇	**27316 9235** ◇	**27323 9230** ◇	**27324 9235** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○

FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY							
			UHO		SPY 27		SPY 39		SPY 39 L	
			MDL	DALI DIM	MDL	DALI DIM	MDL	DALI DIM	MDL	DALI DIM
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R	R *	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER										
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R		R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R		R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R		R	
FINISH										
SPY 39 TUBE	**24144 0010 B / FBR / FG / GC / W**						R	R		
SPY 39 L TUBE	**24144 0020 B / FBR / FG / GC / W**								R	R
VISOR 27	**216 12 01**				A	A				
VISOR 39	**216 12 02**						A	A		


* REMOTE INSTALLATION

CONFORM


NLT - NATURAL LIGHT TECHNOLOGY

Conform uses Delta Light's Natural Light Technology (NLT),state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity.

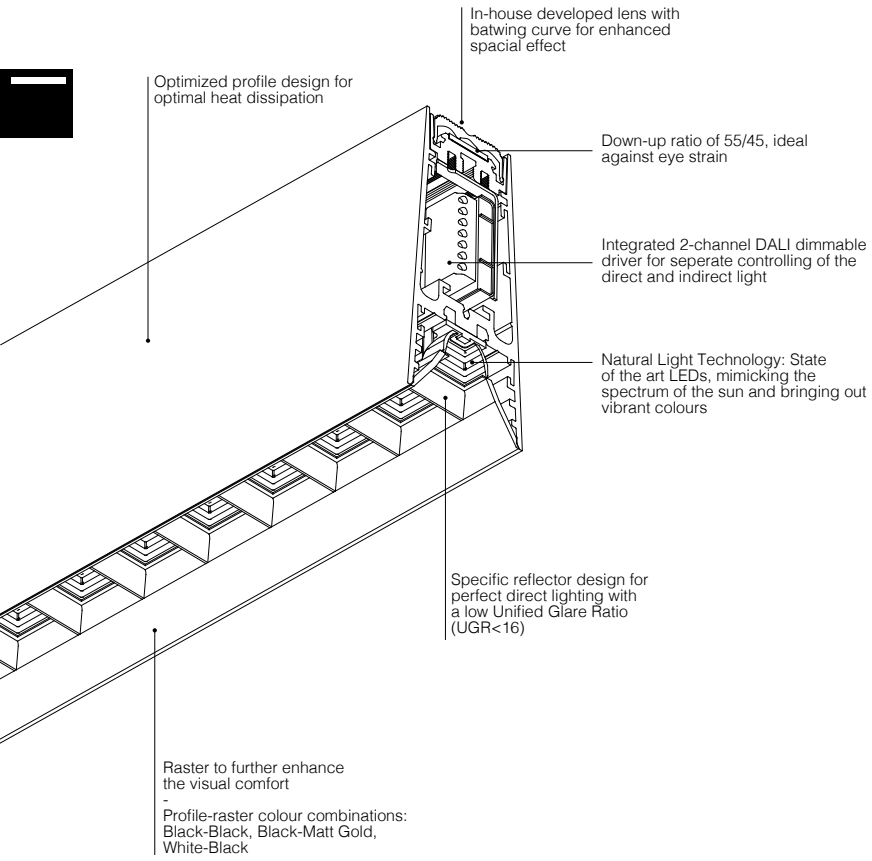




DALI DSI



PDS

CONFORM			UGR <16	DOWN-UP			DOWN-UP PDS		
				L1488mm	L2040mm	L2868mm	L1488mm	L2040mm	L2868mm
4000K / CRI>95	LED UP 16,8W / 2078lm DOWN 22W / 2694lm	DALI	67° DOWN	**26511 7424** ◇			**26514 7420** ◇		
	LED UP 23,1W / 2812lm DOWN 30,5W / 3746lm				**26512 7424** ◇			**26515 7420** ◇	
	LED UP 33,7W / 4157lm DOWN 43,9W / 5388lm					**26513 7424** ◇			**26516 7420** ◇
3000K / CRI>95	LED UP 16,8W / 1978lm DOWN 22W / 2568lm			**26511 7324** ◇			**26514 7320** ◇		
	LED UP 23,1W / 2842lm DOWN 30,5W / 3570lm				**26512 7324** ◇			**26515 7320** ◇	
	LED UP 33,7W / 3955lm DOWN 43,9W / 5136lm					**26513 7324** ◇			**26516 7320** ◇
				◇ B-B ● ● / B-MMAT ● ● / W-B ○ ●					
				220-240V / 0|50-60Hz					
				2 DALI CONTROL CHANNELS 2 x CABLE SUSPENSION SINGLE AUTO. 1,6m 1 x CABLE 5 x 0.75mm²			INCL. PRESENCE & DAYLIGHT SENSOR 2 x CABLE SUSPENSION SINGLE AUTO. 1,6m 1 x CABLE 3 x 0.75mm²		
				IP20			IP20		


A

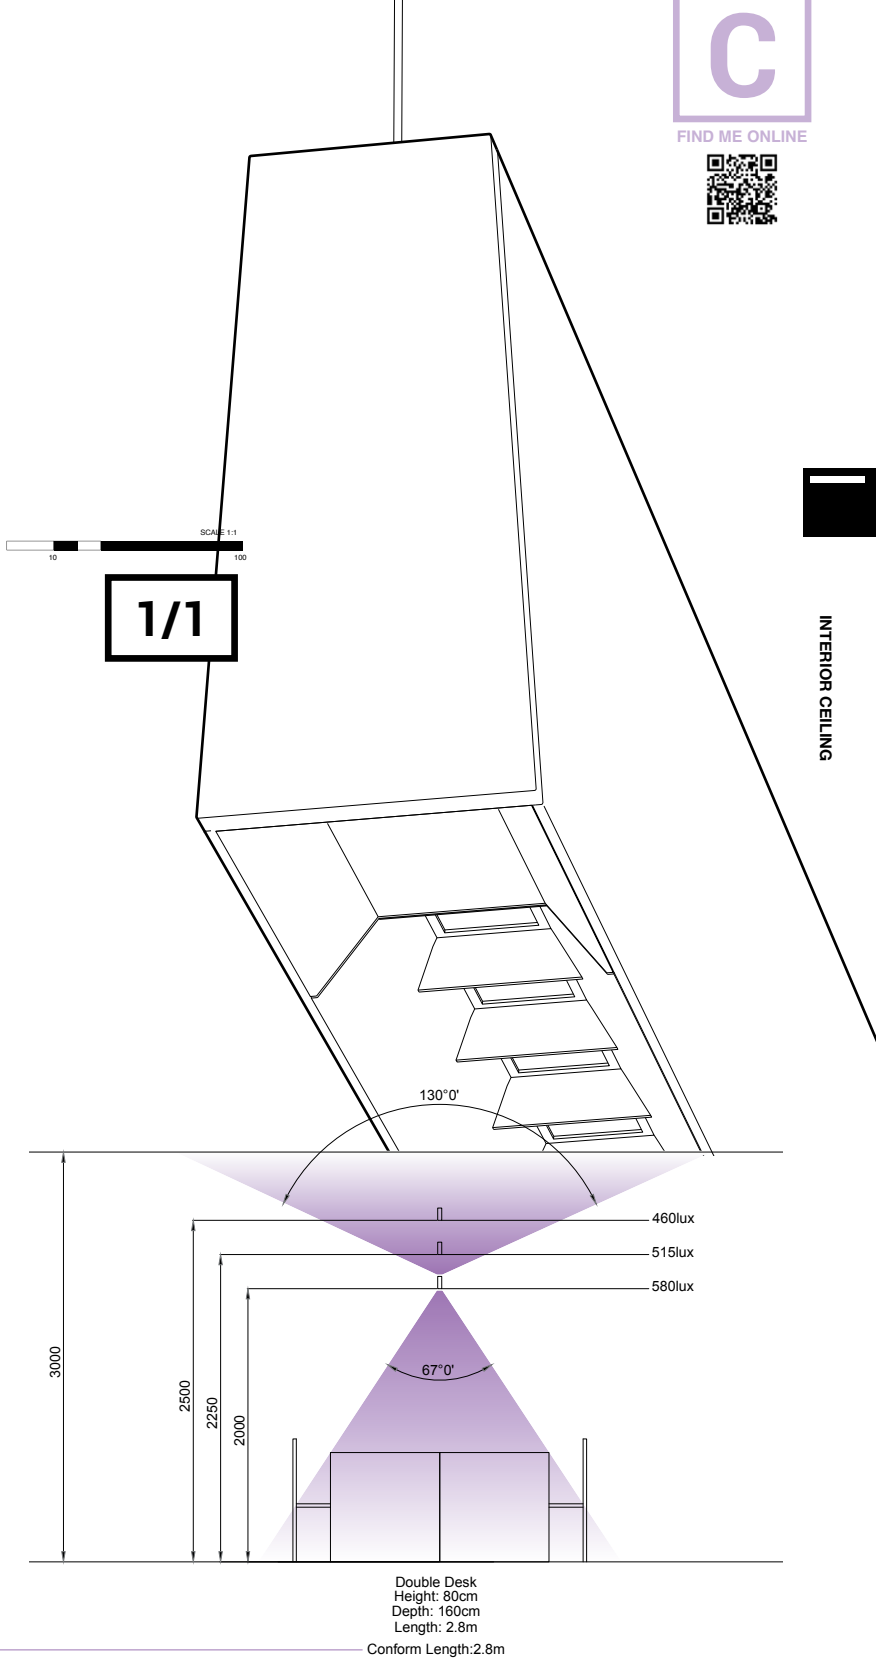

Design by **DEAN SKIRA** & Delta Light

Its elegant design with multiple colour combinations, its specific sun-mimicking spectrum, its low UGR, its well balanced down-up ratio…we do not exaggerate: Conform is the goddess of office lighting!
Conform is designed around the light. It not only perfectly embraces the light source, it reinforces it in multiple aspects. Conform uses Delta Light's Natural Light Technology (NLT),state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity.
As so, the LEDs used in Conform help control the human circadian rhythm.
To further stimulate the human well-being, Conform uses a down-up ratio of 55% to 45%, as a combination of direct and indirect light is recommended against eye strain. Every downwards facing LED is perfectly embraced by specially designed reflectors, resulting in a beam angle of 67° that enlightens the task area but has no direct impact on the eye.
Additionally, the uplight is being spread over the room to enhance the spacial effect and to create a uniform lighting scheme, thanks to the inhouse designed lens extrusion to create a wide batwing beam angle without an intense peak in the centre.

deltalight.com/conform

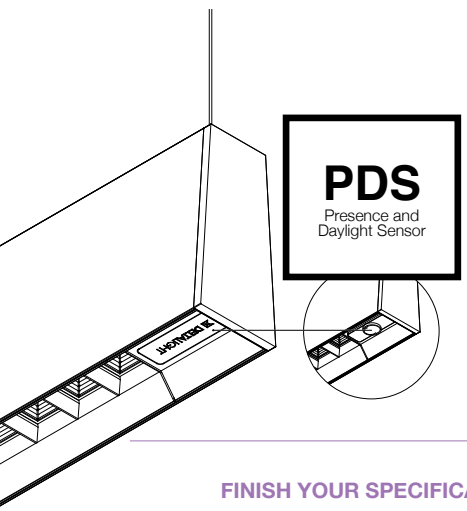

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY	
		CONFORM	
		DOWN-UP	DOWN-UP PDS
INSTALLATION			
CONNECTION ST	**15225 0360 B / W**	O	O
SUSPENSION ST	**15225 0340 B / W**	O	O
CABLE BASE S	**203 99 56 ANO / B / W**	O	O
PDS REMOTE CONTROL	**26510 0010**		R
or PDS SENSOR PROGRAMMER	**26510 0020**		R


B


ONE-AND-ONLY

A peculiar profile, both functional as decorative. The design of the body allows you to have up to 5 lines of light out of 1 profile, 3 for direct and 2 for indirect lighting. The soft glow of the light along the sides of the profile makes the One-And-Only float through the air, a powerful blend of light for an eye-catching look.

deltalight.com/oneandonly

A






ONE-AND-ONLY			P12	P20
3000K CRI>90	LED UP 23,1W / 2310lm LED DOWN 34,6W /3465lm	NON DIM	**404 12 93** ◇	
		1-10V	**404 12 93 ED1** ◇	
	LED UP 37,4W / 3740lm LED DOWN 56,1W / 5610lm	NON DIM		**404 20 93** ◇
		1-10V		**404 20 93 ED1** ◇
		DALI		**404 20 93 ED5** ◇
			◇ B-B ●● / GC-B ●● / W-W ○○	
			220-240V / 50-60Hz	
			2 x CABLE SUSP. SINGLE AUTO. 1,6m 1 x CABLE 3 x 0,75mm² (NON DIM) 1 x CABLE 5 x 0,75mm² (ED)	
			IP20	

A GLIMPSE OF ME
ON PAGE 34

C

FIND ME ONLINE

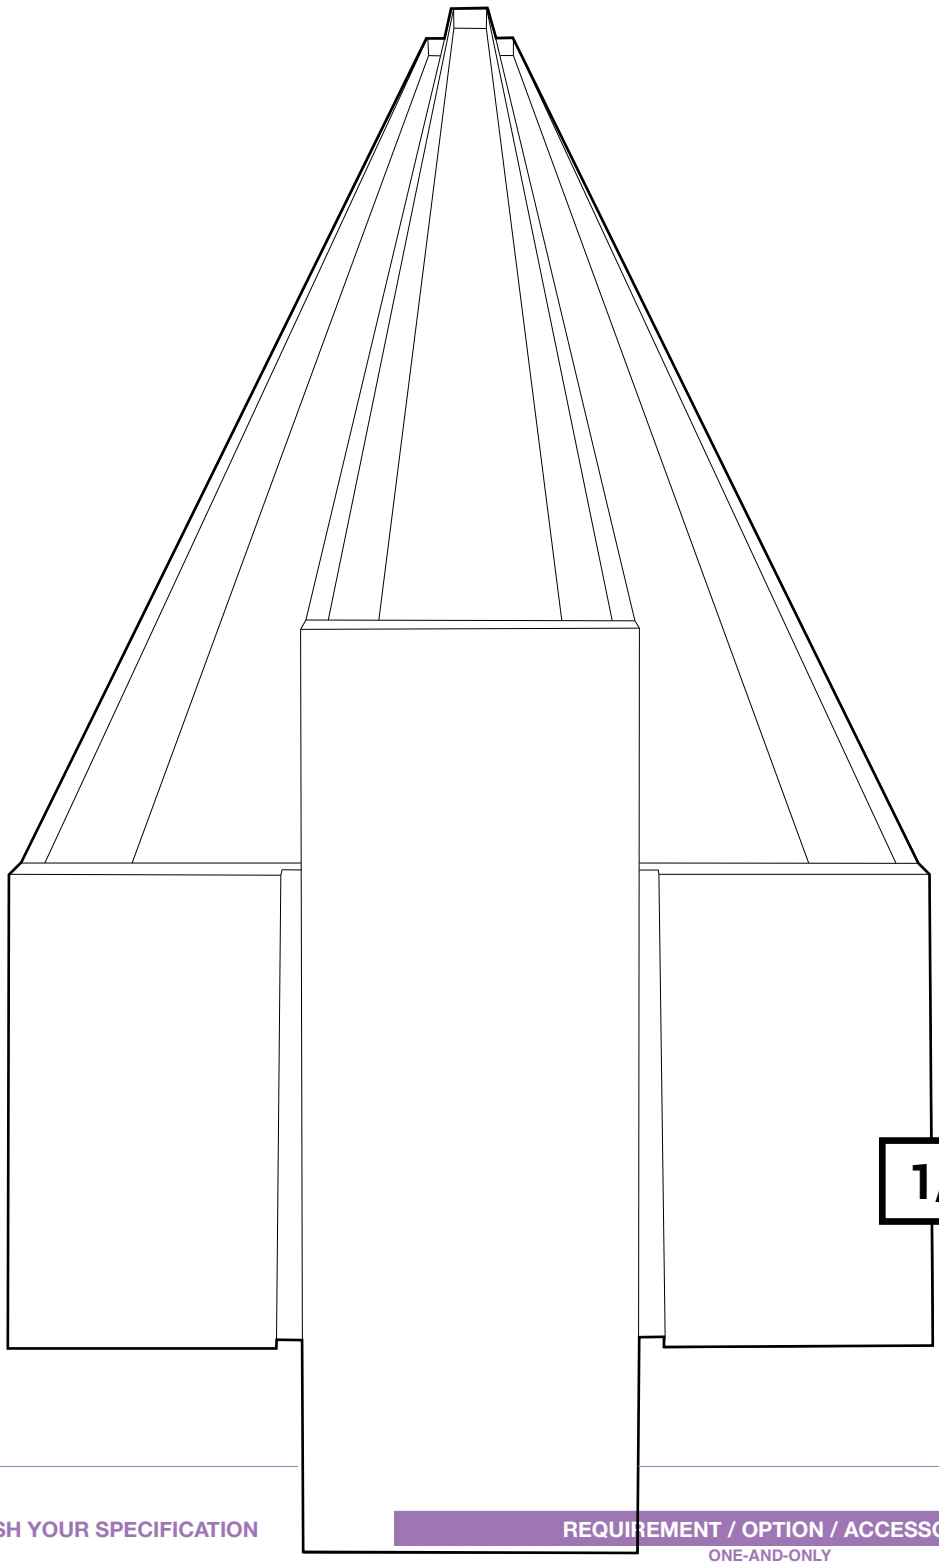

B

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY ONE-AND-ONLY	
		P12	P20
INSTALLATION			
CONNECTION ST	**15225 0360 B / W**	O	O
SUSPENSION ST	**15225 0340 B / W**	O	O
CABLE BASE S	**203 99 56 ANO / B / W**	O	O


GIBBO

Gibbo is a decorative pendant with a base positioned under a predefined angle, as such the globe appears to be rolling away. The glass is handblown and is available in transparent, opal or amber shades. The golden brown colour gives the Gibbo a warm presence, which makes it attractive in compositions above tables and in interiors with warm accents and materials. The base of Gibbo is available in black or white.

deltalight.com/gibbo



GIBBO			GIBBO
3000K CRI>90	LED 7.1W / 812lm / 350mA	MAINS	**286 67 811 930 ED8** ◇
2700K CRI>90	LED 7.1W / 779lm / 350mA		**286 67 811 920 ED8** ◇
			◇ B ● / W ◯
			220-240V / 0 | 50-60Hz
			EXCL.GLASS INCL.1 x CABLE 2 x 0.75mm² INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m IP20

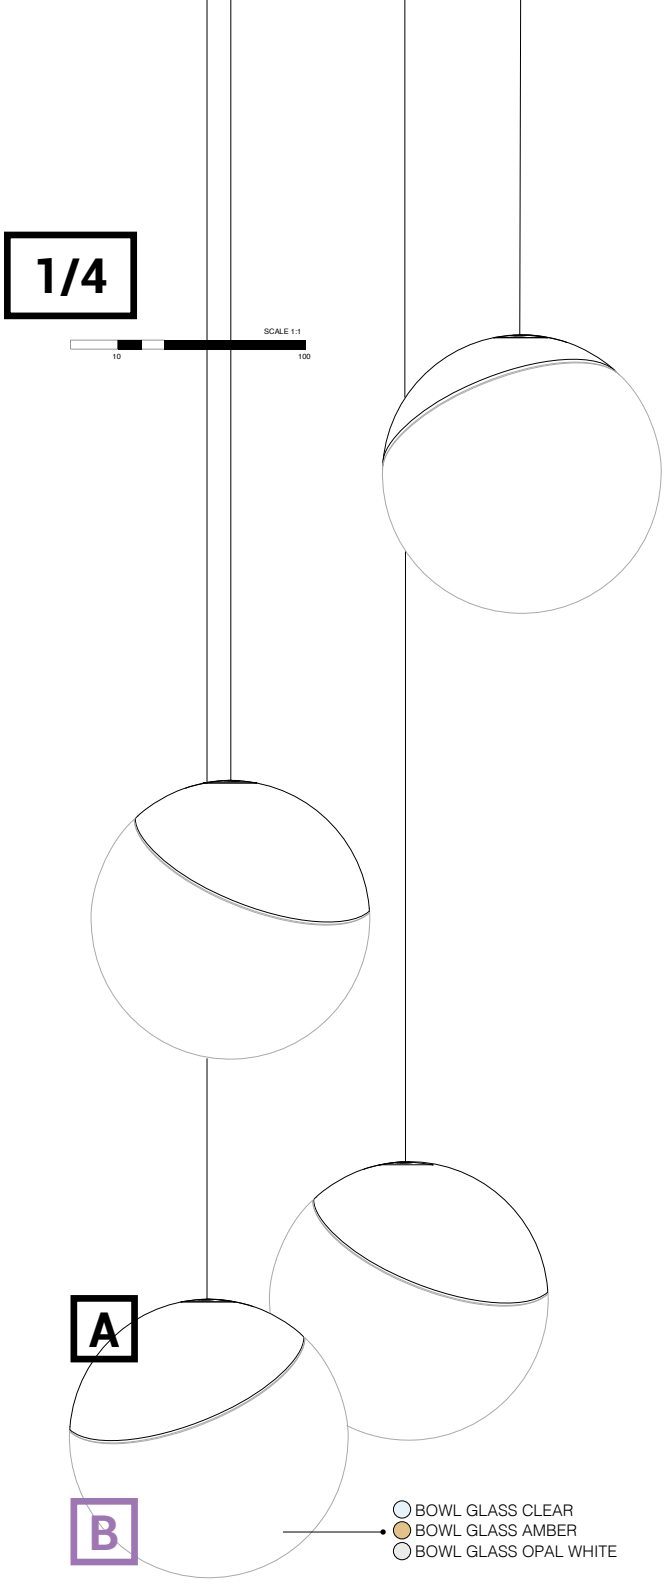

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY
			GIBBO
FINISH			
BOWL GLASS CLEAR	**286 67 01**		R
or BOWL GLASS AMBER	**286 67 02**		R
or BOWL GLASS OPAL WHITE	**286 67 03**		R


STILL


Design by **NATHALIE DEWEZ** & **Delta Light**


The work of Nathalie Dewez extends from small objects to monumental installations, from unique pieces to industrial products. Her presence at numerous international shows and exhibitions has led to collaborations with a number of architecture practices as well as international producers such as Hermès (FR), Habitat (UK), Ligne Roset (FR), De Castelli (IT) & Vervloet (BE).

Nathalie is a designer whose main medium is light and whose materials vary between metal, glass and other long-lasting medium, whether designing light fixtures, objects, furnishings or large-scale sculptures.
Her designs reveal the passion for sculptural shapes and superior craftsmanship. Some of her iconic pieces have been awarded several times. In 2011 she received the 'Design Pierre Bergé Foundation' award and the same year she was nominated Belgian Designer of the Year.

deltalight.com/still

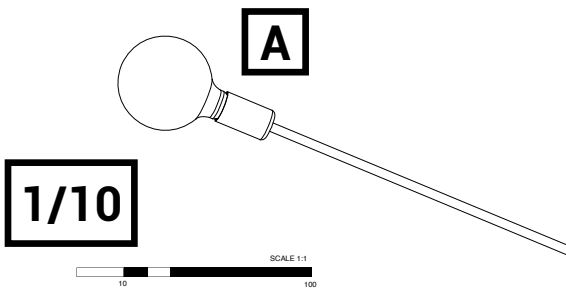


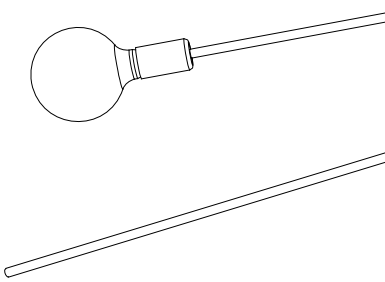



A

STILL	STILL
1 x A60 max.60W	**25611 0000** ◇
	◇ BBR / BL / RW
	E27 / 100-240V / 50-60Hz
	INCL. 1 x CABLE SUSPENSION SINGLE AUTOM. 1.6m INCL. 1 x CABLE 3 x 0.75mm²
	IP20

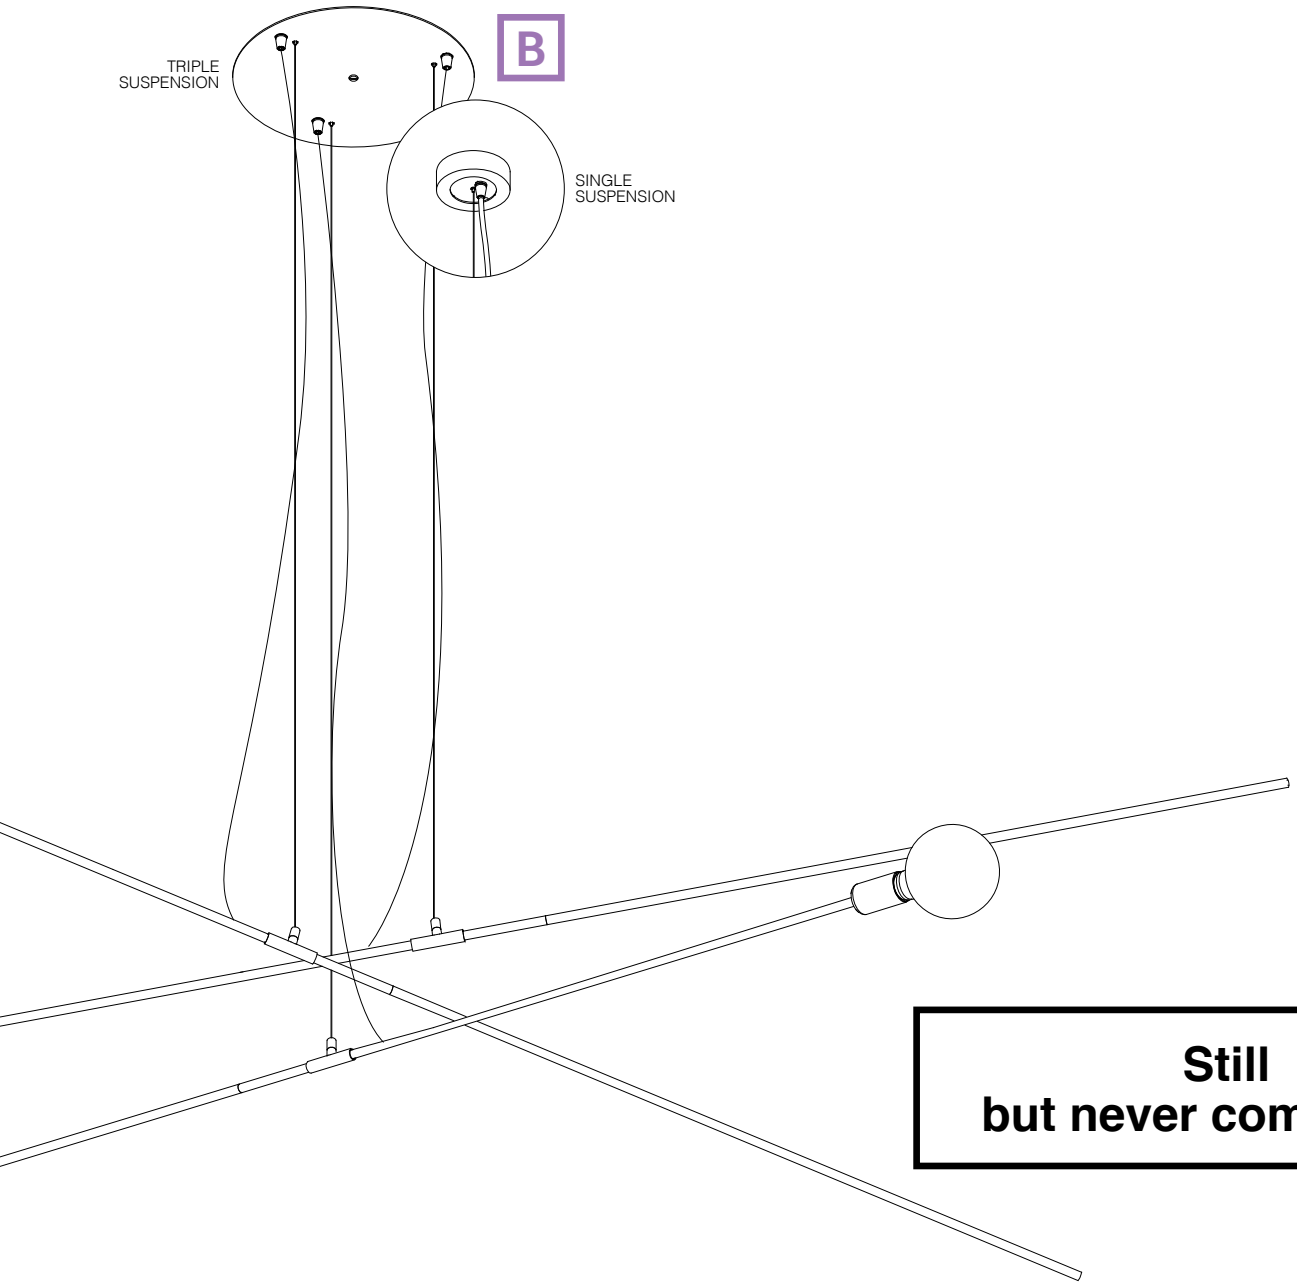

Still
but never completely.

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY
			STILL
INSTALLATION			
CEILING BASE 1RC	**23943 0030 B / W**		R
or CEILING BASE 3RC	**25610 0020 B / W**		R
LED LAMP MORE INFO TECHNICAL CHAPTERR			O

B


MILES


Miles is pure eye-candy.
A collection of 4 purely handcrafted glass shapes, each in 4 different colours (pink, amber, smoke or mist), each recognizable yet unique in all respects.
A family of suspensions that play on the visual contrast between the coloured and white blown glass, combined with different shapes and colours, also ideal for multiple compositions.


All shapes and finishes are inspired by the interplay of opacity, translucency and transparency.
Its translucent or milky forms and dynamic light offer a countless number of scenarios.


When switched off its transparency makes MILES almost disappear. When switched on they provide a cozy and stylish luminous presence, stimulating senses and perceptions.

deltalight.com/miles












MILES LED				C1	C2	C3	C4
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	50°	PINK	**23926 9230**	**23930 9230**	**23934 9230**	**23938 9230**
			SMOKE	**23927 9230**	**23931 9230**	**23935 9230**	**23939 9230**
			MIST	**23928 9230**	**23932 9230**	**23936 9230**	**23940 9230**
			AMBER	**23929 9230**	**23933 9230**	**23937 9230**	**23941 9230**


INCL.1 x CABLE 2 x 0.75mm² 1,6m
INCL.1 x CABLE CLAMP BLACK

III IP20










MILES E27			C1	C2	C3	C4
1 x A60 max.20W		PINK	**23910 0000** ◇	**23914 0000** ◇	**23918 0000** ◇	
		SMOKE	**23911 0000** ◇	**23915 0000** ◇	**23919 0000** ◇	
		MIST	**23912 0000** ◇	**23916 0000** ◇	**23920 0000** ◇	
		AMBER	**23913 0000** ◇	**23917 0000** ◇	**23921 0000** ◇	
1 x T30-LED		PINK				**23922 0000** ◇
		SMOKE				**23923 0000** ◇
		MIST				**23924 0000** ◇
		AMBER				**23925 0000** ◇


INCL.1 x CABLE 2 x 0.75mm² 1,6m
INCL.1 x CABLE CLAMP BLACK


III IP20

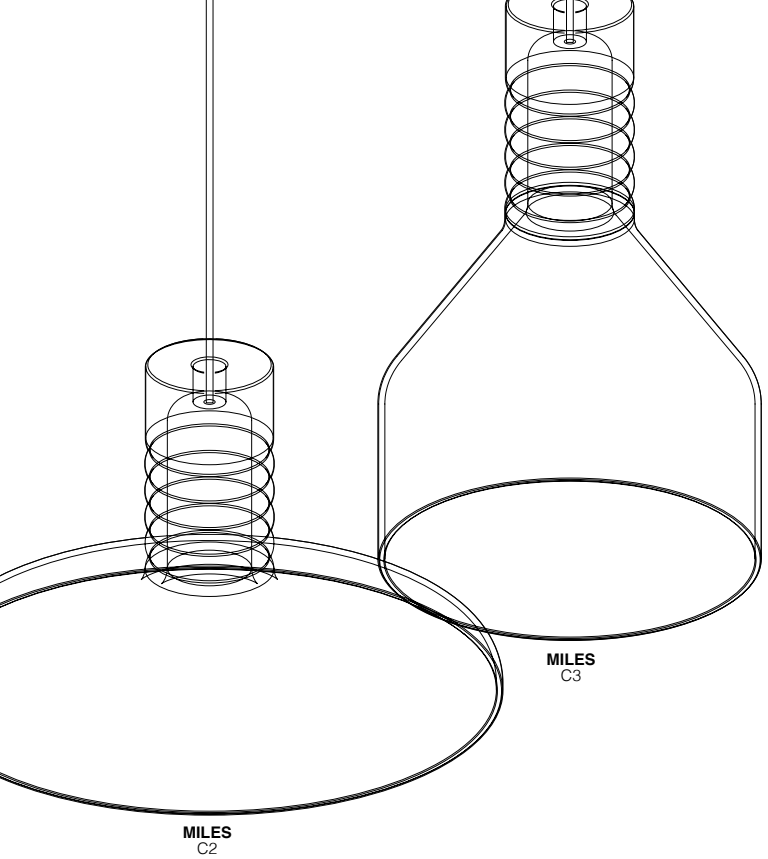


MILES
C3

MILES
C2

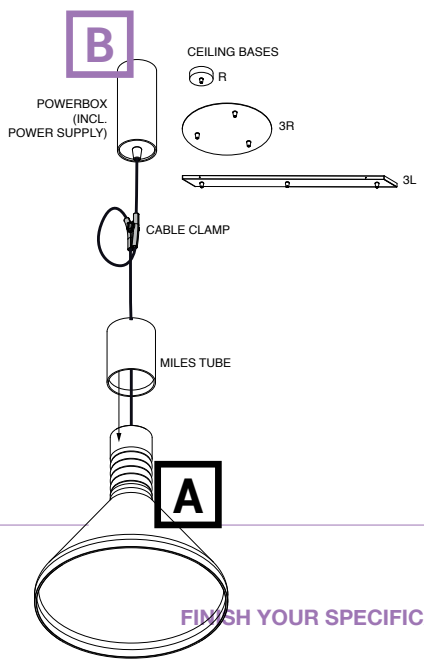

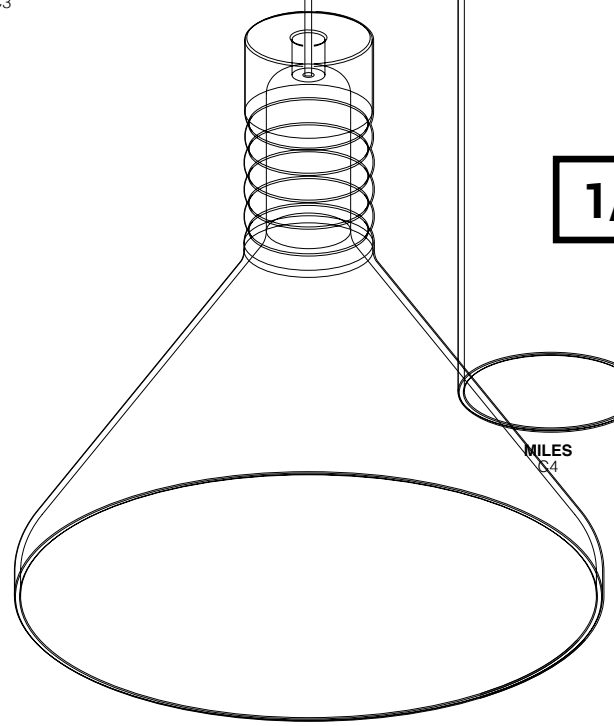


MILES
C1

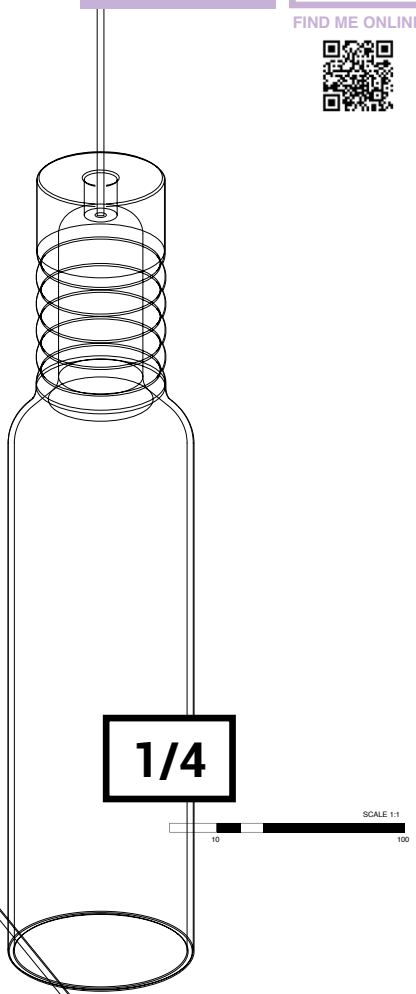

MILES
C4

1/4

SCALE 1:1
10 100



FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY MILES							
			C1	C2	C3	C4	C1 E27	C2 E27	C3 E27	C4 E27
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
MAINS DIM (FE) 11	21012 0298	min. 55	R	R	R	R				
1-10V DIM 15	300 90 124	min. 55	R	R	R	R				
DALI DIM 14	300 90 125	min. 55	R	R	R	R				
or POWERBOX										
MAINS DIM (FE)	23942 0018 B	Ø60 x 167	R	R	R	R				
FINISH										
MILES TUBE	23944 0010 B / M		A	A	A	A	A	A	A	A
INSTALLATION										
CEILING BASE R	23943 0010 B		R *	R *	R *	R *				
or CEILING BASE 3R	23945 0020 B		R *	R *	R *	R *	O	O	O	O
or CEILING BASE 3L	23945 0010 B		R *	R *	R *	R *	O	O	O	O
LED LAMP MORE INFO TECHNICAL CHAPTER							O	O	O	O

* REQUIRED IN COMBINATION WITH POWER SUPPLY


B


MANTELLO


With its timeless and inviting look the Mantello Pendant is well-suited for both home decor and professional environments. Hang a few Mantello pendants in the kitchen, place the smallest one each side of the bed, or create a playful configuration above the reception counter and start enjoying the right lighting atmosphere.

Starting from a circle, the bell-shaped design of the Mantello was inspired by both 80's Memphis shapes and early industrial characteristics. A modern interpretation of recognizable and traditional forms, available in two sizes and two diameters.

deltalight.com/mantello

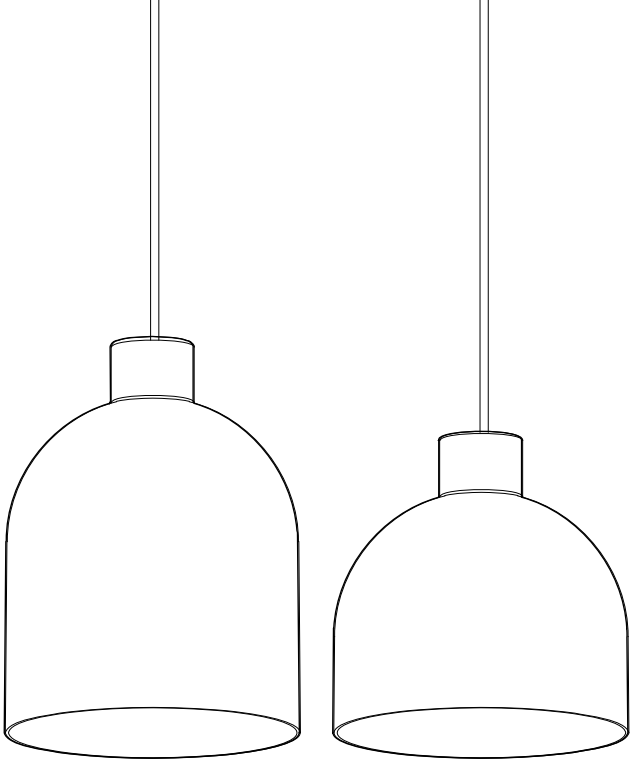








MANTELLO GLASS E27		L1523	L2231
1 x A60 max.20W	SMOKE	**25818 0000** ◇	**25822 0000** ◇
	AMBER	**25817 0000** ◇	**25821 0000** ◇


E27 / 100-240V / 50-60Hz
INCL.1 x CABLE 2 x 0.75mm² 1,6m
INCL.1 x CABLE CLAMP BLACK
IP20

A












MANTELLO ALU E27	L1520	L1515	L2028	L2020
1 x A60 max.20W	**25811 0000** ◇	**25813 0000** ◇	**25814 0000** ◇	**25816 0000** ◇

◇ BBR / RW
E27 / 100-240V / 50-60Hz
INCL.1 x CABLE 2 x 0.75mm² 1,6m
INCL. 1 x CABLE SUSPENSION SINGLE AUTOM. 1.6m
IP20

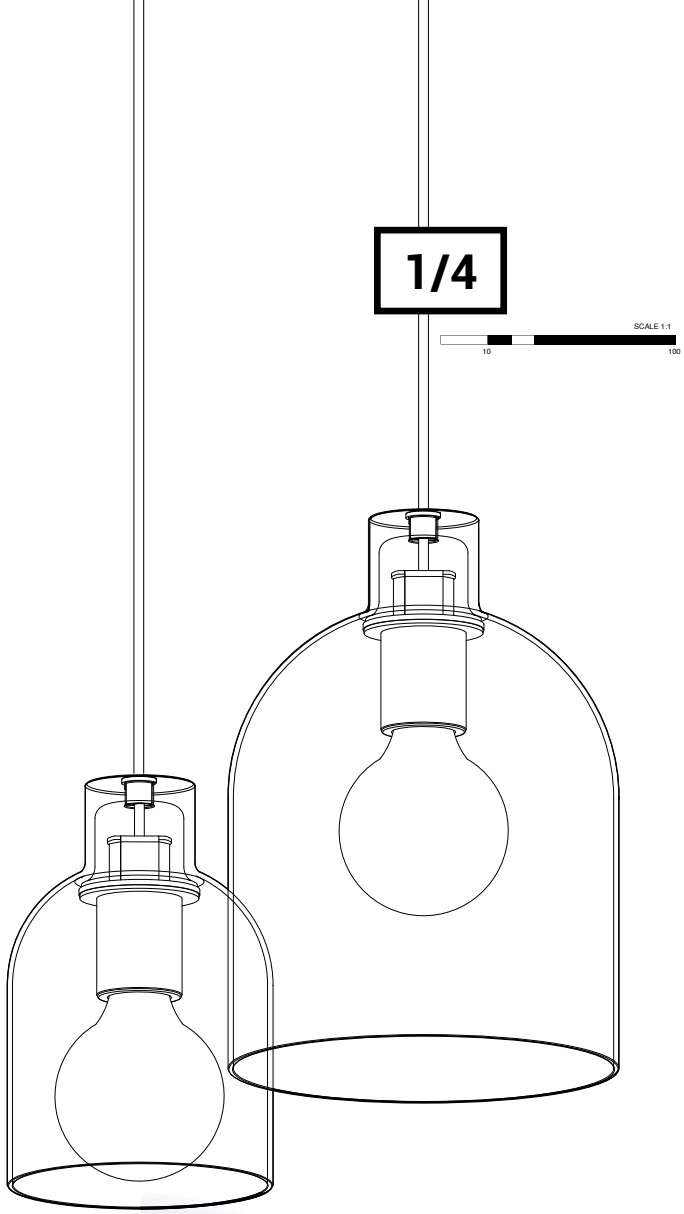

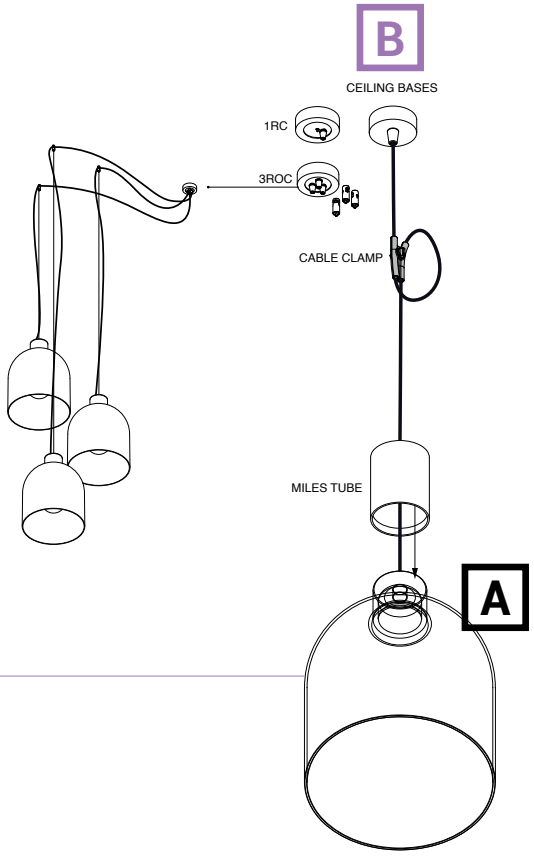



ALU VS GLASS

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY					
		MANTELLO E27 GLASS		MANTELLO E27			
		L1523	L2231	L1520	L1515	L2028	L2020
FINISH							
MILES TUBE	**23944 0010 B / M**	O	O				
INSTALLATION							
CEILING BASE	**23943 0010 B**	R	R				
or CEILING BASE 1RC	**23943 0030 B**			R	R	R	R
or CEILING BASE 3ROC	**23943 0020 B / W**	R	R	R	R	R	R
or CONNECTION TRIMLESS	**328 10 03**	O	O				
LED LAMP MORE INFO TECHNICAL CHAPTERR		O	O	O	O	O	O

Derived from the lampshade as an archetype, the 4 shades evolve from a dome shape into a flat disk.

CUPPA


The Cuppa family has been designed as a welcome add-on for our magnetic profile range, extending the possibilities within this collection with decorative pendants. As a basis, Cuppa offers 4 attractive shades to be used as an ornament on a suspended LED module. But in total the possibilities with Cuppa are endless, as multiple shades can be added onto 1 single module, giving the user complete flexibility of designing the product he or she envisioned.
Derived from the lampshade as an archetype, the 4 shades evolve from a dome shape into a flat disk, all of them purified up to the final details. Details like diverging radiuses, altering heights and aligned colour finishes all contribute to the consistency of Cuppa as a decorative family.
Play with lines and contours, as all shades perfectly fit onto the LED module. Combine multiple shades into an attractive object of light or go for single shades to create a calming mood.

deltalight.com/cuppa

A

NEW

CUPPA C




				CUPPA C
3000K CRI>90	LED 8.6W / 1089lm / 500mA	IP20	40°	**28815 9330** ◇
2700K CRI>90	LED 8.6W / 1041lm / 500mA			**28815 9230** ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA			**28816 9030** ◇

◇ B-GC / W-GC

EXCL.CUPPA SHADE
INCL.1 x CABLE 2 x 0.75mm² 1,6m


C

FIND ME ONLINE

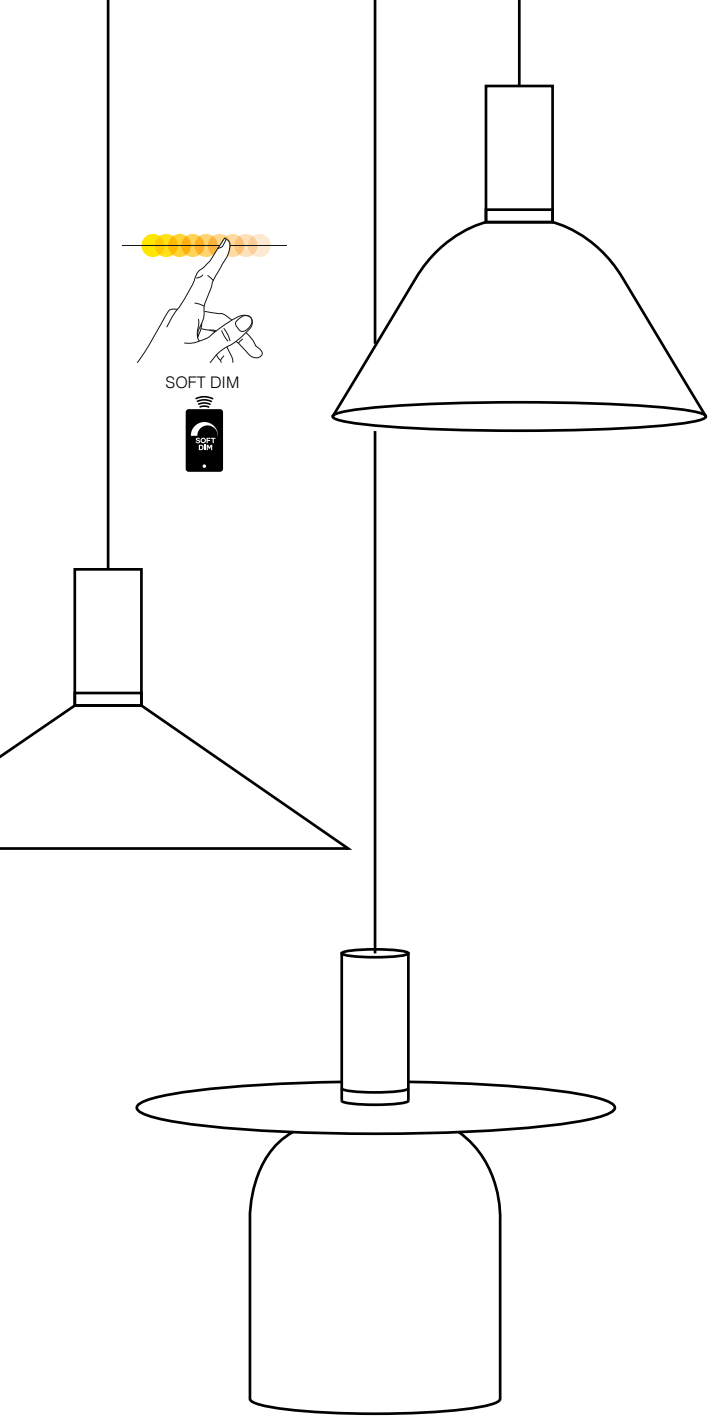

READ MY COLOUR

◇B ● / GC ● / W ○

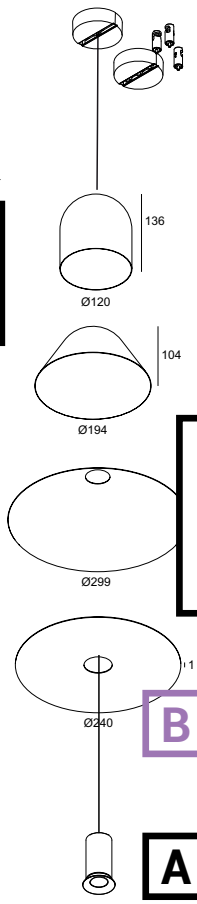

CHOOSE YOUR SHADE(S)

◇B ● / W ○

FINISH YOUR SPECIFICATION

				REQUIREMENT / OPTION / ACCESSORY
				CUPPA C
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
MAINS DIM (FE) 11		**21012 0298**	min. 55	R *
1-10V DIM 15		**300 90 124**	min. 55	R *
DALI DIM 14		**300 90 125**	min. 55	R *
or POWERBOX				
or POWERBOX H15	NON DIM	**28814 0080 B**		R
	DALI DIM	**28814 0075 B**		R
INSTALLATION				
CEILING BASE		**23943 0010 B**		O
CEILING BASE MULTI 1		**28700 0040 B / W**		O
CEILING BASE MULTI 3		**28700 0070 B / W**		O
FINISH				
CUPPA SHADE 120		**28800 0010 B / GC / W**		O
or CUPPA SHADE 190		**28800 0020 B / GC / W**		O
or CUPPA SHADE 300		**28800 0030 B / GC/ W**		O
or CUPPA DISK		**28800 0040 B / W**		R


* REMOTE INSTALLATION


B

SOIREE

The Soiree range was designed to be voluminous, lightweight and transparent. Its sophisticated form creates a dense and decorative effect, filled with a warm light. The interaction between the pure circular and rectangular forms, with the warm light sources and the symmetric configurations, triggers a dynamic tension. Soiree takes its inspiration from many angles. From the play of light and shadow in architecture, to natural light effects, the shape of everyday objects and sculptural art. The result is a nest of light, made of circles or rectangles, both structural and decorative, generating a seductive luminous effect. Even when not turned on, they bring texture and character to rooms, defining different areas with small and large contemporary pendants. The Soiree is an entire family of versatile suspensions for large or small spaces. Both the round and rectangular versions come in multiple sizes and 2 colours – black or Flemish Gold. In both shapes one can choose for a milky-glass sphere at its center, or opt for an E27 bulb. The blown glass diffuser in the centre offers subtle nuances thanks to its satin-like finish, in contrast with its more expressive outer cage. One Soiree suspension makes a bold statement by itself, when combined in a cluster of pendants it can create a more monumental installation.

deltalight.com/soiree

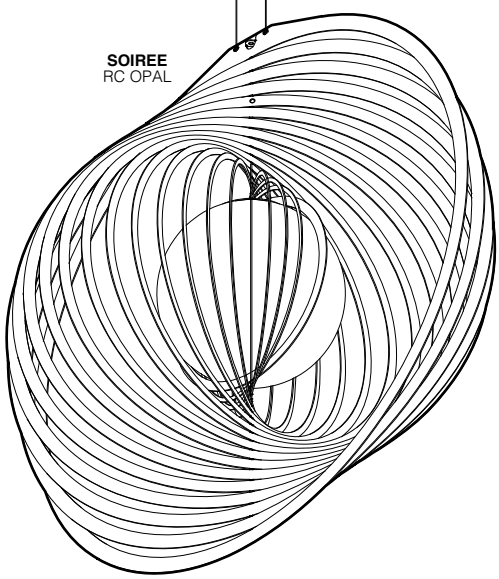

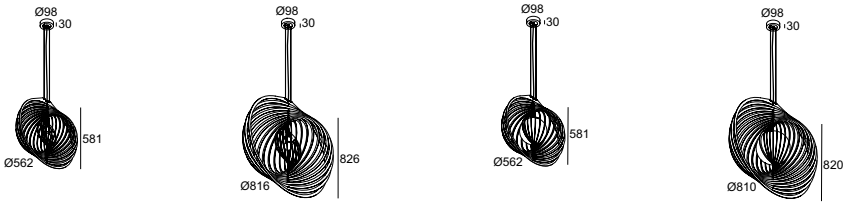


SOIREE			RC	RC	RC OPAL	RC OPAL
1 x A60 max.20W	IP20		**24013 0000** ◇	**24014 0000** ◇	**24017 0000** ◇	**24016 0000** ◇

◇ B ● / FG ●

E27 / 100-240V / 50-60Hz

INCL. 2 x CABLE SUSPENSION SINGLE AUTOM. 1.6m
INCL. 1 x CABLE 2 x 0.75mm²
INCL. 1 x GLASS OPAL (for RC OPAL)

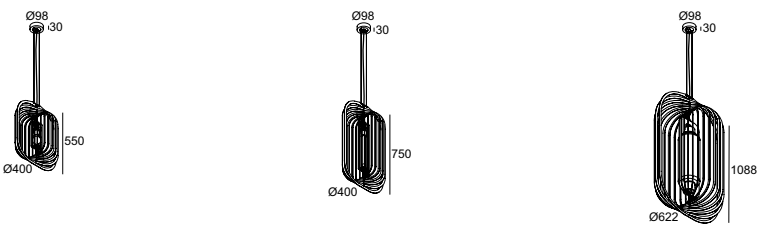


SOIREE			SC	SC	SC OPAL
1 x A60 max.20W	IP20		**24010 0000** ◇		
1 x T30-LED				**24011 0000** ◇	**24015 0000** ◇


◇ B ● / FG ●

E27 / 100-240V / 50-60Hz

INCL. 2 x CABLE SUSPENSION SINGLE AUTOM. 1.6m
INCL. 1 x CABLE 2 x 0.75mm²
INCL. 1 x GLASS OPAL (for SC OPAL)

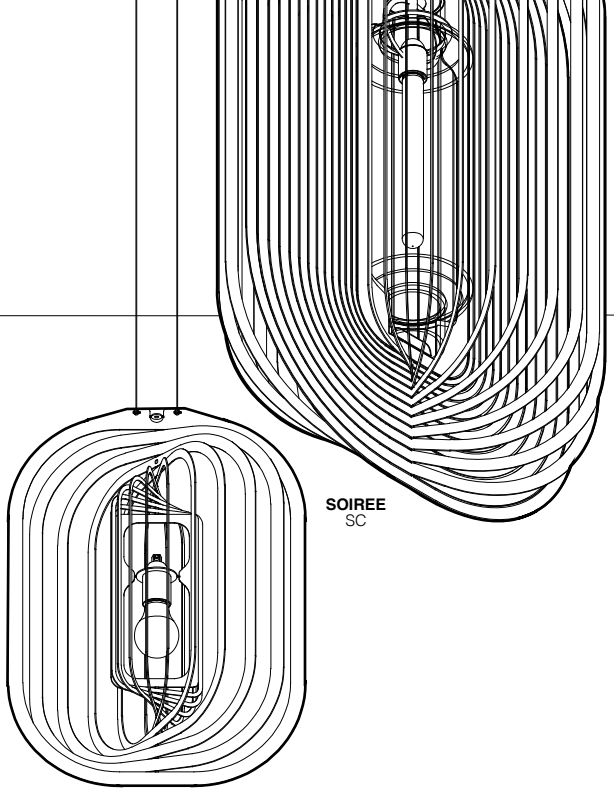


SOIREE
SC

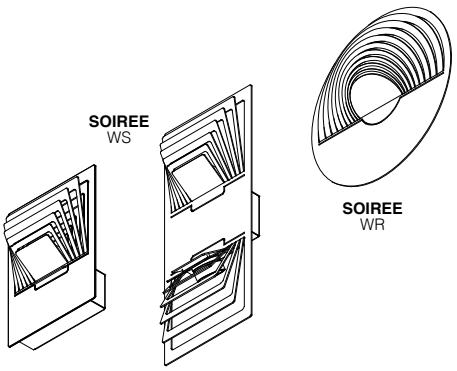


SOIREE
WS

SOIREE
WR

E27 VS OPAL

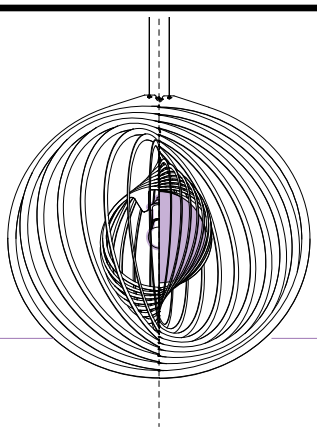

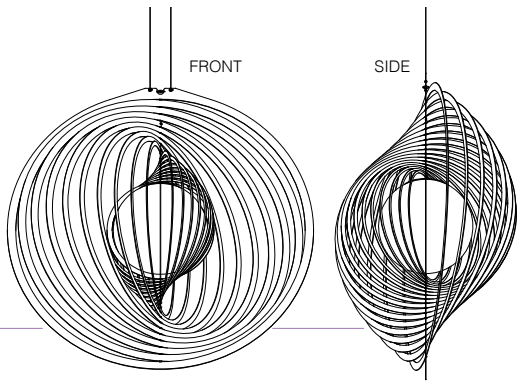

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY	SOIREE			
	RC	RC OPAL	SC	SC OPAL
LED LAMP MORE INFO TECHNICAL CHAPTERR	O	O	O	O


ZOOVER

Zoover pretends to be heavy seen its size, nevertheless it looks very lightweight when hung into the room. Designed as a shallow dome, Zoover has multiple different looks depending on the point of view. Looking at it from aside, the thermoformed shell has a very neutral appearance. Only when lowering the viewpoint, more and more details catch the eye, as the light illuminates the inner textures of the scallop.

Zoover can be used for general lighting, with soft diffused light inside its dome, or to create a more cosy atmosphere, by hiding away 4 spotlights under its shell to create various accents inside the room. Available in two sizes and two colours for the shade, Zoover adds volume, depth and texture to the room. Furthermore, the PETfelt used to create the Zoover dome helps to reduce unwanted noise inside the room, with better acoustics as result.

deltalight.com/zoover

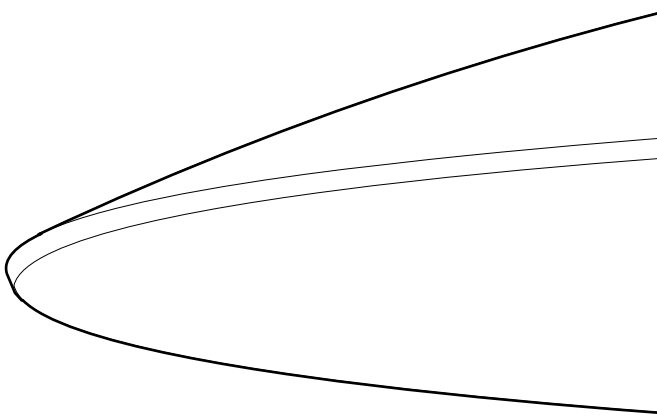

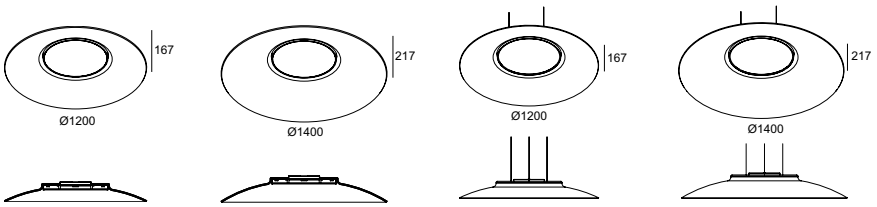

ZOOVER SBL

			120		140		NEW 120 DOWN-UP		NEW 140 DOWN-UP	
			LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY
3000K CRI>90	LED 34,4W / 4767lm	NON DIM	**28211 9300** ◇	**28212 9300** ◇	**28213 9300** ◇	**28214 9300** ◇				
		DALI DSI	**28211 9304** ◇	**28212 9304** ◇	**28213 9304** ◇	**28214 9304** ◇				
	LED UP 5,1W / 706lm LED DOWN 34,4W / 4767lm	NON DIM					**28219 9300** ◇	**28220 9300** ◇	**28221 9300** ◇	**28222 9300** ◇
		DALI DSI					**28219 9304** ◇	**28220 9304** ◇	**28221 9304** ◇	**28222 9304** ◇

◇ B ●

220-240V / 0 | 50-60Hz

INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0,75mm²

IP20

A



NEW

ZOOVER 4 CLIP


		120		140	
		LIGHT GREY	DARK GREY	LIGHT GREY	DARK GREY
	DALI	**28215 0005** ◇	**28216 0005** ◇	**28217 0005** ◇	**28218 0005** ◇


◇ B ●

110-240V / 50-60Hz

INCL.3 x CABLE SUSP. SINGLE AUTO. 3m
INCL.1 x CABLE 5 x 0,75mm²

IP20

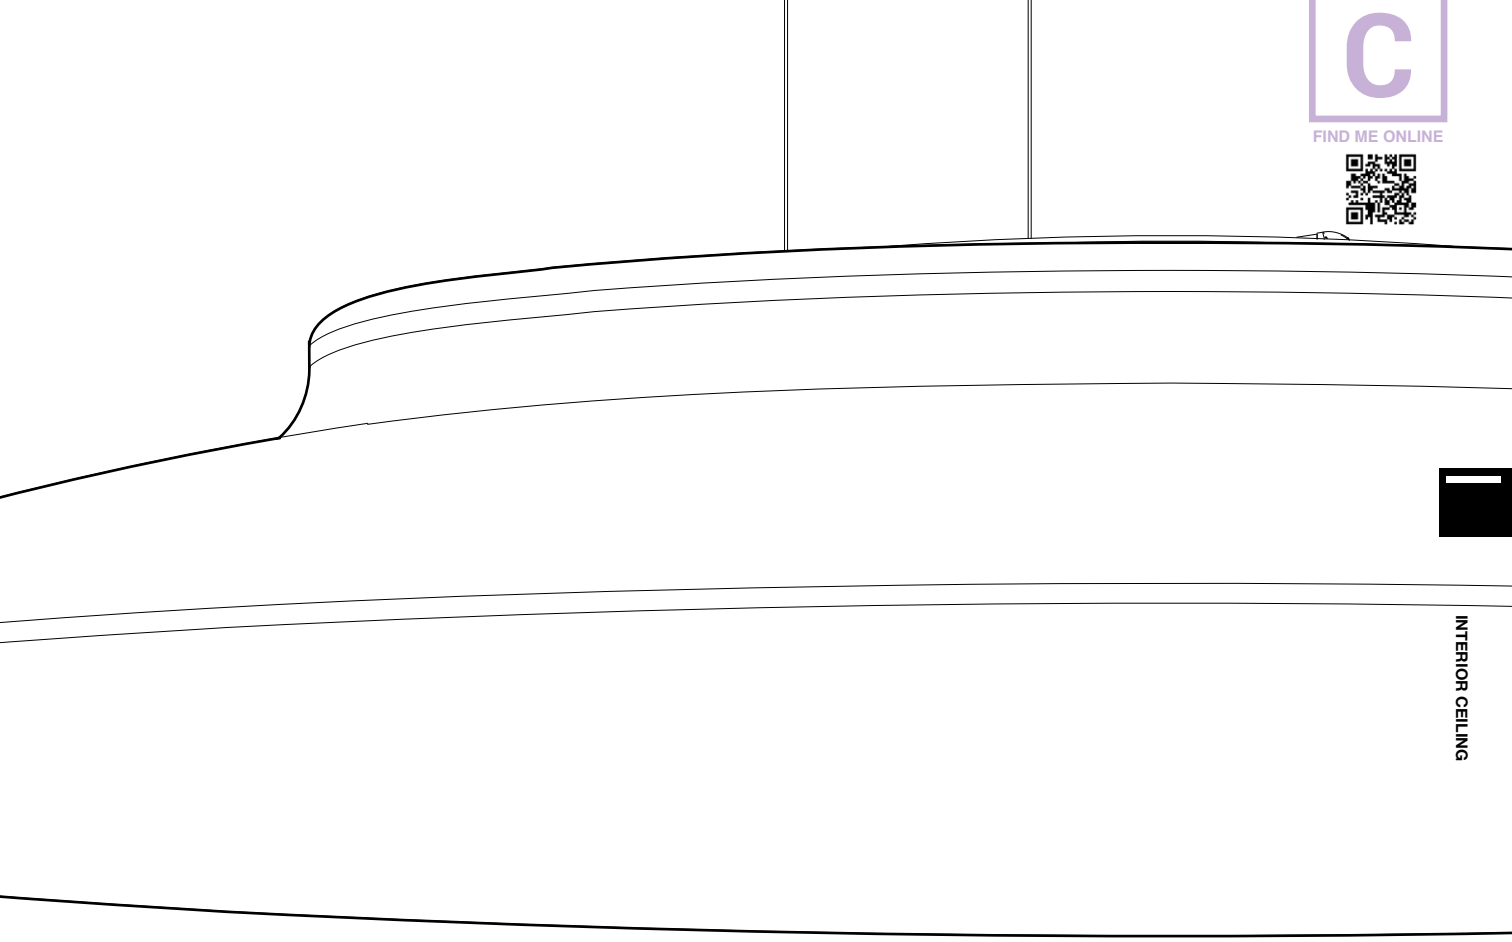

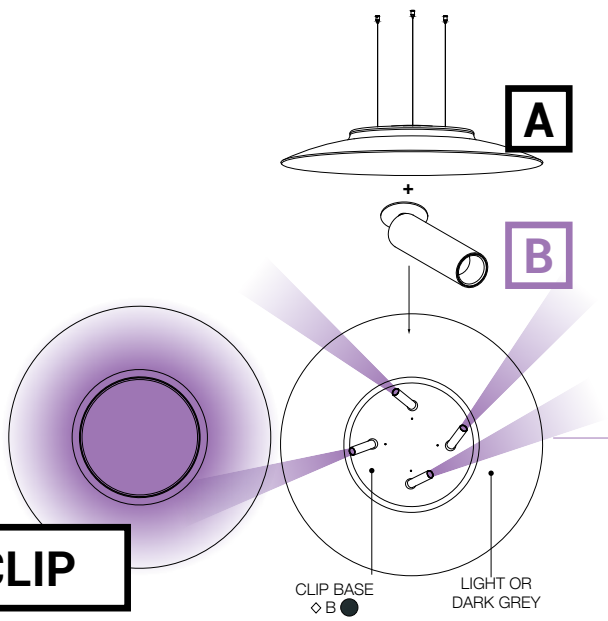


SBL VS 4 CLIP

FINISH YOUR SPECIFICATION		REQUIREMENT / OPTION / ACCESSORY					
		ZOOVER					
		120	140	120 DOWN-UP	140 DOWN-UP	4 CLIP 120	4 CLIP 140
FINISH							
4 x SPY 27 (L) / 39 (L) CLIP	pag 230-232					R	R
or 4x OCTAV 27 / 39 CLIP	pag 196					R	R
INSTALLATION							
CONNECTION ST	**15225 0360 B / W**	O	O	O	O	O	O
SUSPENSION ST	**15225 0340 B / W**	O	O	O	O	O	O
CABLE BASE R	**203 99 55 ANO / B / W**	O	O	O	O	O	O
COVERSET R Ø100	**204 00 100 B / W**	O	O	O	O	O	O

INDEX

Interior Wall Recessed

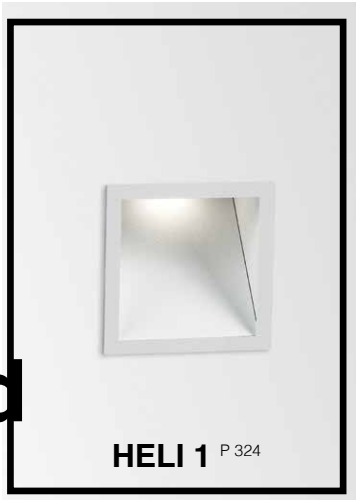

HELI 1 P 324



GYN W P 324



LOGIC W P 326



INLET P 328

INDEX

Interior Wall Surface




MONTUR P 330



OONO W P 332



BAND-OH! P 334

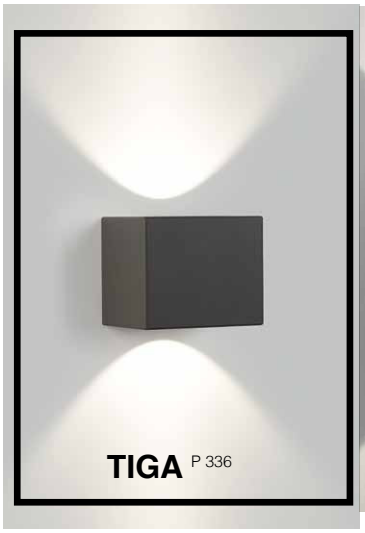

TIGA P 336



WANT-IT P 336



GALA P 336



ORBIT P 338

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.
















HELI 1


As a small wall recessed luminaire, Heli is perfect as a guidance light. Be it in a corridor or as a safety light for the steps of your stairs at night, Heli does the trick. Also outside, Heli X will guide you the way.

deltalight.com/heli




75 x 75 x 85

HELI			SCREEN LED
3000K CRI>80	LED [A] 1W / 132lm / 350mA	IP20	**202 04 12** ◇
			◇ A ● / W ○



HELI
SCREEN LED




GYN
W S

A


GYN W

Gyn W serves as pure lighting pleasure. An invisible luminaire, as the gypsum body integrates completely into the wall. By finishing off this gypsum luminaire with any desired colour you want, Gyn disappears in its surroundings with an atmospheric indirect light effect as result. All you see … is light!

deltalight.com/gyn




135 x 175 x 65 min.9-max.15



225 x 305 x 65 min.9-max.15


GYN W			S	M
3000K CRI>90	LED 2,2W / 252lm / 350mA	IP20	**100053 9300**	
	LED 8,6W / 1078lm / 350mA			**100054 9300**
2700K CRI>90	LED 2,2W / 242lm / 350mA		**100053 9200**	
	LED 8,6W / 938lm / 350mA			**100054 9200**

Finish on site in any desired colour

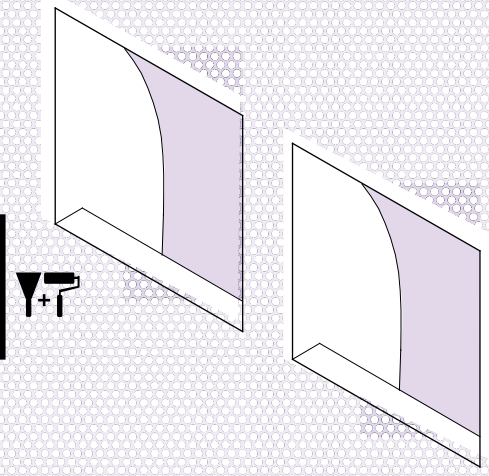

1/2

SCALE 1:1
10 100

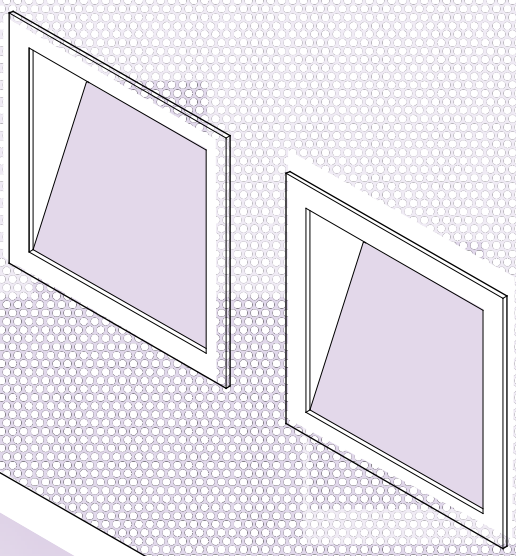

STEP LIGHT

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY		
			HELI 1	GYN W.	
			SCREEN LED	S	M
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
NON DIM	**300 90 91**	min. 38		R	R
MAINS DIM (FE)	**300 90 110**	min. 45		R (min. 2x LED)	R
MAINS DIM (FE) 11	**21012 0298**	min. 55	R (min. 3 LED A)		
1-10V DIM 15	**300 90 124**	min. 55	R (min. 6 LED A)		
DALI DIM 14	**300 90 125**	min. 55	R (min. 4 LED A)		
MOUNTING KIT					
PLASTERBOARD MOUNTING KIT 75	**202 00 75**		O		
INSTALLATION					
PLASTERKIT 186	**207 01 186**		O		
CONCRETE BOX 186	**270 11 186**		O		


B

LOGIC W

As a family of guidance lights,
Logic W exists out of small and large wall luminaires to be installed slightly above ground level. As such, they provide a soft glow on the floor to guide you along pathways or in corridors, both in- and outdoors.


deltalight.com/logic

Let me guide you...

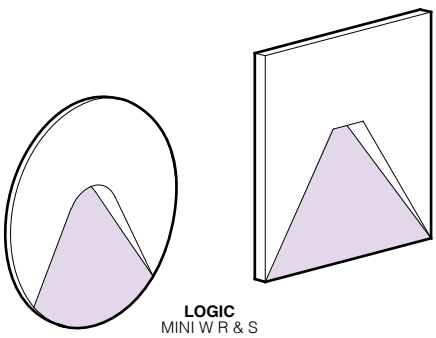


LOGIC
MINI W R & S


A

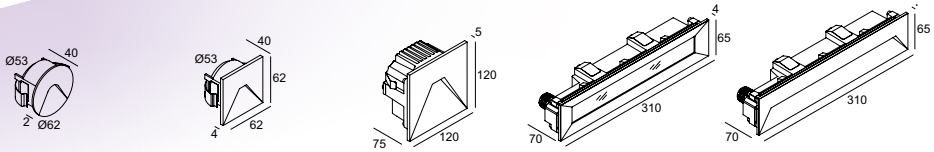


LOGIC			MINI W R	MINI W S	W S	W L F	W L
			55 x 50 / min. 12	55 x 50 / min. 12	BOX / 115-140	BOX / 110-135	BOX / 110-135
3000K							
CRI>80	LED 0,6W / 40lm / 24V-DC	IP54	**304 30 12** ◇	**304 31 12** ◇			
	LED 9W / 1480lm / 350mA	IP65				**304 32 02 83** ◇	**304 32 01 83** ◇
CRI>90	LED 7.1W / 812lm / 350mA	IP65			**304 33 811 930** ◇		
			◇ A / W		◇ A / N / W	◇ A / N / W	
					110-240V / 50-60Hz INCL. 1 x PG11	220-240V / 50-60Hz INCL. 1 x PG11	
			III		I	I	

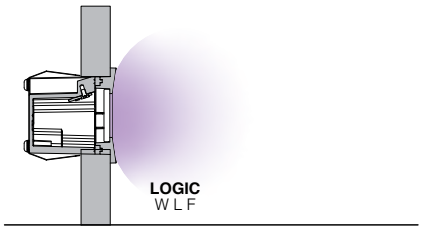


LOGIC
W L F

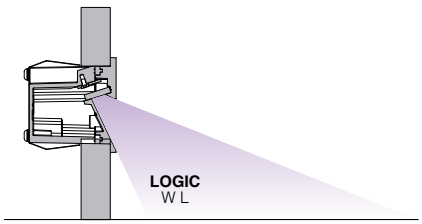


LOGIC
W L

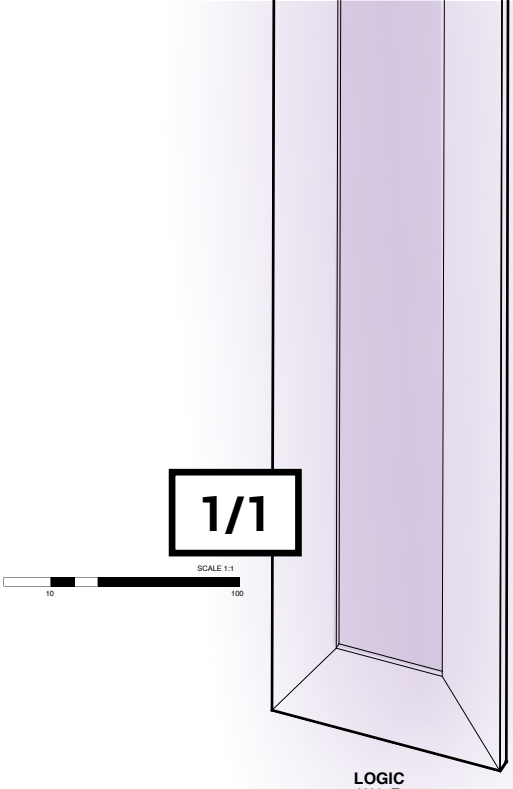

LOGIC
W L F

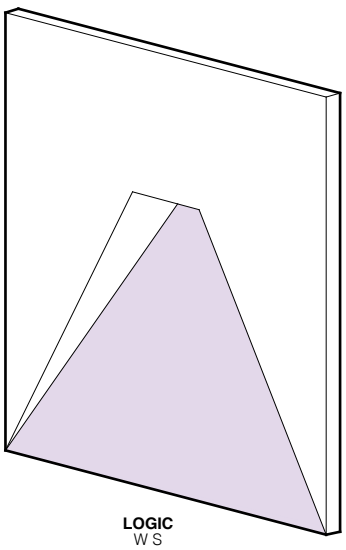

LOGIC
W S

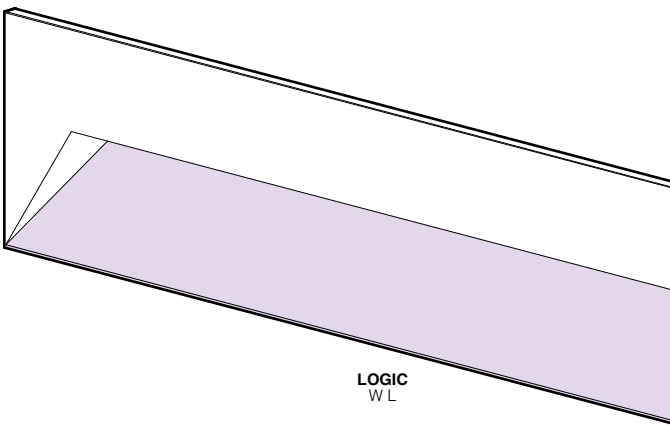

LOGIC
W L

FINISH YOUR SPECIFICATION

				REQUIREMENT / OPTION / ACCESSORY				
				LOGIC MINI		LOGIC		
				W R	W S	W S	W L F	W L
LED POWER SUPPLY MORE INFO IN TECNICAL CHAPTER								
NON DIM	24V-DC - 24W	**21012 0160**	min. 55	R *	R *			
INSTALLATION								
FOR PLASTER FINISH		**270 11 192**				R		
		270 11 191					R	R
		270 11 188		O	O			
FOR EXPOSED CONCRETE		**304 33 96**				R		
		304 32 96					R	R


* REMOTE INSTALLATION

B

INLET


Our traditional Inlet is a very popular wall recessed fixture for guidance light in hallways and staircases. As a more modern approach, Inlet Trimless is added to the family.
While Inlet Trimless XS generates a narrow beam of light that produces a triangular shaped light effect on the floor, the bigger versions come in a Low or High design that create gentle fields of light on the surface.
Available in White, Black or Gold Coloured, these guidance lights are perfect for usage in residential applications.


deltalight.com/inlet




22 x 170 x 45 / min.12

INLET			S
3000K CRI>80	LED [A] 1W / 132lm / 350mA	IP20	**304 05 12** ◇
2700K CRI>80	LED [A] 1W / 132lm / 350mA		**304 05 13** ◇
			◇ A / W










NEW

KIT x 45 | KIT x 50 | KIT x 50

INLET TRIMLESS			XS	H7	H20
3000K CRI>90	LED [A] 0,5W / 68lm / 180mA	IP20	**13211 9300** ◇		
	LED 0,9W / 116lm / 24V-DC			**13213 9300** ◇	
	LED 2,8W / 347lm / 24V-DC				**13215 9300** ◇
2700K CRI>90	LED [A] 0,5W / 63lm / 180mA		**13211 9200** ◇		
	LED 0,9W / 116lm / 24V-DC			**13213 9200** ◇	
	LED 2,8W / 347lm / 24V-DC				**13215 9200** ◇
				◇ B-W / GC-W / W-W	







NEW

KIT x 50 | KIT x 50 | KIT x 50

INLET TRIMLESS			L20	L38	L113
3000K CRI>90	LED 2,8W / 347lm / 24V-DC	IP20	**13214 9300** ◇		
	LED 5,6W / 695lm / 24V-DC			**13216 9300** ◇	
	LED 16,9W / 2085lm / 24V-DC				**13217 9300** ◇
2700K CRI>90	LED 2,8W / 347lm / 24V-DC		**13214 9200** ◇		
	LED 5,6W / 695lm / 24V-DC			**13216 9200** ◇	
	LED 16,9W / 2085lm / 24V-DC				**13217 9200** ◇
				◇ B-W / GC-W / W-W	


C

FIND ME ONLINE

1/2


SCALE 1:1

10 100

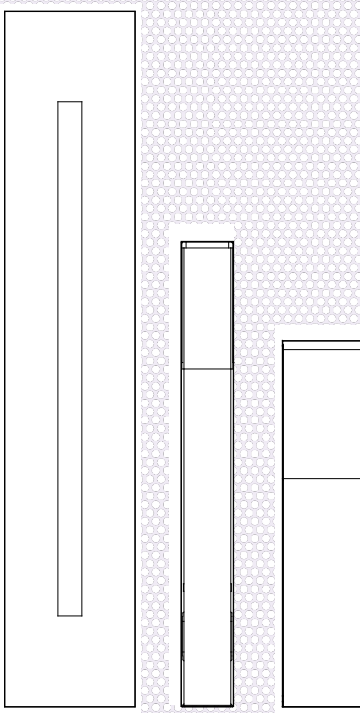



INLET
S

INLET
XS TRIMLESS



INLET
H7 TRIMLESS

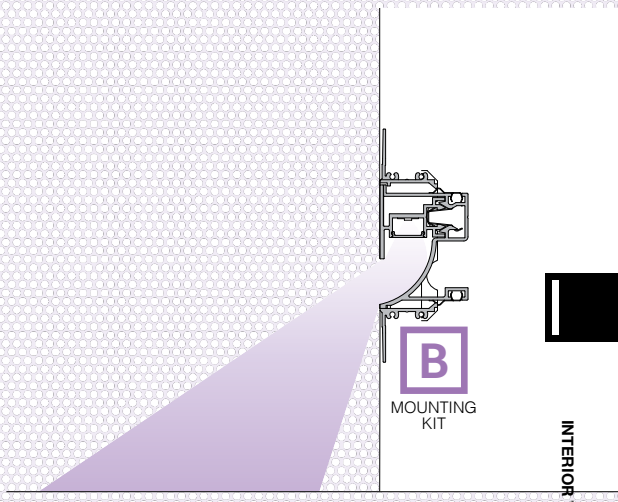

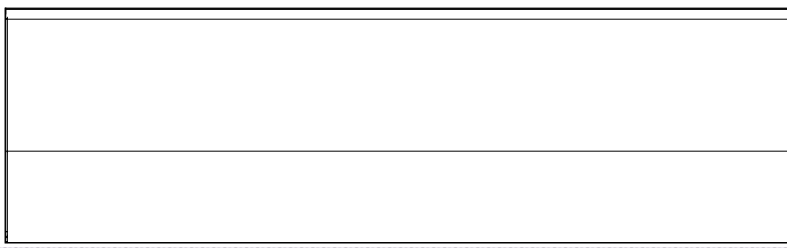

INLET
L20 / L38 / L113

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY						
			INLET S	INLET TRIMLESS					
				XS	H7	H20	L20	L38	L113
LED POWER SUPPLY									
NON DIM 3	**21012 0080**	min. 40		R *					
MAINS DIM (FE) 11	**21012 0298**	min. 55	R (min. 3 LED A) *						
1-10V DIM	**21012 0171**	min. 61			R *	R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R (min. 6 LED A) *						
DALI DIM	**21012 0205**	min. 61			R *	R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R (min. 4 LED A) *						
MOUNTING KIT									
PLASTERBOARD MOUNTING KIT INLET FLUSH	**304 05 01**		O						
MOUNTING KIT INLET TRIMLESS XS	**13210 0010**			R					
MOUNTING KIT INLET TRIMLESS H7	**13210 0030**				R				
MOUNTING KIT INLET TRIMLESS H20	**13210 0050**					R			
MOUNTING KIT INLET TRIMLESS L20	**13210 0040**						R		
MOUNTING KIT INLET TRIMLESS L38	**13210 0060**							R	
MOUNTING KIT INLET TRIMLESS L113	**13210 0070**								R
INSTALLATION									
PLASTERKIT 145	**304 05 99**		O						
CONCRETE BOX 145	**304 05 98**		O						

* REMOTE INSTALLATION

B

MONTUR


With Montur we offer a highly original interpretation of an archetypical concept: a light source that is contained within the framing of a 3D square or rectangular shape. The Montur is available in indoor and outdoor versions, as a ground, wall or ceiling fixture, with LED clusters or filament-LED lamps with a rustic look. The series integrates beautifully in both country-classic and contemporary homes, and is suitable for hotels and public buildings as well.


The Montur not only breathes new life into a classic concept, it also adds a detailed element of refinement. The sharply profiled framing in aluminium is utterly devoid of welding seams. For both the indoor and outdoor versions, there is a choice of finishing with either hand pressed transparent or opal glass. The opal glass version contains a milky, cone shaped core, with a transparent glass surface, creating a pleasantly diffused light that gives the lamp extra cachet.
The indoor version of the Montur is also available as an open cube, with one or two bulbs, or in a rectangular shape with a powerful LED cluster concealed behind a protective cover in polycarbonate. By using them as outdoor fixtures, you can extend your lighting style into the garden or parking area. The outdoor versions are available in the same models as the indoor ones, but always feature a protective cover in glass or polycarbonate. There is also a bollard version, with a choice of various heights.


deltalight.com/montur


A highly original interpretation of an archetypical concept


A













MONTUR			S LED	S O E27	M LED	M E27	M O E27
3000K CRI>90	LED 6,3W / 925lm / 350mA	IP65	**232 112 83** ◇		**232 212 83** ◇		
2700K CRI>90	LED 6,3W / 877lm / 350mA	IP65	**232 112 82** ◇		**232 212 82** ◇		
A60 max.40W		IP20		**232 111 00** ◇			**232 211 00** ◇
		IP65				**232 213 00** ◇	
			◇ B ●	◇ B ● / FBR ● / FG ●	◇ B ●	◇ B ●	◇ B ● / FBR ● / FG ●
			100-240V / 50-60Hz INCL.GLASS OPAL	E27Ls / 100-240V / 50-60Hz	100-240V / 50-60Hz INCL.GLASS OPAL	E27Ls / 100-240V / 50-60Hz INCL.GLASS CLEAR	E27Ls / 100-240V / 50-60Hz






MONTUR			L PC LED	L O E27
3000K CRI>90	LED 14,7W / 2159lm / 700mA	IP54	**232 318 83** ◇	
2 x A60 max.40W		IP20		**232 321 00** ◇
			◇ B ●	◇ B ●
			220-240V / 0 | 50-60Hz INCL.PC OPAL	2 x E27Ls / 100-240V / 50-60Hz


A GLIMPSE OF ME
ON PAGE 58

C

FIND ME ONLINE


Milky, cone shaped core, with a transparent glass surface

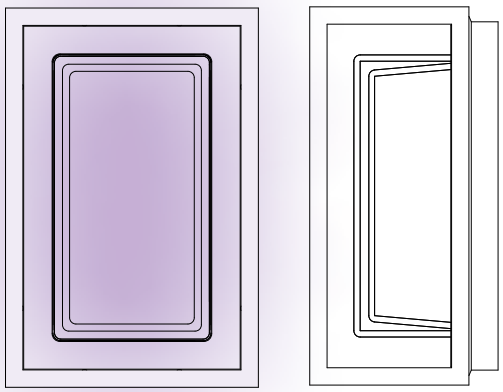

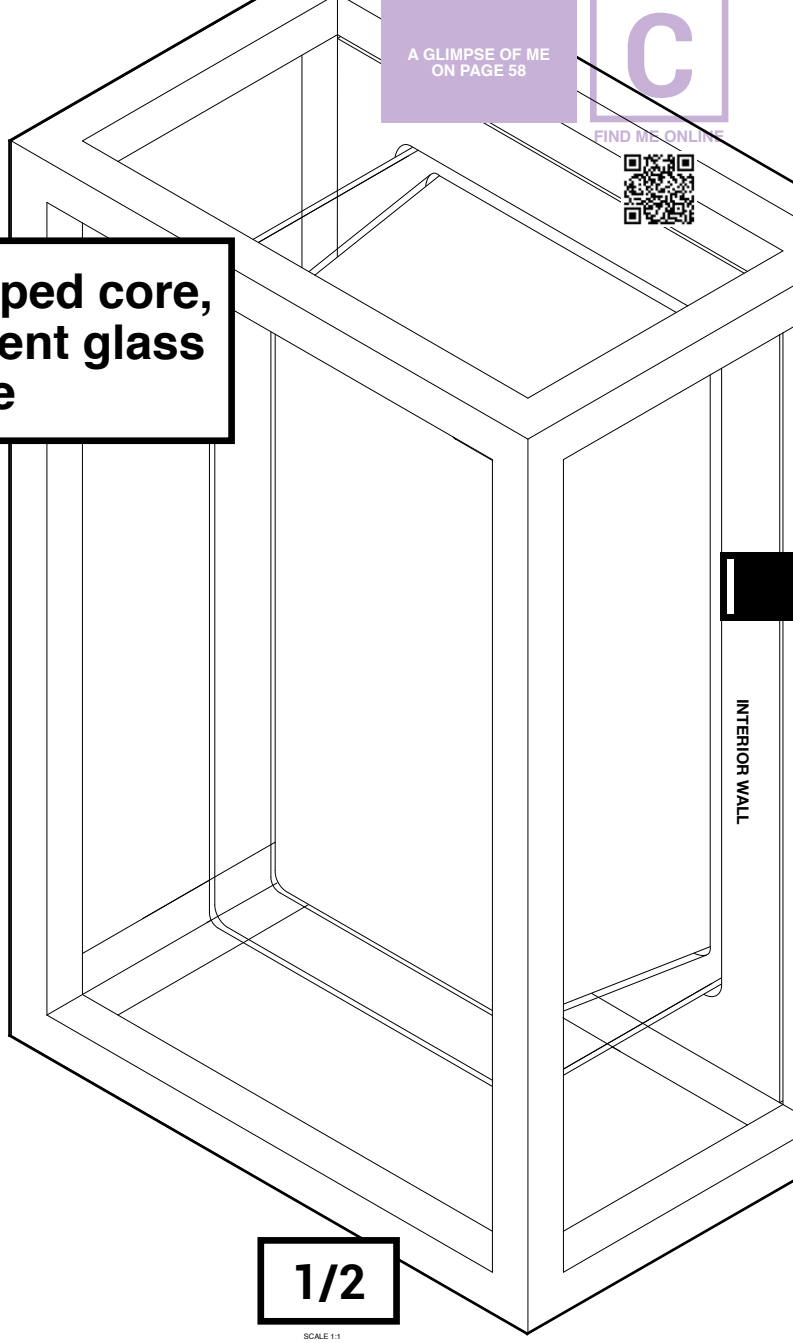


1/2


SCALE 1:1
10 100



MONTUR
LED



MONTUR
E27



MONTUR
BOLLARDS

B

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY							
	MONTUR						
	S LED	S O E27	M LED	M E27	M O E27	L PC LED	L O E27	SQL LED
LED LAMP MORE INFO TECHNICAL CHAPTERR		O		O	O		O	


OONO


How to describe Oono in one sentence?
'A soft glow of light during golden hour, at the end of a sky-blue summers day…'


That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities.
It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass.
It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with staraightforward surface mounted and pendant luminaires for indoors.
It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold.
It brings together the shimmer of dusk with the fresh start of dawn.

deltalight.com/oono

A









NEW

OONO				OONO W S	OONO W M	OONO W L
3000K / CRI>90	LED 8.6W / 1089lm / 500mA	IP54	MAINS	**29611 9308** ◇		
	LED 12.4W / 1467lm / 700mA				**29612 9308** ◇	
	LED 17.2W / 2101lm / 500mA					**29613 9300** ◇
2700K / CRI>90	LED 8.6W / 1041lm / 500mA			**29611 9208** ◇		
	LED 12.4W / 1403lm / 700mA				**29612 9208** ◇	
	LED 17.2W / 2009lm / 500mA					**29613 9200** ◇
				◇ B ● / GM ● / W ○		◇ B ●
				220-240V / 50-60Hz		

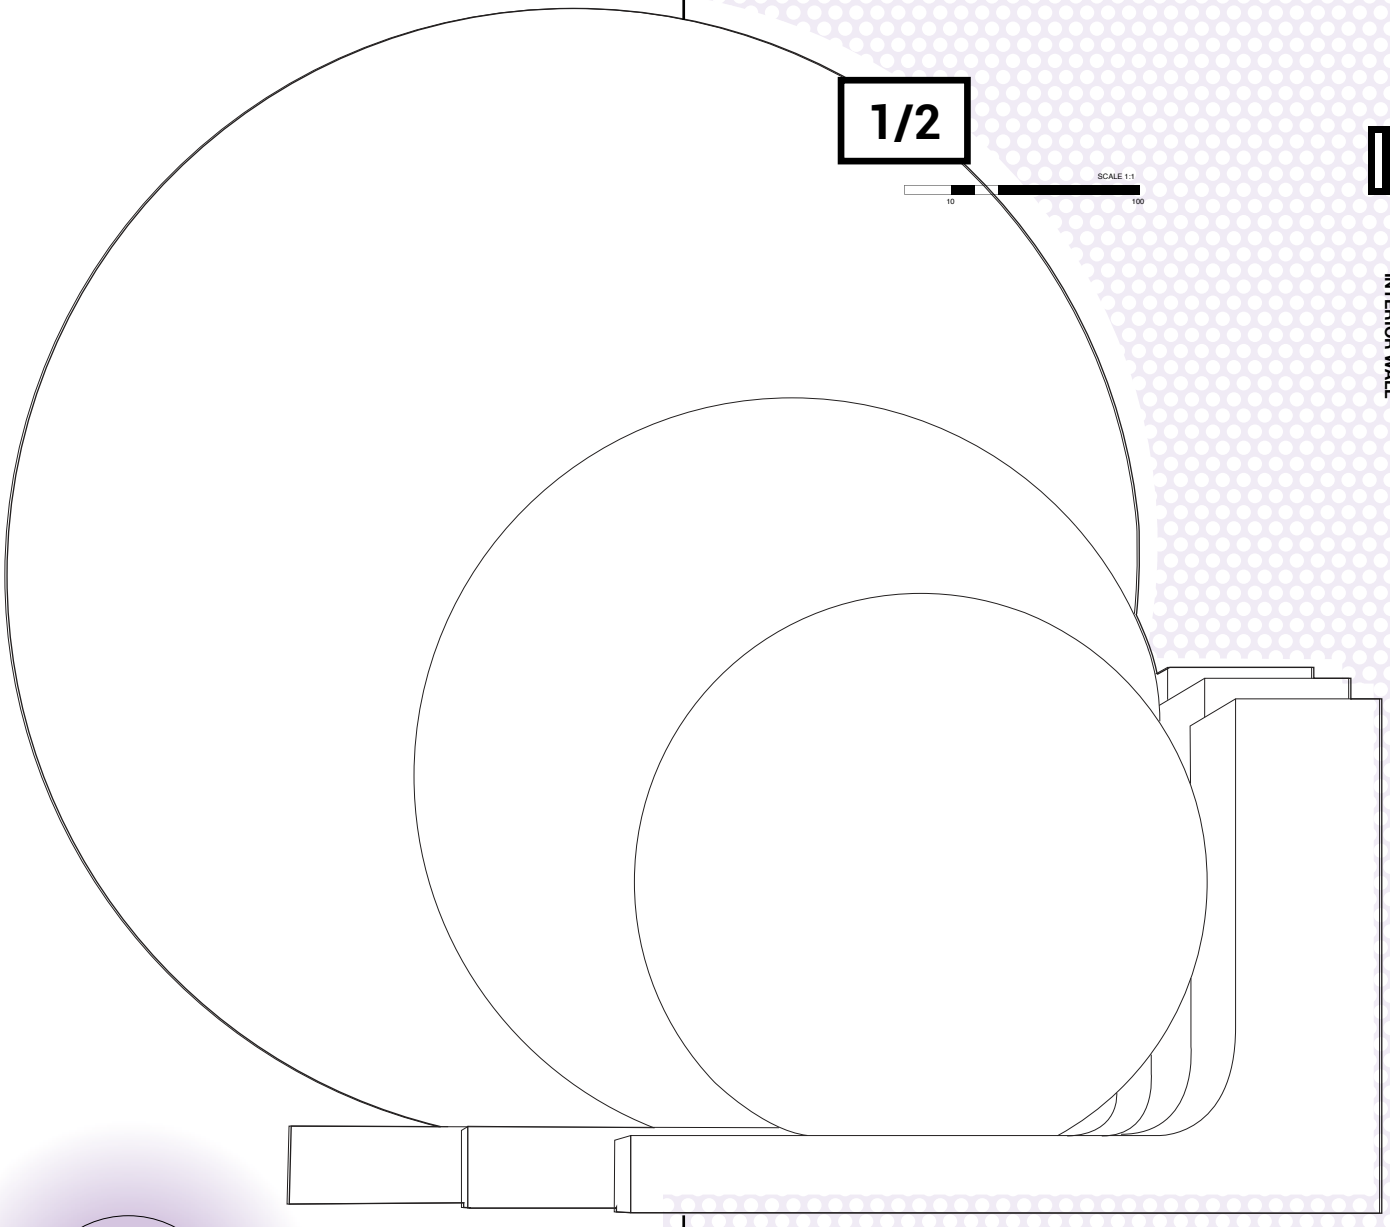



OONO
W S

The shimmer of dusk with the fresh start of dawn


BAND-OH!

Shape your wall into a piece of art. The layers of light generated by Band-Oh! provide a sense of depth onto the surface its being installed on. The light not only hits the wall for a V-shaped down-up light effect, it also creates a play of light on the fixture itself. the design of Band-Oh! is made out of several shells above each other. An overlap between 2 layers shieds the light source, while its openess leaves space for reflected light to escape. The result is a soft glow of light on the inner shell of Band-Oh!, generating an optical illusion of the outer shell freely floating around it.

While the double finish in two shades of black - structured matt and shiny Piano Black - enhances the layered feeling, the finish in Brushed Old Bronze gets an extra layer of richness thanks to the soft glow lighting it up.

deltalight.com/band-oh

A



NEW

BAND-OH!

				BAND-OH!
3000K CRI>90	2 x LED 8W / 630lm	IP20	MAINS	**30311 9308** ◇
2700K CRI>90	2 x LED 8W / 597lm			**30311 9208** ◇
				BROB / PB-B
				220-240V / 50-60Hz
				I


A GLIMPSE OF ME
ON PAGE 56

C

FIND ME ONLINE

READ MY COLOUR

Layers of light

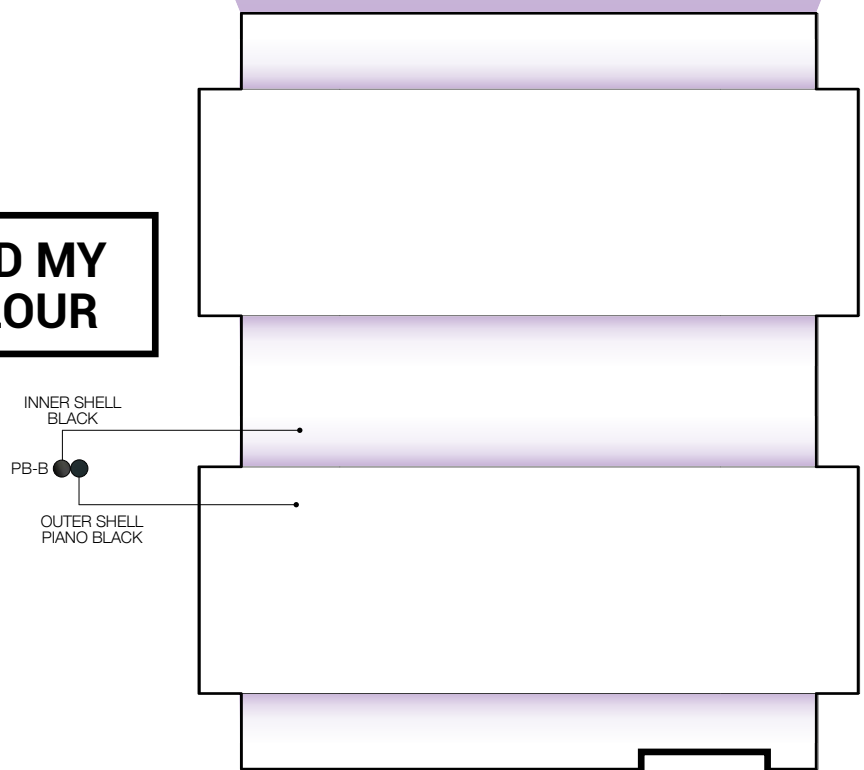


1/2


SCALE 1:1
10
100


TIGA

A medium sized rectangular lighting fixture, delivering a pleasant up and downward light effect on your wall. As a wall mounted luminaire, Tiga is perfect for both residential use or to apply in hotels and restaurants.Tiga comes as an indoor and outdoor version, perfect to merge your exterior and interior in a similar design language.

deltalight.com/tiga









TIGA				IN LED	LED BS	LED
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP20	MAINS	**223 753 811 932 ED8** ◇		
		IP65			**223 752 811 932 ED8** ◇	**223 751 811 932 ED8** ◇
2700K CRI>90	LED 7.1W / 779lm / 350mA	IP20	MAINS	**223 753 811 922 ED8** ◇		
		IP65			**223 752 811 922 ED8** ◇	**223 751 811 922 ED8** ◇
				◇ B-MMAT / W-W	◇ A / G / W	
				220-240V / 50-60Hz	220-240V / 50-60Hz	

WANT-IT

Want-it is a vivid range of wall luminaires. The streamlined and timeless design of the Want-it gives it a very flat and low-impact appearance, with no visible screws. The slightly curved edges provide a subtle twist to the design, while also creating a nicely delineated light pattern on the wall.
The Want-it comes in a square and rectangular shape in all white or a more decorative black and matt gold combination.

deltalight.com/want-it







WANT-IT				S	L
3000K CRI>90	2 x LED 2.9W / 386lm / 350mA	IP20	MAINS	**275 12 82 93 ED8** ◇	**275 13 82 93 ED8** ◇
2700K CRI>90	2 x LED 2.9W / 369lm / 350mA	IP20	MAINS	**275 12 82 92 ED8** ◇	**275 13 82 92 ED8** ◇
				◇ B-MMAT / W-W	
				220-240V / 0l50-60Hz	


GALA


Gala has been a classic within Delta Light's range of wall mounted fixtures. Recognizable by its rectangular shape with rounded corners, Gala comes as a down-up luminaire or as an uplighter, creating a flood of indirect light for a pleasant and intimate setting.

deltalight.com/gala









GALA				T	XL LP	XL	XL HP
3000K CRI>90	LED 9,4W / 1479lm / 350mA	IP20	NON DIM	**12220 9300** ◇			
	LED 7.1W / 812lm / 350mA		MAINS		**12219 9308** ◇		
	LED 13,8W / 1232lm / 500mA		MAINS			**275 161 93 ED8** ◇	
	LED 32,6W / 3337lm / 850mA		1-10V				**275 162 93 ED1** ◇
2700K CRI>90	LED 9,4W / 1422lm / 350mA		NON DIM	**12220 9200** ◇			
	LED 7.1W / 779lm / 350mA		MAINS		**12219 9208** ◇		
					◇ W		
				220-240V / 50-60Hz	220-240V / 50-60Hz		

C

FIND ME ONLINE

1/1

SCALE 1:1

10 100


READ MY COLOUR

OUTER SHELL
BLACK

B-MMAT

INNER SHELL
GOLD MATT

INTERIOR WALL

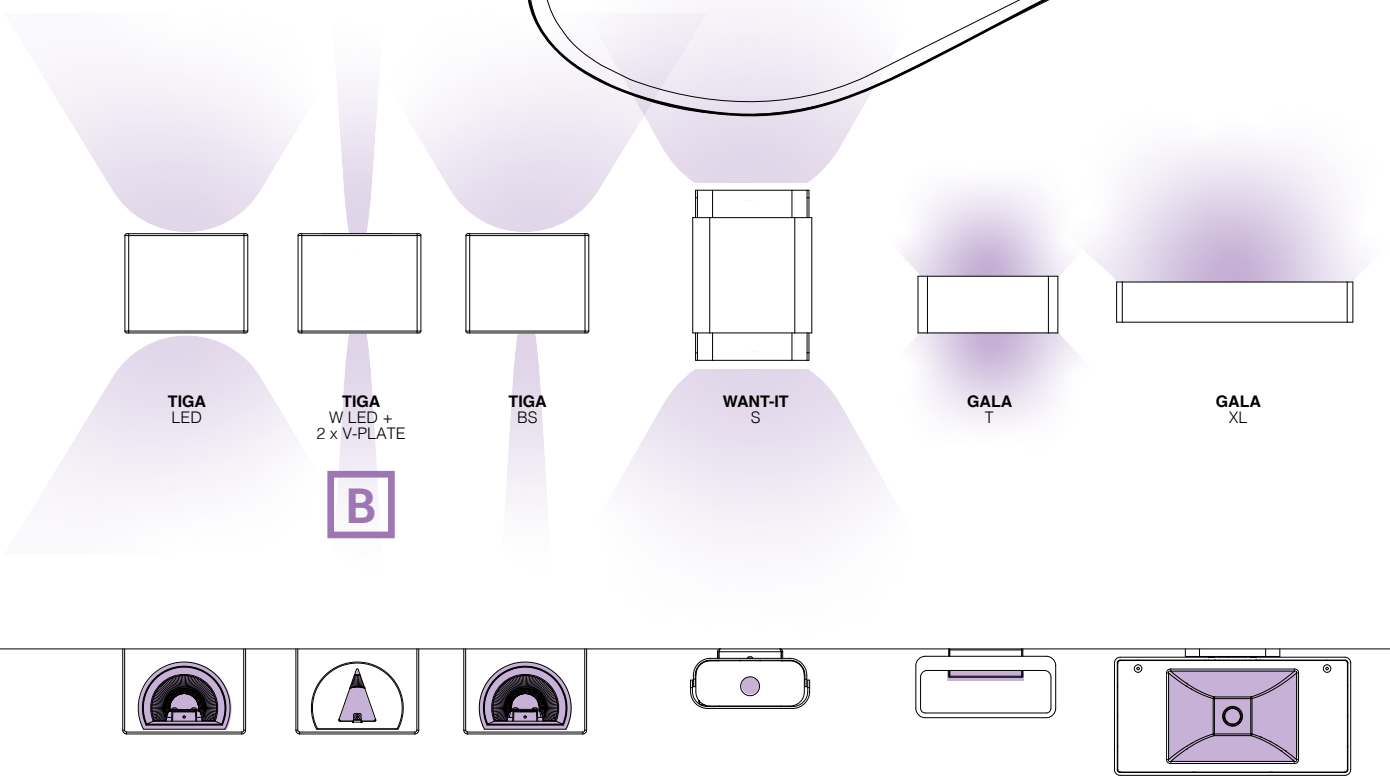

TIGA
LED

TIGA
W LED +
2 x V-PLATE

TIGA
BS

WANT-IT
S

GALA
T

GALA
XL

B

FINISH YOUR SPECIFICATION


B


			REQUIREMENT / OPTION / ACCESSORY		
			TIGA		
			IN LED	LED BS	LED
INSTALLATION					
TIGA V-PLATE	**223 753 01 B / W**		A		


ORBIT


As a Design Plus Award winner in 2000, the Orbit has been a favorite in the wall mounted range of Delta Light for many years. This wall mounted family comes in two versions, Orbit, and Orbit T.
Orbit combines a couple of LEDs with a lens for up- and downlight, which results in a distinctive light pattern on the wall. Finished in either standard lacquered finish or with the typical Punk look.Orbit T is a unique, see-through luminaire. The flexible LED around the hollows inside of the luminaire also results in a pleasant down-up light effect.

deltalight.com/orbit










ORBIT				T LED	LED	PUNK LED	PUNK HI
3000K CRI>90	LED 3W / 484lm / 24V-DC	IP20	NON DIM	**271 05 93** ◇			
	2 x LED 2.9W / 386lm / 350mA		MAINS		**271 04 93 ED8** ◇	**271 08 93 ED8** ◇	
2700K CRI>90	LED 3W / 484lm / 24V-DC		NON DIM	**271 05 92** ◇			
	2 x LED 2.9W / 369lm / 350mA		MAINS		**271 04 92 ED8** ◇	**271 08 92 ED8** ◇	
	2 x QPAR51 max.35W						**472 361 00**
				◇ B-MMAT / W-W	◇ B-MMAT / W-W	◇ BP-MMAT / GC-B	◇ BP / GC
				220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 0l50-60Hz	GU10 / 100-240V / 50-60Hz
							0,5


A


HEDRA


Hedra adds refinement, finesse and colour to the range. Next to black and white, Hedra W is available in a Gold Coloured and Black Bronze finish. The faceted design of the Hedra captures and reflects the ambient light with an ever-changing look as result. It is the typical design element of the Hedra family, which also includes a series of pendant and spotlight luminaires.

deltalight.com/vizir-hedra









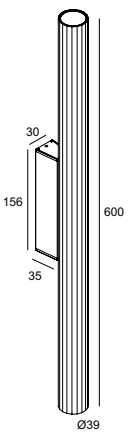

HEDRA				62 W DOWN-UP Hi	39 W	39 W 40 DOWN-UP	39 W 60 DOWN-UP
3000K CRI>90	LED 3.9W / 385lm / 350mA	IP20	13°		**22535 9310** ◇		
	2 x LED 3.9W / 385lm / 350mA					**22536 9310** ◇	**22534 9310** ◇
2700K CRI>90	LED 3.9W / 385lm / 350mA				**22535 9210** ◇		
	2 x LED 3.9W / 385lm / 350mA					**22536 9210** ◇	**22534 9210** ◇
	2 x QPAR51 max.35W		-	**472 362 00** ◇			
				◇ B / BBR / GC / W	◇ BBR-B / GC-B / W-W		
				GU10 / 100-240V / 50-60Hz	220-240V / 50-60Hz		
				0,5			

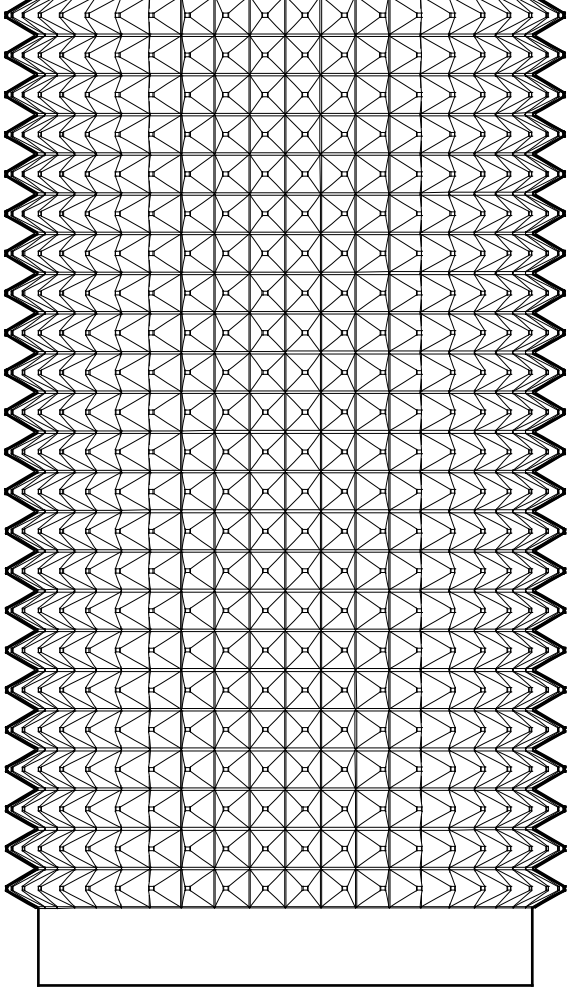

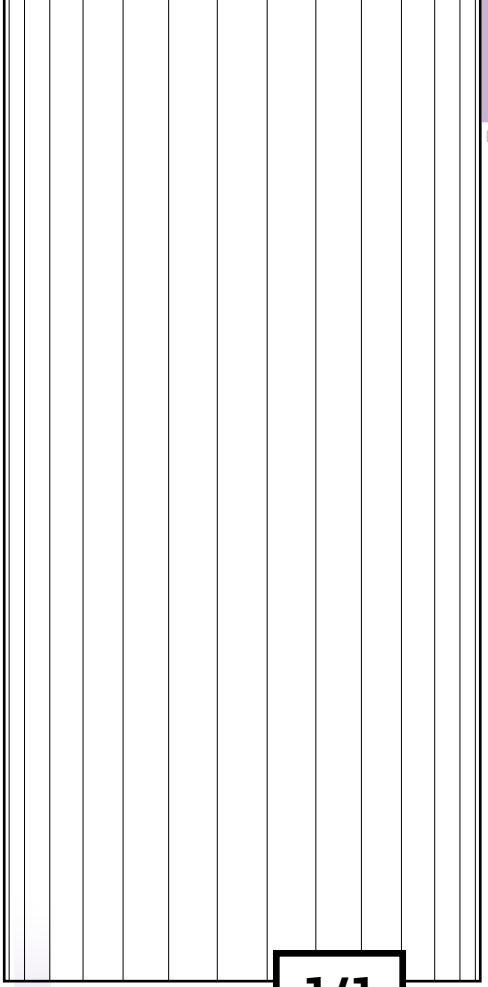

C


FIND ME ONLINE

INTERIOR WALL

1/1

SCALE 1:1

10 100

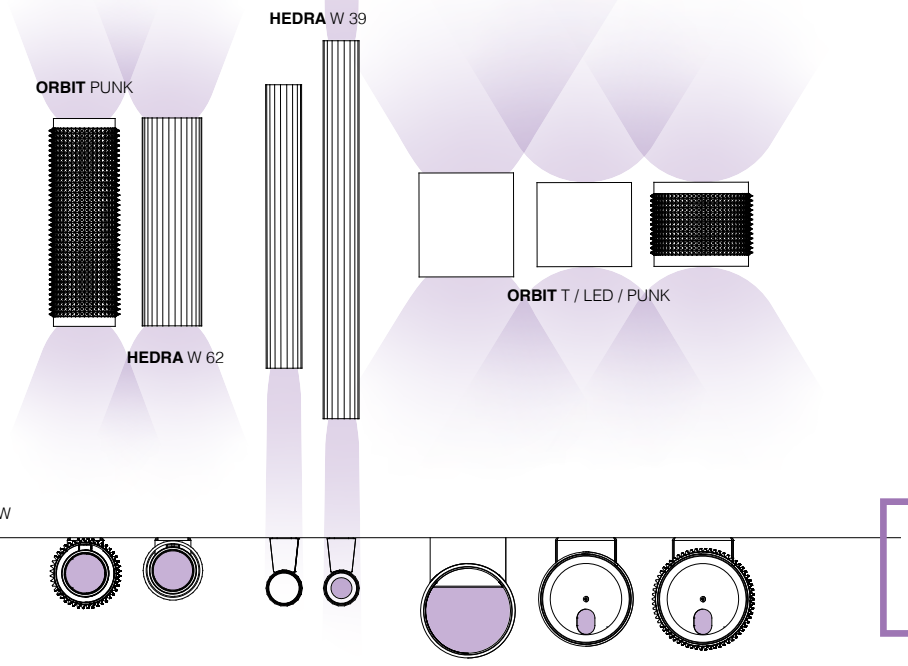

B


FINISH YOUR SPECIFICATION

	REQUIREMENT / OPTION / ACCESSORY							
	ORBIT				HEDRA			
	T LED	LED	PUNK LED	PUNK HI	62 W D/U Hi	39 W	39 W 40 D/U	39 W 60 D/U
LED LAMP MORE INFO TECHNICAL CHAPTERR				○	○			

VISION

Since its launch Vision has already won multiple awards, thanks to its impressive and nicely delineated parabolic light pattern on the wall. This classic is available both for indoor and outdoor use. Vision thanks its powerful light effect to the combination of LED technology in combination with a lens, giving its unique design and playful light effect

deltalight.com/vision.




VISION LED

3000K CRI>80	2 x LED 1.4W / 182lm / 500mA	IP20	**278 25 22** ◇
2700K CRI>80	2 x LED 1.4W / 182lm / 500mA		**278 25 23** ◇

◇ W ◯ / W-C ◯◉


100-240V / 50-60Hz

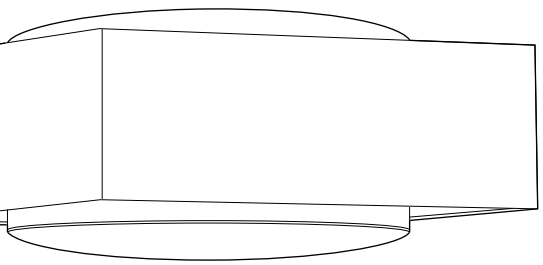

TOPIX

This multi award-winning luminaire ensures a playful effect and offers a lot of freedom.
On its own, Topix wows you with its peculiar yet attractive design, when put together, you can create artistic clusters of light. Topix comes for in- and outdoors, giving you the opportunity to make your façade stand out.

deltalight.com/topix




41 x 38

TOPIX

3000K CRI>80	2 x LED [A] 1W / 132lm / 350mA	IP20	**304 17 02** ◇


◇ A ◉ / W ◯

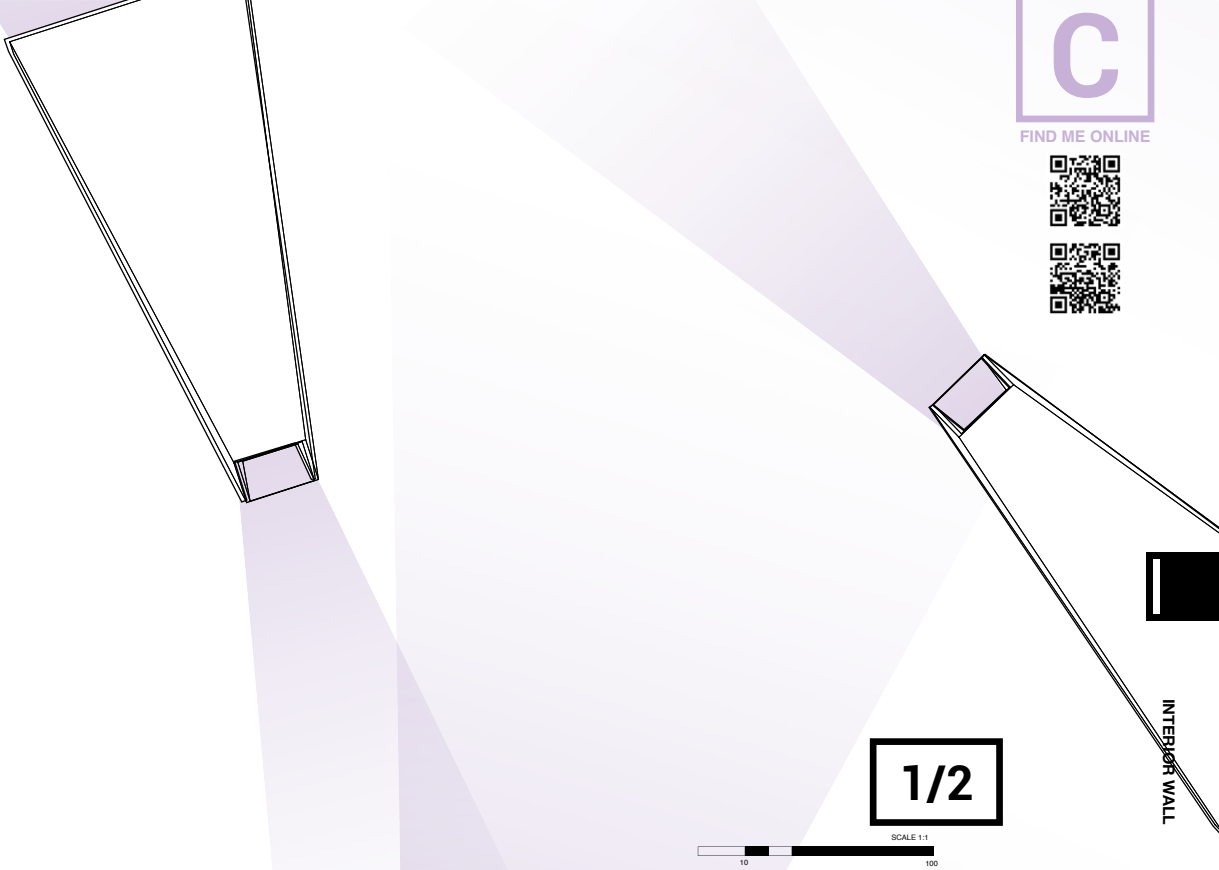

1/2

SCALE 1:1

10 100

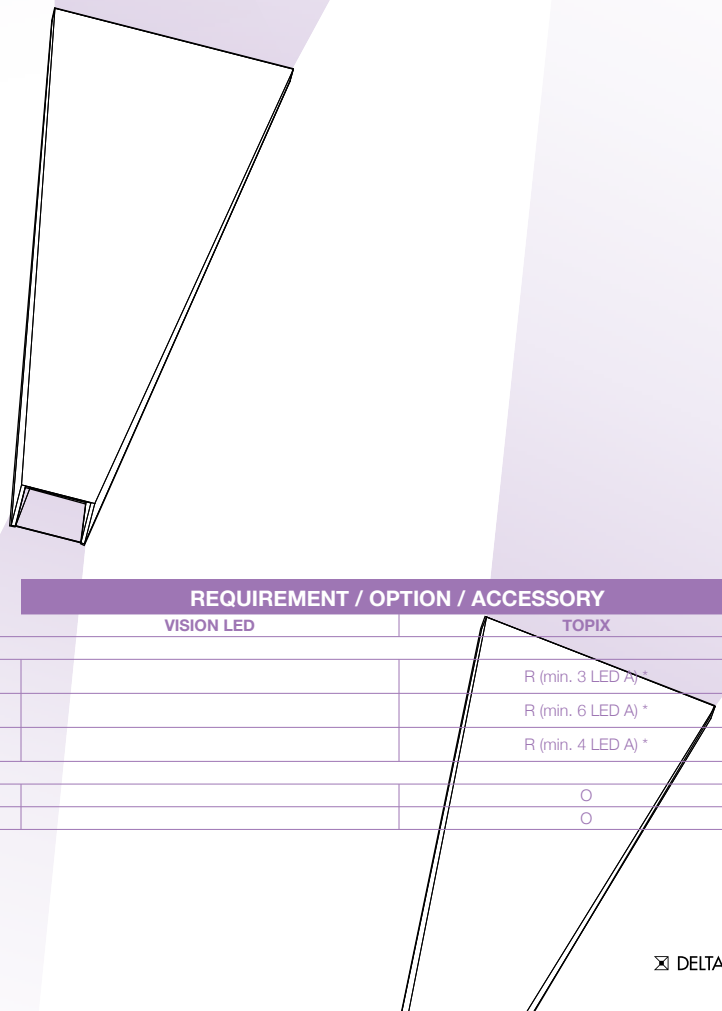

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY	
			VISION LED	TOPIX
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
MAINS DIM (FE) 11	**21012 0298**	min. 55		R (min. 3 LED A) *
1-10V DIM 15	**300 90 124**	min. 55		R (min. 6 LED A) *
DALI DIM 14	**300 90 125**	min. 55		R (min. 4 LED A) *
INSTALLATION				
CONCRETE BOX 153	**302 20 21**			O
CONCRETE BOX TR 154	**302 20 22**			O


* REMOTE AINSTALLATION

BACKSPACE


In many ways, Backspace II is a joy for the eye, be it by its slender design, by its pleasant light effect or by its playful colour combinations. Backspace II is designed to create a 2-way light effect on the wall, the choice to install it in a horizontal or vertical way is up to you.
By mounting the light source in the front part of the luminaire, it is perfectly shielded from looking directly into the source. Backspace II can be used for interior lighting in a white, grey or dark grey finish or for outdoor settings in grey or dark grey. An additional touch of colour can be added to the luminaires by opting for an extra golden reflector.

deltalight.com/backspace

A





BACKSPACE				II	II X
3000K CRI>90	LED 9,6W / 1281lm / 500mA	IP20	MAINS DIM	**10212 9308** ◇	
		IP54	NON DIM		**10214 9300** ◇
2700K CRI>90	LED 9,7W / 1204lm / 500mA	IP20	MAINS DIM	**10212 9208** ◇	
		IP54	NON DIM		**10214 9200** ◇
				◇ W ◯	◇ A ◯ / N ●
				220-240V / 50-60Hz	220-240V / 50-60Hz

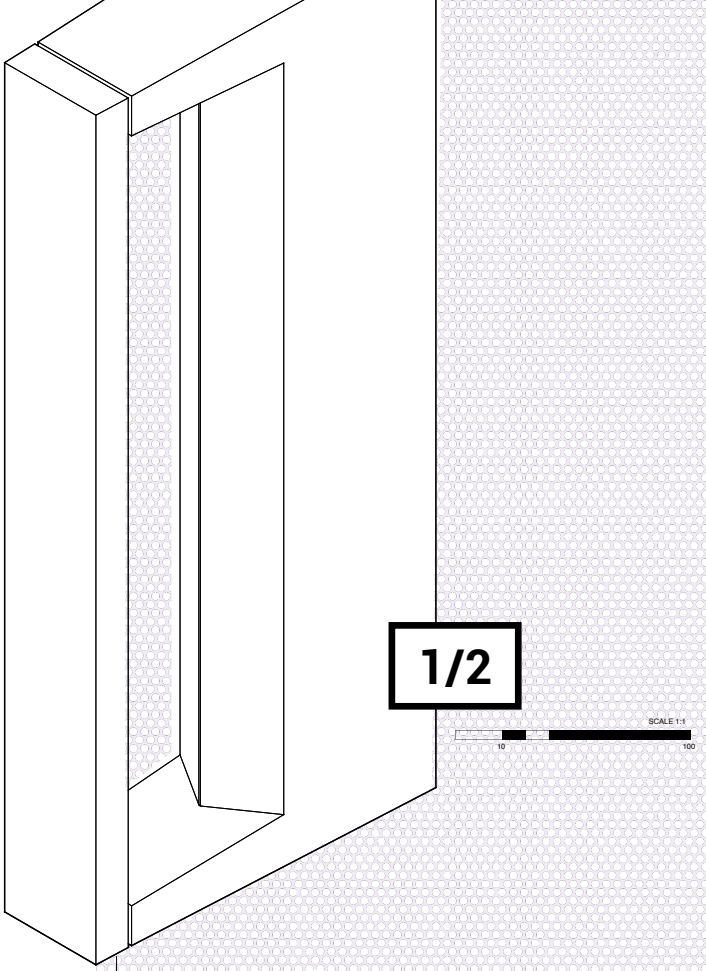

1/2

SCALE 1:1
10
100

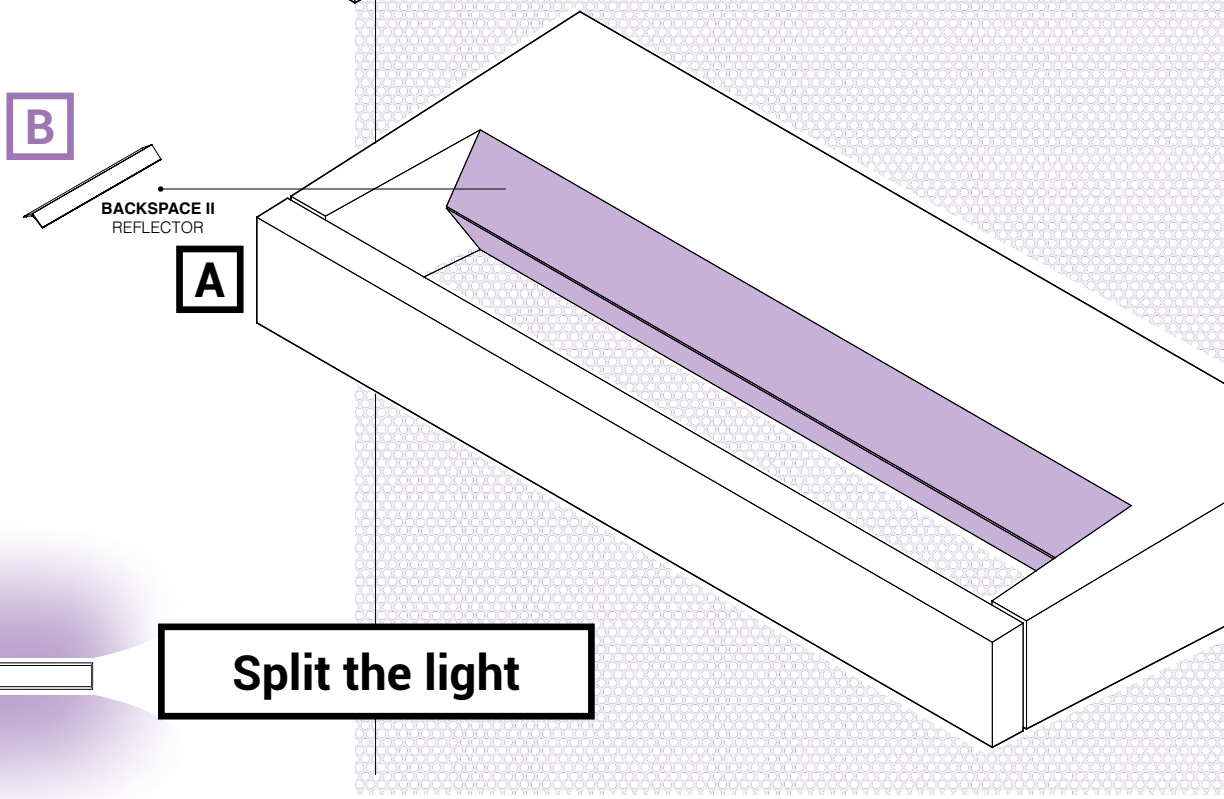



Split the light

FINISH YOUR SPECIFICATION


			BACKSPACE	
			II	II X
FINISH				
BACKSPACE II REFLECTOR	10215 0010 GC		A	A

B

FEMTOLINE W

This slim and multi-functional wall mounted profile creates a cosy effect on the wall. It comes as fixed lengths of 600 and 1200mm and is also available as bespoke wall mounted profile for direct-indirect lighting on vertical surfaces.

deltalight.com/femtoline




FEMTOLINE			W DOWN-UP	
			L 600mm	L 1290 mm
3000K CRI>90	LED (UP) 9W / 840lm / 24V-DC (DOWN) 9W / 840lm / 24V-DC	IP20	**270 63 06 93** ◇	
	LED (UP) 18,2W / 1680lm / 24V-DC LED (DOWN) 18,2W / 1680lm / 24V-DC			**270 63 12 93** ◇
			◇ B ● / W ○	
			220-240V / 50-60Hz	

FEMTOLINE TP

Femtoline TP is designed as a mirror light for bathrooms. The specific linear optics allow for a diffused spread of light to 2 sides of the profile, perfect to light up both the mirror and the person in front of it. Available in 2 finishes and 2 sizes for easy integration into the design of the bathroom.

deltalight.com/femtoline

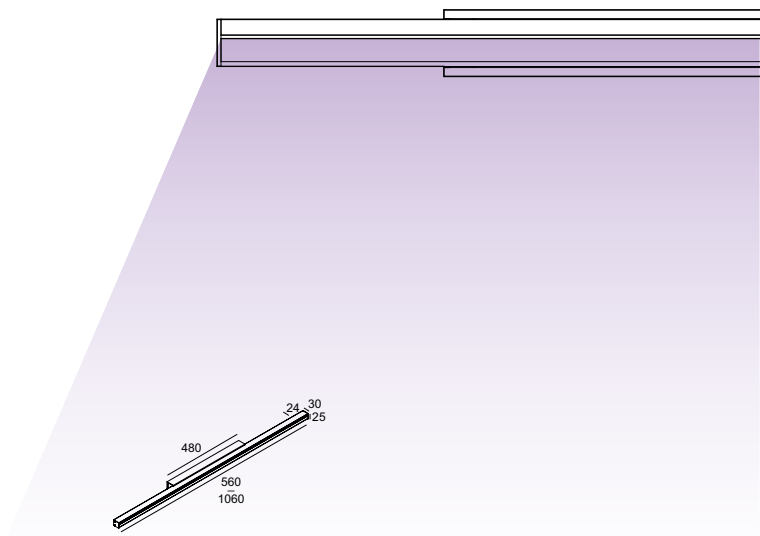


FEMTOLINE			TP WALL 60	TP WALL 100
			L 560mm	L 1060 mm
3000K CRI>90	LEDFLEX 11,9W / 1155lm / 24V-DC	IP44	**270 75 060** ◇	
	LEDFLEX 22,6W / 2205lm / 24V-DC			**270 75 100** ◇
			◇ W ○	
			220-240V / 0 | 50-60Hz	100-240V / 50-60Hz



FEMTOLINE
W DOWN-UP

1/4

SCALE 1:1
10 100

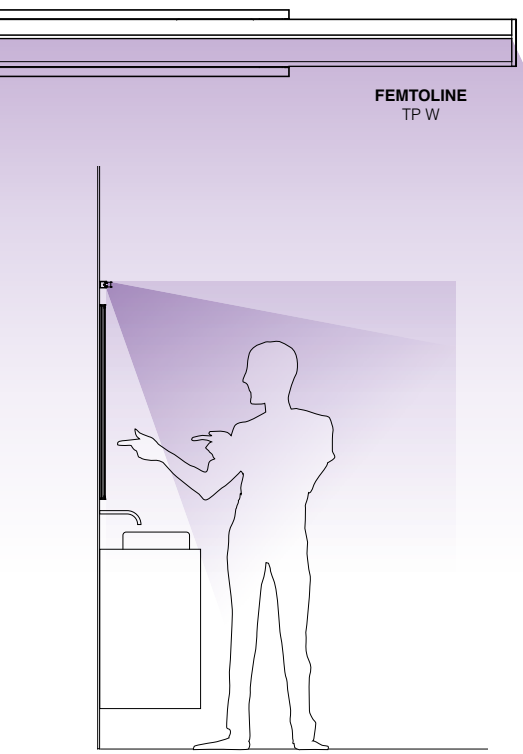

FEMTOLINE
TP W

INDEX

Interior Track Lighting



SPY P 350



FRAGMA P 358



MULTINOVA P 362



SUPER-OH! P 364



LED LINE P 366




INFORM P 366

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

3F TRACK

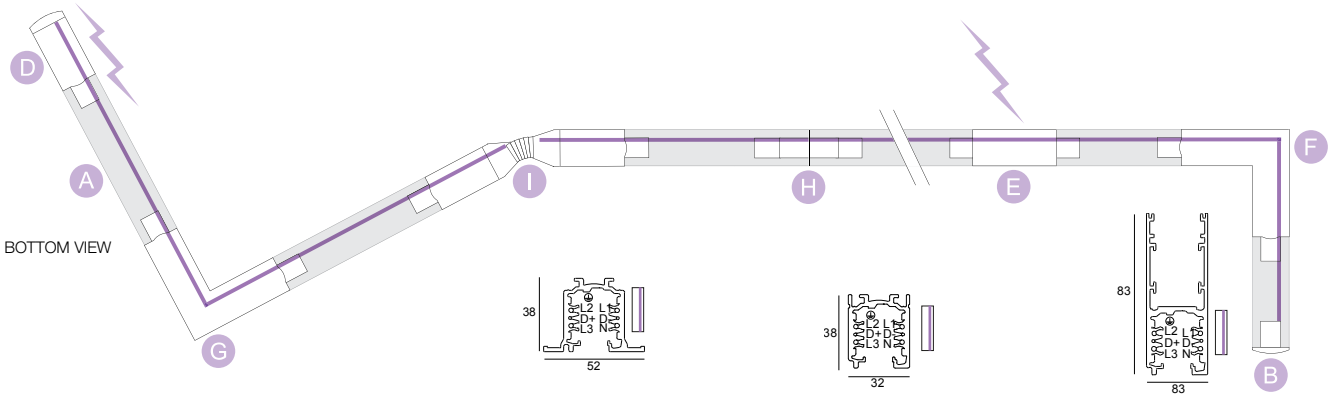

40 x (L + ENDCAP/SUPPLY/CORNERS) x 70
min.5 - max.25

TRACK	3F DIM IN	3F DIM ON	3F DIM H
1 PROFILE			
A TRACK 1m	200 13 410 ◇ ◇ B ● / W ○	200 12 410 ◇ ◇ B ● / W ○	200 14 410 ◇ ◇ B ● / W ○
A TRACK 2m	200 13 420 ◇ ◇ B ● / W ○	200 12 420 ◇ ◇ B ● / W ○	200 14 420 ◇ ◇ B ● / W ○
A TRACK 3m	200 13 430 ◇ ◇ B ● / W ○	200 12 430 ◇ ◇ B ● / W ○	200 14 430 ◇ ◇ B ● / W ○


110-240V / 50-60Hz ◇ IP20 (W = RAL 9010)

2 DIMENSIONS

The length of each profile needs to be defined in mm
and will depend on the shape and construction of the design.

3 ENDCAPS / SUPPLY / CORNERS			
B END CAP	200 13 41 B/W	200 12 41 B/W	200 14 41 B/W
D END SUPPLY 11	200 12 11 B/W + 200 13 11 B/W	200 12 11 B/W	200 14 11 B/W
D END SUPPLY 12	200 12 12 B/W + 200 13 11 B/W	200 12 12 B/W	200 14 12 B/W
E MIDDLE SUPPLY	200 12 14 B/W + 200 13 14 B/W	200 12 14 B/W	200 14 14 B/W
F CORNER 90° OUT	200 12 35 B/W + 200 13 12 B/W	200 12 35 B/W	200 14 35 B/W
G CORNER 90° IN	200 12 34 B/W + 200 13 12 B/W	200 12 34 B/W	200 14 34 B/W
H CORNER 180°	200 12 21 B/W	200 12 21 B/W	200 14 21 B/W
I FLEX CORNER	-	200 12 24 B/W	-

4 FIXATION			
J INSIDE CLIP	200 13 14 01	-	-
K DIRECT FIXATION	-	200 12 02 ANO	-
L SUSPENSION 3,0m	-	200 12 13	200 14 13
M ROD SUSPENSION 1,0m	-	200 12 50 A/B/W	-
N CUTTING TOOL	200 12 01	200 12 01	200 12 01

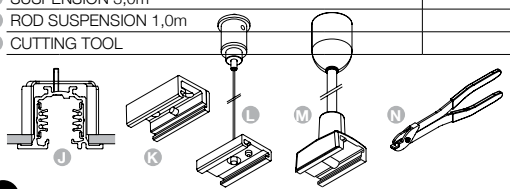

5 CONNECTION			
CURRENT SUPPLY 5 x 0,75mm² 3,0m	-	200 99 53	200 99 53
CONNECTION ST	-	15225 0360 B / W	15225 0360 B / W
CABLE BASE R	-	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S	-	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R 100mm	-	204 00 100 B / W	204 00 100 B / W

	LIGHT MODULE UP
6 LIGHT MODULES UP FOR TRACK 3F DIM H	**SEE SHELFLINE ON PAGE RIGHT**

	LIGHT MODULES DOWN
7 LIGHT MODULES DOWN	**SEE NEXT PAGES**



UPLIGHT FOR TRACK 3F DIM H

SHELFLINE 19

1 PROFILE

PROFILE / m MAX. LENGTH PER PROFILE SECTION 3m	398 03 00 ◇ ◇ ANO ⬤
POLYCARBONATE / m	
SANDBLASTED (SBL)	398 03 05 SBL
CLEAR	398 03 05 CL

2 DIMENSIONS

THE LENGTH OF EACH PROFILE NEEDS TO BE DEFINED IN MM AND WILL DEPEND ON THE SHAPE AND CONSTRUCTION OF THE DESIGN AND THE LIGHT MODULES SELECTED TO GO IN TO EACH PROFILE SECTION.

3 ENDCAPS / SUPPLY / CORNERS

ENDCAP SET (2 PCS.)	398 03 03 01 A

4 FIXATION

SHL19-MOUNTING CLIP SET (10 PCS.)	200 14 06



5m - 24V-DC
NOT MOUNTED


LEDFLEX

		Dividable per 50mm 140 smd LED/m **5W/m 551lm/m** **WHITE**	Dividable per 33,3mm 210 smd LED/m **10W/m 1045lm/m** **WHITE MP**	Dividable per 62,5mm 128 smd LED/m **15W/m 1853lm/m** **WHITE FP**	Dividable per 50mm 160 smd LED/m **20W/m 2470lm/m** **WHITE HP**	Dividable per 62.5mm 224 smd LED/m **18W/m 1460 lm/m** **SOFT DIM**	Dividable per 71,42mm 224 smd LED/m **9,5W/m [1] 1116lm/m** **TW**	Dividable per 50mm 120 smd LED/m **11W/m** **RGB**	Dividable per 62,5mm 96 smd LED/m **19,2W/m [2]** **RGB / TW**
4000K CRI > 90	IN	**21030 0060**	**21030 0140**	**21030 0220**	**21030 0300**				
	OUT (IP65)								
3000K CRI > 90	IN	**21030 0040**	**21030 0120**	**21030 0200**	**21030 0280**				
	OUT (IP65)								
2700K CRI > 90	IN	**21030 0030**	**21030 0110**	**21030 0190**	**21030 0270**				
	OUT (IP65)								
1800K ▸ 3000K CRI > 90	IN					**21030 0020**			
	OUT (IP65)								
2700K ▸ 6000K CRI > 90	IN						**21030 0390**		
	OUT (IP65)								
RGB CRI > 90	IN							**21030 0400**	
	OUT (IP65)								
RGB WW / TW [2] CRI > 90	IN								**21030 0420**
	OUT (IP65)								

LED POWER SUPPLY 24V-DC (MAX. 3M/POWERLINE FOR LEDFLEX > 15W/M) MORE INFO TECHNICAL CHAPTER

NON DIM	24W / IP20	**21012 0160**	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
	150W / IP67	**300 89 24 150**	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	**21012 0181**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP20	**21012 0191**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP67	**21012 0101**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0111**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0121**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
DALI DIM (DIM5)	60W / IP20	**21012 0205**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	100W / IP20	**21012 0225**	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
	60W / IP67	**21012 0135**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0145**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0155**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
CONTROL MORE INFO TECHNICAL CHAPTER										
	RGB / RGB TW DRIVER							**300 90 331**	**300 90 331**	**21032 0010**
	TOUCH CONTROLLER							**300 90 332**	**300 93 330**	**21032 0120**
WDL	24V-DC DIM UNIT						**300 90 010**			
1-10V							**300 90 003 ED1**			
DALI DIM							**300 90 003 ED5**			

[1] 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS
[2] RGB = 11,52W/M - TW = 3,4W/M - TW = 2700-6000K
* TO BE USED AS NON DIM

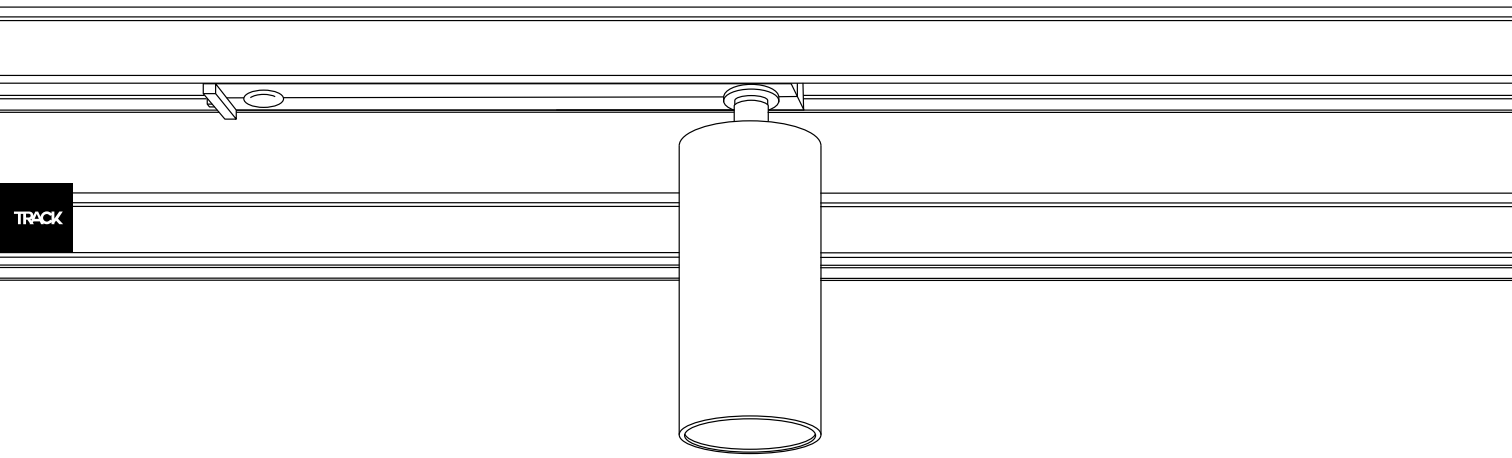

Minimalism, functionality and versatility are the key terms to describe this extensive collection.
The Spy was designed to meet multiple lighting requirements, an ideal solution for accent lighting in residential, hospitality or commercial spaces. The range features low to high lumen packages, narrow to wide beam options, standard or specific LED colours, recessed to surface mounted and track applications, different colour finishes and combinations, and can be equipped with multiple light refining accessories.

Following the constant changes in the world of LEDs and optics and the evolution to better user comfort with more precise optics and better light control, the complete Spy range has been upgraded. The result? Fresh shapes and additional finishing colours, better light comfort through hybrid optics, improved LED colour consistency and new perspectives with Tunable White and Soft Dim.
The renewed Spy family comes in diameters of 27, 39, 52, 66 and 90 millimeters, a range of spotlights to fit any purpose. While the smaller versions come in the lively colours Flemish Bronze, Flemish Gold and Gold Coloured, the bigger Spy's offer Tunable White and Soft Dim solutions in multiple beam angles.

On track, Spy is available in diameters of 52, 66 or 90 millimeters, ranging from 1500 up to 4600lm for several lighting purposes. For specific project demands, Spy offers Soft Dim and Tunable White solutions in different beam angles, ideal to create a particular mood or cosy atmospheres.


With Spy Focus one can opt for different beam angles out of only 1 luminaire, as the circle of light can be widened or narrowed by rotating the front of the fittings' body. As such, every beam angle between 8° and 43° is possible. For Spy 90 on track, the possibility of an adjustable beam angle within 1 luminaire is taken to a higher level. The technology inside LensVector's dynamic beam shaping lenses allow for a wireless adjustment of the beam angle. One can easily adjust the beam angle and the light intensity of these luminaires using CTRL Delta, as dimming of the luminaire and controlling of the beam angle can be done with all smart devices.

deltalight.com/spy

Low to high output, narrow to wide optics, multiple LED colours, different colour finishes, light refining accessories

C

FIND ME ONLINE

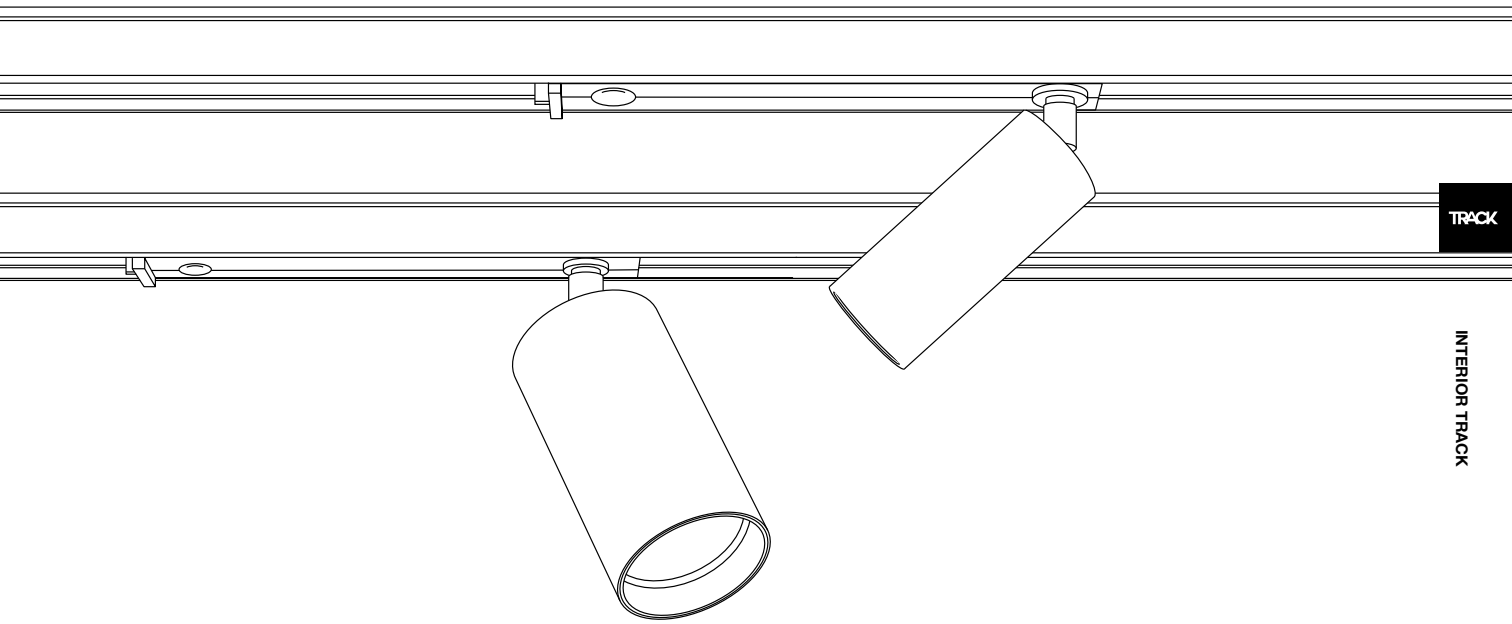


SPY


SPY 52 / FOCUS

TRACK

A




0-90° 355°




0-90° 355°

NEW



0-90° 355°

NEW



0-90° 355°


SPY 52

				ADM	ADM SLIM	WALLWASH ADM	WALLWASH ADM SLIM
3000K CRI>90	WALLWASH LED 8.6W / 1089lm / 500mA	NON DIM	WW			**19885 9300** ◇	**19886 9300** ◇
		DALI				**19885 9305** ◇	**19886 9305** ◇
	LED 12.4W / 1467lm / 700mA	NON DIM	20°	**19834 9320** ◇	**19836 9320** ◇		
		DALI		**19834 9325** ◇	**19836 9325** ◇		
		NON DIM	45°	**19834 9330** ◇	**19836 9330** ◇		
		DALI		**19834 9335** ◇	**19836 9335** ◇		
2700K CRI>90	WALLWASH LED 8.6W / 1041lm / 500mA	NON DIM	WW			**19885 9200** ◇	**19886 9200** ◇
		DALI				**19885 9205** ◇	**19886 9205** ◇
	LED 12.4W / 1403lm / 700mA	NON DIM	20°	**19834 9220** ◇	**19836 9220** ◇		
		DALI		**19834 9225** ◇	**19836 9225** ◇		
		NON DIM	45°	**19834 9230** ◇	**19836 9230** ◇		
		DALI		**19834 9235** ◇	**19836 9235** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA	NON DIM	20°				
		DALI		**19844 9025** ◇	**19845 9025** ◇		
		NON DIM	45°				
		DALI		**19844 9035** ◇	**19845 9035** ◇		
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 500mA	NON DIM	20°				
		DALI DT8		**19881 9025** ◇			
		NON DIM	45°				
		DALI DT8		**19881 9035** ◇			


◇ B ● / W ○

220-240V / 50-60Hz


IP20




0-90° 355°



0-90° 355°



0-90° 355°



0-90° 355°


SPY FOCUS

				LP ADM		MP ADM	
3000K CRI>90	LED 8.6W / 1018lm / 500m	NON DIM	8-43°	**19879 9300** ◇			
		DALI			**19879 9305** ◇		
	LED 17.2W / 2101lm / 500mA	NON DIM	12-45°			**19875 9300** ◇	
		DALI					**19875 9305** ◇
2700K CRI>90	LED 8.6W / 974lm / 500mA	NON DIM	8-43°	**19879 9200** ◇			
		DALI			**19879 9205** ◇		
	LED 17.2W / 2009lm / 500mA	NON DIM	12-45°			**19875 9200** ◇	
		DALI					**19875 9205** ◇


◇ B ● / W ○

220-240V / 50-60Hz


IP20

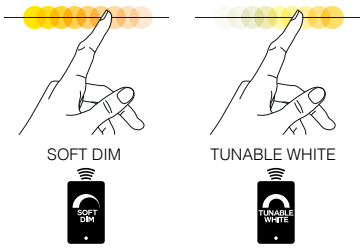

INTER-CHANGEABLE OPTICS

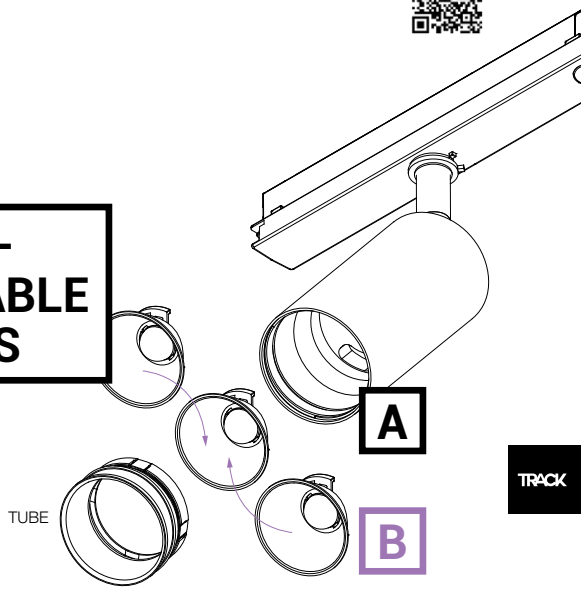


FOCUS

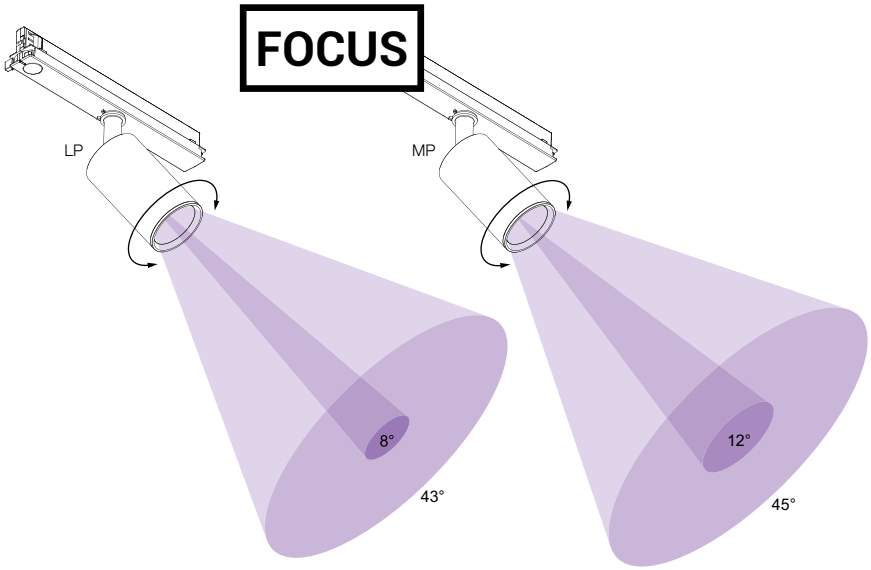

WALLWASH


SPY 66 WALLWASH

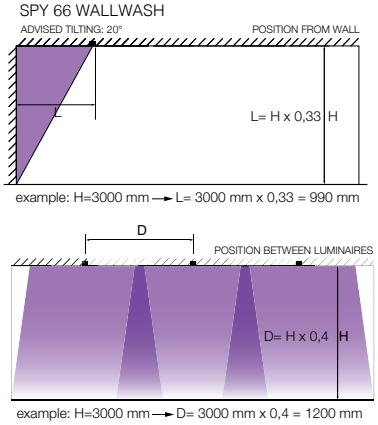


FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY					
		SPY 52				SPY FOCUS	
		ADM	ADM SLIM	WALLWASH ADM	WALLWASH ADM SLIM	LP ADM	MP ADM
TRACK 3F DIM IN / ON / H PAGE 348		R	R	R	R	R	R
FINISH							
SPY 52 TUBE	**19810 0100 B/FBR/FG/GC/W**	R	R				
OPTICS							
REFLECTORS 20°	**19810 0180**	O	O				
REFLECTORS 45°	**19810 0190**	O	O				
HONEYCOMB / LENS / GLASS							
HONEYCOMB SINGLE USE	**19810 0010**	A	A				
HONEYCOMB DOUBLE USE	**19810 0060**	A	A				
LINEAR SPREAD LENS	**19810 0020**	A	A				
SPREAD LENS	**19810 0030**	A	A				
SOFTENING LENS	**19810 0040**	A	A				
GLASS SBL	**19810 0050**	A	A				

SPY 66




0-90° 355°




0-90° 355°

NEW



0-90° 355°

NEW




0-90° 355°

SPY 66				ADM	ADM SLIM	WALLWASH ADM	WALLWASH ADM SLIM
3000K CRI>90	LED 25W / 2811lm / 700mA	NON DIM	18°	**24625 9310** ◇	**24626 9310** ◇		
		DALI		**24625 9315** ◇	**24626 9315** ◇		
		NON DIM	30°	**24625 9320** ◇	**24626 9320** ◇		
		DALI		**24625 9325** ◇	**24626 9325** ◇		
		NON DIM	45°	**24625 9330** ◇	**24626 9330** ◇		
		DALI		**24625 9335** ◇	**24626 9335** ◇		
	LED 17.2W / 2101lm / 500mA	NON DIM	WW			**24631 9300** ◇	**24632 9300** ◇
		DALI				**24631 9305** ◇	**24632 9305** ◇
2700K CRI>90	LED 25W / 2688lm / 700mA	NON DIM	18°	**24625 9210** ◇	**24626 9210** ◇		
		DALI		**24625 9215** ◇	**24626 9215** ◇		
		NON DIM	30°	**24625 9220** ◇	**24626 9220** ◇		
		DALI		**24625 9225** ◇	**24626 9225** ◇		
		NON DIM	45°	**24625 9230** ◇	**24626 9230** ◇		
		DALI		**24625 9235** ◇	**24626 9235** ◇		
	LED 17.2W / 2009lm / 500mA	NON DIM	WW			**24631 9200** ◇	**24632 9200** ◇
		DALI				**24631 9205** ◇	**24632 9205** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 500mA	NON DIM	18°				
		DALI DT8		**24629 9015** ◇			
		NON DIM	30°				
		DALI DT8		**24629 9025** ◇			
		NON DIM	45°				
		DALI DT8		**24629 9035** ◇			


◇ B ● / W ○

220-240V / 50-60Hz


IP20




0-90° 360°



0-90° 360°



0-90° 360°



0-90° 360°


SPY 66				LP ADM		MP ADM	
3000K CRI>90	LED 8.6W / 1018lm / 500m	NON DIM	12°	**24610 9310** ◇			
		DALI			**24610 9315** ◇		
		NON DIM	33°	**24610 9330** ◇			
		DALI			**24610 9335** ◇		
	LED 17.2W / 2101lm / 500mA	NON DIM	18°			**24612 9310** ◇	
		DALI					**24612 9315** ◇
		NON DIM	26° **			**24612 9320** ◇	
		DALI					**24612 9325** ◇
		NON DIM	39° *			**24612 9330** ◇	
		DALI					**24612 9335** ◇
2700K CRI>90	LED 8.6W / 974lm / 500mA	NON DIM	12°	**24610 9210** ◇			
		DALI			**24610 9215** ◇		
		NON DIM	33°	**24610 9230** ◇			
		DALI			**24610 9235** ◇		
	LED 17.2W / 2009lm / 500mA	NON DIM	18°			**24612 9210** ◇	
		DALI					**24612 9215** ◇
		NON DIM	26° **			**24612 9220** ◇	
		DALI					**24612 9225** ◇
		NON DIM	39° *			**24612 9230** ◇	
		DALI					**24612 9235** ◇

* ONLY HONEYCOMB
** NO LINEAR SPREAD LENS

◇ B ● / W ○

220-240V / 50-60Hz


IP20



TUNABLE WHITE




INTER-CHANGEABLE OPTICS

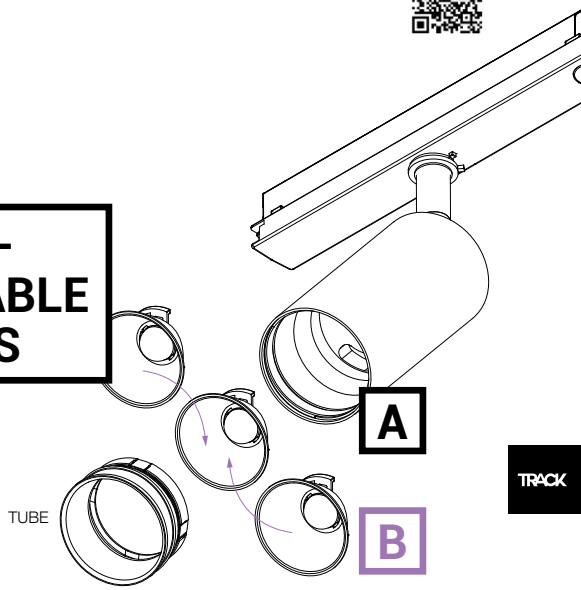


WALLWASH

SPY 66 WALLWASH

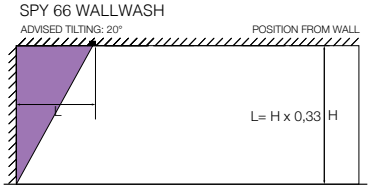

example: H=3000 mm → L= 3000 mm x 0,33 = 990 mm

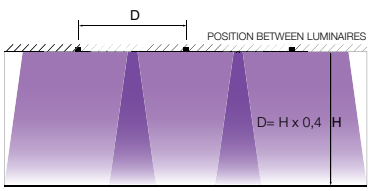


example: H=3000 mm → D= 3000 mm x 0,4 = 1200 mm


FINISH YOUR SPECIFICATION		REQUIREMENT / OPTION / ACCESSORY					
		SPY 66		SPY 66 WALLWASH		SPY 66 LP/MP	
		ADM	ADM SLIM	ADM	ADM SLIM	LP ADM	MP ADM
TRACK 3F DIM IN / ON / H PAGE 348		R	R	R	R	R	R
FINISH							
SPY 66 TUBE	**24611 0100 B / FBR / FG / GC / W**	R	R				
SPY 66 LP/MP TUBE	**24611 0010 B / MMAT / W**					R	R
OPTICS							
REFLECTORS: 18°	**24611 0220**	O	O				
REFLECTORS: 30°	**24611 0230**	O	O				
REFLECTORS: 45°	**24611 0240**	O	O				
HONEYCOMB / LENS / GLASS							
HONEYCOMB SINGLE USE	**24611 0150 B**	A	A				
	24611 0050 B					A	A
HONEYCOMB DOUBLE USE	**24611 0210 B**	A *					
LINEAR SPREAD LENS	**24611 0170**	A *					
	24611 0070					A	A
SPREAD LENS	**24611 0200**	A *					
SOFTENING LENS	**24611 0190**	A *					
	24611 0090					A	A
GLASS SBL	**24611 0160**	A *					
	24611 0060					A	A


* MAX. 500mA

B

SPY 90









SPY 90				ADM	ADM DIM1	ADM DIM5
3000K CRI>90	LED 23.2W / 3169lm / 700mA	1-10V	18°		**19883 9311** ◇	
		1-10V	30°		**19883 9321** ◇	
		1-10V	45°		**19883 9331** ◇	
	LED 36W / 4592lm / 1050mA	NON DIM	18°	**19883 9310** ◇		
		DALI				**19883 9315** ◇
		NON DIM	30°	**19883 9320** ◇		
		DALI				**19883 9325** ◇
		NON DIM	45°	**19883 9330** ◇		
		DALI				**19883 9335** ◇
2700K CRI>90	LED 23.2W / 3031lm / 700mA	1-10V	18°		**19883 9211** ◇	
		1-10V	30°		**19883 9221** ◇	
		1-10V	45°		**19883 9231** ◇	
	LED 36W / 4393lm / 1050mA	NON DIM	18°	**19883 9210** ◇		
		DALI				**19883 9215** ◇
		NON DIM	30°	**19883 9220** ◇		
		DALI				**19883 9225** ◇
		NON DIM	45°	**19883 9230** ◇		
		DALI				**19883 9235** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED 17.8W / 2054lm / 500mA	DALI DT8	18°			**19884 9015** ◇
		DALI DT8	30°			**19884 9025** ◇
		DALI DT8	45°			**19884 9035** ◇
				◇ B ● / W ○		
				220-240V / 50-60Hz		
				□ IP20		

A




TUNABLE WHITE

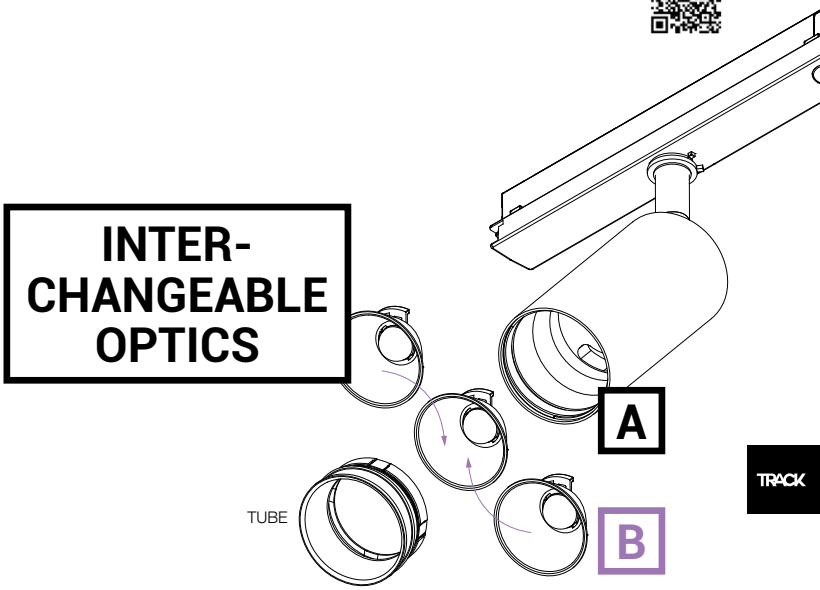

INTER-CHANGEABLE OPTICS

FINISH YOUR SPECIFICATION		REQUIREMENT / OPTION / ACCESSORY		
		SPY 90		
		ADM	ADM DIM1	ADM DIM5
TRACK 3F DIM IN / ON / H PAGE 348		R	R	R
FINISH				
SPY 90 TUBE	**19810 0170 B / FBR / FG / GC / W**	R	R	R
OPTICS				
REFLECTORS: 18°	**19810 0200**	O	O	O
REFLECTORS: 30°	**19810 0210**	O	O	O
REFLECTORS: 45°	**19810 0220**	O	O	O
HONEYCOMB / LENS / GLASS				
HONEYCOMB SINGLE USE	**19810 0110 B**	A	A	A
HONEYCOMB DOUBLE USE	**19810 0120 B**	A	A	A
LINEAR SPREAD LENS	**19810 0140**	A	A	A
SPREAD LENS	**19810 0160**	A	A	A
SOFTENING LENS	**19810 0150**	A	A	A
GLASS SBL	**19810 0130**	A	A	A

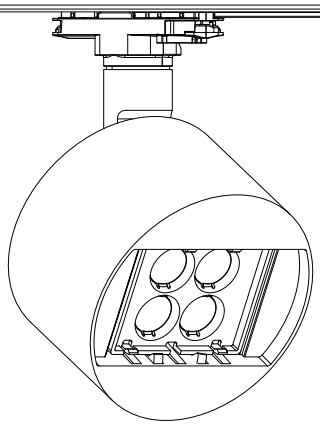

Easily adapts to any variable, thanks to a multitude in optics, lumen packages and dimming possibilities.

FRAGMA

No two lighting schemes are identical. Different geometries, different heights, different needs, there is more than only one factor that impacts a lighting set-up. The Fragma range easily adapts to any variable influencing the project, thanks to a multitude in optics, lumen packages and dimming possibilities.
Its simple design and its circular shape let you use Fragma throughout the project, as it blends in perfectly in any architectural environment, combining clean cut optical performance, light quality and visual comfort.


deltalight.com/fragma

DIMMING

Our Fragma luminaires can be used for simple switch on-switch off settings, but also come in different dimmable versions, be it 1-10V, DALI, with on-board potentiometer or even wireless. 1-10V dimmable Fragma spots allow for simple group dimming on track level, while our other dimmable versions can be used for individual dimming per spot. This going from individual handset dimming with the on-board potentiometer version, over the Dali addressable version controlled by a Dali master, till the wireless version based on CTRL Delta, offering solutions for both small and big installations. All Fragma versions require a 3 phase track. However our wireless and on-board dimmable Fragma spots do not need additional dimming wiring within the 3 phase track and in this way offer an easier approach on flexible and individual dimming.


WDL


CTRL DELTA

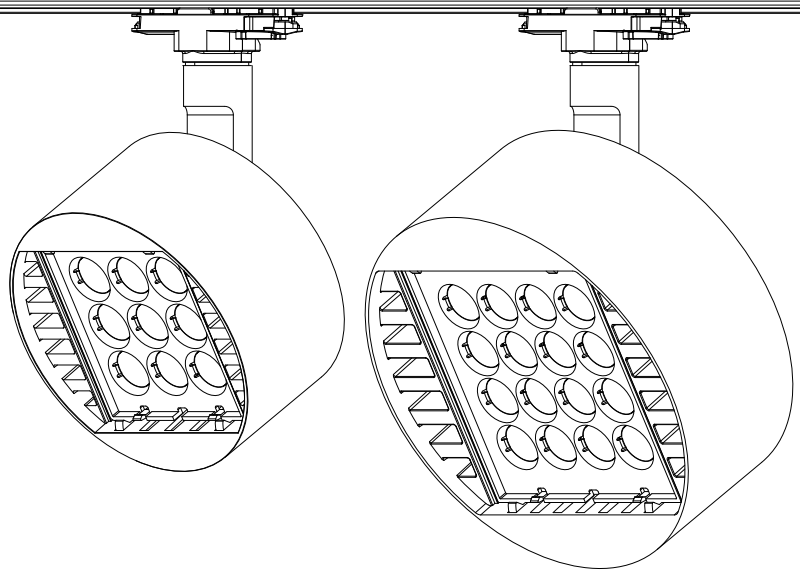


VISUAL WELLBEING

Light is not only about light effects, it also affects the well-being of the passer-by. Good light quality is of main importance, as it influences the passer-by in an indirect way. CRI 90, good Colour Over Angle uniformity and uniform luminance on the emitting surface are some of the characteristics that let Fragma excel in light quality. In a direct way, the passer-by is influenced by the light when directly looking into the light source. To reduce the direct impact on the passer-by, Fragma offers multiple accessories to further improve its visual comfort.

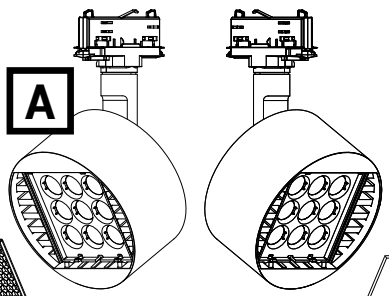

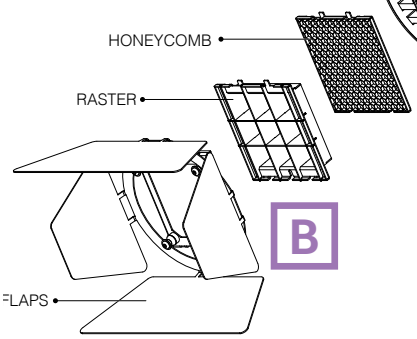



Fragma is based on Delta Light's LED Caset® technology, which combines multiple LEDs with individual collimator lenses per LED to generate a clean-cut light distribution. The individual lenses create a multi-layered light distribution to generate a 8° superspot or 14° beam angle as standard. Be it for the smaller version or the high-power Fragma, by concentrating the lenses together, the light distribution will be the same thanks to the multilayering process.

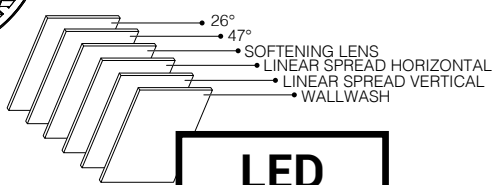

LED CASSET

FRAGMA







TRACK


FRAGMA			S ADM				
			NON DIM	1-10V	DALI	1-10V POTENTIOMETER	WIRELESS
4000K CRI>90	LED 5,2W / 612lm / 900mA	8°	**23614 9410** ◇	**23614 9411** ◇	-	**23614 941P** ◇	**23614 941W** ◇
	LED 10,4W / 1224lm / 900mA	14°	**23612 9410** ◇	**23612 9411** ◇	**23612 9415** ◇	**23612 941P** ◇	**23612 941W** ◇
		26°	**23612 9410** ◇ **+ 23613 0030**	**23612 9411** ◇ **+ 23613 0030**	**23612 9415** ◇ **+ 23613 0030**	**23612 941P** ◇ **+ 23613 0030**	**23612 941W** ◇ **+ 23613 0030**
		47°	**23612 9410** ◇ **+ 23613 0060**	**23612 9411** ◇ **+ 23613 0060**	**23612 9415** ◇ **+ 23613 0060**	**23612 941P** ◇ **+ 23613 0060**	**23612 941W** ◇ **+ 23613 0060**
3000K CRI>90	LED 5,2W / 572lm / 900mA	8°	**23614 9310** ◇	**23614 9311** ◇	-	**23614 931P** ◇	**23614 931W** ◇
	LED10,4W / 1144lm / 900mA	14°	**23612 9310** ◇	**23612 9311** ◇	**23612 9315** ◇	**23612 931P** ◇	**23612 931W** ◇
		26°	**23612 9310** ◇ **+ 23613 0030**	**23612 9311** ◇ **+ 23613 0030**	**23612 9315** ◇ **+ 23613 0030**	**23612 931P** ◇ **+ 23613 0030**	**23612 931W** ◇ **+ 23613 0030**
		47°	**23612 9310** ◇ **+ 23613 0060**	**23612 9311** ◇ **+ 23613 0060**	**23612 9315** ◇ **+ 23613 0060**	**23612 931P** ◇ **+ 23613 0060**	**23612 931W** ◇ **+ 23613 0060**


◇ B ● / W ○

220-240V / 50-60Hz (DALI & WDL)
110-240V / 50-60Hz (NON DIM & 1-10V)

IP20

A








FRAGMA			M ADM				
			NON DIM	1-10V	DALI	1-10V POTENTIOMETER	WIRELESS
4000K CRI>90	LED 10,4W / 1224lm / 900mA	8°	**23615 9410** ◇	**23615 9411** ◇	**23615 9415** ◇	**23615 941P** ◇	**23615 941W** ◇
	LED 23,4W / 2754lm / 900mA	14°	**23611 9410** ◇	**23611 9411** ◇	**23611 9415** ◇	**23611 941P** ◇	**23611 941W** ◇
		26°	**23611 9410** ◇ **+ 23613 0020**	**23611 9411** ◇ **+ 23613 0020**	**23611 9415** ◇ **+ 23613 0020**	**23611 941P** ◇ **+ 23613 0020**	**23611 941W** ◇ **+ 23613 0020**
		47°	**23611 9410** ◇ **+ 23613 0050**	**23611 9411** ◇ **+ 23613 0050**	**23611 9415** ◇ **+ 23613 0050**	**23611 941P** ◇ **+ 23613 0050**	**23611 941W** ◇ **+ 23613 0050**
3000K CRI>90	LED 10,4W / 1144lm / 900mA	8°	**23615 9310** ◇	**23615 9311** ◇	**23615 9315** ◇	**23615 931P** ◇	**23615 931W** ◇
	LED 23,4W / 2574lm / 900mA	14°	**23611 9310** ◇	**23611 9311** ◇	**23611 9315** ◇	**23611 931P** ◇	**23611 931W** ◇
		26°	**23611 9310** ◇ **+ 23613 0020**	**23611 9311** ◇ **+ 23613 0020**	**23611 9315** ◇ **+ 23613 0020**	**23611 931P** ◇ **+ 23613 0020**	**23611 931W** ◇ **+ 23613 0020**
		47°	**23611 9310** ◇ **+ 23613 0050**	**23611 9311** ◇ **+ 23613 0050**	**23611 9315** ◇ **+ 23613 0050**	**23611 931P** ◇ **+ 23613 0050**	**23611 931W** ◇ **+ 23613 0050**

◇ B ● / W ○

220-240V / 50-60Hz

IP20

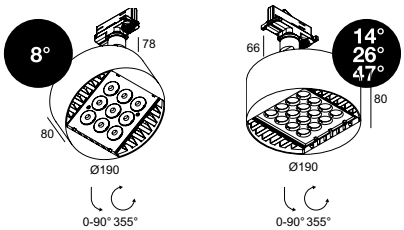

FRAGMA

			L ADM				
			NON DIM	1-10V	DALI	1-10V POTENTIOMETER	WIRELESS
4000K CRI>90	LED 23,4W / 2754lm / 900mA	8°	**23616 9410** ◇	**23616 9411** ◇	**23616 9415** ◇	**23616 941P** ◇	**23616 941W** ◇
	LED 41,6W / 4896lm / 900mA	14°	**23610 9410** ◇	**23610 9411** ◇	**23610 9415** ◇	**23610 941P** ◇	**23610 941W** ◇
		26°	**23610 9410** ◇ **+ 23613 0010**	**23610 9411** ◇ **+ 23613 0010**	**23610 9415** ◇ **+ 23613 0010**	**23610 941P** ◇ **+ 23613 0010**	**23610 941W** ◇ **+ 23613 0010**
		47°	**23610 9410** ◇ **+ 23613 0040**	**23610 9411** ◇ **+ 23613 0040**	**23610 9415** ◇ **+ 23613 0040**	**23610 941P** ◇ **+ 23613 0040**	**23610 941W** ◇ **+ 23613 0040**
3000K CRI>90	LED 23,4W / 2574lm / 900mA	8°	**23616 9310** ◇	**23616 9311** ◇	**23616 9315** ◇	**23616 931P** ◇	**23616 931W** ◇
	LED 41,6W / 4576lm / 900mA	14°	**23610 9310** ◇	**23610 9311** ◇	**23610 9315** ◇	**23610 931P** ◇	**23610 931W** ◇
		26°	**23610 9310** ◇ **+ 23613 0010**	**23610 9311** ◇ **+ 23613 0010**	**23610 9315** ◇ **+ 23613 0010**	**23610 931P** ◇ **+ 23613 0010**	**23610 931W** ◇ **+ 23613 0010**
		47°	**23610 9310** ◇ **+ 23613 0040**	**23610 9311** ◇ **+ 23613 0040**	**23610 9315** ◇ **+ 23613 0040**	**23610 931P** ◇ **+ 23613 0040**	**23610 931W** ◇ **+ 23613 0040**

◇ B ● / W ○

220-240V / 50-60Hz (NON DIM & DALI)
110-240V / 50-60Hz (1-10V & WDL)


IP20

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY		
		FRAGMA		
		S ADM	M ADM	L ADM
TRACK 3F DIM IN / ON / H PAGE 348		R	R	R
HONEYCOMB / LENS / GLASS				
SOFTENING LENS S	**23613 0090**	A *		
WALLWASH LENS S	**23613 0180**	A *		
LINEAR SPREAD LENS S	**23613 0140**	A *		
HONEYCOMB S	**23613 0240 B**	A		
RASTER S	**23613 0270**	A **		
SOFTENING LENS M	**23613 0080**		A *	
WALLWASH LENS M	**23613 0170**		A *	
LINEAR SPREAD LENS M	**23613 0120**		A *	
HONEYCOMB M	**23613 0230 B**		A	
RASTER M	**23613 0260**		A **	
FLAPS M	**23613 0200 B**		A **	
SOFTENING LENS L	**23613 0070**			A *
WALLWASH LENS L	**23613 0160**			A *
LINEAR SPREAD LENS L	**23613 0100**			A *
HONEYCOMB L	**23613 0220 B**			A
RASTER L	**23613 0250**			A **
FLAPS L	**23613 0190 B**			A **

* ONLY FOR 14°
** NOT FOR 8°

MULTINOVA

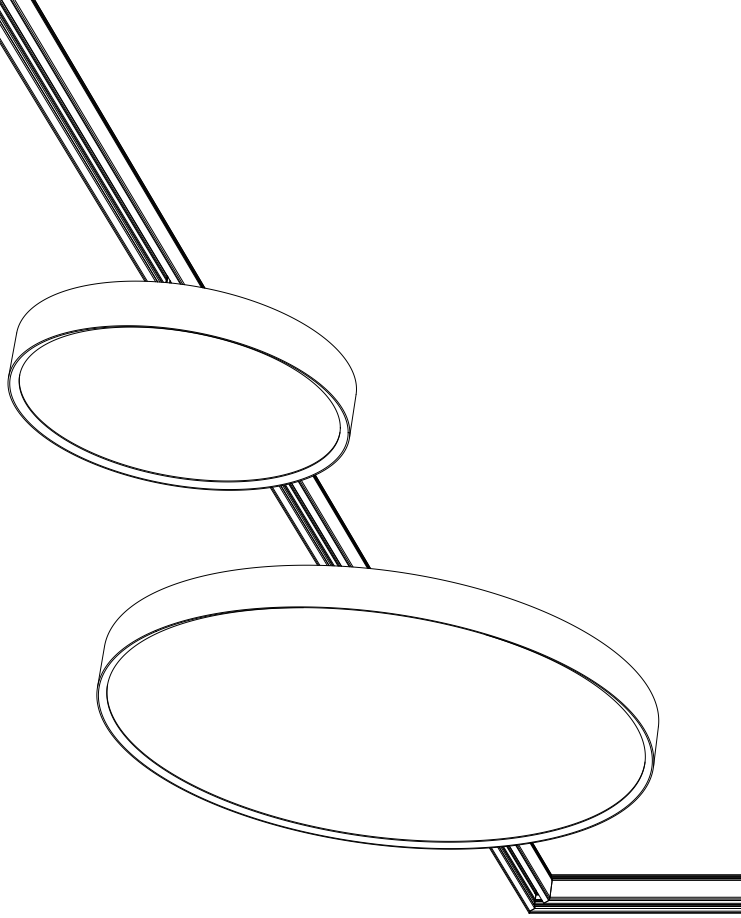


Multinova has something familiar and something fresh at the same time. As a disc of light, Nova refers to the Supernova range, as both families share similarities in looks and ways of installation. But Multinova has some additional features to make it multi-applicable, hence Multi in the name.

With 2 different diameters, a down and down-up version and a limited height of only 69mm, Multinova is perfect to use in different ways. Its small dimensions fit in any residential or hospitality project, as a track mounted luminaire it suits any retail environment and with a prismatic sheet for reduced glare it even adapts in office settings. Moreover, Multinova can be used on our Magnetic profiles for general lighting.

Multinova comes in our standard black or white and can also be finished in the warmer Gold Coloured to enrich its surroundings. To top it off – next to a sandblasted or prismatic optic – one can opt for a smoked sheet at the front for a more decorative touch. When turned on the disc is fully lit, when turned off a deep dark arises, ideal in combination with a Gold Coloured Multinova.


deltalight.com/multinova


A



MULTINOVA 30


			PIVOT ADM		
			SBL	PRISMATIC	SMOKE
				UGR <16	
3000K CRI>90	LED (HO) 14,9W / 2174lm	NON DIM	**27935 9300** ◇	**27936 9300** ◇	**27937 9300** ◇
		DALI	**27935 9305** ◇	**27936 9305** ◇	**27937 9305** ◇
			◇ B ● / W ○		
			220-240V / 50-60Hz		
			□ IP20		






MULTINOVA

			30 ADM		MULTINOVA 55 ADM	
			SBL	PRISMATIC	SBL	PRISMATIC
				UGR <16		UGR <16
3000K CRI>90	LED (HO) 14,9W / 2174lm	NON DIM	**27931 9300** ◇	**27932 9300** ◇		
		DALI	**27931 9305** ◇	**27932 9305** ◇		
	LED 34,4W / 4767lm	NON DIM			**28031 9300** ◇	**28032 9300** ◇
		DALI			**28031 9305** ◇	**28032 9305** ◇
TUNABLE WHITE	LED 9,4W / CRI>90 6500K /1428lm - 2700K / 1338lm	DALI DT8	**27933 9005** ◇	**27934 9005** ◇		
	LED 19,6W / CRI>90 6500K /3075lm - 2700K / 2885lm				**28033 9005** ◇	**28034 9005** ◇
			◇ B ● / W ○			
			220-240V / 50-60Hz			
			□ IP20			




TUNABLE WHITE



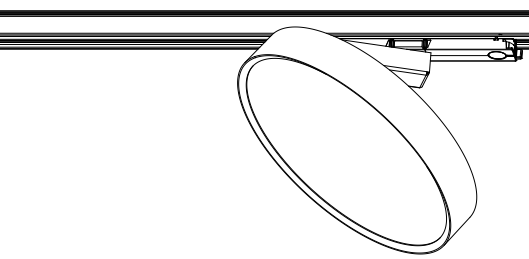

SMOKE
When turned on the disc is fully lit, when turned off a deep dark arises.

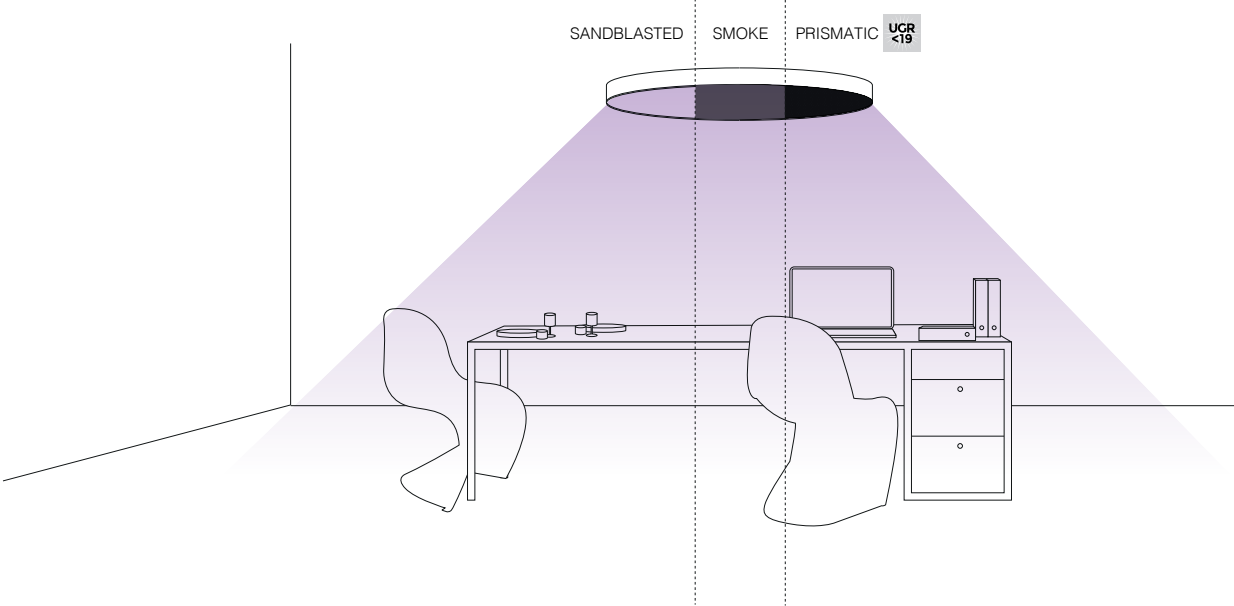



SUPER-OH! XS PIVOT

With its 25cm or 39cm diameter, the Super-Oh XS can be considered as the “little one” of the Super-Oh! family. With only 5cm height, this perfectly curved circle holds a polycarbonate, hiding a cluster of powerleds, specially designed to guarantee a uniform and perfectly balanced light output resulting in a very enjoyable diffuse lighting effect. Its flexible pivot bracket enables the user to tilt the disc up to 45° and rotate 360°. Super-Oh XS is also available for direct mounting or as a pendant.


deltalight.com/super-oh

A





SUPER-OH! XS PIVOT			25 ADM	39 ADM
3000K CRI>80	LED 13,5W / 1470lm	MAINS	**308 22 02 83 ADM ED8** ◇	
	LED 25W / 2940lm			**308 22 03 83 ADM ED8** ◇
			◇ B ● / W ○	
			220-240V / 50-60Hz	
			IP20	

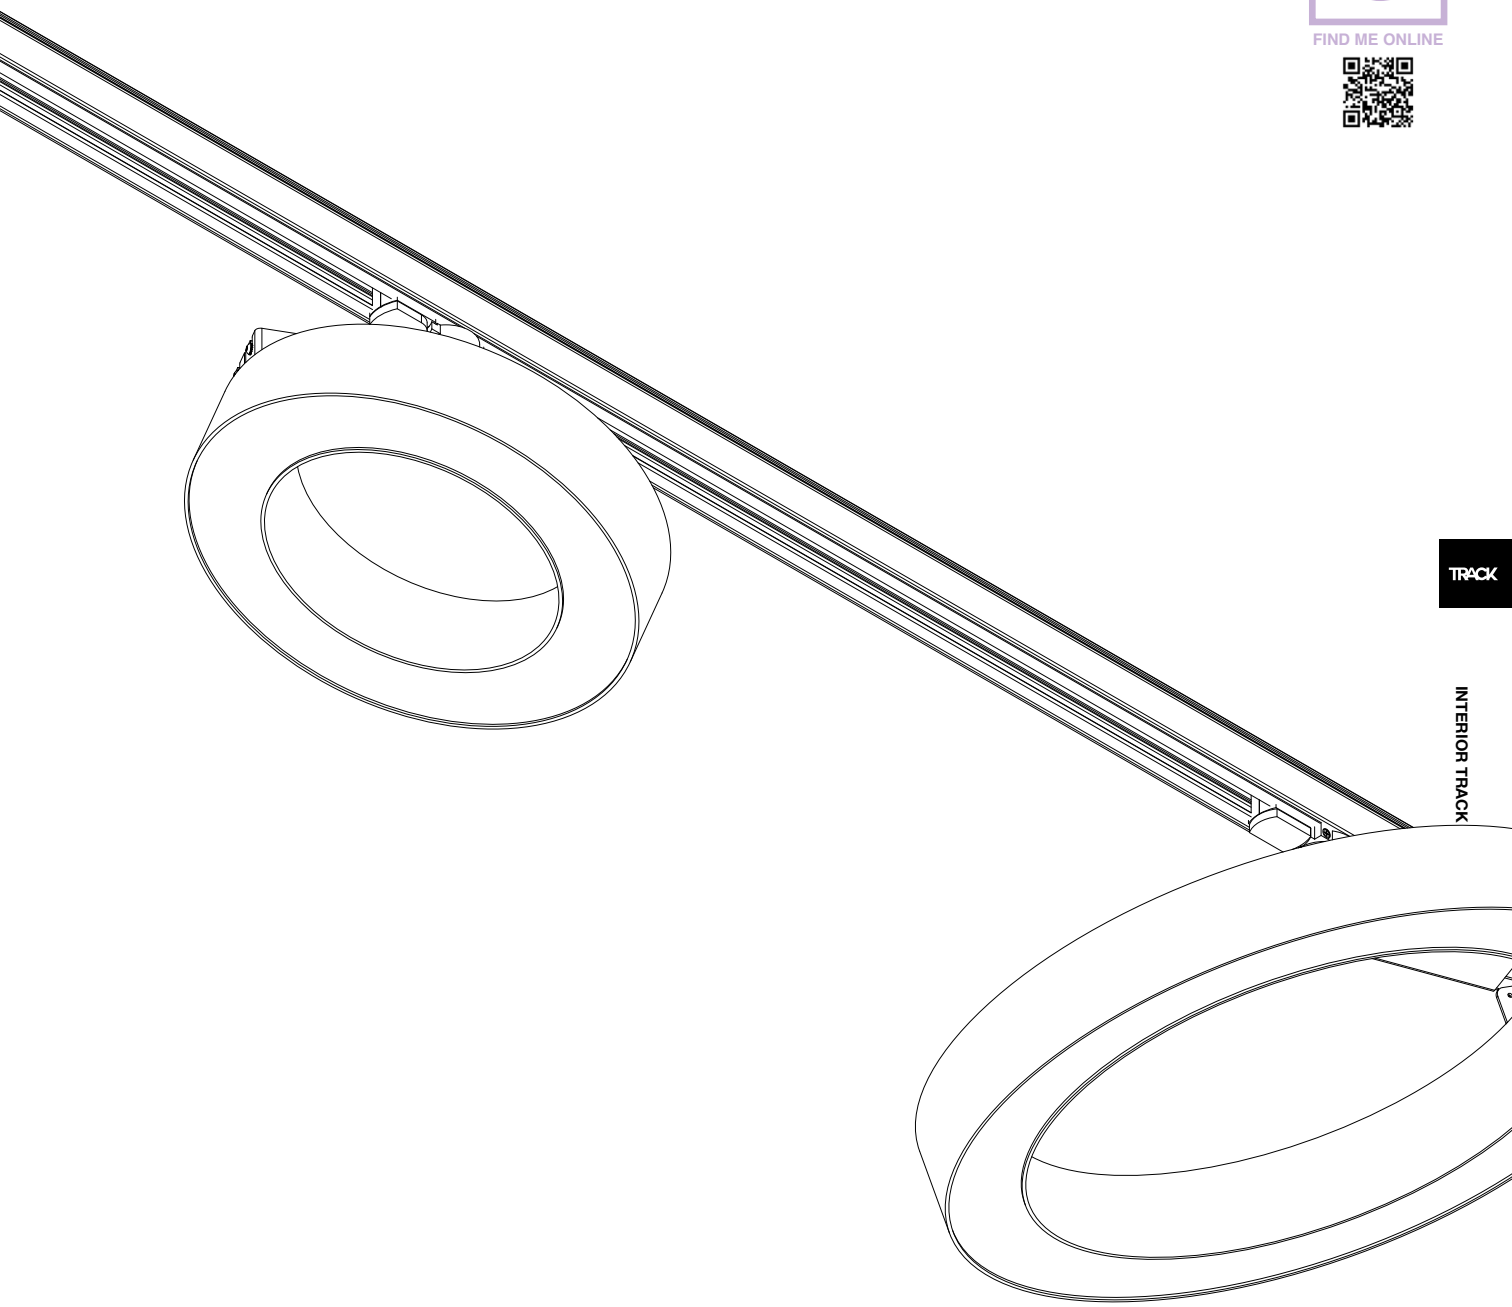

B

FINISH YOUR SPECIFICATION	REQUIREMENT / OPTION / ACCESSORY	
	SUPER-OH! XS PIVOT	
	25 ADM	39 ADM
TRACK 3F DIM IN / ON / H PAGE 348	R	R


LED LINE / INFORM


Inform OK ADM and LED Line OK ADM are two atypical light solutions in its kind. Meant to serve as general or task lighting, these linear lights can be mounted on 3 phase tracks.
Combined with spotlights for accent lighting, these linear solutions are a perfect addition to be used for example in retail or hospitality areas.
While Inform OK is available for 3 phase tracks only, LED Line OK can also be used as module on our magnetic profiles. All of them have one detail in common: the track adapter is mounted in the middle of the profile, allowing them to turn around their center with a more playful light setting as result. LED Line OK is available in Black and White, Inform OK comes in in full Black or White or in combined colours Black-Gold or White-Black.

TRACK

deltalight.com/inform
deltalight.com/ledline

A





NEW


LED LINE / INFORM				LED LINE OK ADM SLIM	INFORM OK ADM SLIM
3000K CRI>90	LED CLUSTER 18W / 2240lm / 500mA	NON DIM	SBL	**29311 9300** ◇	
		DALI		**29311 9305** ◇	
3000K CRI>80	LED CLUSTER 15,2W / 2477lm / 450mA	NON DIM	67°		**29312 8320** ◇
		DALI			**29312 8325** ◇
				◇ B ● / W ○	◇ B-B ●● / B-MMAT ●● / W-B ○● / W-W ○○


220-240V / 50-60Hz

IP20

MLT - MELANOPIC LIGHT TECHNOLOGY

The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

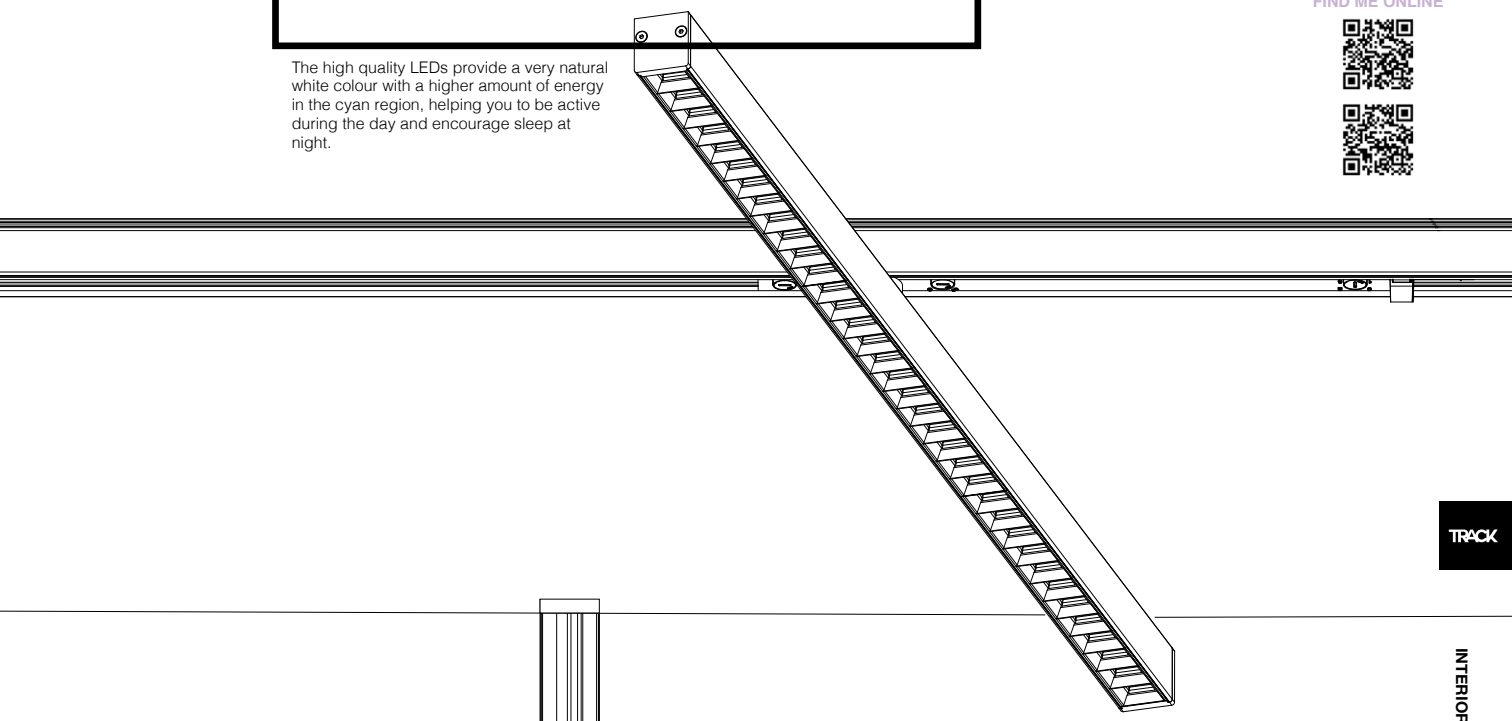

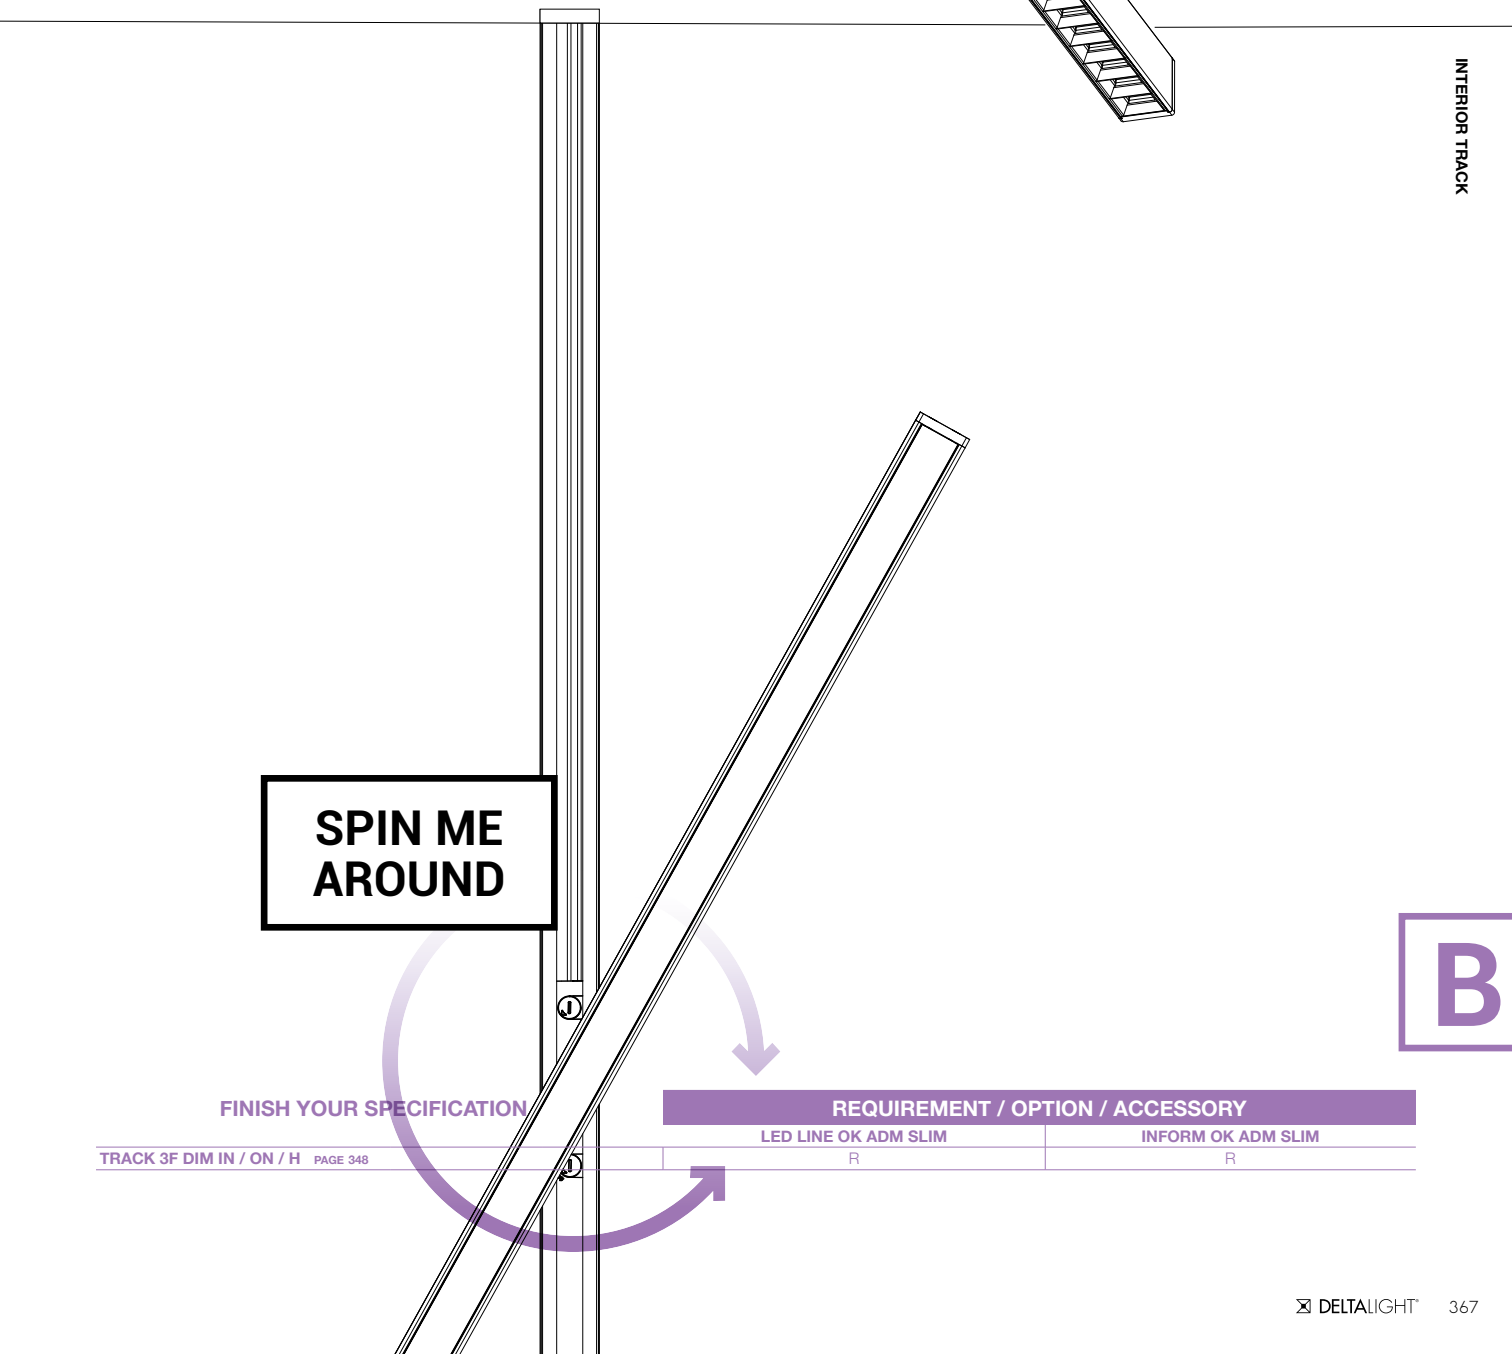

SPIN ME AROUND

FINISH YOUR SPECIFICATION


	REQUIREMENT / OPTION / ACCESSORY	
	LED LINE OK ADM SLIM	INFORM OK ADM SLIM
TRACK 3F DIM IN / ON / H PAGE 348	R	R

Profiles

INDEX


Profiles

New members to the family!




SPLITLINE M P 380


New members to the family!




SHIFTLINE M P 384




SPLITLINE 14
SHIFTLINE 19 P 406




SPLIT-IT P 410



TAGLINE P 414




CONNECT P 418



DOT.COM P 420



FEMTOLINE 25 P 424




FEMTOLINE 35 P 426




FEMTOLINE 35
WALLGRAZER P 430

New members to the family!



FEMTOLINE 35
TR / TRW P 424




FEMTOLINE W P 432



FEMTOLINE 45 P 432

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.



ONE AND ONLY P 438




BORDERLINE P 434




OUTLINER P 436



SHELFLINE P 440



MICROLINE P 442




STREAMLINER P 446



Find out what we create with leftovers of our made-to-measure profiles P 372

I'm not alone. You can find me in other chapters within this Lighting Bible.

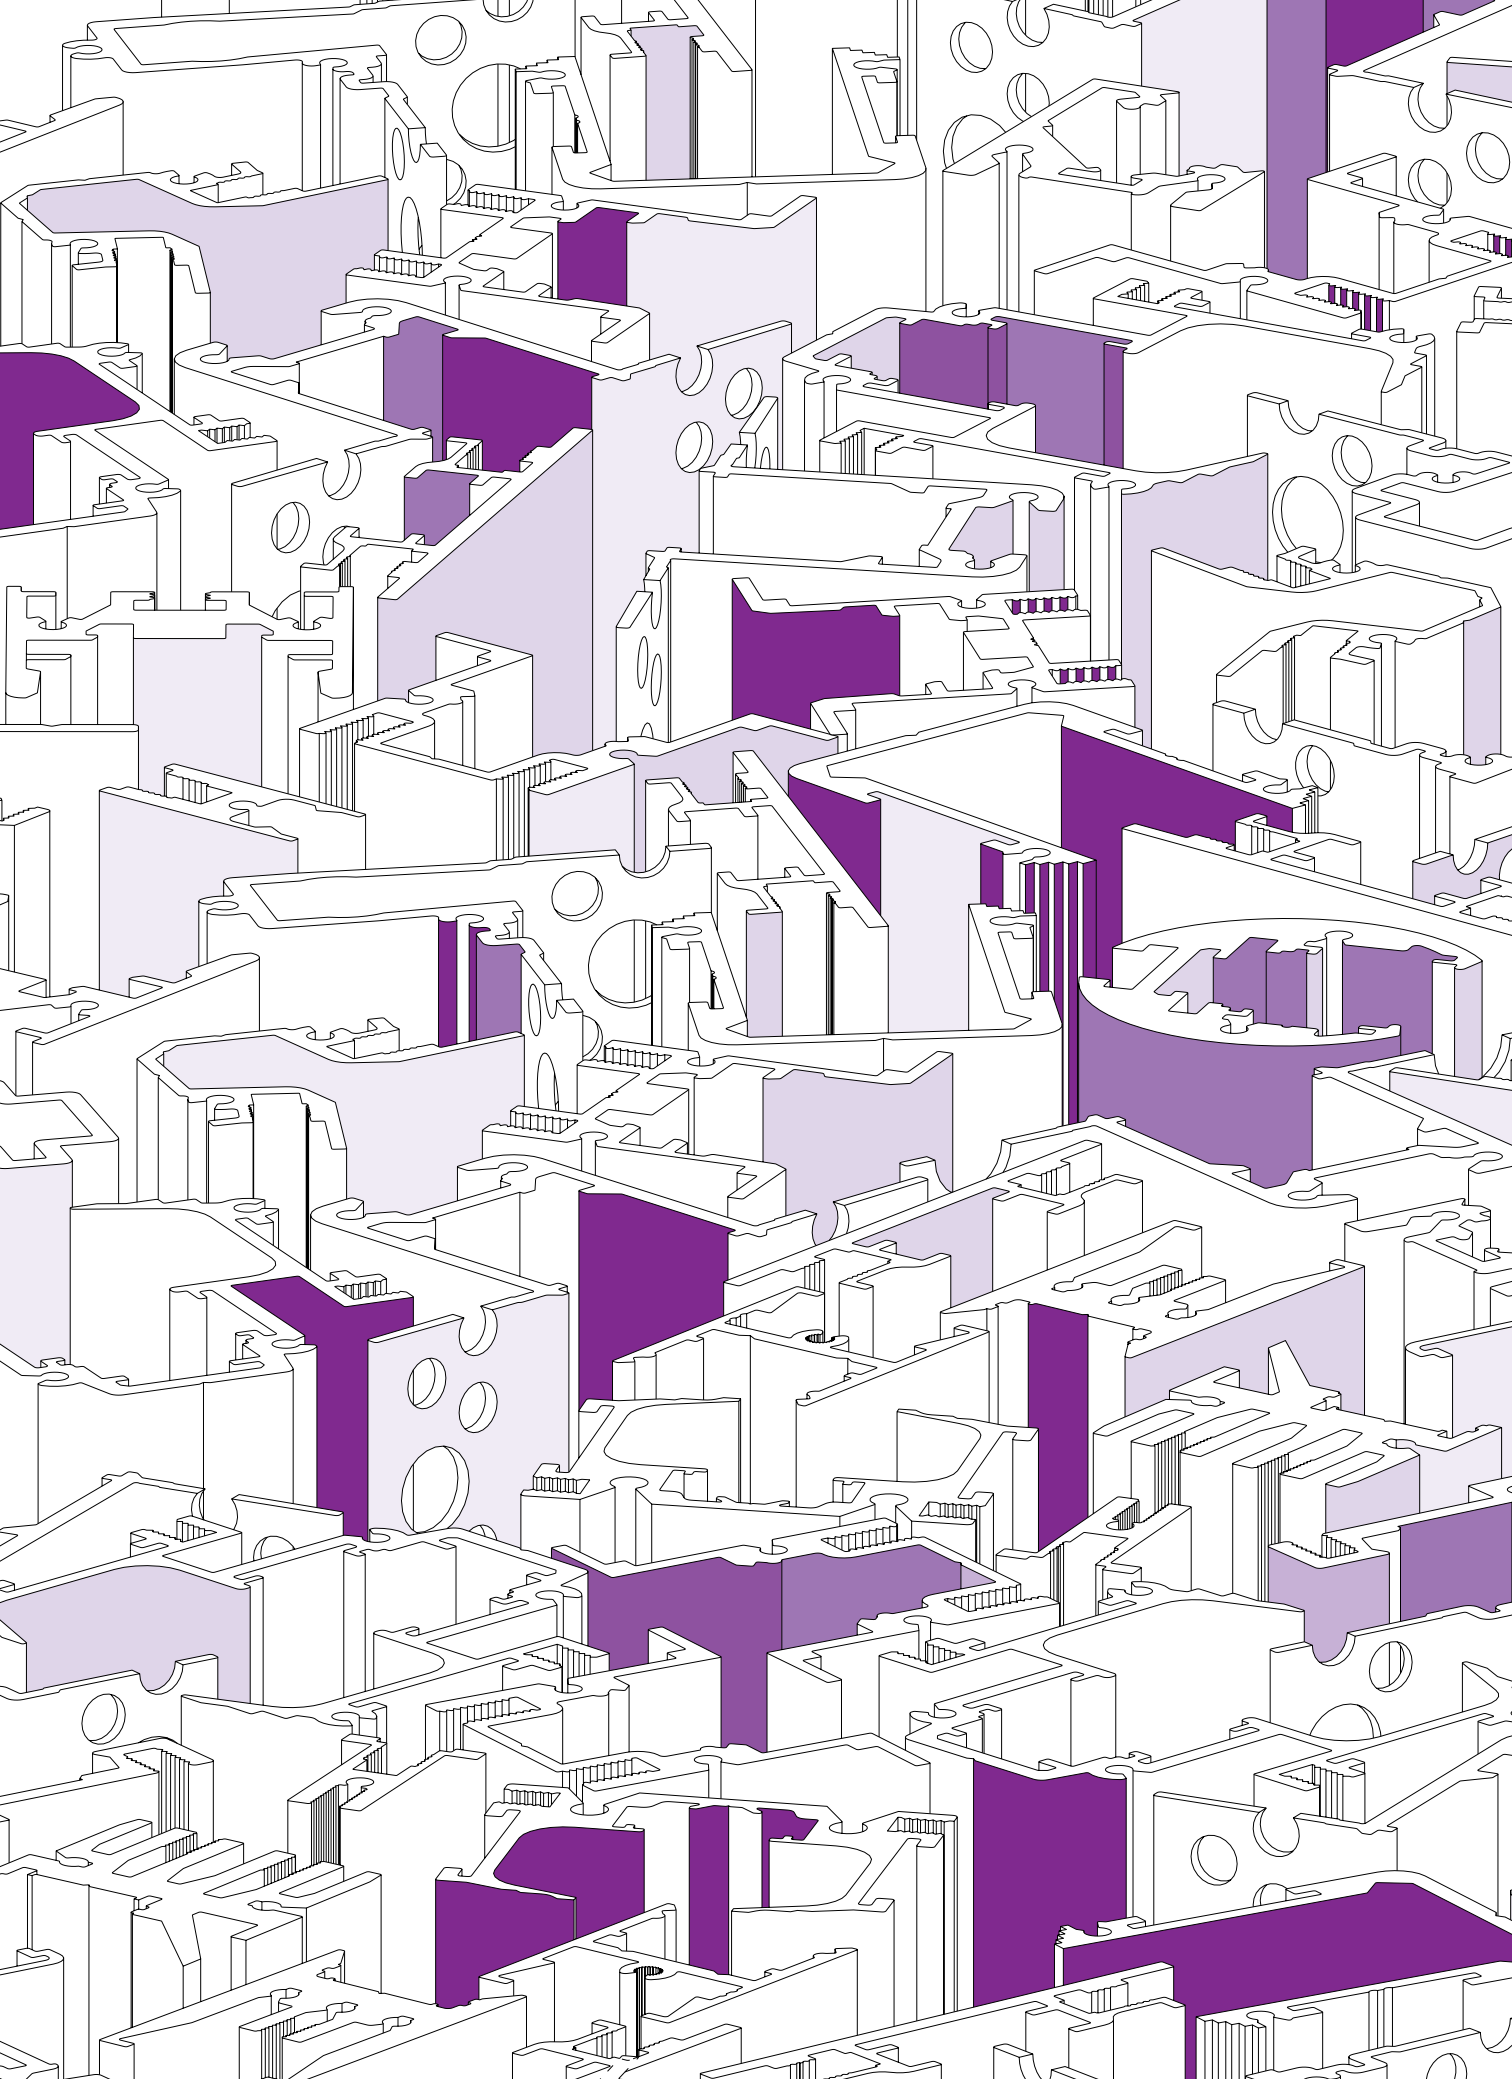


MVRDV
×
DELTALIGHT®


HIGH PROFILE


Delta Light and MVRDV's High Profile collection is now available for purchase. A bold, colourful and conceptual range, inspired by leftover aluminium profiles. The High Profile series is a range of luminaires inspired by leftover aluminium profiles. The design takes a critical look at the manufacturing process, finding both opportunity and beauty in residual elements that would normally be cast aside.
The industrial look is softened by giving the profiles a colour dip; the series comes in pink, white, turquoise and random, adding MVRDV's well-known use of expressive colours to Delta Light's typical colour range.
The High Profile series presents a wall fixture in the shape of an arch, a freestanding model in 2 sizes (small and large) with profiles placed side by side and a cube-shaped pendant luminaire on request.


deltalight.com/high-profile


PRO

A













NEW

HIGH PROFILE			W	F1	F2	C
	2 x T45 max.8W	IP20	**29911 0000** ◇			
	4 x T45 max.8W			**29912 0000** ◇		
	6 x T45 max.8W				**29913 0000** ◇	
	8 x T45 max.8W					**29914 0000** ◇
				◇ P / RND / RW / T		
			-	INCL. 1 x CABLE 3 x 0.75mm 2m + SWITCH + CEE 7/7 PLUG	INCL. 1 x CABLE 3 x 0.75mm 2m + SWITCH + CEE 7/7 PLUG	INCL. 1 x CABLE 3 x 0.75mm INCL. 2 x CABLE SUSPENSION TWIN AUTOM. 1.6m
			E27 / 100-240V / 50-60Hz	E27 / 100-240V / 50-60Hz	E27 / 100-240V / 50-60Hz	E27 / 100-240V / 50-60Hz

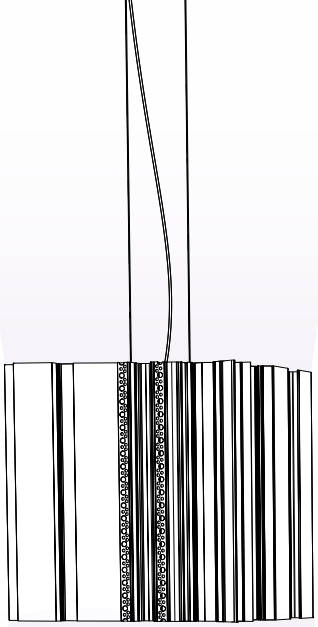



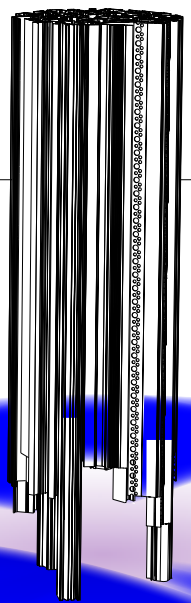

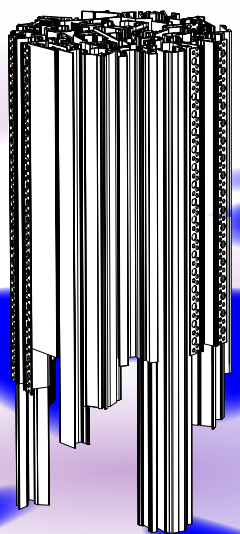


FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

		HIGH PROFILE			
		W	F1	F2	C
INSTALLATION					
CABLE BASE R	203 99 55 ANO/BW				O
CABLE BASE S	203 99 56 ANO/BW				O
CONNECTION TRIMLESS	328 10 03				O
CONNECTION ST	15225 0360 B/W				O
LED LAMP MORE INFO TECHNICAL CHAPTER		O	O	O	O

B

MAGNETIC

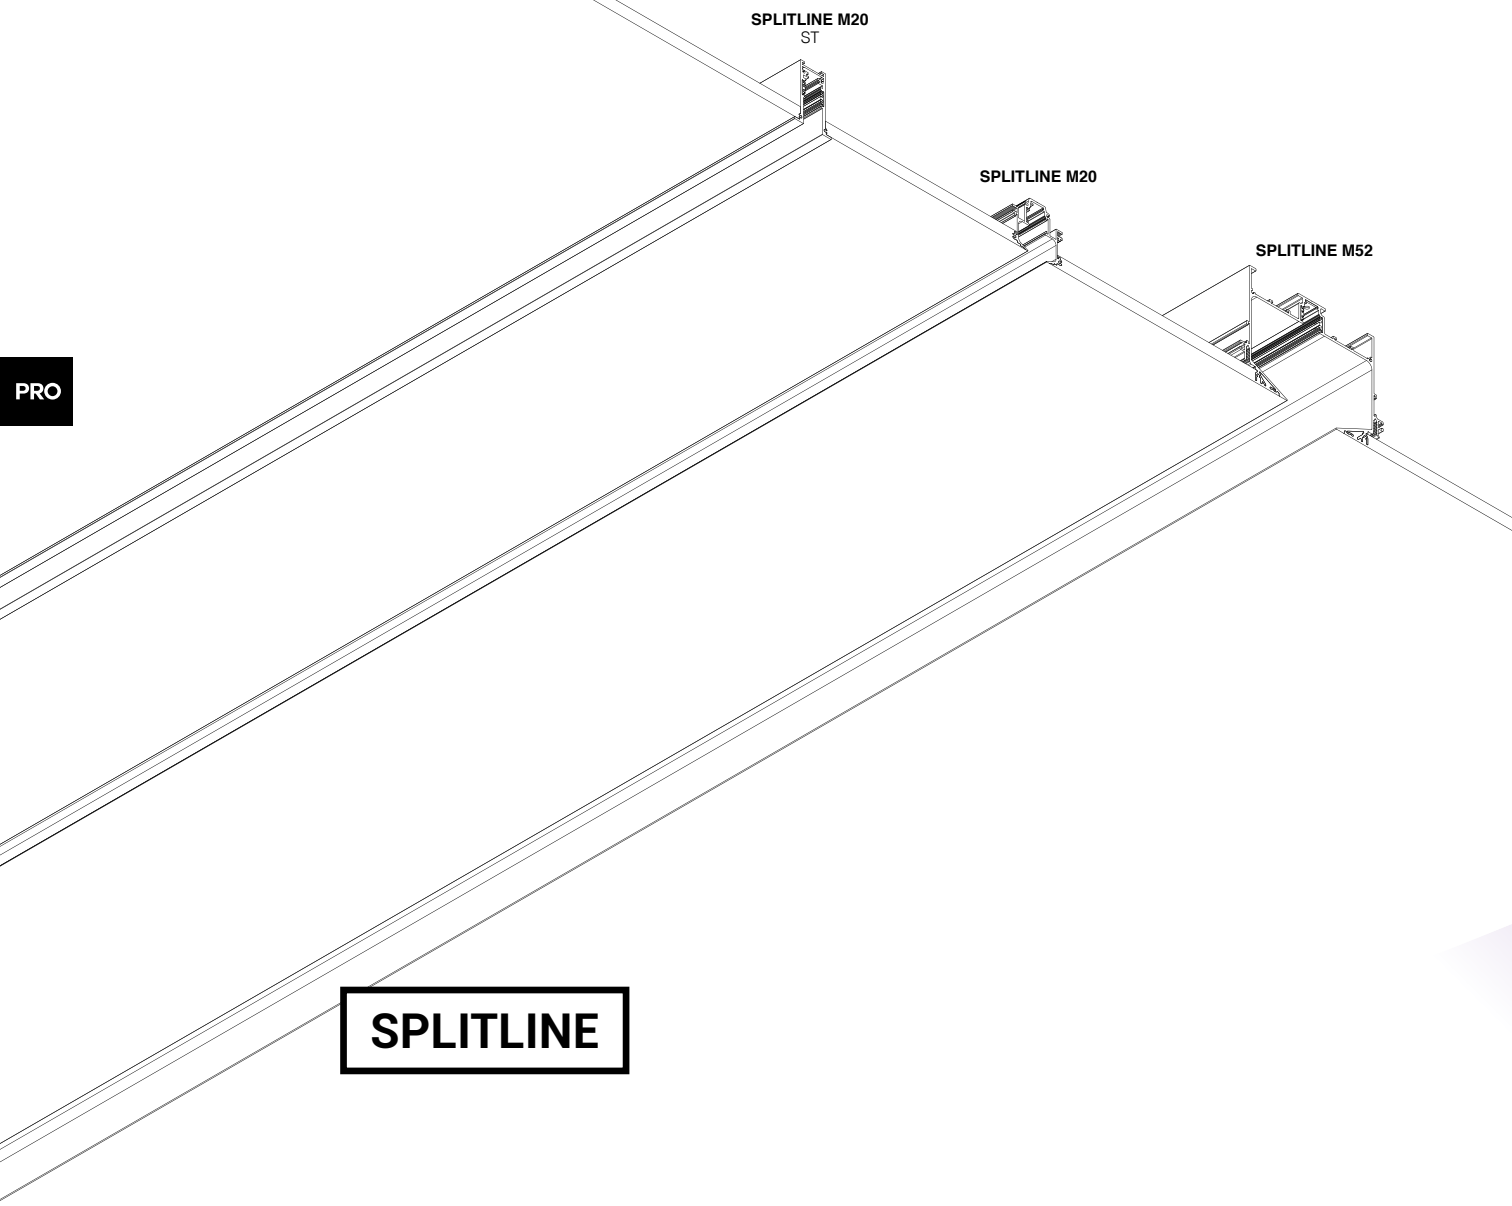


PRO

SPLITLINE

With the magnetic profiles, Delta Light takes it to the next level in the profile section. These profiles offer the highest degree of freedom and flexibility, as all modules have a magnetic fixation. Splitline M20 and M52 allow for a neat, trimless installation, while Shiftline M26 can be used for projects where surface or suspended mounting is required. To create the optimal light setting, multiple light modules are available: spot modules with different beams and lumen packages going up to 2000lm for accent lighting, linear LED lines for general or wallwash lighting and pendant modules for an elegant finish of the room. All modules can be placed toolfree into the profile and repositioned afterwards thanks to their magnetic fixation. Simply click the module into the profile and both mechanical and electrical connection are ensured. As this family of profiles is powered by 48V, Smart 48 can be used for an easy 2-wire dimming/power solution, or even wireless. For individual control of luminaires, one can opt for a DALI controlled system.

deltalight.com/shiftline
deltalight.com/splitline







CABLE VS ROD

SHIFTLINE M26
H + SBL

SHIFTLINE M26
H

SHIFTLINE M26
H

SHIFTLINE M26
L

PRO

PROFILES

TOOLFREE

Simply click the module into the profile and both mechanical and electrical connection are ensured.


ACCENT
LIGHTING

GENERAL
LIGHTING

DECORATIVE
LIGHTING

WALLWASH


SHIFTLINE




FILLER **MASK**


SPLITLINE M

PRO



NEW






SPLITLINE	M20	M20 ST	M52
	57 x (L + 5) x 85 min.9 / max.25	32 x (L + 10) x 90 min.9 / max.25	121 x (L + 5) x 150 min.9 / max.12
1 PROFILE			
PROFILE 1m	420 20 10 00 ◇ ◇ B ●	-	420 52 10 00 ◇ ◇ B ●
PROFILE 2m	420 20 20 00 ◇ ◇ B ●	23397 0020 ◇ ◇ B ● / W ○	420 52 20 00 ◇ ◇ B ●
PROFILE 3m	420 20 30 00 ◇ ◇ B ●	23397 0030 ◇ ◇ B ● / W ○	420 52 30 00 ◇ ◇ B ●
CUSTOMISED PROFILE / m	23301 0000 ◇ ◇ B ●	23397 0000 ◇ ◇ B ● / W ○	24413 0000 ◇ ◇ B ●
2 DIMENSIONS			
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.			
3 JUNCTION / CORNER			
CORNER 180°	420 06 01	-	420 06 01
CORNER 90°	420 20 06 06	23397 0640 B / W	420 52 06 06
CORNER 90° V	420 20 06 17	-	-
CORNER T	23302 0010	-	-
CORNER X	23302 0020	-	-
NEW CORNER SET R 45° S	23302 0030	-	-
NEW CORNER SET R 90° S (R 102mm)	23302 0040	-	-
CORNER SET R 90° (R 240mm)	23301 0690	-	-
LIGHT + AIR KIT	29810 1010	-	-
4 ENDCAP			
ENDCAP (2 PCS.)	420 20 03 01 B	23397 0310 B / W	420 52 03 01 B
5 FIXATION			
RECESSED			
FIXATION SET (2 PCS.)	420 20 14 01		-
INSIDE CLIP (1 PC.)	-	23397 0140	-
SUSPENSION BRACKET (1 PC.)	-	-	420 52 98 01
6 CONNECTION (max.200W/supply/max.50m)			
SUPPLY 48V-DC	420 99 03	420 99 03	420 99 03
CONNECTOR 48V-DC - 180°	420 99 01	420 99 01	420 99 01
CONNECTOR 48V-DC - 0-180°	420 99 02	420 99 02	420 99 02
LIGHT + AIR ADAPTER SET	29810 1020	-	-
	LIGHT MODULES		
7 LIGHT MODULES	**SEE PAGE 388-405**		

How to build your SPLITLINE


Example for Splitline M20

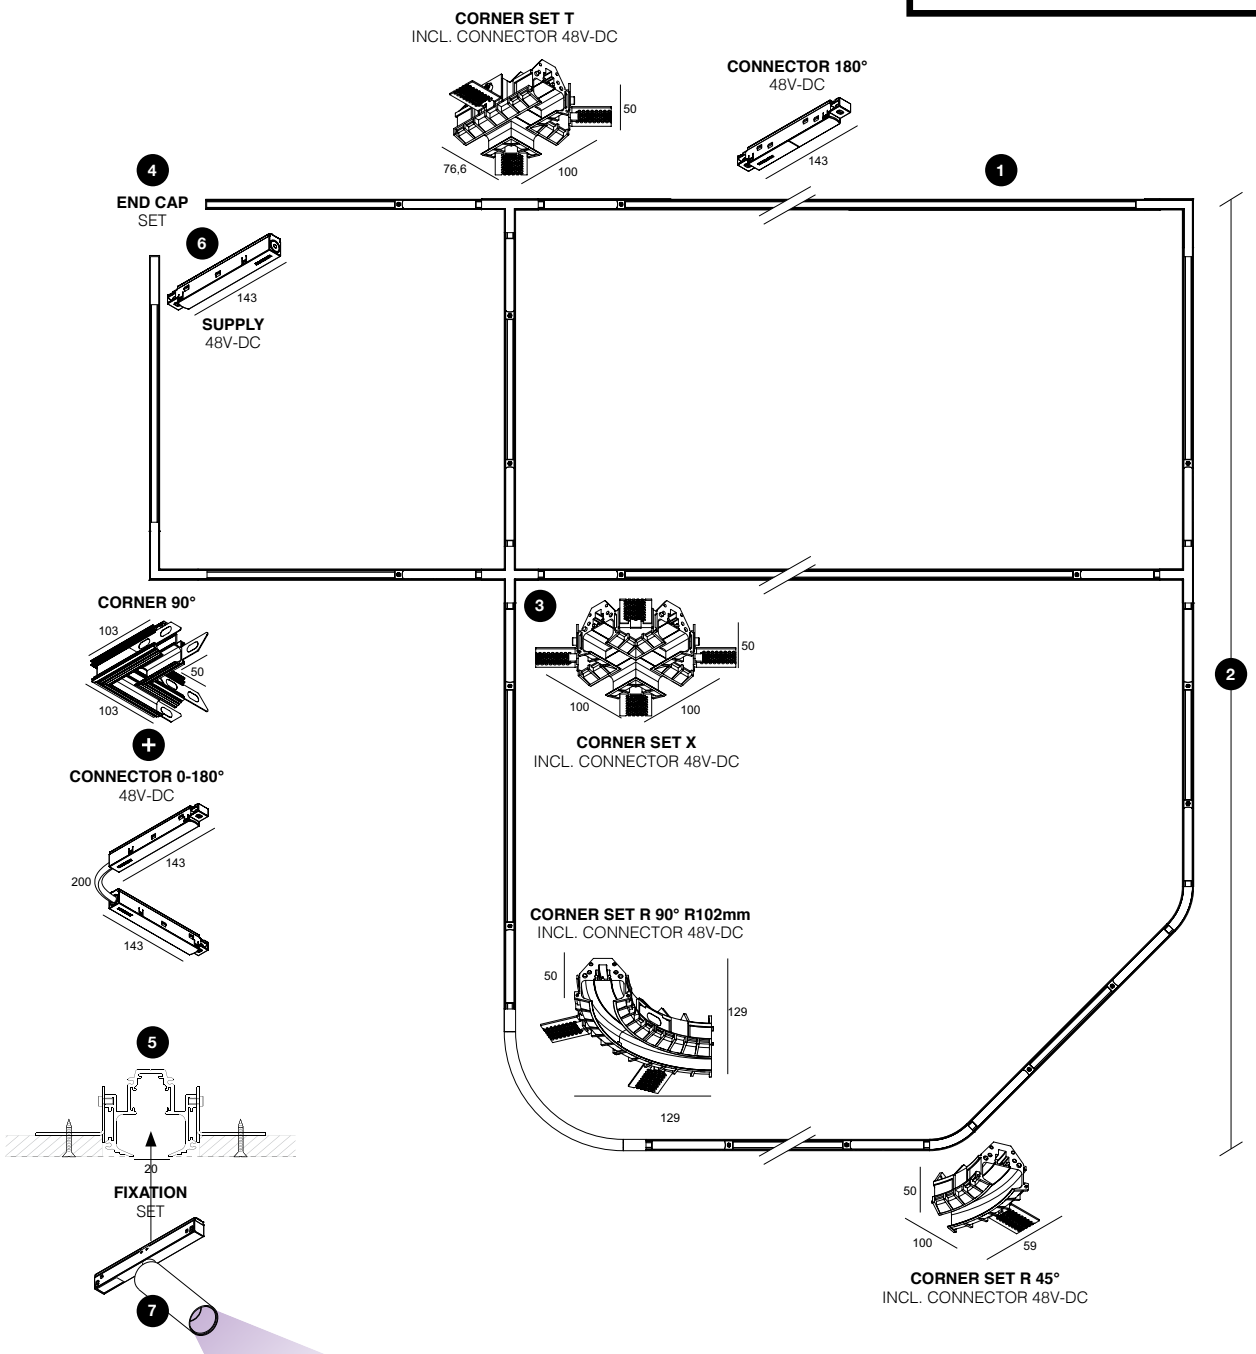

SPLITLINE M ▲IR

Within the **▲IR** range, Delta Light offers a set of solutions that combine light with ventilation, be it as single circular shaped light solutions or as linear kit.
This kit can serve as a stand-alone base for a double Spy spotlight or a more discrete Jum-Oh! fitting, or the kit can be used as an add-on to the Splitline M20 profile to produce a combination of light and ventilation within a slender black line in the ceiling.
By adding the SPM20 - **▲IR** Kit to the profile, the set-up can also be used for air extraction or air supply, a clever and neat combination of lighting and ventilation into 1 single black line. Be it at the end of the black line or in the middle of the construction, the **▲IR** Kit can be freely integrated into the profile, as an additional adapter set can be included in the **▲IR** Kit for easy through-wiring of the 48V.

PRO

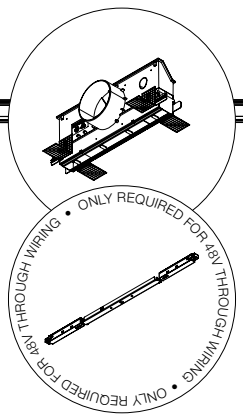


INSTALLATION IN LINE WITH SPM20

A

NEW


SPM20



JUM-OH! 4R AIR

3000K CRI>90	4x LED [A] 2W / 232lm / 700mA	IP20	30°	**29811 9320** ◇
	2x LED [U] 8.6W / 1089lm / 500mA		20°	
			40°	
	LED [U] 12.4W / 1467lm / 700mA		20°	
			45°	
2700K CRI>90	4x LED [A] 2W / 221lm / 700mA		30°	**29811 9220** ◇
	2x LED [U] 8.6W / 1041lm / 500mA		20°	
			40°	
	LED [U] 12.4W / 1403lm / 700mA		20°	
			45°	


◇ B ●



SPY 392 AIR

3000K CRI>90	2x LED [U] 8.6W / 1089lm / 500mA		20°	**29813 9320** ◇
			40°	**29813 9330** ◇
2700K CRI>90	2x LED [U] 8.6W / 1041lm / 500mA		20°	**29813 9220** ◇
			40°	**29813 9230** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○




SPY 522 AIR

3000K CRI>90	LED [U] 12.4W / 1467lm / 700mA		20°	**29815 9320** ◇
			45°	**29815 9330** ◇
2700K CRI>90	LED [U] 12.4W / 1403lm / 700mA		20°	**29815 9220** ◇
			45°	**29815 9230** ◇


deltalight.com/splitline

SINGLE INSTALLATION

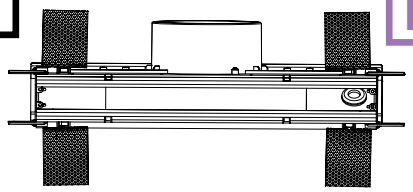


B


AIR



A





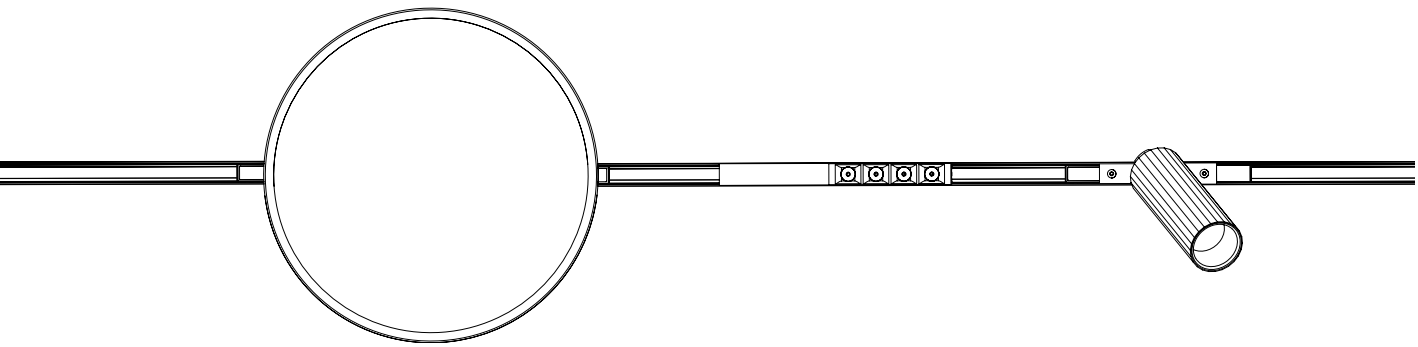



FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY		
			JUM-OH! 4R AIR	SPY 392 AIR	SPY 522 AIR
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
1-10V DIM 16	**300 90 63**	min. 84	R	R	R
DALI 16	**300 90 63**	min. 84	R	R	R
MOUNTING KIT TRIMLESS + VENTILATION					
PLASTERBOARD	**29810 1010**	310 x 50 x 130	R	R	R
FINISH					
SPY 39 TUBE	**24144 0010 B / FBR / FG / GC / W**			R	
or VISOR	**24144 0030 B**			R	
SPY 52 TUBE	**19810 0100 B / FBR / FG / GC / W**				R
HONEYCOMB / LENS / GLASS					
HONEYCOMB SINGLE USE	**19810 0010 B**				A
HONEYCOMB DOUBLE USE	**19810 0060 B**				A
LINEAR SPREAD LENS	**19810 0020**				A
SPREAD LENS	**19810 0030**				A
SOFTENING LENS	**19810 0040**				A
GLASS SBL	**19810 0050**				A

B

SHIFTLINE M







SHIFTLINE			M26L	M26H	M26H + SBL	
1 PROFILE					3000K/CRI 90	2700K/CRI 90
PROFILE 1m			23358 0010 ◇ ◇ B ● / W ○	23359 0010 ◇ ◇ B ● / W ○	-	-
PROFILE 2m			23358 0020 ◇ ◇ PA ● / B ● / BRB ● / W ○	23359 0020 ◇ ◇ PA ● / B ● / BRB ● / W ○	30411 9305 ◇ ◇ B ● / W ○	30411 9205 ◇ ◇ B ● / W ○
PROFILE 3m			23358 0030 ◇ ◇ PA ● / B ● / BRB ● / W ○	23359 0030 ◇ ◇ PA ● / B ● / BRB ● / W ○	30412 9305 ◇ ◇ B ● / W ○	30412 9205 ◇ ◇ B ● / W ○
PROFILE 4m			-	-	30413 9305 ◇ ◇ B ● / W ○	30413 9205 ◇ ◇ B ● / W ○
CUSTOMISED PROFILE / m			23358 0000 ◇ ◇ B ● / W ○	23359 0000 ◇ ◇ B ● / W ○	-	-
MASK 2m			23377 0030 B	-	-	-
POLYCARBONATE / m						
SANDBLASTED (SBL)			-	-	INCLUDED	INCLUDED
LEDFLEX						
8,4W/m - 820lm/m - 48V-DC - DALI CONTROLLED			-	-	INCLUDED	INCLUDED
2 DIMENSIONS						
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.						
3 JUNCTION / CORNER						
CORNER 180°			23358 0620	23359 0620	-	
CORNER 90°			23358 9640 B / W	23359 9640 B / W	-	
CORNER SET R 90°			-	23359 0690 B / W	-	
CORNER SET R 135°			-	23359 0700 B / W	-	
4 ENDCAP						
ENDCAP (2 PCS.)			23358 0320 B / W	23359 0320 B / W	INCLUDED	
5 FIXATION						
SURFACE MOUNTED						
FIXATION SET (2 PCS.)			23358 1410	23359 1410	INCLUDED	
SUSPENDED						
SUSPENSION SINGLE 1,6M (1 PC.)			23359 0510	23359 0510	23359 0510	
SUSPENSION ST			15225 0340 B / W	15225 0340 B / W	15225 0340 B / W	
SUSPENSION ROD 0,8M			23358 1520 B / W	23358 1520 B / W	23358 1520 B / W	
SUSPENSION ROD 0,8M + CONNECTION			23358 1510 B / W	23358 1510 B / W	23358 1510 B / W	
MATRIX CONSTRUCTION						
CEILING FIXATION			23358 9830 B	-	-	
2 PROFILE SUPPORT			23358 9820 B	-	-	
2 PROFILE CONNECTOR 48V-DC			23358 9810 B / GC	-	-	
SIDE SUPPLY 48V-DC			23358 1540 B	-	-	
SUSPENSION ROD 0,8M			23358 1520 B / W	-	-	
SUSPENSION ROD 0,8M + CONNECTION			23358 1510 B / W	-	-	
6 CONNECTION						
POWERBOX						
NON DIM 48V-DC / 100W			23377 0040 B / W	23380 0030 B / W	-	
NON DIM 48V-DC / 100W - MID			23377 0050 B / W	23380 0050 B / W	-	
NON DIM 48V-DC / 100W SUSPENDED			23380 0060 B / W	23380 0060 B / W	23380 0060 B / W	
WIRELESS DIM 48V-DC / 100W			-	23380 004W B / W	-	
WIRELESS DIM 48V-DC / 100W SUSPENDED			23380 007W B / W	23380 007W B / W	-	
SUPPLY 48V-DC (max.200W/supply/max.50m)			420 99 03	420 99 03	INCLUDED	
CONNECTOR 48V-DC - 180° (max.200W/supply/max.50m)			420 99 01	420 99 01	-	
CONNECTOR 48V-DC - 90° (max.200W/supply/max.50m)			23300 9920	23300 9920	-	
SUSPENDED						
CURRENT SUPPLY SET 1,6M TRANSPARENT	for MDL	2X0,75MM²	23359 2120	23359 2120	-	
	for DALI	4X0,75MM²	23359 2140	23359 2140	23359 2140	
	for MDL+UP	4X0,75MM²	-	23359 2340	-	
	for DALI+UP	6X0,75MM²	-	23359 2160	-	
CURRENT SUPPLY SET 1,6M BLACK	for MDL	2X0,75MM²	23359 2220	23359 2220	-	
	for DALI	4X0,75MM²	23359 2240	23359 2240	23359 2240	
	for MDL+UP	4X0,75MM²	-	23359 2440	-	
	for DALI+UP	6X0,75MM²	-	23359 2260	-	
CONNECTION ST			15225 0360 B / W	15225 0360 B / W	15225 0360 B / W	
CABLE BASE R			203 99 55 ANO / B / W	203 99 55 ANO / B / W	203 99 55 ANO / B / W	
CABLE BASE S			203 99 56 ANO / B / W	203 99 56 ANO / B / W	203 99 56 ANO / B / W	
COVERSET R		100MM	204 00 100 B / W	204 00 100 B / W	204 00 100 B / W	

	LIGHT MODULES
7 LIGHT MODULES	**SEE PAGE 388-405**

PRO

MATRIX
ON NEXT PAGE

A

deltalight.com/shiftline


How to build your SHIFTLINE

Example for Shiftline M26 H

A GLIMPSE OF ME ON PAGE 48 / 50

C

FIND ME ONLINE

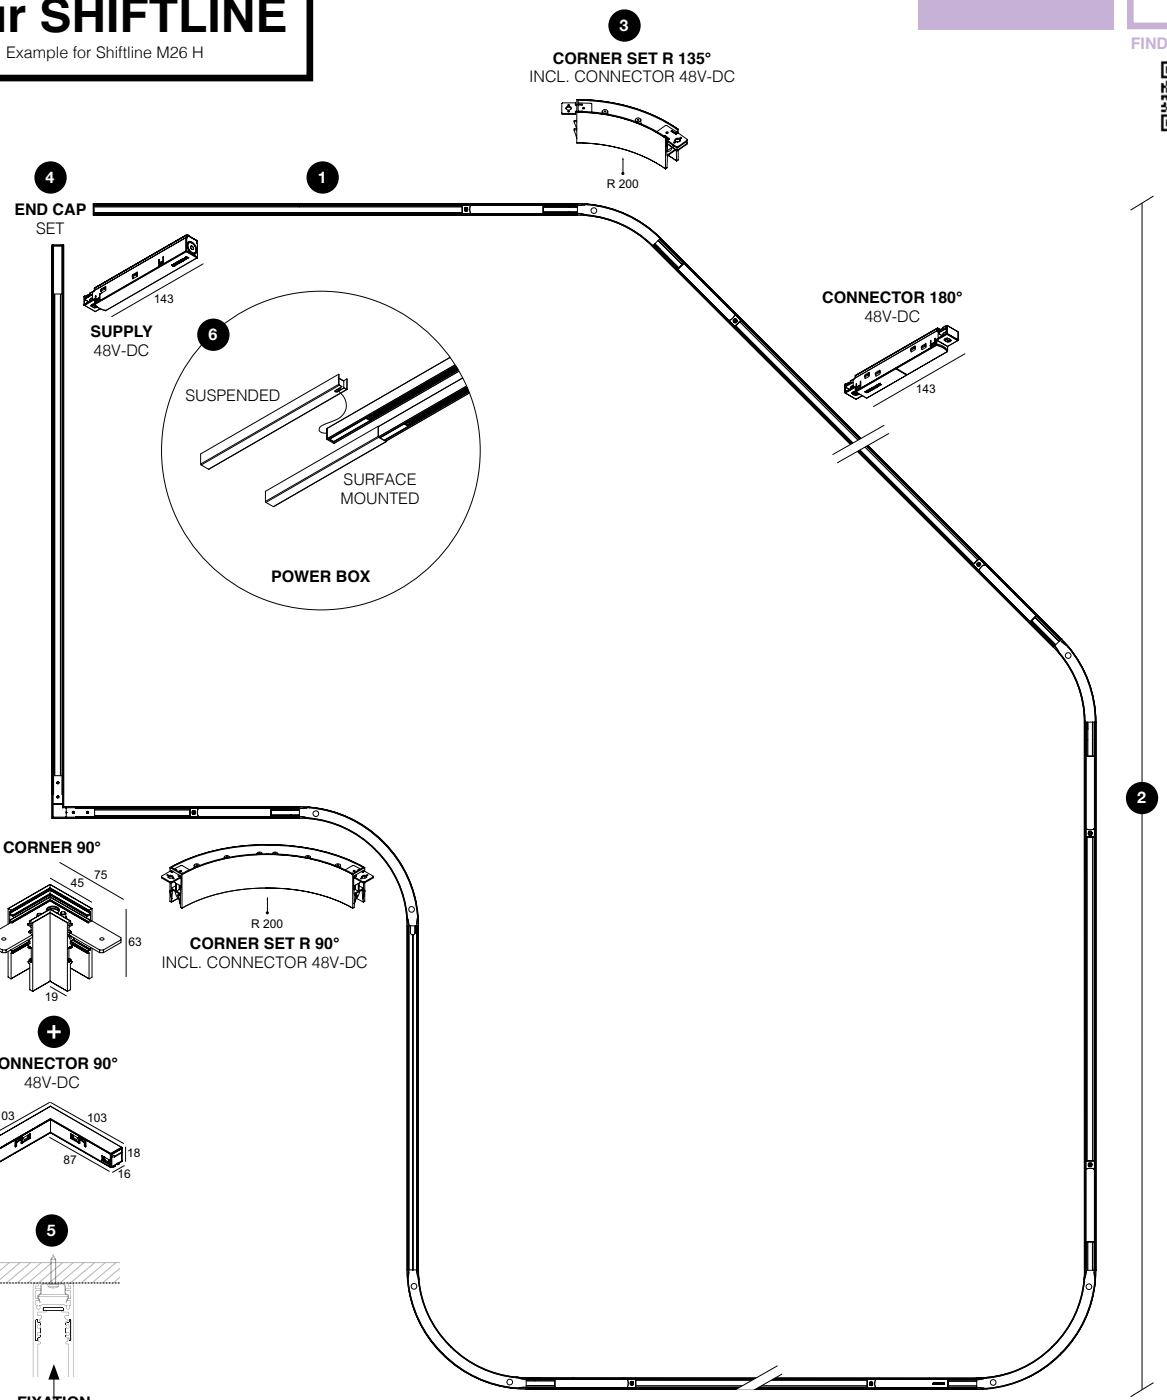

PRO

PROFILES

B

Merging our Shifline M26 H and Tagline profiles into 1, is a perfect example of **1 + 1 = 3.**
The combination of ultimate flexibility with the fine line of light running next to it adds to possible applications for the Shiftline M26 H, as accent lights can be combind with general light without limitations.
Boost your creativity by plugging in any light module you want in the magnetic profile without interrupting the continuous light of Tagline that runs along.
The DALI-powerd 48V solution allows for an easy switch between settings:


Go for **ALL ON**
and light up all light modules at the same time, including the linear Tagline

Go for **ONLY ACCENT**
to switch on the magnetic modules and create a cosy setting by highlighting the accents you prefer

Go for **ONLY GENERAL**
and use the fine line of light for a soft general light effect

Applications are unlimited, but some examples could be to use it in hallways, above the kitchen counter or the bar, as a grid in a restaurant setting, and so on.
Areas where this dynamic solution can transform the atmosphere within the room with a twist of the light.


SLM26 H + SBL

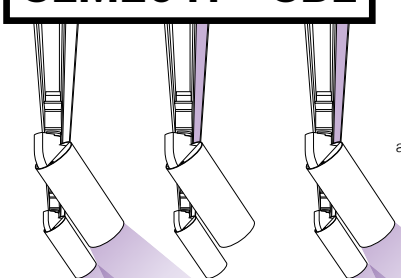

SHIFTLINE M

Unlimited flexibility is what the Shiftline M26 L Matrix system stands for. These clever add-ons to the Shiftline M26 L profiles allow you to couple multiple profiles to each other and create any structure you want. Our 2P Connector not only assures the electrical connection between two profiles, it also serves as a decorative element as its cylindrical shape is perfectly in contrast with the straight lines of the profile. Moreover, this contrast can be enhanced by choosing the Gold Coloured finish for these nodes, a bold statement where design meets functionality.
To complete the Matrix system, an additional ceiling fixation and a non electrical connector allow for unlimited creativity as one is free to connect multiple profiles any way they want. Moreover, the new Side Supply finishes it off in style as it is designed according to the looks of the 2P Connector.


PRO

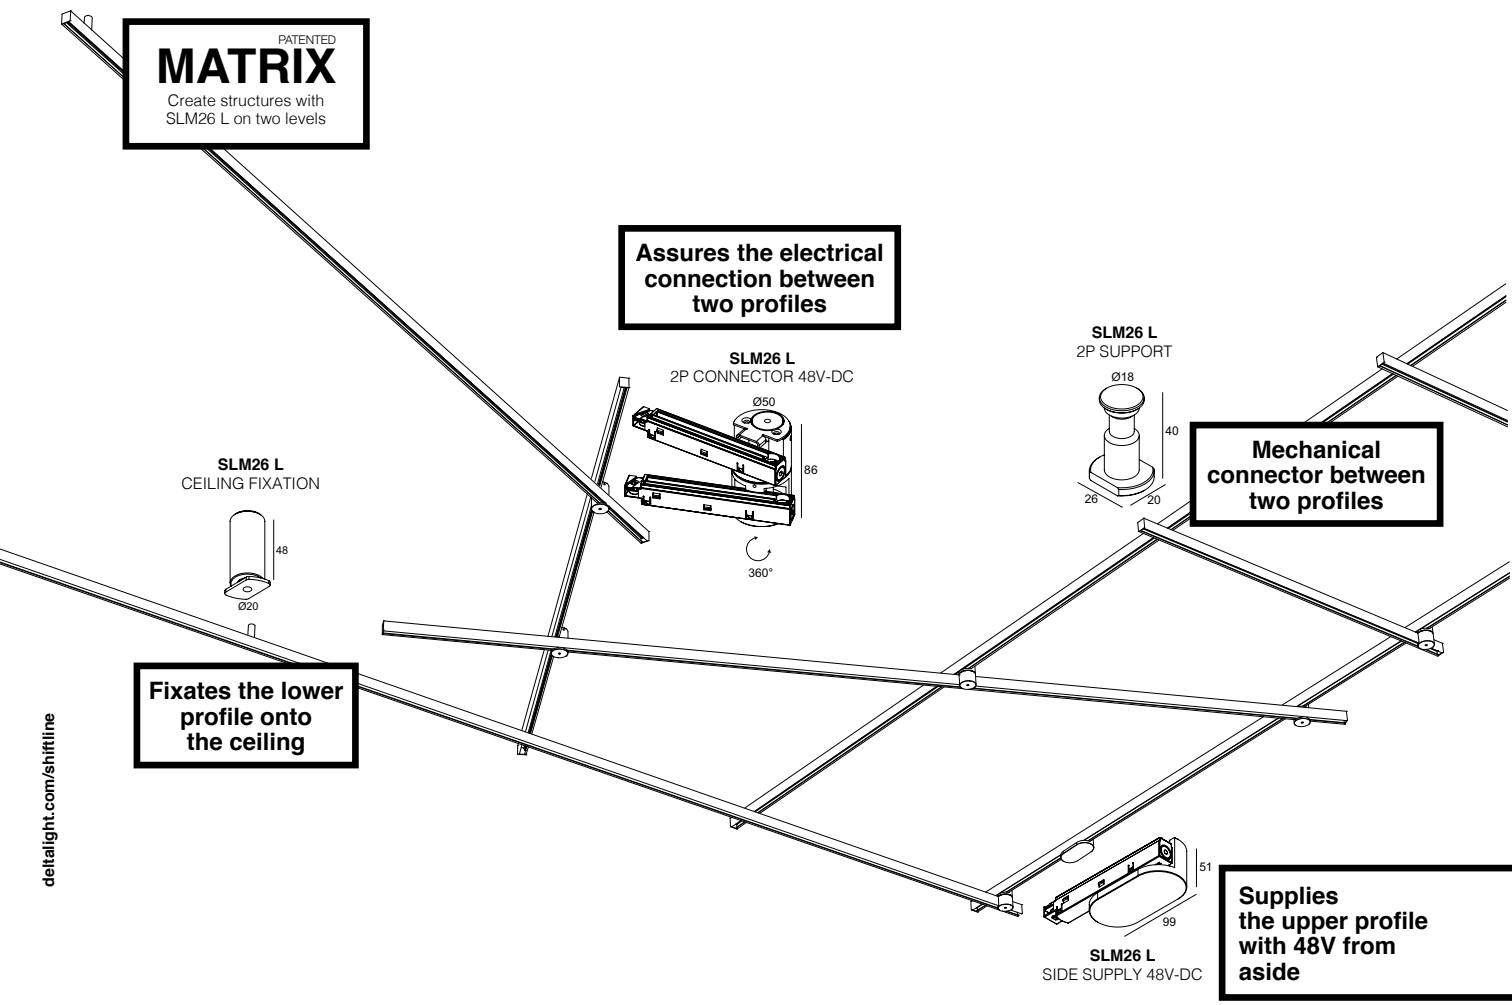

A GLIMPSE OF ME ON PAGE 48 / 50

C

FIND ME ONLINE

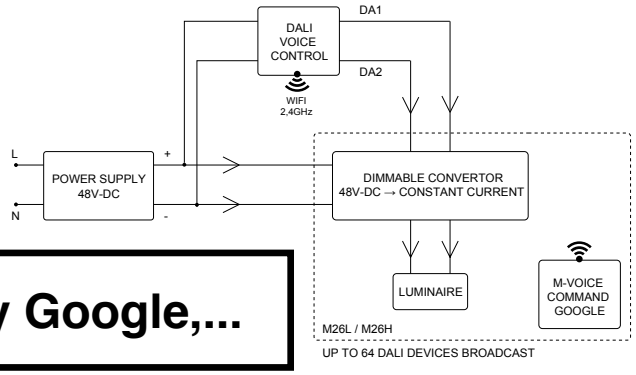

Hey Google,...

How to control your SPLITLINE or SHIFTLINE

MORE INFO TECHNICAL CHAPTER


SMART 48

CTRL DELTA


A

PRO

SLM26 H
VOICE COMMAND GOOGLE HOLDER




SLM26 L
VOICE COMMAND GOOGLE HOLDER




	M20	M20 ST	M52	M26 L	M26 H	M26 H + SBL
VOICE CONTROL						
VOICE COMMAND GOOGLE HOLDER *	-	-	-	21032 0250 B / W	21032 0260 B / W	21032 0260 B / W
SENSOR						
DALI PRESENCE & DAYLIGHT SENSOR	21032 0185					
WIRELESS PRESENCE & DAYLIGHT SENSOR	21032 0040					
WIRELESS SENSOR HUB **	21032 0190					

* FOR GOOGLE NEST 2ND GENERATION SPEAKER
** PRESENCE & DAYLIGHT / TEMPERATURE / HUMIDITY / AIR QUALITY

PROFILES




WIRELESS SENSOR HUB



PRESENCE & DAYLIGHT SENSOR

Interact with your surroundings

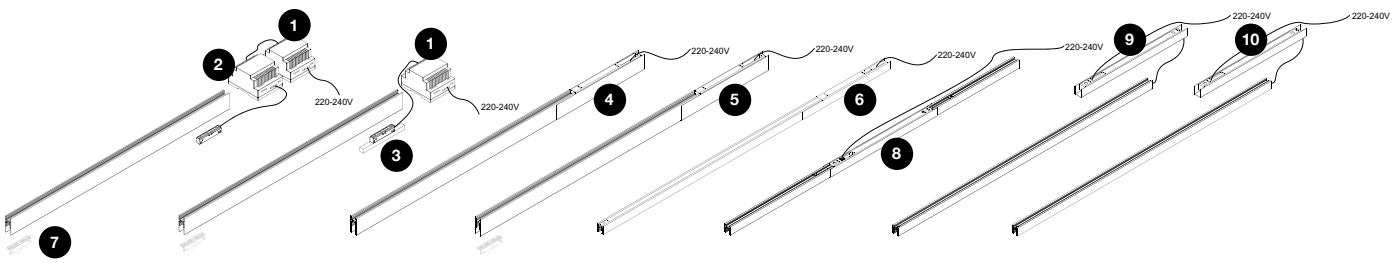

1 POWERSUPPLY 48V-DC
2 SMART 48 MODULATOR
3 SMART 48 MODULATOR PLUG-IN WIRELESS DIM
4 SLM26H POWERBOX 48V/100W
5 SLM26H POWERBOX 48V/100W MDL
6 SLM26L POWERBOX 48V/100W
7 M-WIRELESS PRESENCE & DAYLIGHT SENSOR
8 SLM26L MID POWERBOX 48V/100W
9 SLM26L POWERBOX FOR SUSPENSION 48V/100W
10 SLM26L POWERBOX FOR SUSPENSION 48V/100W WIRELESS DIM


B

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			VOICE COMMAND GOOGLE HOLDER	DALI PRESENCE & DAYLIGHT SENSOR	WIRELESS SENSOR HUB	WIRELESS SENSOR PRESENCE & DAYLIGHT
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *
CONTROL MORE INFO TECHNICAL CHAPTER						
WIRELESS MODULATOR	**300 90 012**				R *	R *
DALI VOICE CONTROL	**21032 0245**	91 x 44 x 23	R **	O **		

* REMOTE INSTALLATION
** MAX 64 DALI DEVICES


MAGNETIC MODULES



LED LINE UP

				M26H	M26L	M52
3000K CRI>90	13W / 1160lm / 24V-DC	IP20	L 830mm	**23376 9300** ◇		
2700K CRI>90	13W / 1160lm / 24V-DC			**23376 9200** ◇		

◇ ANO ⬤




PRO

INFORM

			UGR <19	M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 11,6W / 1714lm / 48V-DC	IP20	L 800	**23381 9320** ◇	**23382 9325** ◇	**23381 9320** ◇	**23382 9325** ◇		
	LED 16,6W / 2429lm / 48V-DC		L1100	**23383 9320** ◇	**23384 9325** ◇	**23383 9320** ◇	**23384 9325** ◇		
2700K CRI>90	LED 11,6W / 1688lm / 48V-DC		L 800	**23381 9220** ◇	**23382 9225** ◇	**23381 9220** ◇	**23382 9225** ◇		
	LED 16,6W / 2395lm / 48V-DC		L1100	**23383 9220** ◇	**23384 9225** ◇	**23383 9220** ◇	**23384 9225** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ⬤




A

LED LINE HE

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI **	MDL	DALI **	MDL	DALI
3000K CRI>90	LED 12,6W / 1500lm / 48V-DC	IP20	L 610mm	**421 313 06 93 MDL** ◇	**23347 0005** ◇	**421 313 06 93 MDL** ◇	**23347 0005** ◇		
	LED 18W / 2240lm / 48V-DC		L 810mm	**421 313 08 93 MDL** ◇	**23348 0005** ◇	**421 313 08 93 MDL** ◇	**23348 0005** ◇		
	LED 21,6W / 2600lm / 48V-DC		L1010mm	**421 313 10 93 MDL** ◇	**23349 0005** ◇	**421 313 10 93 MDL** ◇	**23349 0005** ◇		
	LED 25,2W / 3000lm / 48V-DC		L1210mm	**421 313 12 93 MDL** ◇	**23350 0005** ◇	**421 313 12 93 MDL** ◇	**23350 0005** ◇		
3000-1800K / CRI>90	LED 8,4W / 535lm / 48V-DC		L 621mm	**23303 9000** ◇	**23307 9005** ◇	**23303 9000** ◇	**23307 9005** ◇		
	LED 10,8W / 681lm / 48V-DC		L 787mm	**23304 9000** ◇	**23308 9005** ◇	**23304 9000** ◇	**23308 9005** ◇		
SOFT DIM	LED 14,4W / 912lm / 48V-DC		L1009mm	**23305 9000** ◇	**23309 9005** ◇	**23305 9000** ◇	**23309 9005** ◇		
	LED 16,8W / 1064lm / 48V-DC		L1176mm	**23306 9000** ◇	**23310 9005** ◇	**23306 9000** ◇	**23310 9005** ◇		
NEW 6500-2700K / CRI>90 TUNABLE WHITE	LED 7,6W / 6500K /1000lm - 2700K / 875lm - 48V-DC	IP20	L 635mm		**23319 9005** ◇		**23319 9005** ◇		
	LED 9,8W / 6500K /1300lm - 2700K / 1138lm - 48V-DC		L 823mm		**23320 9005** ◇		**23320 9005** ◇		
	LED 12,1W / 6500K /1600lm - 2700K / 1400lm - 48V-DC		L1010mm		**23321 9005** ◇		**23321 9005** ◇		
	LED 14,4W / 6500K /1900lm - 2700K / 1662lm - 48V-DC		L1198mm		**23322 9005** ◇		**23322 9005** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE
** TUNABLE WHITE DALI DT8

◇ B ⬤



NEW


LED LINE OK

			M26H / M26H+SBL*		M26L		M52	
			MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 18W / 2240lm / 48V-DC	IP20	**29319 9300** ◇	**29320 9305** ◇	**29315 9300** ◇	**29316 9305** ◇		
2700K / CRI>90	LED 18W / 2240lm / 48V-DC		**29319 9200** ◇	**29320 9205** ◇	**29315 9200** ◇	**29316 9205** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ⬤ / W ◯

deltalight.com/splitline
deltalight.com/shiftline




DOT.COM M4


				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5,7W / 631lm / 48V-DC	IP20	14°	**424 612 04 931 MDL◇**	**23355 9315 ◇**	**424 612 04 931 MDL◇**	**23355 9315 ◇**		
			33°	**424 612 04 932 MDL◇**	**23355 9325 ◇**	**424 612 04 932 MDL◇**	**23355 9325 ◇**		
			49°	**424 612 04 933 MDL◇**	**23355 9335 ◇**	**424 612 04 933 MDL◇**	**23355 9335 ◇**		
2700K CRI>90	LED 5,7W / 631lm / 48V-DC		14°	**424 612 04 921 MDL◇**	**23355 9215 ◇**	**424 612 04 921 MDL◇**	**23355 9215 ◇**		
			33°	**424 612 04 922 MDL◇**	**23355 9225 ◇**	**424 612 04 922 MDL◇**	**23355 9225 ◇**		
			49°	**424 612 04 923 MDL◇**	**23355 9235 ◇**	**424 612 04 923 MDL◇**	**23355 9235 ◇**		


* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B-B ●● / ◇ B-C ●● / ◇ B-MMAT ●●



POSITION FOR INSTALLATION






DOT.COM WALLWASH

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 9,6W / 1068lm / 48V-DC	IP20	L 210mm	**424 642 02 93 MDL ◇**	**23367 9305 ◇**				
	LED 12,6W / 1500lm / 48V-DC		L 614mm	**424 642 06 93 MDL ◇**	**23368 9305 ◇**				
	LED 18W / 2240lm / 48V-DC		L814mm	**424 642 08 93 MDL ◇**	**23369 9305 ◇**				
	LED 25,2W / 3000lm / 48V-DC		L1214mm	**424 642 12 93 MDL ◇**	**23370 9305 ◇**				
2700K CRI>90	LED 9,6W / 998lm / 48V-DC		L 210mm	**424 642 02 92 MDL ◇**	**23367 9205 ◇**				
	LED 12,6W / 1500lm / 48V-DC		L 614mm	**424 642 06 92 MDL ◇**	**23368 9205 ◇**				
	LED 18W / 2240lm / 48V-DC		L814mm	**424 642 08 92 MDL ◇**	**23369 9205 ◇**				
	LED 25,2W / 3000lm / 48V-DC		L1214mm	**424 642 12 92 MDL ◇**	**23370 9205 ◇**				


* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ●

	X
DOT.COM L WALLWASH L210	0,5
DOT.COM L WALLWASH L614	0,25
DOT.COM L WALLWASH L814	0,33
DOT.COM L WALLWASH L1214	0,5

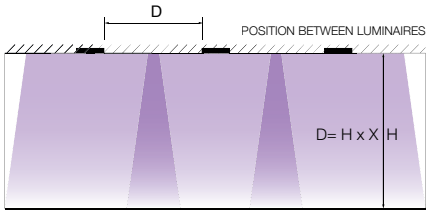

example: H=3000 mm → D= 3000 mm x 0,5 = 1500 mm

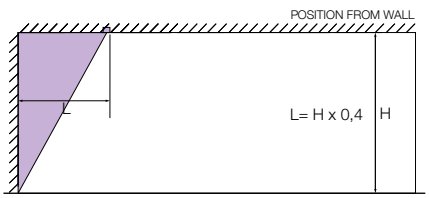

example: H=3000 mm → L= 3000 mm x 0,4 = 1200 mm



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

**ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT**

FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY		
			LEDLINE UP	INFORM / LED LINE / DOT.COM	
				MDL	DALI
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
1-10V DIM - 60W (PWM)	**21012 0101**	150 x 53 x 35	R *		
DALI - 60W (PWM)	**21012 0135**	150 x 53 x 35	R *		
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125		R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER					
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16		R	

* REMOTE INSTALLATION

MAGNETIC MODULES

PRO

A




NEW

JUM-OH! 2R

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2x LED 2W / 232lm / 48V-DC	IP20	30°	**29415 9320** ◇	**29416 9325** ◇	**29411 9320** ◇	**29412 9325** ◇		
2700K CRI>90	2x LED 2W / 221lm / 48V-DC			**29415 9220** ◇	**29416 9225** ◇	**29411 9220** ◇	**29412 9225** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B

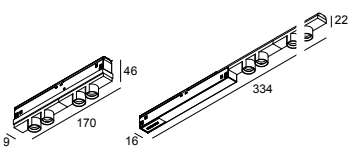


NEW

JUM-OH! 4R

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	4x LED 2W / 232lm / 48V-DC	IP20	30°	**29417 9320** ◇	**29418 9325** ◇	**29413 9320** ◇	**29414 9325** ◇		
2700K CRI>90	4x LED 2W / 221lm / 48V-DC			**29417 9220** ◇	**29418 9225** ◇	**29413 9220** ◇	**29414 9225** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B



NEW

OBIN


				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 11.6W / 1524lm / 48V-DC	IP20	24°	**30513 9320** ◇	**30514 9325** ◇				
			36°	**30513 9330** ◇	**30514 9335** ◇				
2700K CRI>90	LED 11.6W / 1458lm / 48V-DC		24°	**30513 9220** ◇	**30514 9225** ◇				
			36°	**30513 9230** ◇	**30514 9235** ◇				

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B / BRA / BRG / BROB / BRAT / W

deltalight.com/splitline

deltalight.com/shiftline




NEW

BOXY R

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI **	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	33°			**10729 9320** ◇	**10731 9325** ◇		
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC					**10729 9220** ◇	**10731 9225** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC		45°			**10730 9030** ◇	**10732 9035** ◇		
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC		45°				**10733 9035** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE
**DALI DT8 FOR TUNABLE WHITE

◇ B-B ●● / B-FBR ●● / B-FG ●● / W-W ○○




NEW

BOXY L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI **	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	33°			**10734 9320** ◇	**10736 9325** ◇		
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC					**10734 9220** ◇	**10736 9225** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC		45°			**10735 9030** ◇	**10737 9035** ◇		
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC		45°				**10738 9035** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE
**DALI DT8 FOR TUNABLE WHITE

◇ B-B ●● / B-FBR ●● / B-FG ●● / W-W ○○



NEW

BOXY L A

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI **	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	33°			**10739 9320** ◇	**10741 9325** ◇		
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC					**10739 9220** ◇	**10741 9225** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC		45°			**10740 9030** ◇	**10742 9035** ◇		
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC		45°				**10743 9035** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE
**DALI DT8 FOR TUNABLE WHITE

◇ B-B ●● / B-FBR ●● / B-FG ●● / W-W ○○



MDL MODULES STANDARD ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE ON LOWER CONDUCTORS FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY					
			JUM-OH!		OBIN		BOXY	
			MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R	
FINISH								
SPY 90 TUBE	**19810 0170 B / FBR / FG / GC / W**				R	R		
HONEYCOMB / LENS / GLASS								
BOXY HONEYCOMB	**251 70 03 01 B / W**						A	A
HONEYCOMB 75	**19810 0110 B**				A	A		
BOXY SOFTENING LENS	**251 70 03 04 B / W**						A	A
BOXY GLASS SBL	**251 70 03 05 B / W**						A	A

* REMOTE INSTALLATION


MAGNETIC MODULES

PRO


A



1 LED				M20 / M26H		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K / CRI>80	LED 6W / 558lm / 48V-DC	IP20	20°					**421 218 1832 MDL**	**24414 8325**
2700K / CRI>80	LED 6W / 558lm / 48V-DC							**421 218 1822 MDL**	**24414 8225**




2 LED				M20 / M26H		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K / CRI>80	2 x LED 6W / 558lm / 48V-DC	IP20	20°					**421 218 2832 MDL**	**24417 8325**
2700K / CRI>80	2 x LED 6W / 558lm / 48V-DC							**421 218 2822 MDL**	**24417 8225**




2 LED OK				M20 / M26H		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K / CRI>80	2 x LED 6W / 558lm / 48V-DC	IP20	20°					**421 248 2832 MDL**	**24419 8325**
2700K / CRI>80	2 x LED 6W / 558lm / 48V-DC							**421 248 2822 MDL**	**24419 8225**

deltalight.com/splitline deltalight.com/shiftline



1 LED D

				M20 / M26H		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20	33°					**421 228 811 932 D MDL**	**24415 9325**
2700K CRI>90	LED 7.1W / 779lm / 48V-DC	IP20	33°					**421 228 811 922 D MDL**	**24415 9225**



2 LED D

				M20 / M26H		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2 x LED 7.1W / 812lm / 48V-DC	IP20	33°					**421 228 812 932 D MDL**	**24418 9325**
2700K CRI>90	2 x LED 7.1W / 779lm / 48V-DC	IP20	33°					**421 228 812 922 D MDL**	**24418 9225**




MDL MODULES STANDARD ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE ON LOWER CONDUCTORS FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY	
			1 LED / 2 LED	
			MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER				
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R	

* REMOTE INSTALLATION

MAGNETIC MODULES




BOWIE 1

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1018lı / 48V-DC	IP20	25°	**26716 9320** ◇	**26717 9325** ◇	**26720 9320** ◇	**26721 9325** ◇		
			37°	**26716 9330** ◇	**26717 9335** ◇	**26720 9330** ◇	**26721 9335** ◇		
2700K CRI>90	LED 8.6W / 974lm / 48V-DC		25°	**26716 9220** ◇	**26717 9225** ◇	**26720 9220** ◇	**26721 9225** ◇		
			37°	**26716 9230** ◇	**26717 9235** ◇	**26720 9230** ◇	**26721 9235** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○




BOWIE 2

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2 x LED 8.6W / 1018lı / 48V-DC	IP20	25°	**26718 9320** ◇	**26719 9325** ◇	**26722 9320** ◇	**26723 9325** ◇		
			37°	**26718 9330** ◇	**26719 9335** ◇	**26722 9330** ◇	**26723 9335** ◇		
2700K CRI>90	2 x LED 8.6W / 974lm / 48V-DC		25°	**26718 9220** ◇	**26719 9225** ◇	**26722 9220** ◇	**26723 9225** ◇		
			37°	**26718 9230** ◇	**26719 9235** ◇	**26722 9230** ◇	**26723 9235** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○




ODRON 1

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1018lı / 48V-DC	IP20	28 & 41° **	**26216 9300** ◇	**26217 9305** ◇	**26220 9300** ◇	**26221 9305** ◇		
2700K CRI>90	LED 8.6W / 974lm / 48V-DC			**26216 9200** ◇	**26217 9205** ◇	**26220 9200** ◇	**26221 9205** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE
** INCL. 2 REFLECTORS

◇ B ● / W ○



ODRON 2

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2 x LED 8.6W / 1018lı / 48V-DC	IP20	28 & 41° **	**26218 9300** ◇	**26219 9305** ◇	**26222 9300** ◇	**26223 9305** ◇		
2700K CRI>90	2 x LED 8.6W / 974lm / 48V-DC			**26218 9200** ◇	**26219 9205** ◇	**26222 9200** ◇	**26223 9205** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE
** INCL. 4 REFLECTORS


◇ B ● / W ○

PRO

A

deltalight.com/splitline

deltalight.com/shiftline




NEW

NEEDLE

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.2W / 677lm / 48V-DC	IP20	13°	**25016 9310** ◇	**25017 9315** ◇				
			33°	**25016 9320** ◇	**25017 9325** ◇				
2700K CRI>90	LED 8.2W / 677lm / 48V-DC		13°	**25016 9210** ◇	**25017 9215** ◇				
			33°	**25016 9220** ◇	**25017 9225** ◇				

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / FG ●



NEW

NEEDLE OK

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	13°	**25018 9310** ◇	**25019 9315** ◇				
			33°	**25018 9320** ◇	**25019 9325** ◇				
2700K CRI>90	LED 5.7W / 519lm / 48V-DC		13°	**25018 9210** ◇	**25019 9215** ◇				
			33°	**25018 9220** ◇	**25019 9225** ◇				

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / FG ●



MDL MODULES STANDARD ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE ON LOWER CONDUCTORS FOR SECOND CIRCUIT


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY					
			BOWIE		ODRON		NEEDLE	
			MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R	
FINISH								
ODRON COVER	**26210 0020 GC**				A	A		

* REMOTE INSTALLATION

B

MAGNETIC MODULES




MULTINOVA 30

UGR <19 **

			M20 / M26H / M26H+SBL*		M26L		M52	
			MDL	DALI ***	MDL	DALI ***	MDL	DALI
3000K CRI>90	LED 14,8W / 2148lm / 48V-DC IP20	SBL	**27947 9300** ◇	**27948 9305** ◇	**27938 9300** ◇	**27939 9305** ◇		
		PRISMATIC	**27949 9300** ◇	**27950 9305** ◇	**27940 9300** ◇	**27941 9305** ◇		
		SMOKE	**27951 9300** ◇	**27952 9305** ◇	**27942 9300** ◇	**27943 9305** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 14,8W / 2148lm / 48V-DC IP20	SBL		**27955 9005** ◇		**27946 9005** ◇		
		PRISMATIC						
		SMOKE						
TUNABLE WHITE	6500-2700K / CRI>90 LED 9,4W / 1367lm / 48V-DC IP20	SBL		**27953 9005** ◇		**27944 9005** ◇		
		PRISMATIC		**27954 9005** ◇		**27945 9005** ◇		
		SMOKE						

◇ B ● / GC ● / W ○ (for prismatic: ◇ B ● / W ○)

* M26H+SBL: NOT FOR MDL LUMINAIRES
** FOR PRISMATIC
**DALI DT8 FOR TUNABLE WHITE




HALOSCAN MP

			M20 / M26H / M26H+SBL*		M26L		M52	
			MDL	DALI	MDL	DALI	MDL	DALI
3000K / CRI>90	LED 8.6W / 1089lm / 48V-DC	14°	**23135 9310** ◇	**23136 9315** ◇	**23123 9310** ◇	**23124 9315** ◇		
		21°	**23135 9320** ◇	**23136 9325** ◇	**23123 9320** ◇	**23124 9325** ◇		
		35°	**23135 9330** ◇	**23136 9335** ◇	**23123 9330** ◇	**23124 9335** ◇		
2700K / CRI>90	LED 8.6W / 1041lm / 48V-DC	14°	**23135 9210** ◇	**23136 9215** ◇	**23123 9210** ◇	**23124 9215** ◇		
		21°	**23135 9220** ◇	**23136 9225** ◇	**23123 9220** ◇	**23124 9225** ◇		
		35°	**23135 9230** ◇	**23136 9235** ◇	**23123 9230** ◇	**23124 9235** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 6W / 623lm ./ 48V-DC	14°	**23137 9010** ◇	**23138 9015** ◇	**23125 9010** ◇	**23126 9015** ◇		
		21°	**23137 9020** ◇	**23138 9025** ◇	**23125 9020** ◇	**23126 9025** ◇		
		35°	**23137 9030** ◇	**23138 9035** ◇	**23125 9030** ◇	**23126 9035** ◇		

◇ B ● / W ○

* MDL MODULES NOT FOR M26H + SBL PROFILE



HALOSCAN HP

			M20 / M26H / M26H+SBL*		M26L		M52	
			MDL	DALI	MDL	DALI	MDL	DALI
3000K / CRI>90	LED 11.6W / 1524lm / 48V-DC	14°	**23141 9310** ◇	**23142 9315** ◇	**23129 9310** ◇	**23130 9315** ◇		
		21°	**23141 9320** ◇	**23142 9325** ◇	**23129 9320** ◇	**23130 9325** ◇		
		35°	**23141 9330** ◇	**23142 9335** ◇	**23129 9330** ◇	**23130 9335** ◇		
2700K / CRI>90	LED 11.6W / 1458lm / 48V-DC	14°	**23141 9210** ◇	**23142 9215** ◇	**23129 9210** ◇	**23130 9215** ◇		
		21°	**23141 9220** ◇	**23142 9225** ◇	**23129 9220** ◇	**23130 9225** ◇		
		35°	**23141 9230** ◇	**23142 9235** ◇	**23129 9230** ◇	**23130 9235** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 11.8W / 1307lm / 48V-DC	14°	**23143 9010** ◇	**23144 9015** ◇	**23131 9010** ◇	**23132 9015** ◇		
		21°	**23143 9020** ◇	**23144 9025** ◇	**23131 9020** ◇	**23132 9025** ◇		
		35°	**23143 9030** ◇	**23144 9035** ◇	**23131 9030** ◇	**23132 9035** ◇		

◇ B ● / W ○


* MDL MODULES NOT FOR M26H + SBL PROFILE

PRO

A

deltalight.com/splitline

deltalight.com/shiftline




PUNK 39

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20	45°	**471 151 811 931 MDL** ◇	**23372 9315** ◇	**23244 9310** ◇	**23245 9315** ◇		
2700K CRI>90	LED 7.1W / 779lm / 48V-DC			**471 151 811 921 MDL** ◇	**23372 9215** ◇	**23244 9210** ◇	**23245 9215** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ●




NEW

M - OCTAV 27

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	**29012 9320** ◇	**29014 9325** ◇	**29013 9320** ◇	**29015 9325** ◇		
2700K CRI>90	LED 5.8W / 753lm / 48V-DC			**29012 9220** ◇	**29014 9225** ◇	**29013 9220** ◇	**29015 9225** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○



NEW

M - OCTAV 39

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	**29020 9320** ◇	**29022 9325** ◇	**29021 9320** ◇	**29023 9325** ◇		
			40°	**29020 9330** ◇	**29022 9335** ◇	**29021 9330** ◇	**29023 9335** ◇		
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	**29020 9220** ◇	**29022 9225** ◇	**29021 9220** ◇	**29023 9225** ◇		
			40°	**29020 9230** ◇	**29022 9235** ◇	**29021 9230** ◇	**29023 9235** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○



MDL MODULES STANDARD ON UPPER CONDUCTORS.


ON REQUEST AVAILABLE ON LOWER CONDUCTORS FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY			MULTINOVA		HALOSCAN MP		HALOSCAN HP		PUNK		OCTAV 27		OCTAV 39	
			MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT														
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER														
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *		R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *		R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R		R		R		R	
FINISH														
SPY 39 L TUBE	**24144 0020 B / FBR / FG / GC / W**												R	R
HONEYCOMB / LENS / GLASS														
HALOSCAN HONEYCOMB	**23110 0050 B**				A	A	A	A						
HALOSCAN LINEAR SPREAD LENS	**23110 0040**				A	A	A	A						
HALOSCAN KAP MP	**23110 0060 B / W**				A	A								

* REMOTE INSTALLATION

MAGNETIC MODULES




SPY 271

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	**23311 9320** ◇	**23312 9325** ◇	**23210 9320** ◇	**23211 9325** ◇		
2700K CRI>90	LED 5.8W / 753lm / 48V-DC	IP20	30°	**23311 9220** ◇	**23312 9225** ◇	**23210 9220** ◇	**23211 9225** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○




SPY 271 L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	**23385 9320** ◇	**23386 9325** ◇	**23280 9320** ◇	**23281 9325** ◇		
2700K CRI>90	LED 5.8W / 753lm / 48V-DC	IP20	30°	**23385 9220** ◇	**23386 9225** ◇	**23280 9220** ◇	**23281 9225** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○




SPY 272

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2x LED 5.8W / 787lm / 48V-DC	IP20	30°	**23313 9320** ◇	**23314 9325** ◇	**23212 9320** ◇	**23213 9325** ◇		
2700K CRI>90	2x LED 5.8W / 753lm / 48V-DC	IP20	30°	**23313 9220** ◇	**23314 9225** ◇	**23212 9220** ◇	**23213 9225** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○



SPY 272 L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2x LED 5.8W / 787lm / 48V-DC	IP20	30°	**23387 9320** ◇	**23388 9325** ◇	**23282 9320** ◇	**23283 9325** ◇		
2700K CRI>90	2x LED 5.8W / 753lm / 48V-DC	IP20	30°	**23387 9220** ◇	**23388 9225** ◇	**23282 9220** ◇	**23283 9225** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE


◇ B ● / W ○

PRO

A

deltalight.com/splitline

deltalight.com/shiftline




SPY 391

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	**23315 9320** ◇ **	**23316 9325** ◇ **	**23258 9320** ◇ **	**23259 9325** ◇ **	**24430 9320** ◇	**24431 9325** ◇
			40°	**23315 9330** ◇ **	**23316 9335** ◇ **	**23258 9330** ◇ **	**23259 9335** ◇ **	**24430 9330** ◇	**24431 9335** ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	**23315 9220** ◇ **	**23316 9225** ◇ **	**23258 9220** ◇ **	**23259 9225** ◇ **	**24430 9220** ◇	**24431 9225** ◇
			40°	**23315 9230** ◇ **	**23316 9235** ◇ **	**23258 9230** ◇ **	**23259 9235** ◇ **	**24430 9230** ◇	**24431 9235** ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○

** + NEW COLOURS: BRA ● / BRCU ● / BRG ● / BROB ● / BRAT ● / PB ●




SPY 391 L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	**23389 9320** ◇	**23390 9325** ◇	**23284 9320** ◇	**23285 9325** ◇	**24440 9320** ◇	**24441 9325** ◇
			40°	**23389 9330** ◇	**23390 9335** ◇	**23284 9330** ◇	**23285 9335** ◇	**24440 9330** ◇	**24441 9335** ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	**23389 9220** ◇	**23390 9225** ◇	**23284 9220** ◇	**23285 9225** ◇	**24440 9220** ◇	**24441 9225** ◇
			40°	**23389 9230** ◇	**23390 9235** ◇	**23284 9230** ◇	**23285 9235** ◇	**24440 9230** ◇	**24441 9235** ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / GC ● / W ○



SPY 392

				M20 / M26H		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	2x LED 8.6W / 1089lm / 48V-DC	IP20	20°	**23317 9320** ◇	**23318 9325** ◇	**23260 9320** ◇	**23261 9325** ◇		
			40°	**23317 9330** ◇	**23318 9335** ◇	**23260 9330** ◇	**23261 9335** ◇		
2700K CRI>90	2x LED 8.6W / 1041lm / 48V-DC		20°	**23317 9220** ◇	**23318 9225** ◇	**23260 9220** ◇	**23261 9225** ◇		
			40°	**23317 9230** ◇	**23318 9235** ◇	**23260 9230** ◇	**23261 9235** ◇		

◇ B ● / W ○



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

**ON REQUEST AVAILABLE
ON LOWER CONDUCTORS
FOR SECOND CIRCUIT**


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY					
			SPY 271/272 - 271 L/272 L		SPY 391/392		SPY 391 L	
			MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R	
FINISH								
SPY 39 TUBE	**24144 0010 B / FBR / FG / GC / W**				R	R		
SPY 39 L TUBE	**24144 0020 B / FBR / FG / GC / W**						R	R
VISOR 27	**216 12 01**		A	A				
VISOR 39	**216 12 02**				A	A	A	A

* REMOTE INSTALLATION

MAGNETIC MODULES

PRO




SPY 52

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI **	MDL	DALI **	MDL	DALI **
3000K CRI>90	LED 12.4W / 1467lm / 48V-DC	IP20	20°	**23323 9320** ◇	**23324 9325** ◇	**23274 9320** ◇	**23275 9325** ◇	**24434 9320** ◇	**24435 9325** ◇
			45°	**23323 9330** ◇	**23324 9335** ◇	**23274 9330** ◇	**23275 9335** ◇	**24434 9330** ◇	**24435 9335** ◇
2700K CRI>90	LED 12.4W / 1403lm / 48V-DC		20°	**23323 9220** ◇	**23324 9225** ◇	**23274 9220** ◇	**23275 9225** ◇	**24434 9220** ◇	**24435 9225** ◇
			45°	**23323 9230** ◇	**23324 9235** ◇	**23274 9230** ◇	**23275 9235** ◇	**24434 9230** ◇	**24435 9235** ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC		20°	**23398 9020** ◇	**23399 9025** ◇	**23297 9020** ◇	**23298 9025** ◇	**24451 9020** ◇	**24452 9025** ◇
			45°	**23398 9030** ◇	**23399 9035** ◇	**23297 9030** ◇	**23298 9035** ◇	**24451 9030** ◇	**24452 9035** ◇
NEW TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC	IP20	20°		**23331 9025** ◇		**23215 9025** ◇		**24445 9025** ◇
			45°		**23331 9035** ◇		**23215 9035** ◇		**24445 9035** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○ (for tunable white: ◇ B ● / W ○)

* MDL MODULES NOT FOR M26H + SBL PROFILE
** TUNABLE WHITE DALI DT8

A




NEW

SPY 52 WALLWASH


				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP 20	WALLWASH	**19889 9300** ◇	**19890 9305** ◇	**19887 9300** ◇	**19888 9305** ◇		
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC			**19889 9200** ◇	**19890 9205** ◇	**19887 9200** ◇	**19888 9205** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC			**19894 9000** ◇	**19895 9005** ◇	**19892 9000** ◇	**19893 9005** ◇		

◇ B ● / FBR ● / FG ● / GC ● / W ○

* MDL MODULES NOT FOR M26H + SBL PROFILE



NEW




SPY 52 FOCUS

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 12.4W / 1467lm / 48V-DC	IP20	26-46°	**23411 9300** ◇	**23412 9305** ◇	**23293 9300** ◇	**23294 9305** ◇		
2700K CRI>90	LED 12.4W / 1403lm / 48V-DC			**23411 9200** ◇	**23412 9205** ◇	**23293 9200** ◇	**23294 9205** ◇		
SOFT DIM	3000-1800K / CRI>90 LED 8.3W / 934lm / 48V-DC			**23413 9000** ◇	**23414 9005** ◇	**23295 9000** ◇	**23296 9005** ◇		

◇ B ● / FBR ● / FG ● / GC ● / W ○

* MDL MODULES NOT FOR M26H + SBL PROFILE

deltalight.com/splitline
deltalight.com/shiftline




SPY 66

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI **	MDL	DALI **	MDL	DALI **
3000K CRI>90	LED 25W / 2811lm / ` / 48V-DC	IP20	18°	**23327 9310** ◇	**23328 9315** ◇	**23278 9310** ◇	**23279 9315** ◇	**24438 9310** ◇	**24439 9315** ◇
			30°	**23327 9320** ◇	**23328 9325** ◇	**23278 9320** ◇	**23279 9325** ◇	**24438 9320** ◇	**24439 9325** ◇
			45°	**23327 9330** ◇	**23328 9335** ◇	**23278 9330** ◇	**23279 9335** ◇	**24438 9330** ◇	**24439 9335** ◇
2700K CRI>90	LED 25W / 2688lm / ` / 48V-DC		18°	**23327 9210** ◇	**23328 9215** ◇	**23278 9210** ◇	**23279 9215** ◇	**24438 9210** ◇	**24439 9215** ◇
			30°	**23327 9220** ◇	**23328 9225** ◇	**23278 9220** ◇	**23279 9225** ◇	**24438 9220** ◇	**24439 9225** ◇
			45°	**23327 9230** ◇	**23328 9235** ◇	**23278 9230** ◇	**23279 9235** ◇	**24438 9230** ◇	**24439 9235** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED 9W / 1087lm / 48V-DC	IP20	18°		**23360 9015** ◇		**23292 9015** ◇		**24446 9015** ◇
			30°		**23360 9025** ◇		**23292 9025** ◇		**24446 9025** ◇
			45°		**23360 9035** ◇		**23292 9035** ◇		**24446 9035** ◇

◇ B ● / W ○

* MDL MODULES NOT FOR M26H + SBL PROFILE
** TUNABLE WHITE DALI DT8




NEW


SPY 66 WALLWASH

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 17.2W / 2101lm / 48V-DC	IP 20	WALLWASH	**24635 9300** ◇	**24636 9305** ◇	**24633 9300** ◇	**24634 9305** ◇		
2700K CRI>90	LED 17.2W / 2009lm / 48V-DC			**24635 9200** ◇	**24636 9205** ◇	**24633 9200** ◇	**24634 9205** ◇		

◇ B ● / W ○

* MDL MODULES NOT FOR M26H + SBL PROFILE

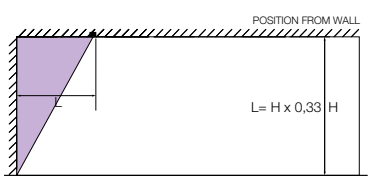

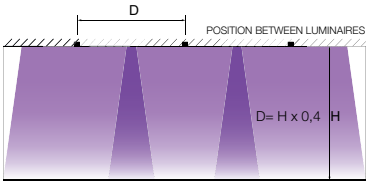

ADVISED TILTING: 20°



MDL MODULES STANDARD ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE ON LOWER CONDUCTORS FOR SECOND CIRCUIT


FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY									
			SPY 52		SPY 52 WW		SPY 52 FOCUS		SPY 66		SPY 66 WW	
			MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT												
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER												
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R		R		R	
FINISH												
SPY 52 TUBE	**19810 0100 B / FBR / FG / GC / W**		R	R								
SPY 66 TUBE	**24611 0100 B / FBR / FG / GC / W**								R	R		
HONEYCOMB / LENS / GLASS												
HONEYCOMB SINGLE USE	**19810 0010 B**		A	A								
HONEYCOMB DOUBLE USE	**19810 0060 B**		A	A								
LINEAR SPREAD LENS	**19810 0020**		A	A								
SPREAD LENS	**19810 0030**		A	A								
SOFTENING LENS	**19810 0040**		A	A								
GLASS SBL	**19810 0050**		A	A								
HONEYCOMB SINGLE USE	**24611 0150 B**								A	A		
HONEYCOMB DOUBLE USE	**24611 0210 B**								A **	A **		
LINEAR SPREAD LENS	**24611 0170**								A **	A **		
SPREAD LENS	**24611 0200**								A **	A **		
SOFTENING LENS	**24611 0190**								A **	A **		
GLASS SBL	**24611 0160**								A **	A **		

* REMOTE INSTALLATION
** ONLY FOR TUNABLE WHITE

MAGNETIC MODULES

PRO






SPY FOCUS LP


				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1018lm / 48V-DC	IP20	8° - 43°	**23378 9300** ◇	**23379 9305** ◇	**23230 9300** ◇	**23231 9305** ◇	**24428 9300** ◇	**24429 9305** ◇
2700K CRI>90	LED 8.6W / 974lm / 48V-DC			**23378 9200** ◇	**23379 9205** ◇	**23230 9200** ◇	**23231 9205** ◇	**24428 9200** ◇	**24429 9205** ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / W ○

A






SPY FOCUS MP

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 17.2W / 2101lm / 48V-DC	IP20	12° - 45°	**23332 9300** ◇	**23373 9305** ◇	**23232 9300** ◇	**23233 9305** ◇	**24426 9300** ◇	**24427 9305** ◇
2700K CRI>90	LED 17.2W / 2009lm / 48V-DC			**23332 9200** ◇	**23373 9205** ◇	**23232 9200** ◇	**23233 9205** ◇	**24426 9200** ◇	**24427 9205** ◇

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / FBR ● / FG ● / W ○



VIZIR


				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	8°	**23365 9310** ◇	**23371 9315** ◇	**23246 9310** ◇	**23247 9315** ◇		
2700K CRI>90	LED 5.7W / 519lm / 48V-DC			**23365 9210** ◇	**23371 9215** ◇	**23246 9210** ◇	**23247 9215** ◇		

*MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / GC ●

deltalight.com/splitline

deltalight.com/shiftline




VIZIR L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 10.4W / 1128lm / 48V-DC	IP20	33°	**473 152 811 932 MDL** ◇	**23362 9325** ◇	**23248 9320** ◇	**23249 9325** ◇		
2700K CRI>90	LED 10.4W / 1083lm / 48V-DC	IP20	33°	**473 152 811 922 MDL** ◇	**23362 9225** ◇	**23248 9220** ◇	**23249 9225** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / GC ●




HEDRA

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	8°	**23366 9310** ◇	**23363 9315** ◇	**23250 9310** ◇	**23251 9315** ◇		
2700K CRI>90	LED 5.7W / 519lm / 48V-DC	IP20	8°	**23366 9210** ◇	**23363 9215** ◇	**23250 9210** ◇	**23251 9215** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / GC ●



HEDRA L

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 10.4W / 1128lm / 48V-DC	IP20	33°	**473 252 811 932 MDL** ◇	**23364 9325** ◇	**23252 9320** ◇	**23253 9325** ◇		
2700K CRI>90	LED 10.4W / 1083lm / 48V-DC	IP20	33°	**473 252 811 922 MDL** ◇	**23364 9225** ◇	**23252 9220** ◇	**23253 9225** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ BBR ● / GC ●



MDL MODULES STANDARD
ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE ON LOWER CONDUCTORS FOR SECOND CIRCUIT


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY					
			SPY FOCUS		VIZIR		HEDRA	
			MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R	
FINISH								
VIZIR TUBE	**473 01 00 B / FBR / FG / W**				R	R	R	R
HONEYCOMB / LENS / GLASS								
HONEYCOMB	**473 03 01 B**				A	A	A	A
SOFTENING LENS	**473 03 04**				A	A	A	A

* REMOTE INSTALLATION

MAGNETIC MODULES

PRO



MICROSPY 39 C


				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20	45°	**421 612 811 931 MDL** ◇	**23353 9315** ◇	**421 612 811 931 MDL** ◇	**23353 9315** ◇	**421 612 811 931 MDL** ◇	**23353 9315** ◇
2700K CRI>90	LED 7.1W / 779lm / 48V-DC			**421 612 811 921 MDL** ◇	**23353 9215** ◇	**421 612 811 921 MDL** ◇	**23353 9215** ◇	**421 612 811 921 MDL** ◇	**23353 9215** ◇

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○

INCL.1 x CABLE 2 x 0.75mm² / 1.6m

A



TWEETER BL


PATENT

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 10.4W / 1128lm / 48V-DC	IP20		**421 522 811 930 MDL** ◇	**23352 9305** ◇	**23242 9300** ◇	**23243 9305** ◇		
2700K CRI>90	LED 10.4W / 1083lm / 48V-DC			**421 522 811 920 MDL** ◇	**23352 9205** ◇	**23242 9200** ◇	**23243 9205** ◇		

* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○

EXCL.GLASS



GIBBO

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 7.1W / 812lm / 48V-DC	IP20		**421 622 811 930 MDL** ◇	**23354 9305** ◇	**421 622 811 930 MDL** ◇	**23354 9305** ◇	**421 622 811 930 MDL** ◇	**23354 9305** ◇
2700K CRI>90	LED 7.1W / 779lm / 48V-DC			**421 622 811 920 MDL** ◇	**23354 9205** ◇	**421 622 811 920 MDL** ◇	**23354 9205** ◇	**421 622 811 920 MDL** ◇	**23354 9205** ◇


* MDL MODULES NOT FOR M26H + SBL PROFILE

◇ B ● / W ○


EXCL.GLASS
INCL.1 x CABLE 2 x 0.75mm2
INCL.1 x CABLE SUSP. SINGLE AUTO 1,6m

deltalight.com/splitline deltalight.com/shiftline

READ MY COLOUR

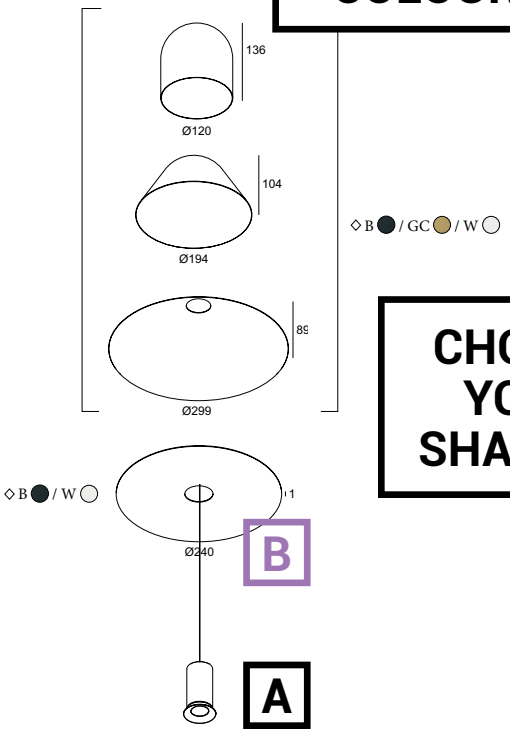

CHOOSE YOUR SHADE(S)



NEW

CUPPA C

				M20 / M26H / M26H+SBL*		M26L		M52	
				MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	40°	**28811 9330** ◇	**28812 9335** ◇	**28811 9330** ◇	**28812 9335** ◇	**28811 9330** ◇	**28812 9335** ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC	IP20	40°	**28811 9230** ◇	**28812 9235** ◇	**28811 9230** ◇	**28812 9235** ◇	**28811 9230** ◇	**28812 9235** ◇
SOFT DIM	3000-1800K / CRI>90 LED 10.2W / 1038lm / 48V-DC	IP20	40°	**28813 9030** ◇	**28814 9035** ◇	**28813 9030** ◇	**28814 9035** ◇	**28813 9030** ◇	**28814 9035** ◇

◇B-GC / W-GC

EXCL.CUPPA SHADE
INCL.1 x CABLE 2 x 0.75mm² 1,6m

* MDL MODULES NOT FOR M26H + SBL PROFILE

MDL MODULES STANDARD ON UPPER CONDUCTORS.

ON REQUEST AVAILABLE ON LOWER CONDUCTORS FOR SECOND CIRCUIT

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY							
			MICROSPY		TWEETER BL		GIBBO		CUPPA	
			MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER										
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R		R	
FINISH										
BOWL GLASS CLEAR	**286 67 01**				R	R	R	R		
or BOWL GLASS AMBER	**286 67 02**				R	R	R	R		
or BOWL GLASS OPAL WHITE	**286 67 03**				R	R	R	R		
CUPPA SHADE 120	**28800 0010 B/GC/W**								R	R
or CUPPA SHADE 190	**28800 0020 B/GC/W**								R	R
or CUPPA SHADE 300	**28800 0030 B/GC/W**								R	R
or CUPPA DISK	**28800 0040 B/W**								R	R

* REMOTE INSTALLATION

SPLITLINE 14
SHIFTLINE 19


Narrow streets draw black lines through space and literally form a 'lighting path' that dialogues with the architecture of the surroundings. The Splitline 14 profile can be combined with several accent lights, depending on what the space needs, both functionally and in terms of design. Splitline 14 effortlessly integrates with architecture, upgrading the uniqueness of the room.


-

Building on the flexibility of our Superloop, adding the refinement of our 2F track and shrinking down the design to the level of our Shelfline. The result? Shiftline 19!
This miniature profile lets you combine accent lighting and decorative lighting in the shape of Uho, Spy 27 and Spy 39.
Containing 2 48V and 2 Dim conductors for individual dimming, the slender profile can easily be combined with Smart 48 and CTRL Delta to offer a quick and easy, minimalistic, wireless lighting set-up. Shiftline 19 has many application possibilities, as it dimensions are reduced to a minimum which allow a surface mounted installation that only requires a minimum of space. Be it in residential, hospitality or in retail, the different modules to apply on the Shiftline 19 track can be used for accent lighting or decorative lighting, offering multiple ways of flexibility.


deltalight.com/shiftline
deltalight.com/splitline

PRO

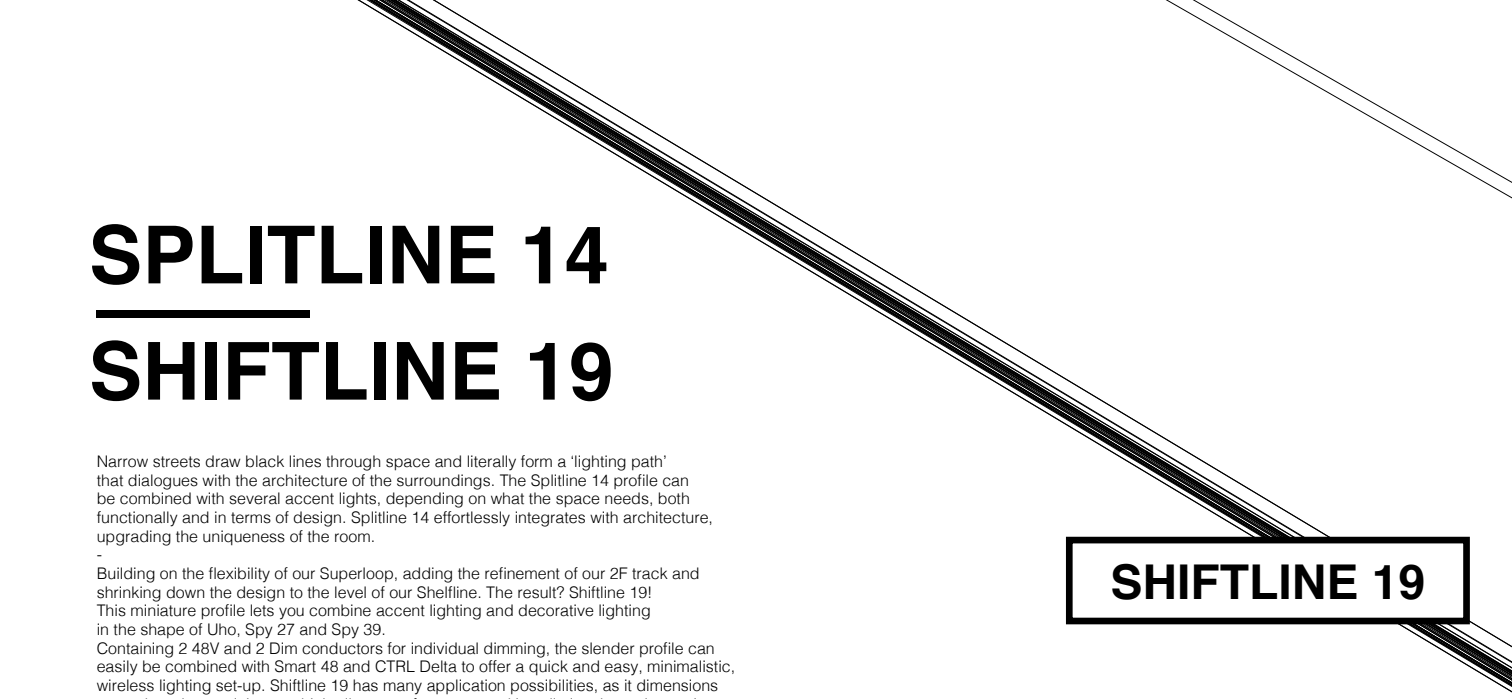


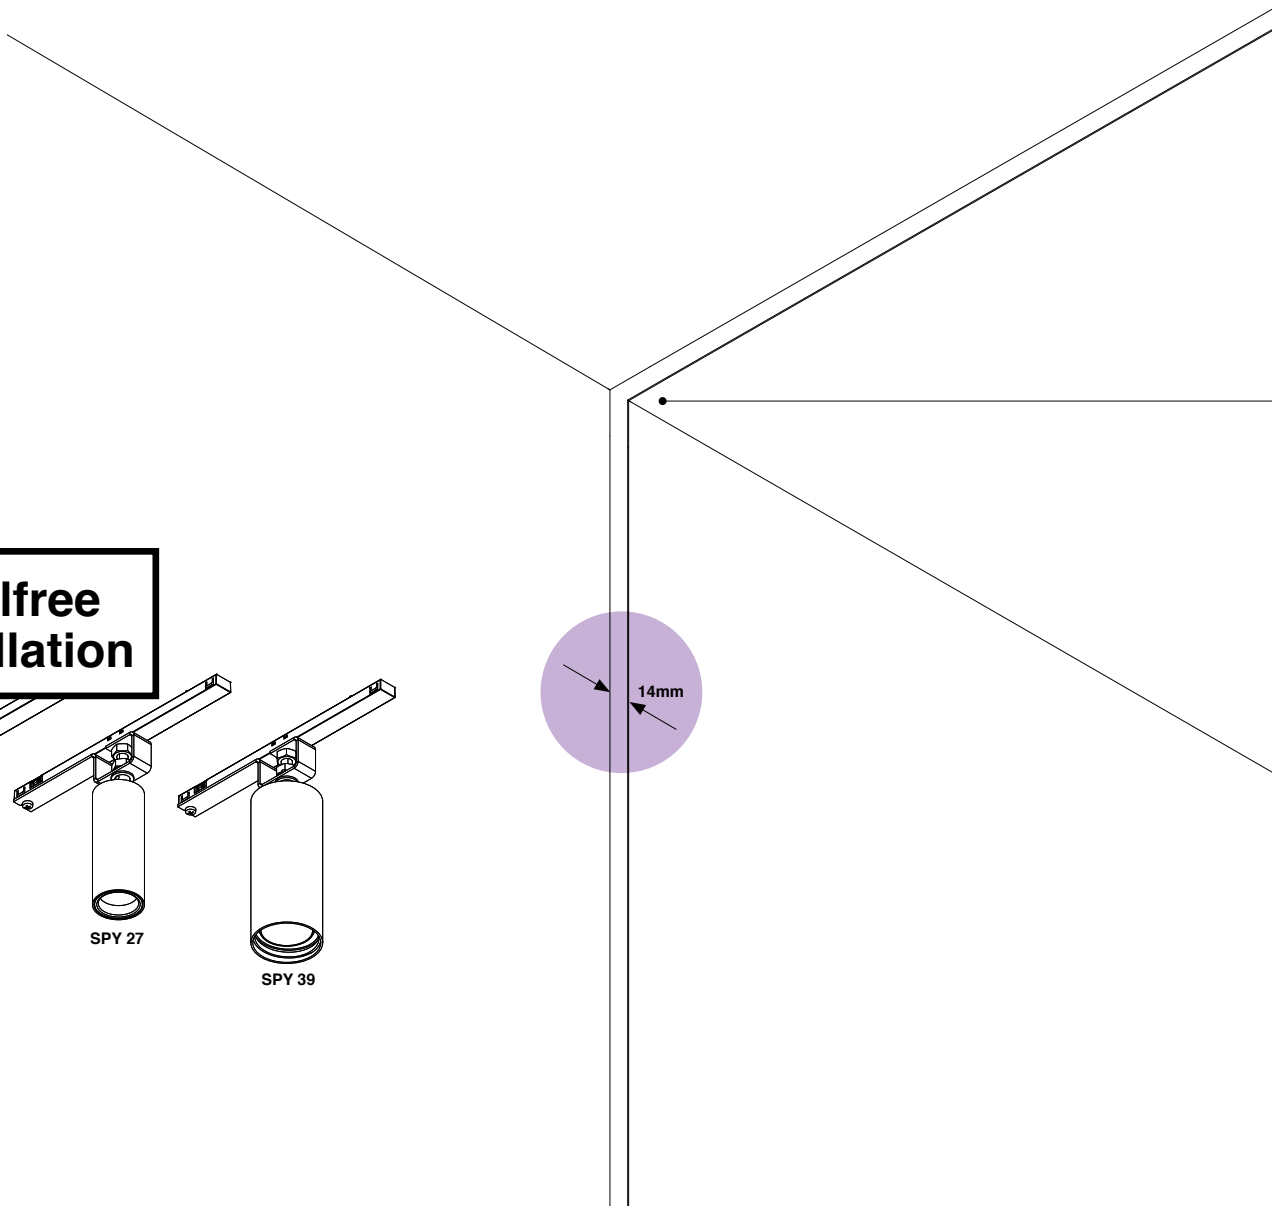

Toolfree installation

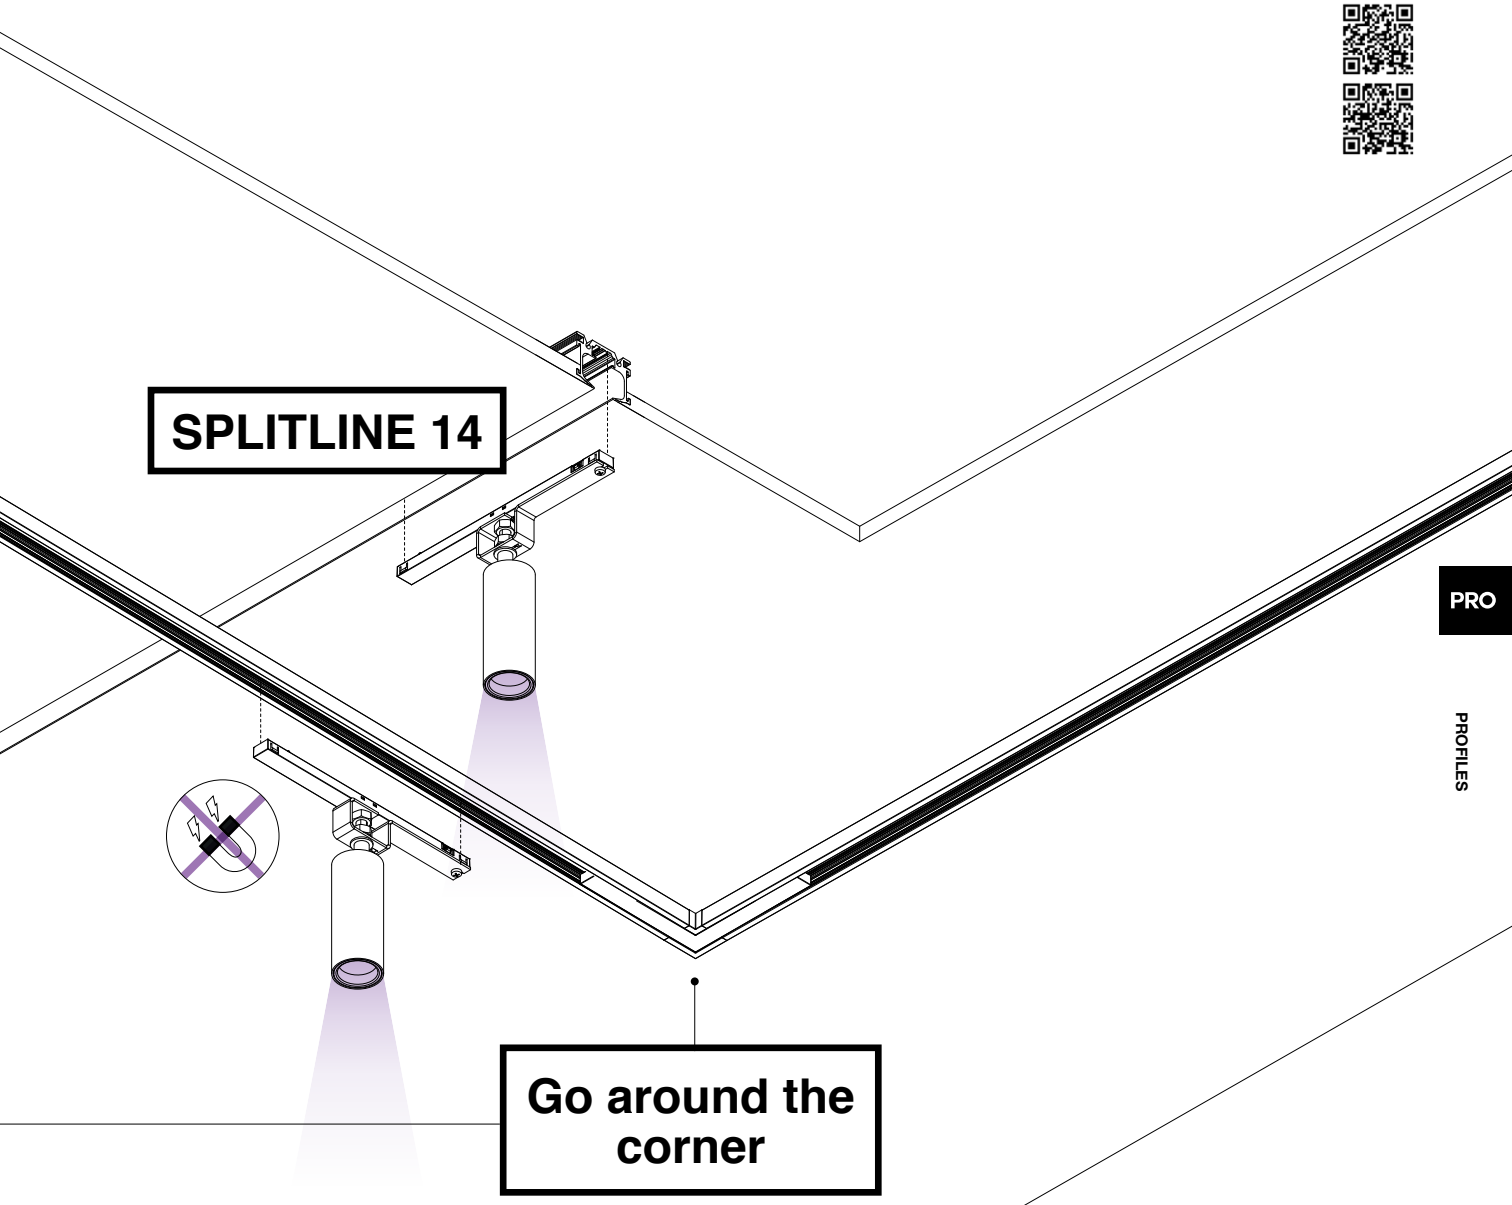
SPLITLINE 14
Go around the corner

SPLITLINE 14
SHIFTLINE 19

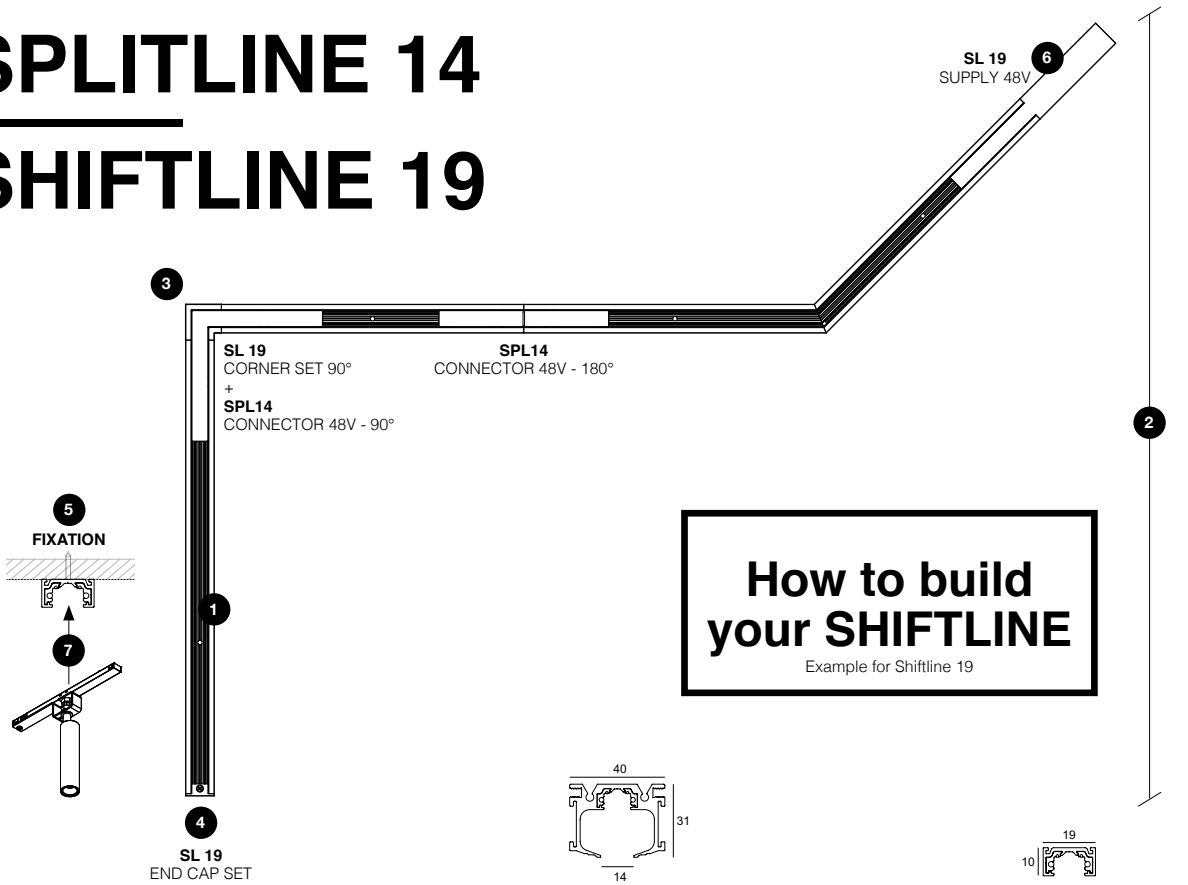

PRO

A

How to build your SHIFTLINE


Example for Shiftline 19


	SPLITLINE 14	SHIFTLINE 19
1 PROFILE		
PROFILE 2m	27300 0020 ◇ ◇ B ●	27011 0050 ◇ ◇ B ● / W ○
PROFILE 3m	27300 0030 ◇ ◇ B ●	27011 0060 ◇ ◇ B ● / W ○
2 DIMENSIONS		
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.		
3 JUNCTION / CORNER		
CORNER 180°	420 06 01	-
CORNER 90°	27300 0640 B	27011 0630 B / W
CORNER 90° V	27300 0650 B	27011 0670 B / W
4 ENDCAP		
ENDCAP (2 PCS.)	27300 0300 B	27011 0310 B / W
5 FIXATION		
RECESSED		
FIXATION SET (2 PCS.)	420 20 14 01	-
6 CONNECTION (max.200W/supply/max.50m)		
SUPPLY 48V-DC	27300 0910	27011 0910 B / W
CONNECTOR 48V-DC - 90°	-	27011 9920
CONNECTOR 48V-DC - 90° V	-	27011 9930
CONNECTOR 48V-DC - 180°	27011 9910	27011 9910
CONNECTOR 48V-DC - 0-180°	27300 9970	-
	LIGHT MODULES	
7 LIGHT MODULES	**SEE NEXT PAGE**	

deltalight.com/splitline

deltalight.com/shiftline

UHO







				SPL14		SL19		L SPL14		L SL19	
				MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 2 / 232lm / 48V-DC	IP20	30°	**27311 9320** ◇	**27312 9325** ◇	**27020 9320** ◇	**27021 9325** ◇	**27319 9320** ◇	**27320 9325** ◇	**27028 9320** ◇	**27029 9325** ◇
2700K CRI>90	LED 2 / 211 lm / 48V-DC			**27311 9220** ◇	**27312 9225** ◇	**27020 9220** ◇	**27021 9225** ◇	**27319 9220** ◇	**27320 9225** ◇	**27028 9220** ◇	**27029 9225** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○

SPY 27







				SPL14		SL19		L SPL14		L SL19	
				MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 5.8W / 787lm / 48V-DC	IP20	30°	**27313 9320** ◇	**27314 9325** ◇	**27022 9320** ◇	**27023 9325** ◇	**27321 9320** ◇	**27322 9325** ◇	**27030 9320** ◇	**27031 9325** ◇
2700K CRI>90	LED 5.8W / 753lm / 48V-DC			**27313 9220** ◇	**27314 9225** ◇	**27022 9220** ◇	**27023 9225** ◇	**27321 9220** ◇	**27322 9225** ◇	**27030 9220** ◇	**27031 9225** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○

SPY 39





				SPL14		SL19		L SPL14		L SL19	
				MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
3000K CRI>90	LED 8.6W / 1089lm / 48V-DC	IP20	20°	**27315 9320** ◇	**27316 9325** ◇	**27024 9320** ◇	**27025 9325** ◇	**27323 9320** ◇	**27324 9325** ◇	**27032 9320** ◇	**27033 9325** ◇
			40°	**27315 9330** ◇	**27316 9335** ◇	**27024 9330** ◇	**27025 9335** ◇	**27323 9330** ◇	**27324 9335** ◇	**27032 9330** ◇	**27033 9335** ◇
2700K CRI>90	LED 8.6W / 1041lm / 48V-DC		20°	**27315 9220** ◇	**27316 9225** ◇	**27024 9220** ◇	**27025 9225** ◇	**27323 9220** ◇	**27324 9225** ◇	**27032 9220** ◇	**27033 9225** ◇
			40°	**27315 9230** ◇	**27316 9235** ◇	**27024 9230** ◇	**27025 9235** ◇	**27323 9230** ◇	**27324 9235** ◇	**27032 9230** ◇	**27033 9235** ◇

◇ B ● / FBR ● / FG ● / GC ● / W ○


FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY							
			UHO		SPY 27		SPY 39		SPY 39 L	
			MDL	DALI	MDL	DALI	MDL	DALI	MDL	DALI
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *	R *	R *	R *	R *
MODULATOR MORE INFO TECHNICAL CHAPTER										
MODULATOR DALI 1-10V DIM	**300 90 011**	93 x 78 x 56	R *		R *		R *		R *	
or MODULATOR WIRELESS	**300 90 012**	93 x 78 x 56	R *		R *		R *		R *	
or MODULATOR WIRELESS PLUG-IN	**21032 0030**	190 x 16 x 16	R		R		R		R	
FINISH										
SPY 39 TUBE	**24144 0010 B / FBR / FG / GC / W**						R	R		
SPY 39 L TUBE	**24144 0020 B / FBR / FG / GC / W**								R	R
VISOR 27	**216 12 01**				A	A				
VISOR 39	**216 12 02**						A	A		

* REMOTE INSTALLATION

SPLIT-IT PRO

How to build your SPLIT-IT PRO

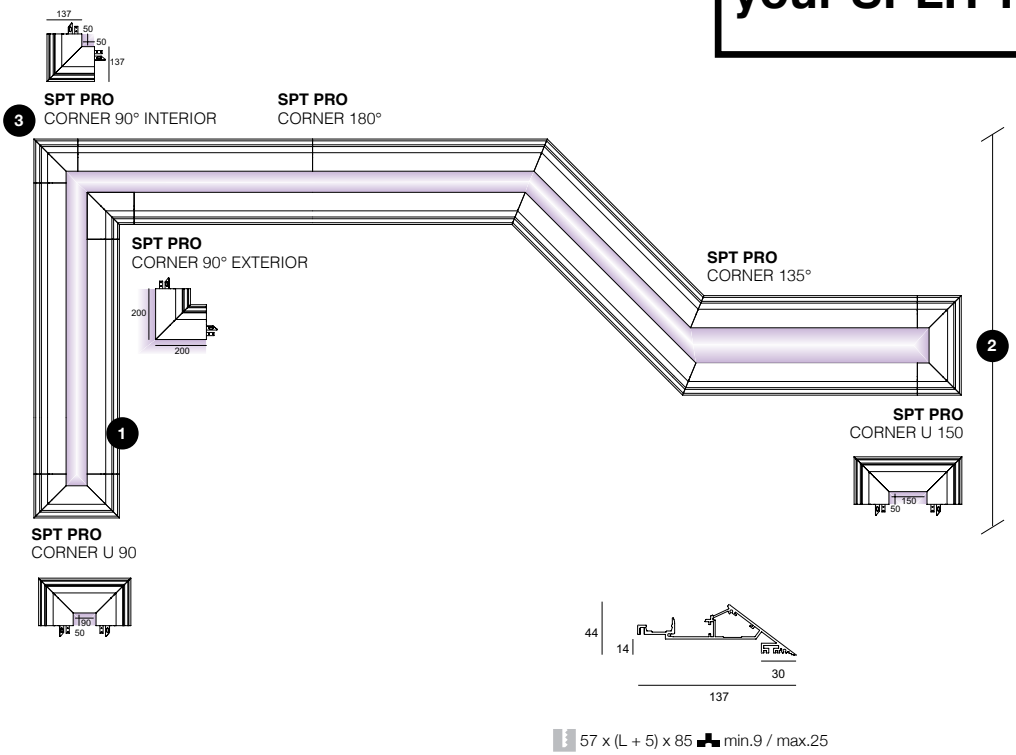


57 x (L + 5) x 85 min.9 / max.25


PRO

A

	SPLIT-IT PRO
1 PROFILE	
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	372 01 00 ◇ ◇ B ● / W ○
2 DIMENSIONS	
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.	
3 JUNCTION / CORNER	
CORNER 180°	372 01 06 11
CORNER 90° INTERIOR	372 01 06 06 B / W
CORNER 90° EXTERIOR	372 01 06 16 B / W
CORNER 135°	372 01 06 05
CORNER U 90	372 01 06 090 B / W
CORNER U 150	372 01 06 150 B / W
4 ENDCAP	
-	
5 FIXATION	
SURFACE MOUNTED	
WALL FIXATION	372 01 06 10
6 CONNECTION	
THROUGH WIRING 48V-DC / m INCL. 1 CONNECTOR/30CM - INCL. 5 WIRES	416 99 00


	LIGHT MODULES
7 LIGHT MODULES	**SEE PAGE 412-413**

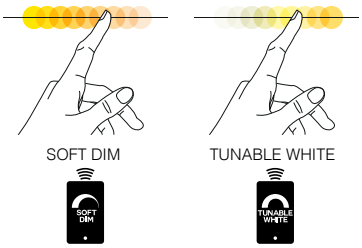

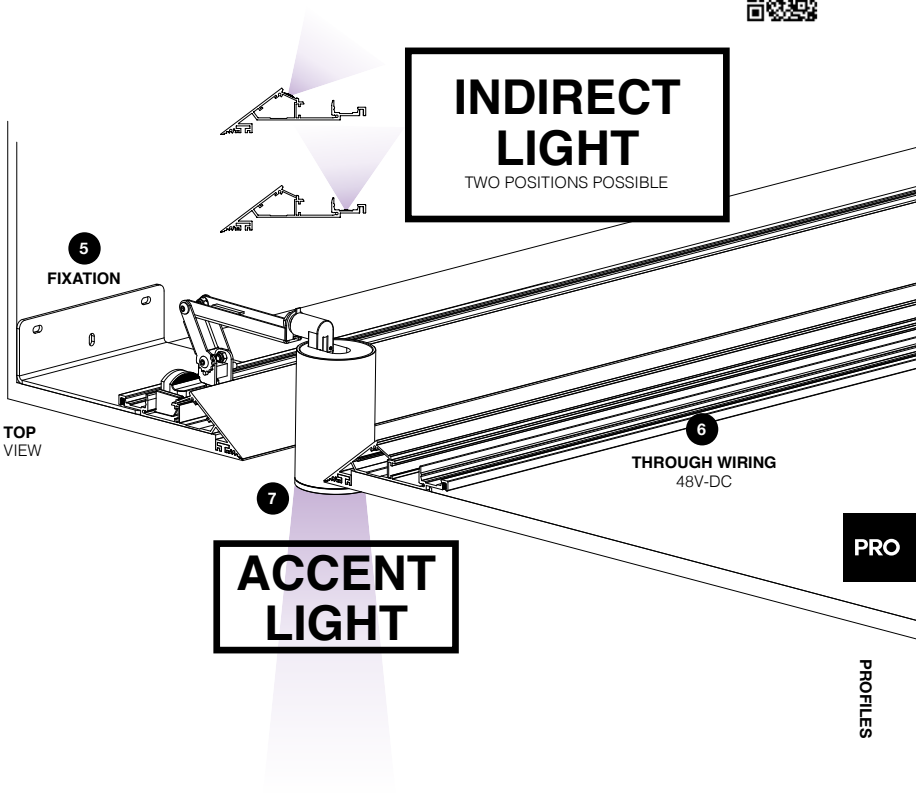

The Split-it made-to-measure lighting system integrates seamlessly with architecture and demonstrates that form and functionality of lighting have definitely gone down a new path, opening new ways to integrate “lighting paths” with architecture.
The Split-it Pro is a single profile which can be used on its own, or in combination of two. When used as a single profile the Split-it concept can be used parallel with the wall. In a double set-up the Split-It Pro enables you to create a linear setting with Dimensions of your choice. The Pro version enables integration of edgeless lighting paths, either vertically or horizontally. Its 37° degree sharp edge gives walls and ceilings a `paper-thin' appearance, with no visible wires and no shadow gaps, upgrading the level of architectural detail. It offers not only new ways to give shape to any lighting need, it also gives the possibility to integrate other engineering and technological necessities.
With its linear geometry the Split-it Pro enables you to define spaces and create volumes, to show direction, frame the room and add sharp edged detail to your architecture. It can be combined with a multitude of spots available for specific and demanding lighting needs, ranging up to 2000lm and offering multiple beam optics. All tools are available to meet the specific needs of your project.


deltalight.com/split-it

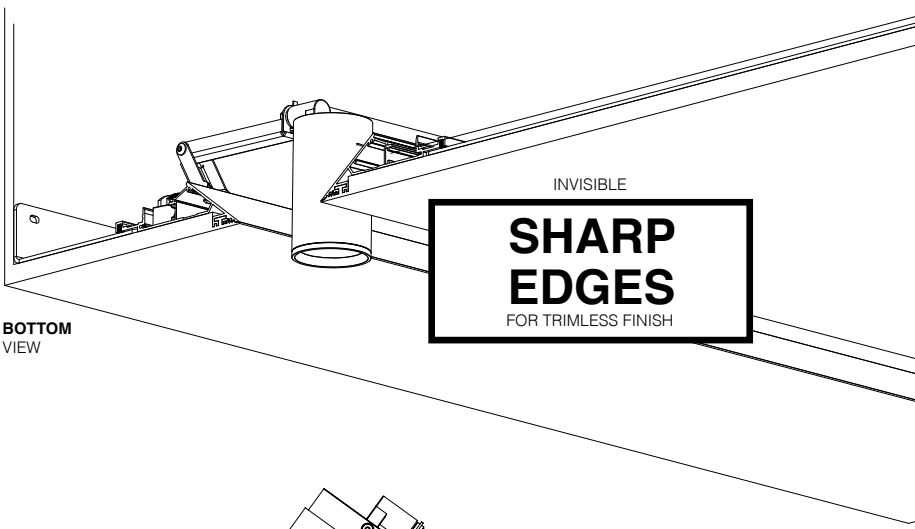


2

ADVISED MINIMUM DIMENSIONS		
MODULES	**X**	**Y**
SPY	90	250
LED LINE	90	200


WIRING / POWER SUPPLY	**Z**
THROUGH WIRING	70
24V PS	60
THROUGH WIRING + 24V PS	110

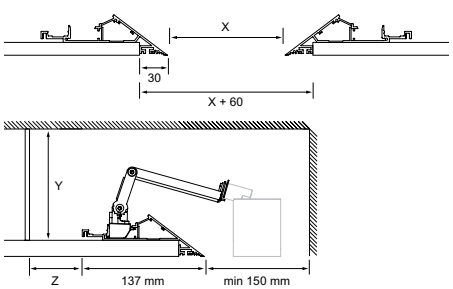

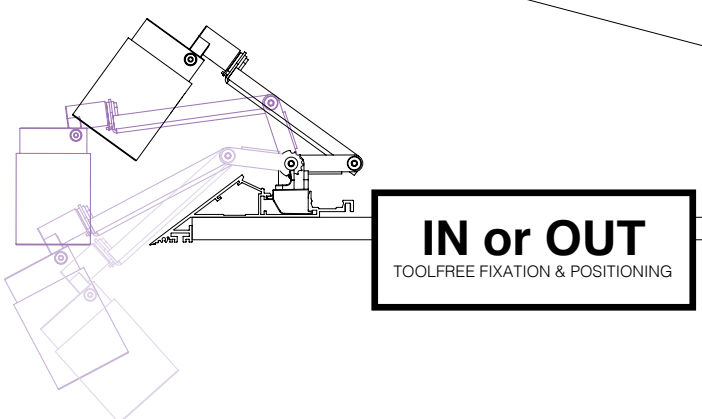

SPLIT-IT PRO

LEDFLEX CONNECTION

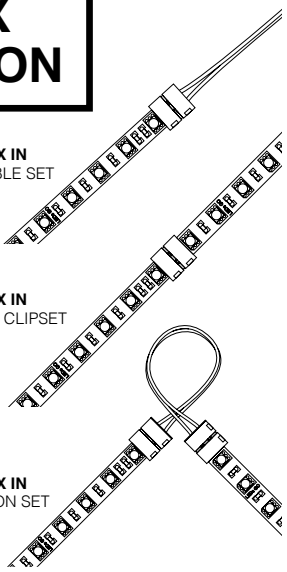



LEDFLEX IN
SUPPLY CABLE SET


LEDFLEX IN
CONNECTION CLIPSET

LEDFLEX IN
CONNECTION SET

PRO








SPLIT-IT SPY				52	FOCUS LP	66
3000K CRI>90	LED 12.4W / 1467lm / 700mA	IP20	20°	**18431 9320** ◇		
			45°	**18431 9330** ◇		
	LED 8.6W / 1018lm / 500mA LED 12.5W / 1378lm / 700mA		8-43°		**18428 9300** ◇	
	LED 17.2W / 2101lm / 500mA		18°			**18434 9310** ◇
			30°			**18434 9320** ◇
			45°			**18434 9330** ◇
2700K CRI>90	LED 12.4W / 1403lm / 700mA		20°	**18431 9220** ◇		
			45°	**18431 9230** ◇		
	LED 8.6W / 974lm / 500mA LED 12.5W / 1318lm / 700mA		8-43°		**18428 9200** ◇	
	LED 17.2W / 2009lm / 500mA		18°			**18434 9210** ◇
			30°			**18434 9220** ◇
			45°			**18434 9230** ◇

◇ B ● / W ○

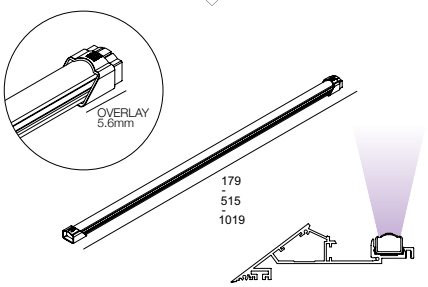

SPLIT-IT				PRO LED LINE
3000K / CRI>80 IP20	LED 2W / 270lm / 24V-DC	2W	L 179mm	**300 94 017 83**
	LED 6W / 806lm / 24V-DC	6W	L 515mm	**300 94 050 83**
	LED 12W / 1612lm / 24V-DC	12W	L 1019m	**300 94 100 83**

EXCL.POWER SUPPLY 24V-DC
INCL.LEDSTRIP - INCL.PC
MAX.6M / POWERLINE

A

deltalight.com/split-it



5m - 24V-DC
NOT MOUNTED

LEDFLEX		WHITE	WHITE MP	WHITE FP	WHITE HP	SOFT DIM	TW	RGB	RGB / TW
		Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 210 smd LED/m	Dividable per 62,5mm 128 smd LED/m	Dividable per 50mm 160 smd LED/m	Dividable per 62.5mm 224 smd LED/m	Dividable per 71,42mm 224 smd LED/m	Dividable per 50mm 120 smd LED/m	Dividable per 62,5mm 96 smd LED/m
		5W/m 551lm/m	**10W/m 1045lm/m**	**15W/m 1853lm/m**	**20W/m 2470lm/m**	**18W/m 1460 lm/m**	**9,5W/m (1) 1116lm/m**	**11W/m**	**19,2W/m (2)**
4000K CRI > 90	IN	**21030 0060**	**21030 0140**	**21030 0220**	**21030 0300**				
	OUT (IP65)	**21030 0100**	**21030 0180**	**21030 0260**					
3000K CRI > 90	IN	**21030 0040**	**21030 0120**	**21030 0200**	**21030 0280**				
	OUT (IP65)	**21030 0080**	**21030 0160**	**21030 0240**					
2700K CRI > 90	IN	**21030 0030**	**21030 0110**	**21030 0190**	**21030 0270**				
	OUT (IP65)	**21030 0070**	**21030 0150**	**21030 0230**					
1800K ▸ 3000K CRI > 90	IN					**21030 0020**			
	OUT (IP65)								
2700K ▸ 6000K CRI > 90	IN						**21030 0390**		
	OUT (IP65)								
RGB CRI > 90	IN							**21030 0400**	
	OUT (IP65)							**21030 0410**	
RGB WW / TW (2) CRI > 90	IN								**21030 0420**
	OUT (IP65)								

LED POWER SUPPLY 24V-DC / (MAX. 3M/POWERLINE FOR LEDFLEX > 15W/M) MORE INFO TECHNICAL CHAPTER										
NON DIM	24W / IP20	**21012 0160**	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
	150W / IP67	**300 89 24 150**	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	**21012 0181**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP20	**21012 0191**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP67	**21012 0101**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0111**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0121**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
DALI (DIM5)	60W / IP20	**21012 0205**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	100W / IP20	**21012 0225**	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
	60W / IP67	**21012 0135**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0145**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0155**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
CONTROL MORE INFO TECHNICAL CHAPTER										
	RGB / RGB TW DRIVER							**300 90 331**	**300 90 331**	**21032 0010**
	TOUCH CONTROLLER							**300 90 332**	**300 93 330**	**21032 0120**
WDL	24V-DC DIM UNIT						**300 90 010**			
1-10V							**300 90 003 ED1**			
DALI							**300 90 003 ED5**			
CONNECTION										
SUPPLY CABLE SET (10 PCS) **		**21031 0470**	**21031 0450**	**21031 0430**	**21031 0450**					
CONNECTION SET (10 PCS) **		**21031 0510**	**21031 0490**	**21031 0500**	**21031 0490**					
CONECTION CLIP SET (10 PCS)**		**21031 0480**	**21031 0460**	**21031 0440**	**21031 0460**					

(1) 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS
(2) RGB = 11,52W/M - TW = 3,4W/M - TW = 2700-6000K
* TO BE USED AS NON DIM
** ONLY FOR LEDFLEX IN

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY			
			SPLIT-IT			
			SPY 52	SPY FOCUS LP	SPY 66	LEDLINE
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT						
NON DIM - 48V-DC - 240W	**300 89 48 240**	114 x 63 x 125	R *	R *	R *	R *
1-10V DIM - 24V-DC - 60W	**21012 0171**	170 x 57 x 18	R *		R *	
DALI - 24V-DC - 60W	**21012 0205**	170 x 57 x 18	R *		R *	
LED POWER CONVERTER MORE INFO TECHNICAL CHAPTER						
DALI 48V-DC --> 500mA	**300 48 500 PRO ED5**		R	R	R	
DALI 48V-DC --> 700mA	**300 48 700 PRO ED5**		R	R		
LED POWER CONVERTER MORE INFO TECHNICAL CHAPTER						
SUPPLY CABLE LEDLINE	**300 94 93 04**	1 / POWERLINE				R
FINISH						
SPY 52 TUBE	**19810 0100 B / FBR / FG / GC / W**		R			
SPY 66 TUBE	**24611 0100 B / FBR / FG / GC / W**				R	
HONEYCOMB / LENS / GLASS MAX 500mA						
HONEYCOMB SINGLE USE	**19810 0010 B**		A			
HONEYCOMB DOUBLE USE	**19810 0060 B**		A			
LINEAR SPREAD LENS	**19810 0020**		A			
SPREAD LENS	**19810 0030**		A			
SOFTENING LENS	**19810 0040**		A			
GLASS SBL	**19810 0050**		A			
HONEYCOMB SINGLE USE	**24611 0150 B**				A	

* REMOTE INSTALLATION


TAGLINE

The Tagline made-to-measure profile provides an ultra-minimalistic light line that integrates seamlessly with the architectural lines of your project. Limited to only 9mm the Tagline seems almost invisible, a slender line of light that cuts through space.


Available in different application versions - from trimless recessed to surface mounted, as a pendant solution or as perimeter lighting - Tagline is offered as a creative tool for architects and designers to accentuate architectural detail or characterise environments. Any space becomes distinctively elegant when the Tagline is used in a simple linear way, or can become very magical and unique when used in a composition.

deltalight.com/tagline


PRO

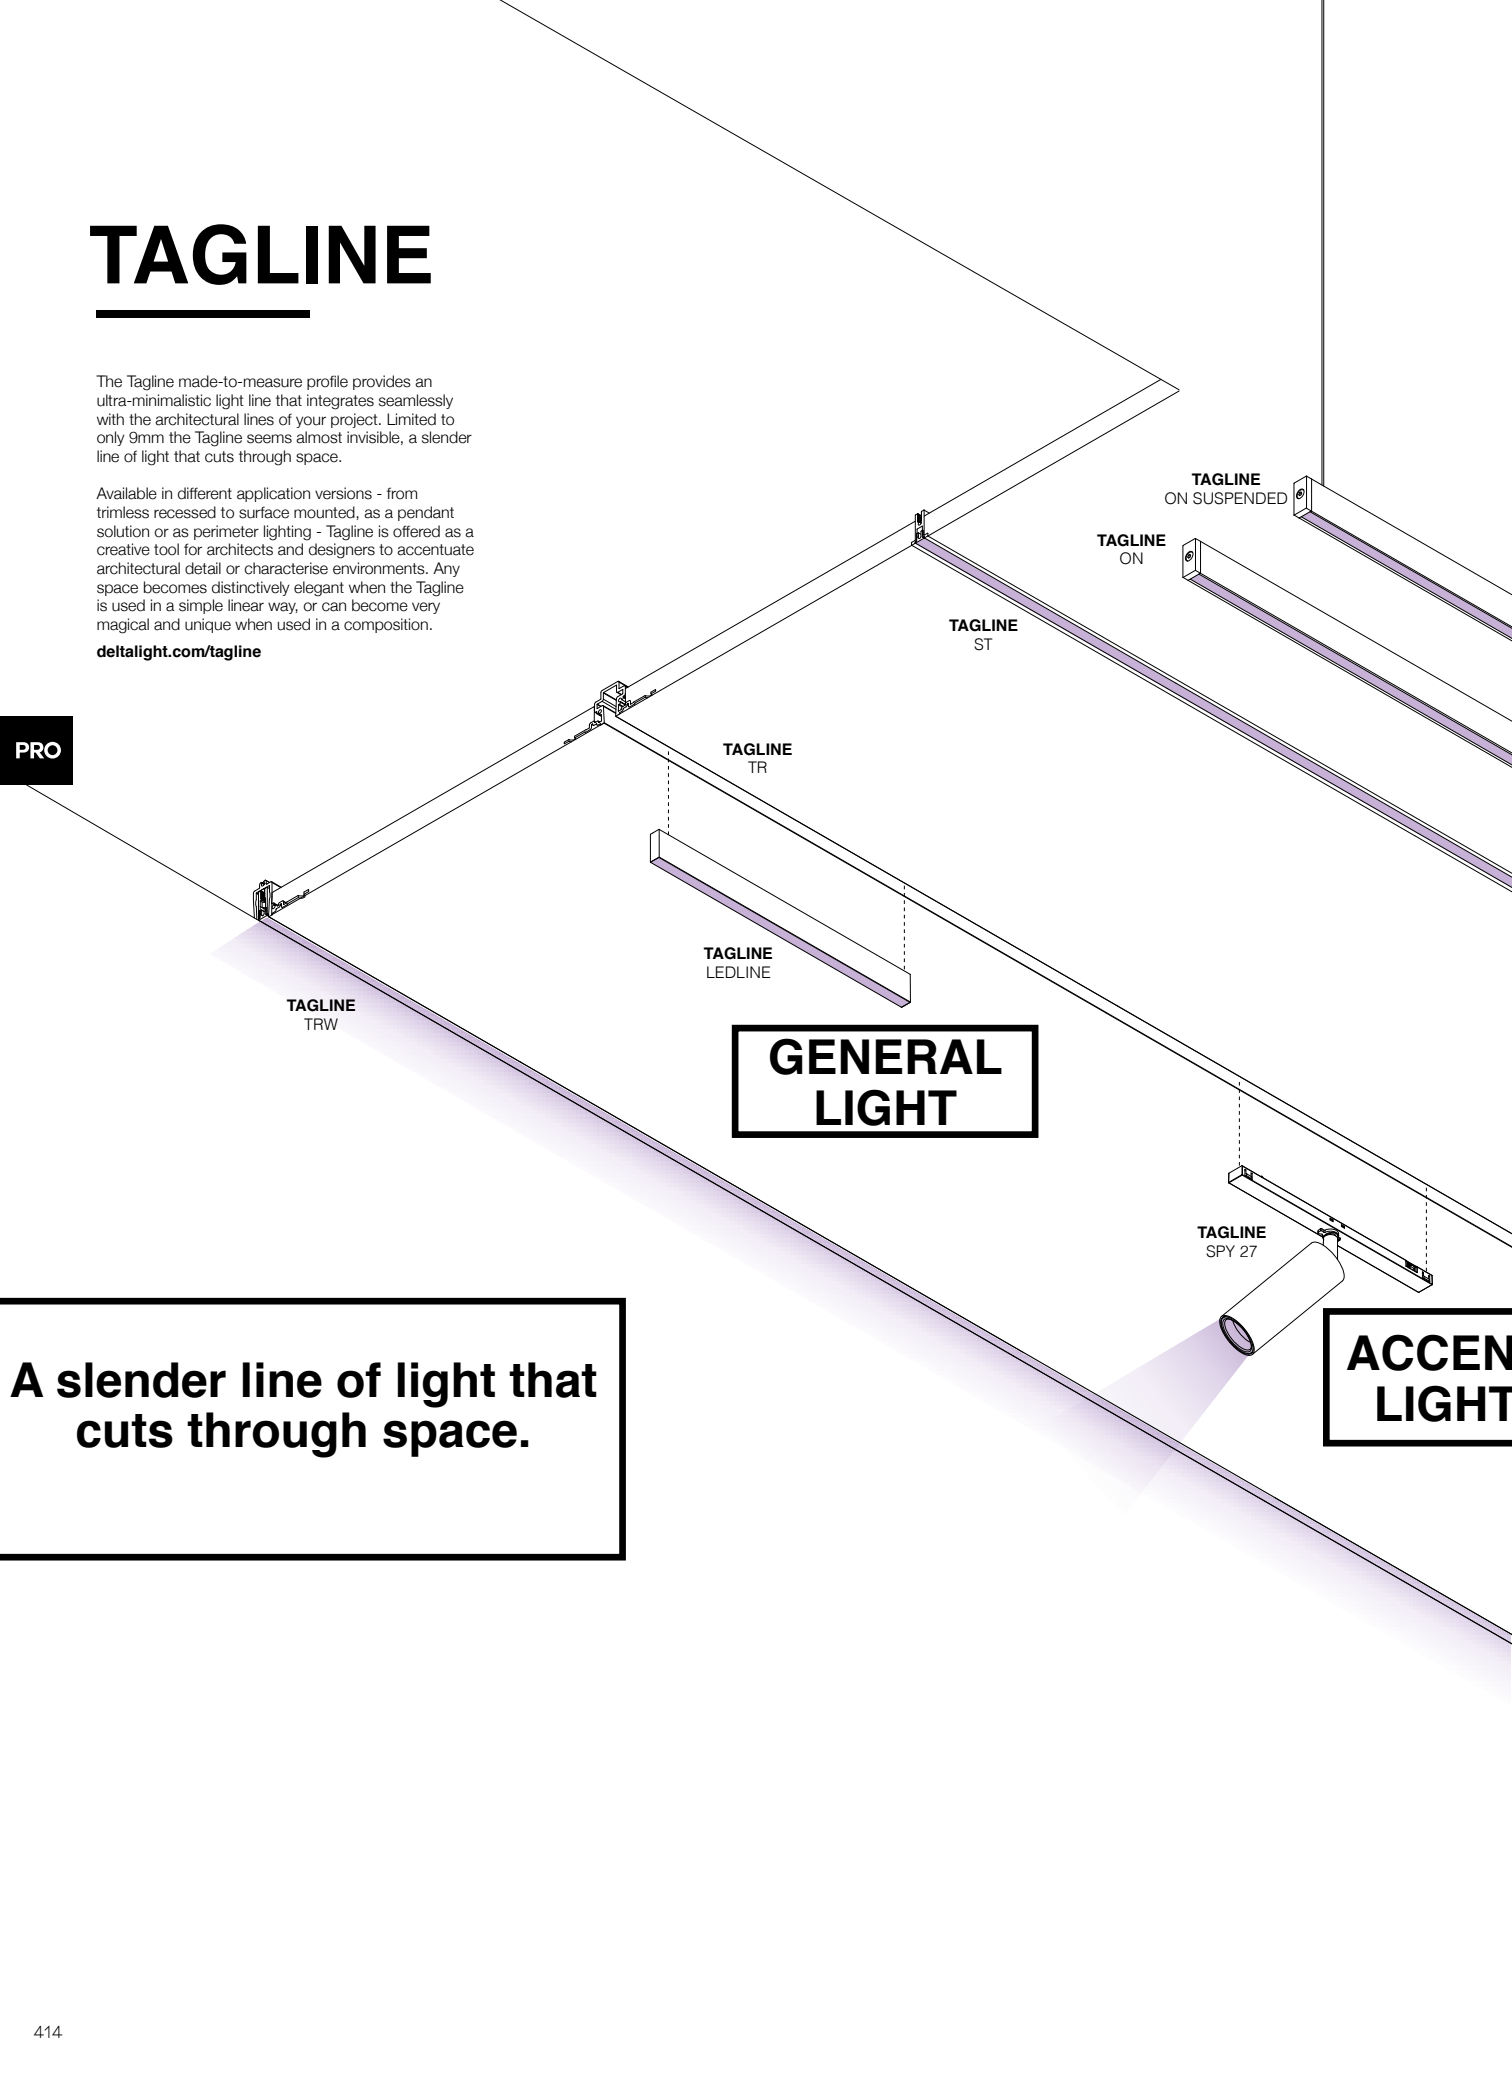

A slender line of light that cuts through space.

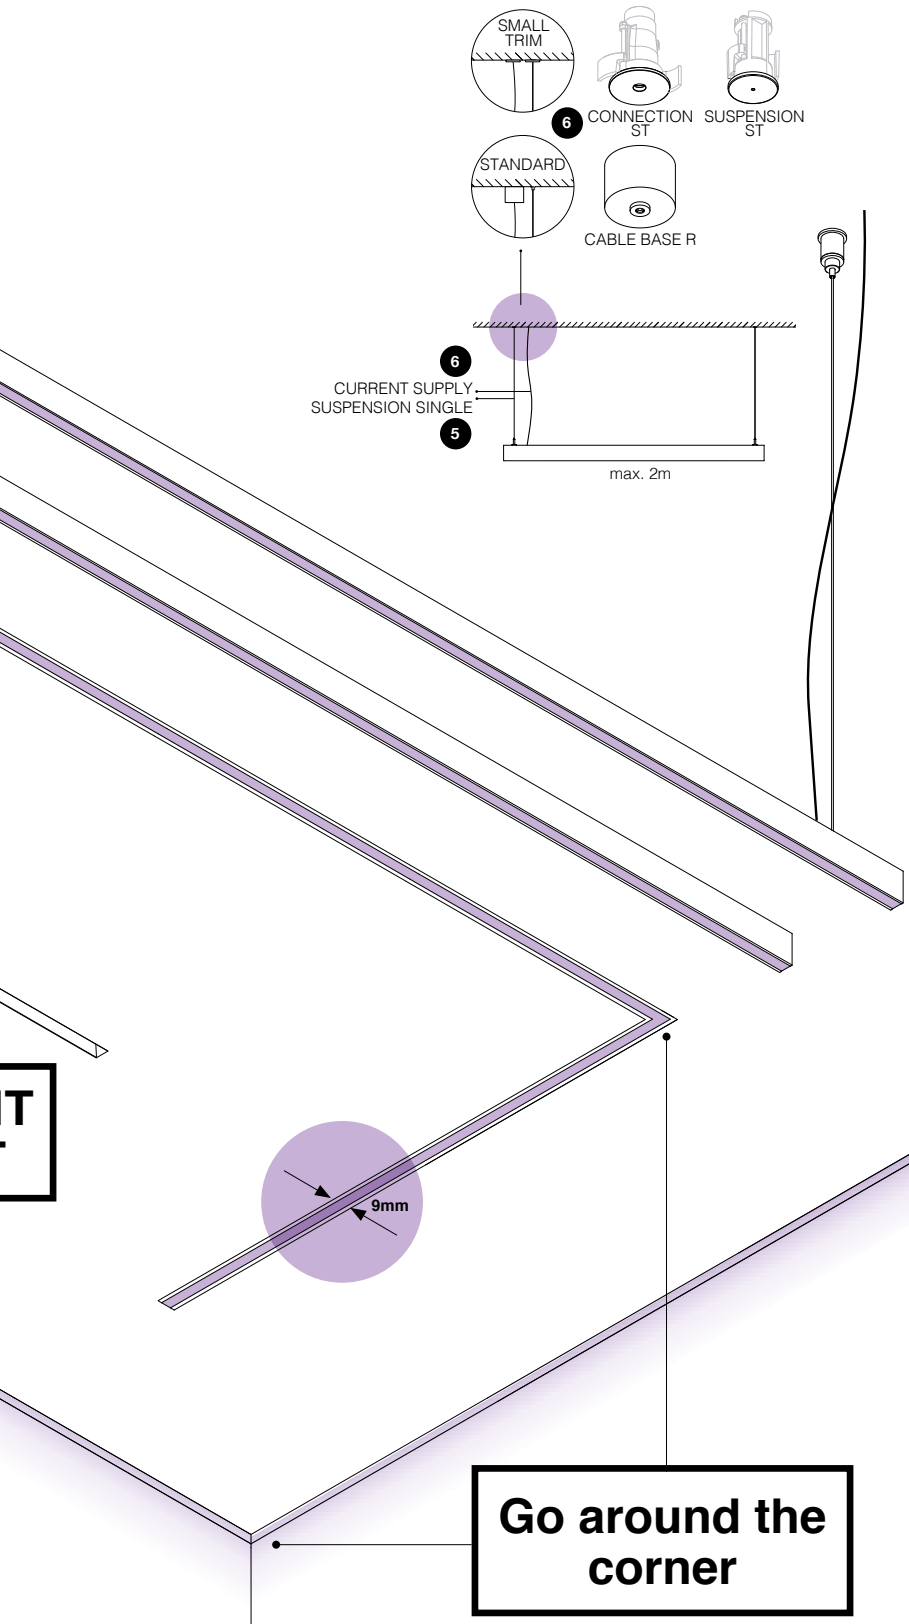
SMALL TRIM
6 CONNECTION ST
SUSPENSION ST
STANDARD
CABLE BASE R
6
CURRENT SUPPLY SUSPENSION SINGLE
5
max. 2m
9mm
Go around the corner


TAGLINE



How to build your TAGLINE

Example for Tagline ST


PRO

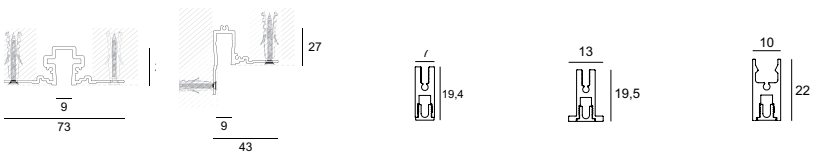


35 x (L + 4) | 25 x (L + 4) | 9 x (L + 4)

TAGLINE		TR	TRW	LEDLINE	ST	ON
1 PROFILE						
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m		425 01 00 00 ◇ ◇ B ●	425 02 00 00 ◇ ◇ B ●	425 03 00 00 ◇ ◇ B ●	425 05 00 00 ◇ ◇ B ● / W ○	425 04 00 00 ◇ ◇ B ● / GC ● / W ○
POLYCARBONATE / m						
SANDBLASTED (SBL)		-	-	INCLUDED	INCLUDED	INCLUDED
2 DIMENSIONS						
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.						
3 JUNCTION / CORNER						
CORNER 90°		425 01 06 06	-	-	425 05 06 06	425 04 06 06
CORNER 90° INTERIOR		-	425 02 06 06	-	-	-
CORNER 90° EXTERIOR		-	425 02 06 16	-	-	-
4 ENDCAP						
ENDCAP (2 PCS.)		425 01 03 01 B	425 02 03 01 B	425 03 03 01 B	425 05 03 01 B / W	425 04 03 01 B / W
5 FIXATION						
RECESSED						
INSIDE CLIP (2 PCS.)		-	-	-	425 05 14 01	-
SURFACE MOUNTED						
FIXATION CLIP (2 PCS.)		-	-	-	-	425 04 06 11
SUSPENDED						
SUSPENSION SINGLE 1,6M (1 PC.) **		-	-	-	-	425 09 01
SUSPENSION ST		-	-	-	-	15225 0340 B / W
6 CONNECTION						
SUSPENDED						
CURRENT SUPPLY 1,6M	2X0,5MM²	-	-	-	-	425 97 51
CONNECTION ST		-	-	-	-	15225 0360 B / W
CABLE BASE R		-	-	-	-	203 99 55 B / W
CABLE BASE S		-	-	-	-	203 99 56 B / W
COVERSET R	100MM	-	-	-	-	204 00 100 B / W
		LIGHT MODULES				
7 LEDLINE		✓	✓	-	-	-
LEDFLEX		-	-	✓	✓	✓
SPY 27		✓	-	-	-	-

** ONLY FOR PROFILE LENGTHS UP TO 2m



TAGLINE TR				SPY 27
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	30°	**18717 9320** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA			**18717 9220** ◇
				◇ B / FBR / FG / GC / W



/ m - 24V-DC
MOUNTED

LEDFLEX		SMALL
		Dividable per 29,4mm 238 smd LED/m
		8,4W/m 820lm/m
4000K CRI > 90	IN	**300 91 51 94**
3000K CRI > 90	IN	**300 91 51 93**
2700K CRI > 90	IN	**300 91 51 92**

LED POWER SUPPLY 24V-DC MORE INFO TECHNICAL CHAPTER (MAX. 5M/POWERLINE)			
NON DIM	24W / IP20	**21012 0160**	max. 2,8m
	150W / IP67	**300 89 24 150**	max. 17,8m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 7,1m
	90W / IP20	**21012 0181**	max. 10,7m
	120W / IP20	**21012 0191**	max. 14,2m
	60W / IP67	**21012 0101**	max. 7,1m
	90W / IP67	**21012 0111**	max. 10,7m
	120W / IP67	**21012 0121**	max. 14,2m
DALI (DIM5)	60W / IP20	**21012 0205**	max. 7,1m
	100W / IP20	**21012 0225**	max. 11,9m
	60W / IP67	**21012 0135**	max. 7,1m
	90W / IP67	**21012 0145**	max. 10,7m
	120W / IP67	**21012 0155**	max. 14,2m

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY SPY 27
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT			
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *
1-10V DIM 15	**300 90 124**	min. 55	R *
DALI 14	**300 90 125**	min. 55	R *
FINISH			
VISOR 27	**216 12 01**		A

* REMOTE INSTALLATION

CONNECT A / I

CONNECT I
Connect I balances on the edge between wall and ceiling or wall and wall, as you like. Mounted directly into the corner, this minimalistic profile generates a soft line of light on one or both sides, transforming bare corners into decorative perimeters.


CONNECT A
The delicate Connect A is designed to add subtle accents onto vertical surfaces. Emitted from a profile of only 11 by 51mm,
Connect A can be applied as a linear down-up light.

deltalight.com/connect


PRO

A

ATTACHED TO THE WALL
A.K.A. **A**NDEMEUR





IN THE CORNER
A.K.A. **I**NDENOEK



CONNECT	A	I
1 PROFILE		
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	28101 0000 ◇ ◇ B ● / W ○	28102 0000 ◇ ◇ B ● / W ○
POLYCARBONATE / m		
SANDBLASTED (SBL)	INCLUDED	INCLUDED
2 DIMENSIONS		
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.		
3 JUNCTION / CORNER		
-		
4 ENDCAP		
ENDCAP (2 PCS.)	28101 0310 B / W	28102 0310 B / W
5 FIXATION		
SURFACE MOUNTED		
INSIDE CLIP (2 PCS.)	391 06 11	-
6 CONNECTION		
-		
	LIGHT MODULES	
7 LED FLEX	**SEE PAGE 419**	

SOFT INDIRECT LIGHT

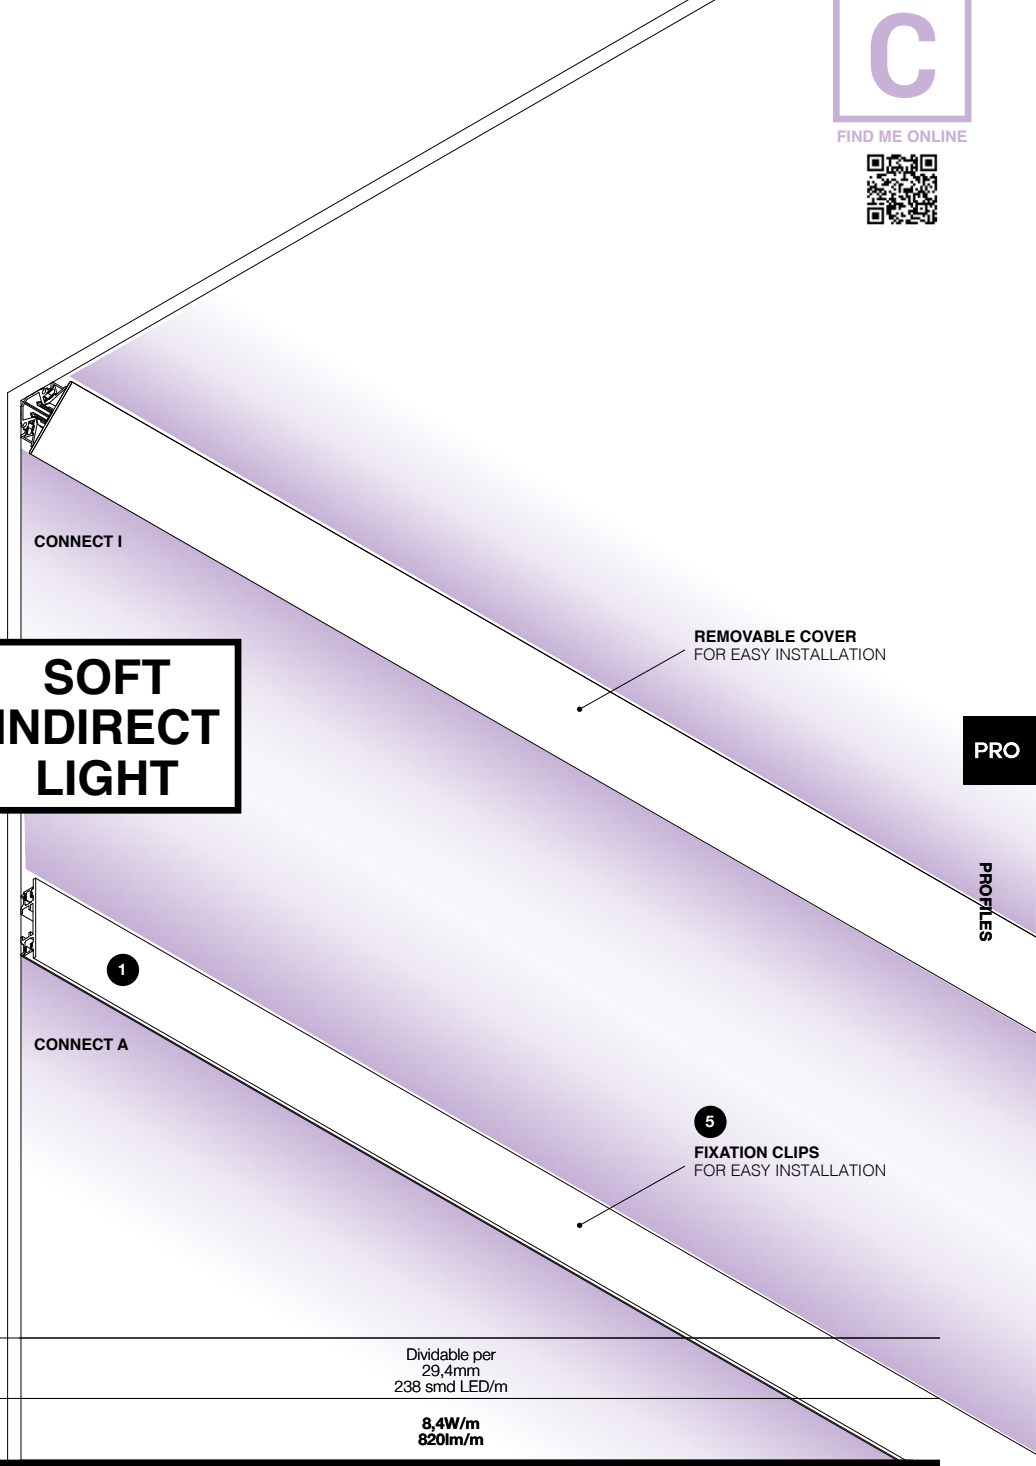



/ m - 24V-DC
MOUNTED

Dividable per
29,4mm
238 smd LED/m

8,4W/m
820lm/m

LEDFLEX		SMALL
4000K CRI > 90	IN	**300 91 51 94**
3000K CRI > 90	IN	**300 91 51 93**
2700K CRI > 90	IN	**300 91 51 92**

LED POWER SUPPLY 24V-DC (MAX. 5M/POWERLINE) MORE INFO TECHNICAL CHAPTER			
NON DIM	24W / IP20	**21012 0160**	max. 2,8m
	150W / IP67	**300 89 24 150**	max. 17,8m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 7,1m
	90W / IP20	**21012 0181**	max. 10,7m
	120W / IP20	**21012 0191**	max. 14,2m
	60W / IP67	**21012 0101**	max. 7,1m
	90W / IP67	**21012 0111**	max. 10,7m
	120W / IP67	**21012 0121**	max. 14,2m
DALI (DIM5)	60W / IP20	**21012 0205**	max. 7,1m
	100W / IP20	**21012 0225**	max. 11,9m
	60W / IP67	**21012 0135**	max. 7,1m
	90W / IP67	**21012 0145**	max. 10,7m
	120W / IP67	**21012 0155**	max. 14,2m

DOT.COM

Our Dot.Com family is not only limited to spotlight beam angles, it also has linear wallwashers in its range for a soft, even light effect on vertical surfaces. These come as single luminaires, as modules to fit in the magnetic profiles and as a bespoke trimless or surface mounted profile solution, perfect to adapt the light to your specific desires.


deltalight.com/dotcom

How to build your DOT.COM

Example for Dot.Com ON




PRO




35 x (L + 5)







DOT.COM WALLWASH		TR	LEDLINE	ON
1 PROFILE				
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m		424 01 00 00 ◇ ◇ B ●	424 02 00 00 ◇ ◇ B ●	16312 0000 ◇ ◇ B ● / W ○
POLYCARBONATE / m				
SANDBLASTED (SBL)		-	INCLUDED	INCLUDED
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
CORNER 180°		424 01 06 01	-	16312 0620
CORNER 90°		424 01 06 06	-	16312 0630
4 ENDCAP				
ENDCAP (2 PCS.)		424 01 03 01 B	424 02 03 01 B	16312 0310 B / W
5 FIXATION				
SURFACE MOUNTED				
INSIDE CLIP (2 PCS.)		-	-	391 06 11
SUSPENDED				
SUSPENSION SINGLE 1,6M (1 PC.)		-	-	391 09 01
SUSPENSION ST		-	-	15225 0340 B / W
6 CONNECTION				
POWERBOX		-	-	-
NON DIM 24V-DC / 60W		-	-	300 24 060 B / W
1-10V DIM 24V-DC / 60W		-	-	300 24 060 ED1 B / W
DALI 24V-DC / 150W		-	-	300 24 150 ED5 B / W
SUSPENDED				
CURRENT SUPPLY 1,6M	2X0,75MM²	-	-	391 97 51
CONNECTION ST		-	-	15225 0360 B / W
CABLE BASE R		-	-	203 99 55 ANO / B / W
CABLE BASE S		-	-	203 99 56 ANO / B / W
COVERSET R	100MM	-	-	204 00 100 B / W
		LIGHT MODULES		
7 LED FLEX		**SEE PAGE 437**		

A

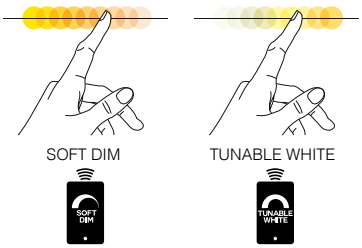
SOFT DIM
TUNABLE WHITE
SOFT DIM
TUNABLE WHITE

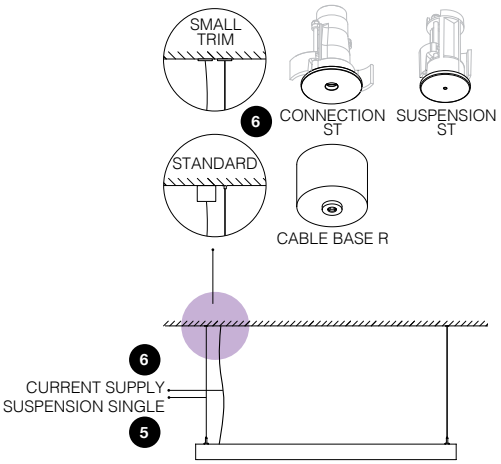
SMALL TRIM
6
CONNECTION ST
SUSPENSION ST
STANDARD
CABLE BASE R
6
CURRENT SUPPLY
SUSPENSION SINGLE
5

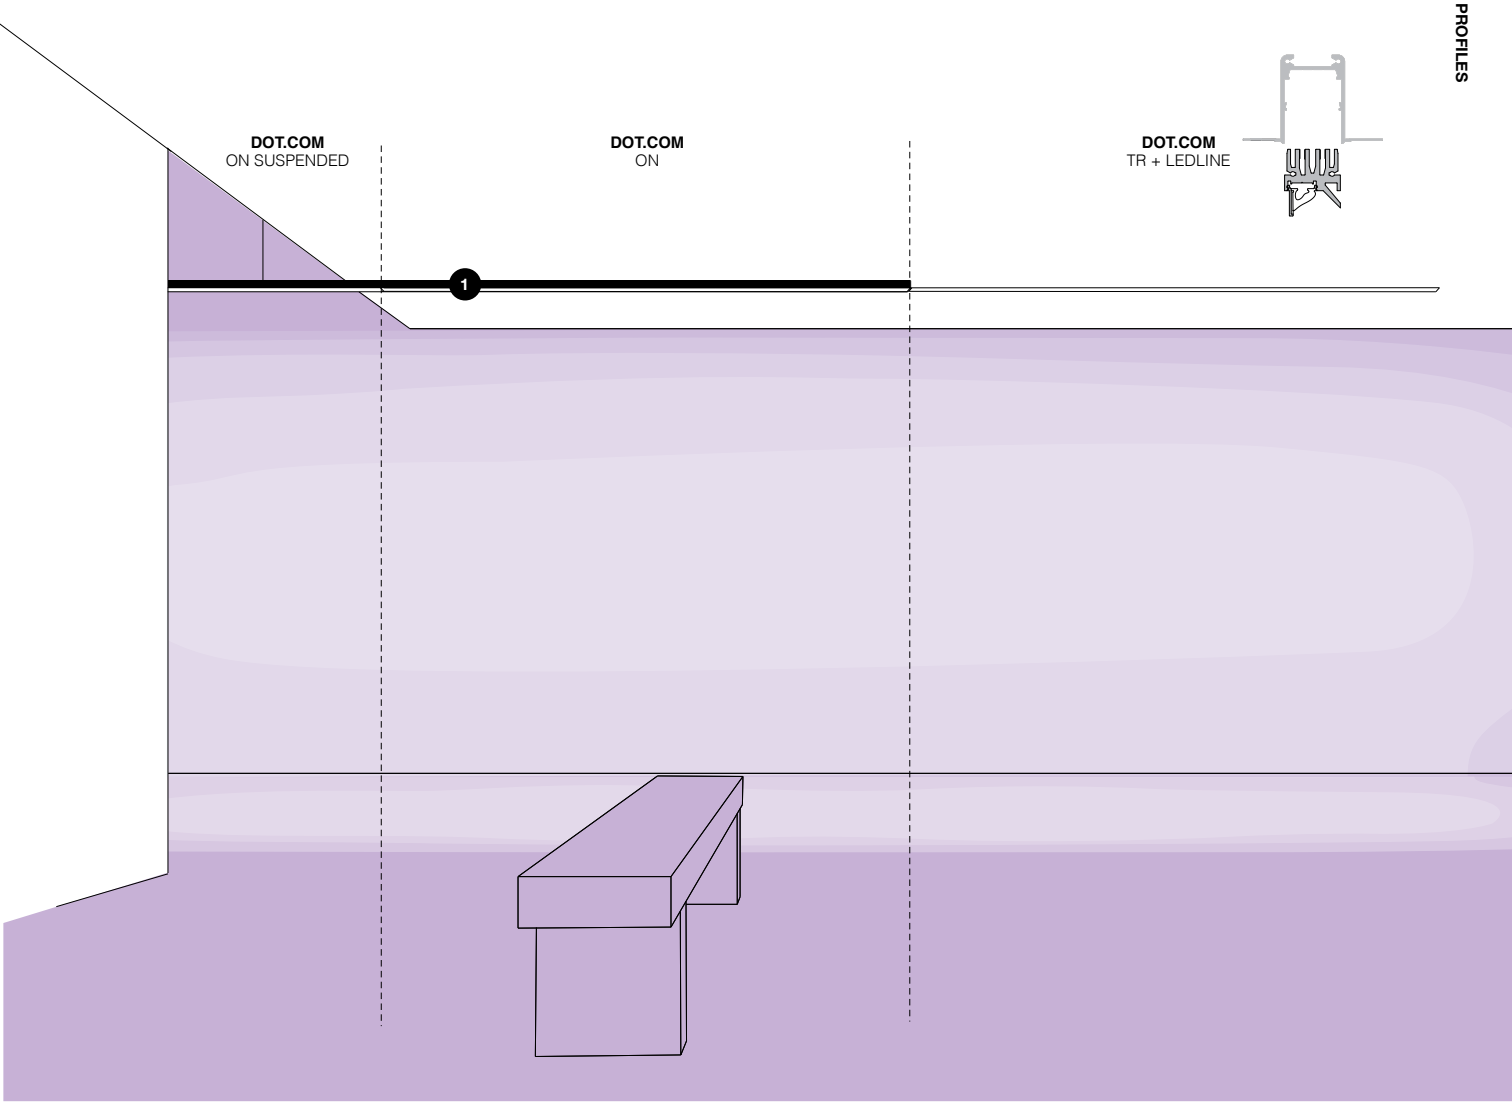
DOT.COM
ON SUSPENDED
DOT.COM
ON
DOT.COM
TR + LEDLINE
1

PRO



25
45


FEMTOLINE 25
The smallest of the range for surface mounted lighting solutions. Femtoline 25 offers 3 ways of general lighting: standard with a semi-recessed plexi that creates both direct and indirect lighting, Femtoline 25 F with a flush plexi for direct lighting and Femtoline 25 T with a tilted plexi to create an asymmetric light effect.

FEMTOLINE 45
The recessed solution. Femtoline 45 complements the Femtoline 25 range in applications that allow recessed installation.

Multifunctional in use, the Femtoline profiles can be used in both interior and exterior lighting concepts. The ultra-minimalistic design and extensive options in flexible RGB, tunable white, warm and cold white LED allow you to create endless lines of light, either recessed, surface or pendant mounted. The polycarbonate that closes the profile guarantees a pleasurable light effect and unifies single led dots to one continuous line.

The range of Femtoline profiles is very extensive, with each family member having its own specific design and application area. Small or wider profile design, down or down-up lighting, wall, ceiling or floor mounted, flush or tilted plexi, ... the Femtoline family offers a solution to any lighting problem.

deltalight.com/femtoline

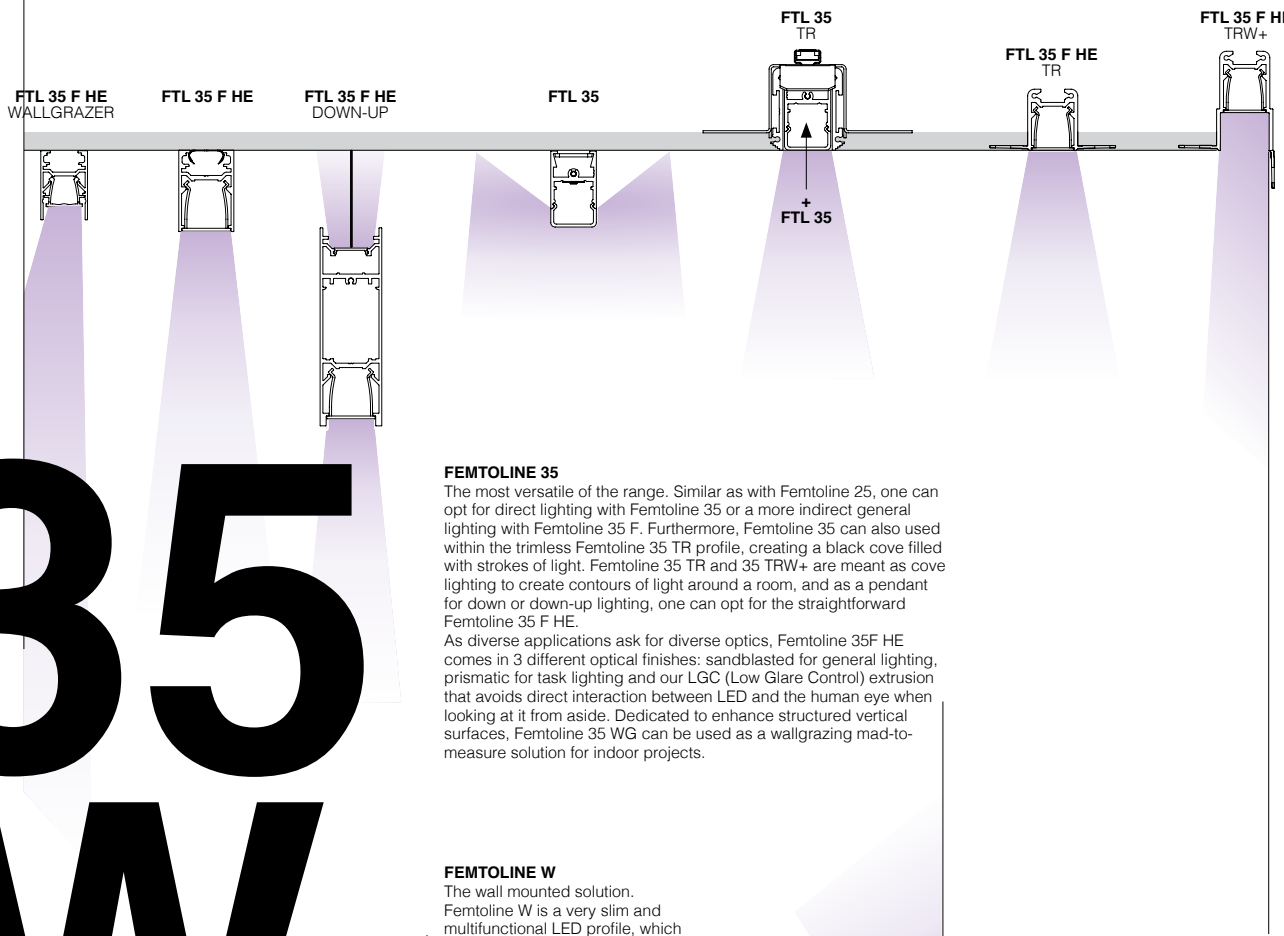

35 W

FEMTOLINE 35
The most versatile of the range. Similar as with Femtoline 25, one can opt for direct lighting with Femtoline 35 or a more indirect general lighting with Femtoline 35 F. Furthermore, Femtoline 35 can also used within the trimless Femtoline 35 TR profile, creating a black cove filled with strokes of light. Femtoline 35 TR and 35 TRW+ are meant as cove lighting to create contours of light around a room, and as a pendant for down or down-up lighting, one can opt for the straightforward Femtoline 35 F HE.
As diverse applications ask for diverse optics, Femtoline 35F HE comes in 3 different optical finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from aside. Dedicated to enhance structured vertical surfaces, Femtoline 35 WG can be used as a wallgrazing mad-to-measure solution for indoor projects.

FEMTOLINE W
The wall mounted solution.
Femtoline W is a very slim and multifunctional LED profile, which can be used in both interior and exterior lighting concepts. This wall mounted profile can be used for either up- or downlight, creating a cosy wall grazing effect.




FEMTOLINE


FEMTOLINE 25


The smallest of the range for surface mounted lighting solutions. Femtoline 25 offers 3 ways of general lighting: standard with a semi-recessed plexi that creates both direct and indirect lighting, Femtoline 25 F with a flush plexi for direct lighting and Femtoline 25 T with a tilted plexi to create an asymmetric light effect.

PRO

A











FEMTOLINE	25	25 F	25 T	25 TP
1 PROFILE				
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	375 00 00 ◇ ◇ ANO ◯ / B ● / W ◯	382 00 00 ◇ ◇ ANO ◯ / B ● / W ◯	381 00 00 ◇ ◇ ANO ◯ / B ● / W ◯	381 01 00 00 ◇ ◇ ANO ◯ / B ● / W ◯
POLYCARBONATE / m				
SANDBLASTED (SBL)	INCLUDED	INCLUDED	INCLUDED	INCLUDED
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
CORNER 90°	375 06 06	382 06 06	-	-
4 ENDCAP				
ENDCAP (2 PCS.)	375 03 01 A / B / W	382 03 01 A / B / W	381 03 01 A / B / W	381 01 03 01 ANO / B / W
5 FIXATION				
SURFACE MOUNTED				
FIXATION CLIP	INCLUDED	398 03 06 11 (10 PCS.)	INCLUDED	INCLUDED
6 CONNECTION				
-				
	LIGHT MODULES			
7 LED FLEX	**SEE PAGE 437**			


deltalight.com/femtoline

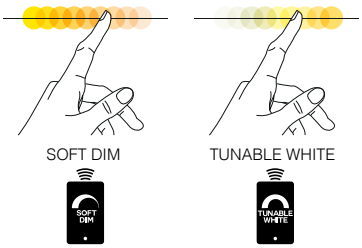

How to build your FEMTOLINE


Example for Femtoline 25 F

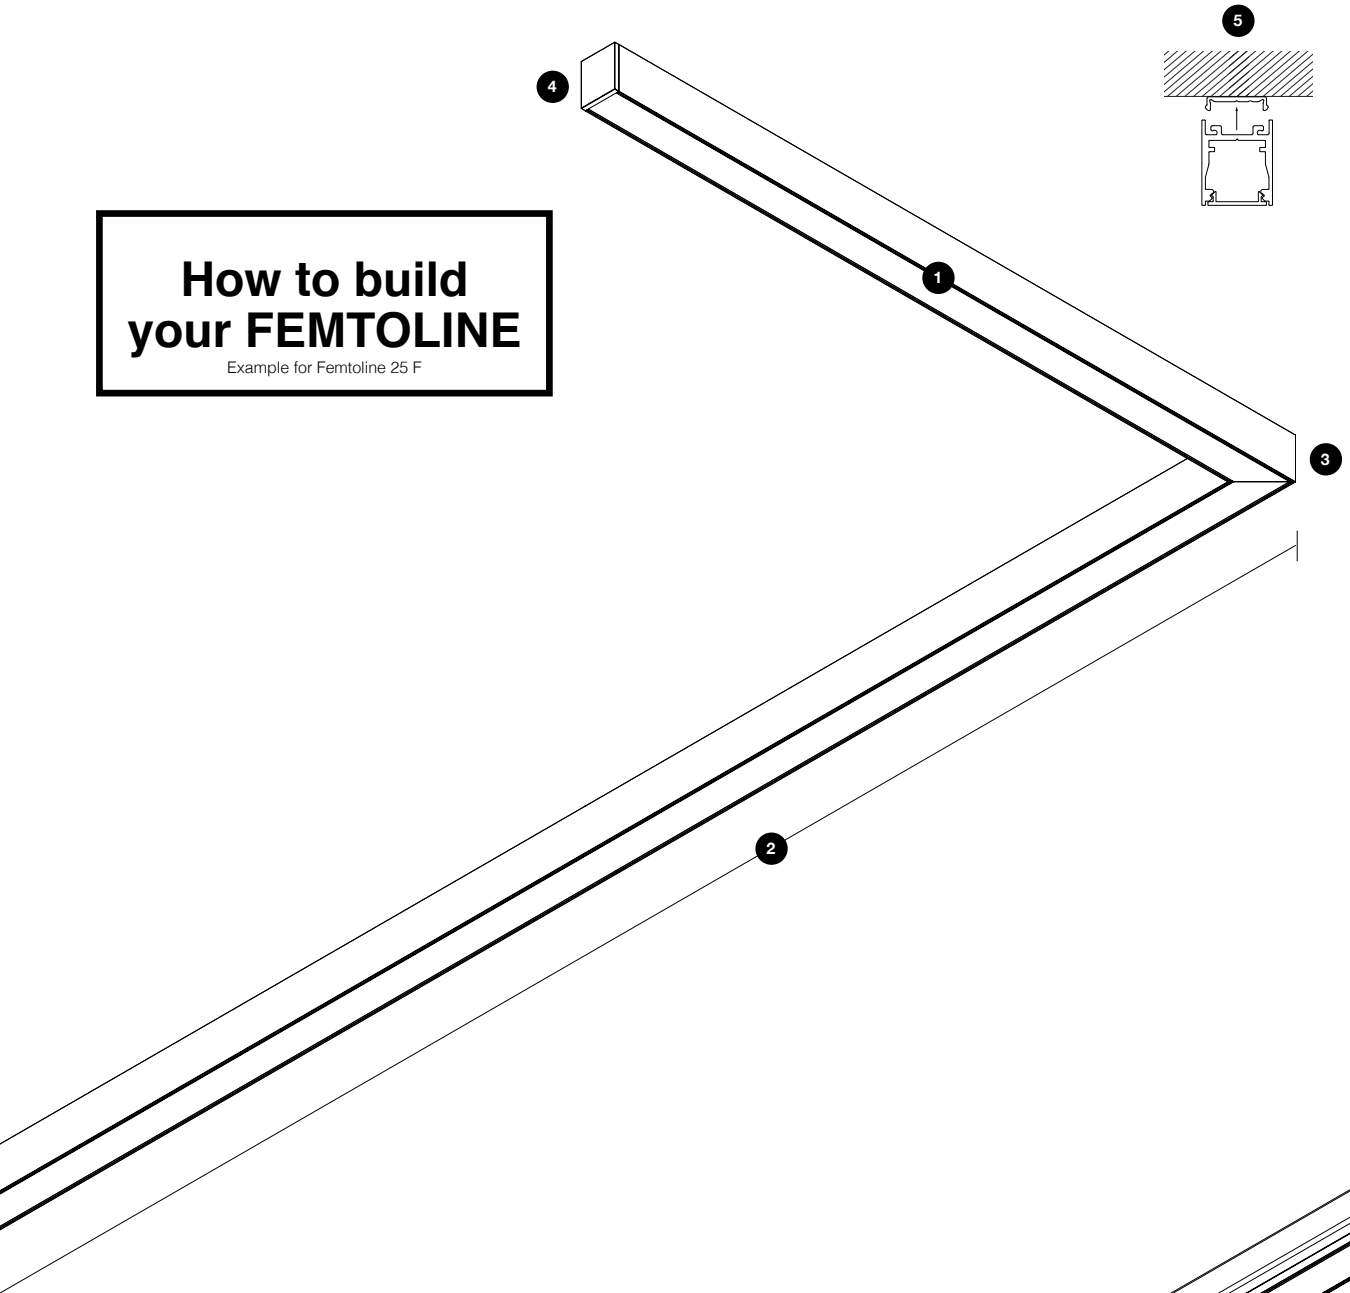

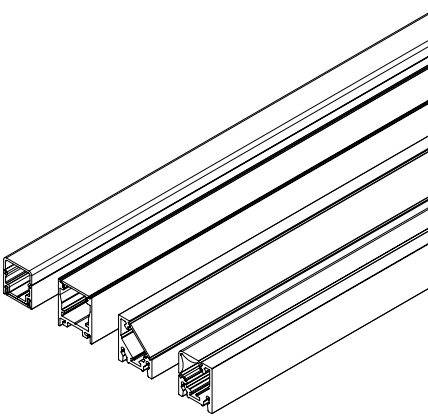


FEMTOLINE 35


PRO



IN COMBINATION WITH FTL 35

37 x (L + 6) x 60
min.9 /max.18






FEMTOLINE		35 TRIMLESS	35	35 WALLGRAZER
1 PROFILE				
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m		393 00 00 ◇ ◇ B ●	391 00 00 ◇ ◇ ANO ◯ / B ● / W ◯	16427 0000 ◇ ◇ ANO ◯ / B ● / W ◯
POLYCARBONATE / m				
SANDBLASTED (SBL)			INCLUSIVE	
WALLGRAZER HE				INCLUSIVE
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
CORNER 180° (2PCS.)		393 06 01	391 06 11	391 06 11
CORNER 180° for SUSPENSION (1PCS.)		-	16410 0010	16410 0010
CORNER 90°		393 06 06	391 06 06	391 06 06
4 ENDCAP				
ENDCAP (2 PCS.)		393 03 01 B	391 03 01 ANO / B / W	16427 0310 A / B / W
5 FIXATION				
RECESSED				
INSIDE CLIP (1 PC.)		393 14 01	-	-
SURFACE MOUNTED				
FIXATION CLIP (2 PCS.)		-	391 06 11	391 06 11
TILT SET (2 PCS.)		-	-	16427 1480 A / B / W
SUSPENDED				
SUSPENSION 20 SINGLE 1,6M (1 PC.)		-	391 09 01	391 09 01
SUSPENSION ST		-	15225 0340 B / W	15225 0340 B / W
6 CONNECTION				
POWERBOX		-	-	-
NON DIM 24V-DC / 60W		-	300 24 060 B / W	300 24 060 B / W
1-10V DIM 24V-DC / 60W		-	300 24 060 ED1 B / W	300 24 060 ED1 B / W
DALI 24V-DC / 150W		-	300 24 150 ED5 B / W	300 24 150 ED5 B / W
SUSPENDED				
CURRENT SUPPLY 1,6M	2X0,75MM²	-	391 97 51	391 97 51
CONNECTION ST		-	15225 0360 B / W	15225 0360 B / W
CABLE BASE R		-	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S		-	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R	100MM	-	204 00 100 B / W	204 00 100 B / W
		LIGHT MODULES		
7 LED FLEX		**SEE PAGE 437**		


A


deltalight.com/femtoline

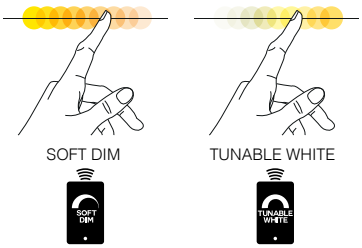

How to build your FEMTOLINE

Example for Femtoline 35

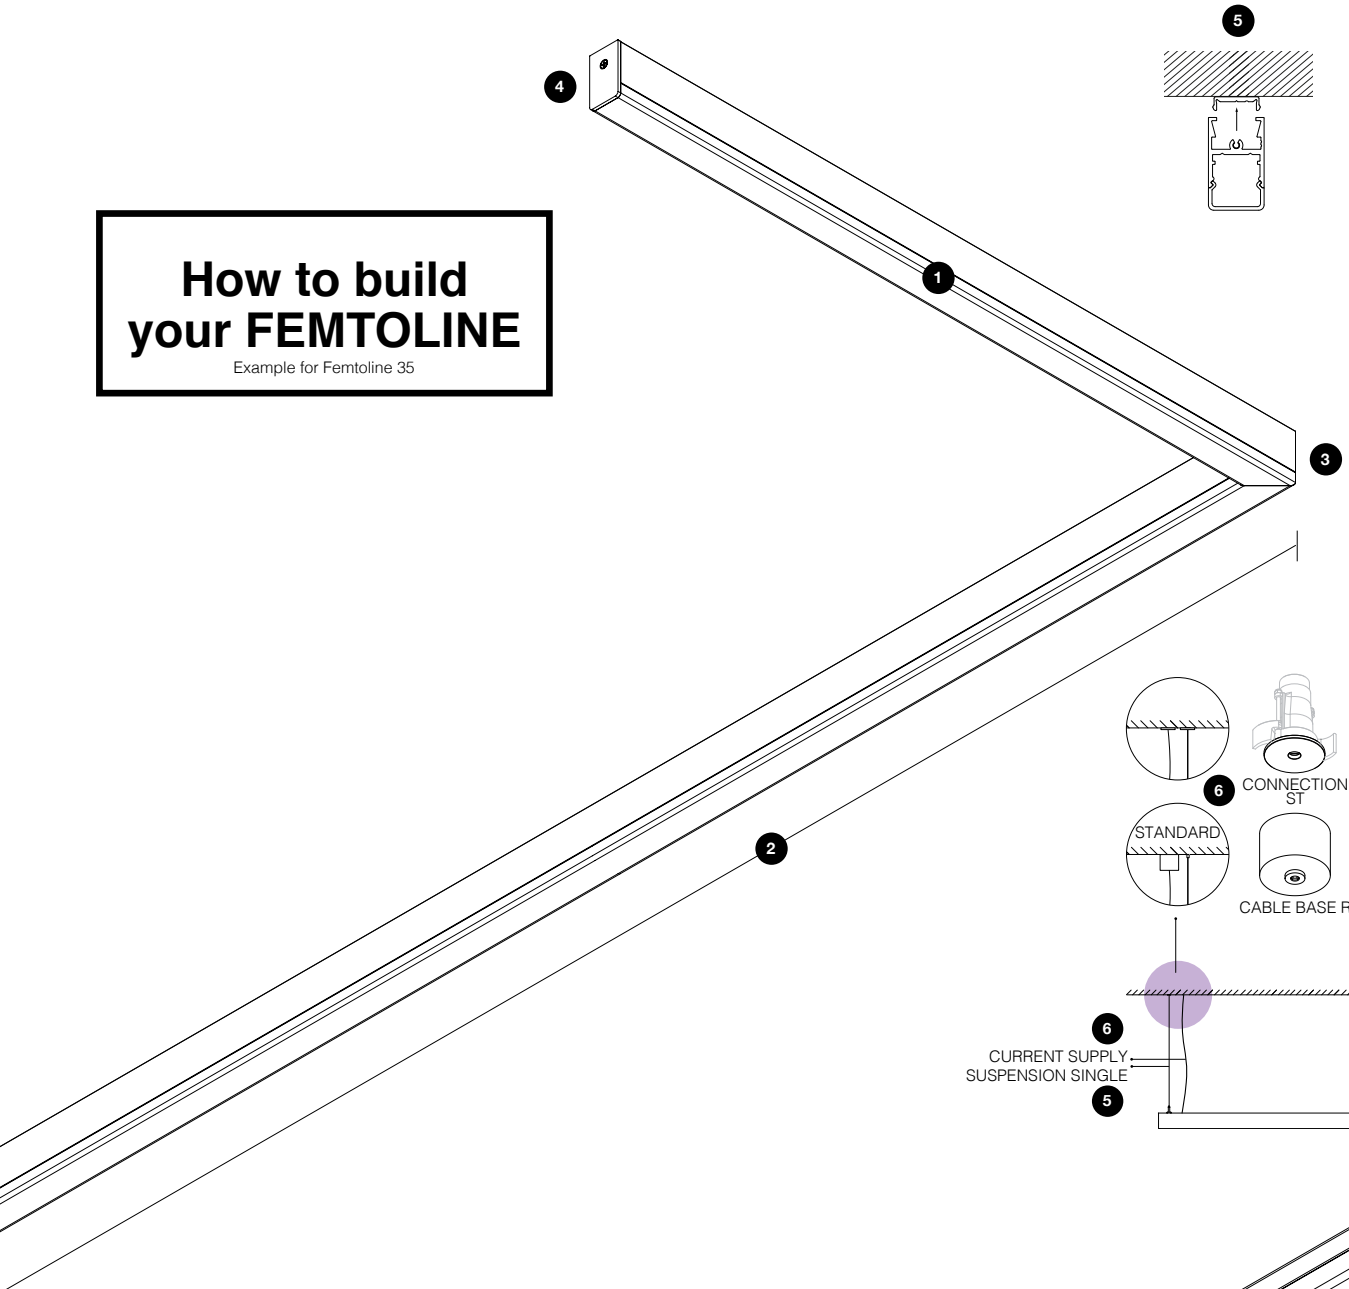


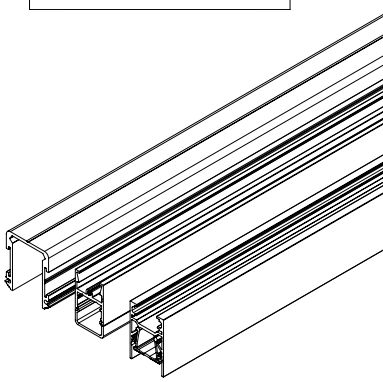

FEMTOLINE 35 F HE TR


The most versatile of the range. Similar as with Femtoline 25, one can opt for direct lighting with Femtoline 35 or a more indirect general lighting with Femtoline 35 F. Furthermore, Femtoline 35 can also used within the trimless Femtoline 35 TR profile, creating a black cove filled with strokes of light. Femtoline 35 TR and 35 TRW+ are meant as cove lighting to create contours of light around a room, and as a pendant for down or down-up lighting, one can opt for the straightforward Femtoline 35 F HE.
As diverse applications ask for diverse optics, Femtoline 35F HE comes in 3 different optical finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from aside. Dedicated to enhance structured vertical surfaces, Femtoline 35 WG can be used as a wallgrazing mad-to-measure solution for indoor projects.

PRO

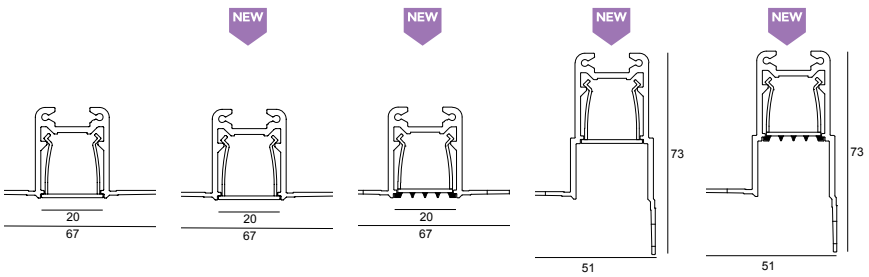


	35 F HE TR SBL	35 F HE TR PR	35 F HE TR LGC	35 F HE TR W+ SBL	35 F HE TR W+ LGC
	29 x (L + 5) x 35	29 x (L + 5) x 35	29 x (L + 5) x 35	32 x (L + 5) x 35	32 x (L + 5) x 35
FEMTOLINE					
1 PROFILE					
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	16428 0000 ◇ ◇ ANO ◯	16433 0000 ◇ ◇ ANO ◯	16434 0000 ◇ ◇ ANO ◯	16429 0000 ◇ ◇ ANO ◯	16430 0000 ◇ ◇ ANO ◯
POLYCARBONATE / m					
SANDBLASTED (SBL)	INCLUDED			INCLUDED	
PRISMATIC (PR)		INCLUDED			
LONGITUDINAL GLARE CONTROL (LGC)			INCLUDED		INCLUDED
2 DIMENSIONS					
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.					
3 JUNCTION / CORNER					
CORNER 180°	16428 0620	16428 0620	16428 0620	16428 0620	16428 0620
CORNER 90°	16428 0630	16428 0630	16428 0630	16428 0630	16428 0630
4 ENDCAP					
ENDCAP (2 PCS.)	16428 0310 ANO	16428 0310 ANO	16428 0310 ANO	16428 0310 ANO	16428 0310 ANO
5 FIXATION					
-					
6 CONNECTION					
-					
	LIGHT MODULES				
7 LED FLEX	**SEE PAGE 437**				

A

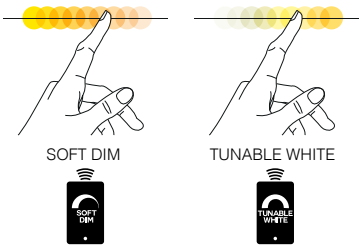


How to build your FEMTOLINE

Example for Femtoline 35 F HE Trimless

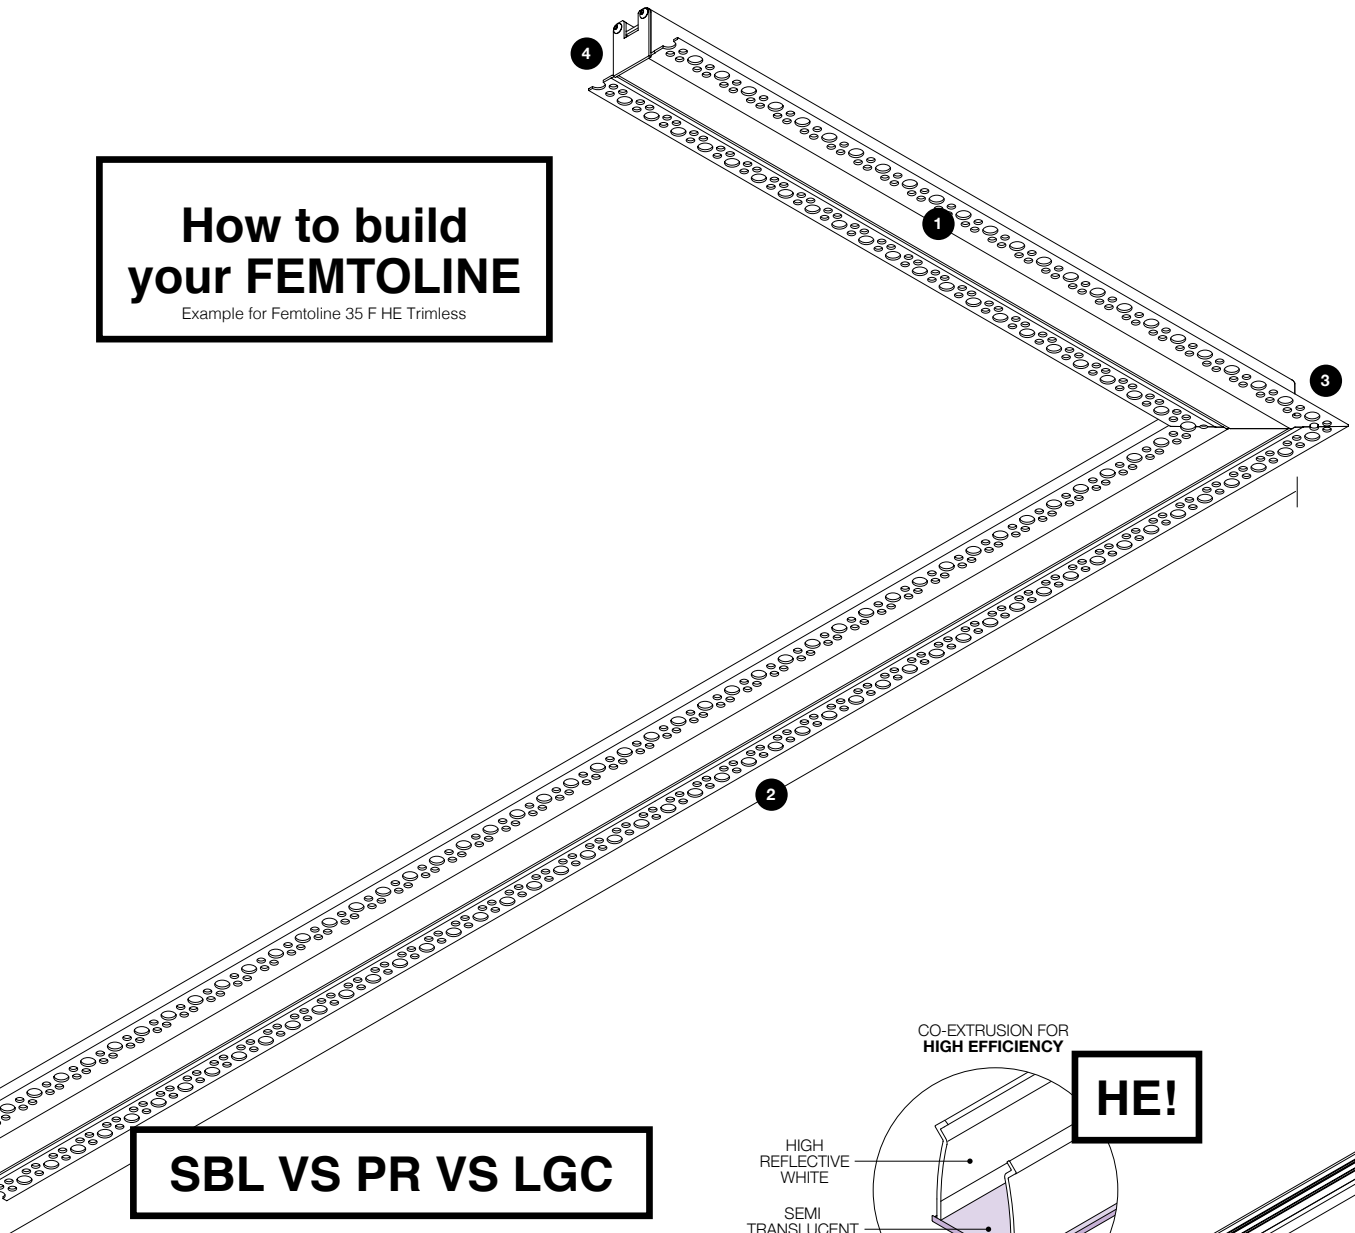

SBL VS PR VS LGC

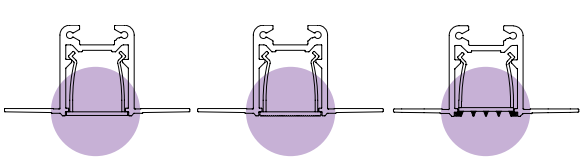


SANDBLASTED

PRISMATIC
Longitutinal & Transversal glare control

LGC
Longitutinal glare control

CO-EXTRUSION FOR **HIGH EFFICIENCY**


HE!

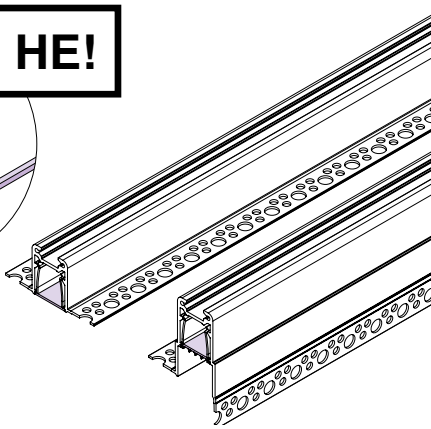


FEMTOLINE 35 F HE

The most versatile of the range. Similar as with Femtoline 25, one can opt for direct lighting with Femtoline 35 or a more indirect general lighting with Femtoline 35 F. Furthermore, Femtoline 35 can also used within the trimless Femtoline 35 TR profile, creating a black cove filled with strokes of light. Femtoline 35 TR and 35 TRW+ are meant as cove lighting to create contours of light around a room, and as a pendant for down or down-up lighting, one can opt for the straightforward Femtoline 35 F HE.
As diverse applications ask for diverse optics, Femtoline 35F HE comes in 3 different optical finishes: sandblasted for general lighting, prismatic for task lighting and our LGC (Low Glare Control) extrusion that avoids direct interaction between LED and the human eye when looking at it from aside. Dedicated to enhance structured vertical surfaces, Femtoline 35 WG can be used as a wallgrazing mad-to-measure solution for indoor projects.


PRO




NEW




NEW






FEMTOLINE		35 F HE SBL	35 F HE PR	35 F HE LGC	35 F HE D/U
1 PROFILE					
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m		392 01 00 00 ◇ ◇ ANO ◯ / B ● / W ◯	16431 0000 ◇ ◇ ANO ◯ / B ● / W ◯	16432 0000 ◇ ◇ ANO ◯ / B ● / W ◯	392 02 00 00 ◇ ◇ B ● / W ◯
POLYCARBONATE / m					
SANDBLASTED (SBL)		INCLUDED			INCLUDED
SANDBLASTED (SBL) UP					392 02 02 05 SBL
PRISMATIC (PR)			INCLUDED		
LONGITUDINAL GLARE CONTROL (LGC)				INCLUDED	
2 DIMENSIONS					
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.					
3 JUNCTION / CORNER					
CORNER 180° (2PCS.)		391 06 11	391 06 11	391 06 11	-
CORNER 180° for SUSPENSION (1PCS.)		16410 0010	16410 0010	16410 0010	392 02 06 01
CORNER 90°		391 06 06	391 06 06	391 06 06	-
4 ENDCAP					
ENDCAP (2 PCS.)		392 01 03 01 A / B / W	392 01 03 01 A / B / W	392 01 03 01 A / B / W	392 02 03 01 B / W
5 FIXATION					
SURFACE MOUNTED					
FIXATION CLIP (2 PCS.)		391 06 11	391 06 11	391 06 11	-
SUSPENDED					
SUSPENSION SINGLE 1,6M (1 PC.)		391 09 01	391 09 01	391 09 01	392 02 09 01
SUSPENSION ST		15225 0340 B / W	15225 0340 B / W	15225 0340 B / W	15225 0340 B / W
6 CONNECTION					
POWERBOX					
NON DIM 24V-DC / 60W		300 24 060 B / W	300 24 060 B / W	300 24 060 B / W	300 24 060 B / W
1-10V DIM 24V-DC / 60W		300 24 060 ED1 B / W	300 24 060 ED1 B / W	300 24 060 ED1 B / W	300 24 060 ED1 B / W
DALI 24V-DC / 150W		300 24 150 ED5 B / W	300 24 150 ED5 B / W	300 24 150 ED5 B / W	300 24 150 ED5 B / W
SUSPENDED					
CURRENT SUPPLY 1,6M	2X0,75MM²	391 97 51	391 97 51	391 97 51	392 02 97 51
CONNECTION ST		15225 0360 B / W	15225 0360 B / W	15225 0360 B / W	15225 0360 B / W
CABLE BASE R		203 99 55 ANO / B / W	203 99 55 ANO / B / W	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S		203 99 56 ANO / B / W	203 99 56 ANO / B / W	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R	100MM			204 00 100 B / W	
			LIGHT MODULES		
7 LED FLEX			**SEE PAGE 437**		

A

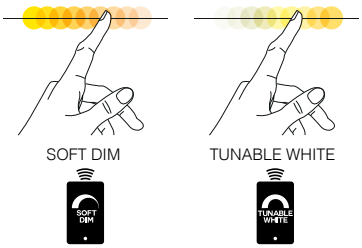


How to build your FEMTOLINE

Example for Femtoline 35 F HE

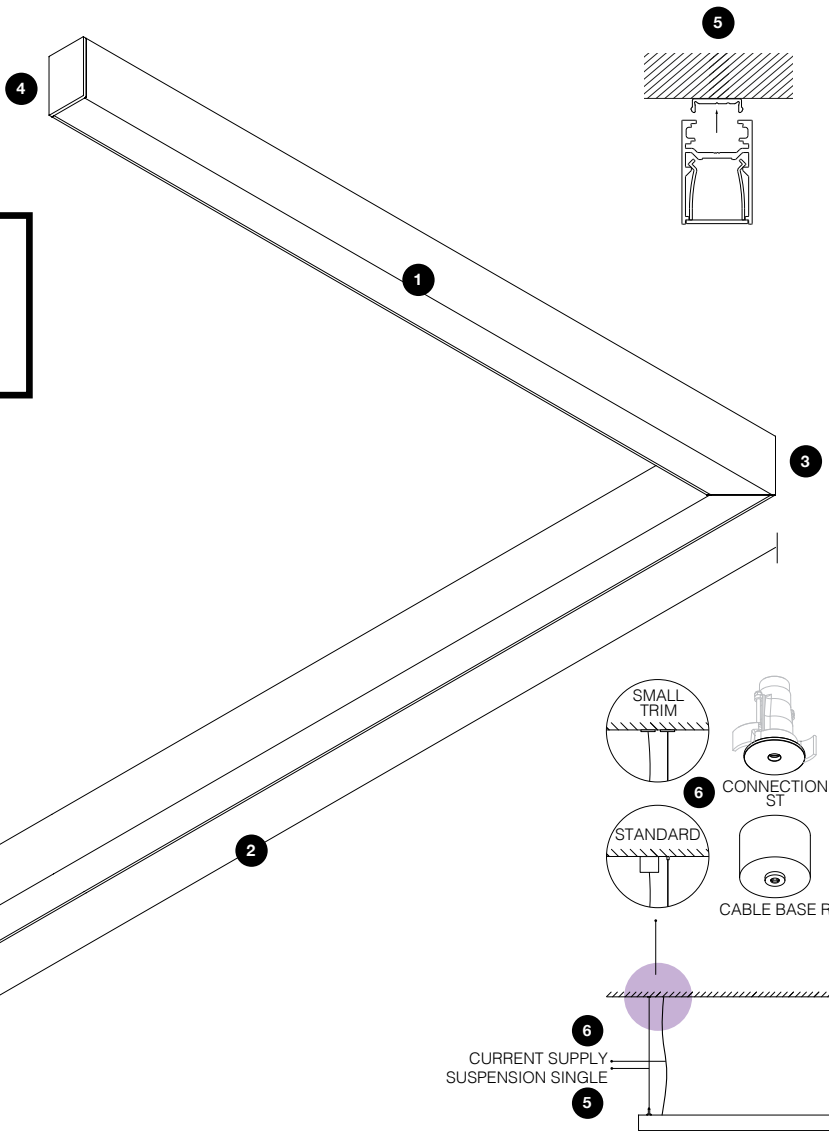

SBL VS PR VS LGC

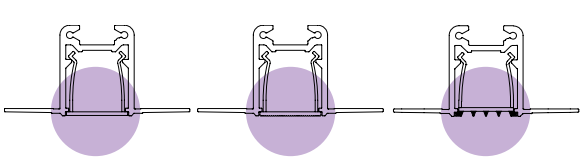



SANDBLASTED

PRISMATIC
Longitutinal & Transversal glare control

LGC
Longitutinal glare control

HE!

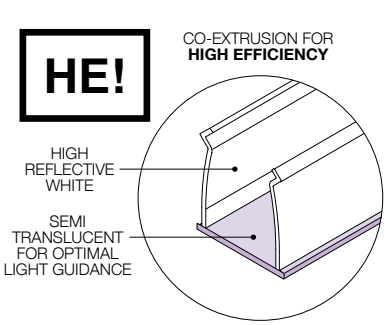

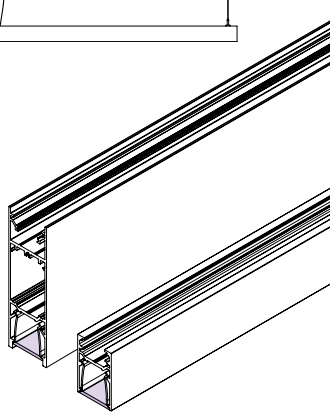


FEMTOLINE 45 + WALL

FEMTOLINE 45
The recessed solution. Femtoline 45 complements the Femtoline 25 range in applications that allow recessed installation.


FEMTOLINE W
The wall mounted solution. Femtoline W is a very slim and multifunctional LED profile, which can be used in both interior and exterior lighting concepts. This wall mounted profile can be used for either up- or downlight, creating a cosy wall grazing effect.


PRO

A




37 x (L + 12) x 40
max.13






FEMTOLINE	45	W		W D/U
		CLEAR	SBL	
1 PROFILE				
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	376 00 00 ◇ ◇ ANO ● / B ● / W ○	366 00 00 CL ◇ ◇ ANO ●	366 00 00 SBL ◇ ◇ ANO ●	426 00 00 ◇ ◇ ANO ● / B ● / W ○
POLYCARBONATE / m				
CLEAR (CL)		INCLUDED		
SANDBLASTED (SBL)	INCLUDED		INCLUDED	INCLUDED
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
CORNER 180°	-	-	-	426 06 01
CORNER 90°	376 06 06	-	-	-
4 ENDCAP				
ENDCAP (2 PCS.)	376 03 01 ANO / B / W	364 03 01 A	364 03 01 A	426 03 01 A / B / W
5 FIXATION				
RECESSED				
INSIDE CLIP (2 PCS.)	376 14 01	-	-	-
SURFACE MOUNTED	-	398 03 06 11 (10 PCS.)	398 03 06 11 (10 PCS.)	426 14 01 (2 PCS.)
6 CONNECTION				
-	-	-	-	-
	LIGHT MODULES			
7 LED FLEX	**SEE PAGE 437**			








How to build your FEMTOLINE

Example for Femtoline 45

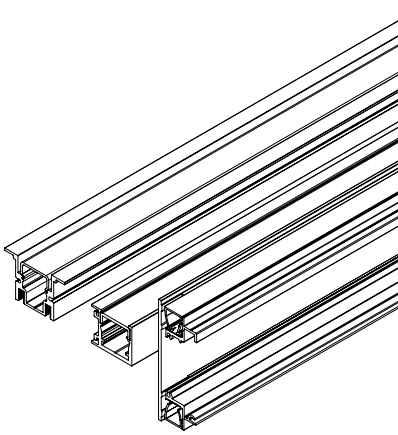

BORDERLINE


With the Borderline profile Delta Light introduces a generation of recessed led profiles, setting standards in the indirect lighting segment. It features a remarkable trimless finishing, although easy to install and finish.

The Borderline can be used for both wall and ceiling application, enabling you to frame the room with light. Available with RGB, tunable white, warm or cold white LEDs, offering a contemporary indirect lighting solution with exceptional eye for architectural detail.

deltalight.com/borderline

PRO

A



	BORDERLINE
1 PROFILE	
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	371 00 00 ◇ ◇ W ◯

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER	
CORNER 180°	371 06 01
CORNER 90° INTERIOR	371 06 06
CORNER 90° EXTERIOR	371 06 16

4 ENDCAP

-


5 FIXATION

-


6 CONNECTION

-


	LIGHT MODULES
7 LED FLEX	**SEE PAGE 437**



SOFT DIM



TUNABLE WHITE




CEILING FIXATION

1

3

CONNECOR 90°
EXTERIOR




WALL FIXATION


INDIRECT COVE LIGHTING


OUTLINER

Outliner defines the perimeter. It comes as single luminaire or as a bespoke profile, perfectly optimizable to any desired length. Designed as an unobtrusive linear solution, Outliner shields off the light source and gently casts its light towards the surface. As such, Outliner is ideal to serve as perimeter lighting across paths, terraces or parking lots, areas that function as passageway.

deltalight.com/outliner

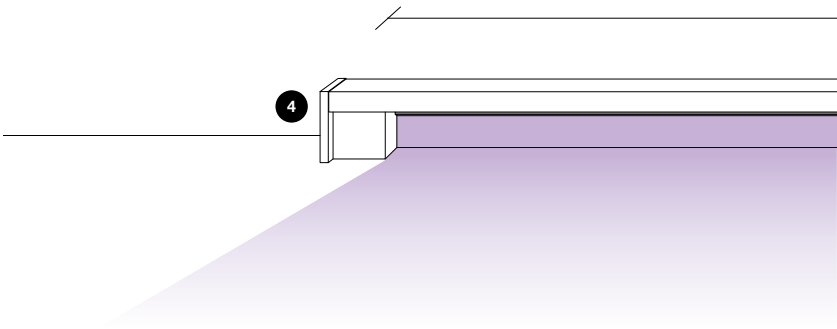

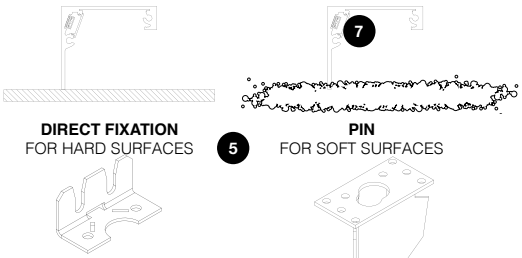



PRO

A

	OUTLINER
1 PROFILE	
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m	27800 0000 ◇ ◇ N ●
POLYCARBONATE / m	
SANDBLASTED (SBL)	INCLUDED
2 DIMENSIONS	
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.	
3 JUNCTION / CORNER	
-	
4 ENDCAP	
ENDCAP (2 PCS.)	27800 0310 N
5 FIXATION	
SURFACE MOUNTED	
DIRECT FIXATION (2 PCS.)	27800 1410 N
PIN (2 PCS.)	27800 1490 N
6 CONNECTION	
-	
	LIGHT MODULES
7 LED FLEX	**SEE PAGE 437**

LEDFLEX FOR DOT.COM FEMTOLINE BORDERLINE OUTLINER

LEDFLEX OUT NOT SUITABLE FOR
FTL W D/U, FTL 35 WALLGRAZER AND DOT.COM WALLWASH TR

FIND ME ONLINE



2

1



5m - 24V-DC
NOT MOUNTED

LEDFLEX		WHITE	WHITE MP	WHITE FP	WHITE HP**	SOFT DIM	TW	RGB	RGB / TW
		Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 210 smd LED/m	Dividable per 62,5mm 128 smd LED/m	Dividable per 50mm 160 smd LED/m	Dividable per 62.5mm 224 smd LED/m	Dividable per 71,42mm 224 smd LED/m	Dividable per 50mm 120 smd LED/m	Dividable per 62,5mm 96 smd LED/m
		5W/m 551lm/m	**10W/m 1045lm/m**	**15W/m 1853lm/m**	**20W/m 2470lm/m**	**18W/m 1460 lm/m**	**9,5W/m (1) 1116lm/m**	**11W/m**	**19,2W/m (2)**
4000K CRI > 90	IN	**21031 0060**	**21031 0140**	**21031 0220**	**21031 0300**				
	OUT (IP65)	**21031 0100**	**21031 0180**	**21031 0260**					
3000K CRI > 90	IN	**21031 0040**	**21031 0120**	**21031 0200**	**21031 0280**				
	OUT (IP65)	**21031 0080**	**21031 0160**	**21031 0240**					
2700K CRI > 90	IN	**21031 0030**	**21031 0110**	**21031 0190**	**21031 0270**				
	OUT (IP65)	**21031 0070**	**21031 0150**	**21031 0230**					
1800K ▸ 3000K CRI > 90	IN					**21031 0020**			
	OUT (IP65)								
2700K ▸ 6000K CRI > 90	IN						**21031 0390**		
	OUT (IP65)								
RGB CRI > 90	IN							**21031 0400**	
	OUT (IP65)							**21031 0410**	
RGB WW / TW (2) CRI > 90	IN								**21031 0420**
	OUT (IP65)								

LED POWER SUPPLY 24V-DC / (MAX. 3M/POWERLINE FOR LEDFLEX > 15W/M) MORE INFO TECHNICAL CHAPTER

NON DIM	24W / IP20	**21012 0160**	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
	150W / IP67	**300 89 24 150**	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	**21012 0181**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP20	**21012 0191**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP67	**21012 0101**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0111**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0121**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
DALI (DIM5)	60W / IP20	**21012 0205**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	100W / IP20	**21012 0225**	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
	60W / IP67	**21012 0135**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0145**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0155**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*

CONTROL MORE INFO TECHNICAL CHAPTER

	RGB / RGB TW DRIVER						**300 90 331**	**300 90 331**	**21032 0010**
	TOUCH CONTROLLER						**300 90 332**	**300 93 330**	**21032 0120**
WDL	24V-DC DIM UNIT					**300 90 010**			
1-10V						**300 90 003 ED1**			
DALI						**300 90 003 ED5**			


(1) 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS
(2) RGB = 11,52W/M - TW = 3,4W/M - TW = 2700-6000K
* TO BE USED AS NON DIM
** LEDFLEX HP ONLY FOR FREE STANDING PROFILES

ONE AND ONLY

A peculiar profile, both functional as decorative. The design of the body allows you to have up to 5 lines of light out of 1 profile, 3 for direct and 2 for indirect lighting. The soft glow of the light along the sides of the profile makes the One-And-Only float through the air, a powerful blend of light for an eye-catching look.


deltalight.com/oneandonly


PRO



		ONE AND ONLY
1 PROFILE		
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m		404 00 00 ◇ ◇ B ● / GC ● / W ○
POLYCARBONATE / m		
SANDBLASTED (SBL) 3x UP and 2x DOWN		INCLUDED
2 DIMENSIONS		
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.		
3 JUNCTION / CORNER		
-		
4 ENDCAP		
ENDCAP (2 PCS.)		404 03 01 B / W
5 FIXATION		
SUSPENDED		
SUSPENSION SINGLE 1,6M (1 PC.)		404 09 01
SUSPENSION ROD 0,4M (1 PC.) EXCL. CABLING		328 27 40 B / W
SUSPENSION ROD 0,8M (1 PC.) EXCL. CABLING		328 27 80 B / W
SUSPENSION ST		-
6 CONNECTION		
LED POWER SUPPLY KIY		-
NON DIM 24V-DC / 100W		404 24 100
1-10V DIM 24V-DC / 60W		404 24 60 ED1
SUSPENDED		
CURRENT SUPPLY 1,6M	3X0,75MM²	377 98 51
	5X0,75MM²	377 99 51
CURRENT SUPPLY 6,0M	3X0,75MM²	377 98 56
	5X0,75MM²	377 99 56
CONNECTION ST		15225 0360 B / W
CABLE BASE R		203 99 55 B / W
CABLE BASE S		203 99 56 B / W
COVERSET R	100MM	204 00 100 B / W
		LIGHT MODULES
7 LED FLEX		**NEXT PAGE**

A

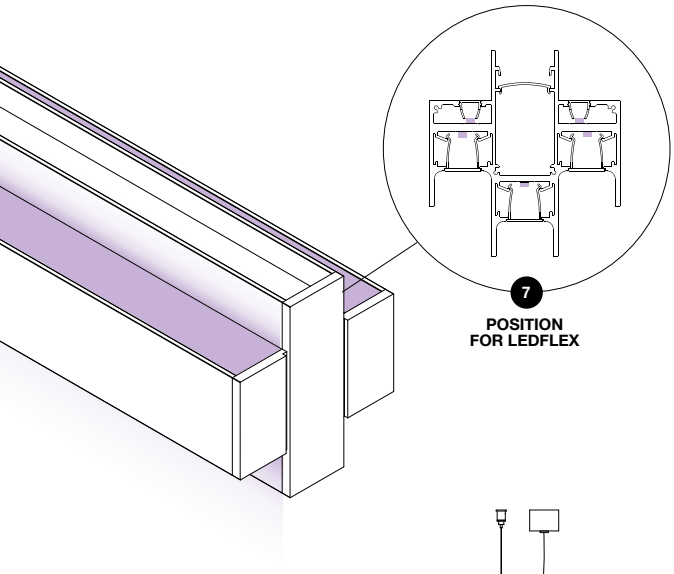

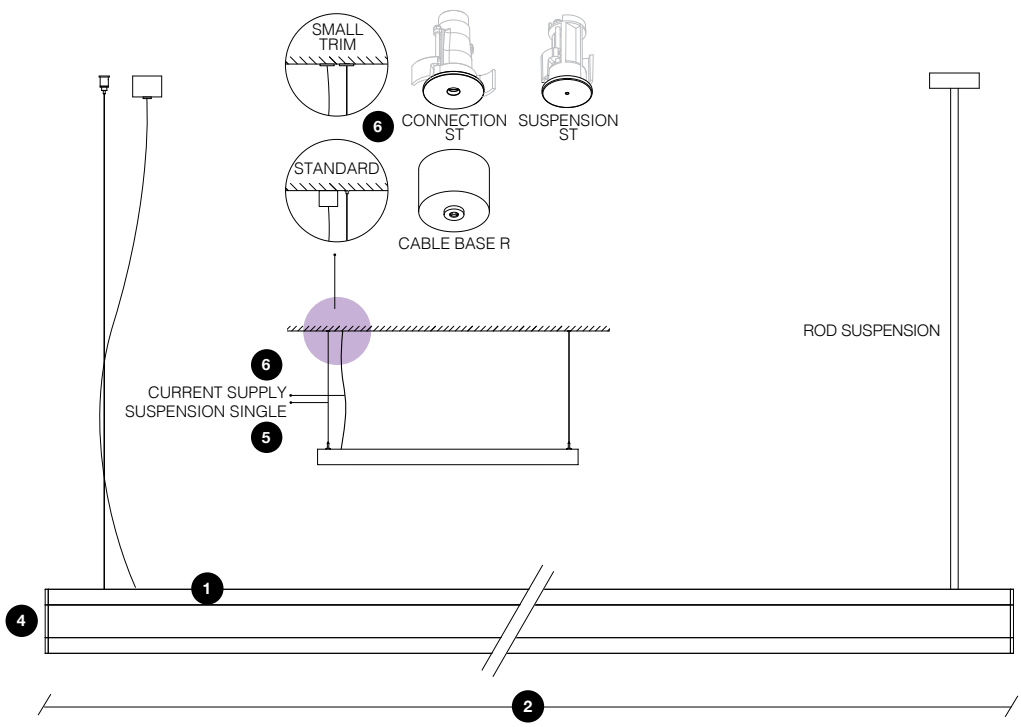



/ m - 24V-DC
MOUNTED

Dividable per
33,3mm
210 smd LED/m

10W/m
1045lm/m

LEDFLEX		IN MP
4000K CRI > 90	IN	**21031 0140**
3000K CRI > 90	IN	**21031 0120**
2700K CRI > 90	IN	**21031 0110**

LED POWER SUPPLY 24V-DC (MAX. 5M/POWERLINE) MORE INFO TECHNICAL CHAPTER			
NON DIM	24W / IP20	**21012 0160**	max. 2,4m
	150W / IP67	**300 89 24 150**	max. 15m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 6m
	90W / IP20	**21012 0181**	max. 9m
	120W / IP20	**21012 0191**	max. 12m
	60W / IP67	**21012 0101**	max. 6m
	90W / IP67	**21012 0111**	max. 9m
	120W / IP67	**21012 0121**	max. 12m
DALI (DIM5)	60W / IP20	**21012 0205**	max. 6m
	100W / IP20	**21012 0225**	max. 10m
	60W / IP67	**21012 0135**	max. 6m
	90W / IP67	**21012 0145**	max. 9m
	120W / IP67	**21012 0155**	max. 12m


SHELFLINE


A series of miniature profiles, to be finished with the ledflex of your choice. Ideal to softly enlighten shelves, cupboards, wardrobes or for other indirect lighting applications.


deltalight.com/shelfline

PRO


A







SHELFLINE	20 ST	18	19
1 PROFILE			
PROFILE LENGTH PER PROFILE SECTION 3m	398 01 00 ◇ ◇ ANO ●	398 02 00 ◇ ◇ ANO ●	398 03 00 ◇ ◇ ANO ●
POLYCARBONATE			
SANDBLASTED (SBL)	INCLUDED	INCLUDED	398 03 05 SBL
CLEAR	-	-	398 03 05 CL
2 DIMENSIONS			
Full lengths of 3m.			
3 JUNCTION / CORNER			
-			
4 ENDCAP			
ENDCAP (2 PCS.)	398 01 03 01 A	398 02 03 01 A	398 03 03 01 A
5 FIXATION			
SURFACE MOUNTED			
MOUNTING CLIP (10 PCS.)	-	398 02 06 11	398 03 06 11
MOUNTING CLIP 45° (10 PCS.)	-	398 02 06 45	398 03 06 45
6 CONNECTION			
-			
	LIGHT MODULES		
7 LED FLEX	**NEXT PAGE**		

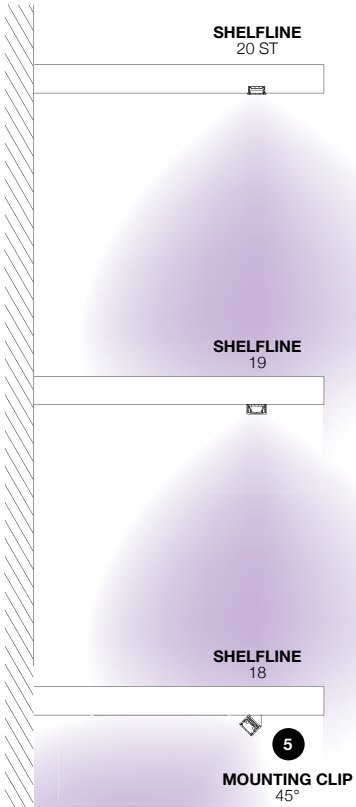



5m - 24V-DC
NOT MOUNTED

		Dividable per 25 mm Continuous LED
		9W/m 608lm/m
LEDFLEX		**IN CL**
4000K CRI > 90	IN	**21030 0340**
3000K CRI > 90	IN	**21030 0320**
2700K CRI > 90	IN	**21030 0310**

LED POWER SUPPLY 24V-DC MORE INFO TECHNICAL CHAPTER (MAX. 5M/POWERLINE)			
NON DIM	24W / IP20	**21012 0160**	max. 2,6m
	150W / IP67	**300 89 24 150**	max. 16,6m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 6,6m
	90W / IP20	**21012 0181**	max. 10m
	120W / IP20	**21012 0191**	max. 13,3m
	60W / IP67	**21012 0101**	max. 6,6m
	90W / IP67	**21012 0111**	max. 10m
	120W / IP67	**21012 0121**	max. 13,3m
DALI (DIM5)	60W / IP20	**21012 0205**	max. 6,6m
	100W / IP20	**21012 0225**	max. 11,1m
	60W / IP67	**21012 0135**	max. 6,6m
	90W / IP67	**21012 0145**	max. 10m
	120W / IP67	**21012 0155**	max. 13,3m

MICROLINE 60 / 40


A series of slim, made-to-measure LED profiles which stand out for their versatility and clean-cut design. The Microline profiles are designed to create uninterrupted lines of light, ideal to accentuate architectural lines or be used as general lighting.

MICROLINE 40/60
The Microline 40/60 profile was created as a high efficiency replacement for the original 30/50 profile. The high-output led array is available with a dimmable power supply with 151lm/W and as a non-dimmable version delivering 167lm/W.
In addition, the 40+ features a protruding polycarbonate for extra wide light output.


deltalight.com/microline


PRO

Go around the corner

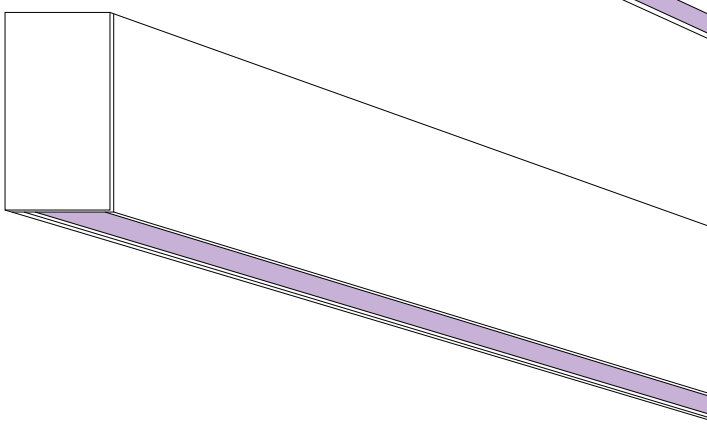


40 VS 40+

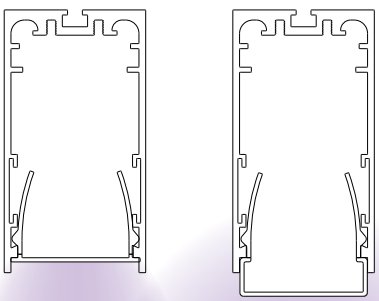

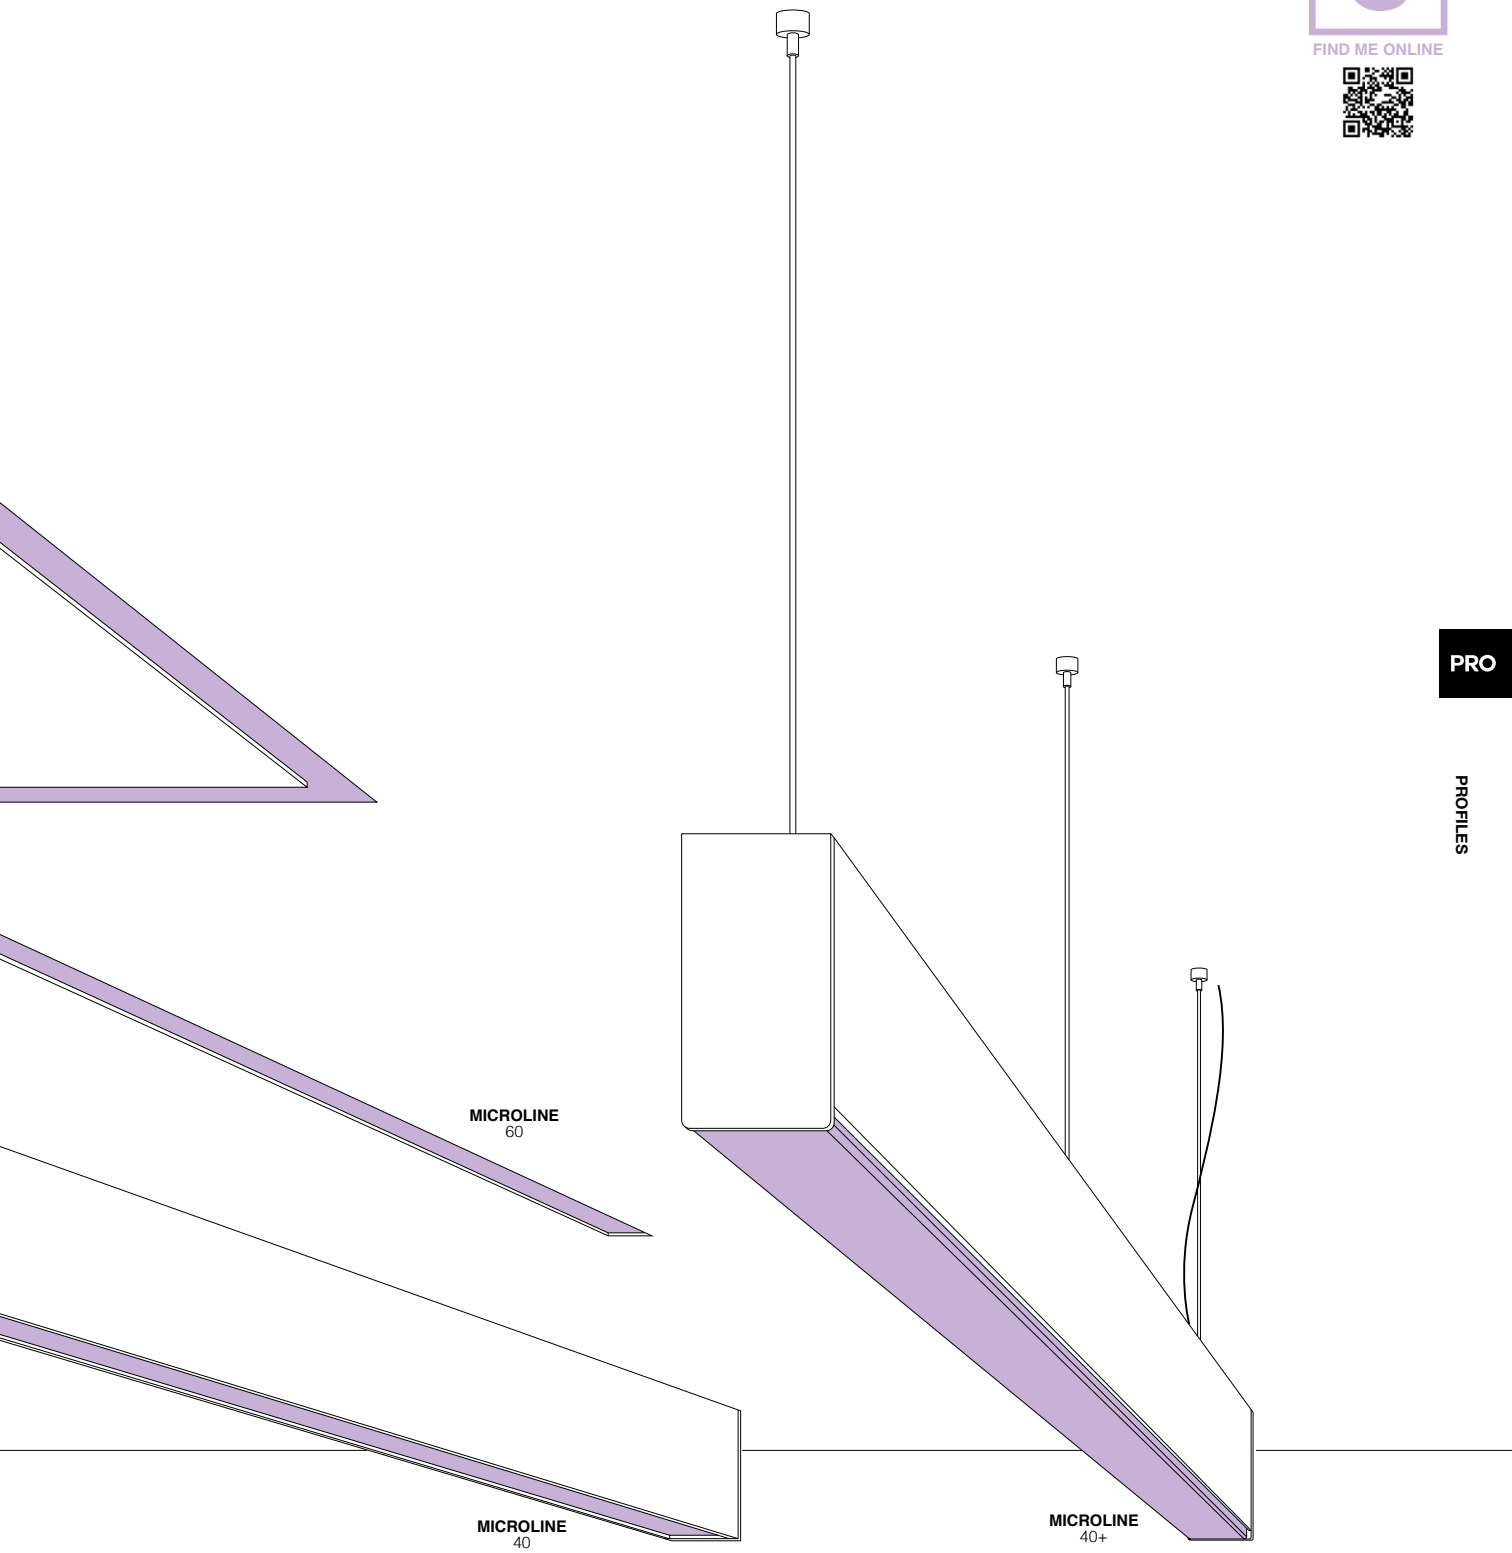
MICROLINE
60
MICROLINE
40
MICROLINE
40+

MICROLINE 60 / 40

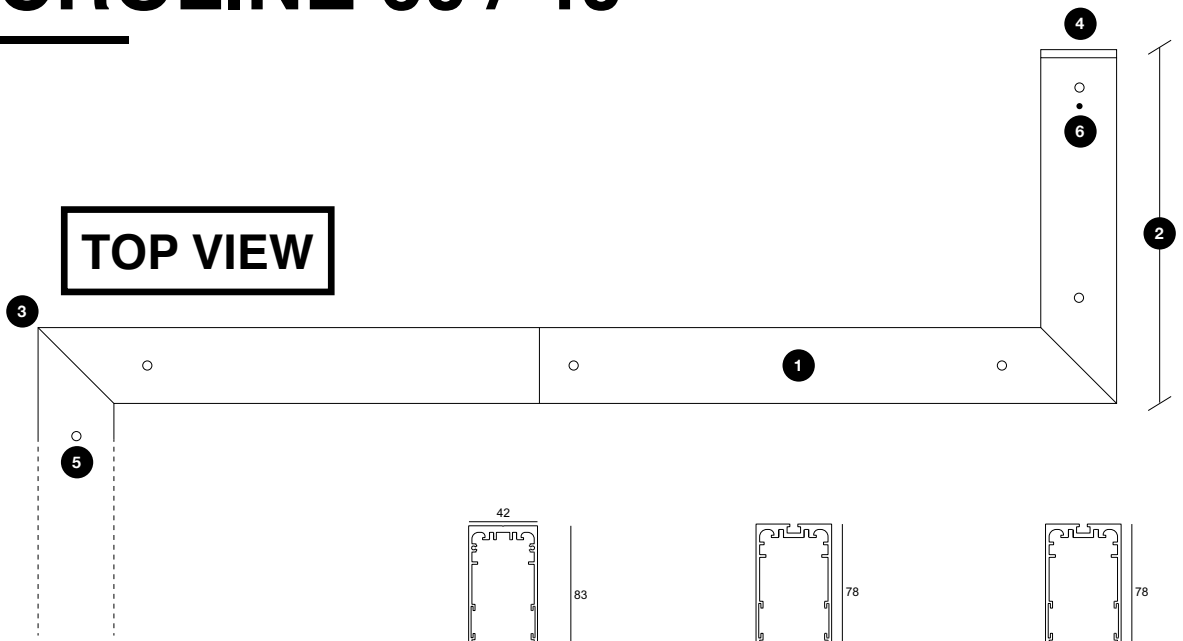

49 x (L + 10) x 120
min.5 - max.15


PRO

A


MICROLINE		60	40	40+
1 PROFILE				
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m		399 03 00 ◇ ◇ ANO ● / W ○	399 01 00 ◇ ◇ ANO ● / B ● / W ○	399 01 00 ◇ ◇ ANO ● / B ● / W ○
POLYCARBONATE / m				
SANDBLASTED (SBL)		399 01 02 05 SBL HE	399 01 02 05 SBL HE	399 02 02 05 SBL HE
2 DIMENSIONS				
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.				
3 JUNCTION / CORNER				
CORNER 180°		399 06 01	399 06 01	399 06 01
CORNER 90°		399 06 06	399 06 06	399 06 06
4 ENDCAP				
ENDCAP (1 PC.)		399 03 03 01 ANO / W	399 01 03 01 ANO / B / W	399 02 03 01 ANO / B / W
5 FIXATION				
RECESSED				
INSIDE CLIP (1 PC.)		399 03 14 01	-	-
SUSPENDED				
SUSPENSION 20 SINGLE 1,6M (1 PC.)		-	328 12 01	328 12 01
SUSPENSION 20 SINGLE 6,0M (1 PC.)		-	328 12 06	328 12 06
SUSPENSION ST		-	15225 0340 B / W	15225 0340 B / W
6 CONNECTION				
RECESSED		-	-	-
SURFACE MOUNTED		-	-	-
SUSPENDED				
CURRENT SUPPLY 1,6M	3X0,75MM²	-	399 98 51	399 98 51
	5X0,75MM²	-	399 99 51	399 99 51
CURRENT SUPPLY 6,0M	3X0,75MM²	-	399 98 56	399 98 56
	5X0,75MM²	-	399 99 56	399 99 56
CONNECTION ST		-	15225 0360 B / W	15225 0360 B / W
CABLE BASE R		-	203 99 55 ANO / B / W	203 99 55 ANO / B / W
CABLE BASE S		-	203 99 56 ANO / B / W	203 99 56 ANO / B / W
COVERSET R	100MM	-	204 00 100 B / W	204 00 100 B / W

How to build your MICROLINE

Example for Microline 40

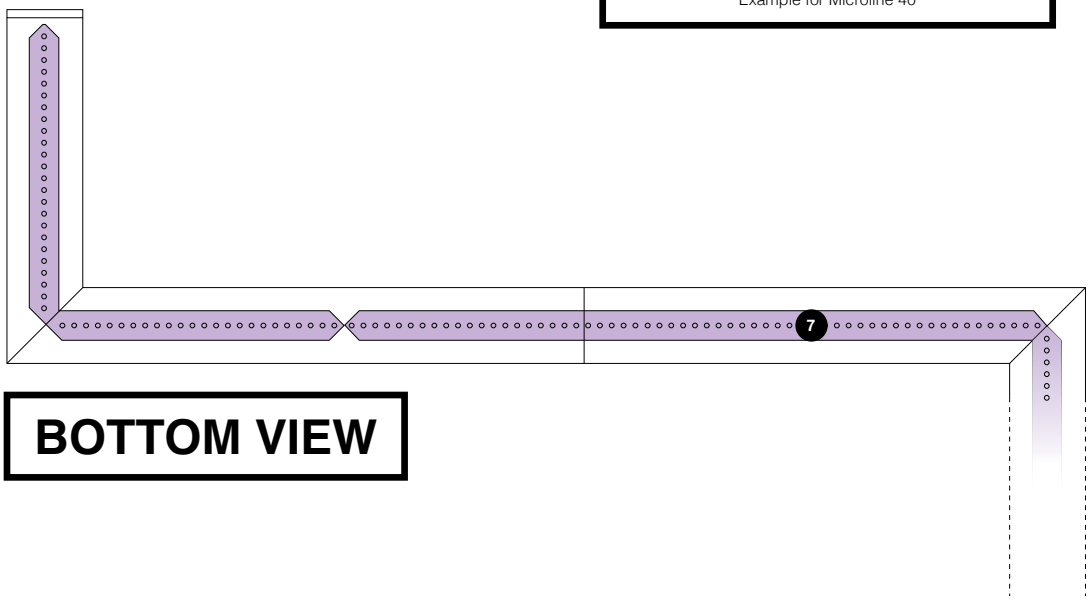

BOTTOM VIEW

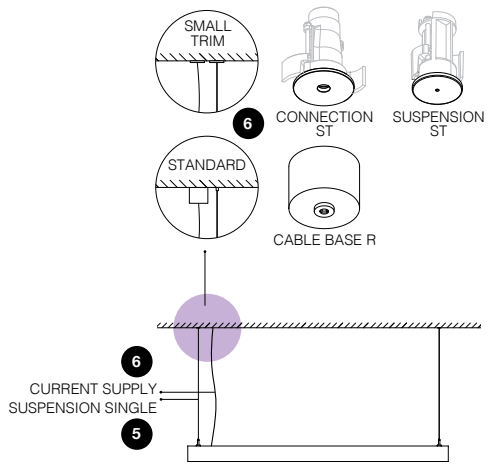


7 LED ARRAY DOWN				LIGHT MODULES			
				NON DIM	1-10V DIM	DALI	SWITCH DIM
HIGH OUTPUT	3000K / CRI>90 3395 lm/m 155 lm/W	560mm	12W	399 610 12 E	399 610 12 ED1	399 610 12 ED2	
		840mm	18W	399 610 18 E	399 610 18 ED1	399 610 18 ED2	
		1120mm	24W	399 610 24 E	399 610 24 ED1	399 610 24 ED2	
		1400mm	30W	399 610 30 E	399 610 30 ED1	399 610 30 ED2	
		1680mm	36W	399 610 36 E	-	399 610 36 ED2	
		2240mm	48W	399 610 48 E	-	399 610 48 ED2	
HIGH EFFICIENCY	3000K / CRI>90 1757 lm/m 171 lm/W	560mm	6W	399 613 06 E	-	-	-
		840mm	9W	399 613 09 E	-	-	-
		1120mm	12W	399 613 12 E	-	-	-
		1400mm	15W	399 613 15 E	-	-	-
		1680mm	18W	399 613 18 E	-	-	-
		2240mm	24W	399 613 24 E	-	-	-
	220-240V | 50-60Hz IP20						

EXTRA CIRCUIT

CABLING EXTRA CIRCUIT (PER MODULE)	328 90 01

STREAMLINER

PRO

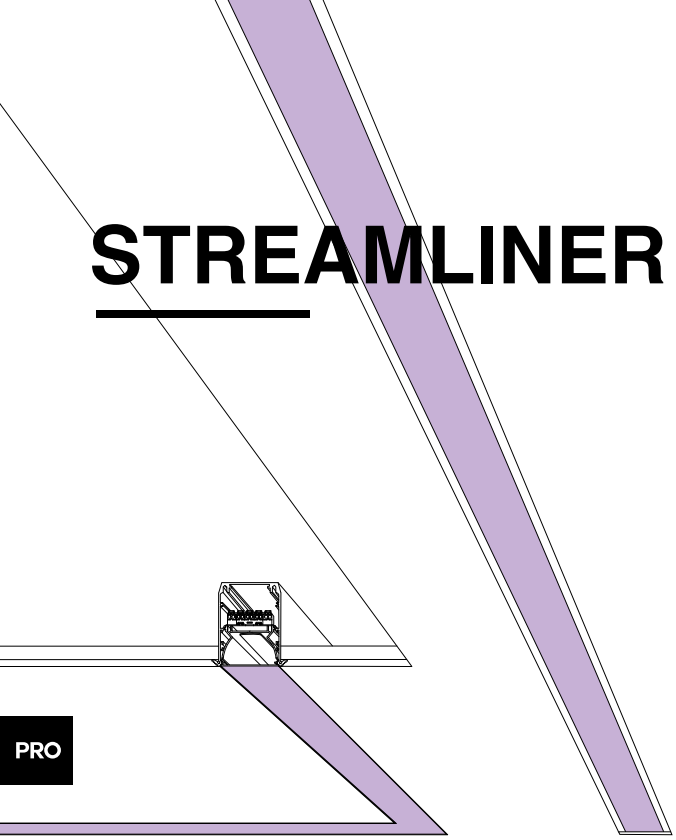

STREAMLINER
TRIMLESS

STREAMLINER
85

GENERAL LIGHT

ACCENT LIGHT

STREAMLINER
70S

STREAMLINER
70L

Go around the corner

The made-to-measure Streamliner is a very versatile LED-focused profile family. Its multiple installation options combined with the possibility to add spots and downlights, allow Streamliner to be used in various applications. Inside, the LED array is available in 2 different output levels and can be finished with an opal or prismatic cover. The possibility to use Tunable White, emergency modules and sensors further add to the flexibility of Streamliner

Streamliner can be recessed mounted, with (Streamliner 85) or without trim (Streamliner TR), surface or pendant mounted. As a pendant version, the profile can be used with only direct light or there is also the opportunity to have it direct-indirect. To give the profile even more flexibility, also integrated downlighters and additional spots are available.


STREAMLINER TR / STREAMLINER 85
Streamliner TR and Streamliner 85 are the recessed solutions within the Streamliner range. Streamliner TR can be finished without any visible trim, while Streamliner 85 has a small trim covering the hole in the ceiling. In both cases a homogenous line of light is all you see, as the profile completely disappears into the ceiling. Fully lit corners allow you to play around with lines of light, creating unique patters that strengthen the architecture of the building.

STREAMLINER 70S / 70L
Streamliner 70S and 70L can be used for surface mounted or suspended applications, both offering the possibility to be used as a direct-indirect or purely direct line of light. With its Dimensions of 70 by 85mm, Streamliner 70S has a more minimalistic look, while Streamliner 70L (70 by 108mm) enables to hide away an emergency unit inside its body.

deltalight.com/streamliner





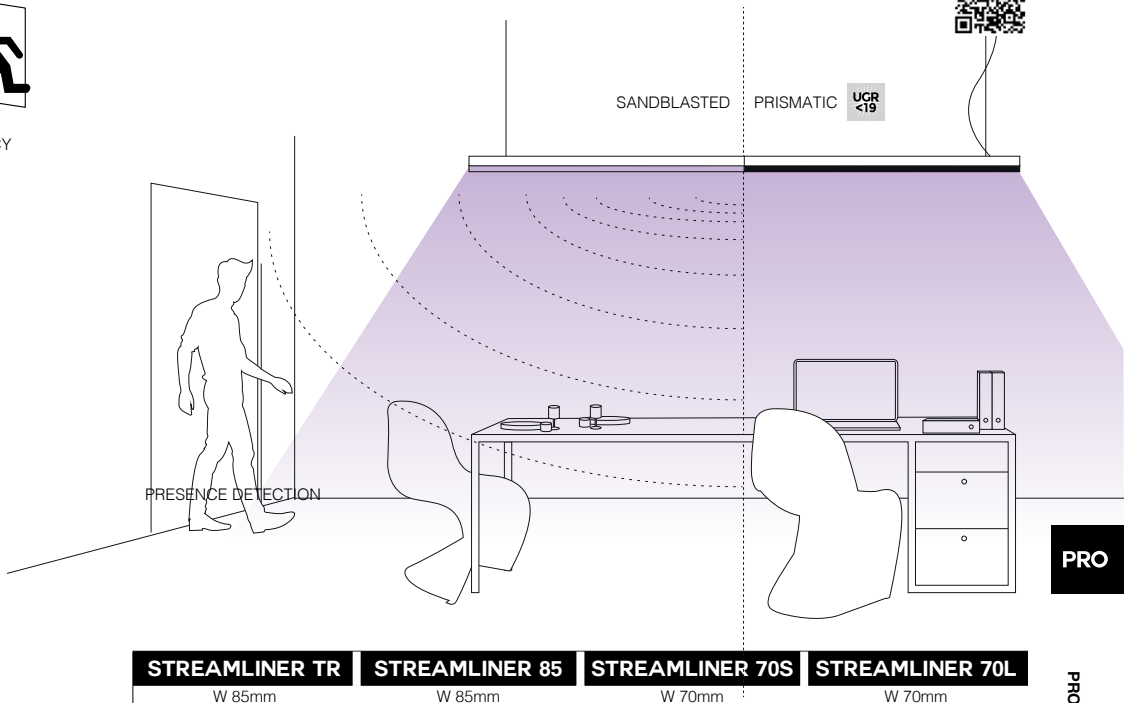


		STREAMLINER TR	STREAMLINER 85	STREAMLINER 70S	STREAMLINER 70L
		W 85mm H 96mm	W 85mm H 95mm	W 70mm H 85mm	W 70mm H 108mm
OPTICS					
SANDBLASTED		•	•	•	•
PRISMATIC		•	•	•	•
LIGHT EFFECT					
LINEAR DOWN		3625lm/m or 1879lm/m	3625lm/m or 1879lm/m	3625lm/m or 1879lm/m	3625lm/m or 1879lm/m
LINEAR DOWN-UP				▲ 3625lm/m ▼ 3625lm/m or 1879lm/m	▲ 3625lm/m ▼ 3625lm/m or 1879lm/m
SPOT MODULE		8,6W - 1089lm	8,6W - 1089lm	8,6W - 1089lm	8,6W - 1089lm
DOWNLIGHT MODULE		6,4W - 587lm	6,4W - 587lm	6,4W - 587lm	6,4W - 587lm
COLOUR TEMPERATURE					
3000K		•	•	•	•
TUNABLE WHITE		•	•	•	•
CONTROL					
NON DIM		•	•	•	•
MAINS DIM					
1-10V DIM		•	•	•	•
DALI DIM		•	•	•	•
SWITCH DIM		•	•	•	•
WIRELESS DIM		◦	◦	◦	◦
COLOUR					
WHITE ○			•	•	•
BLACK ●				•	•
ANODIZED ◌		•	•	•	•
INSTALLATION					
INTERIOR	RECESSED TRIMLESS	•			
	RECESSED TRIM		•		
	SURFACE MOUNTED			•	•
	SUSPENDED			•	•
CONSTRUCTION					
STRAIGHT LINES		•	•	•	•
90° CORNER		•	•	•	•
CURVES					
OTHER					
PRESENCE DETECTION SENSOR		•	•	•	•
LIGHT SENSOR		•	•	•	•
EMERGENCY		•	•		•

• STANDARD
◦ ON REQUEST


STREAMLINER

PRO


A




90 x (L + 10) x 125
min.6 / max.25




78 x (L + 5) x 140
max.35






STREAMLINER		TRIMLESS	85	70 S	70 L
1 PROFILE					
PROFILE / m MAX. LENGTH PER PROFILE SECTION 6m		389 04 00 00 ◇ ◇ ANO ●	389 03 00 00 ◇ ◇ ANO ● / W ○	389 01 00 00 ◇ ◇ ANO ● / B ● / W ○	389 02 00 00 ◇ ◇ ANO ● / B ● / W ○
POLYCARBONATE / m					
SANDBLASTED (SBL)		389 02 05 SBL			
PRISMATIC		389 02 06 PR			
2 DIMENSIONS					
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.					
3 JUNCTION / CORNER					
CORNER 180°		389 03 06 01	389 03 06 01	389 01 06 01	389 01 06 01
CORNER 90°		389 03 06 06	389 03 06 06	389 01 06 06	389 01 06 06
4 ENDCAP					
ENDCAP (1 PIECE)		389 04 03 01 ANO	389 03 03 01 ANO/ W	389 01 03 01 A / B / W	389 02 03 01 A / B / W
5 FIXATION					
RECESSED					
RECESSED CLIP (1 PC.)		389 04 14 01	-	-	-
INSIDE CLIP (1 PC.)		-	389 03 14 01	-	-
SURFACE MOUNTED		-	-	DIRECT FIXATION TO THE CEILING	
SUSPENDED					
SUSPENSION 20 SINGLE 1,6M (1 PC.)		-	-	377 20 21	
SUSPENSION 20 SINGLE 6,0M (1 PC.)		-	-	377 20 26	
SUSPENSION ST		-	-	15225 0340 B / W	
6 CONNECTION					
RECESSED		-	-	-	-
SURFACE MOUNTED		-	-	-	-
SUSPENDED					
CURRENT SUPPLY 1,6M	3X0,75MM²	-	-	377 98 51	
	5X0,75MM²	-	-	377 99 51	
CURRENT SUPPLY 6,0M	3X0,75MM²	-	-	377 98 56	
	5X0,75MM²	-	-	377 99 56	
CONNECTION ST		-	-	15225 0360 B / W	
CABLE BASE R		-	-	203 99 55 ANO / B / W	
CABLE BASE S		-	-	203 99 56 ANO / B / W	
COVERSET R	100MM	-	-	204 00 100 B / W	
		LIGHT MODULES			
7 LED FLEX		**NEXT PAGE**			

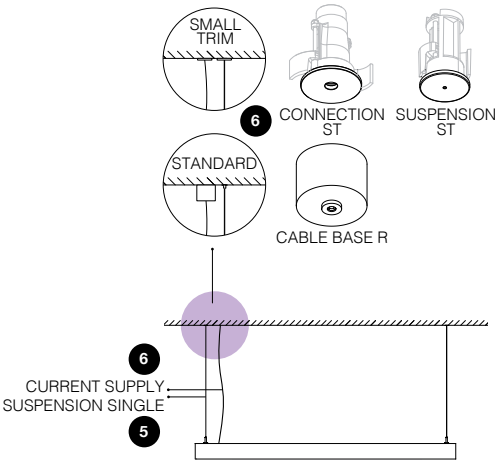

How to build your STREAMLINER

Example for Streamliner 70

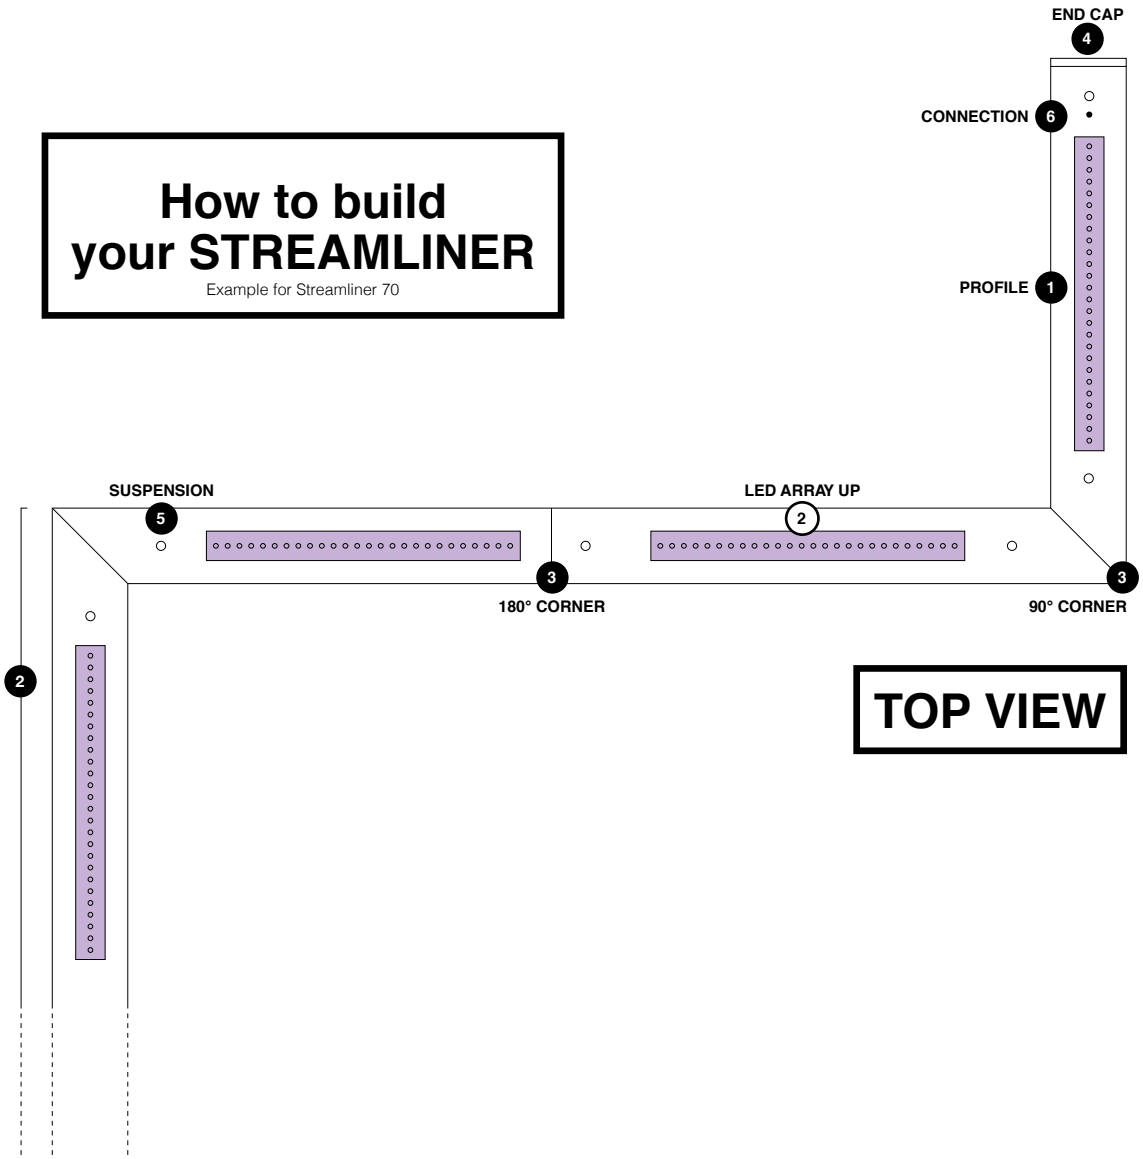

TOP VIEW

PRO

A

1 LED ARRAY DOWN

				7 LIGHT MODULES			
				NON DIM	1-10V DIM	DALI	SWITCH DIM
HIGH OUTPUT	3000K / CRI>90 3395 lm/m 155 lm/W	560mm	12W	389 610 12 E	389 610 12 ED1	389 610 12 ED2	
		840mm	18W	389 610 18 E	389 610 18 ED1	389 610 18 ED2	
		1120mm	24W	389 610 24 E	389 610 24 ED1	389 610 24 ED2	
		1400mm	30W	389 610 30 E	389 610 30 ED1	389 610 30 ED2	
		1680mm	36W	389 610 36 E	389 610 36 ED1	389 610 36 ED2	
		2240mm	48W	389 610 48 E	389 610 48 ED1	389 610 48 ED2	
		1120mm + emergency unit *	24W	389 610 24 E EM1	389 610 24 ED1 EM1	389 610 24 ED2 EM1	
		90° corner - 563mm - 563mm	2 x 12W	389 610 212 E	389 610 212 ED1	389 610 212 ED2	
HIGH EFFICIENCY	3000K / CRI>90 1757 lm/m 171 lm/W	560mm	6W	389 613 06 E	-	-	-
		840mm	9W	389 613 09 E	-	-	-
		1120mm	12W	389 613 12 E	-	-	-
		1400mm	15W	389 613 15 E	-	-	-
		1680mm	18W	389 613 18 E	-	-	-
		2240mm	24W	389 613 24 E	-	-	-
		1120mm + emergency unit *	12W	389 613 12 E EM1	-	-	-
		90° corner - 563mm - 563mm	2 x 12W	389 613 206 E	-	-	-
TUNABLE WHITE	2500-5700K / CRI>80 2693-3117lm/m 2 DALI CONTROL CHANNELS DT6	840mm	21W	-	-	389 610 26 18 ED5	-
		1120mm	28W	-	-	389 610 26 24 ED5	-
		1400mm	35W	-	-	389 610 26 30 ED5	-
		1680mm	42W	-	-	389 610 26 36 ED5	-
		2240mm	56W	-	-	389 610 26 48 ED5	-

* NOT FOR STREAMLINER 70S



220-240V | 50-60Hz
IP20

2 LED ARRAY UP (INCL. PC CLEAR UP)

				NON DIM	1-10V DIM	DALI	SWITCH DIM
STRL 70S	3000K / CRI>90 3395 lm/m 155 lm/W	560mm	12W	389 01 620 12 E	389 01 620 12 ED1	389 01 620 12 ED2	
		1120mm	24W	389 01 620 24 E	389 01 620 24 ED1	389 01 620 24 ED2	
STRL 70L		560mm	12W	389 02 620 12 E	389 02 620 12 ED1	389 02 620 12 ED2	
		1120mm	24W	389 02 620 24 E	389 02 620 24 ED1	389 02 620 24 ED2	



220-240V | 50-60Hz
IP20

3 SPY 52 M10

				NON DIM	1-10V DIM	DALI	SWITCH DIM
1 x SPY 52 M10 	3000K / CRI>90 LED 8,6W / 1089lm / 500mA	20°	389 90 01 + 18696 9320 B/W	389 90 01 ED1 + 18696 9320 B/W	389 90 01 ED5 + 18696 9320 B/W	-	
		45°	389 90 01 + 18696 9330 B/W	389 90 01 ED1 + 18696 9330 B/W	389 90 01 ED5 + 18696 9330 B/W	-	
	2700K / CRI>90 LED 8,6W / 1041lm / 500mA	20°	389 90 01 + 18696 9220 B/W	389 90 01 ED1 + 18696 9220 B/W	389 90 01 ED5 + 18696 9220 B/W	-	
		45°	389 90 01 + 18696 9230 B/W	389 90 01 ED1 + 18696 9230 B/W	389 90 01 ED5 + 18696 9230 B/W	-	
2 x SPY 52 M10 	3000K / CRI>90 2 x LED 8,6W / 1089lm / 500mA	20°	389 90 02 + 2 x18696 9320 B/W	389 90 02 ED1 + 2 x 18696 9320 B/W	389 90 02 ED5 + 2 x 18696 9320 B/W	-	
		45°	389 90 02 + 2 x18696 9330 B/W	389 90 02 ED1 + 2 x 18696 9330 B/W	389 90 02 ED5 + 2 x 18696 9330 B/W	-	
	2700K / CRI>90 2 x LED 8,6W / 1041lm / 500mA	20°	389 90 02 + 2 x18696 9220 B/W	389 90 02 ED1 + 2 x 18696 9220 B/W	389 90 02 ED5 + 2 x 18696 9220 B/W	-	
		45°	389 90 02 + 2 x18696 9230 B/W	389 90 02 ED1 + 2 x 18696 9230 B/W	389 90 02 ED5 + 2 x 18696 9230 B/W	-	

220-240V | 50-60Hz
IP20

4 LED DOWNLIGHT

				NON DIM	1-10V DI	DALI	SWITCH DIM
1 x LED 	3000K / CRI>90 LED 6,4W / 587lm / 350mA	40°	389 611 933	-	-	-	
	2700K / CRI>90 LED 6,4W / 587lm / 350mA	40°	389 611 923	-	-	-	
2 x LED 	3000K / CRI>90 2 x LED 6,4W / 587lm / 350mA	40°	389 612 933	-	-	-	
	2700K / CRI>90 2 x LED 6,4W / 587lm / 350mA	40°	389 612 923	-	-	-	


220-240V | 50-60Hz
IP20

5 EXTRA CIRCUIT

CABLING EXTRA CIRCUIT (PER MODULE)	328 90 01

6 SENSOR

AMBIENT LIGHT & MOTION SENSOR DIM2 + INFRARED PROGRAMMING UNIT	389 92 00 ED2 ANO / B / W
INFRARED PROGRAMMING UNIT	300 90 019

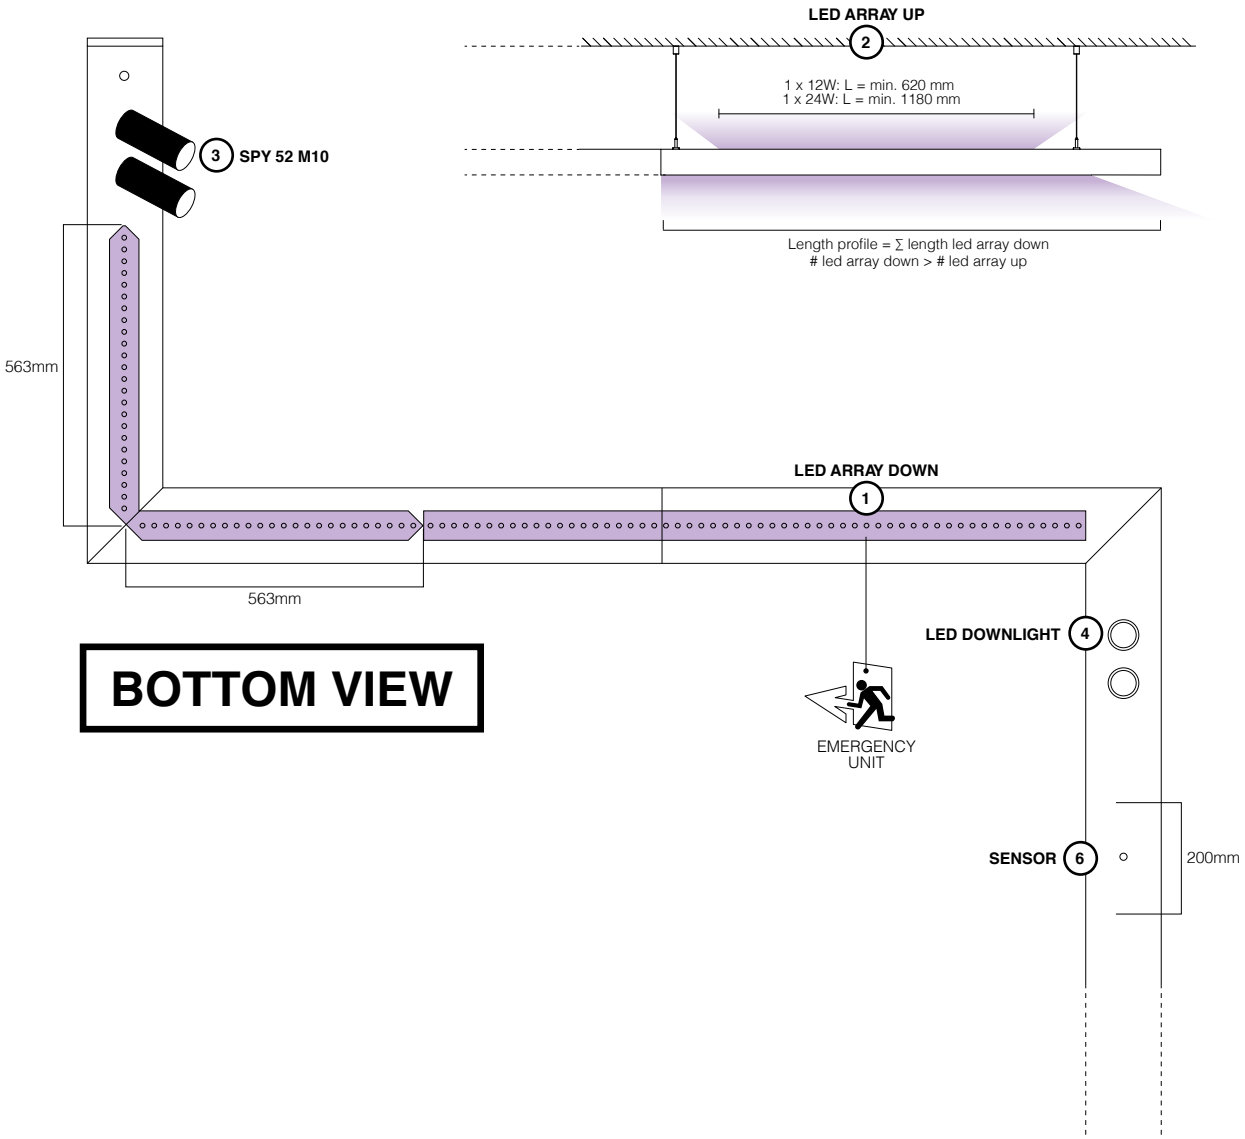

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY	
			SPY 52 M10	
			1	2
FINISH				
SPY 52 TUBE	**19810 0100 B / FBR / FG / GC / W**		R	R
HONEYCOMB / LENS / GLASS				
HONEYCOMB SINGLE USE	**19810 0010 B**		A	A
HONEYCOMB DOUBLE USE	**19810 0060 B**		A	A
LINEAR SPREAD LENS	**19810 0020**		A	A
SPREAD LENS	**19810 0030**		A	A
SOFTENING LENS	**19810 0040**		A	A
GLASS SBL	**19810 0050**		A	A

Exterior

Outdoor

INDEX

Exterior Ceiling Recessed


REO X P 456


DEEP RINGO X P 458


ENTERO X P 460



CARREE X P 462

INDEX

Exterior Ceiling Surface


BOXY X P 464


SUPENOVA XS P 466

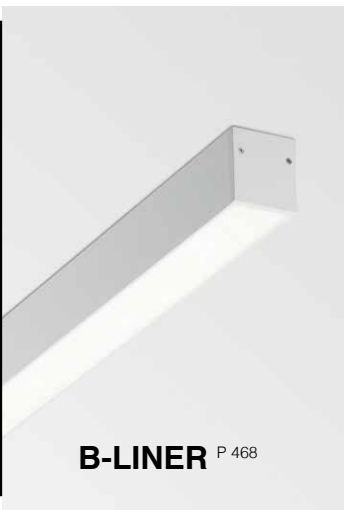
B-LINER P 468

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.


I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.

REO

The Reo collection is more than one product, it is a family which offers a solution for many lighting demands, from residential to hotel, restaurant to retail and much more. In line with this philosophy, Reo comes in single and double fixtures, round or square, orientable or fixed, in multiple finishing colours, for both indoor and outdoor use.
The design of these recessed conical spots delivers a hardly visible transition from the intense light to the ceiling, resulting in a halo-like effect, ideal to give the space an extra dimension.

deltalight.com/reo


IP43 IP44 IP65

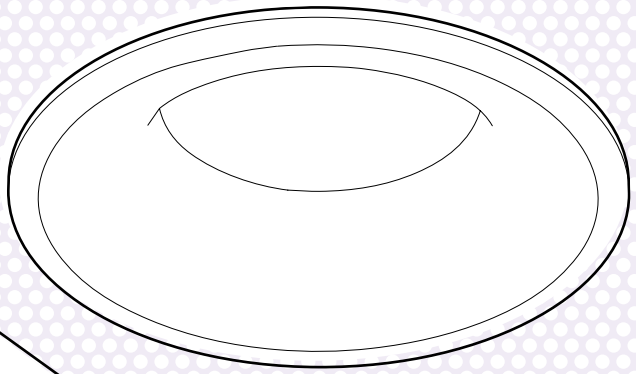


REO X

1/1


SCALE 1:1
10 100



46 x 90 / min.5



56x 60 / min.5




0-30° 360°


Ø70x 60 / min.5

MICRO REO X / MINI REO X

				MICRO REO X	MINI REO II X	MINI REO II OK X
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP43	35°	**302 23 811 932** ◇		
	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP65	37°		**19352 9330** ◇	**19354 9330** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP43	35°	**302 23 811 922** ◇		
	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA	IP65	37°		**19352 9230** ◇	**19354 9230** ◇
					◇ B ● / W ○	



76 x 55 / max.22




76 x 55


REO X


				S1	S2
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP44	33°	**202 25 811 932** ◇	**202 252 811 932** ◇
	LED [H] 10.4W / 1128lm / 500mA	IP65		**202 256 811 932** ◇	**202 2562 811 932** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP44	33°	**202 25 811 922** ◇	**202 252 811 922** ◇
	LED [H] 10.4W / 1083lm / 500mA	IP65		**202 256 811 922** ◇	**202 2562 811 922** ◇
				◇ A ● / B ● / W ○	




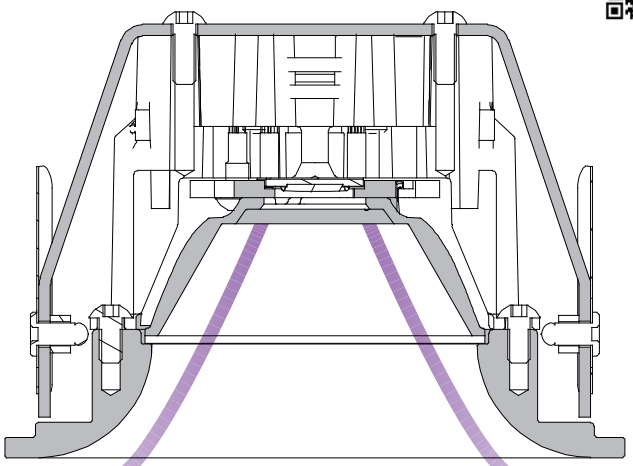

CURVES
a halo-like effect

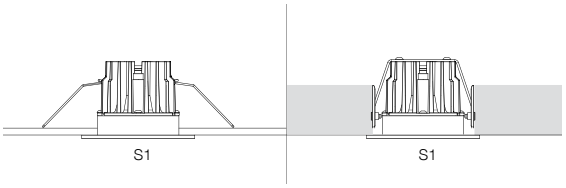





FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY				
			MICRO REO	MINI REO		REO X	
			X	II X	II OK X	S1	S2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R *	R *
1-10V DIM 15	**300 90 124**	min. 55	R *	R *	R *	R *	R *
DALI DIM 14	**300 90 125**	min. 55	R *	R *	R *	R *	R *

* REMOTE INSTALLATION


B

DEEP RINGO X


The conical shaped design of the Deep Ringo fixtures and the deeper placed LED source make sure that glare is reduced to a minimum when Deep Ringo is installed in the ceiling. The small trim gives a refined touch to this elegant luminaire.

deltalight.com/deepringo


IP65

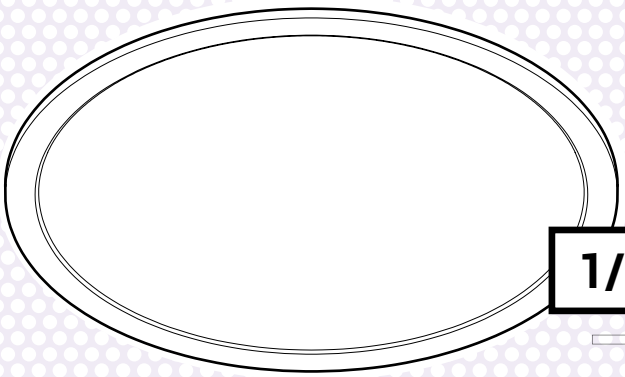


DEEP RINGO
X

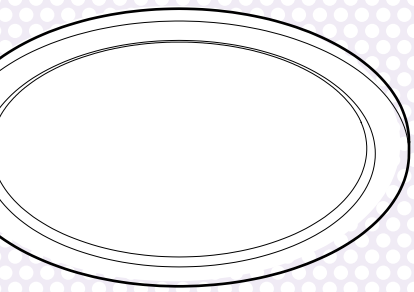

MINI
DEEP RINGO II
X



56 x 80 / min.5




76 x 90 / min.5

A

DEEP RINGO				MINI DEEP RINGO II X	DEEP RINGO X
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP65	37°	**19424 9330** ◇	
	LED [H] 7.1W / 812lm / 350mA LED [H] 10.4W / 1128lm / 500mA		33°		**19434 9320** ◇
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA		37°	**19424 9230** ◇	
	LED [H] 7.1W / 779lm / 350mA LED [H] 10.4W / 1083lm / 500mA		33°		**19434 9220** ◇

◇ B ● / W ○

VISUAL COMFORT



FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY	
			MINI DEEP RINGO II X	DEEP RINGO X
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *
1-10V DIM 15	**300 90 124**	min. 55	R *	R *
DALI DIM 14	**300 90 125**	min. 55	R *	R *

* REMOTE INSTALLATION


ENTERO X


The diversity within the Entero family makes it a versatile range, suitable for a multitude of applications and to fulfill various kinds of lighting needs.
Apart from interior use, Entero can also be installed in exterior settings, this to create a uniform look and feel throughout the entire project. To ensure a hassle-free answer to these harsh environments, Entero X is designed to perfection in every detail.

deltalight.com/entero

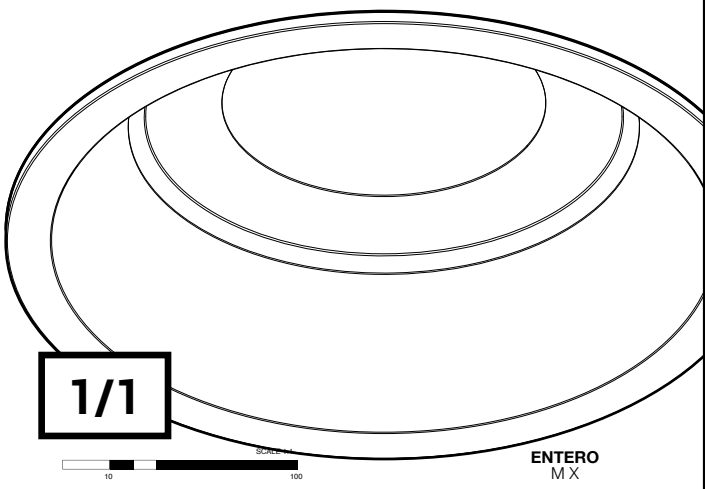

IP65





NEW

ENTERO SMALL X

Ø76 x 110 / max.16


76 x 76 x 110 / 12,5 or 25

			IK06	ROUND	SQUARE
3000K CRI>90	LED [E] 5.7W / 519lm / 500mA	IP65	10°	**28438 9310** ◇	**28538 9310** ◇
	LED [U] 8.6W / 1089lm / 500mA		20°	**28439 9320** ◇	**28539 9320** ◇
			45°	**28439 9330** ◇	**28539 9330** ◇
2700K CRI>90	LED [E] 5.7W / 519lm / 500mA		10°	**28438 9210** ◇	**28538 9210** ◇
	LED [U] 8.6W / 1041lm / 500mA		20°	**28439 9220** ◇	**28539 9220** ◇
			45°	**28439 9230** ◇	**28539 9230** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 10.2W / 1038lm / 500mA		20°	**28483 9020** ◇	**28583 9020** ◇
			45°	**28483 9030** ◇	**28583 9030** ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA		20°	**28470 9020** ◇	**28570 9020** ◇
			45°	**28470 9030** ◇	**28570 9030** ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		20°	**28441 9020** ◇	**28541 9020** ◇
			45°	**28441 9030** ◇	**28541 9030** ◇
				◇B ● / W ○	


IK06

Reliability for exterior use

A



R & S



NEW


ENTERO MEDIUM X


Ø92 x 140 / max.16

92 x 92 x 140 / 12,5 or 25


			IK06	ROUND	SQUARE
3000K CRI>90	LED [E] 8.2W / 677lm / 700mA	IP65	10°	**28442 9310** ◇	**28542 9310** ◇
	LED [R] 17.2W / 2101lm / 500mA		18°	**28443 9310** ◇	**28543 9310** ◇
			30°	**28443 9320** ◇	**28543 9320** ◇
2700K CRI>90	LED [E] 8.2W / 677lm / 700mA		10°	**28442 9210** ◇	**28542 9210** ◇
	LED [R] 17.2W / 2009lm / 500mA		18°	**28443 9210** ◇	**28543 9210** ◇
			30°	**28443 9220** ◇	**28543 9220** ◇
SOFT DIM	3000-1800K / CRI>90 LED [X] 16.1W / 1618lm / 450mA		18°	**28444 9010** ◇	**28544 9010** ◇
			30°	**28444 9020** ◇	**28544 9020** ◇
TUNABLE WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA		18°	**28471 9010** ◇	**28571 9010** ◇
			30°	**28471 9020** ◇	**28571 9020** ◇
	6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		18°	**28445 9010** ◇	**28545 9010** ◇
			30°	**28445 9020** ◇	**28545 9020** ◇
				◇B ● / W ○	

What if there is only one?

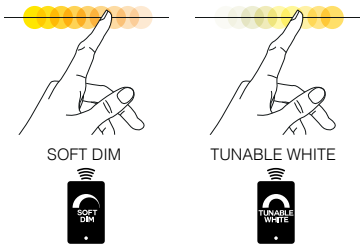



Ø112 x 175 / max.16



112 x 112 x 175 / 12,5 or 25

NEW

ENTERO LARGE X

IK06

				ROUND	SQUARE
3000K CRI>90	LED [E] 10.7W / 814lm / 900mA	IP65	10°	**28446 9310** ◇	**28546 9310** ◇
	LED [I] 30.8W / 3974lm / 900mA		18°	**28447 9310** ◇	**28547 9310** ◇
			30°	**28447 9320** ◇	**28547 9320** ◇
2700K CRI>90	LED [E] 10.7W / 814lm / 900mA		10°	**28446 9210** ◇	**28546 9210** ◇
	LED [I] 30.8W / 3802lm / 900mA		18°	**28447 9210** ◇	**28547 9210** ◇
			30°	**28447 9220** ◇	**28547 9220** ◇
TUNABLE WHITE	6500-2700K / CRI>90 LED [Z] 17.8W / 2054lm / 500mA		18°	**28449 9010** ◇	**28549 9010** ◇
			30°	**28449 9020** ◇	**28549 9020** ◇
				◇ B ● / W ○	

EXTERIOR CEILING

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY					
			SMALL		MEDIUM		LARGE	
			ROUND	SQUARE	ROUND	SQUARE	ROUND	SQUARE
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE) 11	**21012 0298**	min. 55	R	R	R	R	R	R
1-10V DIM 15	**300 90 124**	min. 55	R	R	R	R	R	R
DALI DIM 14	**300 90 125**	min. 55	R	R	R	R	R	R
TUNABLE WHITE DALI DT8 20	**21012 0355**	min. 86	R	R	R	R	R	R
HONEYCOMB / GLASS / LENS								
HONEYCOMB SINGLE USE	**28500 0050 B**		A *	A *				
	28500 0110 B				A **	A **		
	28500 0170 B						A ***	A ***
HONEYCOMB DOUBLE USE	**28500 0060 B**	Not for 10°	A *	A *				
	28500 0120 B	Not for 10°			A **	A **		
	28500 0180 B	Not for 10°					A ***	A ***
LINEAR SPREAD LENS	**28500 0010**	Not for 10°	A *	A *				
	28500 0070	Not for 10°			A **	A **		
	28500 0130	Not for 10°					A ***	A ***
SPREAD LENS	**28500 0020**	Not for 10°	A *	A *				
	28500 0080	Not for 10°			A **	A **		
	28500 0140	Not for 10°					A ***	A ***
SOFTENING LENS	**28500 0030**	Not for 10°	A *	A *				
	28500 0090	Not for 10°			A **	A **		
	28500 0150	Not for 10°					A ***	A ***
GLASS SBL	**28500 0040**	Not for 10°	A *	A *				
	28500 0100	Not for 10°			A **	A **		
	28500 0160	Not for 10°					A ***	A ***
INSTALLATION								
S MOUNTING SET S2 FOR CONCRETE	**28500 0190**		O					
M MOUNTING SET S2 FOR CONCRETE	**28500 0200**				O			
L MOUNTING SET S2 FOR CONCRETE	**28500 0210**						O	

* MAX.500MA
** MAX.500MA FOR 1 ACCESSORY / ** MAX.450MA FOR 2 ACCESSORIES
*** MAX.900MA FOR 1 ACCESSORY / *** MAX.800MA FOR 2 ACCESSORIES


B

CARREE X

The Carree range is Delta Light's answer for easy-to-install, timeless and functional recessed spots, as it has been a Delta Light classic for many years.
This family of square recessed luminaires offers refined solutions for LED or halogen, either with or without trim.
The straight lines in the design make a contemporary spot out of Carree, not only useful in modern architecture but also in many other applications. Carree can be used throughout the entire project, as it also includes IP44 solutions for bathrooms and IP65 luminaires for outdoor use.

deltalight.com/carree

IP44 **IP65**

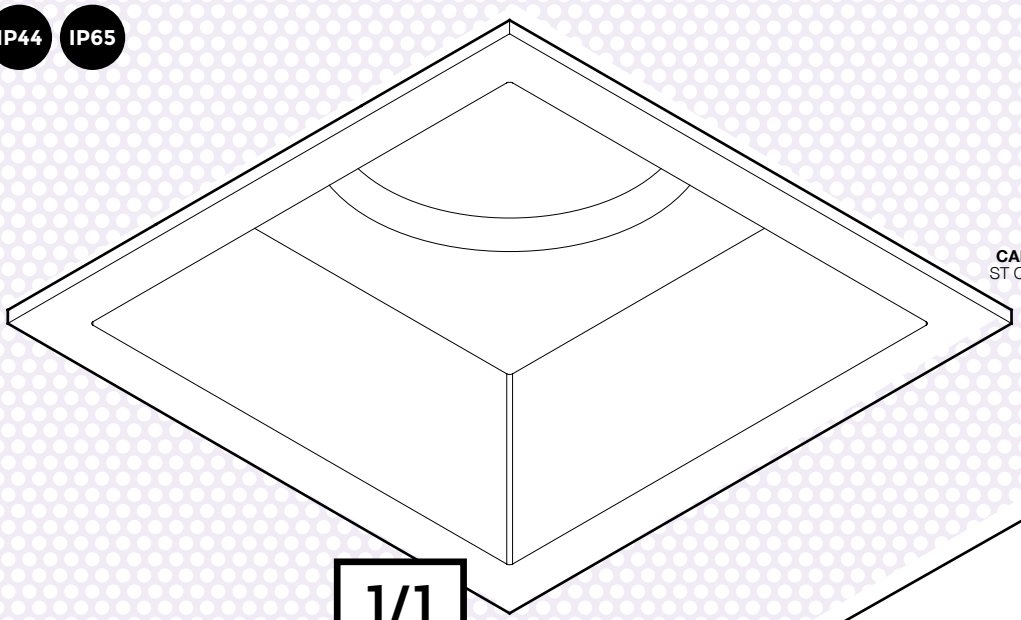


CARREE
ST OK LED


1/1

SCALE 1:1
10 100

A




75 x 75 x 80 / max.35



75 x 75 x 80

CARREE X LED				S1	S2
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA	IP44	33°	**202 20 811 932** ◇	
		IP65		**202 206 811 932** ◇	**202 207 811 932** ◇
2700K CRI>90	LED [H] 7.1W / 779lm / 350mA	IP44		**202 20 811 922** ◇	
		IP65		**202 206 811 922** ◇	**202 207 811 922** ◇
				◇ A ● / N ● / W ○	

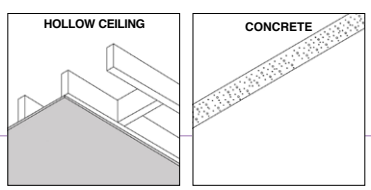

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY	
			CARREE X LED	
			S1	S2
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *
1-10V DIM 15	**300 90 124**	min. 55	R *	R *
DALI DIM 14	**300 90 125**	min. 55	R *	R *

* REMOTE INSTALLATION

BOXY


What once began as a cubic luminaire is now an elaborate family of surface mounted luminaires, both cubic and cylindrical shaped. Though different in shape, still uniform in look, as both shapes have a deeper recessed LED module with a conical, coloured insert in front. While the deeper recessed LED module reduces the glare, the choice in colour creates possibilities for playful and attractive lighting solutions.
Alongside the different shapes, this family offers indoor and outdoor luminaires, a perfect solution when recessing is not an option.


deltalight.com/boxy


IP53

R & S


A







BOXY				R DIM8	L+	2L+
3000K CRI>90	7.1W / 812lm / 350mA	MAINS	33°		**251 67 811 932 ED8** ◇	
	2 x 7.1W / 812lm / 350mA					**251 67 812 932 ED8** ◇
	10.4W / 1128lm / 500mA			**251 70 811 932 ED8** ◇		
2700K CRI>90	7.1W / 779lm / 350mA				**251 67 811 922 ED8** ◇	
	2 x 7.1W / 779lm / 350mA					**251 67 812 922 ED8** ◇
	10.4W / 1083lm / 500mA			**251 70 811 922 ED8** ◇		
				◇ B-B ●● / W-B ○● / W-W ○○	◇ B-B ●● / W-W ○○	
				220-240V / 50-60Hz	220-240V / 50-60Hz	
				□ IP53	□ IP53	

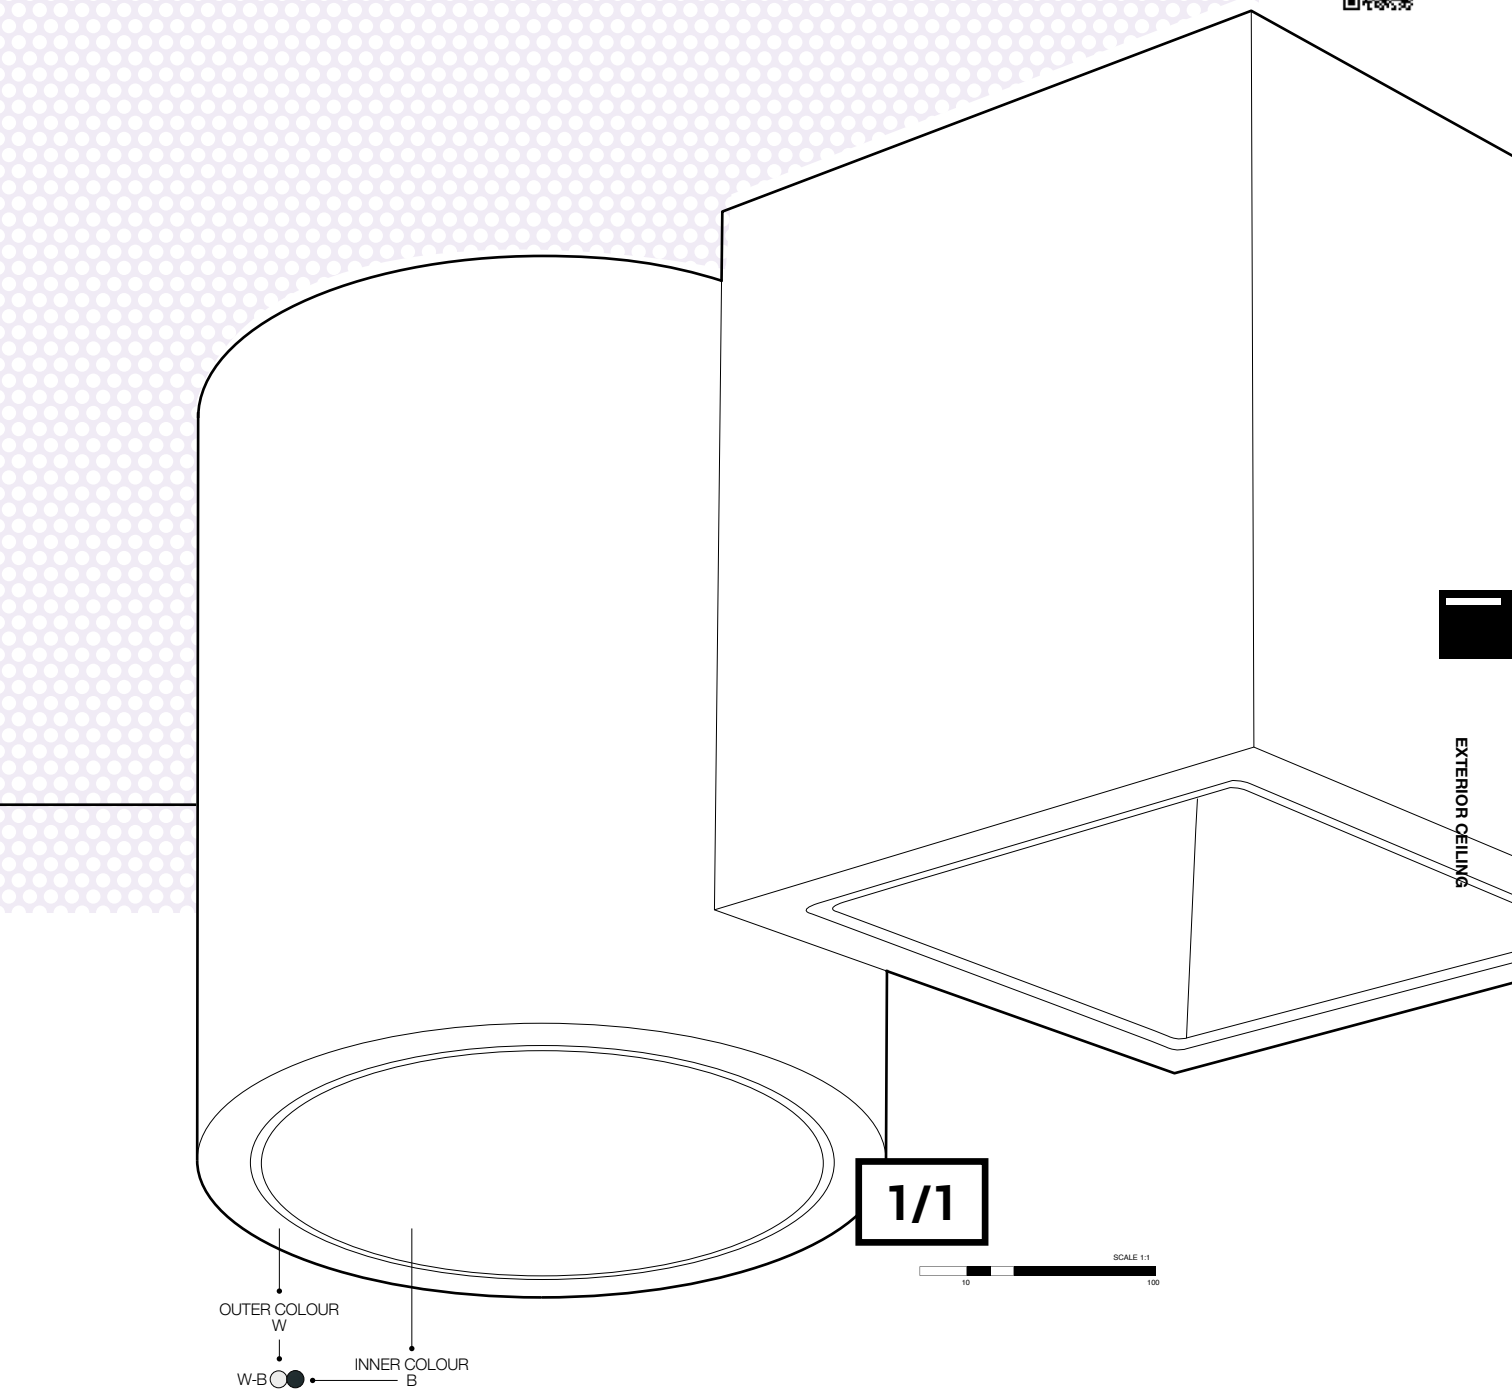
1/1
SCALE 1:1
10
100
OUTER COLOUR
W
INNER COLOUR
B
W-B

SUPERNOVA XS


Supernova is an extensive range of pure geometrically formed lighting fixtures that guarantee powerful illumination and atmosphere. The range comes in different diameters and application possibilities.


With its 26 cm or 33 cm diameter, the Supernova XS (Extra Small) can be considered to be the baby in the range when it comes to size, but not when it comes to performance and skills. It only needs 6 cm of height to hide away an intense cluster of powerleds in its perfectly curved aluminium body.


deltalight.com/supernovaxs

IP64

TILT, TWIST & TURN ME ON...

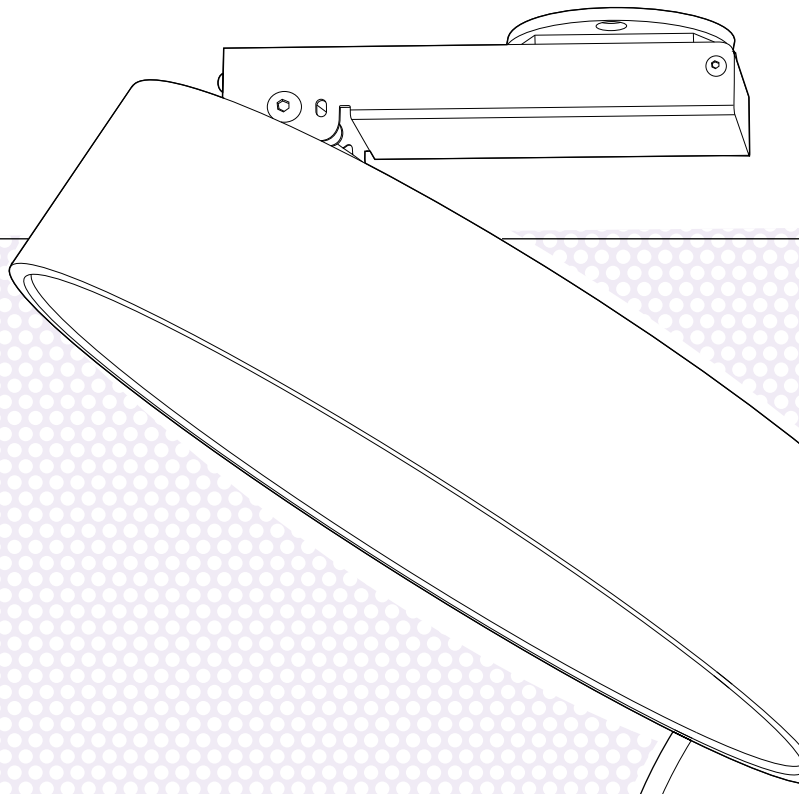





SUPERNOVA XS			260 X	PIVOT 260 X
3000K CRI>80	LED 10W / 900lm	IP64	**274 87 2610 83** ◇	**274 88 2610 83** ◇

◇N●/W○


220-240V / 50-60Hz

Ⓘ

A GLIMPSE OF ME
ON PAGE 30

C

FIND ME ONLINE

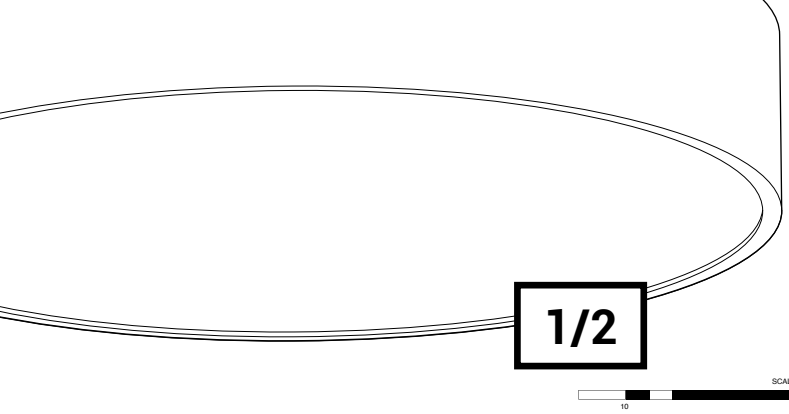



B-LINER


With its IP65 rating - to avoid water ingress inside the profile - and its robust looks, B-Liner is your go-to linear lighting solution for outdoors. Available in 3 sizes and 3 finishing colours, B-Liner offers an answer for multiple exterior applications: create a long line of light or opt for a playful setting with different lengths, B-Liner will perform!

deltalight.com/bliner


IP65

1/1




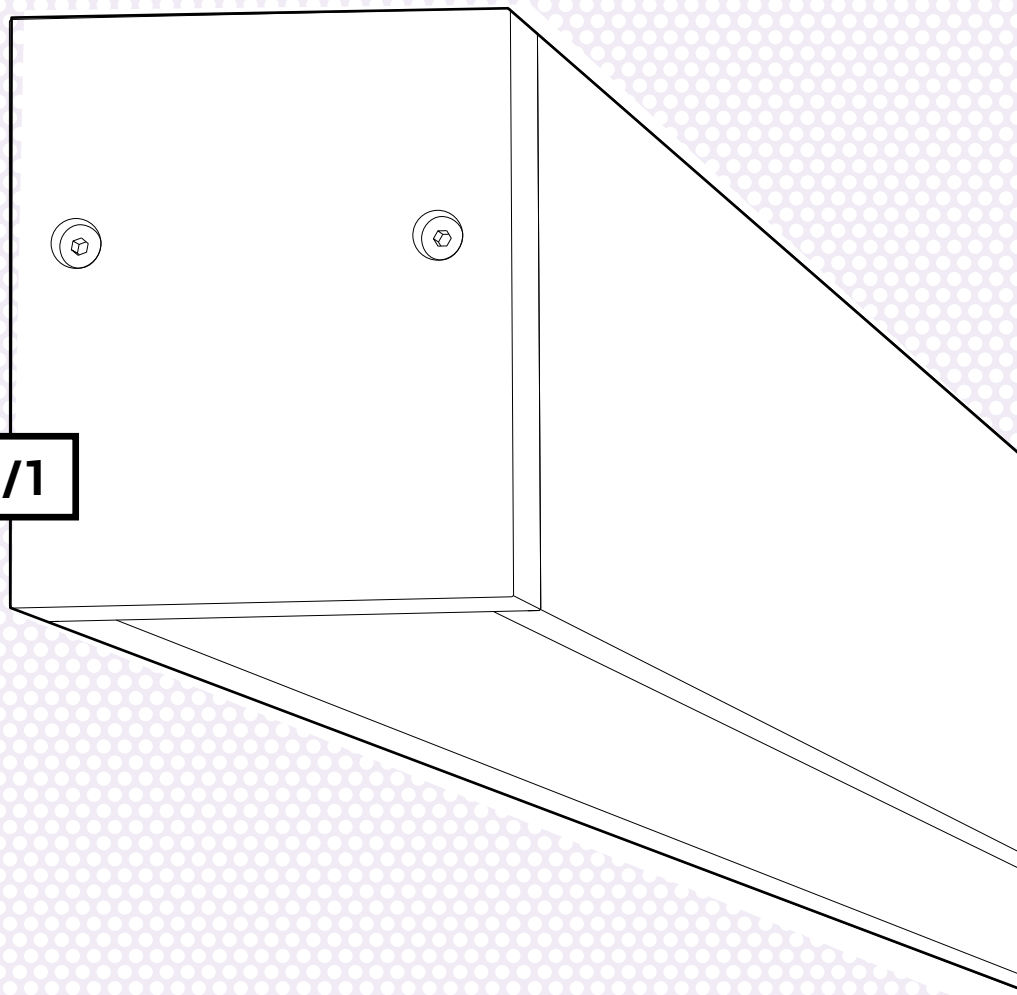

A




			B-LINER 65 IP		
			580 mm	860 mm	1140 mm
3000K CRI>90	LED 14,7W / 2159lm	IP65	**388 01 22** ◇		
	LED 22W / 3238lm			**388 01 32** ◇	
	LED 29,4W / 4318lm				**388 01 42** ◇
			◇ A ● / N ● / W ○		
			110-240V / 50-60Hz		

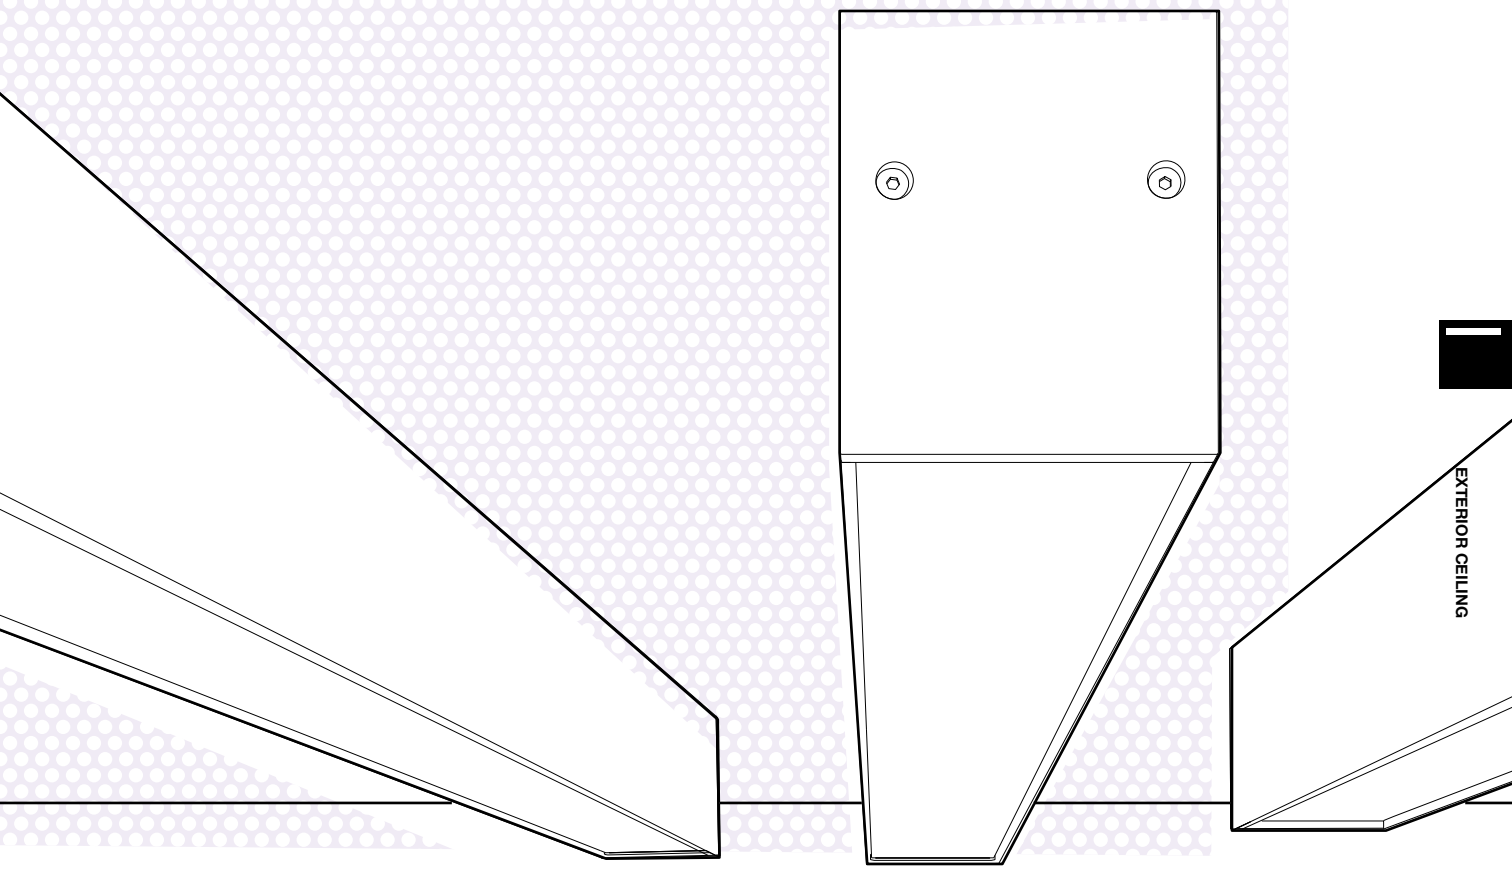

INDEX

Exterior Wall Recessed

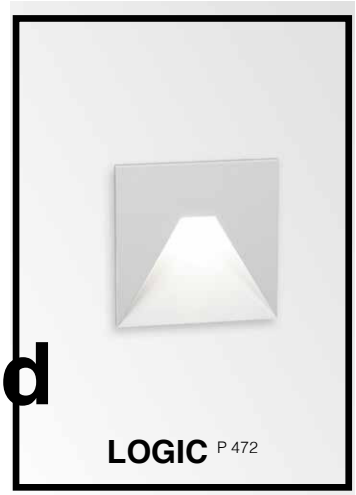
LOGIC P 472


LEDS C / GO P 474


HELI X P 474

INDEX

Exterior Wall Surface



New members to the family!
OONO P 476


STIP P 478


SKOV P 478


VISION OUT P 480


TOPIX P 480

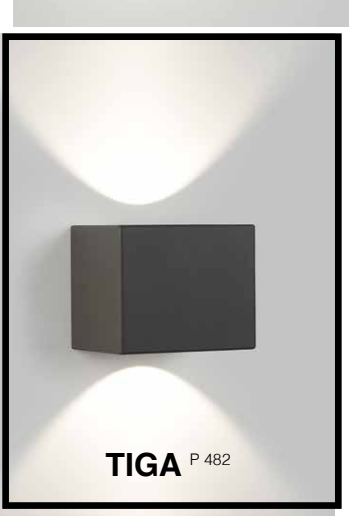

TIGA P 482


MONO II P 482


ULTRA P 492


Hi! I'm new to the range.
NOCTA P 484


BACKSPACE P 488

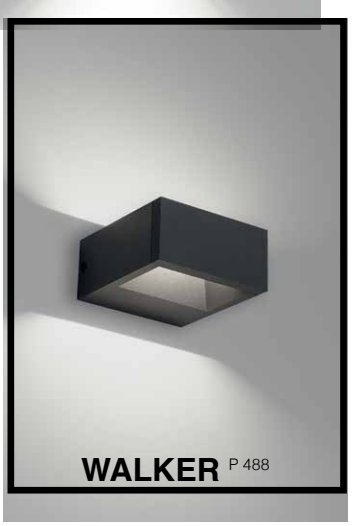

WALKER P 488

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.



MONTUR P 490

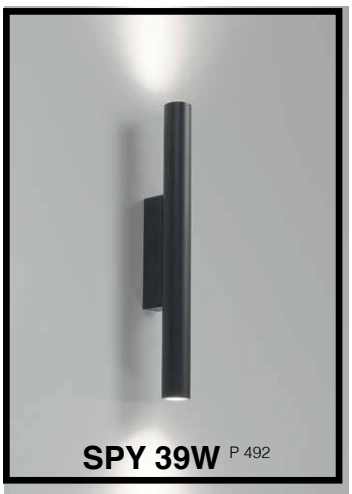

SPY 39W P 492



KIX P 494



SOIREE P 496



POLESANO W P 536



FRAX P 514




SPIX P 520

LOGIC

As a family of guidance lights, Logic W exists out of small and large wall luminaires to be installed slightly above ground level. As such, they provide a soft glow on the floor to guide you along pathways or in corridors, both in- and outdoors.


deltalight.com/logic

IP54 **IP65**

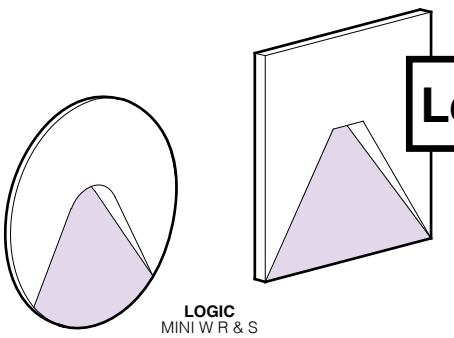


LOGIC
MINI W R & S


A

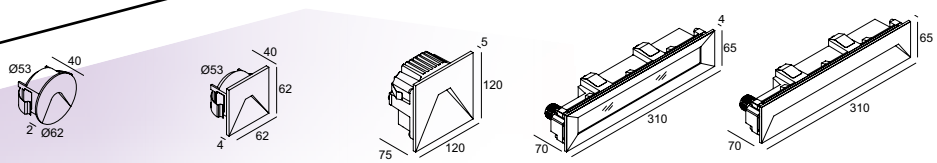


LOGIC			55 x 50 / min. 12 MINI W R	55 x 50 / min. 12 MINI W S	BOX / 115-140 W S	BOX / 110-135 W L F	BOX / 110-135 W L
3000K CRI>80	LED 0,6W / 40lm / 24V-DC	IP54	**304 30 12** ◇	**304 31 12** ◇			
	LED 9W / 1480lm / 350mA	IP65				**304 32 02 83** ◇	**304 32 01 83** ◇
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP65			**304 33 811 930** ◇		
			◇ A ● / W ○		◇ A ● / N ● / W ○	◇ A ● / N ● / W ○	
					110-240V / 50-60Hz INCL. 1 x PG11	220-240V / 50-60Hz INCL. 1 x PG11	
			III		I	I	

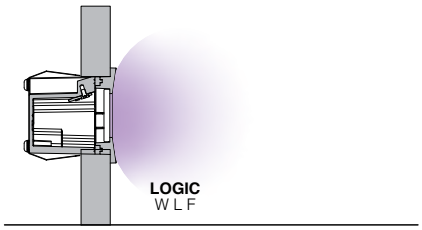


LOGIC
W L F

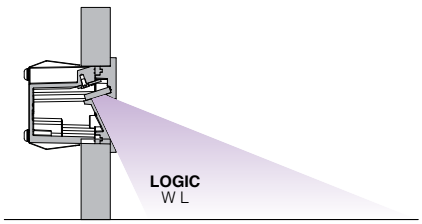


LOGIC
W L

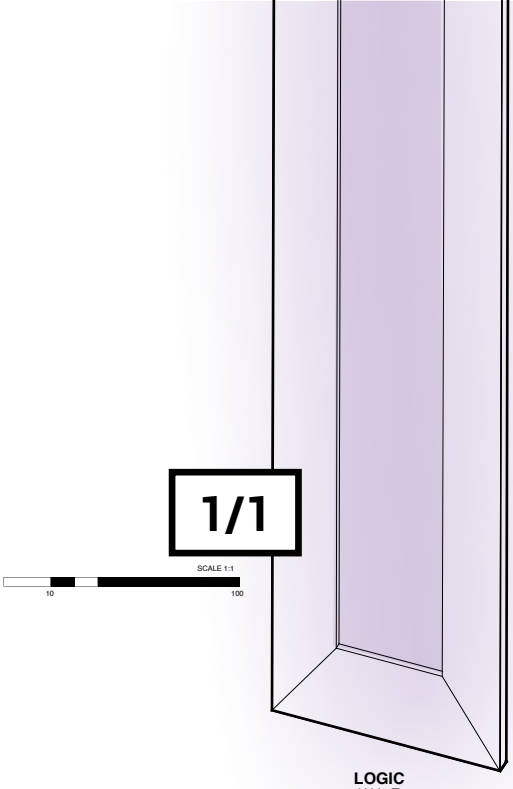

LOGIC
W L F

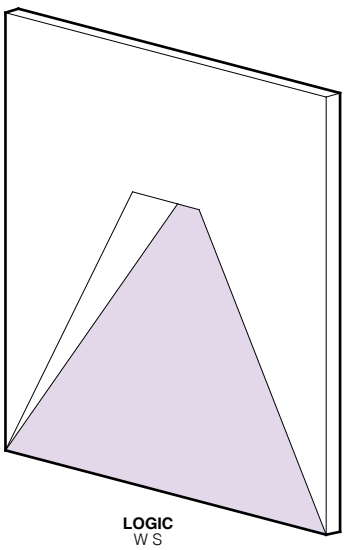

LOGIC
W S

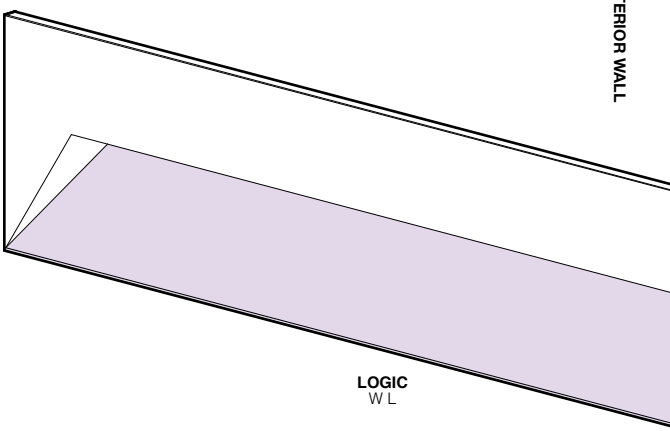

LOGIC
W L

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY				
			LOGIC MINI		LOGIC		
			W R	W S	W S	W L F	W L
LED POWER SUPPLY MORE INFO IN TECNICAL CHAPTER							
NON DIM 24V-DC - 24W	**21012 0160**	min. 55	R *	R *			
INSTALLATION							
FOR PLASTER FINISH	**270 11 192**				R		
	270 11 191					R	R
	270 11 188		O	O			
FOR EXPOSED CONCRETE	**304 33 96**				R		
	304 32 96					R	R

* REMOTE INSTALLATION


B

LEDS GO / C


This family offers some miniature fixtures that serve as orientation and atmosphere lighting. Available round and square, these little dots of light are perfect as guidance lights along paths and driveways.

deltalight.com/ledsgo
deltalight.com/ledsc

IP67



38 x 38 x 45



41 x 45

A

LEDS GO / C / HELI			LEDS GO IN FORTE	LEDS C R ST
4000K CRI>80	LED [A] 1W / 134lm / 350mA	IP67	**302 10 34** ◇	**302 20 34** ◇
3000K CRI>80	LED [A] 1W / 132lm / 350mA		**302 10 32** ◇	**302 20 32** ◇

◇ ANO ●


III

HELI X


As a small wall recessed luminaire, Heli is perfect as a guidance light. Be it in a corridor or as a safety light for the steps of your stairs at night, Heli does the trick. Also outside, Heli X will guide you the way.

deltalight.com/heli

IP65



75 x 87 x 60

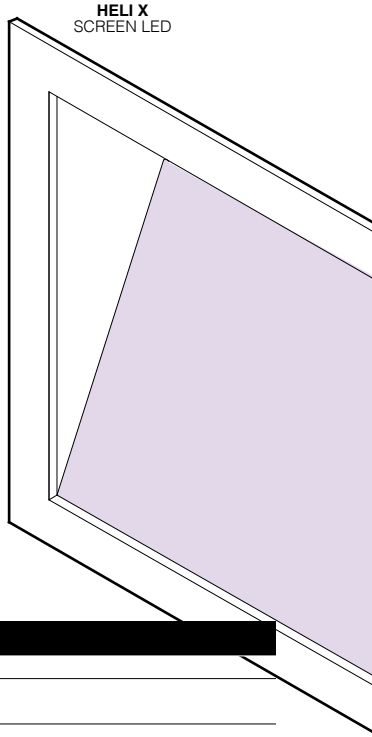


LEDS GO / C / HELI			HELI X SCREEN LED
3000K CRI>80	LED [A] 1W / 132lm / 350mA	IP54	**202 04 22** ◇


◇ A ● / N ●

III


STEP LIGHT

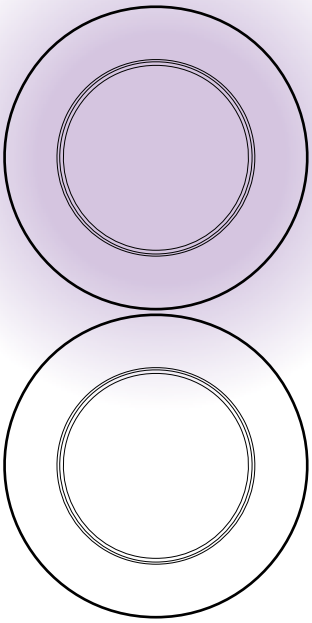



LEDS C
R ST



LEDS GO
IN FORTE

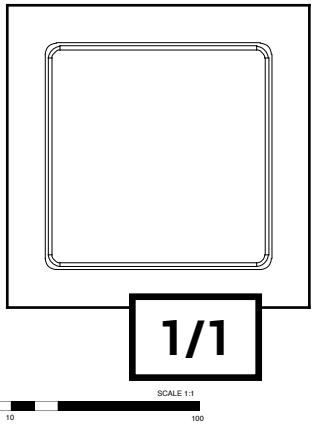



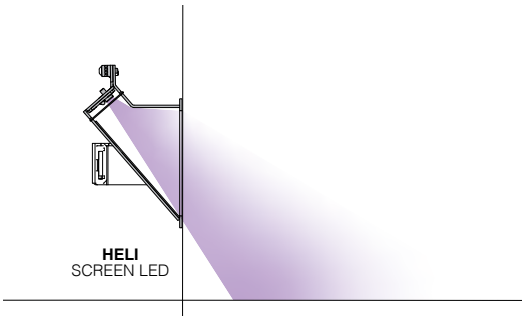

HELI
SCREEN LED

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY		
			LEDS GO IN FORTE	LEDS C R ST	HELI X SCREEN LED
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT					
MAINS DIM (FE) 11	**21012 0298**	min. 55	R (min. 3 LED A) *	R (min. 3 LED A) *	R (min. 3 LED A)
1-10V DIM 15	**300 90 124**	min. 55	R (min. 6 LED A) *	R (min. 6 LED A) *	R (min. 6 LED A)
DALI DIM 14	**300 90 125**	min. 55	R (min. 4 LED A) *	R (min. 4 LED A) *	R (min. 4 LED A)
INSTALLATION					
CONCRETE BOX 151	**302 19 21**		O		
CONCRETE BOX TR 152	**302 19 22**		O		
CONCRETE BOX 187	**270 11 187**				O

* REMOTE INSTALLATION

B

OONO


How to describe Oono in one sentence?
'A soft glow of light during golden hour, at the end of a sky-blue summers day…'


That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities.
It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass.
It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with staraightforward surface mounted and pendant luminaires for indoors.
It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold.
It brings together the shimmer of dusk with the fresh start of dawn.


deltalight.com/oono

IP54

A







NEW

OONO			IK04	OONO W S	OONO W M	OONO W L
3000K / CRI>90	LED 8.6W / 1089lm / 500mA	IP54	MAINS	**29611 9308** ◇		
	LED 12.4W / 1467lm / 700mA				**29612 9308** ◇	
	LED 17.2W / 2101lm / 500mA					**29613 9300** ◇
2700K / CRI>90	LED 8.6W / 1041lm / 500mA			**29611 9208** ◇		
	LED 12.4W / 1403lm / 700mA				**29612 9208** ◇	
	LED 17.2W / 2009lm / 500mA					**29613 9200** ◇
				◇ B ●		
				220-240V / 50-60Hz		
				I		


A GLIMPSE OF ME
ON PAGE 62

C


FIND ME ONLINE

1/2

SCALE 1:1
10 100

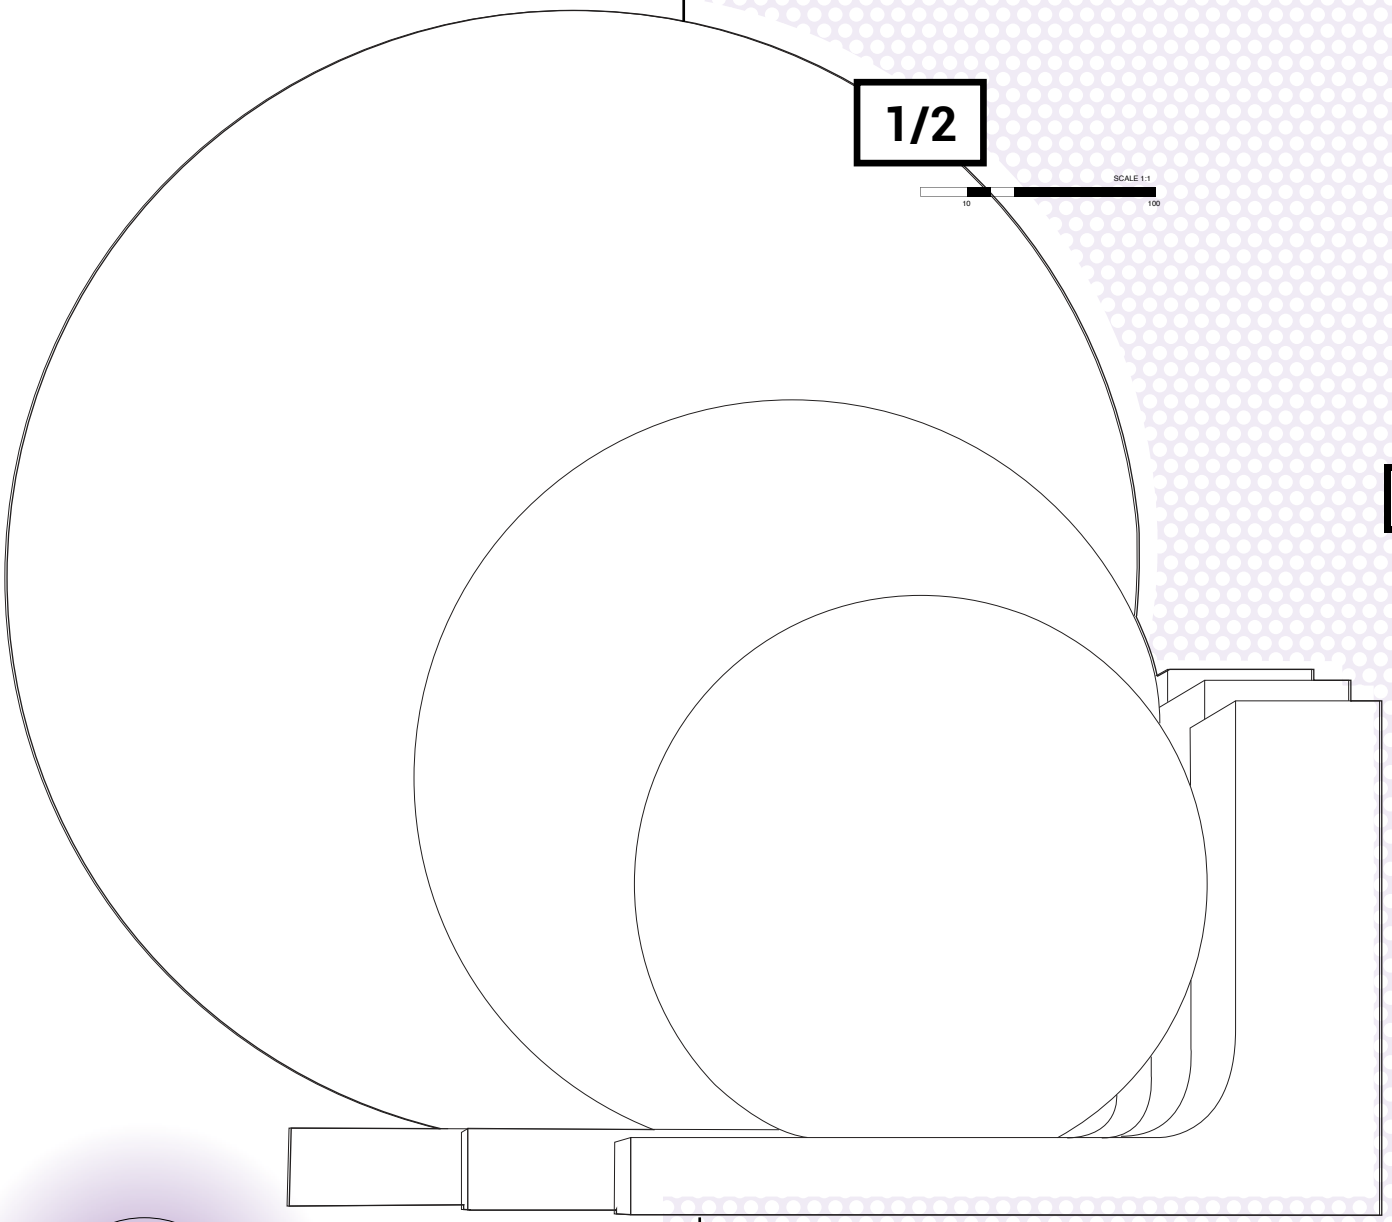

EXTERIOR WALL



OONO
W S


The shimmer of dusk with the fresh start of dawn


STIP

With Stip, you choose for either a round or square surface mounted wall luminaire for outdoor use. The round one can be used for general lighting, while the square version has an inhouse developed lens that throws the light to both sides, generating a line of light that is ideal to enlighten a pathway.

deltalight.com/stip

IP55






STIP W			R	S
3000K / CRI>90	LED 3.9W / 385lm / 350mA	IP55	**223 54 83** ◇	**223 55 83** ◇
			◇ A ● / N ●	
			100-240V / 50-60Hz INCL.GLASS	100-240V / 50-60Hz INCL.SYMMETRIC LENS


SKOV

Skov is perfect as a guidance light, both for in- and outdoors. The luminaire stands out in slenderness, with only 32mm of thickness for a surface mounted wall application with integrated power supply.
The combination of a recessed LED array with the specific design of Skov generates visibility along the path without being obtrusive for the passer-by. The light leaving the luminaire gently falls onto the veil of Skov, revealing a soft light effect to guide you wherever the path may take you.

deltalight.com/skov

IP54






SKOV			S	M
3000K CRI>90	LED 3,5W / 470lm / 250mA	IP54	**25314 9300** ◇	
	LED 9,6W / 1281lm / 500mA			**25312 9300** ◇
2700K CRI>90	LED 3,5W / 442lm / 250mA		**25314 9200** ◇	
	LED 9,6W / 1204lm / 500mA			**25312 9200** ◇
			◇ A ● / N ● / W ○	
			220-240V / 50-60Hz	220-240V / 50-60Hz

A GLIMPSE OF ME
ON PAGE 60


C

FIND ME ONLINE

1/4

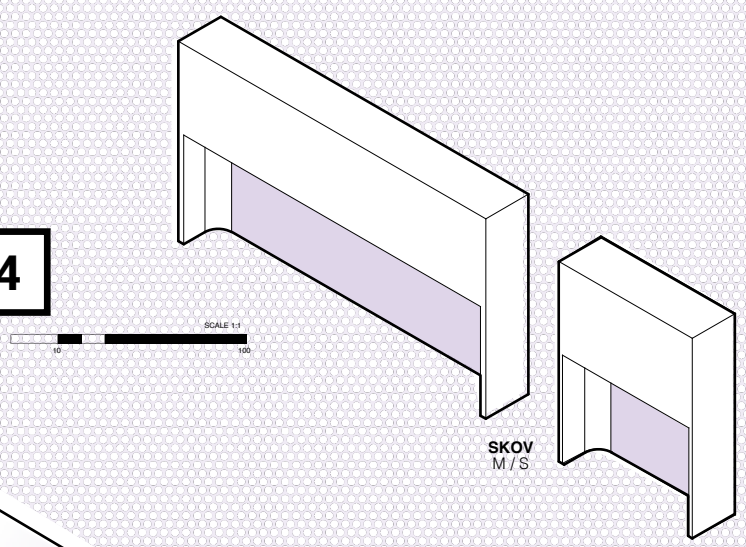

SKOV
M / S

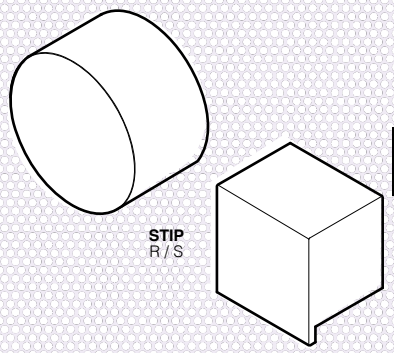

STIP
R / S

EXTERIOR WALL

Light as a guide



SKOV
M


SKOV
M


VISION OUT


Since its launch, Vision has already won multiple awards, thanks to its impressive and nicely delineated parabolic light pattern on the wall. This classic is available both for indoor and outdoor use. Vision thanks its powerful light effect to the combination of LED technology in combination with a lens, giving its unique design and playful light effect.

deltalight.com/vision

IP55

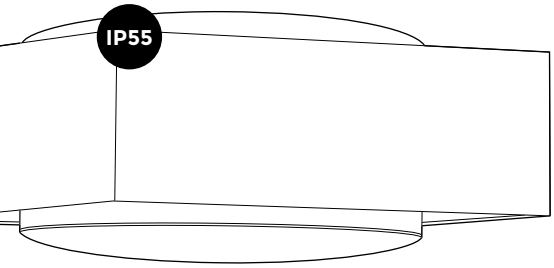





VISION			OUT LED	S OUT LED
3000K CRI>80	2 x LED 1.4W / 182lm / 500mA	IP55	**278 27 22** ◇	**278 26 22** ◇
			◇ A ● / N ●	
			120-240V / 50-60Hz	


A

TOPIX


This multi award-winning luminaire ensures a playful effect and offers a lot of freedom. On its own, Topix wows you with its peculiar yet attractive design, when put together, you can create artistic clusters of light. Topix comes for in- and outdoors, giving you the opportunity to make your façade stand out.

deltalight.com/topix

IP55



TOPIX			L X
3000K CRI>80	2 x LED 3,5W / 478lm / 350mA	IP55	**304 17 52** ◇
			◇ A ● / G ●
			120-240V / 50-60Hz

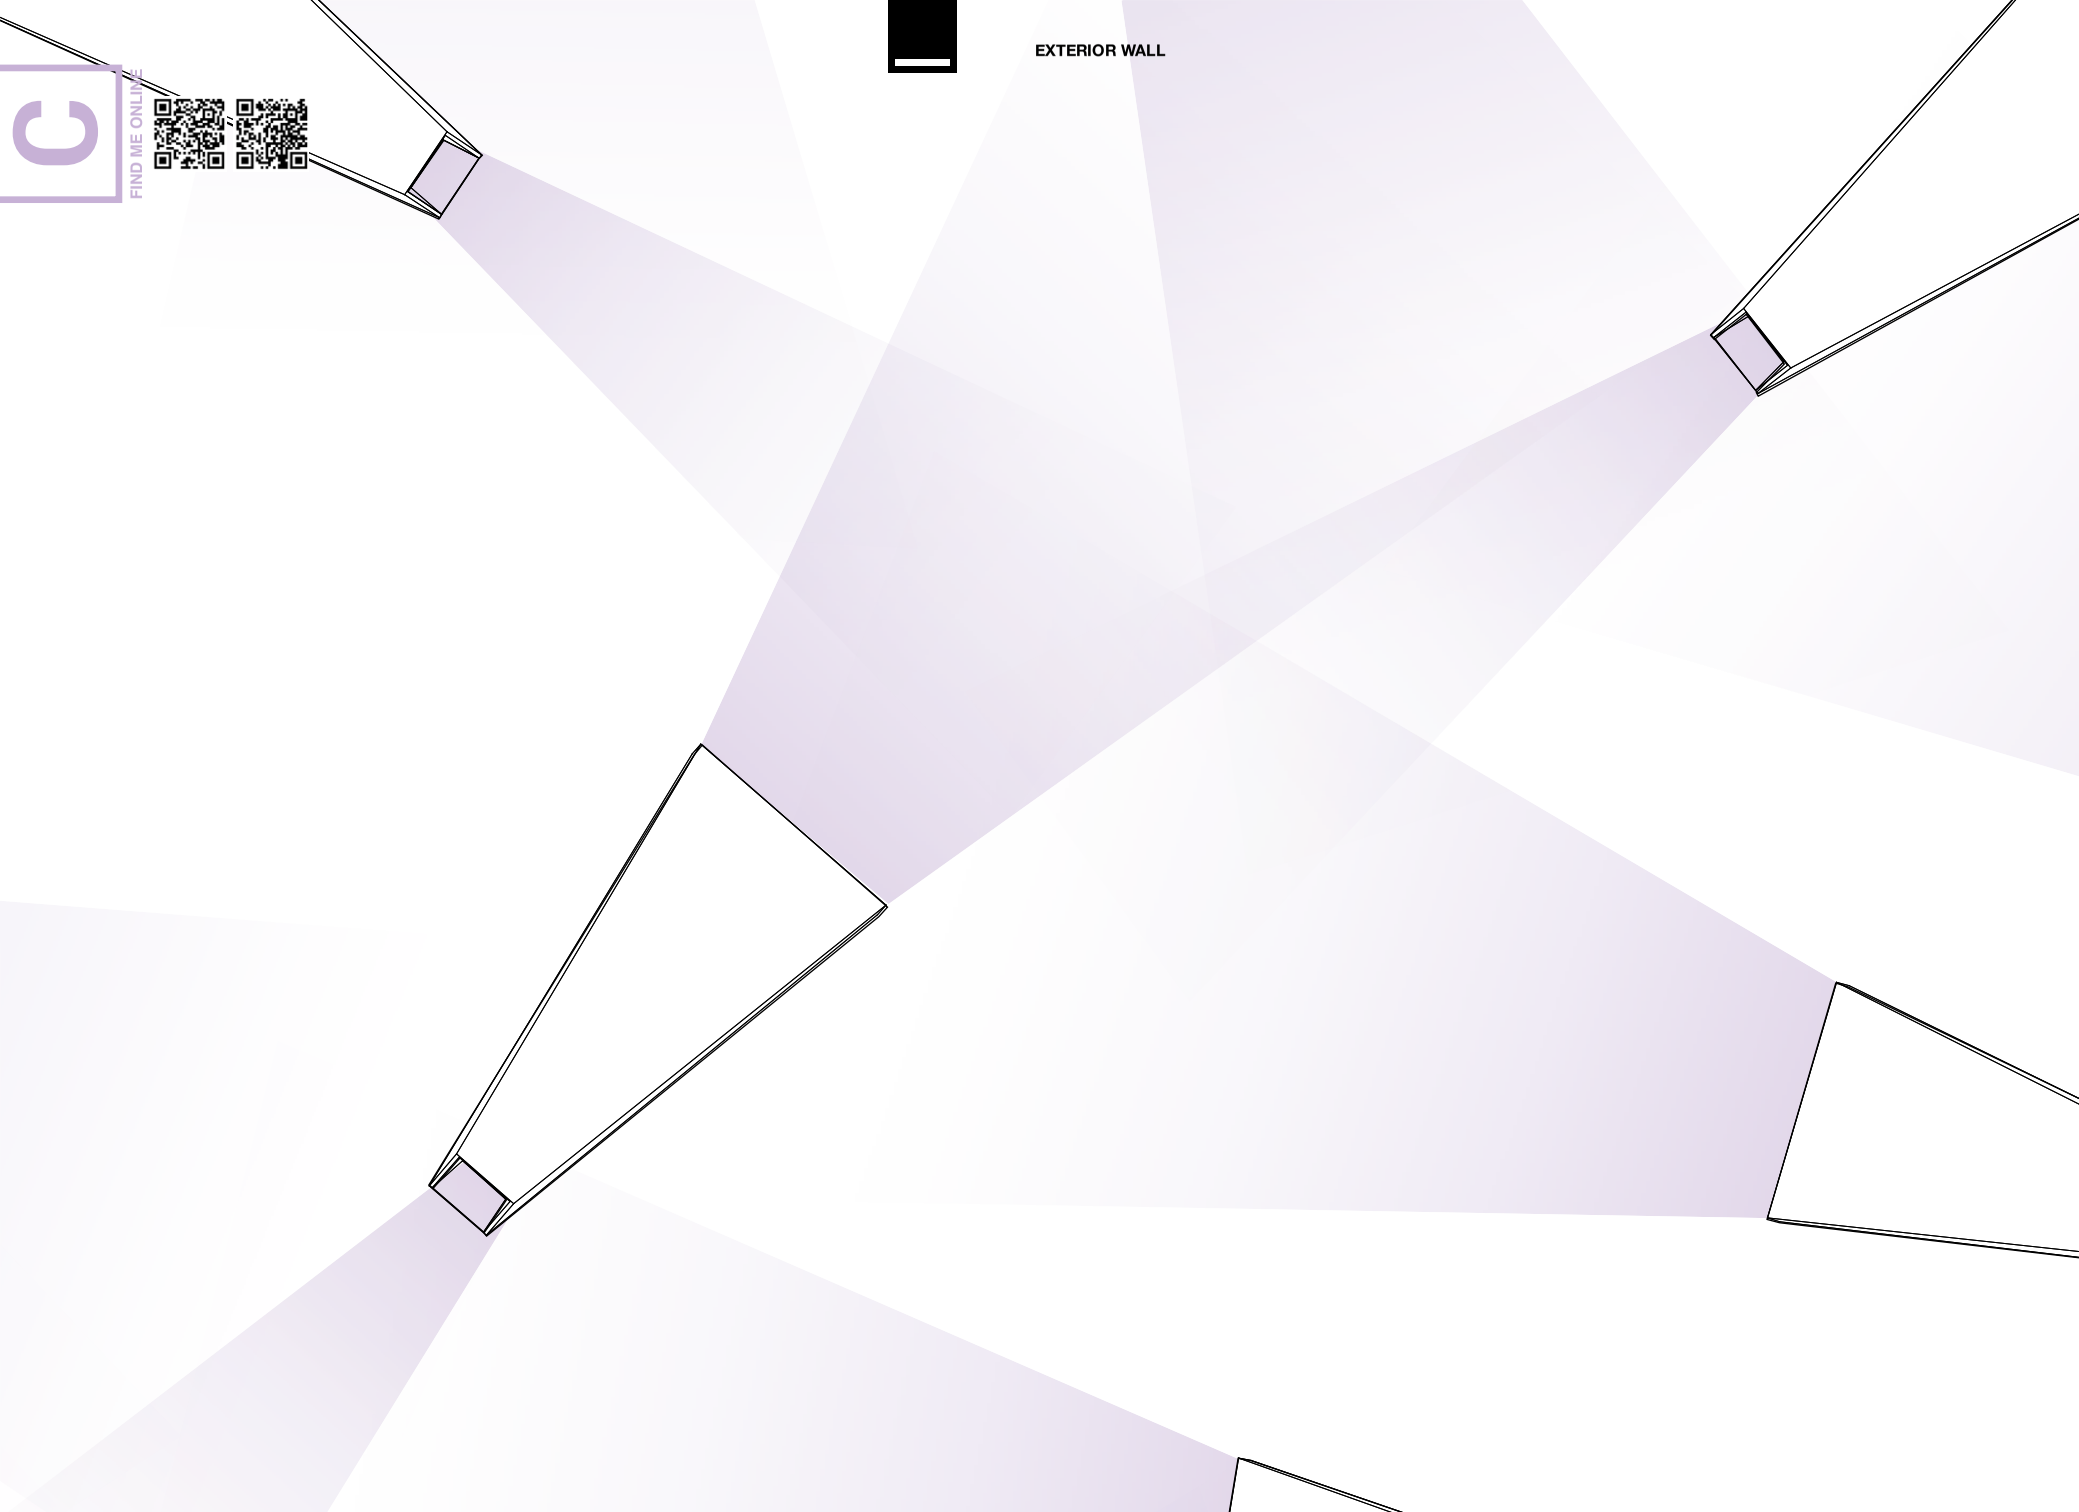

EXTERIOR WALL


TIGA

A medium sized rectangular lighting fixture, delivering a pleasant up and downward light effect on your wall. As a surface mounted wall unit, Tiga is perfect for both residential use or for hospitality usage in hotels and restaurants.
Standard, Tiga creates a wide beam effect for both down- and uplight, while Tiga BS allow you to play with a combination of a wide and small beam effect within 1 luminaire.
Despite its IP65 rating for outdoor use, this unit also feels very comfortable when used indoors.

deltalight.com/tiga

IP65





TIGA			IK06	LED BS	LED
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP65	MAINS	**223 752 811 932 ED8** ◇	**223 751 811 932 ED8** ◇
2700K CRI>90	LED 7.1W / 779lm / 350mA			**223 752 811 922 ED8** ◇	**223 751 811 922 ED8** ◇
				◇ A ● / G ● / W ○	
				220-240V / 50-60Hz	

I


A


MONO II

Mono is a well-known member of the Delta Light outdoor range. It was the first outdoor wall fixture within the range that combines a LED module with a lens, resulting in a far-reaching and strongly delineated lighting effect. The Mono's timeless and sharp contoured design adds a contemporary touch to any façade.

deltalight.com/mono

IP54







MONO II			LED	DOWN-UP LED
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP54	**223 13 811 930** ◇	
	2 x LED 7.1W / 812lm / 350mA			**223 53 812 930** ◇
			◇ A ● / N ●	
			220-240V / 50-60Hz	100-240V / 50-60Hz
			I	

1/1

SCALE 1:1
10 100

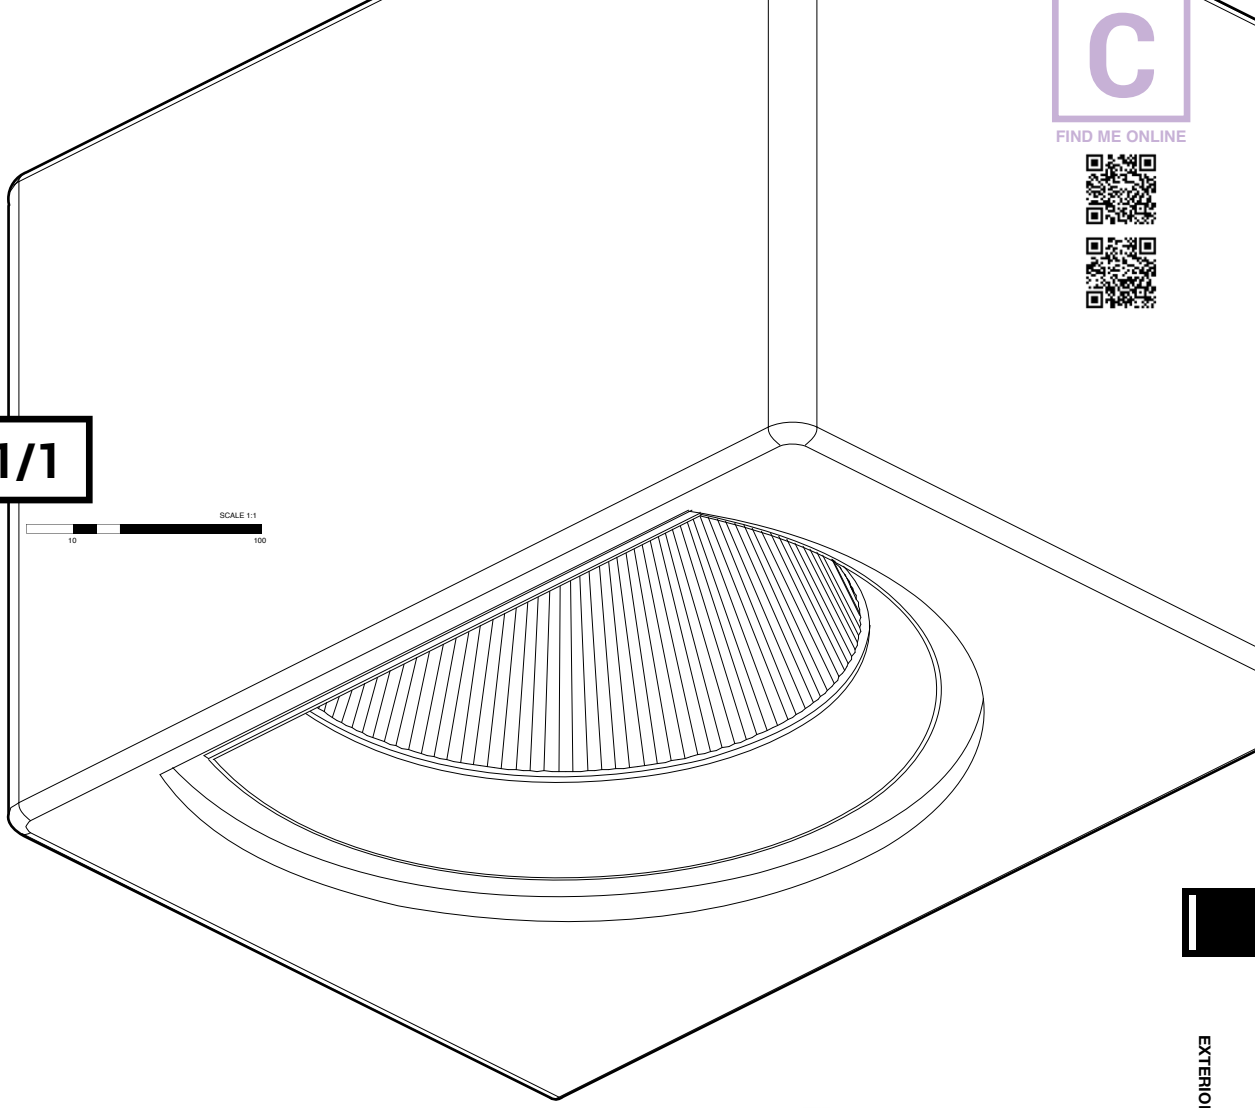

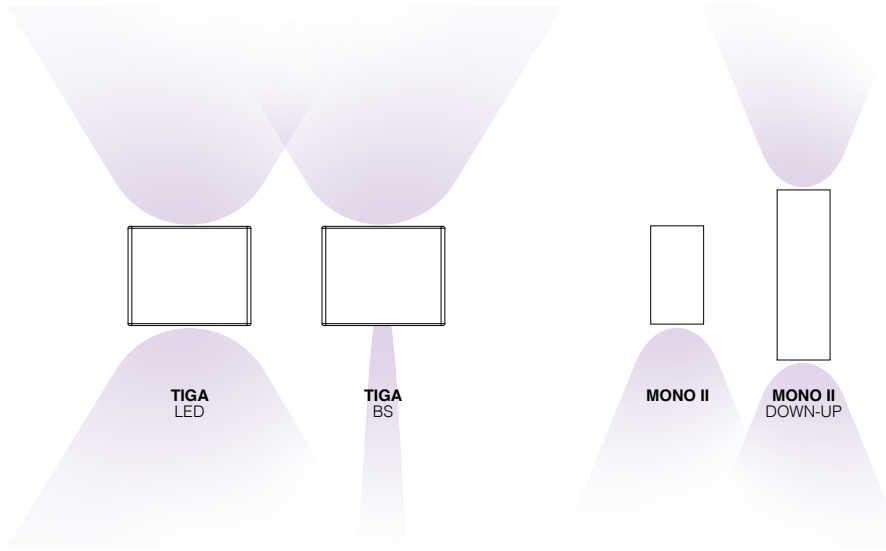


TIGA
LED

TIGA
BS

MONO II

MONO II
DOWN-UP



NOCTA

As a range of full IP65 wall fixtures, Nocta is the example that form and function can be merged into one. Build around 4 types of optics, Nocta is available in a cylindrical or cubical design, both with a down or down-up light emission. The cubical version also has a wider brother with double light beams, a way to add a more decorative touch onto the wall. All of them have some functional design elements in common that define Nocta.
At the front Nocta has a raised collar to improve the visual comfort for the passer-by, while a the back the collar has a moon-shaped cut-out to allow excess water to seep out. An additional plus to this cut-out is that the light directly hits the wall Nocta is mounted onto, resulting in the perfect light effect.
Although small in size, Nocta has some installation benefits hidden away inside also: space for an integrated DALI power supply, possibility to loop through for the down-up versions and an internal connector for time-saving installation.
And to make Nocta futureproof? All individual parts can easily be disassembled, allowing an update of the LEDboard when needed.


With its 4 different light effects, Nocta offers a variety of options to the designer. A spot version for powerful, slender streaks of light, a wide flood version for a single or double V-shaped light effect, a very wide flood with a distinctive delineated output on the wall and the double shaped beams of the wider Nocta for an additional playful touch.

deltalight.com/nocta


IP65

MOON SHAPED CUT-OUT

Allows excess water to seep out, and let's the light directly hit the wall for the perfect light effect.

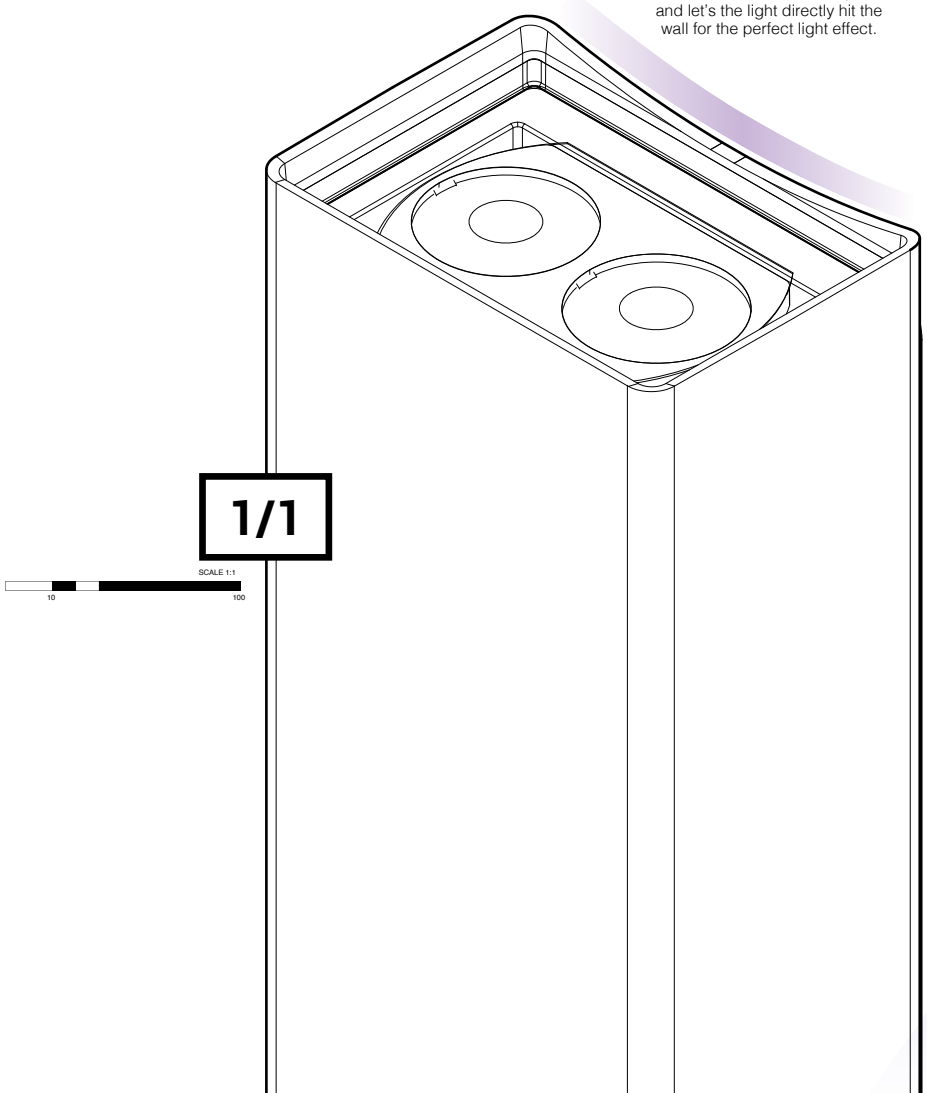

A VARIETY IN SHAPES AND OPTICS

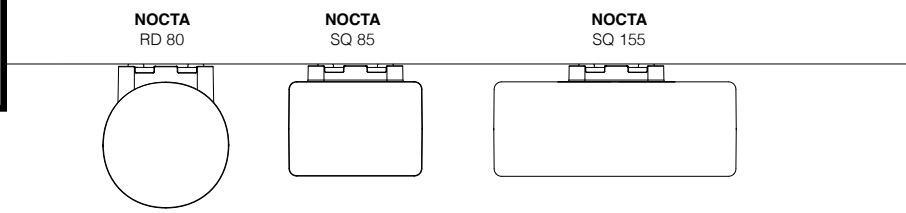

NOCTA
RD 80


NOCTA
SQ 85

NOCTA
SQ 155



SP
SPOT

SP
SPOT

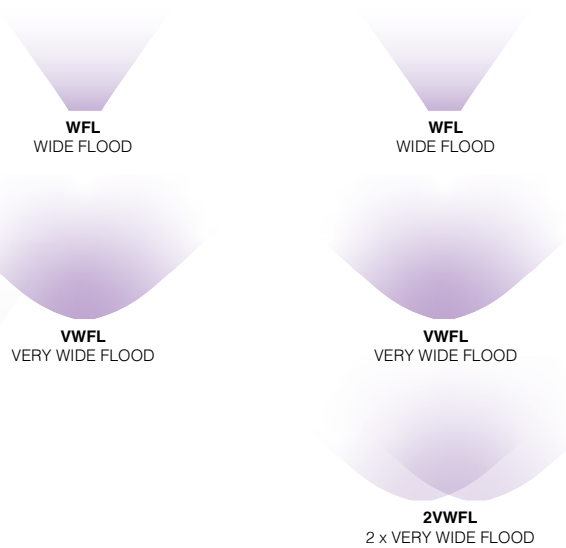

WFL
WIDE FLOOD

WFL
WIDE FLOOD

VWFL
VERY WIDE FLOOD


VWFL
VERY WIDE FLOOD


2VWFL
2 x VERY WIDE FLOOD



DOWN, UP or DOWN-UP

NOCTA





NEW

NOCTA SQ


IK06


			85		85 DOWN UP	
			NON DIM	DALI DIM	NON DIM	DALI DIM
3000K CRI>90	2 x LED [A] 2W / 232lm / 700mA	SP	**30118 9300** ◇			
		WFL	**30119 9300** ◇			
	LED [Q] 5.8W / 734lm / 350mA	VWFL	**30117 9300** ◇	**30117 9305** ◇		
	UP 2 x LED [A] 2W / 232lm / 700mA DOWN 2 x LED [A] 2W / 232lm / 700mA	SP			**30121 9300** ◇	**30121 9305** ◇
		WFL			**30122 9300** ◇	**30122 9305** ◇
	UP LED [Q] 5.8W / 734lm / 350mA DOWN LED [Q] 5.8W / 734lm / 350mA	VWFL			**30120 9300** ◇	**30120 9305** ◇
2700K CRI>90	2 x LED [A] 2W / 221lm / 700mA	SP	**30118 9200** ◇			
		WFL	**30119 9200** ◇			
	LED [Q] 5.8W / 702lm / 350mA	VWFL	**30117 9200** ◇	**30117 9205** ◇		
	UP 2 x LED [A] 2W / 221lm / 700mA DOWN 2 x LED [A] 2W / 221lm / 700mA	SP			**30121 9200** ◇	**30121 9205** ◇
		WFL			**30122 9200** ◇	**30122 9205** ◇
	UP LED [Q] 5.8W / 702lm / 350mA DOWN LED [Q] 5.8W / 702lm / 350mA	VWFL			**30120 9200** ◇	**30120 9205** ◇

◇ N ⬤

NON DIM: 100-240V / 50-60Hz
DALI DIM: 220-240V / 50-60Hz

IP65





NEW

NOCTA SQ

IK06

			155		155 DOWN UP	
			NON DIM	DALI DIM	NON DIM	DALI DIM
3000K CRI>90	4 x LED [A] 2W / 232lm / 700mA	SP	**30126 9300** ◇			
		WFL	**30127 9300** ◇			
	LED [Q] 5.8W / 734lm / 350mA	VWFL	**30123 9300** ◇	**30123 9305** ◇ *		
	2 x LED [A] 2W / 232lm / 700mA	2VWFL	**30124 9300** ◇			
	UP 4 x LED [A] 2W / 232lm / 700mA DOWN 4 x LED [A] 2W / 232lm / 700mA	SP			**30131 9300** ◇ *	**30131 9305** ◇ *
		WFL			**30132 9300** ◇ *	**30132 9305** ◇ *
	UP LED [Q] 5.8W / 734lm / 350mA DOWN LED [Q] 5.8W / 734lm / 350mA	VWFL			**30128 9300** ◇	**30128 9305** ◇ *
	UP 2 x LED [A] 2W / 232lm / 700mA DOWN 2 x LED [A] 2W / 232lm / 700mA	2VWFL			**30129 9300** ◇	**30129 9305** ◇ *
2700K CRI>90	4 x LED [A] 2W / 221lm / 700mA	SP	**30126 9200** ◇			
		WFL	**30127 9200** ◇			
	LED [Q] 5.8W / 702lm / 350mA	VWFL	**30123 9200** ◇	**30123 9205** ◇ *		
	2 x LED [A] 2W / 221lm / 700mA	2VWFL	**30124 9200** ◇			
	UP 4 x LED [A] 2W / 221lm / 700mA DOWN 4 x LED [A] 2W / 221lm / 700mA	SP			**30131 9200** ◇ *	**30131 9205** ◇ *
		WFL			**30132 9200** ◇ *	**30132 9205** ◇ *
	UP LED [Q] 5.8W / 702lm / 350mA DOWN LED [Q] 5.8W / 702lm / 350mA	VWFL			**30128 9200** ◇	**30128 9205** ◇ *
	UP 2 x LED [A] 2W / 221lm / 700mA DOWN 2 x LED [A] 2W / 221lm / 700mA	2VWFL			**30129 9200** ◇	**30129 9205** ◇ *

◇ N ⬤

100-240V / 50-60Hz
* 220-240V / 50-60Hz

IP65



SP
SPOT


WFL
WIDE FLOOD




VWFL
VERY WIDE FLOOD



2VWFL
2 x VERY WIDE FLOOD





NEW

NOCTA RD

IK06

			80		80 DOWN UP	
			NON DIM	DALI DIM	NON DIM	DALI DIM
3000K CRI>90	2 x LED [A] 2W / 232lm / 700mA	SP	**30112 9300** ◇			
		WFL	**30113 9300** ◇			
	LED [Q] 5.8W / 734lm / 350mA	VWFL	**30111 9300** ◇	**30111 9305** ◇		
	UP 2 x LED [A] 2W / 232lm / 700mA DOWN 2 x LED [A] 2W / 232lm / 700mA	SP			**30115 9300** ◇	**30115 9305** ◇
		WFL			**30116 9300** ◇	**30116 9305** ◇
	UP LED [Q] 5.8W / 734lm / 350mA DOWN LED [Q] 5.8W / 734lm / 350mA	VWFL			**30114 9300** ◇	**30114 9305** ◇
2700K CRI>90	2 x LED [A] 2W / 221lm / 700mA	SP	**30112 9200** ◇			
		WFL	**30113 9200** ◇			
	LED [Q] 5.8W / 702lm / 350mA	VWFL	**30111 9200** ◇	**30111 9205** ◇		
	UP 2 x LED [A] 2W / 221lm / 700mA DOWN 2 x LED [A] 2W / 221lm / 700mA	SP			**30115 9200** ◇	**30115 9205** ◇
		WFL			**30116 9200** ◇	**30116 9205** ◇
	UP LED [Q] 5.8W / 702lm / 350mA DOWN LED [Q] 5.8W / 702lm / 350mA	VWFL			**30114 9200** ◇	**30114 9205** ◇

◇ N ●

NON DIM: 100-240V / 50-60Hz
DALI DIM: 220-240V / 50-60Hz


IP65

WALKER

Walker II splits the light open. Starting from 1 light source, Walker II is designed to guide the light into two directions to provide a double light effect on the surface below.
The light falls on the V-shaped inner part of the luminaire, breaking it open and throwing it to the front- and backside of the luminaire.
Walker II can serve as a guiding light on your wall or pathway, as it comes as a wall luminaire and as a bollard.
Different heights and multiple colour combinations
can be combined to your preference to create the perfect setting.

deltalight.com/walker

IP54



WALKER II			W	
3000K CRI>90	LED 5,7W / 791lm / 350mA	IP54	**22618 9300** ◇	**22619 9300** ◇
2700K CRI>90	LED 5,8W / 742lm / 350mA		**22618 9200** ◇	**22619 9200** ◇
			◇ A / N	◇ A -N / N-GC
			100-240V / 50-60Hz	

A


BACKSPACE

In many ways, Backspace II is a joy for the eye, be it by its slender design, by its pleasant light effect or by its playful colour combinations. Backspace II is designed to create a 2-way light effect on the wall, the choice to install it in a horizontal or vertical way is up to you. By mounting the light source in the front part of the luminaire, it is perfectly shielded from looking directly into the source.


Backspace II can be used for interior lighting in a white, grey or dark grey finish or for outdoor settings in grey or dark grey.

deltalight.com/backspace


IP54



BACKSPACE II			X
3000K / CRI>90	LED 9,6W / 1281lm / 500mA	IP54	**10214 9300** ◇
2700K / CRI>90	LED 9,7W / 1204lm / 500mA		**10214 9200** ◇
			◇ A / N
			220-240V / 50-60Hz

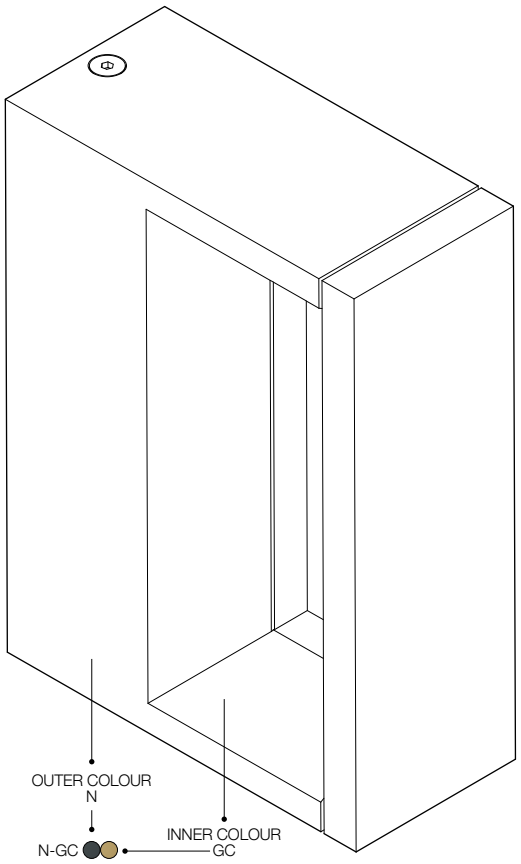


READ MY COLOUR

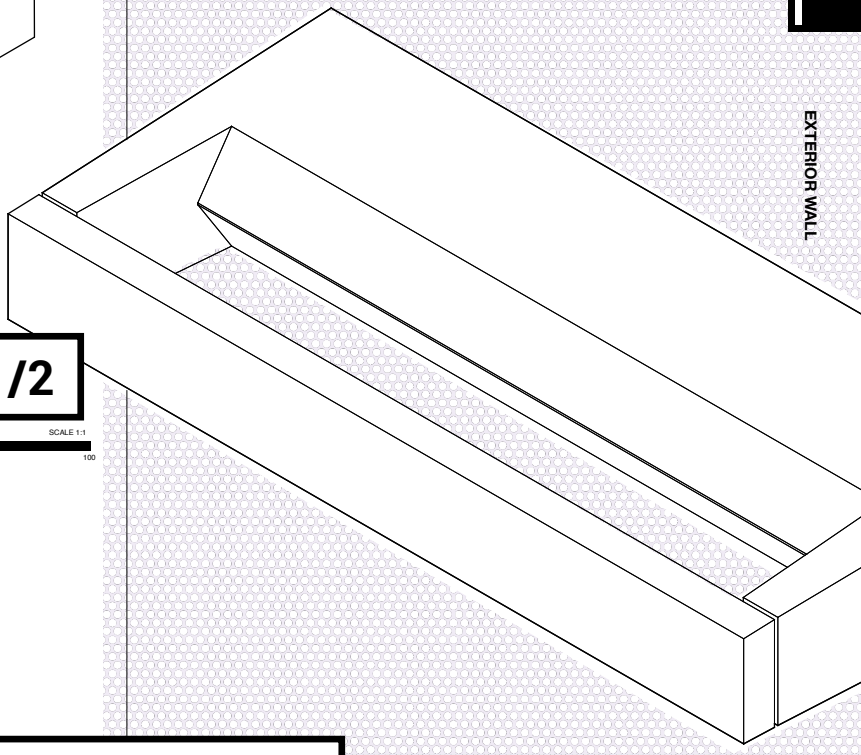

1/2

SCALE 1:1
10 100

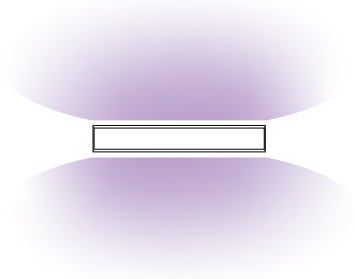

Split the light

MONTUR


With Montur we offer a highly original interpretation of an archetypical concept: a light source that is contained within the framing of a 3D square or rectangular shape. The Montur is available in indoor and outdoor versions, as a ground, wall or ceiling fixture, with LED clusters or filament-LED lamps with a rustic look.
The series integrates beautifully in both country-classic and contemporary homes, and is suitable for hotels and public buildings as well.


deltalight.com/montur


IP54 IP65

A highly original interpretation of an archetypical concept










MONTUR		IK07	MINI M	S LED	M LED	M E27
3000K / CRI>90	LED 4,2W / 617lm / 350mA	IP65	**232 012 83** ◇			
	LED 6,3W / 925lm / 350mA			**232 112 83** ◇	**232 212 83** ◇	
2700K / CRI>90	LED 4,2W / 584lm / 350mA		**232 012 82** ◇			
	LED 6,3W / 877lm / 350mA			**232 112 82** ◇	**232 212 82** ◇	
	A60 max.40W					**232 213 00** ◇
				◇ B ●		◇ B ●
				100-240V / 50-60Hz		E27Ls / 100-240V / 50-60Hz
				INCL.GLASS OPAL		INCL.GLASS CLEAR
				⟨I⟩		⟨I⟩




MONTUR		IK08	L PC LED
3000K / CRI>90	LED 14,7W / 2159lm / 700mA	IP54	**232 318 83** ◇
			◇ B ●
			220-240V / 0 | 50-60Hz
			INCL.PC OPAL
			⟨I⟩


A GLIMPSE OF ME
ON PAGE 58


C

FIND ME ONLINE

Milky, cone shaped core, with a transparent glass surface

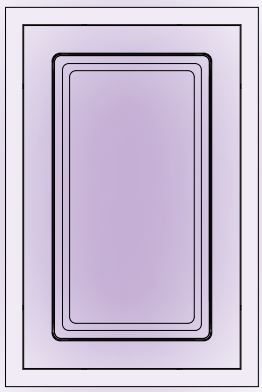


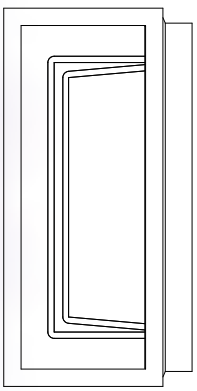

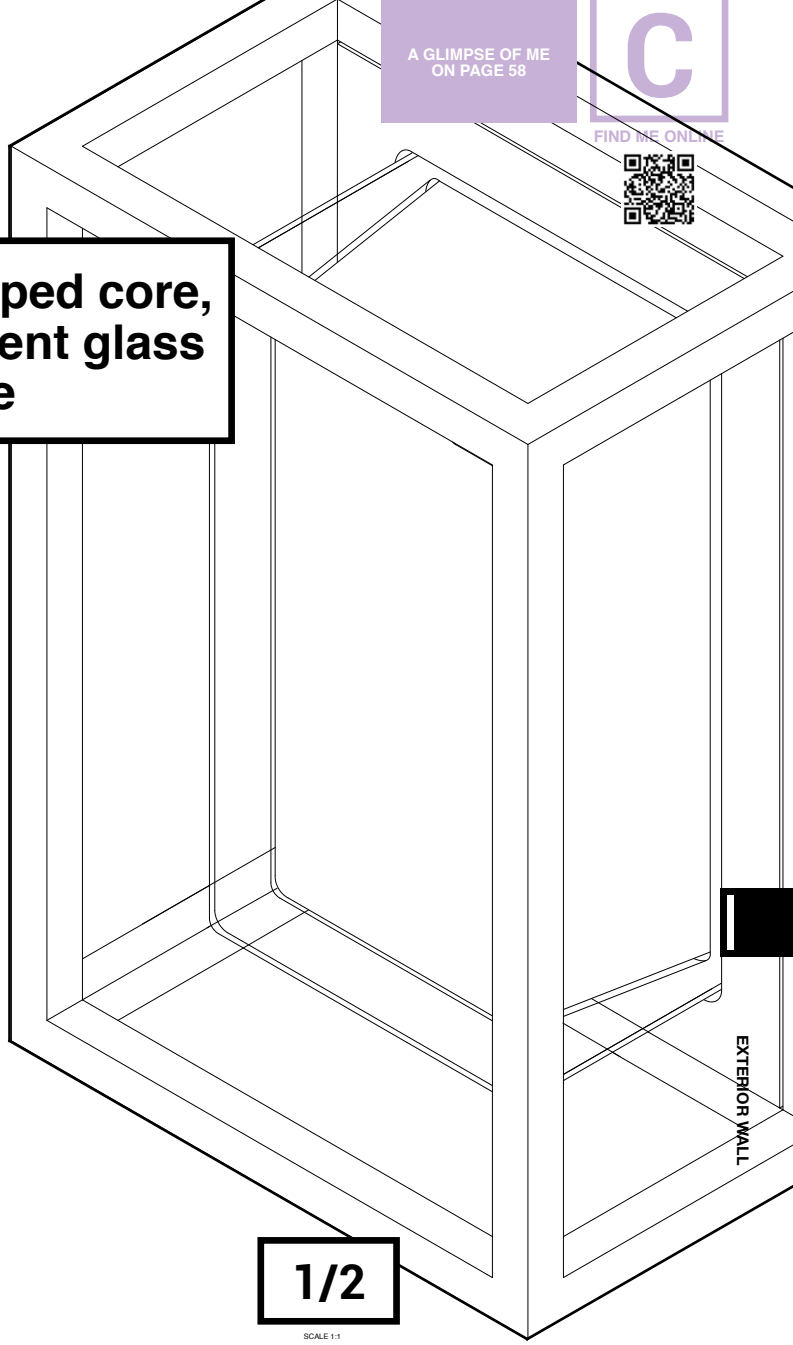


1/2

SCALE 1:1
10 100



MONTUR
LED



MONTUR
E27

MONTUR
BOLLARDS

B

FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY	MONTUR					
	MINI M	S LED	M LED	M E27	L PC LED	SQL LED
LED LAMP MORE INFO TECHNICAL CHAPTERR				O		


SPY 39 W

Spy 39 W translates elegance and finesse into an outdoor wall light. Composed as a slender cylinder, Spy 39 W is available as a minimalistic down- or down-up luminaire. Despite its refined design, Spy 39 W succeeds in adding body to your exterior with its prolonged tubes and distinctive light effect.

deltalight.com/spy

IP55





A


SPY 39				W	W DOWN-UP
3000K CRI>90	LED 3.9W / 385lm / 350mA	IP55	13°	**24148 9310** ◇	
	2 x LED 3.9W / 385lm / 350mA				**24147 9310** ◇
2700K CRI>90	LED 3.9W / 385lm / 350mA			**24148 9210** ◇	
	2 x LED 3.9W / 385lm / 350mA				**24147 9210** ◇
				◇ B ●	
				220-240V / 50-60Hz	


ULTRA

The looks of Ultra are very straightforward: its small mounting bracket is perfectly hidden away behind the compact tubular shape of the luminaire. Mounted on the wall, it creates a comfortable down or down-up effect onto the façade.


deltalight.com/ultra

IP55





ULTRA X				LED	DOWN-UP LED
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP55	NON DIM	**279 61 811 930** ◇	
	2x LED 7.1W / 812lm / 350mA		MAINS		**279 61 812 930** ◇
				◇ A ● / N ● / W ○	
				100-240V / 50-60Hz	220-240V / 50-60Hz

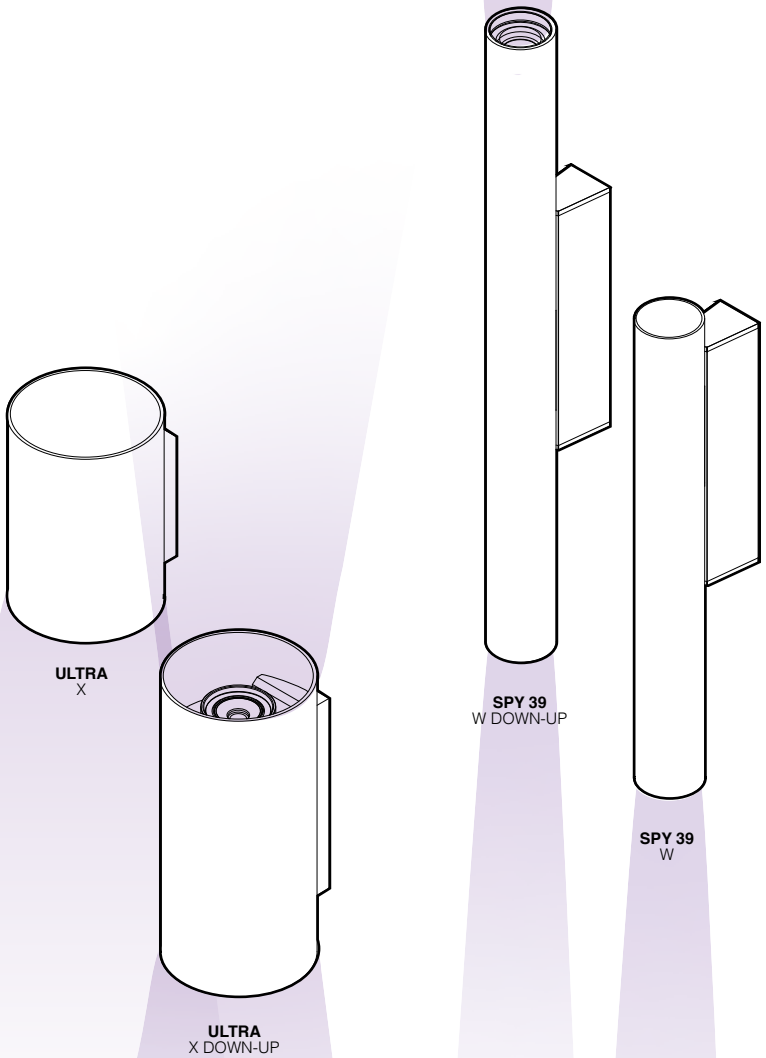

ULTRA
X

ULTRA
X DOWN-UP

SPY 39
W DOWN-UP

SPY 39
W

1/4

SCALE 1:1
10 100


KIX

Flexible, subtle, elegant and powerful: these are the keywords that describe the Kix perfectly. Despite its low-profile appearance, Kix excels in light output and quality, ideal for walkway lighting or other landscape applications. Kix is easy and flexible to use thanks to the adjustable head, designed to provide optimal cooling and eliminate glare.
Kix is available for installation on wall or floor, to strap around a tree or to mount in soft green areas with a pin. In addition to the more robust version of Kix, there is also a S(mall) and M(edium) version available. Kix S combines a powerled with a lens, resulting in a nice 10° light beam. All models have an IP65 rating and are available in alu grey or dark grey.


deltalight.com/kix

IP65


CURRENT CONTROLLED VS 24V-DC




0-180°350°



90°



IK07 90°




IK07 90°

KIX				S	M	II	II HP
3000K / CRI>80	LED [A] 1W / 132lm / 350mA LED [A] 1.4W / 182lm / 500mA LED [A] 2W / 245lm / 700mA	IP65	10°	**232 08 831** ◇			
	LED 2W / 245lm / 24V-DC (PWM)			**13528 8310** ◇			
3000K / CRI>90	LED 6.4W / 587lm / 350mA		30°		**232 12 933** ◇		
	LED 7.1W / 812lm / 350mA		11°			**13534 9310** ◇	
			30°			**13534 9320** ◇	
			55°			**13534 9330** ◇	
			120°			**13533 9300** ◇	
	LED [J] 16.3W / 2309lm / 500mA		11°				**13532 9310** ◇
			30°				**13532 9320** ◇
			55°				**13532 9330** ◇
				◇ N ●	◇ A ○ / N ●	◇ A ○ / N ●	◇ A ○ / N ●
				INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m	100-240V / 50-60Hz INCL.1 x KAP STRIPER B (REMOVABLE)	100-240V / 50-60Hz	


On sturdy surfaces, in between the green, strapped aroud a tree

C


FIND ME ONLINE

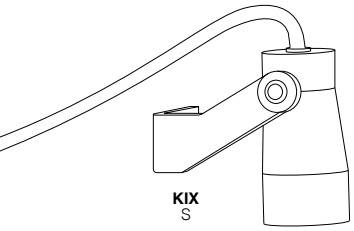


KIX
S



KIX
M

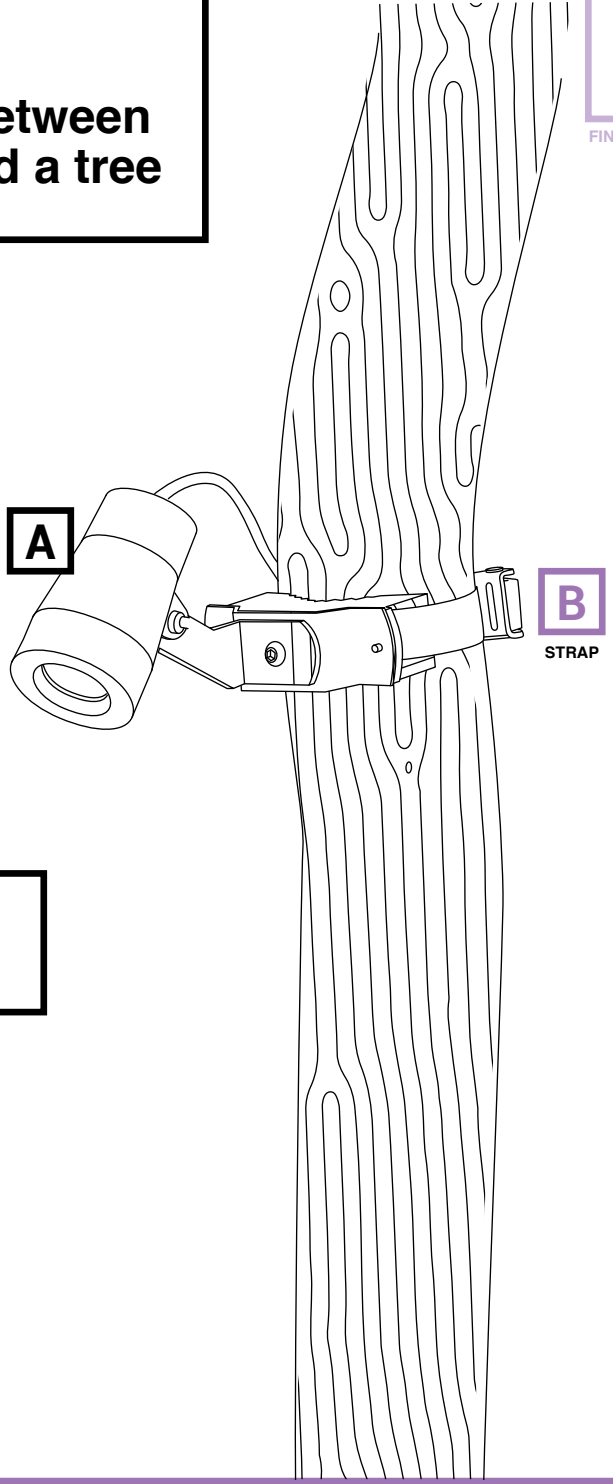

VISUAL COMFORT

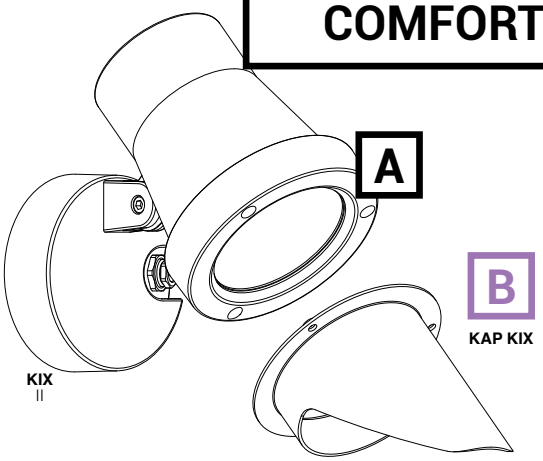

KIX
II

EXTERIOR WALL

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY				
			KIX				
			S		M	II	II HP
			mA	24V-DC			
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
1-10V DIM - 60W (PWM)	**21012 0101**	150 x 53 x 35		R *			
DALI DIM - 60W (PWM)	**21012 0135**	150 x 53 x 35		R *			
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT							
1-10V DIM 16	**300 90 63**	min. 84	R *				R *
DALI DIM 16	**300 90 63**	min. 84	R *				R *
HONEYCOMB / LENS / GLASS							
HONEYCOMB (only + KAP KIX)	**232 10 03 N**					A	A
KAP KIX	**232 10 00 N**					A	A
INSTALLATION							
STRAP	**232 20 99**	Max. Ø200mm	O	O			
PIN 16	**229 01 16**	Floor mounting	O	O			

* REMOTE INSTALLATION

B

SOIREE

The Soiree range was designed to be voluminous, lightweight and transparent. Its sophisticated form creates a dense and decorative effect, filled with a warm light.

The interaction between the pure circular and rectangular forms, with the warm light sources and the symmetric configurations, triggers a dynamic tension. The Soiree takes its inspiration from many angles. From the play of light and shadow in architecture, to natural light effects, the shape of everyday objects and sculptural art.
The result is a nest of light, made of circles or rectangles, both structural and decorative, generating a seductive luminous effect.


deltalight.com/soiree


IP54

I


A











SOIREE			WR X	WS X	WS X DOWN-UP
3000K CRI>90	LED 3.2W / 309lm / 350mA	IP54	**24019 9300** ◇	**24018 9300** ◇	
	2 x LED 3.2W / 309lm / 350mA				**24020 9300** ◇
2700K CRI>90	LED 3.2W / 297lm / 350mA		**24019 9200** ◇	**24018 9200** ◇	
	2 x LED 3.2W / 297lm / 350mA				**24020 9200** ◇
			◇ B ●		
			100-240V / 50-60Hz		
			□		




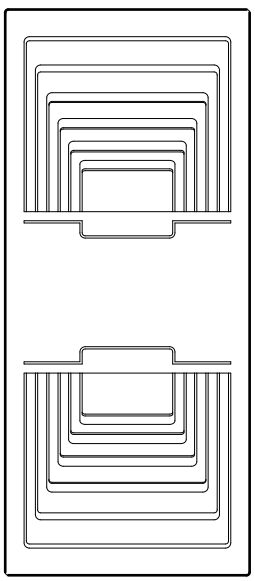

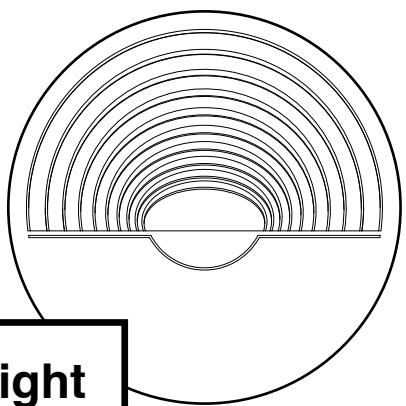



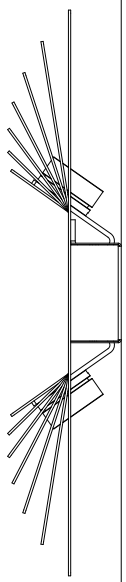

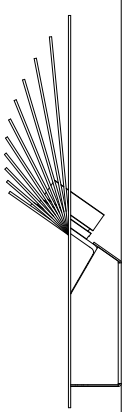


A nest of light

INDEX

Exterior Floor Recessed


Hi!
We are new to the range.
LOGIC P 500

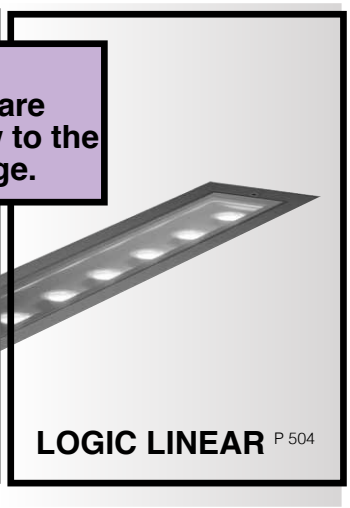
LOGIC LINEAR P 504


LEDS C / GO P 510

INDEX

Exterior Floor Surface


KIX P 512


New members to the family!
FRAX P 514


OONO P 518


SPIX P 520


OUTLINER P 522


STIEVIE P 522


MONTUR P 524

C

Want the full Delta Light experience? Have a look on our website and plunge in inspiration, application and product details.

I'm not alone. You can find me & my family members in other chapters within this Lighting Bible.



ELBO P 526



WALKER P 526



OBLIX P 528



STRIPER P 530



MONOPOL P 530




BAZIL P 532




POLESANO P 534

LOGIC


FAMILY

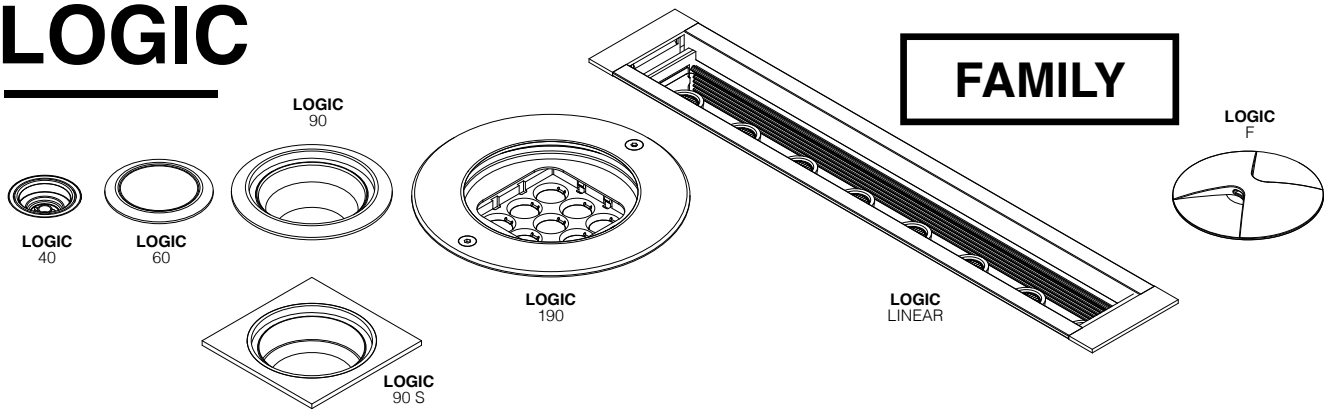

LOGIC 190 R OK




Closed from below.
Only 2 visible screws on top.




10mm thick glass

IK10


LED CASET® TECHNOLOGY



Logic 190 R is based on Delta Light's LED Caset® technology, which combines multiple LEDs with individual collimator lenses per LED to generate a clean-cut light distribution. The individual lenses create a multi-layered light distribution to generate a clean 8° or 14° beam angle. Other beam angles or other light effects are being obtained by adding microlenses in front, sculpting the light into a 26° or 47° beam angle or into a linear or wallwash effect.



Integrated (DALI) Power Supply

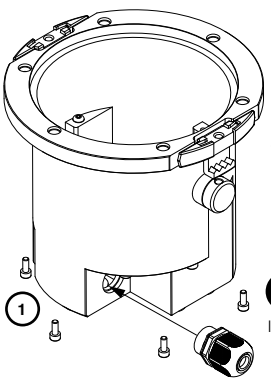

0-25° 360°

Fully adjustable
on-side without
opening the fixture.

IP67

Integrated moisture lock + IP68 Connector

Thanks to its multiple reflector options, Logic can be used to accentuate trees or sculptures, to light up facades or large garden features, to create a sense of depth or indicate the right direction along paths and driveways. The choice of installation – trimless or with trim – and its round or square shape allow you to match look & feel with the design of the building. Within the same family, Logic W can be used as guidance light, built into the wall.

With Logic 190 R and Logic Linear, we extend on the existing floor recessed range of Logic luminaires.
Widening the range expands the possible use from residential to more commercial applications. Logic 190 R and the linear Logic are fully adapted to these applications.


deltalight.com/logic

IP67

A GLIMPSE OF ME
ON PAGE 78

C


FIND ME ONLINE

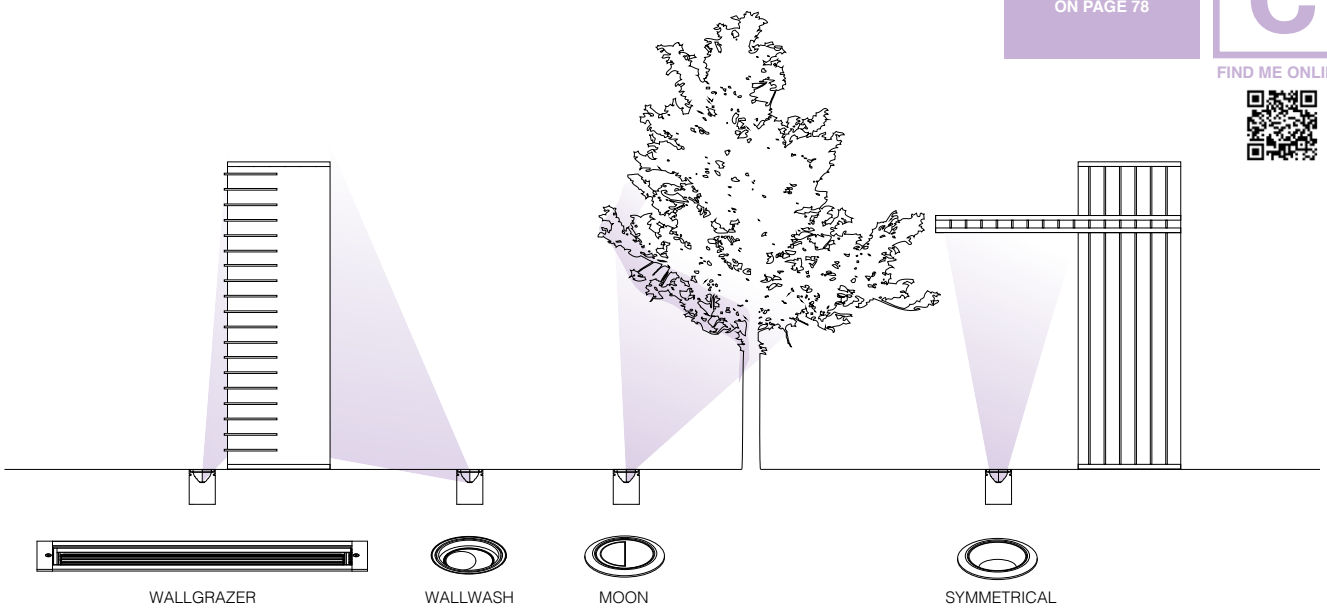


	LOGIC						
	40	**60**	**90**	**190**		**LINEAR**	**F1 / F2**
	REFLECTOR	REFLECTOR	REFLECTOR	LENS	REFLECTOR	LENS	
LIGHT SOURCE							
LED	3,9W - 385lm	2W - 229lm 3,2W - 319lm 4W - 335lm	7,1W - 812lm	11,9W - 1406lm 12,6W - 1530lm	13W - 1855lm 14,7W - 2076lm	14,4W - 1726lm 28,8W - 3452lm	0,6W - 40lm
OPTICS							
6°		•					
8°				•			
11°			•				
14°				•			
15°	•					•	
18°					•		
20°		•					
25°						•	
26°				•			
30°			•				
32°					•		
40°						•	
45°					•		
47°				•			
55°			•				
LINEAR SPREAD					•		
MOON	•	•					
WALLWASH		•	•	•			
WALLGRAZER (60° x 10°)						•	
COLOUR TEMPERATURE							
2700K				•	•	•	
3000K	•	•	•	•	•	•	•
4000K				•	•	•	
CONTROL							
EXCL. POWER SUPPLY	•	•	◦				•
NON DIM			◦	•	•	•	
MAINS DIM							
1-10V DIM							
DALI DIM				•	•	•	
WIRELESS DIM							
COLOUR							
ALU GREY							•
ANODIZED	•	•	•				
BLACK		◦	◦				
DARK GREY						•	
INOX	•			•	•	•	
SHAPE							
ROUND	•	•	•	•	•		•
SQUARE			•				
LINEAR						•	
ACCESSORIES							
HONEYCOMB				•	•	•	
VISOR	◦						
ANTI-GLARE SHIELD						◦	

• STANDARD
◦ NOT FOR ALL VERSIONS

LOGIC 190 R



LOGIC
190 R



NEW

LOGIC 190

IK10


				R				R SP	
				NO ACCESSORY	HONEYCOMB	LINEAR	WALLWASH	NO ACCESSORY	HONEYCOMB
4000K CRI>90	LED 11,9W / 1537lm / 600mA	NON DIM	8°					**30221 9410** ◇	**30222 9410** ◇
	LED 12,6W / 1683lm / 500mA		14°	**30211 9410** ◇	**30212 9410** ◇	**30213 9400** ◇	**30215 9400** ◇		
			26°	**30211 9420** ◇	**30212 9420** ◇	-	-		
			47°	**30211 9430** ◇	**30212 9430** ◇	-	-		
3000K CRI>90	LED 11,9W / 1406lm / 600mA		8°					**30221 9310** ◇	**30222 9310** ◇
	LED 12,6W / 1530lm / 500mA		14°	**30211 9310** ◇	**30212 9310** ◇	**30213 9300** ◇	**30215 9300** ◇		
			26°	**30211 9320** ◇	**30212 9320** ◇	-	-		
			47°	**30211 9330** ◇	**30212 9330** ◇	-	-		
2700K CRI>90	LED 11,9W / 1344lm / 600mA		8°					**30221 9210** ◇	**30222 9210** ◇
	LED 12,6W / 1467lm / 500mA		14°	**30211 9210** ◇	**30212 9210** ◇	**30213 9200** ◇	**30215 9200** ◇		
			26°	**30211 9220** ◇	**30212 9220** ◇	-	-		
			47°	**30211 9230** ◇	**30212 9230** ◇	-	-		
4000K CRI>90	LED 11,9W / 1537lm / 600mA	DALI	8°					**30221 9415** ◇	**30222 9415** ◇
	LED 12,6W / 1683lm / 500mA		14°	**30211 9415** ◇	**30212 9415** ◇	**30213 9405** ◇	**30215 9405** ◇		
			26°	**30211 9425** ◇	**30212 9425** ◇	-	-		
			47°	**30211 9435** ◇	**30212 9435** ◇	-	-		
3000K CRI>90	LED 11,9W / 1406lm / 600mA		8°					**30221 9315** ◇	**30222 9315** ◇
	LED 12,6W / 1530lm / 500mA		14°	**30211 9315** ◇	**30212 9315** ◇	**30213 9305** ◇	**30215 9305** ◇		
			26°	**30211 9325** ◇	**30212 9325** ◇	-	-		
			47°	**30211 9335** ◇	**30212 9335** ◇	-	-		
2700K CRI>90	LED 11,9W / 1344lm / 600mA		8°					**30221 9215** ◇	**30222 9215** ◇
	LED 12,6W / 1467lm / 500mA		14°	**30211 9215** ◇	**30212 9215** ◇	**30213 9205** ◇	**30215 9205** ◇		
			26°	**30211 9225** ◇	**30212 9225** ◇	-	-		
			47°	**30211 9235** ◇	**30212 9235** ◇	-	-		

◇ INOX

NON DIM: 220-240V / 50-60Hz
DALI DIM: 110-240V / 50-60Hz

NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR
DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR
IEC 60598 2-13 : Max 500Kg - ESG 10mm

IP67



NEW

LOGIC 190

IK10


				R OK					R OK SP	
				NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB
4000K CRI>90	LED 11,9W / 1537lm / 600mA	NON DIM	8°						**30223 9410** ◇	**30224 9410** ◇
	LED 12,6W / 1683lm / 500mA		14°	**30216 9410** ◇	**30217 9410** ◇	**30218 9400** ◇	**30219 9400** ◇	**30220 9400** ◇		
			26°	**30216 9420** ◇	**30217 9420** ◇	-	-			
			47°	**30216 9430** ◇	**30217 9430** ◇	-	-			
3000K CRI>90	LED 11,9W / 1406lm / 600mA		8°						**30223 9310** ◇	**30224 9310** ◇
	LED 12,6W / 1530lm / 500mA		14°	**30216 9310** ◇	**30217 9310** ◇	**30218 9300** ◇	**30219 9300** ◇	**30220 9300** ◇		
			26°	**30216 9320** ◇	**30217 9320** ◇	-	-			
			47°	**30216 9330** ◇	**30217 9330** ◇	-	-			
2700K CRI>90	LED 11,9W / 1344lm / 600mA		8°						**30223 9210** ◇	**30224 9210** ◇
	LED 12,6W / 1467lm / 500mA		14°	**30216 9210** ◇	**30217 9210** ◇	**30218 9200** ◇	**30219 9200** ◇	**30220 9200** ◇		
			26°	**30216 9220** ◇	**30217 9220** ◇	-	-			
			47°	**30216 9230** ◇	**30217 9230** ◇	-	-			
4000K CRI>90	LED 11,9W / 1537lm / 600mA	DALI	8°						**30223 9415** ◇	**30224 9415** ◇
	LED 12,6W / 1683lm / 500mA		14°	**30216 9415** ◇	**30217 9415** ◇	**30218 9405** ◇	**30219 9405** ◇	**30220 9405** ◇		
			26°	**30216 9425** ◇	**30217 9425** ◇	-	-			
			47°	**30216 9435** ◇	**30217 9435** ◇	-	-			
3000K CRI>90	LED 11,9W / 1406lm / 600mA		8°						**30223 9315** ◇	**30224 9315** ◇
	LED 12,6W / 1530lm / 500mA		14°	**30216 9315** ◇	**30217 9315** ◇	**30218 9305** ◇	**30219 9305** ◇	**30220 9305** ◇		
			26°	**30216 9325** ◇	**30217 9325** ◇	-	-			
			47°	**30216 9335** ◇	**30217 9335** ◇	-	-			
2700K CRI>90	LED 11,9W / 1344lm / 600mA		8°						**30223 9215** ◇	**30224 9215** ◇
	LED 12,6W / 1467lm / 500mA		14°	**30216 9215** ◇	**30217 9215** ◇	**30218 9205** ◇	**30219 9205** ◇	**30220 9205** ◇		
			26°	**30216 9225** ◇	**30217 9225** ◇	-	-			
			47°	**30216 9235** ◇	**30217 9235** ◇	-	-			

◇ INOX


NON DIM: 220-240V / 50-60Hz
DALI DIM: 110-240V / 50-60Hz

NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR
DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR
IEC 60598 2-13 : Max 500Kg - ESG 10mm

IP67



LOGIC
190 R REFLECTOR



NEW

LOGIC 190

IK10

				R REFL	
				NO ACCESSORY	HONEYCOMB
4000K CRI>90	LED 13W / 1963lm / 400mA	NON DIM	18°	**30225 9410** ◇	**30226 9410** ◇
			32°	**30225 9420** ◇	**30226 9420** ◇
			45°	**30225 9430** ◇	**30226 9430** ◇
3000K CRI>90	LED 13W / 1855lm / 400mA		18°	**30225 9310** ◇	**30226 9310** ◇
			32°	**30225 9320** ◇	**30226 9320** ◇
			45°	**30225 9330** ◇	**30226 9330** ◇
2700K CRI>90	LED 13W / 1775lm / 400mA		18°	**30225 9210** ◇	**30226 9210** ◇
			32°	**30225 9220** ◇	**30226 9220** ◇
			45°	**30225 9230** ◇	**30226 9230** ◇
4000K CRI>90	LED 13W / 1963lm / 400mA	DALI	18°	**30225 9415** ◇	**30226 9415** ◇
			32°	**30225 9425** ◇	**30226 9425** ◇
			45°	**30225 9435** ◇	**30226 9435** ◇
3000K CRI>90	LED 13W / 1855lm / 400mA		18°	**30225 9315** ◇	**30226 9315** ◇
			32°	**30225 9325** ◇	**30226 9325** ◇
			45°	**30225 9335** ◇	**30226 9335** ◇
2700K CRI>90	LED 13W / 1775lm / 400mA		18°	**30225 9215** ◇	**30226 9215** ◇
			32°	**30225 9225** ◇	**30226 9225** ◇
			45°	**30225 9235** ◇	**30226 9235** ◇


◇ INOX
NON DIM: 220-240V / 50-60Hz
DALI DIM: 110-240V / 50-60Hz
NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR
DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR
IEC 60598 2-13 : Max 500Kg - ESG 10mm
IP67

Innovation in design
Logic 190 R OK is fully adjustable on-site, without the need of opening the fixture. As such, it can be rotated 360° and tilted up to 25°, without any possible damage by ingress of water or dust. It even goes the extra mile, as it can be adjusted while installed into the floor, allowing a perfect alignment of light effect on architecture. By tightening the flange onto the housing from below, the only visible screws on top of the fixture are the ones to remove the flange in order to adjust the LED engine for an optimal light effect. A perfect merge from design and functionality, as it minimizes possible galvanic corrosion.


Smart design
Within Logic 190 R, we opt for a clever re-use of existing building blocks. LED engine, optics and accessories are shared components with the Frax family, a range of exterior projectors. As such we do not only create a uniform look and feel for the end-user (both in design and light effect), we also optimize the internal supply chain to build and assemble our product portfolio. Future thinking: the building blocks of Logic 190 R are designed for future updates as well, thinking for example on integration of Tunable White or RGBW LEDs, new optics or installation in new or other materials. A toolbox of smart thinking.

Quality
Durable: Logic 190 R is designed to last, be it in the choice of material, components or the way it is assembled. An integrated moisture lock prohibits incoming water from below, in-house designed gaskets avoid water ingress from above to make it full IP67, a stainless steel flange holds the 10mm thick glass to ensure an IK10 value and an integrated DALI driver makes it dimmable and adaptable to the specific needs of the project. Standard Logic 190 R comes with 0,5m of cable ad an integrated IP68-connector to facilitate a waterproof installation.Quality of light: Logic 190 R not only excels from the outside, it is the inner part that makes it shine. Precise optics that reduce unwanted spill of light, a set of individual collimator lenses to reduce glare, accessories that further refine the light or improve on visual comfort, the engine that makes a powerful lighting tool of Logic 190 R.

Family thinking
Next to the adjustable version, Logic 190 R also comes as a fix version to be used in more straight-forward set-ups. All of these available with a range of optics: 8°, 14°, 26°, 47° and wallwash, applicable. To complete the range, a linear version is available within the same design language, adding even wallgrazer options that can be used to highlight vertical structured surfaces at night. As a straightforward uplight, Logic 190 R also comes as reflector version with a single COB. Available with 3 different beam angles and a honeycomb version with improved visual comfort, the reflector version offers smooth beam projections without any unwanted disturbances.

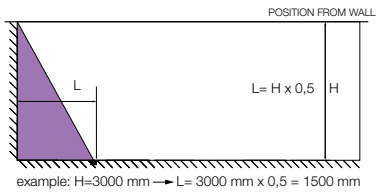

example: H=3000 mm → L= 3000 mm x 0,5 = 1500 mm

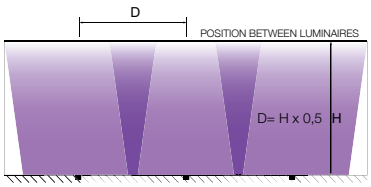

example: H=3000 mm → D= 3000 mm x 0,5 = 1500 mm

B

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY				
		LOGIC 190				
		R	R SP	R OK	R OK SP	R REFL
INSTALLATION						
LOGIC 190 R BOX (max. 500KG)	**30210 0010**	R	R	R	R	R
LOGIC 190 ANTI VANDAL SCREWS 2 PCS	**30210 0020**	O	O	O	O	O
IP68 JUNCTION BOX 4P	**431 99 02**	O	O	O	O	O
IP68 Y-CONNECTOR 5P	**21034 0150**	O	O	O	O	O


LOGIC LINEAR

Based on the same principles as Logic 190 R, Logic Linear offers additional options in linear uplighting. As an individual projector or installed in a continuous line, these fittings are perfect to install around facades or other architectural elements. With its wallgrazing optics, Logic Linear easily lights up structured vertical surfaces to enhance the sense of depth of the structure and make them more lively.

Apart from its wallgrazing optics, Logic Linear offers 3 symmetrical beams and can be provided with a internal accessory to improve the visual comfort of the passer-by.
Opt for powder-painted aluminium front cover in Dark Grey or go for the additional benefits of the Inox cover for use in more harsh environments.
Similar to the round version, Logic Linear comes with an integrated power supply and has the IP68-connector installed on the product to facilitate the in-ground installation.

AG
ANTI GLARE

Reduces unwanted backlight towards the passer-by



A

NEW

LOGIC LINEAR

IK09

				440				880			
				NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG	NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG
4000K CRI>90	for 440 LED 14,4W / 1884lm / 650mA For 880 LED 28,8W / 3768lm / 650mA	NON DIM	15°	**30811 9410** ◇	**30812 9410** ◇			**30814 9410** ◇	**30815 9410** ◇		
			25°	**30811 9420** ◇	**30812 9420** ◇			**30814 9420** ◇	**30815 9420** ◇		
			40°	**30811 9430** ◇	**30812 9430** ◇			**30814 9430** ◇	**30815 9430** ◇		
			WG			**30813 9400** ◇	**30823 9400** ◇			**30816 9400** ◇	**30824 9400** ◇
3000K CRI>90	for 440 LED 14,4W / 1726lm / 650mA For 880 LED 28,8W / 3452lm / 650mA		15°	**30811 9310** ◇	**30812 9310** ◇			**30814 9310** ◇	**30815 9310** ◇		
			25°	**30811 9320** ◇	**30812 9320** ◇			**30814 9320** ◇	**30815 9320** ◇		
			40°	**30811 9330** ◇	**30812 9330** ◇			**30814 9330** ◇	**30815 9330** ◇		
			WG			**30813 9300** ◇	**30823 9300** ◇			**30816 9300** ◇	**30824 9300** ◇
2700K CRI>90	for 440 LED 14,4W / 1648lm / 650mA For 880 LED 28,8W / 3296lm / 650mA		15°	**30811 9210** ◇	**30812 9210** ◇			**30814 9210** ◇	**30815 9210** ◇		
			25°	**30811 9220** ◇	**30812 9220** ◇			**30814 9220** ◇	**30815 9220** ◇		
			40°	**30811 9230** ◇	**30812 9230** ◇			**30814 9230** ◇	**30815 9230** ◇		
			WG			**30813 9200** ◇	**30823 9200** ◇			**30816 9200** ◇	**30824 9200** ◇
4000K CRI>90	for 440 LED 14,4W / 1884lm / 650mA for 880 LED 28,8W / 3768lm / 650mA	DALI	15°	**30811 9415** ◇	**30812 9415** ◇			**30814 9415** ◇	**30815 9415** ◇		
			25°	**30811 9425** ◇	**30812 9425** ◇			**30814 9425** ◇	**30815 9425** ◇		
			40°	**30811 9435** ◇	**30812 9435** ◇			**30814 9435** ◇	**30815 9435** ◇		
			WG			**30813 9405** ◇	**30823 9405** ◇			**30816 9405** ◇	**30824 9405** ◇
3000K CRI>90	for 440 LED 14,4W / 1726lm / 650mA For 880 LED 28,8W / 3452lm / 650mA		15°	**30811 9315** ◇	**30812 9315** ◇			**30814 9315** ◇	**30815 9315** ◇		
			25°	**30811 9325** ◇	**30812 9325** ◇			**30814 9325** ◇	**30815 9325** ◇		
			40°	**30811 9335** ◇	**30812 9335** ◇			**30814 9335** ◇	**30815 9335** ◇		
			WG			**30813 9305** ◇	**30823 9305** ◇			**30816 9305** ◇	**30824 9305** ◇
2700K CRI>90	for 440 LED 14,4W / 1648lm / 650mA for 880 LED 28,8W / 3296lm / 650mA		15°	**30811 9215** ◇	**30812 9215** ◇			**30814 9215** ◇	**30815 9215** ◇		
			25°	**30811 9225** ◇	**30812 9225** ◇			**30814 9225** ◇	**30815 9225** ◇		
			40°	**30811 9235** ◇	**30812 9235** ◇			**30814 9235** ◇	**30815 9235** ◇		
			WG			**30813 9205** ◇	**30823 9205** ◇			**30816 9205** ◇	**30824 9205** ◇

◇ N ●

220-240V / 0I50-60Hz


NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR
DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR
IEC 60598 2-13 : Max 500Kg - ESG 8mm

◇ IP67

A GLIMPSE OF ME
ON PAGE 80

C


FIND ME ONLINE

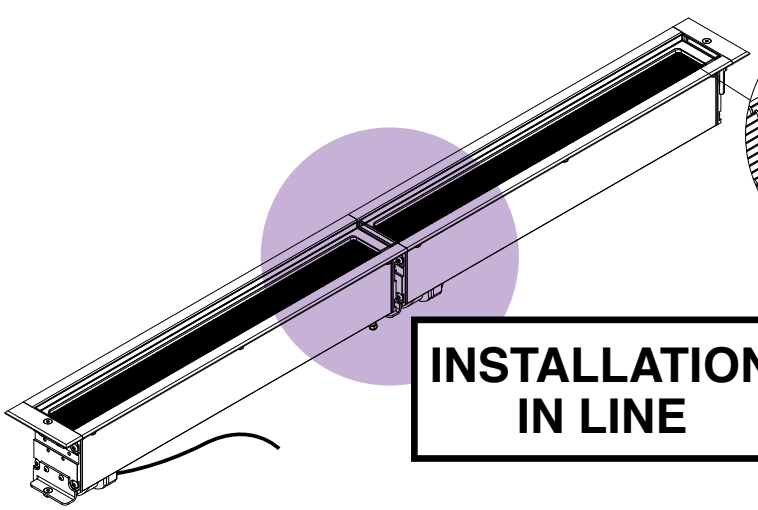

HONEYCOMB


For improved visual comfort

INSTALLATION IN LINE



B

BOX 440
Flattened side
to stay close to the wall
for perfect wallgrazing



NEW

LOGIC LINEAR INOX

IK09

				440				880			
				NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG	NO ACCESSORY	HONEYCOMB	WALLGRAZER	WALLGRAZER AG
4000K CRI>90	for 440 LED 14,4W / 1884lm / 650mA For 880 LED 28,8W / 3768lm / 650mA	NON DIM	15°	**30817 9410** ◇	**30818 9410** ◇			**30820 9410** ◇	**30821 9410** ◇		
			25°	**30817 9420** ◇	**30818 9420** ◇			**30820 9420** ◇	**30821 9420** ◇		
			40°	**30817 9430** ◇	**30818 9430** ◇			**30820 9430** ◇	**30821 9430** ◇		
			WG			**30819 9400** ◇	**30825 9400** ◇			**30822 9400** ◇	**30826 9400** ◇
3000K CRI>90	for 440 LED 14,4W / 1726lm / 650mA For 880 LED 28,8W / 3452lm / 650mA		15°	**30817 9310** ◇	**30818 9310** ◇			**30820 9310** ◇	**30821 9310** ◇		
			25°	**30817 9320** ◇	**30818 9320** ◇			**30820 9320** ◇	**30821 9320** ◇		
			40°	**30817 9330** ◇	**30818 9330** ◇			**30820 9330** ◇	**30821 9330** ◇		
			WG			**30819 9300** ◇	**30825 9300** ◇			**30822 9300** ◇	**30826 9300** ◇
2700K CRI>90	for 440 LED 14,4W / 1648lm / 650mA For 880 LED 28,8W / 3296lm / 650mA		15°	**30817 9210** ◇	**30818 9210** ◇			**30820 9210** ◇	**30821 9210** ◇		
			25°	**30817 9220** ◇	**30818 9220** ◇			**30820 9220** ◇	**30821 9220** ◇		
			40°	**30817 9230** ◇	**30818 9230** ◇			**30820 9230** ◇	**30821 9230** ◇		
			WG			**30819 9200** ◇	**30825 9200** ◇			**30822 9200** ◇	**30826 9200** ◇
4000K CRI>90	for 440 LED 14,4W / 1884lm / 650mA for 880 LED 28,8W / 3768lm / 650mA	DALI	15°	**30817 9415** ◇	**30818 9415** ◇			**30820 9415** ◇	**30821 9415** ◇		
			25°	**30817 9425** ◇	**30818 9425** ◇			**30820 9425** ◇	**30821 9425** ◇		
			40°	**30817 9435** ◇	**30818 9435** ◇			**30820 9435** ◇	**30821 9435** ◇		
			WG			**30819 9405** ◇	**30825 9405** ◇			**30822 9405** ◇	**30826 9405** ◇
3000K CRI>90	for 440 LED 14,4W / 1726lm / 650mA For 880 LED 28,8W / 3452lm / 650mA		15°	**30817 9315** ◇	**30818 9315** ◇			**30820 9315** ◇	**30821 9315** ◇		
			25°	**30817 9325** ◇	**30818 9325** ◇			**30820 9325** ◇	**30821 9325** ◇		
			40°	**30817 9335** ◇	**30818 9335** ◇			**30820 9335** ◇	**30821 9335** ◇		
			WG			**30819 9305** ◇	**30825 9305** ◇			**30822 9305** ◇	**30826 9305** ◇
2700K CRI>90	for 440 LED 14,4W / 1648lm / 650mA for 880 LED 28,8W / 3296lm / 650mA		15°	**30817 9215** ◇	**30818 9215** ◇			**30820 9215** ◇	**30821 9215** ◇		
			25°	**30817 9225** ◇	**30818 9225** ◇			**30820 9225** ◇	**30821 9225** ◇		
			40°	**30817 9235** ◇	**30818 9235** ◇			**30820 9235** ◇	**30821 9235** ◇		
			WG			**30819 9205** ◇	**30825 9205** ◇			**30822 9205** ◇	**30826 9205** ◇

◇ INOX

220-240V / 0I50-60Hz

NON DIM: INCL.1 x CABLE H05 RN-F 3 x 0,75mm² 0,5m + IP68 CONNECTOR
DALI DIM: INCL.1 x CABLE H05 RN-F 5 x 1mm² 0,5m + IP68 CONNECTOR
IEC 60598 2-13 : Max 500Kg - ESG 8mm


IP67

B


FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY			
		LOGIC LINEAR		LOGIC LINEAR INOX	
		440	880	440	880
INSTALLATION					
BOX 440	**30810 0010**	R		R	
BOX 880	**30810 0030**		R		R
IP68 JUNCTION BOX 4P	**431 99 02**	O	O	O	O
IP68 Y-CONNECTOR 5P	**21034 0150**	O	O	O	O


LOGIC



43 x 85



43 x 70



43 x 85



43 x 70


LOGIC 40

IK08


				R	R A	R MOON	R A MOON
3000K CRI>90	LED [E] 3.9W / 385lm / 350mA	IP67	15°	**13955 9310** ◇	**13957 9310** ◇	**13956 9310** ◇	**13958 9310** ◇
				◇ ANO ●	◇ INOX	◇ ANO ●	◇ INOX

INCL. 1 x MICRO VISOR


INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm2
ESG 6mm




61 x 100




61 x 100



61 x 100



61 x 100




61 x 100

LOGIC 60


IK08

				R	R A	R WALLWASH	R MOON	R A MOON
3000K CRI>80	LED [F] 2W / 229lm / 700mA LED [F] 3.2W / 319lm / 1050mA	IP67	6°	**213 45 15** ◇	**213 46 15** ◇			
	LED 2W / 229lm / 24V-DC (PWM)			**13959 8310** ◇	**13961 8310** ◇			
	LED 4W / 335lm / 24V-DC (PWM)		WALLWASH			**213 45 212** ◇		
			WALLWASH + SBL			**213 45 2125** ◇		
3000K CRI>90	LED [H] 7.1W / 812lm / 350mA		20°	**213 45 811 932** ◇	**213 46 811 932** ◇		**213 45 10 811 932** ◇	**213 46 10 811 932** ◇
	LED 7.1W / 812lm / 24V-DC (NON DIM)						**13963 9320** ◇	**13964 9320** ◇
	LED 7.1W / 812lm / 24V-DC (PWM)			**13960 9320** ◇	**13962 9320** ◇			
				◇ ANO ●	◇ ANO ● / ◇ B ● (BLACK ANODISED)	◇ ANO ●	◇ ANO ●	◇ ANO ● / ◇ B ● (BLACK ANODISED)


INCL.1 x CABLE H05 RN-F 2 x 1mm² 0,5m
IEC 60598-2-13 : max.150kg 25N/cm²
ESG 5mm




93 x 125




93 x 125



112 x 112 x 125



93 x 125



93 x 125

LOGIC 90

IK07


				R	R A	S	R WALLWASH	R A WALLWASH
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP67	11°	**213 47 811 931** ◇	**213 48 811 931** ◇	**213 49 811 931** ◇		
			30°	**213 47 811 932** ◇	**213 48 811 932** ◇	**213 49 811 932** ◇		
			55°	**213 47 811 933** ◇	**213 48 811 933** ◇	**213 49 811 933** ◇		
			WALLWASH				**213 473 811 930** ◇	**213 483 811 930** ◇
			WW + SBL				**213 474 811 930** ◇	**213 484 811 930** ◇
	LED 7.1W / 812lm / 24V-DC (PWM)		11°	**13965 9310** ◇	**13966 9310** ◇	**13967 9310** ◇		
			30°	**13965 9320** ◇	**13966 9320** ◇	**13967 9320** ◇		
			55°	**13965 9330** ◇	**13966 9330** ◇	**13967 9330** ◇		
			WALLWASH				**13968 9300** ◇	**13970 9300** ◇
			WW + SBL				**13969 9300** ◇	**13971 9300** ◇
				◇ ANO ●	◇ ANO ● / ◇ B ● (BLACK ANODISED)	◇ ANO ●	◇ ANO ●	◇ ANO ● / ◇ B ● (BLACK ANODISED)

INCL.CABLE H05 RN-F 2 x 1mm² 0,5m + IP68 CONNECTOR 3P (not for 24V-DC versions)
IEC 60598-2-13: max.150kg 25N/cm²
ESG 5mm
100-240V / 50-60Hz (not for 24V-DC versions)


LOGIC 40
The Logic range stands for a complete family of water and shock resistant lighting fixtures. Logic 40 is the smallest of the family, a minimalistic recessed uplight with a diameter of only 40mm. With its small beam angle of 15°, it perfectly serves as an accent light to highlight any architectural aspect you want. Available with trim or as a trimless installation for an even more minimalistic look. To take care of the visual well-being, Logic 40 either comes with a micro vizor inside or as a Moon version, shielding off the light that is thrown backwards. The perfect addition to accentuate green or sculptures, to highlight façade or small garden features, to create a sense of depth or indicate the right direction along paths and driveways.

LOGIC 60
With a diameter of only 60mm, Logic 60 can easily be integrated in any landscape design, without disturbing the visual perception of it. Its smallest beam angle is ideal for highlighting, while the wallwash versions emphasize façades and bring depth into the architecture.The specific Moon version cuts of the light spill going backwards, ideal to accentuate trees or reduce the glare for passers-by.

LOGIC 90
The bigger version of Logic allows for more choice in beam angles, letting the designer be creative and play with light effect and light intensity. Similar to Logic 60 also wallwash versions are available within the bigger range to offer multiple light effects within the same design language.

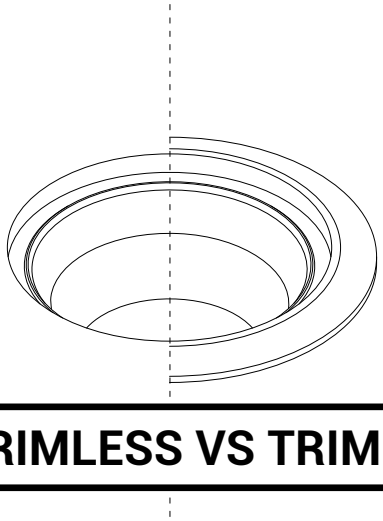


TRIMLESS VS TRIM




LOGIC 40
BOX R

IP67

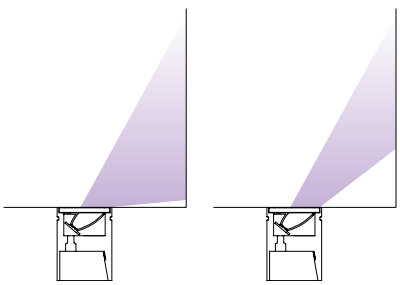

LOGIC 60 R
WALLWASH SBL

LOGIC 60 R
WALLWASH

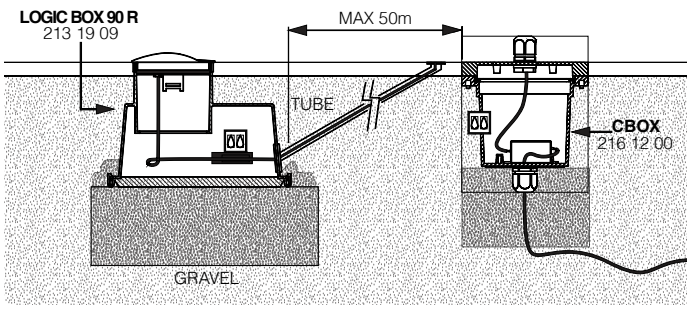

FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY																									
			LOGIC 40				LOGIC 60										LOGIC 90											
			R	R A	R MOON	R A MOON	R		R A		R A WALLWASH		R MOON		R A MOON		R		R A		S		R WALLWASH		R A WALLWASH	
							mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC	mA	24V-DC
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT																												
NON DIM - 24W	**21012 0160**	137 x 50 x 16												R *		R *												
1-10V DIM - 60W (PWM)	**21012 0101**	150 x 53 x 35						R *		R *		R *						R *		R *		R *		R *		R *		R *
DALI DIM - 60W (PWM)	**21012 0135**	150 x 53 x 35						R *		R *		R *						R *		R *		R *		R *		R *		R *
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT																												
MAINS DIM (FE) 11	**21012 0298**	min. 55	R *	R *	R *	R *							R *		R *		R *		R *		R *		R *		R *			
1-10V DIM 16	**300 90 63**	min. 84	R *	R *	R *	R *	R *		R *				R *		R *		R *		R *		R *		R *		R *			
DALI DIM 16	**300 90 63**	min. 84	R *	R *	R *	R *	R *		R *				R *		R *		R *		R *		R *		R *		R *			
INSTALLATION																												
CBOX	**216 12 00**		O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O
LOGIC 40 BOX R	**13910 0010**		O	O	O	O																						
LOGIC 60 BOX R	**213 19 10**						O	O	O	O	O	O	O	O	O	O												
LOGIC 90 BOX R	**213 19 09**																O	O	O	O			O	O	O	O		
LOGIC 90 BOX S	**213 19 08**																				O	O						
IP68 CONNECTION KIT	**216 12 01**		O	O	O	O	O	O	O	O	O	O	O	O	O	O												
IP68 CONNECTOR 3P	**216 12 02**		O	O	O	O	O	O	O	O	O	O	O	O	O	O												

* REMOTE INSTALLATION


LOGIC

LOGIC F
Logic F creates a playful effect on your path or driveway, perfect to enhance the architectural character of your project and landscape.


IP67

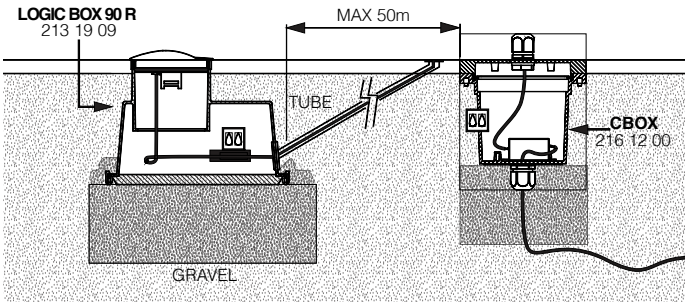

A




93 x 40



93 x 40

LOGIC			F1	F2
3000K / CRI>80	LED 0,6W / 40lm / 24V-DC	IP67	**213 47 112** ◇	
	2 x LED 0,6W / 40lm / 24V-DC			**213 47 122** ◇

◇ A
max.600kg

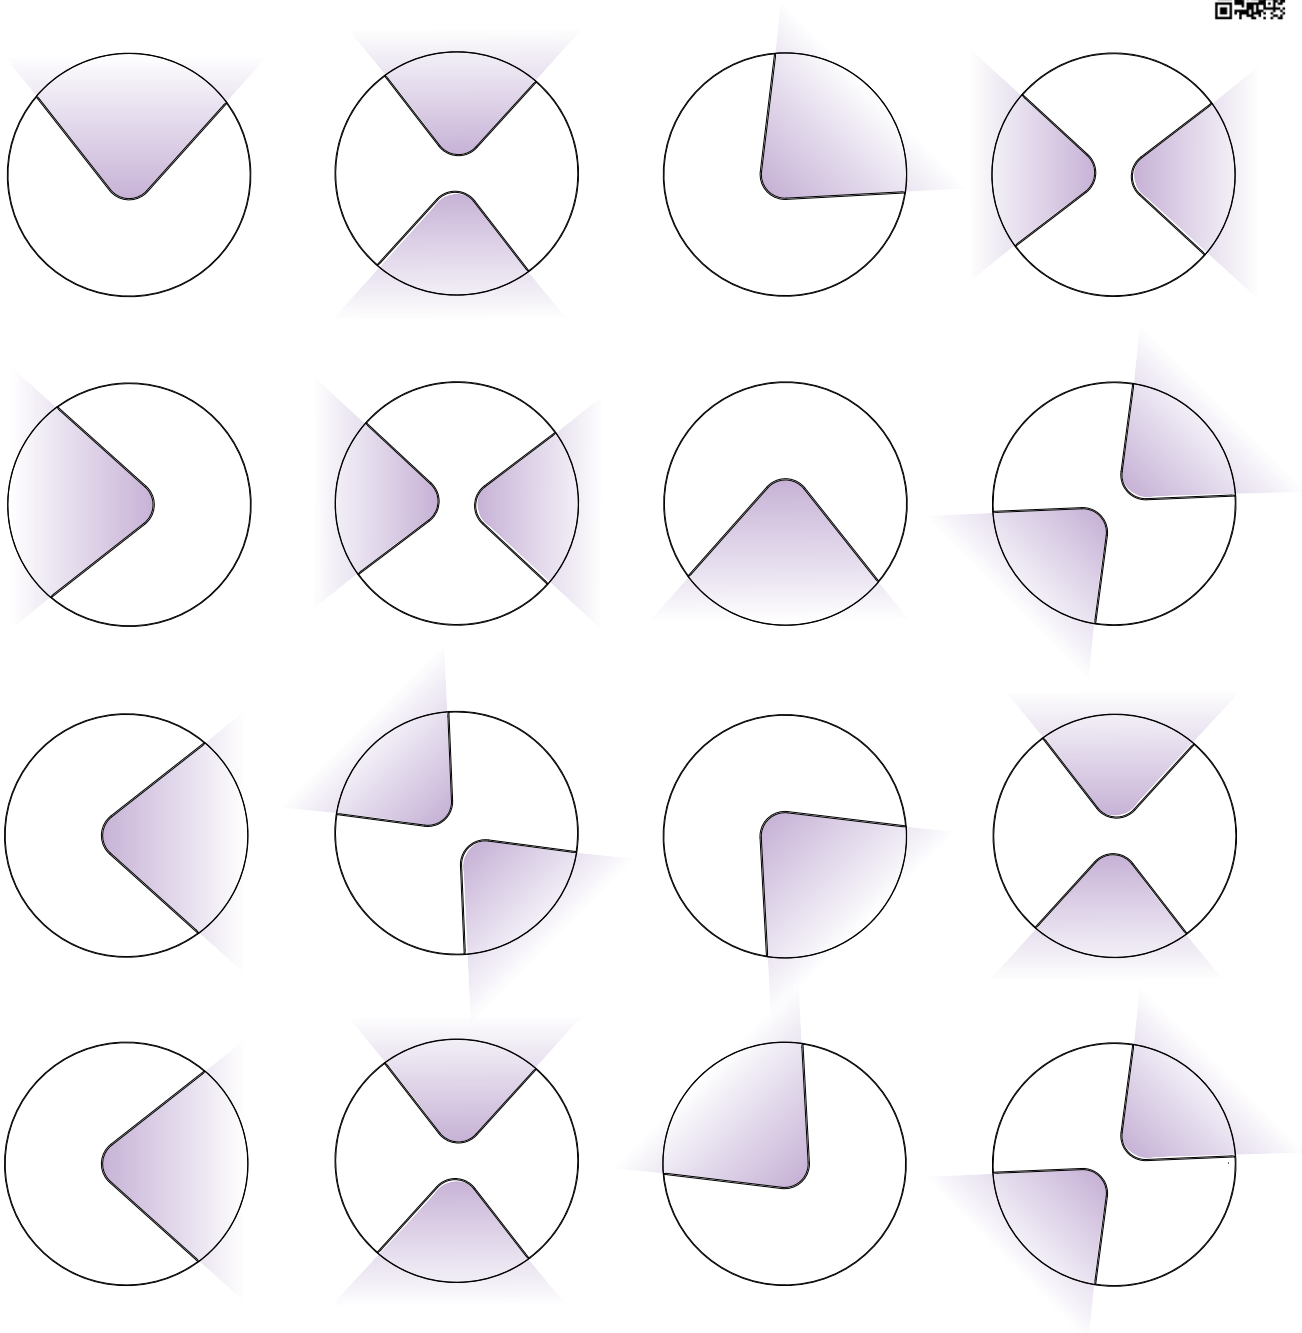

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY	
			LOGIC	
			F1	F2
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
NON DIM - 24W	**21012 0160**	137 x 50 x 16	R *	R *
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
INSTALLATION				
CBOX	**216 12 00**		O	O
LOGIC 90 BOX R	**213 19 09**		O	O


* REMOTE INSTALLATION


LEDS C / GO


This family offers some miniature fixtures that serve as orientation and atmosphere lighting. Available round and square, these little dots of light are perfect as guidance lights along paths and driveways.

deltalight.com/ledsc
deltalight.com/ledsgo


IP67

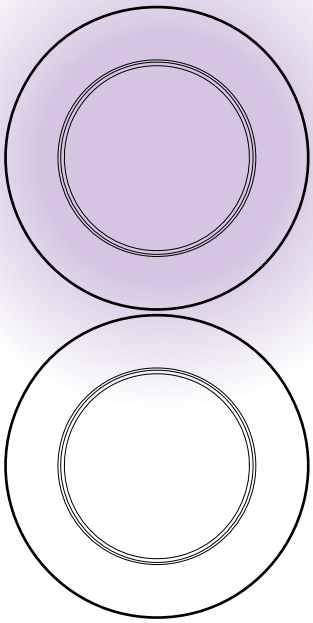






A




41 x 45



38 x 38 x 45


LEDS C / GO IN FORTE			LEDS C R ST	LEDS GO IN FORTE
4000K / CRI>80	LED [A] 1W / 134lm / 350mA	IP67	**302 20 34** ◇	**302 10 34** ◇
3000K / CRI>80	LED [A] 1W / 132lm / 350mA		**302 20 32** ◇	**302 10 32** ◇
			◇ ANO	






LEDS GO
IN FORTE


LEDS C
R ST

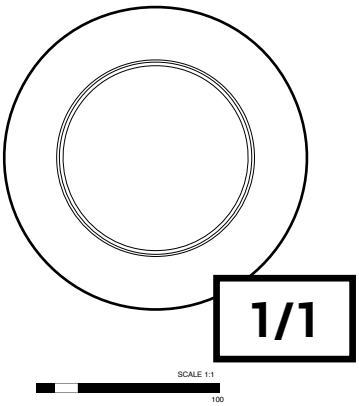

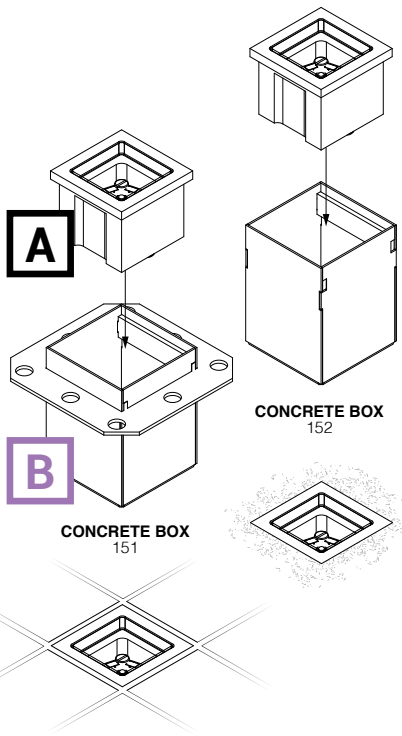

CONCRETE BOX
152

CONCRETE BOX
151



FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY	
			LEDS C R ST	LEDS GO IN FORTE
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
MAINS DIM (FE) 11	**21012 0298**	min. 55	R * (MIN. 3 LED)	R * (MIN. 3 LED)
1-10V DIM 15	**300 90 124**	min. 55	R * (MIN. 6 LED)	R * (MIN. 6 LED)
DALI DIM 14	**300 90 125**	min. 55	R * (MIN. 4 LED)	R * (MIN. 4 LED)
INSTALLATION				
CBOX	**216 12 00**		O	O
or CBOX 350mA/10W	**216 14 35**		O (MIN. 7 LED)	O (MIN. 7 LED)
CONCRETE BOX 151	**302 19 21**			O
CONCRETE BOX TR 152	**302 19 22**			O

* REMOTE INSTALLATION

KIX


Flexible, subtle, elegant and powerful: these are the keywords that describe the Kix perfectly. Despite its low-profile appearance, Kix excels in light output and quality, ideal for walkway lighting or other landscape applications. Kix is easy and flexible to use thanks to the adjustable head, designed to provide optimal cooling and eliminate glare.
Kix is available for installation on wall or floor, to strap around a tree or to mount in soft green areas with a pin. In addition to the more robust version of Kix, there is also a S(mall) and M(edium) version available. Kix S combines a powerled with a lens, resulting in a nice 10° light beam. All models have an IP65 rating and are available in alu grey or dark grey.


deltalight.com/kix


IP55 **IP65**


A

KIX










				S PIN	M PIN	II PIN	HP PIN
3000K / CRI>80	LED [A] 1W / 132lm / 350mA LED [A] 1.4W / 182lm / 500mA LED [A] 2W / 245lm / 700mA	IP65	10°	**232 09 831** ◇			
	LED 2W / 245lm / 24V-DC (PWM)			**13529 8310** ◇			
3000K / CRI>90	LED 7.1W / 812lm / 350mA		11°			**13537 9310** ◇	
			30°			**13537 9320** ◇	
			55°			**13537 9330** ◇	
			120°			**13536 9300** ◇	
	LED 7.1W / 812lm / 24V-DC (PWM)		11°			**13531 9310** ◇	
			30°			**13531 9320** ◇	
			55°			**13531 9330** ◇	
			120°			**13538 9300** ◇	
	LED [D] 6.4W / 587lm / 350mA	IP55	30°		**232 13 933** ◇		
	LED 6.4W / 587lm / 24V-DC (PWM)				**13530 9330** ◇		
	LED [J] 16.3W / 2309lm / 500mA	IP65	11°				**13535 9310** ◇
			30°				**13535 9320** ◇
			55°				**13535 9330** ◇
				◇ N ●	◇ A ○ / N ●	◇ A ○ / N ●	◇ A ○ / N ●
				INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m			
					INCL.1 x KAP STRIPER B (REMOVABLE)	100-240V / 50-60Hz (not for 24V-DC versions)	

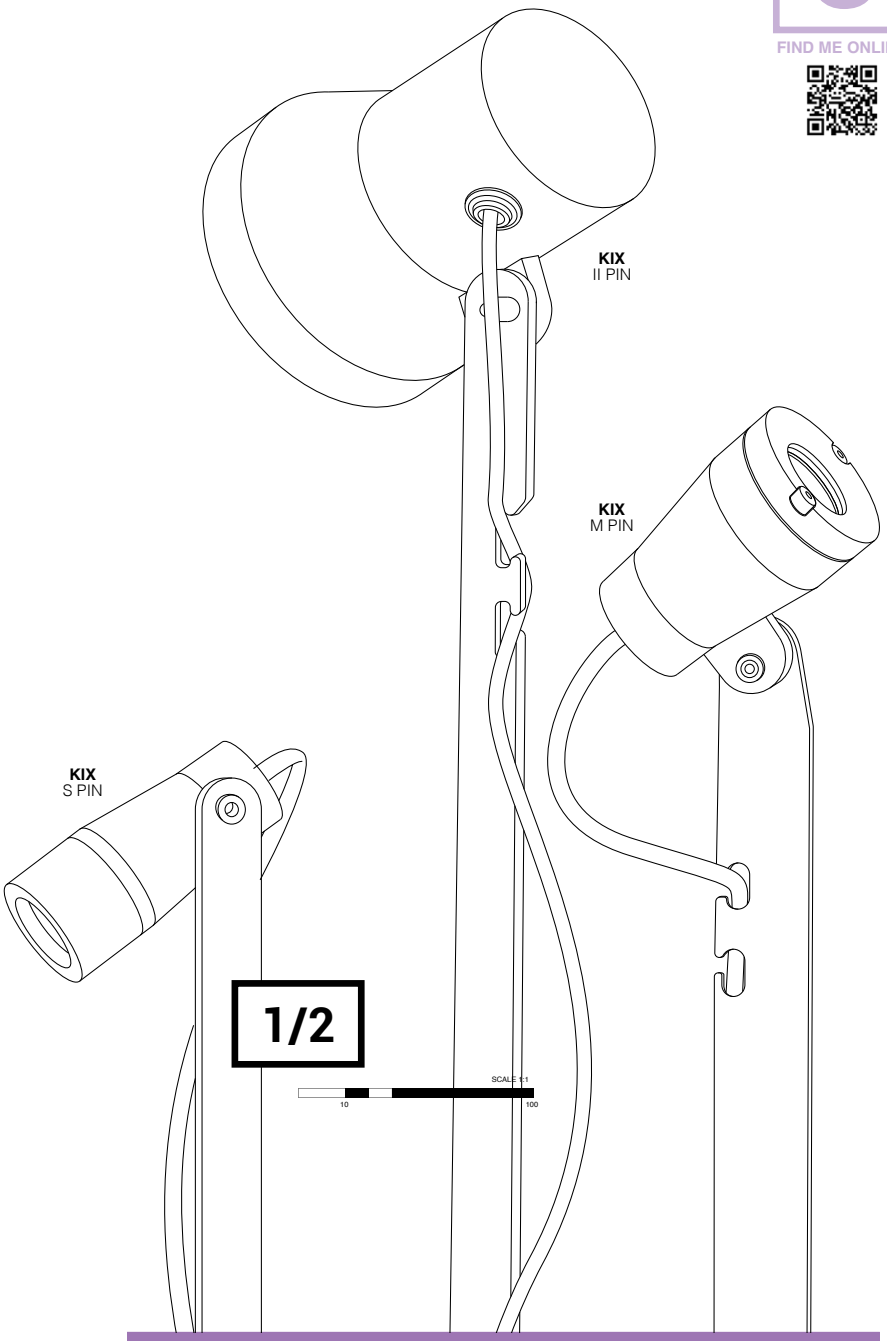


FINISH YOUR SPECIFICATION


REQUIREMENT / OPTION / ACCESSORY

			KIX						
			S PIN		M PIN		II PIN		II HP PIN
			mA	24V-DC	mA	24V-DC	mA	24V-DC	
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
1-10V DIM - 60W (PWM)	**21012 0101**	150 x 53 x 35		R *		R *		R *	
DALI DIM - 60W (PWM)	**21012 0135**	150 x 53 x 35		R *		R *		R *	
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT									
MAINS DIM (FE) 11	**21012 0298**	min. 55	R * (MIN. 3 LED)		R *		R *		R *
1-10V DIM 15	**300 90 124**	min. 55	R * (MIN. 6 LED)		R *		R *		R *
DALI DIM 14	**300 90 125**	min. 55	R * (MIN. 4 LED)		R *		R *		R *
HONEYCOMB / LENS / GLASS									
HONEYCOMB (only + KAP KIX)	**232 10 03 N**						A	A	A
KAP KIX	**232 10 00 N**						A	A	A
INSTALLATION									
CBOX	**216 12 00**		O	O	O	O	O	O	O
IP68 CONNECTION KIT	**216 12 01**		O	O	O	O	O	O	O
IP68 CONNECTOR 3P	**216 12 02**		O	O	O	O	O	O	O

* REMOTE INSTALLATION

FRAX





IP65


FRAX — **IK06**


				SB					SB SUPERSPOT	
				NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB
3000K CRI>90	LED 6W / 696lm / 700mA	IP65	8°						**26100 9310** ◇	**26100 9320** ◇
	LED 8W / 928lm / 700mA		14°	**26000 9310** ◇	**26000 9320** ◇	**26000 9330** ◇	**26000 9340** ◇	**26000 9350** ◇		
			26°	**26000 9360** ◇	**26000 9370** ◇	-	-	-		
			47°	**26000 9380** ◇	**26000 9390** ◇	-	-	-		

◇ N ●

220-240V / 50-60Hz
INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m

110-240V / 50-60Hz
INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m







FRAX — **IK06**

				MB					MB SUPERSPOT	
				NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB
3000K CRI>90	LED 18,2W / 2002lm / 900mA	IP65	8°						**26110 9310** ◇	**26110 9320** ◇
	LED 23,4W / 2574lm / 900mA		14°	**26010 9310** ◇	**26010 9320** ◇	**26010 9330** ◇	**26010 9340** ◇	**26010 9350** ◇		
			26°	**26010 9360** ◇	**26010 9370** ◇	-	-	-		
			47°	**26010 9380** ◇	**26010 9390** ◇	-	-	-		

◇ N ●

220-240V / 50-60Hz
INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m






FRAX — **IK06**


				S					S SUPERSPOT	
				NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB
3000K CRI>90	LED 6W / 696lm / 700mA	IP65	8°						**26101 9310** ◇	**26101 9320** ◇
	LED 8W / 928lm / 700mA		14°	**26001 9310** ◇	**26001 9320** ◇	**26001 9330** ◇	**26001 9340** ◇	**26001 9350** ◇		
			26°	**26001 9360** ◇	**26001 9370** ◇	-	-	-		
			47°	**26001 9380** ◇	**26001 9390** ◇	-	-	-		

◇ A ● / N ●

220-240V / 50-60Hz

110-240V / 50-60Hz





FRAX — **IK06**

				M					M SUPERSPOT	
				NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	WALLWASH	NO ACCESSORY	HONEYCOMB
3000K CRI>90	LED 18,2W / 2002lm / 900mA	IP65	8°						**26111 9310** ◇	**26111 9320** ◇
	LED 23,4W / 2574lm / 900mA		14°	**26011 9310** ◇	**26011 9320** ◇	**26011 9330** ◇	**26011 9340** ◇	**26011 9350** ◇		
			26°	**26011 9360** ◇	**26011 9370** ◇	-	-	-		
			47°	**26011 9380** ◇	**26011 9390** ◇	-	-	-		

◇ A ● / N ●

220-240V / 50-60Hz

A

deltalight.com/frax

A GLIMPSE OF ME ON PAGE 70


C

FIND ME ONLINE

THERMALLY TOUGHENED GLASS


D-LOCK

in-house developed D-lock system avoids damage by overheating, overvoltage and water ingress.

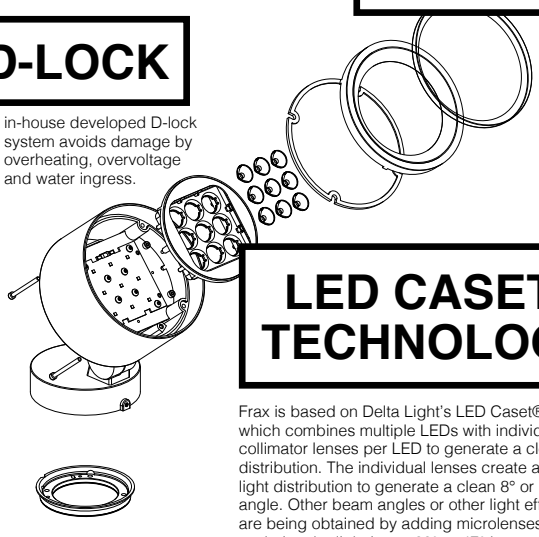

LED CASET® TECHNOLOGY

Frax is based on Delta Light's LED Caset® technology, which combines multiple LEDs with individual collimator lenses per LED to generate a clean-cut light distribution. The individual lenses create a multi-layered light distribution to generate a clean 8° or 14° beam angle. Other beam angles or other light effects are being obtained by adding microlenses in front, sculpting the light into a 26° or 47° beam angle or into a linear or wallwash effect.

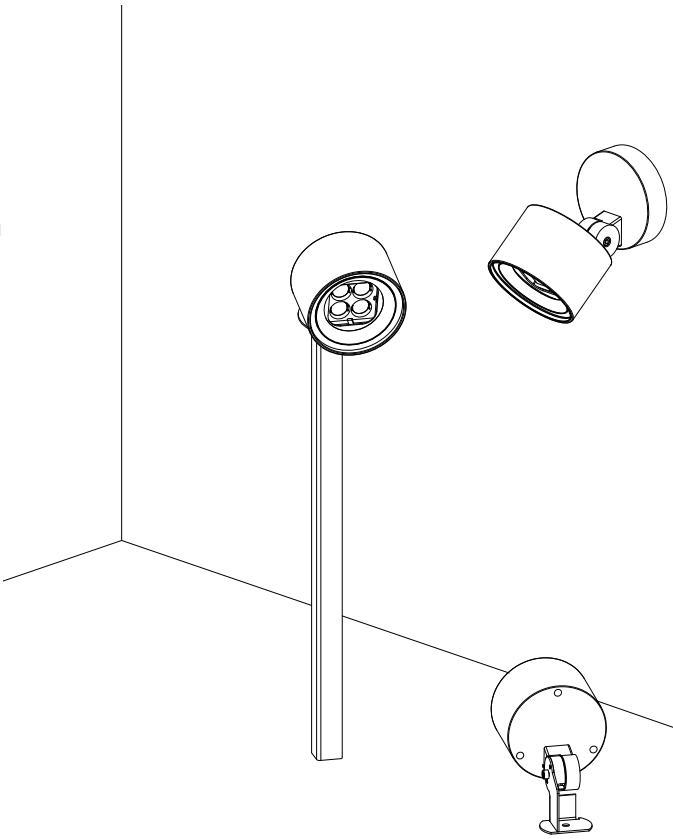



FIXATION

A multitude of options allows Frax to be installed in different ways:
Surface mounted on hard surfaces
—
On a pin in soft surfaces
—
Strapped around a tree
—
Mounted on a pole with a bracket


VISUAL WELL-BEING

Frax not only cares about the perfect light effect, it takes care about the passer-by as well. Frax can be provided with an additional honeycomb or a kap to reduce the possibility from directly looking into the light source. Both of them reduce any undesired light effect and the glare associated with it.



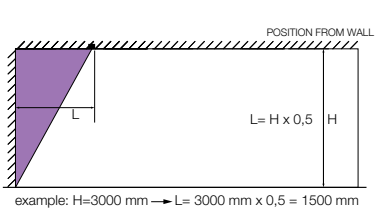

example: H=3000 mm → L= 3000 mm x 0,5 = 1500 mm

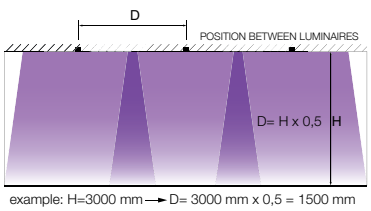

example: H=3000 mm → D= 3000 mm x 0,5 = 1500 mm

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY							
			FRAX							
			SB	SB	MB	MB	S	S	M	M
				SUPERSPOT		SUPERSPOT		SUPERSPOT		SUPERSPOT
FINISH										
FRAX S KAP	**26070 0010 N**		A	A			A	A		
FRAX M KAP	**26070 0020 N**				A	A			A	A
INSTALLATION										
FRAX BRACKET	**26070 0060 N**		R	R	R	R				
or FRAX STRAP	**26070 0050 N**	max. Ø250mm	R	R	R	R				
or FRAX PIN	**26070 0040 N**		R	R	R	R				
FRAX ANTI VANDAL SCREWS 5 PCS	**26070 0030**		O	O	O	O	O	O	O	O


B


FRAX


Light and ambiance is not only for indoors, by combining light and architecture in outdoor settings, the city also remains vibrant at night. With its 7 different light effects and its multiple installation options, Frax has been designed for every aspect of the urban architecture: any form, any material or any composition.


deltalight.com/frax

IP65










NEW


FRAX POLE

IK08

	60 3,5M	80 4M	80 6M	
	BASE PLATE	BASE	ANCHORAGE 1000mm	BASE
1 FRAX MB	**26071 0030** ◇			
1 to 4 FRAX MB - 4 LEVELS		**26071 0010** ◇	**26071 0040** ◇	**26071 0020** ◇

◇ N ●





NEW

FRAX

IK08

				MB POLE				MB POLE SUPERSPOT	
				NO ACCESSORY	HONEYCOMB	LINEAR V	LINEAR H	NO ACCESSORY	HONEYCOMB
3000K CRI>90	LED 18,2W / 2002lm / 900mA	IP65	8°					**26025 9310** ◇	**26026 9310** ◇
	LED 23,4W / 2574lm / 900mA		14°	**26020 9310** ◇	**26021 9310** ◇	**26022 9300** ◇	**26023 9300** ◇		
			26°	**26020 9320** ◇	**26021 9320** ◇				
			47°	**26020 9330** ◇	**26021 9330** ◇				

◇ N ●

220-240V / 50-60Hz


INCL.1 x CABLE H05 RN-F 3 x 1mm² 6m


◇ I

A GLIMPSE OF ME
ON PAGE 70

C

FIND ME ONLINE

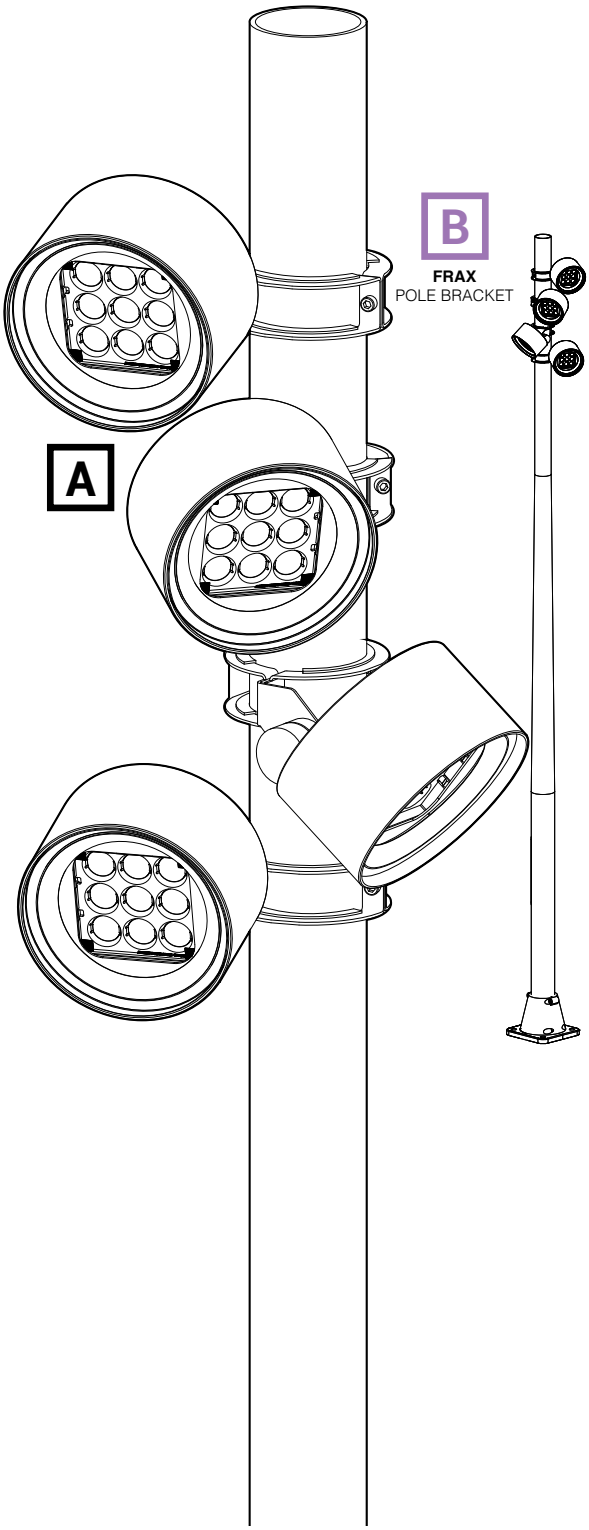

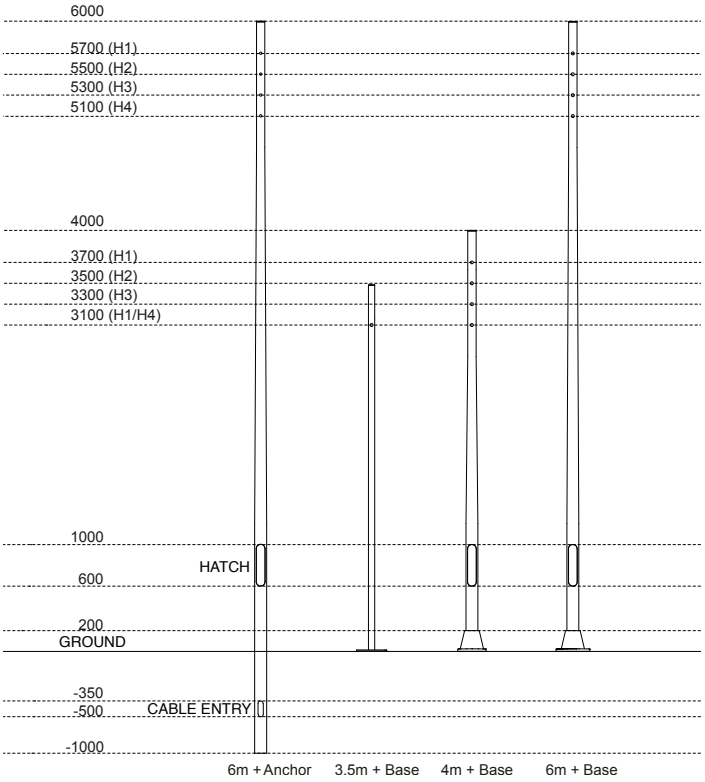

B

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY		
			FRAX		
			MB POLE	MB POLE SUPERSPOT	POLE
FINISH					
FRAX M KAP	**26070 0020 N**		A	A	
INSTALLATION					
FRAX POLE 60 BRACKET	**26071 0050 N**		R	R	
FRAX POLE 80 BRACKET	**26071 0060 N**		R	R	
FUSE BOX	**431 99 01**				O
IP68 JUNCTION BOX 4P	**431 99 02**				O
IP68 CONNECTOR 4P	**21034 0010**				O
PLATE 11	**229 02 11**				O *
FRAX ANTI VANDAL SCREWS 5 PCS	**26070 0030**		O	O	

ALL ELECTRICAL CONNECTION NEED TO COMPLY WITH IP53 REGULATIONS
* ONLY FOR VERSION WITH BASE PLATE

OONO


How to describe Oono in one sentence?
'A soft glow of light during golden hour, at the end of a sky-blue summers day…'


That's one way. But there is more to the sophisticated Oono than just its gentle embracing glow. Built in first instance as a family of exterior products, Oono is a family of dualities.
It combines elegant looks with a warm diffused light effect. It couples the sturdy look of metal with the pureness of glass.
It unifies exterior and interior, as the range offers IP-rated solutions for outdoor with staraightforward surface mounted and pendant luminaires for indoors.
It unites a play of straight lines with perfect circular shapes. It merges black and white, by adding a touch of gold.
It brings together the shimmer of dusk with the fresh start of dawn.


deltalight.com/oono

IP54

A







NEW

OONO


				P		F		F PORTABLE
				H 400mm	H 700mm	H 400mm	H 600mm	H 400mm
3000K / CRI>90	LED 8.6W / 1089lm / 500mA	IP54	MAINS DIM (FE)	**29615 9308** ◇	**29616 9308** ◇			**29619 9300** ◇
	LED 17.2W / 2101lm / 500mA					**29617 9300** ◇	**29618 9300** ◇	
2700K / CRI>90	LED 8.6W / 1041lm / 500mA			**29615 9208** ◇	**29616 9208** ◇			**29619 9200** ◇
	LED 17.2W / 2009lm / 500mA					**29617 9200** ◇	**29618 9200** ◇	
				◇ B ●		◇ B ●		◇ B ●
				220-240V / 50-60Hz		100-240V / 50-60Hz		100-240V / 50-60Hz
				□		Ⓘ		Ⓘ


INCL.BATTERY PACK + CHARGER
AUTONOMY 4 HOURS
ON FULLY CHARGED BATTERY
IP20

A GLIMPSE OF ME
ON PAGE 62

C

FIND ME ONLINE



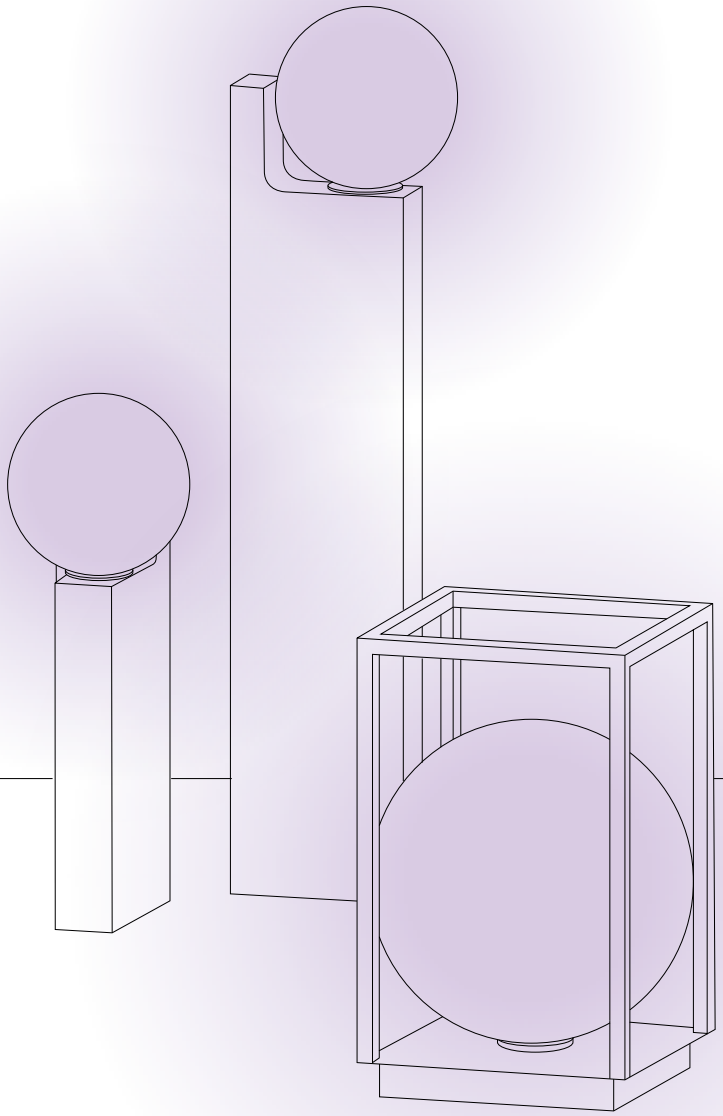

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY		
			OONO		
			P	F	F PORTABLE
INSTALLATION					
CBOX	**216 12 00**		O	O	
IP68 CONNECTION KIT	**216 12 01**		O	O	
IP68 CONNECTOR 3P	**216 12 02**		O	O	
PIN 12	**229 01 12**		O		
or PLATE 7	**229 02 07**		O		

B

SPIX

As a projector for exterior use, Spix has many appearances. It comes as a surface mounted spotlight, as a version on pin to put in between the greenery or as a bollard with 2 or 3 light units. Like this, Spix can be used throughout a complete outdoor project, to light up trees, emphasize architecture or highlight pathways.


Although compact in size, the clever design of Spix offers a solution without any visible cabling outside of the luminaire. The hinge of the projector not only serves to tilt it into the wanted direction, it also hides away a passage for the cabling.

Uniform in design, Spix comes in 2 sizes: a smaller 10° version for accent lighting and a bigger 30° version for more general light. To shield the passerby from looking into the projector and to reduce unwanted spill light, the bigger version can be finished with a kap on the front.


deltalight.com/spix

IP65


A




90°360°



90°360°



135°360°




135°360°

NEW


SPIX		IK05		S	M	S PIN	M PIN
3000K / CRI>90	LED [A] 2.6W / 286lm / 900mA	IP65	10°	**29713 9310** ◇		**29711 9310** ◇	
	LED 2.6W / 286lm / 24V-DC (PWM)			**29714 9310** ◇			
	LED [E] 8.2W / 677lm / 700mA		30°		**29715 9330** ◇		**29712 9330** ◇
	LED 8.2W / 677lm / 24V-DC (PWM)				**29716 9330** ◇		

◇ N ● / **NEW COLOUR:** PGR ●

INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m



90°360°




90°360°


NEW

SPIX		IK05		P 70-2	P 100-3
3000K / CRI>90	2 x LED 2W / 232lm / 700mA	IP65	10°	**29717 9310** ◇	
	3 x LED 2W / 232lm / 700mA				**29718 9310** ◇

◇ N ● / **NEW COLOUR:** PGR ●

100-240V / 50-60Hz



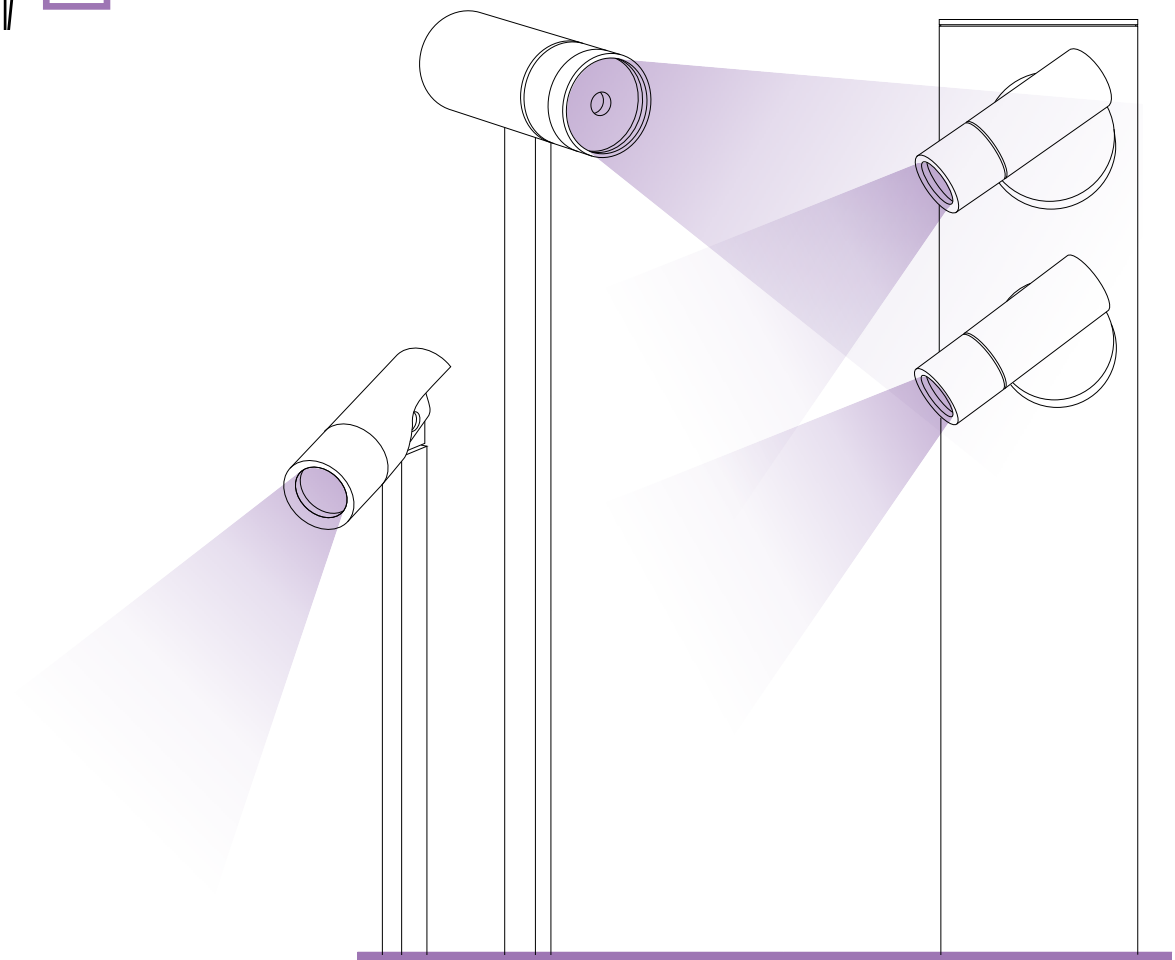

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			SPIX							
			S		M		S PIN	M PIN	P 70-2	P 100-3
			mA	24V-DC	mA	24V-DC				
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
1-10V DIM - 60W (PWM)	**21012 0101**	150 x 53 x 35		R *		R *				
DALI DIM - 60W (PWM)	**21012 0135**	150 x 53 x 35		R *		R *				
LED POWER SUPPLY mA MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT										
MAINS DIM (FE) 11	**21012 0298**	min. 55	R (min. 3 LED)		R *		R * (MIN. 3 LED)	R *		
1-10V DIM 15	**300 90 124**	min. 55	R (min. 2 LED)		R *		R * (MIN.2 LED)	R *		
DALI DIM 14	**300 90 125**	min. 55	R (min. 2 LED)		R *		R * (MIN. 2 LED)	R *		
FINISH										
KAP STRIPER	**223 00 10 B**				A	A		A		
INSTALLATION										
CBOX	**216 12 00**						O	O	O	O
IP68 CONNECTION KIT	**216 12 01**						O	O	O	O
IP68 CONNECTOR 3P	**216 12 02**						O	O	O	O
PIN 11	**229 01 11**								R	R
or PLATE 12	**15223 0120 N**								R	R


* REMOTE INSTALLATION

B

OUTLINER

Outliner defines the perimeter. It comes as single luminaire or as a bespoke profile, perfectly optimizable to any desired length. Designed as an unobtrusive linear solution, Outliner shields off the light source and gently casts its light towards the surface. As such, Outliner is ideal to serve as perimeter lighting across paths, terraces or parking lots, areas that function as passageway.

deltalight.com/outliner



IP54

OUTLINER			100
			L 1050mm
3000K CRI>90	LEDFLEX OUT 4,75W / 523lm / 24V-DC	IP54	**27810 9300** ◇
			◇ N ●
			Ⅲ


A

STIEVIE

Stievie is not your typical lighting bollard. The sharp pin underneath the luminaire allows you to install it in many different ways, like a spear has been thrown into the lawn. Its linear light generates a pleasant and warm light effect, ideal to light up a sculpture or to guide a way along the light.

deltalight.com/stievie

IP65





STIEVIE			STIEVIE	
			H 752mm	H 1302mm
3000K / CRI>80	LED TUBE 6W / 513lm / 24V-DC	IP65	**270 73 075** ◇	
	LED TUBE 10W / 873lm / 24V-DC			**270 73 130** ◇
			◇ N ●	
			INCL.1 x CABLE H05 RN-F 2 x 1mm2 2m INCL.PIN	
			Ⅲ	

A GLIMPSE OF ME
ON PAGE 74

C

FIND ME ONLINE

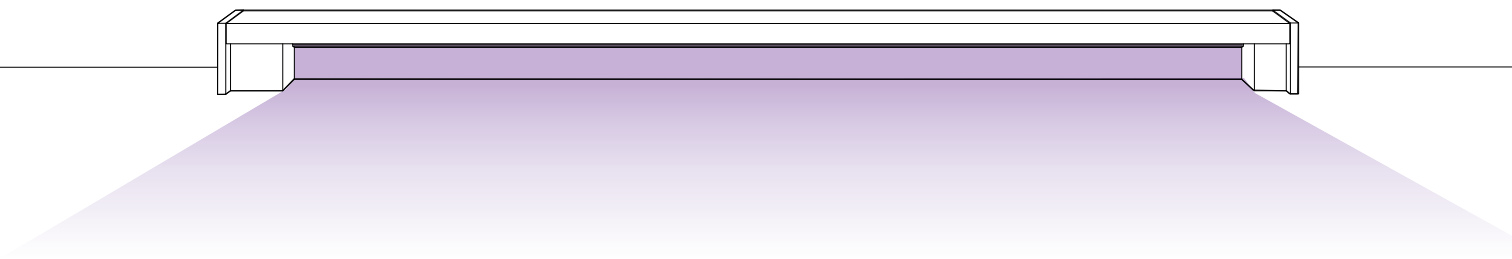

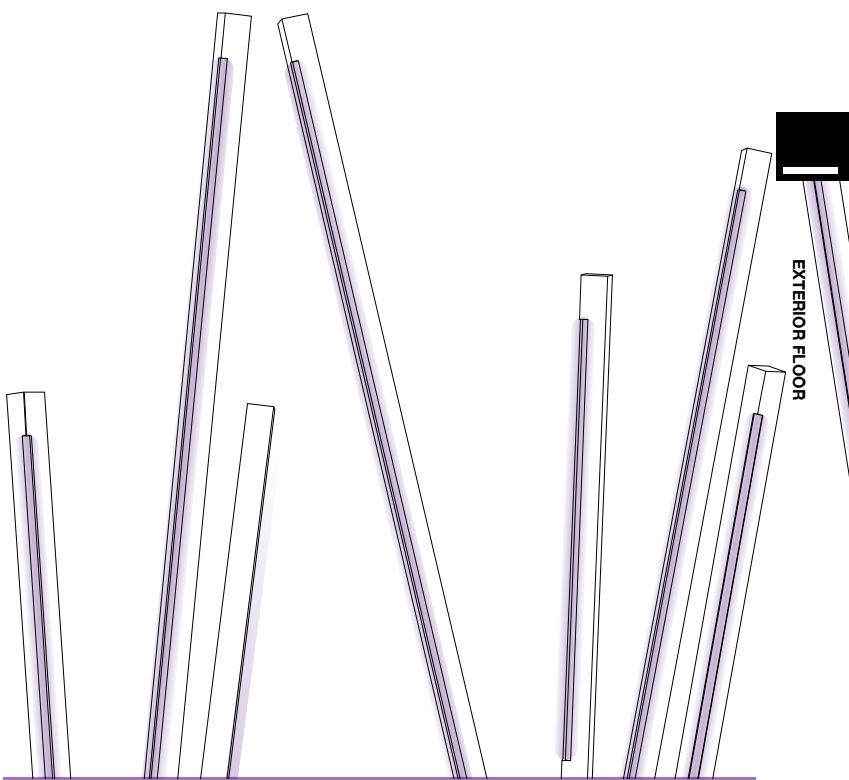

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY	
			OUTLINER 100	STIEVIE
LED POWER SUPPLY 24V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT				
1-10V DIM - 60W	**21012 0101**	150 x 53 x 35	R *	R *
DALI DIM - 60W	**21012 0135**	150 x 53 x 35	R *	R *
INSTALLATION				
CBOX	**216 12 00**		O	O
IP68 CONNECTION KIT	**216 12 01**			O
IP68 CONNECTOR 3P	**216 12 02**			O
2x PIN 11	**229 01 11**		O	

* REMOTE INSTALLATION

B

MONTUR


With Montur we offer a highly original interpretation of an archetypical concept: a light source that is contained within the framing of a 3D square or rectangular shape. The Montur is available in indoor and outdoor versions, as a ground, wall or ceiling fixture, with LED clusters or filament-LED lamps with a rustic look. The series integrates beautifully in both country-classic and contemporary homes, and is suitable for hotels and public buildings as well.


The Montur not only breathes new life into a classic concept, it also adds a detailed element of refinement. The sharply profiled framing in aluminium is utterly devoid of welding seams. For both the indoor and outdoor versions, there is a choice of finishing with either hand pressed transparent or opal glass. The opal glass version contains a milky, cone shaped core, with a transparent glass surface, creating a pleasantly diffused light that gives the lamp extra cachet. The indoor version of the Montur is also available as an open cube, with one or two bulbs, or in a rectangular shape with a powerful LED cluster concealed behind a protective cover in polycarbonate. By using them as outdoor fixtures, you can extend your lighting style into the garden or parking area. The outdoor versions are available in the same models as the indoor ones, but always feature a protective cover in glass or polycarbonate.
There is also a bollard version, with a choice of various heights.

deltalight.com/montur

IP54 IP55

A






MONTUR				S P LED			L P LED
				H 320mm	H 670mm	H 920mm	
3000K / CRI>80	LED 6W / 960lm / 350mA	IP55	NON DIM	**232 432 83** ◇	**232 472 83** ◇	**232 492 83** ◇	
	LED 13,3W / 1250lm / 500mA	IP54	MAINS				**232 659 83** ◇
					◇ B ●		◇ B ●
					100-240V / 50-60Hz		220-240V / 50-60Hz
					INCL.GLASS OPAL		

A GLIMPSE OF ME
ON PAG 58

C

FIND ME ONLINE

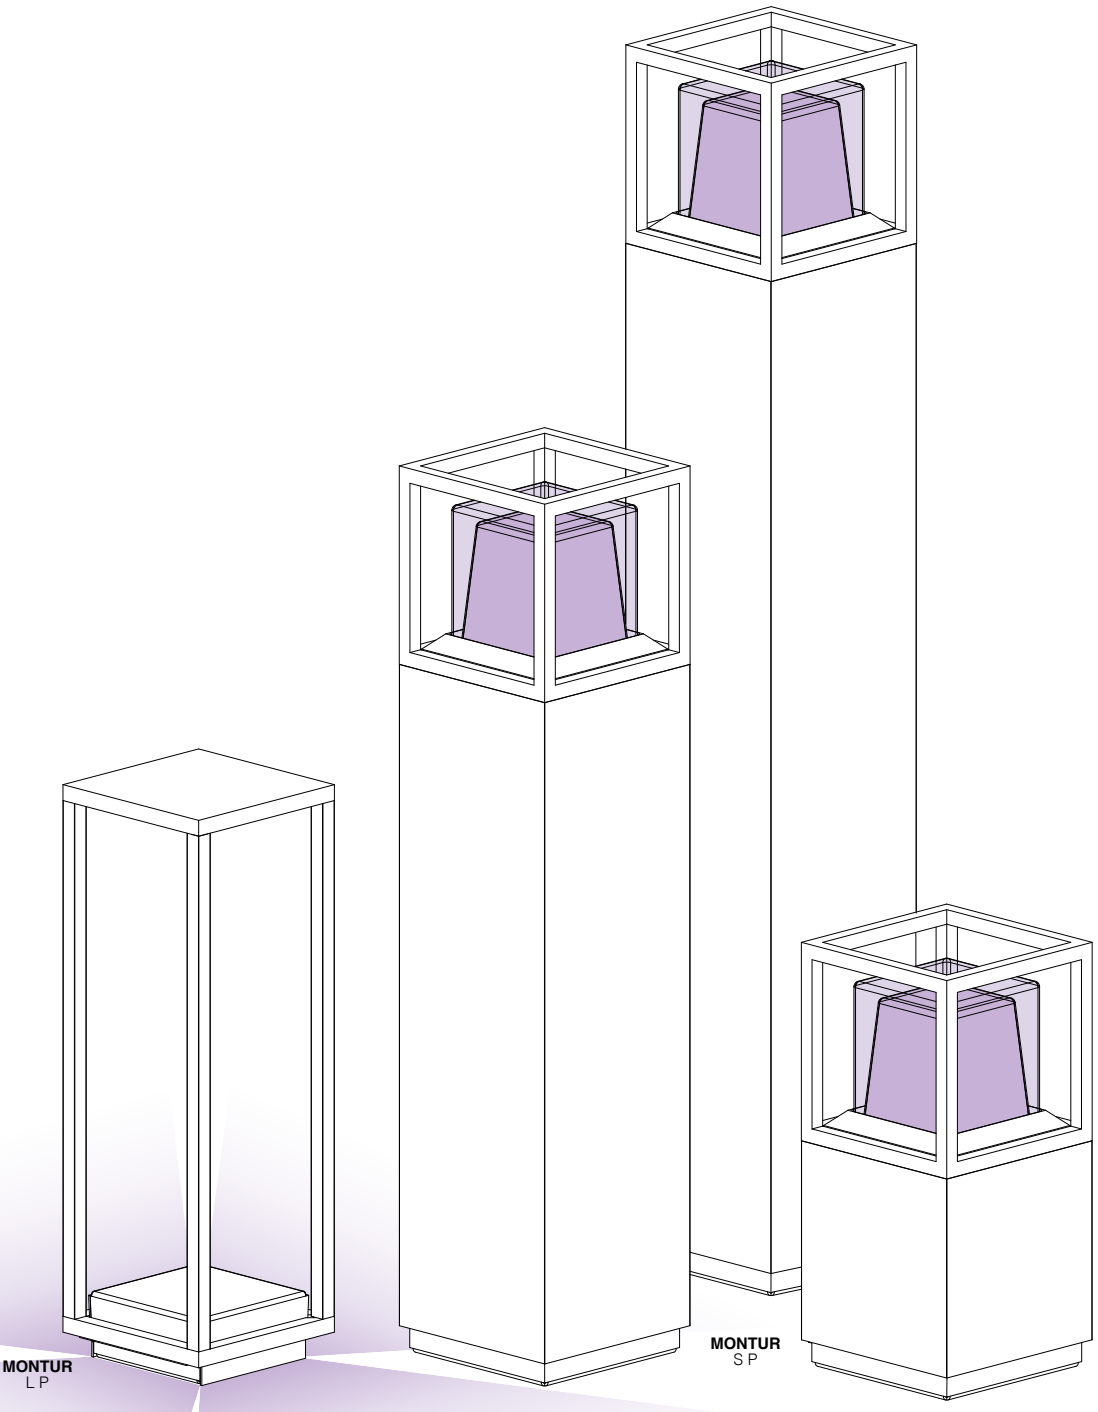

MONTUR
L P

MONTUR
S P

FINISH YOUR SPECIFICATION

			REQUIREMENT / OPTION / ACCESSORY	
			MONTUR	
			S P LED	L P LED
INSTALLATION				
CBOX	**216 12 00**		O	O
IP68 CONNECTION KIT	**216 12 01**		O	O
IP68 CONNECTOR 3P	**216 12 02**		O	O
PLATE 3	**229 02 03**		O	O


B


ELBO


Elbo can be used as functional lighting along a path thanks to the in-house developed lens. The lens solution creates a double effect with a wide general soft glow combined with a narrow delineated beam in the middle. According to the position in the luminaire, it can create a long line of light along a pathway or it can create a linear pattern as the light is thrown forward.

deltalight.com/elbo

IP55







ELBO			SYMMETRIC P		ASYMMETRIC P		BRIDGE P	
			H 400mm	H 600mm	H 400mm	H 600mm	H 200mm	H 600mm
3000K / CRI>80	LED 3.9W / 419lm / 350mA	IP55	**223 24 83** ◇	**223 26 83** ◇	**223 34 83** ◇	**223 36 83** ◇	**223 122 83** ◇	**223 126 83** ◇
					◇ A ● / B ●			
			100-240V / 50-60Hz		100-240V / 50-60Hz		INCL.SYMMETRIC LENS 100-240V / 50-60Hz	


A

WALKER


Split the light
Walker II splits the light open. Starting from 1 light source, Walker II is designed to guide the light into two directions to provide a double light effect on the surface below. The light falls on the V-shaped inner part of the luminaire, breaking it open and throwing it to the front- and backside
of the luminaire. Walker II can serve as a guiding light on your wall or pathway, as it comes as a wall luminaire and as a bollard. Different sizes, different heights and multiple colour combinations can be combined to your preference to create the perfect setting.


deltalight.com/walker


IP54




WALKER II			WALKER II					
			H 200mm	H 400mm	H 700mm	H 200mm	H 400mm	H 700mm
3000K CRI>90	LED 6,2W / 790lm / 350mA	IP54	**22628 9300** ◇	**22624 9300** ◇	**22626 9300** ◇			
						22629 9300 ◇	**22625 9300** ◇	**22627 9300** ◇
2700K CRI>90	LED 6,2W / 740lm / 350mA		**22628 9200** ◇	**22624 9200** ◇	**22626 9200** ◇			
						22629 9200 ◇	**22625 9200** ◇	**22627 9200** ◇
			◇ A ● / N ●			◇ A -N ●● / N-GC ●●		
			100-240V / 50-60Hz					



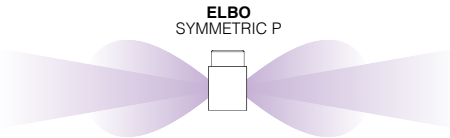


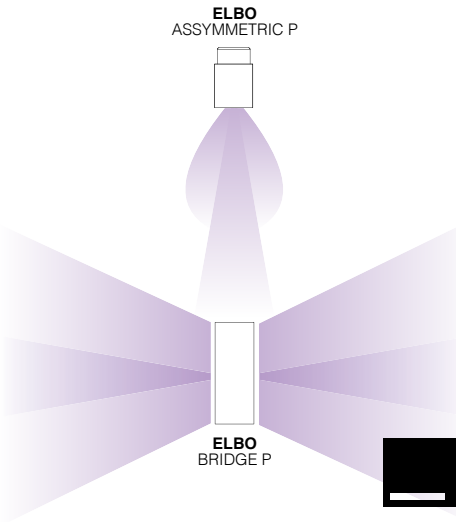

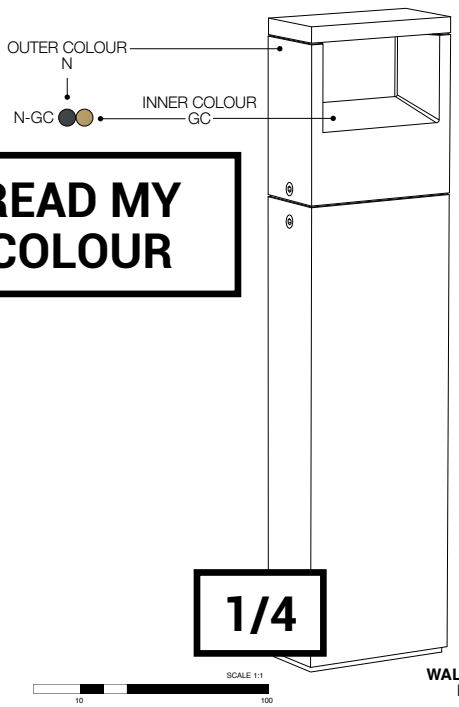


READ MY COLOUR

WALKER II

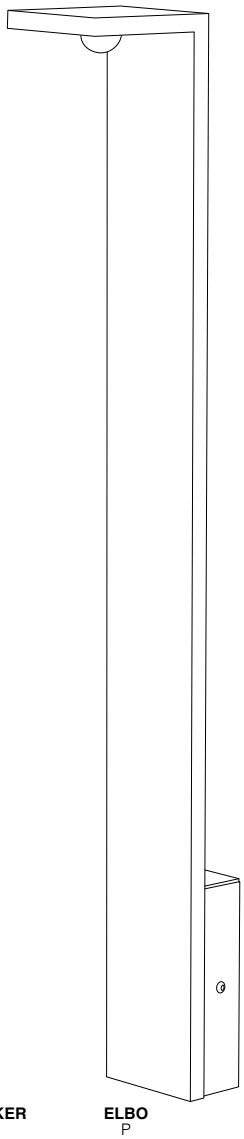

ELBO P

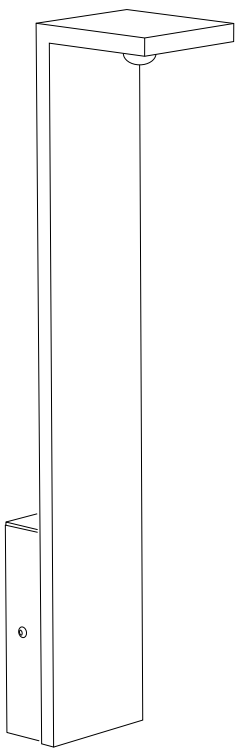



ELBO BRIDGE P

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY						
		ELBO			OBLIX			WALKER II
		SYMMETRIC P	ASYMMETRIC P	BRIDGE P	OBLIX S	OBLIX	OBLIX F	
INSTALLATION								
CBOX	**216 12 00**	O	O	O	O	O	O	O
IP68 CONNECTION KIT	**216 12 01**	O	O	O	O	O	O	O
IP68 CONNECTOR 3P	**216 12 02**	O	O	O	O	O	O	O
PIN 4	**229 01 04**			O				
PIN 11	**229 01 11**	O	O					
PIN 12	**229 01 12**					O		O
PIN 17	**15222 0170**				O			
PIN 18	**15222 0180**						O	
PLATE 7	**229 02 07**					O		O


B

OBLIX

The Oblix light effect tops any expectation. The unique design of this bollard and the positioning of its light unit results in maximum beam spread and a powerful play of light, providing an expressive and architectural touch to your project.
Oblix has a standard width of 150mm, while Oblix S is its smaller version of only 100mm wide. With its additional floor base, Oblix F increases the contact area between the bollard and its mounting surface for a more robust installation.
As such, one can opt for Oblix F for higher impact resistant bollards as it has an IK08 rating.
By shielding of the LED from sight, Oblix avoids direct exposure and dazzle, without compromising on light output.
Oblix can be directly installed on any hard surface or - when combined with a pin - be planted in any green surrounding.
Available in multiple heights from 150mm up to 1000m, in both alu grey and dark grey finish.

deltalight.com/oblix

IP55

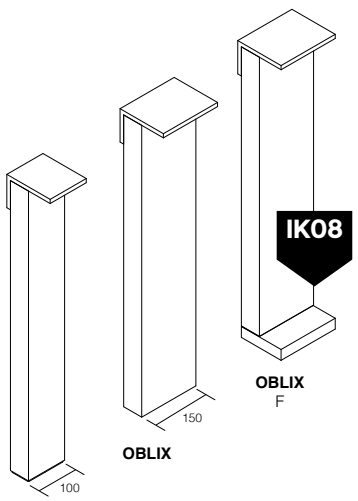


OBLIX
F


OBLIX


OBLIX
S

A

IK08










OBLIX			OBLIX S			OBLIX			OBLIX F		
			H 164mm	H 418mm	H 716mm	H 160mm	H 410mm	H 710mm	H 158mm	H 708mm	H 1018mm
3000K CRI>90	LED 7.1W / 812lm / 350mA	IP55	**15112 9300** ◇	**15113 9300** ◇	**15114 9300** ◇	**15118 9300** ◇	**220 74 811 930** ◇	**220 77 811 930** ◇	**15117 9300** ◇		
	LED 10.4W / 1128lm / 500mA									**15115 9300** ◇	**15116 9300** ◇
			◇ N ●			◇ A ○ / N ●			◇ A ○ / N ●		

120-240V / 50-60Hz
OBLIX F - H1018mm: 100-240V / 50-60Hz



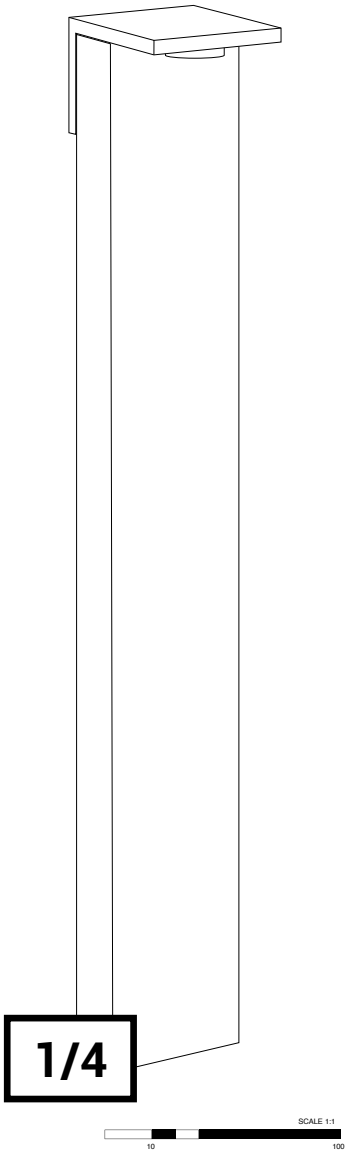

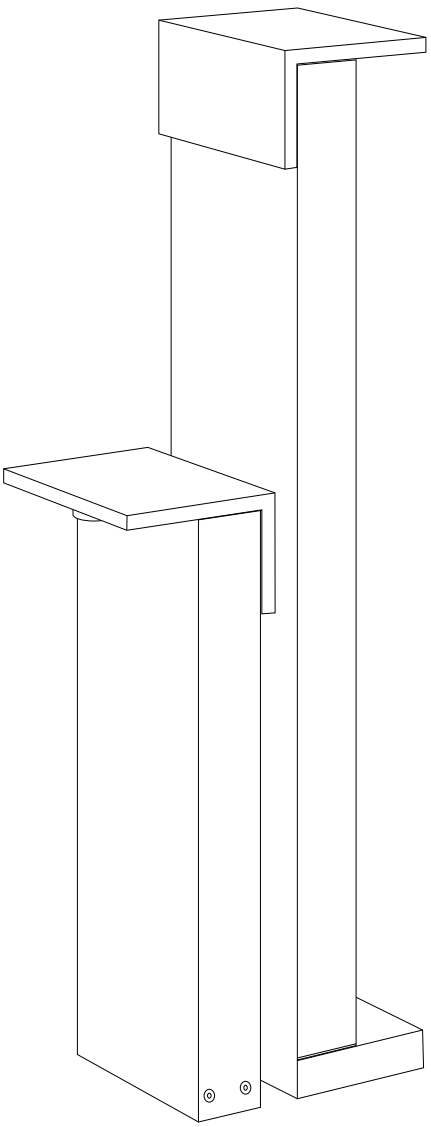

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY						
		ELBO			OBLIX			WALKER II
		SYMMETRIC P	ASYMMETRIC P	BRIDGE P	OBLIX S	OBLIX	OBLIX F	
INSTALLATION								
CBOX	**216 12 00**	O	O	O	O	O	O	O
IP68 CONNECTION KIT	**216 12 01**	O	O	O	O	O	O	O
IP68 CONNECTOR 3P	**216 12 02**	O	O	O	O	O	O	O
PIN 4	**229 01 04**			O				
PIN 11	**229 01 11**	O	O					
PIN 12	**229 01 12**					O		O
PIN 17	**15222 0170**				O			
PIN 18	**15222 0180**						O	
PLATE 7	**229 02 07**					O		O


B

STRIPER

If you are looking for a subtle floor surface light for outdoor use, the Striper might just be what you need. Due to its rather small size it is the perfect solution to light a path or driveway without disturbing the surrounding architecture or view of the nature around you. The rectangular shape of this product gives it a modern and sleek look. The combination of the powerled with a 4° LENS, results in a very long and narrow beam.

deltalight.com/striper

IP55



STRIPER		IK06	STRIPER
3000K / CRI>80	LED 2W / 245lm / 700mA	IP55 / 4°	**223 00 12** ◇

◇ A ● / N ●

120-240V / 50-60Hz


□

MONOPOL

Monopol is a bollard taking on the shape of a slender girder, rising from the ground up. Minimalistic in design, straightforward in functionality as it produces a very focused spread of light through its narrow opening at the front. Available in 2 sizes, 2 colors and perfect to create a play of light on paths or driveways.

deltalight.com/monopol

IP55




MONOPOL LED			MONOPOL LED	
			H 260mm	H 700mm
3000K / CRI>90	LED 7.1W / 812lm / 350mA	IP55	**223 16 811 930** ◇	**223 17 811 930** ◇


◇ A ● / N ●

100-240V / 50-60Hz

□



VISUAL COMFORT

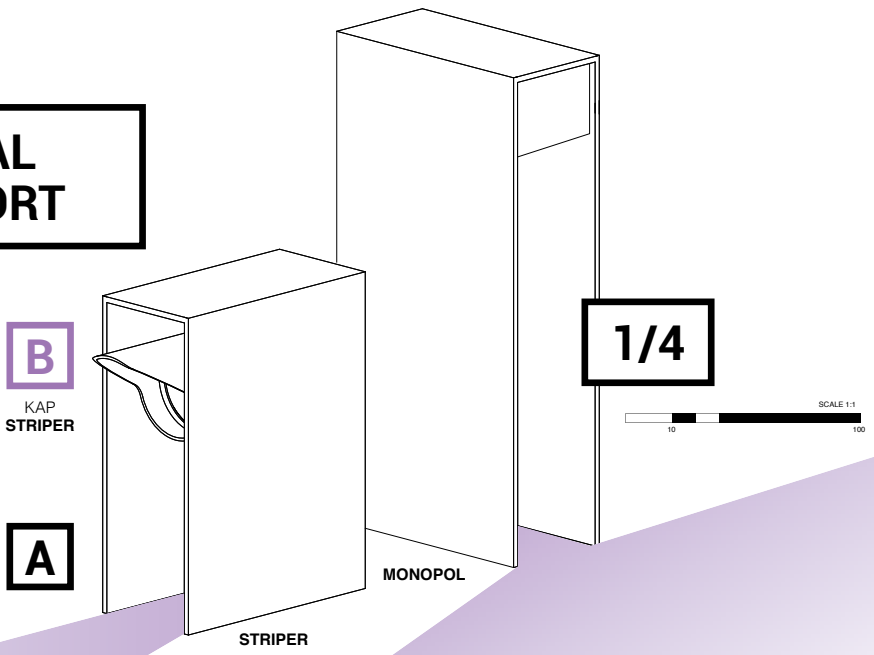

B

FINISH YOUR SPECIFICATION


			REQUIREMENT / OPTION / ACCESSORY	
			STRIPER	MONOPOL LED
HONEYCOMB / LENS / GLASS				
KAP STRIPER	**223 00 10 B**		A	
INSTALLATION				
CBOX	**216 12 00**		O	O
IP68 CONNECTION KIT	**216 12 01**		O	O
IP68 CONNECTOR 3P	**216 12 02**		O	O
PIN 1	**229 01 01**		O	O
PLATE 1	**229 02 01**		O	O


BAZIL

Bazil is characterized by an aluminum disc which holds a ring of leds, supported by a softly curved body that serves as a reflector, combining design and functionality.
The result is a pleasant, soft light that poses no risk of dazzling.
The large and more robust model fits perfectly around office buildings, public buildings, hotels and grand houses. Bazil comes in different colour combinations,
including Delta Light's unique dark grey.


deltalight.com/bazil

IP55

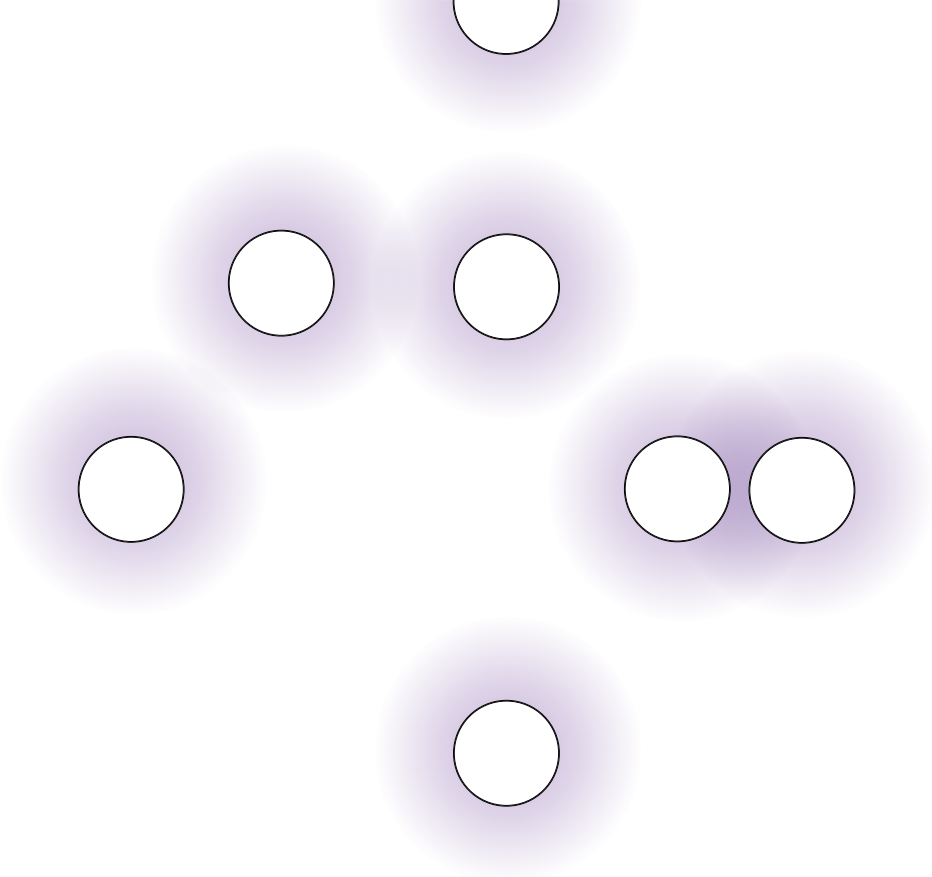

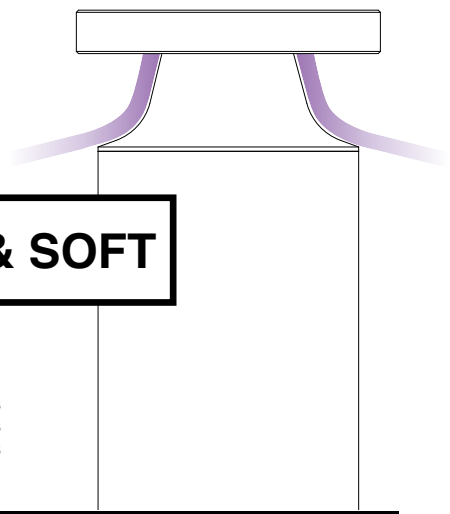

CURVED & SOFT



A

BAZIL		IK08	BAZIL		
			H 215mm	H 365mm	H 715mm
3000K / CRI>80	LED 11W / 735lm / 500mA	IP55	**222 121 12** ◇		
	LED 15W / 1020lm / 700mA			**222 123 12** ◇	**222 126 12** ◇


◇ A-ANO / N-ANO

110-240V / 50-60Hz

BAZIL, LALALALALALAAAAA

C

FIND ME ONLINE

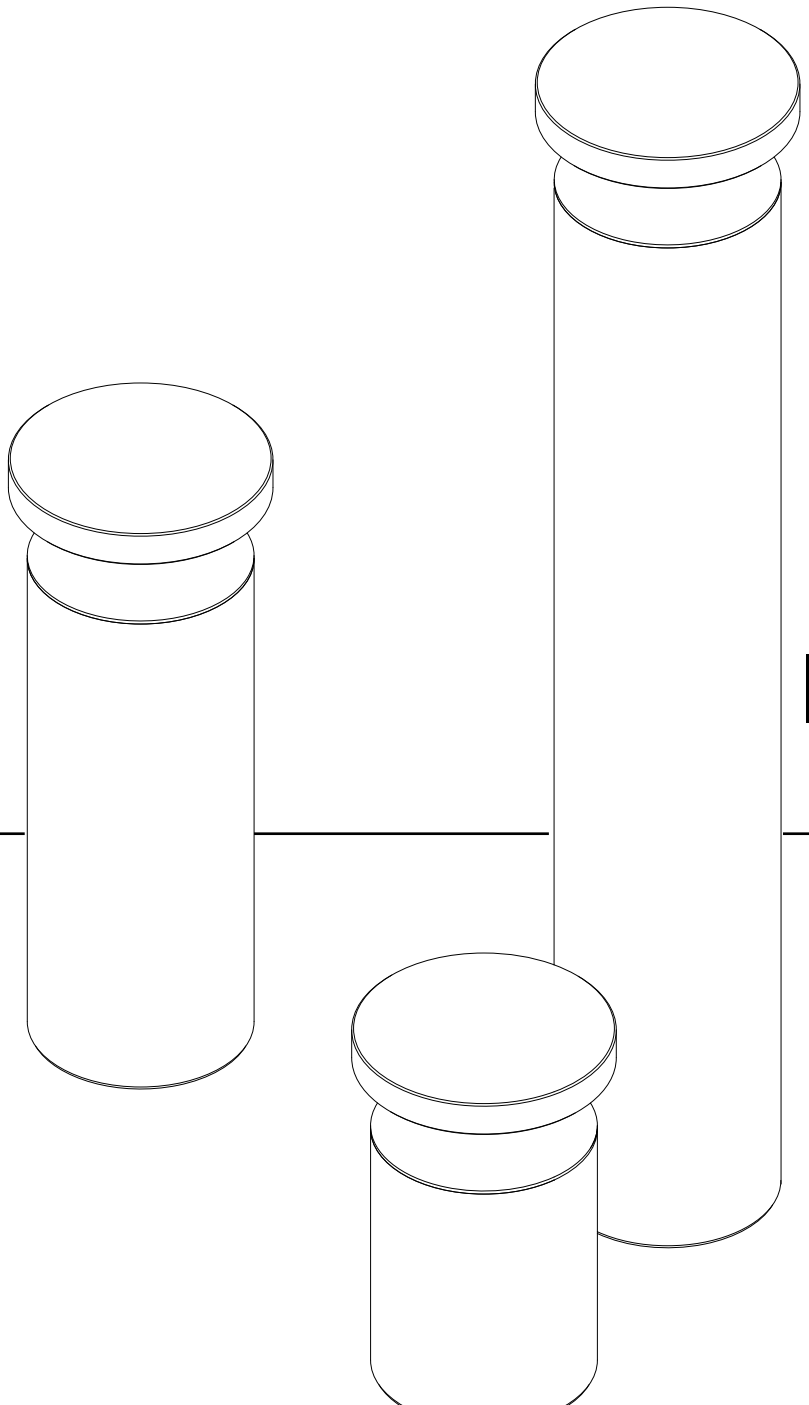

EXTERIOR FLOOR

FINISH YOUR SPECIFICATION			REQUIREMENT / OPTION / ACCESSORY
			BAZIL
INSTALLATION			
CBOX	**216 12 00**		O
IP68 CONNECTION KIT	**216 12 01**		O
IP68 CONNECTOR 3P	**216 12 02**		O
PIN 3	**229 01 03**		O

B

POLESANO

Polesano, a collaboration in product design between Dean Skira and Delta Light.
The goal was to develop a new concept in lighting instruments, designed specifically for urban settings, be that a pedestrian pathway, roadway, park, square, façade or landscape. It needed to provide maximum flexibility for the designer to combine different optical characteristics, whilst keeping the same aesthetic for the entire system, regardless
of the area.


The result is Polesano, offering modularity and flexibility, and providing personal involvement for the designer to meet specific functional and aesthetical needs of the project. Future developments can be integrating video surveillance, Wi-Fi, speakers or other IoT units.

DESIGN BY **DELTA LIGHT®** & **DEAN SKIRA**


deltalight.com/polesano

IP66


CTRL DELTA

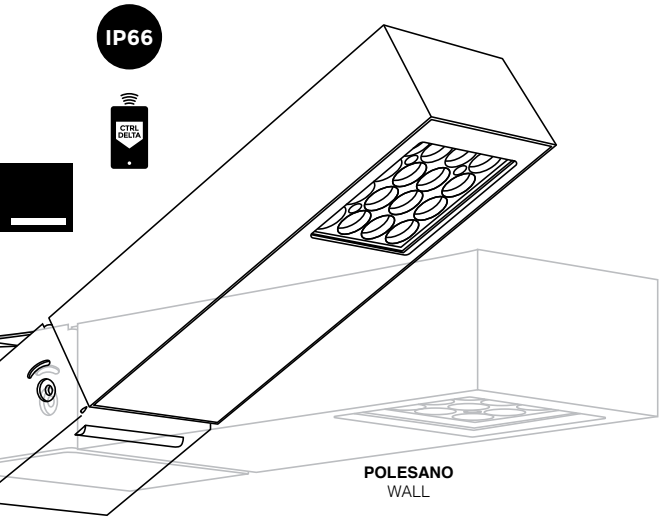


POLESANO
WALL

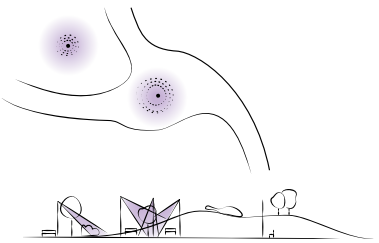


SPOT 13°

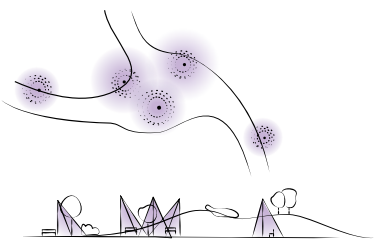

MEDIUM 47°

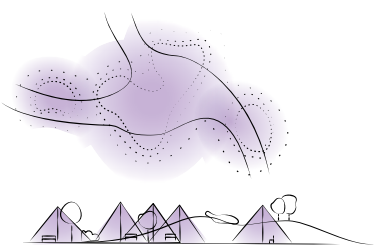



FLOOD 63°

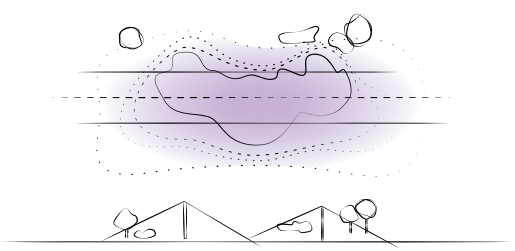


STREETLIGHT

Flexibility of multiple luminaires from a single infrastructure

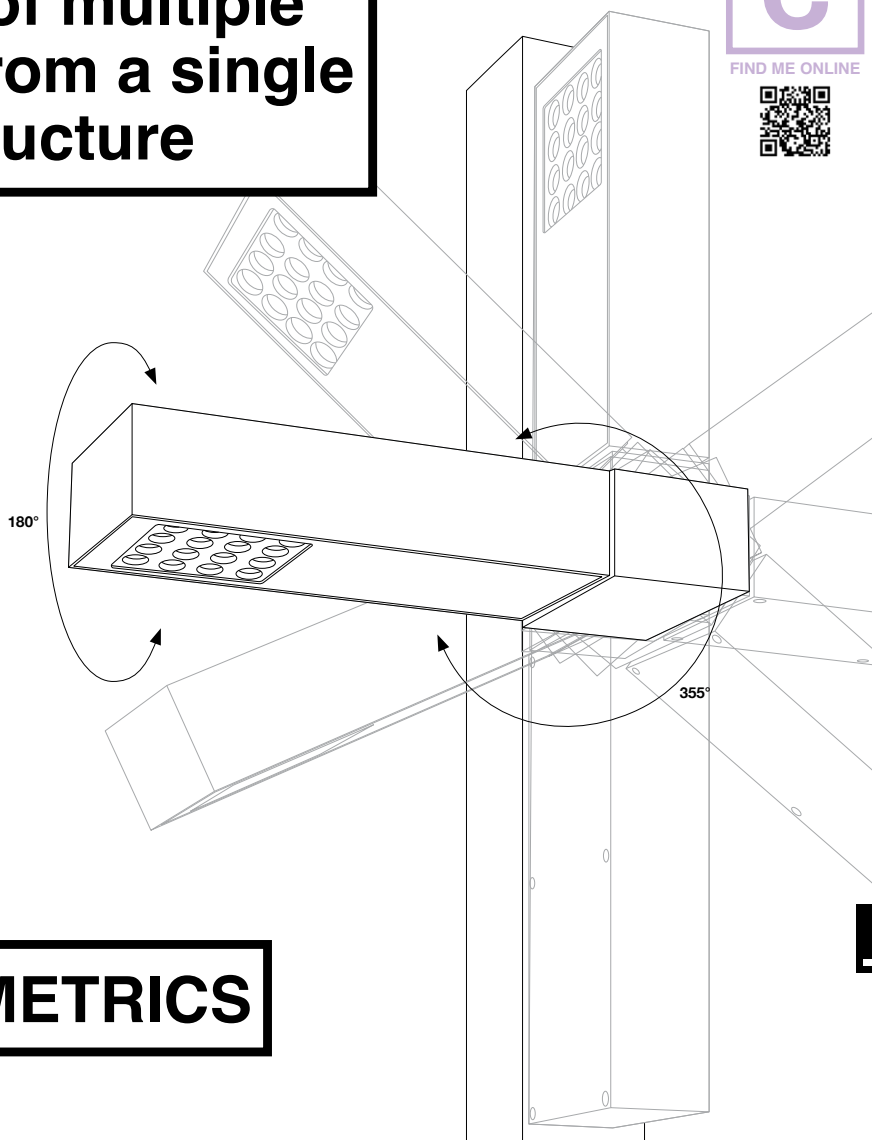




SPOT 13°




MEDIUM 47°

PHOTOMETRICS



FLOOD 63°



STREETLIGHT


THAT'S THE ONLY LIGHT I KNOW...


POLESANO
POLE

POLESANO

Conventional street lights primarily illuminate horizontal areas. However, this is not sufficient to meet the needs of today's landscape design and illuminate with impact.
The flexibility of the Polesano enables to illuminate vertically and horizontally, as the double axis in the connection box allows a 355° rotation from the luminaire vs. the pole and a 180° rotation from the luminaire itself.
In this way, any possible set-up can be achieved.


A








POLESANO	IK08			POLESANO (DALI-2 DIM)	POLESANO WALL NON DIM
4000K CRI>80	5040lm / 41,6W	IP66	SPOT 13°	**43 11 841** ◇	**15931 8410** ◇
			MEDIUM 47°	**43 11 842** ◇	**15931 8420** ◇
			FLOOD 63°	**43 11 843** ◇	**15931 8430** ◇
			STREET LIGHT	**43 11 844** ◇	**15931 8440** ◇
3000K CRI>80	4864lm / 41,6W		SPOT 13°	**43 11 831** ◇	**15931 8310** ◇
			MEDIUM 47°	**43 11 832** ◇	**15931 8320** ◇
			FLOOD 63°	**43 11 833** ◇	**15931 8330** ◇
			STREET LIGHT	**43 11 834** ◇	**15931 8340** ◇
				◇ N-B ●● / ◇ A-B ●●	◇ N-B ●●

220-240V / 0I50-60Hz











POLESANO	IK08		POLE 4m H 4000mm ANCHORAGE 800mm	POLE 4m H 4000mm BASE PLATE RECESSED	POLE 6m H 6000mm ANCHORAGE 1000mm	POLE 6m H 6000mm BASE PLATE RECESSED
1 LUMINAIRE		IP54	**431 400 111 11** ◇	**431 400 221 11** ◇	**431 600 121 11** ◇	**431 600 321 11** ◇
2 LUMINAIRES - 1 LEVEL			**431 400 111 211** ◇	**431 400 221 211** ◇	**431 600 121 211** ◇	**431 600 321 211** ◇
2 LUMINAIRES - 2 LEVELS			**431 400 111 221** ◇	**431 400 221 221** ◇	**431 600 121 221** ◇	**431 600 321 221** ◇
3 LUMINAIRES			**431 400 111 31** ◇	**431 400 221 31** ◇	**431 600 121 31** ◇	**431 600 321 31** ◇
4 LUMINAIRES			**431 400 111 41** ◇	**431 400 221 41** ◇	**431 600 121 41** ◇	**431 600 321 41** ◇

◇ N ● / ◇ A ●

220-240V / 0I50-60Hz
INCL. 1 x CABLE H05 RN-F 4 x 1mm² / LUMINAIRE
INCL. WIRING

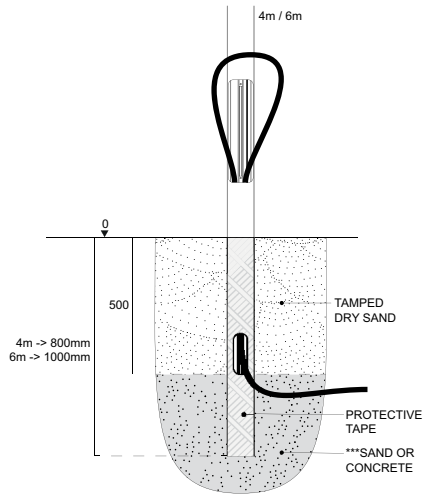


ANCHORAGE 800/1000mm

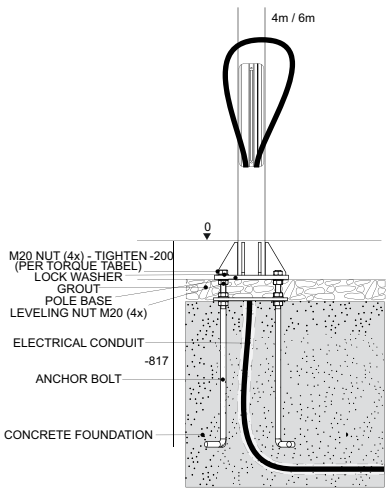


BASE PLATE RECESSED
+ PLATE 11

B




B

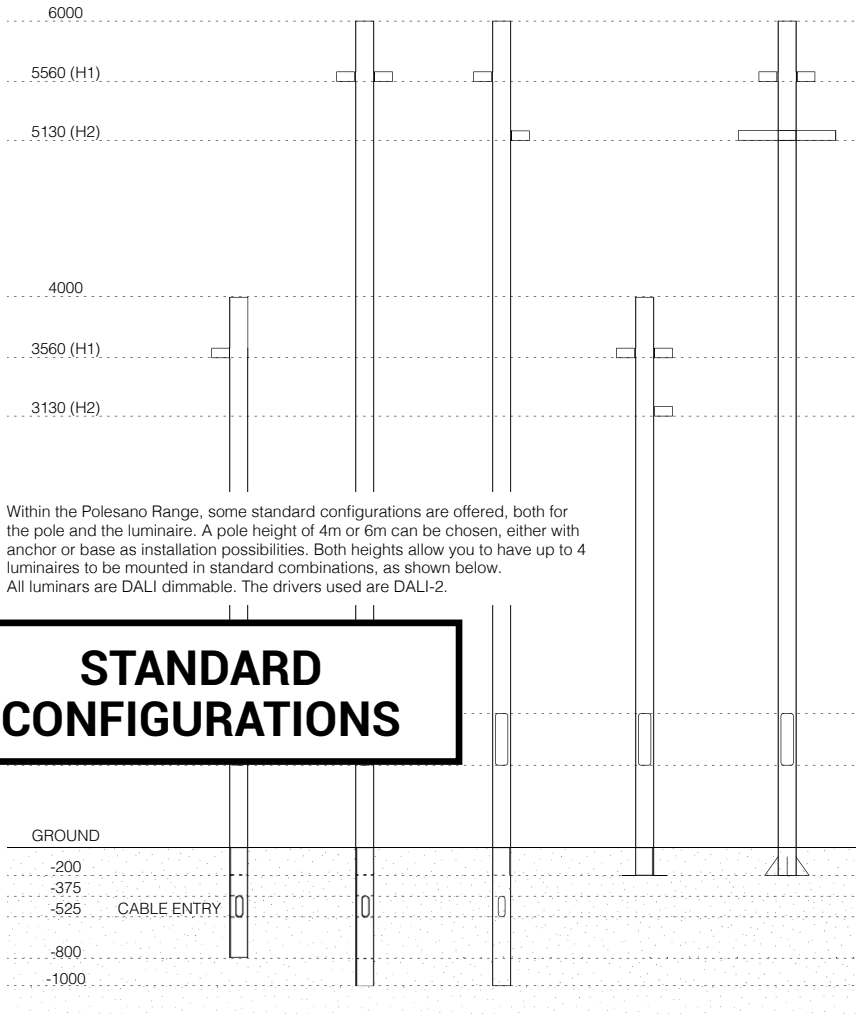

Within the Polesano Range, some standard configurations are offered, both for the pole and the luminaire. A pole height of 4m or 6m can be chosen, either with anchor or base as installation possibilities. Both heights allow you to have up to 4 luminaires to be mounted in standard combinations, as shown below.
All luminars are DALI dimmable. The drivers used are DALI-2.

STANDARD CONFIGURATIONS

HEAD COMBINATIONS (TOPVIEW) :
(POSSIBLE WITH ALL TYPES OF POLE)

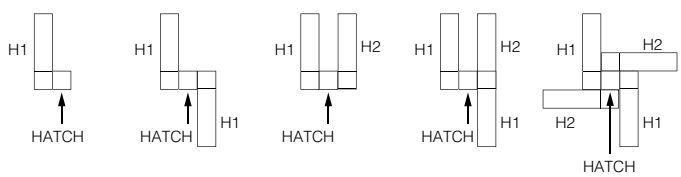

EXTERIOR FLOOR

B

FINISH YOUR SPECIFICATION

		REQUIREMENT / OPTION / ACCESSORY		
		POLESANO	POLESANO WALL	POLESANO POLE
HONEYCOMB / LENS / GLASS				
HONEYCOMB S105	**431 03 01 B**	A	A	
LINEAR SPREAD LENS S105	**431 03 02**	A	A	
INSTALLATION				
FUSE BOX	**431 99 01**			O
IP68 JUNCTION BOX 4P	**431 99 02**			O
IP68 CONNECTOR 4P	**21034 0010**			O
PLATE 11	**229 02 11**			O *
FINISH				
CAMERA (INCL. CABLE RJ 45)	**15932 0020 A-B / N-B**			O **
WIFI PUCK (INCL. CABLE RG 58)	**15932 0030 A / N**			O

ALL ELECTRICAL CONNECTION NEED TO COMPLY WITH IP53 REGULATIONS
* ONLY FOR VERSION WITH BASE PLATE
** POWER SUPPLY VIA POE / 8W

Lighting is still a fast-changing business due to the evolution in led.
On the following pages we inform you on some typical characteristics of led and show you the possibilities on how to connect, switch and dim power supplies in a correct way. Further in this chapter you can find specific technical information on options, requirements and accessories.

OPTIONS
Depending on the material in which the luminaire will be installed, options can be used for the installation of a luminaire but are not necessary.

REQUIREMENTS
Needed for a proper installation of the luminaire.

ACCESSORIES
To modify the beam of the luminaire.

Technical

WIRELESS CONTROL

Delta Light introduces **CTRL DELTA**, enabling you to control and manage a selection of LED luminaires via mobile devices (Apple or Android). In essence, all dimmable luminaires can be wireless controlled, as long as the required components are either integrated or installed externally. Throughout this Lighting Bible®, the symbols below show if wireless control is possible with the luminaire in question.

CTRL DELTA INSIDE
WIRELESS CONTROL IS STANDARD AND THE LUMINAIRE HAS THE REQUIRED COMPONENT INTEGRATED.

CTRL DELTA READY
LUMINAIRE CAN BE WIRELESS CONTROLLED, BUT REQUIRES AN EXTERNAL COMPONENT. IN ORDER TO ENSURE THE BEST INTERACTION, THIS COMPONENT NEEDS TO BE INSTALLED NEARBY THE LUMINAIRE. INSTALLATION OPTIONS NEED TO BE CHECKED ACCORDING TO THE NATURE OF THE LUMINAIRE AND THE INSTALLATION POSSIBILITIES.

Easy to install. You don't need any new wiring, switches, devices or networks.
Plug in the lighting fixture and pair it with your smartphone or tablet.
No other configurations needed.

Easy to use. You can control your lights with an intuitive and visual user interface on your smartphone or tablet.

Easy to enjoy. With a tap on your smartphone you can set the ambience.
With the Casambi App you can control your luminaires individual or in groups.

How to in 5 easy steps
1. Order your desired CTRL DELTA unit (not standard included with luminaire)
2. Install the CTRL DELTA unit
3. Download the Casambi App in the App or Play Store.
4. Find your CTRL DELTA unit in the Casambi app, using Bluetooth.
5. Take a picture of your room and place the light controls upon the related pictures. Now you can visually manage your luminaires directly through the picture.


For more information and technical info please go to
deltalight.com/CTRLDELTA


TEC




CTRL DELTA IDENTITY KIT	
RF TECHNOLOGY	
GATEWAY	OPTIONAL*
MOBILE PLATFORM	
APPLE HOME	COMPATIBLE PENDING
WALL SWITCH	WIRELESS SWITCH PUSH BUTTON INTERFACE
NODES PER NETWORK	128 (IN & OUT)
iBEACON PROXIMITY	YES
AVAILABLE HARDWARE	1-10V DALI FE DIMMING 4 CHANNEL FLEX INTERFACE

* For external communication only

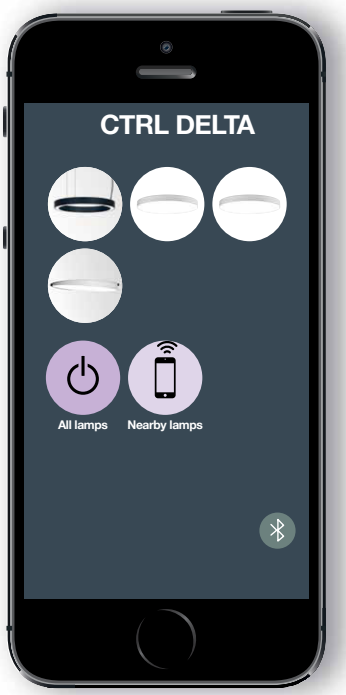





WIRELESS CONTROL


WIRELESS CONTROL DIM8


300 90 004 ED8

100-240V / 0,6A

IP20

MAINS VOLTAGE E27/GU10 max.150W
LOW VOLTAGE + ELECTRONIC TRANSFO max.50W
LED POWER SUPPLY + LED max.50W



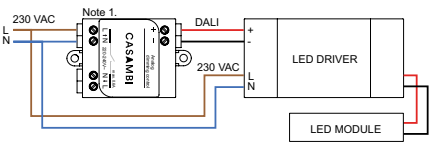

WIRELESS CONTROL


WIRELESS CONTROL DIM5


300 90 004 ED5

220-240V / 0,6A

max.4 DALI DEVICES

IP20



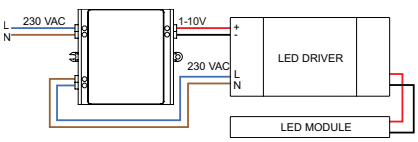


WIRELESS CONTROL


WIRELESS CONTROL 5A DIM1

300 90 016 ED1

100-240V / 5A

IP20



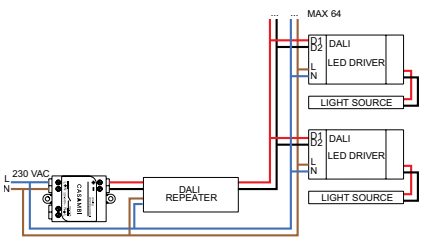


WIRELESS CONTROL

DALI REPEATER

300 90 137

max.64 DALI DEVICES
max.DISTANCE 300m

IP20




WIRELESS CONTROL

WIRELESS CONTROL
4 CHANNEL WHITE

300 90 005

12/24V-DC / 4 x 4A

IP20

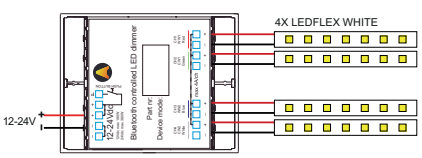


WIRELESS CONTROL
2 CHANNEL TUNABLE WHITE

300 90 006

12/24V-DC / 2 x 4A

IP20

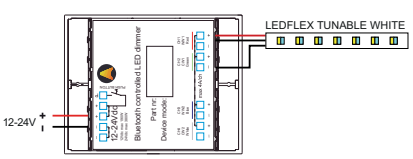


WIRELESS CONTROL
RGB


300 90 007

12/24V-DC / 3 x 4A

IP20

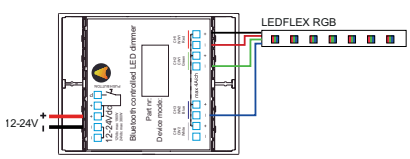

WIRELESS CONTROL FOR LEDFLEX RGBTW:
USE **300 90 007** and **300 90 006**



WIRELESS CONTROL

WIRELESS CONTROL DIM5 + DALI GATEWAY

21032 0065

DUAL MODE
WIRELESS CONTROL MODE:
BROADCAST 1 ADRESS:
DALI or DT8 TW or DT8 RGB or DT8 RGB TW*
(MAX. 35 DALI DEVICES)
DALI POWER SUPPLY REQUIRED
(21032 0075)


DALI GATEWAY MODE:
1 ADRESS/CTRL DELTA DEVICE

MAX DALI BUS CURRENT: 250mA
VOLTAGE RANGE: 9,5-22,5V-DC


IP20


*selection to be made in app

WIRELESS CONTROL MODE

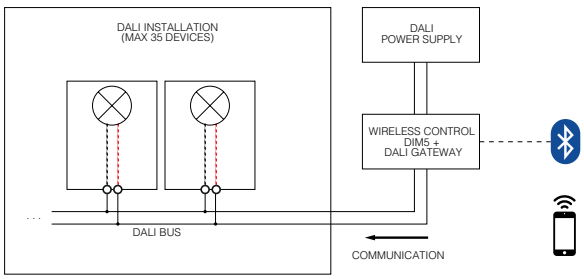

DALI GATEWAY MODE

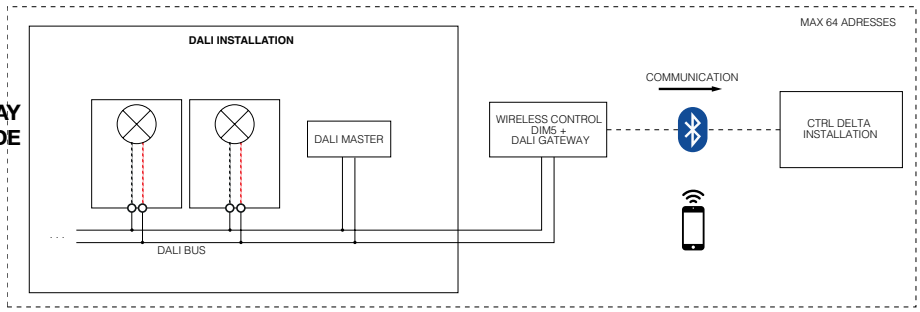




DALI

DALI POWER SUPPLY

21032 0075

DALI OUTPUT CURRENT:
70mA
DALI VOLTAGE RANGE:
13,6-18,4V-DC
220-240V / 50-60Hz
IP20




WIRELESS CONTROL

M-WIRELESS CONTROL DIM5

21032 0085

MAX. 64 DALI DEVICES
DIVIDED INTO 8 GROUPS.
EACH GROUP CAN BE
CONTROLLED SEPARATELY.

IP20





WIRELESS CONTROL


CTRL DELTA GATEWAY


21032 0090

CASAMBI APP
PRE-INSTALLED
220-240V / 50-60Hz
IP20

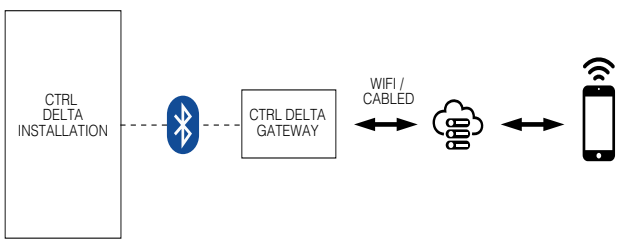







CTRL DELTA TRANSMITTER

WIRELESS SWITCH

300 90 312 ◇

◇ B ● / W ○

BATTERY POWERED
5 YEAR LIFETIME
4 FUNCTIONS

IP20

WIRELESS PUSH BUTTON INTERFACE

300 90 009

BATTERY POWERED
5 YEAR LIFETIME
4 FUNCTIONS EXTERNAL PUSH BUTTON
TYPE OF FUNCTION
SET BY CTRL DELTA

IP20

WIRELESS PUSH BUTTON INTERFACE 24V-DC


21032 0020

24V-DC

4 FUNCTIONS EXTERNAL PUSH BUTTON
TYPE OF FUNCTION
SET BY CTRL DELTA

IP20

NEW




SENSOR

AMBIENT LIGHT SENSOR + 24V DIMMER (PWM)

21032 0320

INPUT 24V-DC
OUTPUT 24V-DC (PWM) max. 5A


IP67

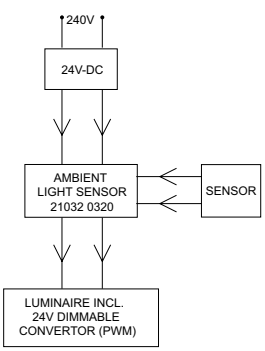



SMART 48 PATENTED

SMART 48: Dimming 48V luminaires or profiles by 2 wires! It collects the power from the 48V power supply and combines it with a DALI, 1-10V or Touch Dim input and sends it to the 48V converter in the luminaire. With the Dimmable Modulator 48V-DC DIM9, dimming can be done by only using 2 wires for both power and dimming. Or dimming can be done wireless, by choosing for the Wireless Dimmable Modulator 48V-DC.

SMART 48 IN

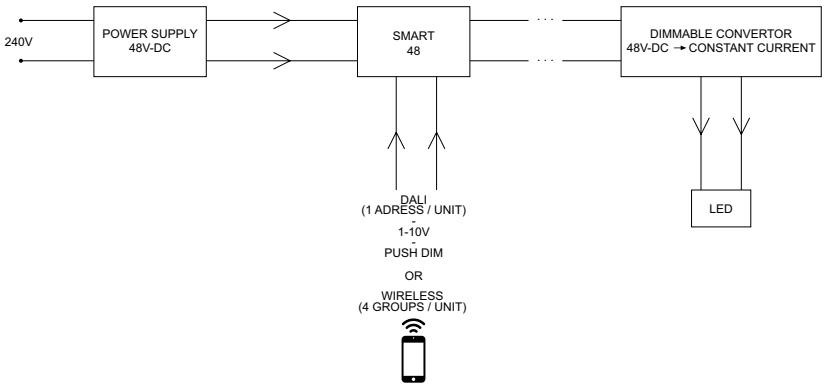






SMART 48 DIMMABLE MODULATOR	DIM9	WD	PLUG-IN WD
IP20	**300 90 011**	**300 90 012**	**21032 0030**
	1-10V / DALI / PUSH DIM	WIRELESS	WIRELESS
		48V-DC	
		MODULATED 48V-DC + DIM (MAX.200W)	

TEC


TECHNICAL

PRESENCE DETECTION


PRESENCE DETECTION
By adding a presence detection sensor to a luminaire, energy consumption can be reduced while user comfort is raised. The sensor can switch luminaires on or off, according to the occupation in the room and the specific needs and wishes of the user. Time between departure and lights off (hold time), plus the detection zone, can be programmed to match the needs of your project.
The presence detection sensor is particular for the Supernova Line range and needs to be installed inside the luminaire, avoiding visible sensors and resulting in clean ceilings and walls.

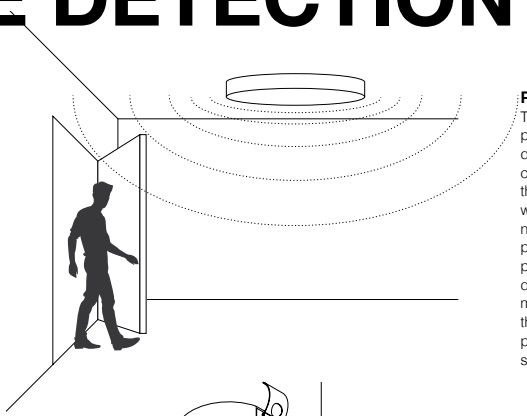

PRESENCE + DAYLIGHT DETECTION
Together with presence detection, also daylight detection provides energy savings in spaces with a lot of incoming daylight. The sensor captures the amount of daylight coming into the room and changes the light output of the luminaire according to the specific level of lux that is wanted in the room. In this way, luminaires will provide nearly no light on bright, sunny days and will be at full power on cloudy, grey days. To be used in the Streamliner profile, this sensor combines both presence and daylight detection, to allow you to reduce energy consumption to a minimum. For proper functioning of the daylight detection, this sensor needs to be visible and comes in an additional profile module. A remote control can be used to change the settings to your preference.



68 x 40



68 x 40

NEW

ST-SENSE

DALI PRESENCE & DAYLIGHT SENSOR


IP20


21032 0205 ◇

◇ B ●

Ⅲ

DETECTION PATTERN 84°





WIRELESS SENSOR HUB


21032 0210 ◇


◇ B ●

Ⅲ

PRESENCE & DAYLIGHT
TEMPERATURE & HUMIDITY - AIR QUALITY

DETECTION PATTERN 94° x 82°





NEW

HF SENSOR

PRESENCE + DAYLIGHT DETECTION HF SENSOR

SRL-AMBIENT LIGHT & MOTION SENSOR DIM2

IP20

389 92 00 ED2 ◇

◇ ANO ○ / B ● / W ○

I

220-240V / 50-60Hz

INFRARED PROGRAMMING UNIT
300 90 019


PRESENCE DETECTION HF SENSOR

300 90 311


220-240V / 50-60Hz
INVISIBLE MOUNTING - MAX. 400W LED POWER

2 / LIGHT LEVEL Ⓓ
BASED ON DAYLIGHT


3 / DELAY TIME Ⓐ **+**
CORRIDOR FUNCTION ⒷⒸ

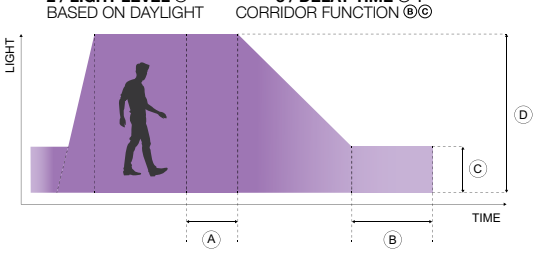

3 SETTINGS
1 / DETECTION PATTERN




3 SETTINGS
1 / DETECTION PATTERN



2 / HOLD-TIME
5 SECONDS / 30 MIN



3 / DAY-NIGHT





TEC


LAMPS


LED SOLUTION















LED FILAMENT E27


A60 E27 6W 2700K	T64 E27 8W 2700K	GL80 E27 8W 2700K	GL95 E27 8W 2700K	GL125 E27 6W 2700K
CRI>80	CRI>80	CRI>80	CRI>80	CRI>80
670lm / 6W	870lm / 8W	870lm / 8W	950lm / 8W	800lm / 6W
NON DIM	NON DIM	NON DIM	NON DIM	NON DIM
21024 0120	**309 109 01 27**	**309 109 02 27**	**309 109 03 27**	**309 109 06 27**
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
IP20	IP20	IP20	IP20	IP20














A60 E27 6W 2200K - MIST	T30 E27 12W 2200K	GL80 E27 6W 2200K - SMOKE	GL95 E27 6W 2200K - SMOKE	GL95 E27 6W 2200K - SMOKE
CRI>90	CRI>90	CRI>90	CRI>90	CRI>90
470lm / 6W	550lm / 12W	250lm / 6W	250lm / 6W	250lm / 6W
MAINS DIMMING (FE)	MAINS DIMMING (FE)	MAINS DIMMING (FE)	MAINS DIMMING (FE)	MAINS DIMMING (FE)
21024 0130	**21024 0110**	**21024 0060**	**21024 0080**	**21024 0090**
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
IP20	IP20	IP20	IP20	IP20







NEW



T64 E27 6W 2200K - SMOKE	GL95 E27 8W 2700K - GOLD	GL125 E27 8W 2700K - GOLD	T45 E27 8W 2700K - MIST
CRI>90	CRI>80	CRI>80	CRI>80
250lm / 6W	800lm / 8W	800lm / 8W	900lm / 8W
MAINS DIMMING (FE)	NON DIM	NON DIM	MAINS DIMMING
21024 0070	**309 109 04 27**	**309 109 05 27**	**21024 0280**
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
IP20	IP20	IP20	IP20



HALOLED

HALOLED Hi - 40° (4,5W) WW
2700K / CRI90
350lm / 4,5W
36°
MAINS DIMMING (FE)
309 107 38 32
GU10 / 220-240V / 50-60Hz
IP20

LEDFLEX

LEDFLEX IN INCL.10 SILICONE MOUNTING BRACKETS
LEDFLEX OUT INCL. 10 SILICONE MOUNTING BRACKETS + 3 ENDCAPS CLOSED + 3 ENDCAPS HOLES



5m - 24V-DC
NOT MOUNTED

LEDFLEX		WHITE	WHITE MP	WHITE FP	WHITE HP	SOFT DIM	TW	RGB	RGB / TW
		Dividable per 50mm 140 smd LED/m	Dividable per 33,3mm 210 smd LED/m	Dividable per 62,5mm 128 smd LED/m	Dividable per 50mm 160 smd LED/m	Dividable per 62.5mm 224 smd LED/m	Dividable per 71,42mm 224 smd LED/m	Dividable per 50mm 120 smd LED/m	Dividable per 62,5mm 96 smd LED/m
		5W/m 551lm/m	**10W/m 1045lm/m**	**15W/m 1853lm/m**	**20W/m 2470lm/m**	**18W/m 1460 lm/m**	**9,5W/m [1] 1116lm/m**	**11W/m**	**19,2W/m [2]**
4000K CRI > 90	IN	**21030 0060**	**21030 0140**	**21030 0220**	**21030 0300**				
	OUT (IP65)	**21030 0100**	**21030 0180**	**21030 0260**					
3000K CRI > 90	IN	**21030 0040**	**21030 0120**	**21030 0200**	**21030 0280**				
	OUT (IP65)	**21030 0080**	**21030 0160**	**21030 0240**					
2700K CRI > 90	IN	**21030 0030**	**21030 0110**	**21030 0190**	**21030 0270**				
	OUT (IP65)	**21030 0070**	**21030 0150**	**21030 0230**					
1800K ▸ 3000K CRI > 90	IN					**21030 0020**			
	OUT (IP65)								
2700K ▸ 6000K CRI > 90	IN						**21030 0390**		
	OUT (IP65)								
RGB CRI > 90	IN							**21030 0400**	
	OUT (IP65)							**21030 0410**	
RGB WW / TW [2] CRI > 90	IN								**21030 0420**
	OUT (IP65)								

LED POWER SUPPLY 24V-DC (MAX. 3M/POWERLINE FOR LEDFLEX > 15W/M)

NON DIM	24W / IP20	**21012 0160**	max. 4,8m	max. 2,4m	max. 1,6m	max. 1,2m	max. 1,3m	max. 1,2m	max. 2,1m	max. 1,2m
	150W / IP67	**300 89 24 150**	max. 30m	max. 15m	max. 10m	max. 7,5m	max. 8,3m	max. 7,8m	max. 13,6m	max. 7,8m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP20	**21012 0181**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP20	**21012 0191**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
	60W / IP67	**21012 0101**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0111**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0121**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*
DALI DIM (DIM5)	60W / IP20	**21012 0205**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	100W / IP20	**21012 0225**	max. 20m	max. 10m	max. 6,6m	max. 5m	-	max. 5,2m*	max. 9m*	max. 5,2m*
	60W / IP67	**21012 0135**	max. 12m	max. 6m	max. 4m	max. 3m	-	max. 3,1m*	max. 5,4m*	max. 3,1m*
	90W / IP67	**21012 0145**	max. 18m	max. 9m	max. 6m	max. 4,5m	-	max. 4,6m*	max. 8,1m*	max. 4,6m*
	120W / IP67	**21012 0155**	max. 24m	max. 12m	max. 8m	max. 6m	-	max. 6,2m*	max. 10,9m*	max. 6,2m*

CONTROL

	RGB / RGB TW DRIVER						**300 90 331**	**300 90 331**	**21032 0010**
	TOUCH CONTROLLER						**300 90 332**	**300 93 330**	**21032 0120**
WDL	24V-DC DIM UNIT					**300 90 010**			
1-10V						**300 90 003 ED1**			
DALI DIM						**300 90 003 ED5**			

[1] 9,5W IS MAXIMUM POWER FOR COMBINATION OF TUNABLE WHITE COLOURS
[2] RGB = 11,52W/m - TW = 3,4W/m - TW = 2700-6000K
* TO BE USED AS NON DIM

TEC


LEDFLEX CL



5m - 24V-DC
NOTvMOUNTED

		Dividable per 25 mm Continuous LED
		9W/m 608lm/m
LEDFLEX CL		**LEDFLEX IN/OUT**
4000K CRI > 90	IN	**21030 0340**
	OUT	**21030 0380**
3000K CRI > 90	IN	**21030 0320**
	OUT	**21030 0360**
2700K CRI > 90	IN	**21030 0310**
	OUT	**21030 0350**

LED POWER SUPPLY 24V-DC (MAX. 5M/POWERLINE)			
NON DIM	24W / IP20	**21012 0160**	max. 2,6m
	150W / IP67	**300 89 24 150**	max. 16,6m
0-10V DIM (DIM1)	60W / IP20	**21012 0171**	max. 6,6m
	90W / IP20	**21012 0181**	max. 10m
	120W / IP20	**21012 0191**	max. 13,3m
	60W / IP67	**21012 0101**	max. 6,6m
	90W / IP67	**21012 0111**	max. 10m
	120W / IP67	**21012 0121**	max. 13,3m
DALI DIM (DIM5)	60W / IP20	**21012 0205**	max. 6,6m
	100W / IP20	**21012 0225**	max. 11,1m
	60W / IP67	**21012 0135**	max. 6,6m
	90W / IP67	**21012 0145**	max. 10m
	120W / IP67	**21012 0155**	max. 13,3m

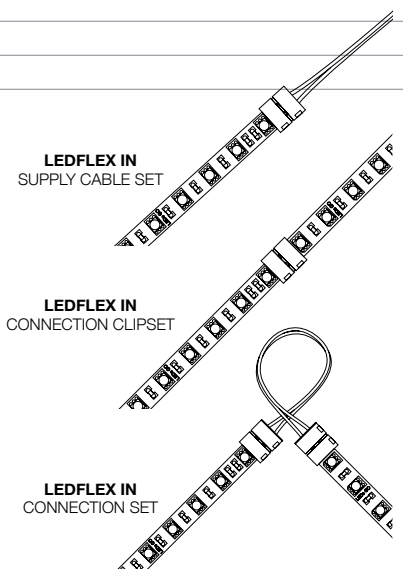

	OPTIONS LEDFLEX		
	LEDFLEX IN SUPPLY CABLE SET	**LEDFLEX IN CONNECTION SET**	**LEDFLEX IN CONNECTION CLIP SET**
LEDFLEX IN	**21031 0470**	**21031 0510**	**21031 0480**
LEDFLEX FP	**21031 0430**	**21031 0500**	**21031 0440**
LEDFLEX MP / HP	**21031 0450**	**21031 0490**	**21031 0460**
	2 x 0.35mm² / 150mm SET OF 10 pcs	2 x 0.35mm² / 150mm SET OF 10 pcs	- SET OF 10 pcs
	CE	CE	CE

LED


At Delta Light®, we follow the evolution in LED at close range. What appears to be similar quality at first sight, can be totally different when looking at some of the underlying characteristics. These characteristics, like binning, risk factor, thermal management, degradation in luminous flux are part of the DNA of the Light Emitting Diode. These aspects determine the lifespan and the quality of the LED. For this matter, Delta Light® assures it only selects qualitative LEDs from qualitative manufacturers. High quality design cannot be made without high quality components.

COLOUR BINNING

No 2 LEDs are the same. When LEDs are produced, they vary in light output and in colour temperature, even when they are produced in the same batch. These differences may be small, but they do influence the quality of the LED. That is why manufacturers sort the LEDs, according to these performances, in different 'bins'. By reducing the number of bins to choose from, quality increases as performances are closer to each other.

MACADAM STEP

The differences in colour temperature between LEDs can be measured by looking at the MacAdam ellipses in Standard Deviation of Colour Matching (SDCM), according to the CIE 1931 Standard. This system looks at the ability of the human eye to perceive colour differences and ranks it on a scale from 0 to 10. Within 1 MacAdam ellipse a colour difference is not noticeable to the human eye under any condition. From 1 to 3 ellipses it is very difficult for the human eye to notice any difference in colour, meaning that up to 3 MacAdam ellipses all LEDs are very homogeneous when it comes to colour temperature.

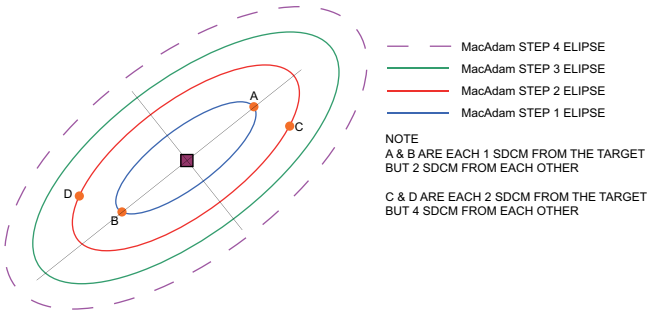


RISK FACTOR


The European standard for photo biological safety EN 62471 describes a measuring method to determine whether a lamp or luminaire carries a risk of eye and skin damage. LED light contains almost no light from the ultraviolet or infrared spectrum, and therefore is not dangerous to the skin.
It does however provide a high peak in the blue spectrum which, when looking into a bright light source (for a long period of time), may result in irreversible damage to the retina, the so-called the Blue Light Hazard.

Whether the risk is real, depends on several factors: luminance of the LED, colour temperature, but also light distribution and distance to the luminaire play an important role. When a LED is placed in a luminaire, it is located behind a lens, reflector or diffuser, thus levelling off the luminance.

To allow users to estimate the risk, the standard EN 62471 determines that lamps and luminaries must be divided into four risk groups:
- Risk group 0 ("exempt" group): this means that there is no danger, even with unlimited viewing of the light source.
- Risk group 1: The risk is limited, no more than 10.000 seconds of viewing is allowed (just under 3 hours).
- Risk group 2: up to 100 seconds of viewing is allowed.
- Risk group 3: up to 0.25 seconds of viewing is allowed. This is shorter than the natural aversion reflex of the eye.

For light sources of risk group 3, protective measures are always needed. For the other groups, it depends on the application. If the light sources belong in group 2 or 3, then this must be indicated.

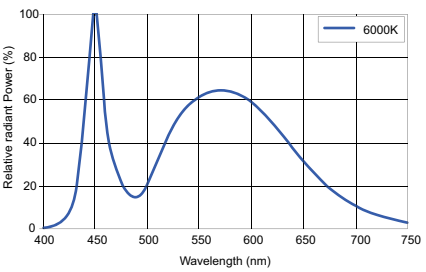


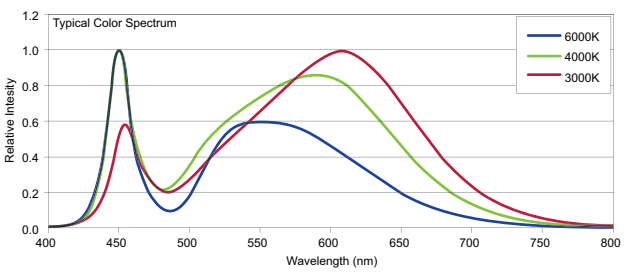

LED LIFESPAN LM-80 – TM-21

Conventional light sources mostly burn out before a serious loss of light output is noticeable. As the lifetime of LEDs exceeds the lifetime of conventional light sources, light output degrades over time before burning out. This degradation in luminous flux can be measured according to the L value and the operating period of time:
- L value shows the percentage of luminous flux regarding the initial luminous flux over a period of time.
- The operating period of time, expressed in hours.


Example: L_{70} 60.000h means that after 60.000 hours the luminous flux will be at least 70% of the original luminous flux.

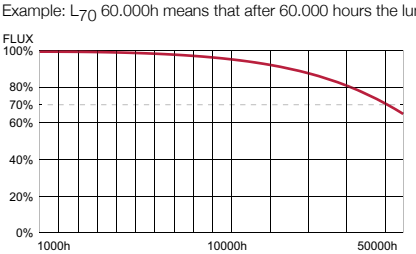


TEC

SOFT DIM

Soft Dim LED technology replicates the dimming behaviour of a conventional lamp where the colour temperature increases in warmth as it's dimmed. This is achieved through the use of specially selected LEDs of different colour temperatures and power types from premium chip manufacturers. Consistency is ensured without complexity with the use of specific and precise LED selection. The LED's selected have colour tolerances that are tighter than 3 SDCM ensuring module-to-module accuracy.
The Soft Dim technology is incorporated in familiar Delta Light product families such as the Reo, Haloscan, iMax, Deep Ringo, Carree, Spy family, Tweeter and Minigrid. Also available in some of Delta Light's 48V Solutions such as Superloop MDL & Magnetic Profiles Splitline / Shiftline M.

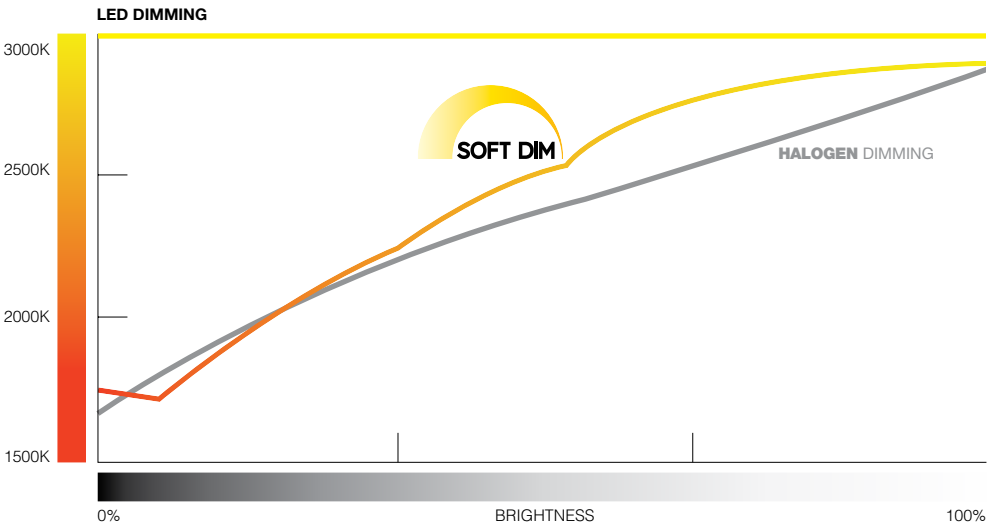




SOFT DIM




HUMAN CENTRIC LIGHTING

Since its creation, DL has embraced a continuous innovation process to integrate the latest technological developments towards fixtures characterized by good colour consistency, glare mitigation, design and aesthetics. These aspects satisfy the functionality of the lighting installation and create a pleasant ambient to affect the emotions of the end-user in a positive way. So far, the impact of these aspects were considered only for the visual task. Supernova Tunable White, with integrated Human Centric Light (HCL), also impacts the circadian rhythm.

The circadian clock regulates processes such as the melatonin secretion - a hormone responsible for the sleep – and our concentration and level of alertness. Unfortunately, the change in the working places towards indoor spaces isolates us from the natural stimulus of sunlight and therefore our circadian clock needs to be stimulated by artificial lighting emulating the daylight cycle.
The last years DL has been working on a lighting management system to enhance the well-being of the end-users in the frame of the HCL paradigm. Besides the in-house research and developments, joint efforts with universities and other research centers like the Light & Lighting laboratory from the KU Leuven, Attentia and the health care center of Roeselare allow us to provide better solutions aiming to address specific niches of application such as offices, schools, nursing homes, hotels and residences.
One of these solutions is Supernova Tunable White with integrated HCL, a system that changes its colour temperature during the day according to the graph shown above. This solution includes CTRL Delta and lets you control the luminaires easily with the touch of your smart device.

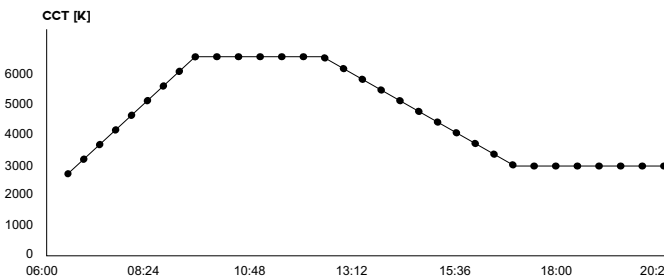



TUNABLE WHITE



LED SPECS

CRI 80				2700K ●	3000K ●	4000K ●	TYPICAL VALUES		LIFETIME		RISK GROUP[1]	SDCM[1]	EMERGENCY
CRI	LED		POWER	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	FORW. CUR.	FORW. VOLT.	L_{XX}	HOURS			BLF %
		[A]	**1W**	132lm - 132lm/W	132lm - 132lm/W	134lm - 134lm/W	350mA	2,85V*	L_{90}	>120000h	RG2 ThRESHOLD 0,6m	3	-
			1,4W	182lm - 128lm/W	182lm - 128lm/W	186lm - 131lm/W	500mA	2,85V*					-
			2W	245lm - 123lm/W	245lm - 123lm/W	255lm - 128lm/W	700mA	2,85V*					-
		[C]	**4,1W**	420lm - 103lm/W	420lm - 103lm/W	ON REQUEST	350mA	11,6V*	L_{90}	>45500h	-	2	100 %
			6W	558lm - 94lm/W	558lm - 94lm/W	ON REQUEST	500mA	11,9V*					72 %
		[D]	**6,4W**	647lm - 101lm/W	647lm - 101lm/W	ON REQUEST	350mA	18,3V*	L_{90} L_{80}	>30000h >60500h	RG1	2	100 %
			9,5W	842lm - 89lm/W	842lm - 89lm/W	ON REQUEST	500mA	19,1V*					71 %

TM30
Consult our website for more info on R9 values and TM30 details : Fidelity Index (Rf) and Gamut Index (Rg)

* +/- 8%

TEC

All the technical parameters for LED-apply to the entire module.
In view of the complex manufacturing process for light emitting diodes (LED),
the typical values given in this **Lighting Bible®** are merely
statistical values that do not necessarily correspond to the actual
technical parameters of an individual product;
individual products may vary from the typical values. For most accurate info,
please consult: **deltalight.com/ledspecs.pdf**

All lumen values in this catalogue are related to the Led units.
For more info on the lumen values of the products
please visit our website **deltalight.com**


CRI 90				2700K ●	3000K ●	4000K ●	TYPICAL VALUES		LIFETIME[1]		RISK GROUP[1]	SDCM[1]	EMERGENCY[2]
LED			POWER	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	LUMINOUS FLUX @ 70°	FORW. CUR.	FORW. VOLT.	L_{xx}	HOURS			BLF %
	[A]		**2W**	221lm - 110lm/W	232lm - 116lm/W	NOT AVAILABLE	700mA	2,9V*	L_{90}	>120000h	RG2 TRESHOLD 0,6m	3	-
			2,3W	245lm - 106lm/W	260lm - 112lm/W	NOT AVAILABLE	800mA	2,9V*					-
			2,6W	268lm - 102lm/W	286lm - 109lm/W	NOT AVAILABLE	900mA	2,9V*					-
			3W	303lm - 98lm/W	327lm - 106lm/W	NOT AVAILABLE	1050mA	2,9V*					-
	[C]		**-**										
	[D]		**6,4W**	587lm - 92lm/W	587lm - 92lm/W	NOT AVAILABLE	350mA	18,3V*	L_{90} L_{80}	>30000h >60500h	RG1	2	50 %
			9,5W	755lm - 79lm/W	755lm - 79lm/W	NOT AVAILABLE	500mA	19,1V*					35 %
	[E]		**3,9W**	385lm - 98lm/W	385lm - 98lm/W	NOT AVAILABLE	350mA	11,3V*	L_{90}	>41000h	RG2 THRESHOLD 0,6m	2	54 %
			5,1W	480lm - 94lm/W	480lm - 94lm/W	NOT AVAILABLE	450mA	11,4V*					43 %
			5,7W	519lm - 90lm/W	519lm - 90lm/W	NOT AVAILABLE	500mA	11,5V*					40 %
			8,2W	677lm - 83lm/W	677lm - 83lm/W	NOT AVAILABLE	700mA	11,7V*					29 %
			10,7W	814lm - 76lm/W	814lm - 76lm/W	NOT AVAILABLE	900mA	11,9V*					27 %
	[F]		**2W**	201lm - 101lm/W	229lm - 115lm/W	NOT AVAILABLE	700mA	2,9V*	L_{80}	>36300h	RG2 THRESHOLD 0,6m	3	-
			3,2W	280lm - 88lm/W	319lm - 100lm/W	NOT AVAILABLE	1050mA	3,0V*					-
			4,3W	351lm - 82lm/W	400lm - 93lm/W	NOT AVAILABLE	1400mA	3,1V*					-
	[G]		**2,9W**	369lm - 126lm/W	386lm - 131lm/W	NOT AVAILABLE	350mA	8,4V*	L_{90}	>50000h	RG1	2	-
			6,2W	697lm - 112lm/W	728lm - 117lm/W	NOT AVAILABLE	700mA	8,9V*					-
	[H]		**6W**	675lm - 112lm/W	703lm - 117lm/W	752lm - 125lm/W	300mA	20,0V*	L_{70}	>50000h	RG1	2	55 %
			7,1W	779lm - 110lm/W	812lm - 115lm/W	870lm - 123lm/W	350mA	20,2V*					48 %
			10,4W	1083lm - 105lm/W	1128lm - 109lm/W	1204lm - 116lm/W	500mA	20,7V*					34 %
			15W	1456lm - 97lm/W	1517lm - 101lm/W	1620lm - 108lm/W	700mA	21,4V*					26 %
	[I]		**11,3W**	1561lm - 138lm/W	1632lm - 145lm/W	NOT AVAILABLE	350mA	32,2V*	L_{90}	>50000h	RG1	1	30 %
			13W	1775lm - 137lm/W	1855lm - 143lm/W	1963lm - 151lm/W	400mA	32,4V*					25 %
			14,7W	1986lm - 135lm/W	2076lm - 141lm/W	2196lm - 149lm/W	450mA	32,6V*					25 %
			16,4W	2195lm - 134lm/W	2294lm - 140lm/W	NOT AVAILABLE	500mA	32,8V*					20 %
			27,1W	3410lm - 126lm/W	3565lm - 132lm/W	NOT AVAILABLE	800mA	33,9V*					14 %
			30,8W	3802lm - 123lm/W	3974lm - 129lm/W	NOT AVAILABLE	900mA	34,2V*					13 %
			36,5W	4380lm - 120lm/W	4579lm - 126lm/W	NOT AVAILABLE	1050mA	34,7V*					11 %
	[J]		**16,3W**	2209lm - 136lm/W	2309lm - 142lm/W	2443lm - 150lm/W	500mA	32,5V*	L_{90}	>50000h	RG1	1	22 %
			23,2W	3031lm - 130lm/W	3169lm - 136lm/W	3353lm - 144lm/W	700mA	33,2V*					16 %
			36W	4393lm - 122lm/W	4592lm - 127lm/W	4859lm - 135lm/W	1050mA	34,3V*					10 %
			41,7W	4948lm - 119lm/W	5173lm - 124lm/W	5473lm - 131lm/W	1200mA	34,7V*					9 %
	[Q]		**5,8W**	702lm - 121lm/W	734lm - 127lm/W	777lm - 134lm/W	350mA	16,7V*	L_{90}	>50000h	RG1	1	51 %
			7,7W	885lm - 115lm/W	925lm - 120lm/W	979lm - 127lm/W	450mA	17V*					41 %
			8,6W	974lm - 113lm/W	1018lm - 118lm/W	1078lm - 125lm/W	500mA	17,2V*					37 %
			12,5W	1318lm - 105lm/W	1378lm - 110lm/W	1457lm - 117lm/W	700mA	17,9V*					28 %
	[R]		**11,6W**	1458lm - 125lm/W	1524lm - 131lm/W	1612lm - 139lm/W	350mA	33,2V*	L_{90}	>50000h	RG1	1	32 %
			15,3W	1830lm - 120lm/W	1913lm - 125lm/W	2024lm - 132lm/W	450mA	33,9V*					25 %
			17,2W	2009lm - 117lm/W	2101lm - 123lm/W	2222lm - 130lm/W	500mA	34,3V*					23 %
			25W	2688lm - 108lm/W	2811lm - 112lm/W	2974lm - 119lm/W	700mA	35,7V*					16 %
	[U]		**4,1W**	551lm - 135lm/W	576lm - 141lm/W	ON REQUEST	250mA	16,3V*	L_{90}	>50000h	RG1	1	72 %
			5,8W	753lm - 129lm/W	787lm - 135lm/W	ON REQUEST	350mA	16,6V*					53 %
			8,6W	1041lm - 121lm/W	1089lm - 127lm/W	ON REQUEST	500mA	17,1V*					38 %
			12,4W	1403lm - 113lm/W	1467lm - 118lm/W	ON REQUEST	700mA	17,7V*					28 %
CRI 90				SOFT DIM **3000-1800K**									
	[W]		**6W**	623lm - 105lm/W	NOT AVAILABLE	NOT AVAILABLE	350mA	17V*	L_{90}	>50000h	RG1	2	54 %
	[X]		**8,3W**	934lm - 113lm/W	NOT AVAILABLE	NOT AVAILABLE	250mA	33V*	L_{90}	>50000h	RG1	2	48 %
			11,8W	1307lm - 110lm/W	NOT AVAILABLE	NOT AVAILABLE	350mA	33,8V*					35 %
			16,1W	1618lm - 101lm/W	NOT AVAILABLE	NOT AVAILABLE	450mA	35,7V*					20 %
			10,2W	1038lm - 109lm/W	NOT AVAILABLE	NOT AVAILABLE	500mA	20,4V*					32 %
CRI 90				TUNABLE WHITE **6500-2700K**	TUNABLE WHITE **4000-1800K**								
	[Y]		**8,1W**	1007lm - 124lm/W	NOT AVAILABLE	NOT AVAILABLE	450mA	18V*	L_{90}	>50000h	RG1	2	-
			9W	1087lm - 121lm/W	979lm - 109lm/W	NOT AVAILABLE	500mA	18V*					-
	[Z]		**17,8W**	2054lm - 116lm/W	NOT AVAILABLE	NOT AVAILABLE	500mA	35,5V*	L_{90}	>50000h	RG1	2	-

DO'S & DON'TS

PLAY.DELTALIGHT.COM/CONNECTLEDS


CONNECTION

CORRECT CONNECTION: SERIAL CONNECTION




WRONG CONNECTION: PARALLEL CONNECTION

Depending on the number of fixtures the LED modules will function at half (2 LED's), one third (3 LED's) the luminous intensity. Moreover, due to different forward voltages the current will not split in equal part.

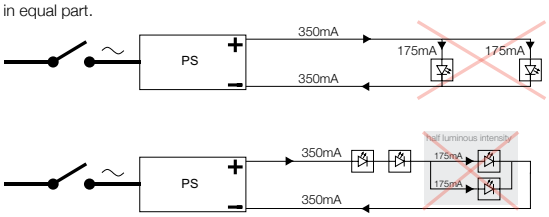

WRONG CONNECTION: TESTING OF LED MODULES ON SWITCHED ON POWER SUPPLY

Risk for an output voltage that exceeds the max for the LED.
A power supply that is switched on has max output on the secundary side (eg. 49V). The LED in eg. a Reo 3030 is 7W works at 350mA and 20,1V.
49V is far too high for the Reo 3030 >>
LED will be damaged.

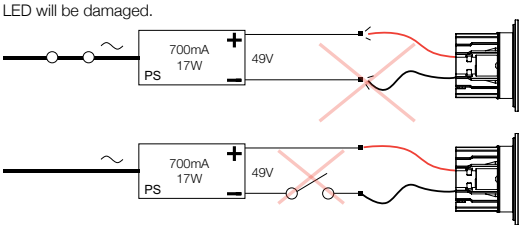


WRONG POWER SUPPLY:

Question:
How many Reo (7W) luminaires can be connected to power supply 300 90 914?
7W x 4 = 28W >>> max **power** of 300 90 914 = 35W >>> **OK**
4 x 20,1V = 80,4V >>> max **voltage** of 300 90 914 = 72V >>> **NOT OK**


Answer:
3 x Reo (7W) luminaires can be connected to power supply 300 90 914

Therefore: **always consult the matrix on FOLD-OUT!**


TEC




50 x 48 x 30




90 x 18 x 60



90 x 18 x 60




90 x 18 x 60



90 x 18 x 60

SURGE PROTECTION	AC	AC 110-120V DIN	AC 230-240V DIN	DC 30V-DC	DC 75V-DC
IP20		300 90 017	300 90 018	300 90 014	300 90 015
IP65	300 90 013				
	5 kA Nominal Discharge Current	2 kA Nominal Discharge Current	3 kA Nominal Discharge Current	1 kA Nominal Discharge Current	2 kA Nominal Discharge Current
	10 kA Max. Discharge Current	4 kA Max. Discharge Current	5 kA Max. Discharge Current	2 kA Max. Discharge Current	4 kA Max. Discharge Current
	230-240V / 50-60Hz	110-120V / 50-60Hz	230-240V / 50-60Hz	30V-DC	75V-DC

Electrical devices are sensitive for excessive voltage peaks.
Especially outdoor power lines are subject to direct and indirect lightning discharges. Also in industrial or semi-industrial area's the powerlines can be subject to high switching spikes. Therefore Deltalight strongly advices to use proper power line surge protection. Our AC surge protectors are to be installed on the primary side of led power supplies and the DC types on the secondary side. Both as close as possible to the device they have to protect.





CURRENT CONTROLLED


DIMMABLE LED POWER SUPPLY - INSTALLATION SCHEME


PLAY.DELTALIGHT.COM/DIMLEDS

DIM1 1-10V
DIM6 SWITCH DIM
DIM7 1-10V + SWITCH DIM
DIM8 FALLING EDGE DIMMING
DIM9 1-10V + SWITCH DIM + DALI

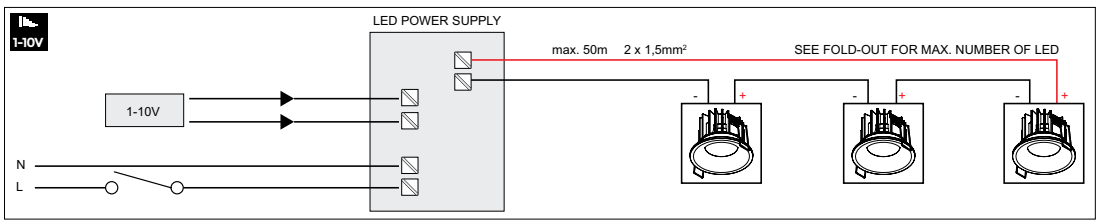

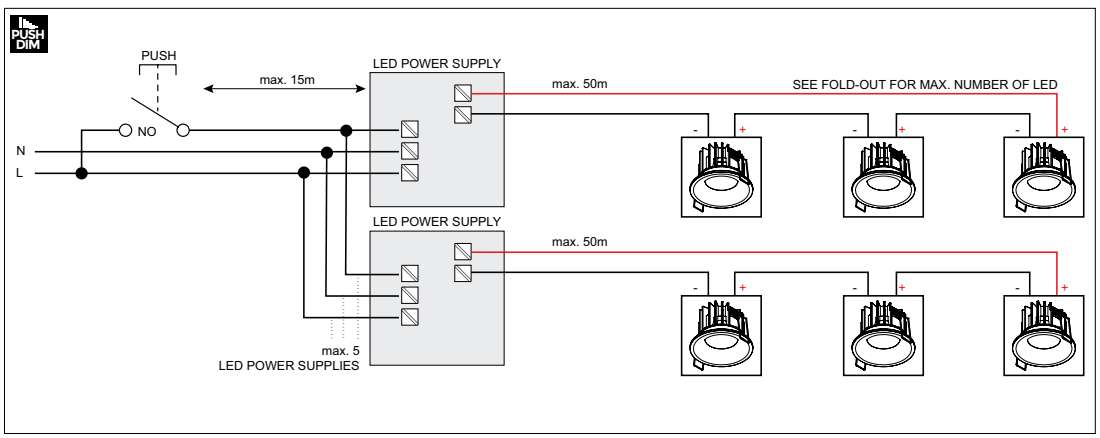

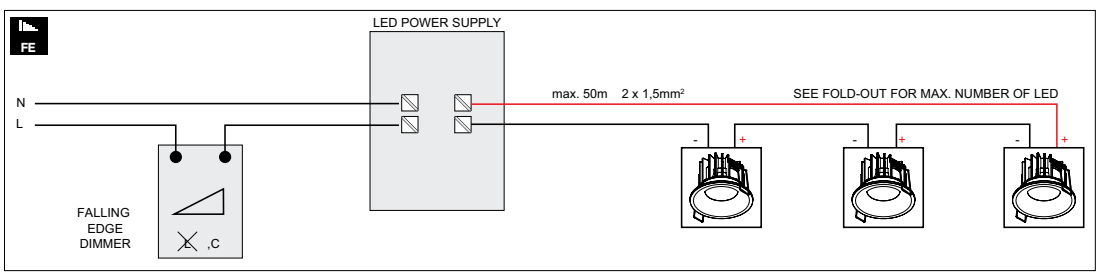

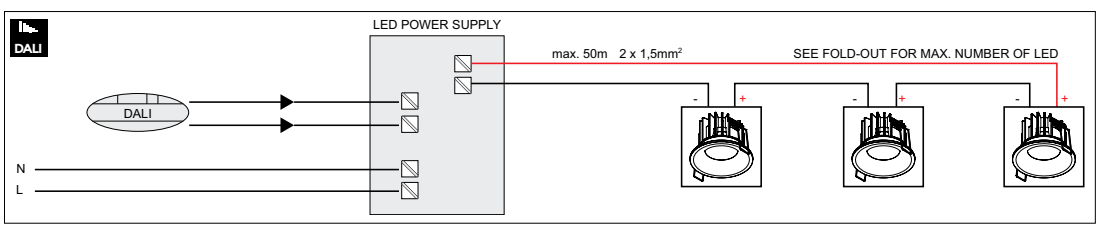


ALL DIAGRAMS ARE TYPICAL, PLEASE CHECK MAXIMUM POWER OF EACH INDIVIDUAL DIVICE FOR PRACTICAL USE.


POWER SUPPLY

NON DIM	**CC**	CONSTANT CURRENT
DIM	**CCR**	CONSTANT CURRENT REDUCTION
	FF	FLICKER-FREE
DIM 8 (MAINS DIM)	**CCR**	CONSTANT CURRENT REDUCTION
	FF*	FLICKER-FREE: MIN DIM LEVEL OF DIMMING DEVICE TO BE ADJUSTED FOR FLICKR FREE DIMMING

TYPE 1




TYPE 2




TYPE 3



TYPE 4



TYPE 5



LASS-OH!	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
	NON DIM	**21012 0010**	350mA / 15W	15-44V-DC	220-240V / 0|50-60Hz	II	20	λ > 0,9	147 x 44 x 22	⌀ min. 50	**2**
			700mA / 30W	10-44V-DC	220-240V / 0|50-60Hz				147 x 44 x 22		
			1050mA / 40W	10-38V-DC	220-240V / 0|50-60Hz				147 x 44 x 22		
	1-10V	**21012 0021**	350mA / 18W	10-54V-DC	220-240V / 0|50-60Hz				130 x 42 x 30	⌀ min. 54	**2**
			700mA / 36W	10-51V-DC	220-240V / 0|50-60Hz				130 x 42 x 30		
			1050mA / 36W	10-35V-DC	220-240V / 0|50-60Hz				130 x 42 x 30		
	DALI	**21012 0035**	350mA / 18W	10-54V-DC	220-240V / 0|50-60Hz				147 x 44 x 30		**2**
			700mA / 38W	10-54V-DC	220-240V / 0|50-60Hz				147 x 44 x 30		
			1050mA / 38W	10-36V-DC	220-240V / 0|50-60Hz				147 x 44 x 30		

GYN W	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
	MAINS	**300 90 110**	350mA / 10W	12-28V-DC	220-240 / 50-60Hz	II	20	λ > 0,9	102 x 39 x 21	⌀ min. 42	**4**
	NON DIM	**300 90 91**	350mA / 15W (110V: 10W)	2-41V-DC	110-240 / 0|50-60Hz			λ > 0,5	115 x 34 x 19	⌀ min. 40	**2**


INFORM / D-LINER	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
	NON DIM	**25510 0420**	17W		220-240V / 0|50-60Hz	I	20		200 x 70 x 31	⌀ min. 78	2
		25510 0430	45W		220-240V / 0|50-60Hz				200 x 70 x 31	⌀ min. 78	
		25510 0440	25W		220-240V / 0|50-60Hz				200 x 70 x 31	⌀ min. 78	
		25510 0450	60W		220-240V / 0|50-60Hz				200 x 85 x 31	⌀ min. 92	
		25510 0460	100W		220-240V / 0|50-60Hz				235 x 100 x 31	⌀ min. 106	
	DALI	**25510 0075**	50W		220-240V / 0|50-60Hz				360 x 30 x 21	⌀ min. 45	
		25510 0085	75W		220-240V / 0|50-60Hz				360 x 30 x 21	⌀ min. 45	
		25510 0375	17W		220-240V / 0|50-60Hz				200 x 70 x 31	⌀ min. 78	
		25510 0385	45W		220-240V / 0|50-60Hz				200 x 70 x 31	⌀ min. 78	
		25510 0395	25W		220-240V / 0|50-60Hz				200 x 70 x 31	⌀ min. 78	
		25510 0405	60W		220-240V / 0|50-60Hz				200 x 85 x 31	⌀ min. 92	
		25510 0415	100W		220-240V / 0|50-60Hz				235 x 100 x 31	⌀ min. 106	

SUPERLOOP	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
	1-10V	**300 90 127**	500mA / 27W		220-240V / 0|50-60Hzv	II	20	λ > 0,9	98x43x30	⌀ min. 54	**2**
		300 90 128	700mA / 36W		220-240V / 0|50-60Hz				98x43x30	⌀ min. 54	
		300 90 132	1200mA / 70W		220-240V / 0|50-60Hz				240x60x40	⌀ min. 80	
		300 90 133	1700mA / 99W		220-240 / 50-60Hz				240x60x40	⌀ min. 80	
	DALI	**300 90 131**	700mA / 38W		220-240 / 50-60Hz				147x43x30	⌀ min. 54	**2**
		300 90 129	900mA / 60W		220-240V / 0|50-60Hz				125x79x22	⌀ min. 84	**5**
		300 90 130	1200mA / 60W		220-240V / 0|50-60Hz				220x85x31	⌀ min. 95	**2**


NR	DIM	ART NR	POWER	OUTPUT	VOLTAGE	CLASS	IP	λ	A X B X C	CUTOUT	TYPE
3	NON DIM	**21012 0080**	180mA / 7,4W (110V: 7W)	2-41,5V-DC	110-240 / 50-60Hz		20	λ > 0,8	115 x 34 x 19	min. 40	**2**
			250mA / 10W (110V: 10W)	2-41,5V-DC							
4	MAINS	**21012 0308**	350mA / 7,35W	13-21V-DC	220-240 / 50-60Hz		44	λ > 0,9	48 x 30 x 20	min. 40	**3**
5		**21012 0318**	500mA / 10W	13-20V-DC					58 x 36 x 20		**3**
6		**21012 0328**	700mA / 14,7W	13-21V-DC					68 x 36 x 23		**3**
7		**21012 0258**	250mA / 4,2W	16-29V-DC	220-240 / 50-60Hz		20	λ > 0,9	122 x 41 x 23	min. 50	**1**
			300mA / 8,7W	16-29V-DC							
			350mA / 10W	16-29V-DC							
8		**21012 0268**	250mA / 10,5W	26-42V-DC							
			300mA / 12,6W	26-42V-DC							
			350mA / 14,7W	26-42V-DC							
9		**21012 0278**	500mA / 14W	15-28V-DC					138 x 44 x 30	min. 55	
			700mA / 19,6W	15-28V-DC							
10		**21012 0288**	500mA / 26W	30-52V-DC							
			700mA / 36,4W	30-52V-DC							
11		**21012 0298**	250mA / 11W	7-44V-DC					140 x 38 x 26	min. 48	**2**
			350mA / 15W	7-44V-DC							
			450mA / 19W	7-44V-DC							
			500mA / 20W	7-40V-DC							
			700mA / 20W	7-28V-DC							
			800mA / 20W	7-25V-DC							
			850mA / 20W	7-24V-DC							
			900mA / 20W	7-22V-DC							
12	NON DIM	**300 90 148**	1050mA / 22W (110V: 12W)	2-21V-DC	110-240 / 50-60Hz		20	λ > 0,6	111 x 38 x 28	min. 48	**4**
13	DALI	**300 90 68**	250mA / 12W (110V: 12W)	10-48V-DC				λ > 0,9	103 x 67 x 21	min. 72	**5**
			350mA / 17W (110V: 15W)	5-48V-DC							
			450mA / 22W (110V: 15W)	5-48V-DC							
			500mA / 24W (110V: 15W)	5-48V-DC							
			700mA / 32W (110V: 15W)	3-46V-DC							
14		**300 90 125**	250mA / 12W (110V: 12W)	15-49V-DC					118 x 52 x 22	min. 55	**4**
			350mA / 17W (110V: 15W)	10-49V-DC							
			450mA / 20W (110V: 15W)	5-45V-DC							
			500mA / 20W (110V: 15W)	5-40V-DC							
			700mA / 20W (110V: 15W)	3-28V-DC							
15	1-10V/ PUSH	**300 90 124**	250mA / 13W (110V: 13W)	20-53V-DC					118 x 52 x 22	min. 55	**4**
			350mA / 18W (110V: 15W)	15-50V-DC							
			450mA / 20W (110V: 15W)	5-45V-DC							
			500mA / 20W (110V: 15W)	5-40V-DC							
			700mA / 20W (110V: 15W)	3-29V-DC							
			900mA / 20W (110V: 15W)	3-23V-DC							
16	DALI 1-10V PUSH	**300 90 63**	350mA / 25W (110V: 25W)	2-74V-DC					125 x 79 x 22	min. 82	**5**
			500mA / 35W (110V: 35W)	2-72V-DC							
			700mA / 50W (110V: 40W)	2-72V-DC							
			850mA / 60W (110V: 40W)	2-70V-DC							
			900mA / 60W (110V: 40W)	2-66V-DC							
			1050mA / 60W (110V: 40W)	2-57V-DC							
17		**300 90 136**	1050mA / 45W (110V: 40W)	2-44V-DC					110 x 76 x 30	min. 90	**5**
			1200mA / 52W (110V: 40W)	2-44V-DC							
			1400mA / 55W (110V: 40W)	2-43V-DC							
18		**300 90 69**	250mA / 28W (110V: 28W)	20-112V-DC					125 x 79 x 22	min. 84	**5**
			350mA / 39W (110V: 39W)	20-112V-DC							
			450mA / 50W (110V: 40W)	20-112V-DC							
			500mA / 56W (110V: 40W)	2-112V-DC							
			700mA / 60W (110V: 40W)	2-86V-DC							
19	WDL	**21012 005W**	350mA / 18W	10-54V-DC	220-240 / 50-60Hz				147 x 43 x 30	min. 54	**2**
			450mA / 24W	10-54V-DC							
			500mA / 27W	10-54V-DC							
			700mA / 36W	10-51V-DC							
			900mA / 38W	10-42V-DC							
			1050mA / 38W	10-36V-DC							
20	DALI DT8	**21012 0355**	500mA / 25W	10-50V-DC	220-240 / 50-60Hz				123 x 79 x 24	min. 85	**5**

POWER SUPPLY


TYPE 1




TYPE 2



TYPE 3



TYPE 4




24V-DC

DIM	CLASS	IP	POWER / 24V-DC	ART NUMBER	VOLTAGE	LAMBDA	A X B X C	TYPE
NON DIM	□	IP20	24W	**21012 0160**	220-240V / 50-60Hz	λ > 0,95	137 x 50 x 16	**1**
	□	IP67	150W	**300 89 24 150**	100-240V / 0|50-60Hz		180 x 63 x 36	**2**
MAINS	□	IP20	75W	**21032 0358**	220-240V / 50-60Hz		110 x 75 x 30	**1**
			150W	**21032 0368**			170 x 75 x 30	**1**
0-10V	□	IP20	60W	**21012 0171**	220-240V / 50-60Hz		170 x 57 x 18	**1 (PWM)**
			90W	**21012 0181**			190 x 65 x 22	**1 (PWM)**
			120W	**21012 0191**			190 x 65 x 22	**1 (PWM)**
	□	IP67	60W	**21012 0101**	110-240V / 0|50-60Hz		150 x 53 x 35	**2 (PWM)**
			90W	**21012 0111**			171 x 63 x 38	**2 (PWM)**
			120W	**21012 0121**			171 x 63 x 38	**2 (PWM)**
DALI DIM	□	IP20	60W	**21012 0205**	220-240V / 50-60Hz		170 x 57 x 18	**1**
			100W	**21012 0225**			190 x 65 x 22	**1**
	□	IP67	60W	**21012 0135**	110-240V / 0|50-60Hz		150 x 53 x 35	**2 (PWM)**
			90W	**21012 0145**			171 x 63 x 38	**2 (PWM)**
			120W	**21012 0155**			171 x 63 x 38	**2 (PWM)**

48V-DC

DIM	CLASS	IP	POWER / 48V-DC	ART NUMBER	VOLTAGE	LAMBDA	A X B X C	TYPE
NON DIM	□	IP20	100W (120V: 80W)	**21012 0230**	120-240V / 50-60Hz	λ > 0,95	298 x 30 x 17	**3**
			100W	**300 89 48 100**	110-240V / 50-60Hz	λ > 0,90	100 x 55 x 90	**4**
			200W (120V: 150W)	**21012 0240**	120-240V / 50-60Hz	λ > 0,95	332 x 30 x 22	**3**
			240W	**300 89 48 240**	100-240V / 50-60Hz	λ > 0,90	114 x 63 x 125	**4**
1-10V	□	IP67	90W	**21032 0331**	110-240V / 50-60Hz	λ > 0,90	171 x 63 x 38	**2**
DALI	□	IP67	90W	**21032 0345**	110-240V / 50-60Hz	λ > 0,90	171 x 63 x 38	**2**


POWERBOX

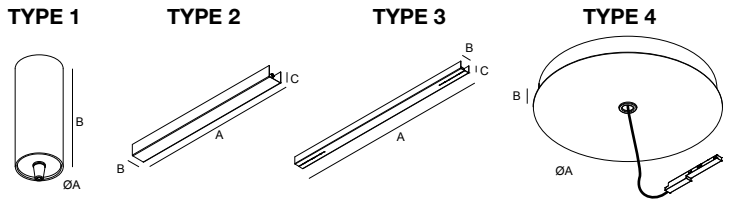

POWERBOX


	DIM	ART NR	COLOR	NAME	VOLTAGE		IP	A X B X C	TYPE
CUPPA C	NON DIM	**24814 0080**	B	LASS-OH! POWERBOX H15	110-240V / 50-60Hz	2	IP20	60x150	**1**
	DALI DIM	**24814 0075**	B	LASS-OH! POWERBOX H15 DIM5	110-240V / 50-60Hz	2	IP20	60x150	**1**
FEMTOLINE 35 / DOT.COM ON	NON DIM	**300 24 060**	B / W	FTL - POWERBOX 24V-DC / 60W	220-240V / 50-60Hz	1	IP20	480x58x40	**2**
	1-10V DIM	**300 24 060 ED1**	B / W	FTL - POWERBOX 24V-DC / 60W DIM1	220-240V / 0|50-60Hz	1	IP20	480x58x40	**2**
	DALI DIM	**300 24 150 ED5**	B / W	FTL - POWERBOX 24V-DC / 150W DIM5	220-240V / 0|50-60Hz	1	IP20	480x58x40	**2**
INFORM	NON DIM	**25510 0010**	B / W	INFORM SQ POWERBOX 50W	220-240V / 0|50-60Hz	1	IP20	800x40x30	**3**
	NON DIM	**25510 0020**	B / W	INFORM SQ POWERBOX 75W	220-240V / 0|50-60Hz	1	IP20	800x40x30	**3**
	NON DIM	**25510 0030**	B / W	INFORM SQ POWERBOX 25W	220-240V / 0|50-60Hz	1	IP20	800x40x30	**3**
	NON DIM	**25510 0480**	B / W	INFORM SQ POWERBOX L 50W	220-240V / 0|50-60Hz	1	IP20	570x48x40	**2**
	NON DIM	**25510 0500**	B / W	INFORM SQ POWERBOX L 75W	220-240V / 0|50-60Hz	1	IP20	570x48x40	**2**
	DALI DIM	**25510 0015**	B / W	INFORM SQ POWERBOX 50W DIM5	220-240V / 0|50-60Hz	1	IP20	800x40x30	**3**
	DALI DIM	**25510 0025**	B / W	INFORM SQ POWERBOX 75W DIM5	220-240V / 0|50-60Hz	1	IP20	800x40x30	**3**
	DALI DIM	**25510 0045**	B / W	INFORM SQ POWERBOX 35W DIM5	220-240V / 0|50-60Hz	1	IP20	800x40x30	**3**
	DALI DIM	**25510 0495**	B / W	INFORM SQ POWERBOX L 50W DIM5	220-240V / 0|50-60Hz	1	IP20	570x48x40	**2**
	DALI DIM	**25510 0515**	B / W	INFORM SQ POWERBOX L 75W DIM5	220-240V / 0|50-60Hz	1	IP20	570x48x40	**2**
	DALI DIM	**25510 0475**	B / W	INFORM SQ POWERBOX L 85W DIM5	220-240V / 0|50-60Hz	1	IP20	570x48x40	**2**
	DALI DIM	**26810 0015**	B / W	INFORM R POWERBOX D DIM5	220-240V / 50-60Hz	1	IP20	186x35x66	**2**
	DALI DIM	**26810 0025**	B / W	INFORM R POWERBOX D/U DIM5	220-240V / 50-60Hz	1	IP20	320x35x66	**2**
LASS-OH!	NON DIM	**24814 0010**	B	LASS-OH! POWERBOX	220-240V / 50-60Hz	1	IP20	250x58x39	**2**
	NON DIM	**24814 0080**	B	LASS-OH! POWERBOX H15	110-240V / 50-60Hz	2	IP20	60x150	**1**
	1-10V DIM	**24814 0011**	B	LASS-OH! POWERBOX DIM1	220-240V / 50-60Hz	1	IP20	250x58x39	**2**
	DALI DIM	**24814 0015**	B	LASS-OH! POWERBOX DIM5	220-240V / 50-60Hz	1	IP20	250x58x39	**2**
	DALI DIM	**24814 0075**	B	LASS-OH! POWERBOX H15 DIM5	110-240V / 50-60Hz	2	IP20	60x150	**1**
MIKALINE	NON DIM	**30610 0170**	B	POWERBOX 48V-DC / 100W PLUG-IN	220-240V / 50-60Hz	2	IP20	490x30x33	**2**
MILES C	MAINS DIM	**23942 0018**	B	MILES POWERBOX 350 mA DIM8	220-240V / 50-60Hz	2	IP20	60x167	**1**
SHIFTLINE M26L / M26H	NON DIM	**23380 0030**	B / W	SLM26H - POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	IP20	490x30x65	**2**
	NON DIM	**23380 004W**	B / W	SLM26H - POWERBOX 48V-DC / 100W WD	120-240V / 50-60Hz	2	IP20	490x30x65	**2**
	NON DIM	**23380 0050**	B / W	SLM26H - MID POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	IP20	490x30x65	**2**
	NON DIM	**23380 0060**	B / W	SLM26 - C POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	IP20	490x30x33	**2**
	NON DIM	**23380 007W**	B / W	SLM26 - C POWERBOX 48V-DC / 100W WD	120-240V / 50-60Hz	2	IP20	490x30x33	**2**
	NON DIM	**23377 0040**	B / W	SLM26L - POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	IP20	490x30x33	**2**
	NON DIM	**23377 0050**	B / W	SLM26L - MID POWERBOX 48V-DC / 100W	120-240V / 50-60Hz	2	IP20	490x30x33	**2**
SOLISCAPE	NON DIM	**27110 0090**	B / W	SOLI - POWERBOX R 48V-DC / 200W	220-240V / 50-60Hz	1	IP20	283x40	**4**
	NON DIM	**27110 0100**	B / W	SOLI - POWERBOX L 48V-DC / 200W	220-240V / 50-60Hz	2	IP20	530x30x33	**2**
SUPERLOOP MDL	NON DIM	**300 48 060**	B	SUPERLOOP POWERBOX F - 48V / 60W	220-240V / 50-60Hz	1	IP20	480x58x40	**2**
	NON DIM	**418 48 050**	B	SUPERLOOP POWERBOX L - 48V-DC / 50W	220-240V / 50-60Hz	2	IP20	80x200	**1**
	NON DIM	**418 48 100**	B	SUPERLOOP POWERBOX H - 48V-DC / 100W	220-240V / 50-60Hz	1	IP20	80x300	**1**
SUPERLOOP SBL	1-10V DIM	**321 55 205 ED1**	B / W	SUPERLOOP POWERBOX L 500mA DIM1	220-240V / 0|50-60Hz	2	IP20	80x200	**1**
	1-10V DIM	**321 55 207 ED1**	B / W	SUPERLOOP POWERBOX L 700mA DIM1	220-240V / 0|50-60Hz	2	IP20	80x200	**1**
	1-10V DIM	**321 55 312 ED1**	B / W	SUPERLOOP POWERBOX H8 1200mA DIM1	110-240V / 50-60Hz	1	IP20	80x300	**1**
	1-10V DIM	**321 55 317 ED1**	B / W	SUPERLOOP POWERBOX H8 1700mA DIM1	110-240V / 50-60Hz	1	IP20	80x300	**1**
	DALI DIM	**321 55 307 ED5**	B / W	SUPERLOOP POWERBOX H8 700mA DIM5	220-240V / 0|50-60Hz	2	IP20	80x300	**1**
	DALI DIM	**20548 0015**	B / W	SUPERLOOP POWERBOX H9 900mA DIM5	220-240V / 0|50-60Hz	2	IP20	90x300	**1**
	DALI DIM	**20548 0025**	B / W	SUPERLOOP POWERBOX H9 1200mA DIM5	220-240V / 0|50-60Hz	2	IP20	90x300	**1**

POWER CONVERTER



LED POWER CONVERTER 48V-DC DIM5

DIM	CLASS	IP	POWER	ART NUMBER	CURRENT	LAMBDA	
DALI DIM (DIM5)	III	IP20	15W	**300 48 350 ED5**	48V-DC ▸ 350mA-DC	λ > 0,95	min. 45
			22W	**300 48 500 ED5**	48V-DC ▸ 500mA-DC	λ > 0,93	min. 45
			25W	**300 48 700 ED5**	48V-DC ▸ 700mA-DC	λ > 0,95	min. 45

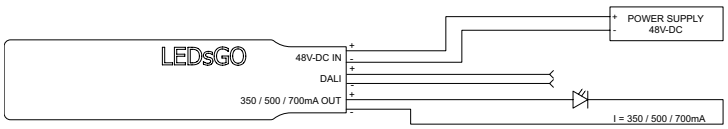


EXAMPLE POWER CONVERTOR


1.LED Power Convertor 48V-DC to 500mA/22W DIM5
300 48 500 ED5 + 48V-DC Power Supply *
Min 1 / Max.2 PLAT-OH! can be connected - Dimming by DALI

* Minimum power 48V-DC Power Supply =
(number of luminaires x power of luminaire) + 15%

NEW



Ø KIT x 55 / max.12,5




76 x 55 / max.12,5

PLAT-OH!

				PLAT-OH! TRIMLESS	PLAT-OH!
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	23°	**29513 9310** ◇	**29511 9310** ◇
	LED [U] 8.6W / 1089lm / 500mA		36°	**29513 9320** ◇	**29511 9320** ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA		23°	**29513 9210** ◇	**29511 9210** ◇
	LED [U] 8.6W / 1041lm / 500mA		36°	**29513 9220** ◇	**29511 9220** ◇
SOFT DIM	3000-1800K / CRI>90		23°	**29514 9010** ◇	**29512 9010** ◇
	LED [W] 6W / 623lm / 350mA		36°	**29514 9020** ◇	**29512 9020** ◇
				◇ B / GC / W	◇ B-B / B-GC / W-W
				III	III

NEW



EMERGENCY UNIT

7W / 1H

65 x 180 (unit)
27 x 60 / max. 25
(led indicator)

25-200mA - 9-58V-DC

21032 0270 B / W


220-240V / 50-60 Hz

NI-MH BATTERY 7,2V - 2Ah
EMERGENCY OPERATION 1h
CHARGING TIME 24h

IP20

Emergency units are battery powered units that come into force in case of general power failure.


In this Lighting Bible we offer emergency units specifically for LED luminaires. Thanks to the battery, a luminaire can keep emitting an amount of light, equal to a percentage of the nominal value when the luminaire is emitting at full power. This percentage is determined by the emergency unit and is known as the Ballast-Lumen Factor (BLF).

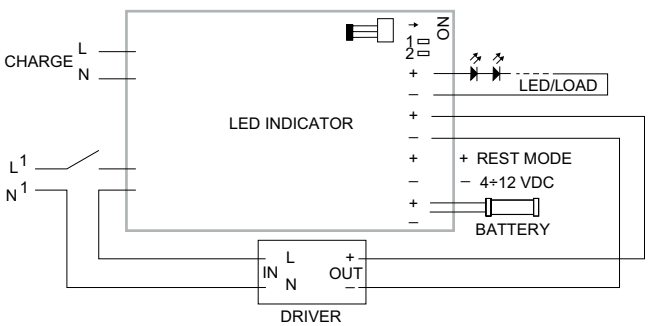

MAINTAINED WITH EXTERNAL ELECTRONIC DRIVER DIAGRAM
MAX. 2m DISTANCE EMERGENCY UNIT - DRIVER


TEC


VOLTAGE CONTROLLED





24V-DC DIM UNIT

24v-DC / 4A DIM1	24v-DC / 4A DIM5	24v-DC / 4A WIRELESS DIM
min. 30	min. 30	min. 30
1-10V	DALI	WIRELESS
300 90 003 ED1	**300 90 003 ED5**	**300 90 010**
24V-DC / 4A (max.96W)	24V-DC / 4A (max.96W)	24V-DC / 2 x 4A (max.96W)
IP20	IP20	IP20

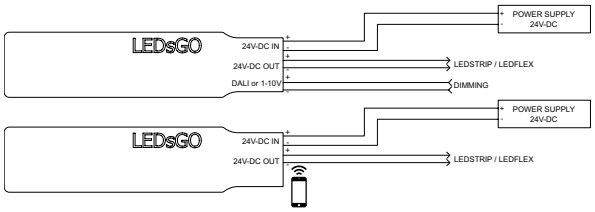









TOUCH CONTROLLER


TW TOUCH CONTROLLER DMX	RGB TOUCH CONTROLLER DMX	RGBTW TOUCH CONTROLLER DMX
min. 30	min. 30	min. 30
DMX	DMX	DMX
300 90 332	**300 90 330**	**21032 0120**
INPUT 12V-DC / 24V-DC - DMX OUT	INPUT 12V-DC / 24V-DC - DMX OUT	INPUT 12V-DC / 24V-DC - DMX OUT
STATIC MODE EXCL.POWER SUPPLY 12V-DC / 24V-DC	DUAL MODE STATIC / DYNAMIC EXCL.POWER SUPPLY 12V-DC / 24V-DC	DUAL MODE STATIC / DYNAMIC EXCL.POWER SUPPLY 12V-DC / 24V-DC
IP20	IP20	IP20

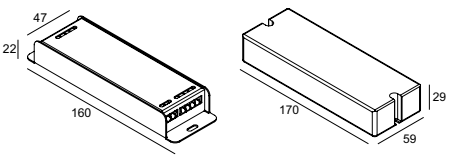



LED DIMMODULE 24V


3CH / 6A DIM2	5CH / 5A DIM5
DALI / SWITCH DIM ONE UNIT ONLY	DALI DT8
300 90 24 ED2	**21032 0145**
EXCL.POWER SUPPLY 12V-DC / 24V-DC INPUT 12/24V-DC OUTPUT MAX 432W / 18A (3 DALI CHANNELS OF 6A) FOR LEDFLEX W	EXCL.POWER SUPPLY 12V-DC / 24V-DC INPUT 12/24V-DC OUTPUT MAX 600W / 25A (5 DALI CHANNELS OF 5A 1 ADRESS) FOR LEDFLEX RGBTW
IP20	IP20
INSTALLATION SCHEME: TEC 26	INSTALLATION SCHEME: TEC 26











RGB

RGB DRIVER DMX	RGBTW DRIVER DMX	RGBTW REPEATER
DMX	DMX	-
300 90 331	**21032 0010**	**21032 0130**
INPUT 12V-DC OUTPUT RGB 75W	INPUT 24V-DC OUTPUT 5 x 120W	INPUT 24V-DC OUTPUT 5 x 5A
INPUT 24V-DC OUTPUT RGB 150W	DUAL MODE DMX / STAND ALONE EXCL.POWER SUPPLY 24V-DC	EXCL.POWER SUPPLY 24V-DC
DUAL MODE DMX / STAND ALONE EXCL.POWER SUPPLY 12V-DC / 24V-DC	IP20	IP20
IP20		
FOR COMMON ANODE RGB LEDFLEX	FOR COMMON ANODE RGBTW LEDFLEX	FOR COMMON ANODE RGBTW LEDFLEX

TRANSFO


LED TRANSFO 12V - 50W
MAINS DIMMING (FE)
300 89 12 71
220-240V / 50-60Hz
OUTPUT 12V-AC LED 2,5-50W HALOGEN 5-70W
IP20

FE DIMMER

FALLING EDGE DIMMER 200W DIM 2
DIMMING OUTPUT FE DIMMING (ED8) 3-200W
300 90 126
220-240V / 50-60Hz
IP20
FOR BUTLER / SUPERNOVA XS / SUPER-OH! XS


VOLTAGE CONTROLLED

LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME / LEDFLEX WHITE

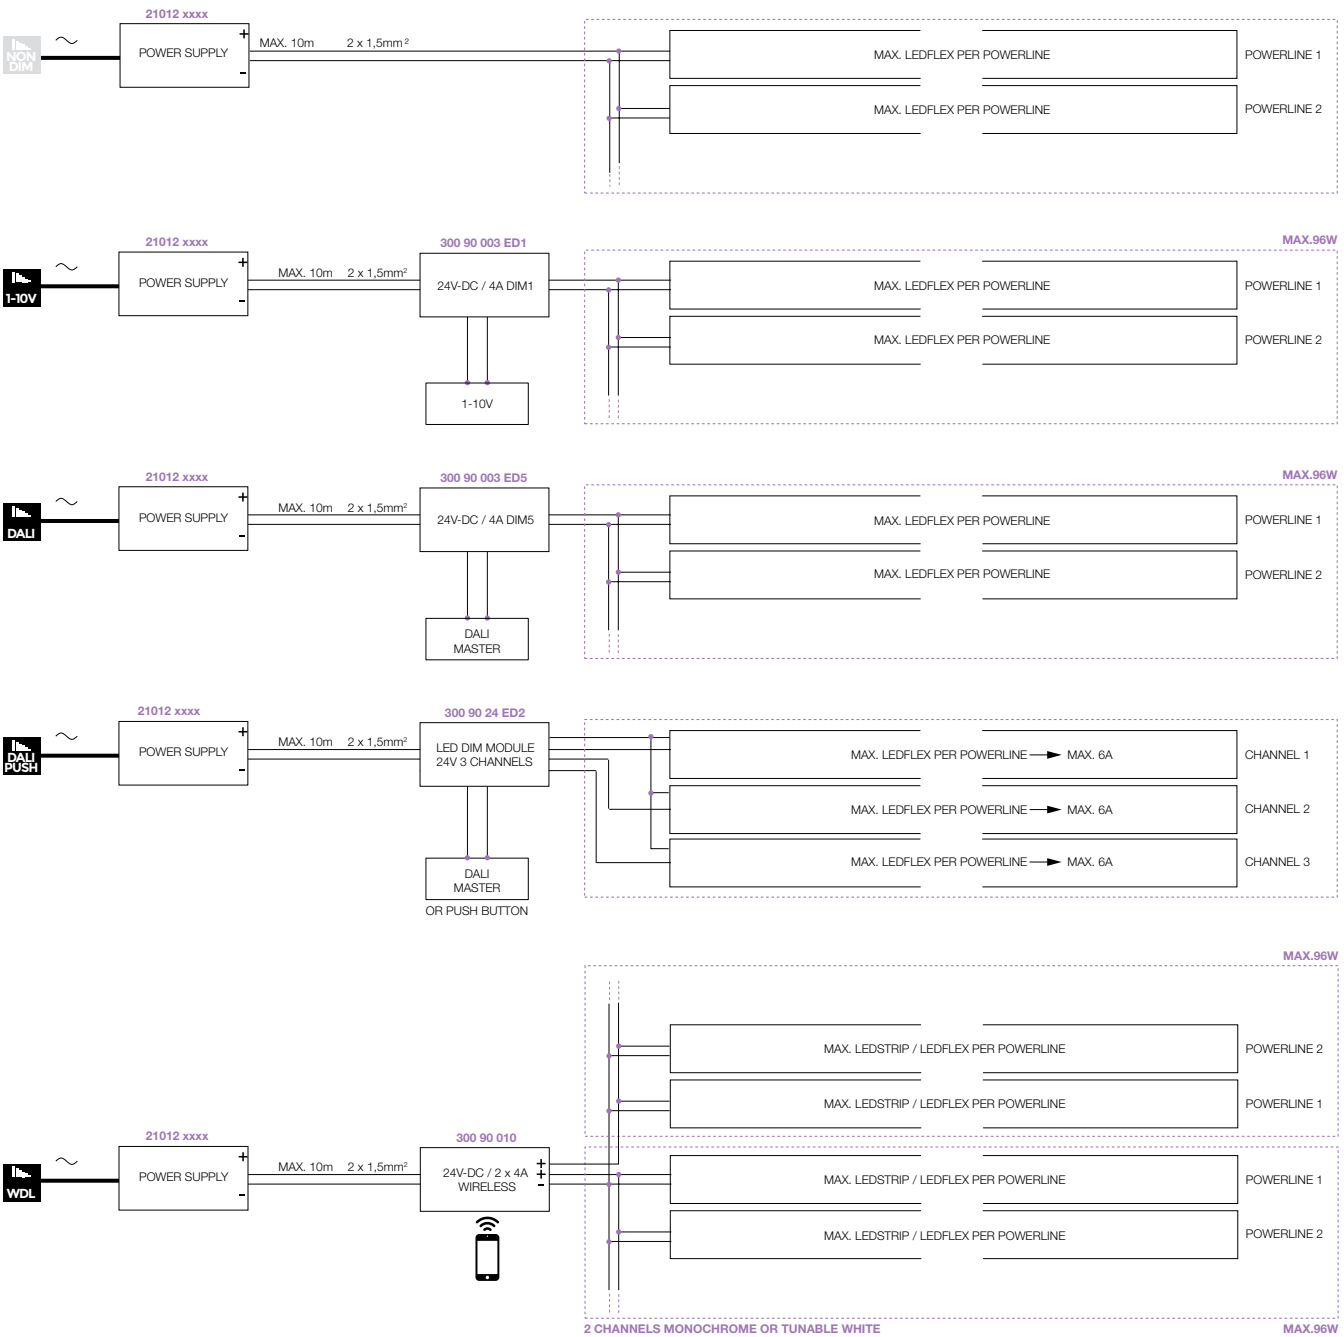


TEC


LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME / LEDFLEX RGB

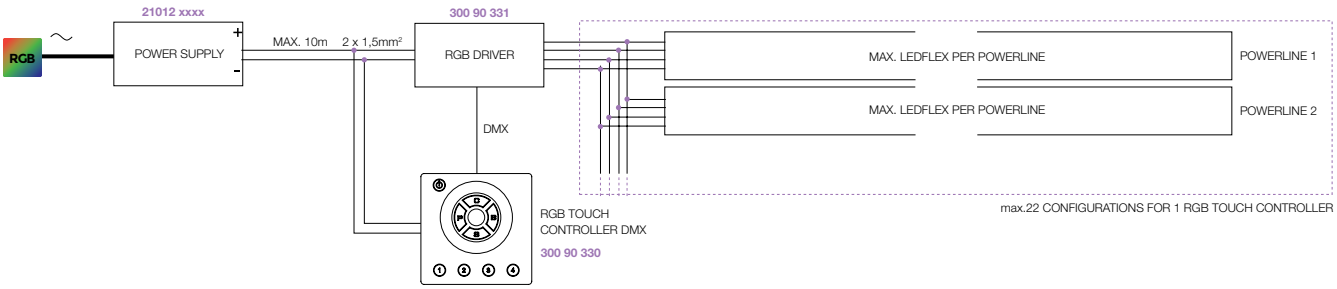

LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME - LEDFLEX TW

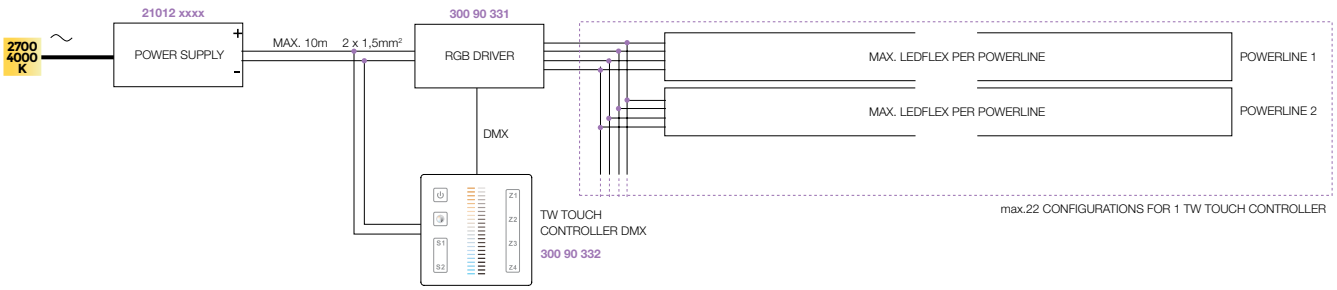

LED POWER SUPPLY 24V-DC - INSTALLATION SCHEME / LEDFLEX RGBTW

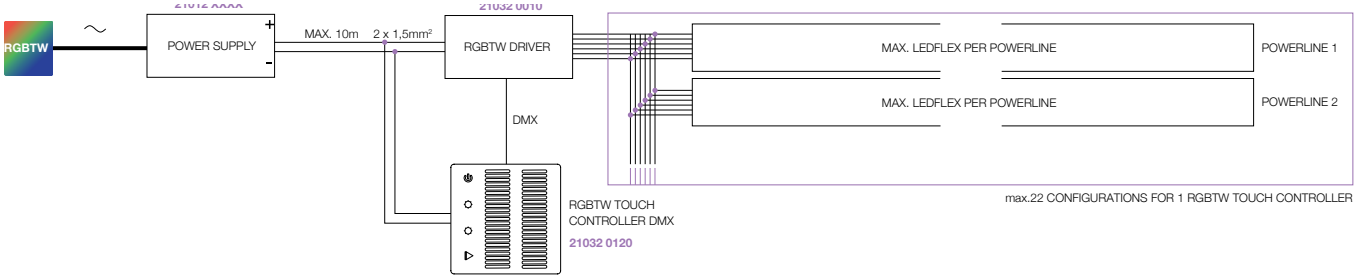

ALL DIAGRAMS ARE TYPICAL, PLEASE CHECK MAXIMUM POWER OF EACH INDIVIDUAL DIVICE FOR PRACTICAL USE.
MAX. LEDFLEX PER POWERLINE PAG 546-547

INSTALLATION


APPLICATION OF MOUNTING OPTIONS Consult website for mounting options per luminaire **deltalight.com**

SUSPENDED T-BAR & CEILING TILES (MIN. 8 MM)




APPLY: (replace tile by MDF)
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

MF (METAL FRAME) CEILING DRY LINED / GYPROC / MDF



APPLY:
TRIMLESS KIT
MOUNTING KIT 55/64/75
MOUNTING KIT / MOUNTING KIT L
ZB BOX

STUCANET




APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
ZB BOX

EXPOSED CONCRETE




APPLY:
EXPOSED CONCRETE PACK

CONCRETE + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

CONCRETE BEAM & BLOCK + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
CONCRETE PACK
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

PREFABRICATED CONCRETE PLATE




APPLY:
EXPOSED CONCRETE PACK

PREFABRICATED CONCRETE PLATE + PLASTER




APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX

BRICK + PLASTER



APPLY:
PLASTERKIT
CONCRETE BOX
TRIMLESS KIT
MOUNTING KIT / MOUNTING KIT L
ZB BOX


STRETCHED CEILING




APPLY:
MOUNTING KIT CSC / WSC


TEC






















PLASTERKIT


PLASTERKIT	REFERENCE	A x B	□	○	KG	S1 min. - max.	S2 min. - max.	TYPE
PLASTERKIT 101	**202 11 19**	205 x 205		77	0.1	80 x 180	195 - 205		3
PLASTERKIT 126	**202 72 99 01**	215 x 215	112 x 112		0.3	120 x 120			1
PLASTERKIT 127	**202 72 99 02**	215 x 250	112 x 215		0.3	120 x 225			2
PLASTERKIT 145	**304 05 99**	140 x 235	24 x 170		0.1	110 x 180			2
PLASTERKIT 161	**207 01 161**	200 x 200	75 x 75		0.2	175 x 175	185 - 200	110 - 200	1
PLASTERKIT 170	**207 01 170**	230 x 230		98	0.3	100 x 220	220 - 230		3
PLASTERKIT 186	**207 01 186**	190 x 150	75 x 75		0.2	150 x 110		105 - 140	1



































CONCRETE BOX


CONCRETE BOX	REFERENCE	A x B x C	KG			TYPE
CONCRETE BOX 145	**304 05 98**	150 x 210 x 75	0.9	155 x 215	80	5
CONCRETE BOX 151	**302 19 21**	42 x 42 x 58	0.1	43 x 43	65	8
CONCRETE BOX TR 152	**302 19 22**	42 x 42 x 58	0.1	43 x 43	65	7
CONCRETE BOX 153	**302 20 21**	43 x 43 x 60	0.1	43 x 43	65	10
CONCRETE BOX TR 154	**302 20 22**	43 x 43 x 60	0.1	43 x 43	65	9
CONCRETE BOX 161	**270 11 161**	202 x 202 x 186	0.6	207 x 207	196	1
CONCRETE BOX 186	**270 11 186**	145 x 105 x 70	0.4	150 x 110	75	3
CONCRETE BOX 187	**270 11 187**	80 x 95 x 70	0.5	85 x 100	75	11
CONCRETE BOX 188	**270 11 188**	Ø60 x 65	0.5	Ø67	65	13
CONCRETE BOX 191	**270 11 191**	310 x 80 x 95	0.4	315 x 80	110	2
CONCRETE BOX 192	**270 11 192**	130 x 120 x 105	0.4	135 x 125	115	2

INSTALLATION

MOUNTING KIT TYPE 6



MOUNTING KIT TYPE 8

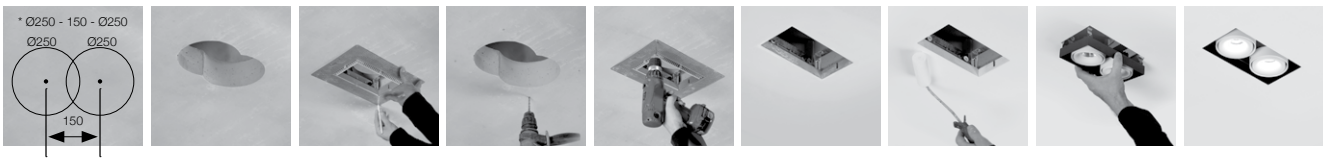

MOUNTING KIT TYPE 7




TEC

▲IR

NEW


MOUNTING KIT TYPE AIR

▲IR merges two in one.
The result? One design language, one installation layout, one look and feel, two functionalities. By using one design language, **▲IR** allows you to either opt for light and ventilation combined, only offer a light unit, or go for ventilation only.

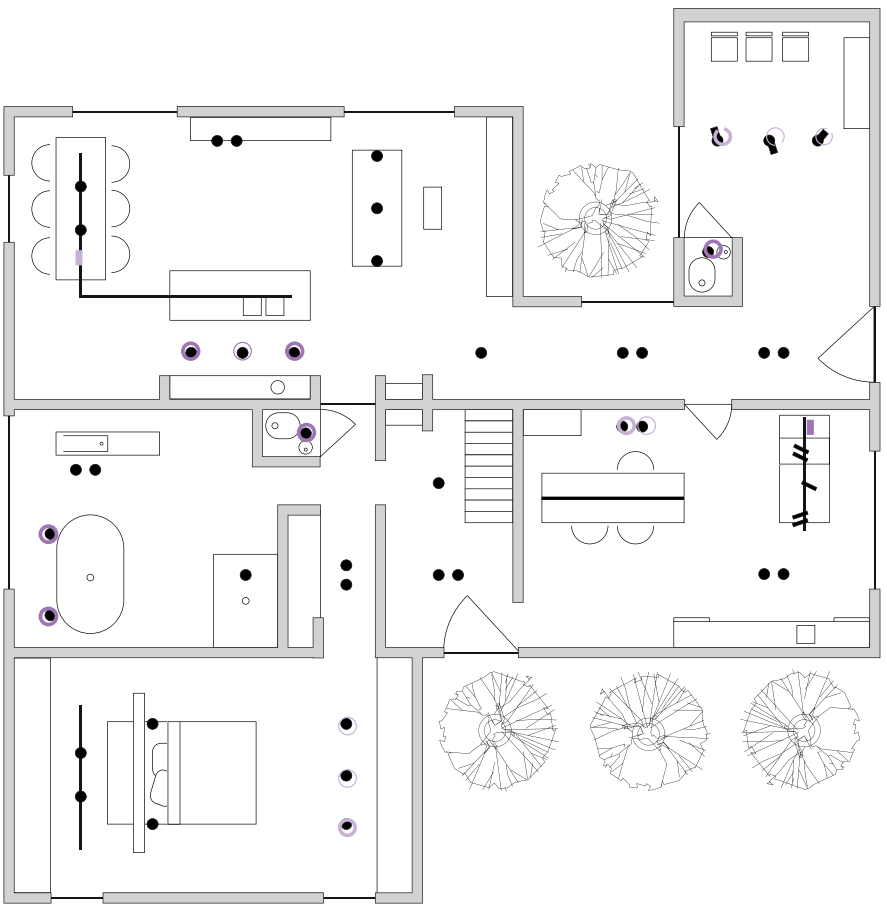

SUPPLY
- SPM20
- Spotlight
- Dummy light only


EXTRACTION
- SPM20
- Spotlight
- Dummy light only

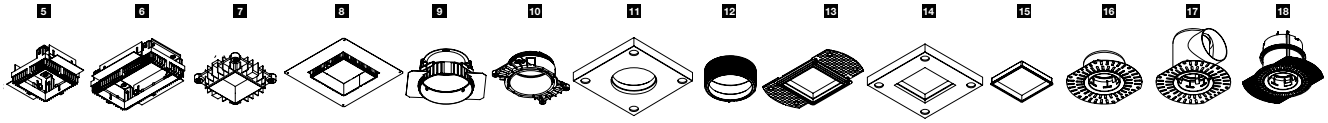


MOUNTING KITS

	REFERENCE	A x B x C	HOLLOW MATERIAL			SOLID MATERIAL	TYPE
						MIN.-MAX.	
MINIGRID IN 1 MOUNTING KIT	**202 71 95 01**	129 x 129 x 100	130 x 130		max.25		5
MINIGRID IN 1 MOUNTING KIT HP	**202 71 95 01 HP**	129 x 129 x 100	130 x 130		max.25		5
MINIGRID IN 1 MOUNTING KIT LARGE	**202 71 95 01L**	245 x 245 x 100				Ø202	8
MINIGRID IN 2 MOUNTING KIT	**202 71 95 02**	129 x 232 x 100	130 x 233		max.25		6
MINIGRID IN 2 MOUNTING KIT HP	**202 71 95 02 HP**	129 x 232 x 100	130 x 233		max.25		6
MINIGRID IN 2 MOUNTING KIT LARGE	**202 71 95 02L**	342 x 245 x 100				Ø202-100-Ø202*	8
MOUNTING KIT 1 LARGE MINIGRID 67	**19310 0110**	185 x 185 x 38		170			8
MOUNTING KIT 1 MINIGRID 67	**19310 0050**	148 x 113 x 38	105 x 105		max.16		5
MOUNTING KIT 2 LARGE MINIGRID 67	**19310 0120**	250 x 185 x 38		Ø170-60-Ø170			8
MOUNTING KIT 2 MINIGRID 67	**19310 0060**	185 x 148 x 38	105 x 176		max.16		6
MOUNTING KIT 75	**202 00 75**	117 x 117 x 30		121	9 or 12		7
MOUNTING KIT 75 TRIMLESS	**202 01 75**	117 x 117 x 30		121	9 or 12		7
MOUNTING KIT 75 TRIMLESS O.F.A.	**202 01 75 OFA**	240 x 240 x 40				Ø182	10
MOUNTING KIT DEEP ENTERO RD-S TRIMLESS	**28500 0220**	Ø66 x 41		Ø133	min.6 - max.16		10
MOUNTING KIT DOT.COM M4 TRIMLESS	**424 512 04 00**	199 x 35 x 43	127 x 36 x 60			5 to 22	6
MOUNTING KIT DOT.COM M4 TRIMLESS CSC	**15212 0110**	170 x 80 x 43	-	-	-	-	6
MOUNTING KIT DOT.COM M4 TRIMLESS WSC	**15212 0180**	126 x 36 x 37	-	-	-	-	6
MOUNTING KIT ENTERO RD-L	**28400 0030**	225 x 160 x 20	-	162	min.10 - max.15		12
MOUNTING KIT ENTERO RD-L CSC	**28400 0090**	190 x 190 x 18	-	-	-		11
MOUNTING KIT ENTERO RD-L WSC	**28400 0150**	Ø121 x 13	-	-	-		12
MOUNTING KIT ENTERO RD-M CSC	**28400 0080**	170 x 170 x 18	-	-	-		11
MOUNTING KIT ENTERO RD-M O.F.A.	**28400 0020**	172 x 117 x 45	-	127	-		10
MOUNTING KIT ENTERO RD-M WSC	**28400 0140**	Ø111 x 39	-	-	-		12
MOUNTING KIT ENTERO RD-S CSC	**28400 0070**	150 x 150 x 18	-	-	-		11
MOUNTING KIT ENTERO RD-S O.F.A.	**28400 0010**	138 x 97 x 45	-	105	-		10
MOUNTING KIT ENTERO RD-S WSC	**28400 0130**	Ø90 x 36	-	-	-		12
MOUNTING KIT ENTERO SQ-L	**28400 0060**	235 x 145 x 20	142 x 142	-	min.10 - max.15		13
MOUNTING KIT ENTERO SQ-L CSC	**28400 0120**	190 x 190 x 18	-	-	-		14
MOUNTING KIT ENTERO SQ-L WSC	**28400 0180**	121 x 121 x 13	-	-	-		15
MOUNTING KIT ENTERO SQ-M	**28400 0050**	210 x 119 x 18	122 x 122	-	min.10 - max.15		13
MOUNTING KIT ENTERO SQ-M CSC	**28400 0110**	170 x 170 x 18	-	-	-		14
MOUNTING KIT ENTERO SQ-M WSC	**28400 0170**	97 x 97 x 13	-	-	-		15
MOUNTING KIT ENTERO SQ-S	**28400 0040**	190 x 98 x 15	106 x 106	-	min.10 - max.15		13
MOUNTING KIT ENTERO SQ-S CSC	**28400 0100**	150 x 150 x 18	-	-	-		14
MOUNTING KIT ENTERO SQ-S WSC	**28400 0160**	83 x 83 x 13	-	-	-		15
MOUNTING KIT FLUSH IMAX II ROUND	**15215 0010**	118 x 118 x 25		121	12	Ø121	7
MOUNTING KIT FLUSH IMAX II SQUARE	**15215 0020**	125 x 170 x 23	126 x 126		12		7
MOUNTING KIT FLUSH INLET S	**304 05 01**	200 x 50 x 41	55 x 190		min.4 - max.32		10
MOUNTING KIT FLUSH SPY	**414 90 01**	140 x 82 x 22		Ø83	9 or 12		10
MOUNTING KIT INLET TRIMLESS H20	**13210 0050**	241 x 149 x 28	205 x 110				13
MOUNTING KIT INLET TRIMLESS H7	**13210 0030**	116 x 149 x 28	80 x 110				13
MOUNTING KIT INLET TRIMLESS L113	**13210 0070**	1141 x 112 x 28	1145 x 75				13
MOUNTING KIT INLET TRIMLESS L20	**13210 0040**	204 x 112 x 28	205 x 75				13
MOUNTING KIT INLET TRIMLESS L38	**13210 0060**	381 x 112 x 28	395 x 75				13
MOUNTING KIT INLET TRIMLESS XS	**13210 0010**	65 x 175 x 42	30 x 135				6
MOUNTING KIT MINI DEEP RINGO II TRIMLESS	**19410 0010**	122 x 64 x 50		Ø68	12,5 or 25		10
MOUNTING KIT MINIGRID IN 1 CSC	**15212 0120**	180 x 180 x 67	-	-	-	-	5
MOUNTING KIT MINIGRID IN 2 CSC	**15212 0130**	180 x 285 x 67	-	-	-	-	6
MOUNTING KIT NIME O.F.A.	**26410 0010**	172 x 117 x 56		127	max.25	Ø127	10
MOUNTING KIT NO AIR 101	**29810 0050**	180 x 205 x 73		168			16
MOUNTING KIT NO AIR 102	**29810 0060**	180 x 205 x 73		168			16
MOUNTING KIT NO AIR 103	**29810 0070**	180 x 205 x 73		168			16
MOUNTING KIT NO AIR 104	**29810 0080**	180 x 205 x 73		168			16
MOUNTING KIT NO AIR 105	**29810 0120**	180 x 205 x 73		168			16
MOUNTING KIT PLAT-OH! TRIMLESS	**29510 0020**						9
MOUNTING KIT R102 TRIMLESS CSC	**15212 0090**	160 x 160 x 56	-	-	-	-	10
MOUNTING KIT R102 TRIMLESS O.F.A.	**15212 2010**	172 X 117 X 56		127		Ø127	10
MOUNTING KIT R102 TRIMLESS WSC	**15212 0170**	111 x 111 x 50	-	-	-	-	10
MOUNTING KIT R60 TRIMLESS CSC	**15212 0060**	120 x 120 x 59	-	-	-	-	10
MOUNTING KIT R60 TRIMLESS O.F.A.	**15212 2050**	155 x 155 x 60		92	max.25	Ø92 - 125	10
MOUNTING KIT R60 TRIMLESS WSC	**15212 0140**	59 x 59 x 53	-	-	-	-	10
MOUNTING KIT R82 TRIMLESS CSC	**15212 0070**	140 x 140 x 45	-	-	-	-	10
MOUNTING KIT R82 TRIMLESS O.F.A.	**15212 2000**	138 x 97 x 45		105	max.25	Ø105	10
MOUNTING KIT R82 TRIMLESS WSC	**15212 0150**	90 x 90 x 31	-	-	-	-	10
MOUNTING KIT S102 TRIMLESS	**400 92 00**	125 x 220 x 55	125 x 125		min11		5
MOUNTING KIT S102 TRIMLESS O.F.A.	**400 92 00 OFA**	264 x 264 x 56	230 x 160				5
MOUNTING KIT SIDE AIR 101	**29810 0010**	180 x 205 x 73		168	max.12		17
MOUNTING KIT SIDE AIR 102	**29810 0020**	180 x 205 x 73		168	max.12		17
MOUNTING KIT SIDE AIR 103	**29810 0030**	180 x 205 x 73		168	max.12		17
MOUNTING KIT SIDE AIR 104	**29810 0040**	180 x 205 x 73		168	max.12		17
MOUNTING KIT SIDE AIR 105	**29810 0110**	180 x 205 x 73		168	max.12		17
MOUNTING KIT SIDE AIR ONLY 1	**29810 0100**	180 x 205 x 73		168	max.12		17
MOUNTING KIT SPY 39 PLUG O.F.A.	**24144 0060**						12
MOUNTING KIT SPY 39 TRIMLESS IN	**24144 0050**	140 x 82 x 125		82	9 or 12		12
MOUNTING KIT SPY 39/52 TRIMLESS CSC	**15212 0080**	140 x 140 x 67	-	-	-	-	10
MOUNTING KIT SPY 39/52 TRIMLESS O.F.A.	**15212 2030**	138 x 97 x 45		105	max.25	Ø105	10
MOUNTING KIT SPY 39/52 TRIMLESS WSC	**15212 0160**	90 x 90 x 55	-	-	-	-	10
MOUNTING KIT TAGLINE TRIMLESS	**304 04 01**	172 x 72 x 33	174 x 26 x 45			min.12,5	6
MOUNTING KIT TOP AIR 101	**29810 0210**	171 x 235 x 172					18
MOUNTING KIT TOP AIR 102	**29810 0220**	171 x 235 x 172					18
MOUNTING KIT TOP AIR 103	**29810 0230**	171 x 235 x 172					18
MOUNTING KIT TOP AIR 104	**29810 0240**	171 x 235 x 172					18
MOUNTING KIT TOP AIR 105	**29810 0130**	171 x 235 x 172					18
MOUNTING KIT TOP AIR ONLY 1	**29810 0200**	171 x 235 x 172					18
MOUNTING KIT TRIMLESS ARTUUR S/SA	**27710 0020**	121 x 121 x 36		121	9 or 12		7
MOUNTING KIT TRIMLESS MICROSPY IN	**15212 2040**	100 x 65 x 33		Ø48			10
MOUNTING KIT TRIMLESS MICROSPY IN OK	**15212 2020**	125 x 60 x33		Ø68	fix 12mm		10
MOUNTING KIT TRIMLESS O.F.A. ARTUUR R	**27710 0010**	142 x 98 x 47		105	max.25		10
MOUNTING KIT TWEETER TRIMLESS	**202 15 61 971**	214 x 125 x 70		152	max.25	Ø182	9
MOUNTING KIT TWEETER TRIMLESS CSC	**15212 0100**	200 x 200 x 80	-	-	-	-	9
MOUNTING KIT UHO L TRIMLESS	**15212 2060**	100 x 65 x 38				Ø50	10
MULTINOVA 30 RECESSED KIT	**27910 0050**	Ø339 x 120		Ø341	max 25 mm		12
MULTINOVA 55 RECESSED KIT	**28010 0050**	Ø589 x 117		Ø610	max 25 mm		12
SUPERDOME RECESSED KIT	**321 96 1036**	1210 x 56	1105 x 1105		fix 12mm		12
SUPERNOVA 125 RECESSED KIT	**274 94 1310**	1325 x 115		Ø1335	max 25 mm		12
SUPERNOVA 65 RECESSED KIT	**274 94 0710**	725 x 115		Ø735	max 25 mm		12
SUPERNOVA 95 RECESSED KIT	**274 94 1010**	1025 x 115		Ø1035	max 25 mm		12

INSTALLATION

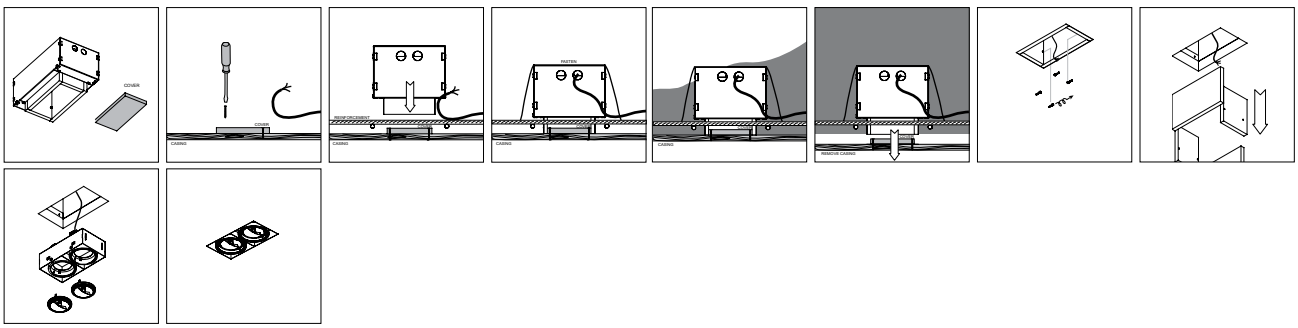


TEC

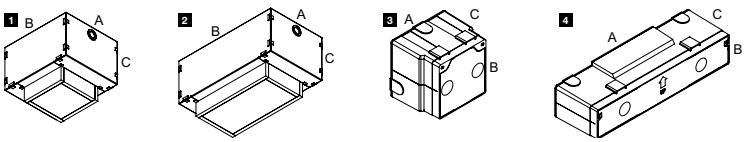


CONCRETE PACK


	REFERENCE	A x B x C	KG			REQUIREMENT	TYPE
CONCRETE PACK LOGIC W L	**304 32 96**	310 x 80 x 95	0.4	315 x 80	135	REQUIREMENT	4
CONCRETE PACK LOGIC W S	**304 33 96**	130 x 120 x 105	0.4	135 x 125	140	REQUIREMENT	3
CONCRETE PACK MGIT 1	**202 71 96 01**	133 x 160 x 133	1.5	160 x 160	140	REQUIREMENT	1
CONCRETE PACK MGIT 2	**202 71 96 02**	234 x 160 x 133	2.1	260 x 160	140	REQUIREMENT	2





TUBE

	REFERENCE	COLOUR	TYPE
iMAX II TUBE ROUND	**24213 0010**	B / MMAT / W	7
iMAX II TUBE ROUND IP	**24213 0040**	B / MMAT / W	7
iMAX II TUBE ROUND TRIMLESS	**24213 0020**	B / MMAT / W	8
iMAX II TUBE SQUARE	**24213 0080**	B / MMAT / W	9
iMAX II TUBE SQUARE TRIMLESS	**24213 0030**	B / MMAT / W	10
MIDISPY TUBE	**414 03 00**	B / FBR / FG / MMAT / SG / W	3
SPY TUBE	**414 01 00**	B / FBR / FG / MMAT / SG / W	4
SPY 39 TUBE	**24144 0010**	B / FBR / FG / GC / W	3
SPY 39 L TUBE	**24144 0020**	B / FBR / FG / GC / W	3
SPY 52 TUBE	**19810 0100**	B / FBR / FG / GC / W	6
SPY 66 TUBE	**24611 0100**	B / FBR / FG / GC / W	6
SPY 66 LP/MP TUBE	**24611 0010**	B / MMAT / W	6
SPY 90 TUBE	**19810 0170**	B / FBR / FG / GC / PB / W	6
VIZIR TUBE	**473 01 00**	B / FBR / FG / W	6
TUBE 52	**19810 0230**	B / FBR / FG / GC / PB / W	6












SUSPENSION / CONNECTION ST

SUSPENSION ST	SUSPENSION + CONNECTION ST	CONNECTION ST
27 x 60 max. 25	27 x 60 max. 25	43 x 80 max. 25
15225 0340 ◇	**15225 0350** ◇	**15225 0360** ◇
◇ B ● / W ○	◇ B ● / W ○	◇ B ● / W ○
	ONLY CONNECTION	16A / 250V
INCL. 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 2x 1,5 mm² 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 5x 1,5 mm²








SUSPENSION / CONNECTION TRIMLESS

play.deltalight.com/suspensiontrimlessconcrete
play.deltalight.com/suspensiontrimlessplasterboard

SUSPENSION TRIMLESS O.F.A.	SUSPENSION + CONNECTION TRIMLESS O.F.A.	CONNECTION TRIMLESS O.F.A.
62 x 80 9 or 12 102 x 80 (CONCRETE)	62 x 80 9 or 12 102 x 80 (CONCRETE)	62 x 80 9 or 12 102 x 80 (CONCRETE)
328 10 01	**328 10 02**	**328 10 03**
	4A / 250V	4A / 250V
INCL. 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 3x 2,5 mm² 1 x AUTOMATIC ADJUSTMENT	INCL. 1 x CONNECTOR max. 3x 2,5 mm²













CABLE BASE		COVERSET	CABLE CLAMP
CABLE BASE R	**CABLE BASE S**	**COVERSET R 100**	**CABLE CLAMP**
203 99 55 ◇	**203 99 56** ◇	**204 00 100** ◇	**15229 0010** ◇
◇ ANO ● / B ● / W ○	◇ ANO ● / B ● / W ○		◇ B
OPTIONS COVERSET R 62-90-100	OPTIONS COVERSET S 62-90-100	◇ B ● / W ○	

INSTALLATION













CONNECTOR


IP68 CONNECTOR 3P	IP68 JUNCTION BOX 4P	IP68 CONNECTION KIT	IP68 Y-CONNECTOR 5P
216 12 02	**431 99 02**	**216 12 01**	**21034 0150**
CABLE Ø7,5-12 mm MAX.3 x 1,5mm² 4A 250V IP68	4xCABLE Ø7,5-12 mm MAX.3 x 1,5mm² 4A 250V IP68	CABLE Ø7,5-12 mm MAX.3 x 1,5mm² 4A 250V IP68	CABLE Ø8-17 mm MAX.5 x 1,5mm² 32A 450V IP68











CBOX


CBOX	CBOX 350mA / 10W
142 x 142 x 300	142 x 142 x 300
216 12 00	**216 14 35**
INCL.2 x PG13,5 / 1 x PG11 IP67	220-240V / 50-60Hz INCL.2 x PG13,5 / 2 x PG11 INCL.LED POWER SUPPLY 350mA-DC / 10W CURRENT CONTROLLED IP67


GENIE BOX


LOGIC 90 BOX R	LOGIC 90 BOX S
224 x 159 x 150	224 x 159 x 155
213 19 09	**213 19 08**
INCL.1 x BASE PLATE EXCL.TRANSFO max.500kg	INCL.1 x BASE PLATE EXCL.TRANSFO max.500kg


LOGIC BOX R

LOGIC 40 BOX R
Ø140 x 136
13910 0010
max.500kg












LOGIC BOX

LOGIC 60 BOX R	LOGIC 190 R BOX	LOGIC LINEAR 440 BOX	LOGIC LINEAR 880 BOX
175 x 125 x 105	300 x 230 x 190	480 x 150 x 140	920 x 150 x 140
213 19 10	**30210 0010**	**30810 0010**	**30810 0030**
INCL.1 x BASE PLATE EXCL.TRANSFO max.500kg	max.500kg	max.500kg	max.500kg













PIN			
229 01 01	229 01 02	229 01 03	229 01 04














PIN				
229 01 11	229 01 12	229 01 16	15222 0170	15222 0180













PLATE				
229 02 01	229 02 02	229 02 03	229 02 07	229 02 11

Projects.




SHARP INSURANCE
DNA ARCHITECTEN

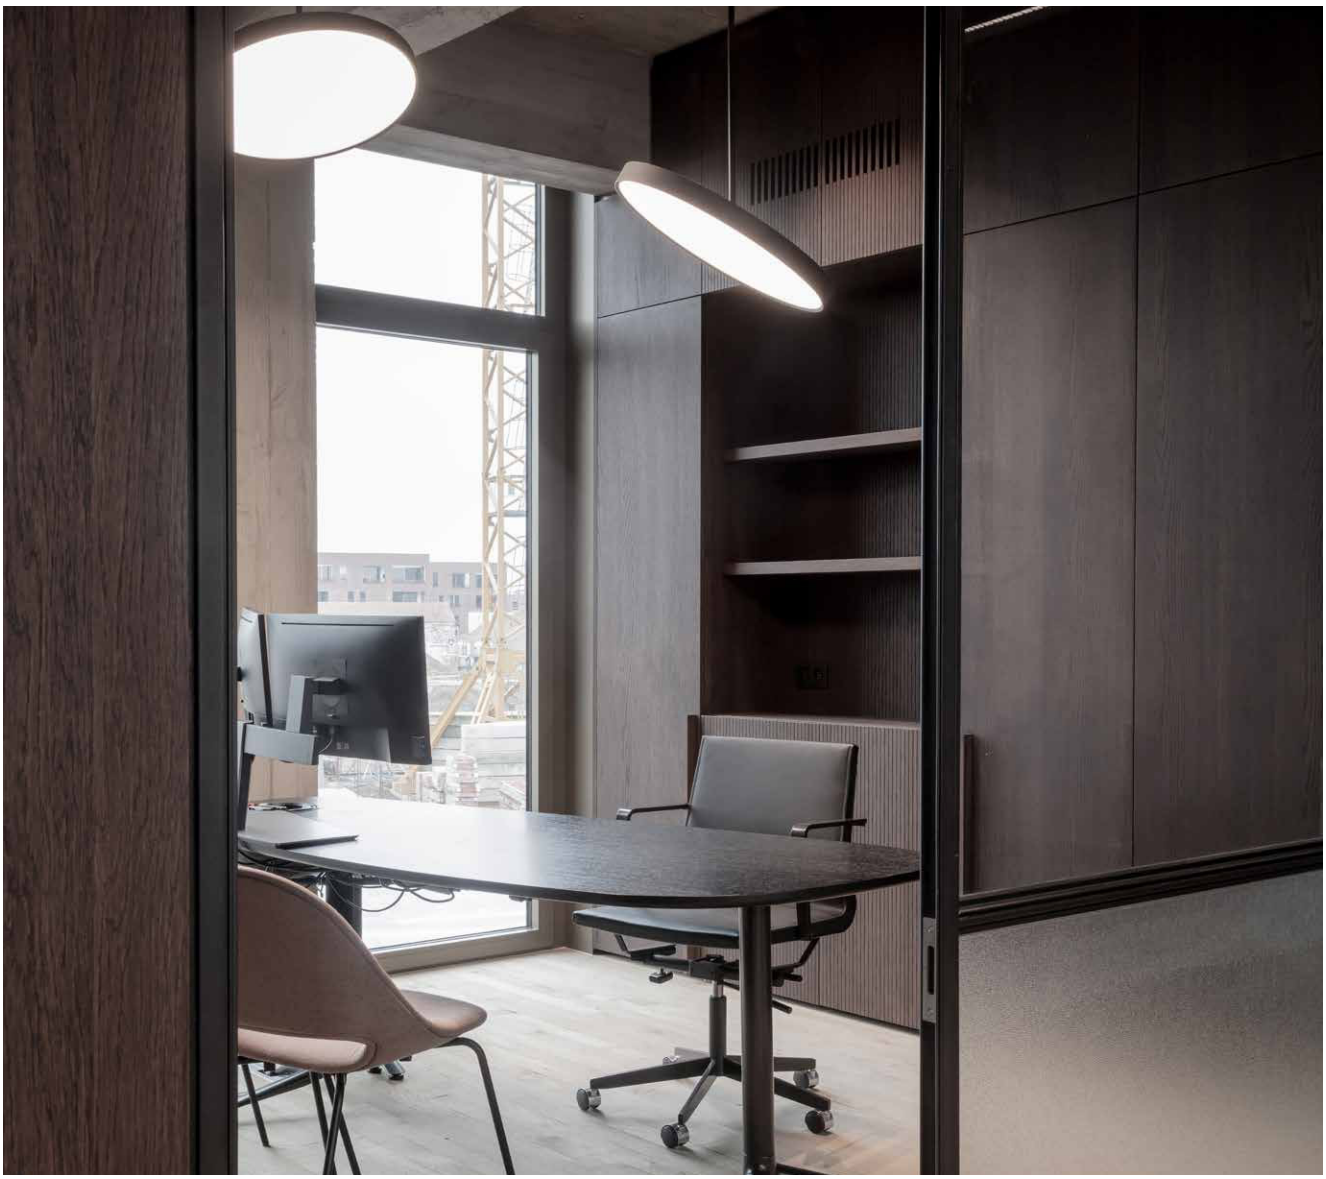

Office



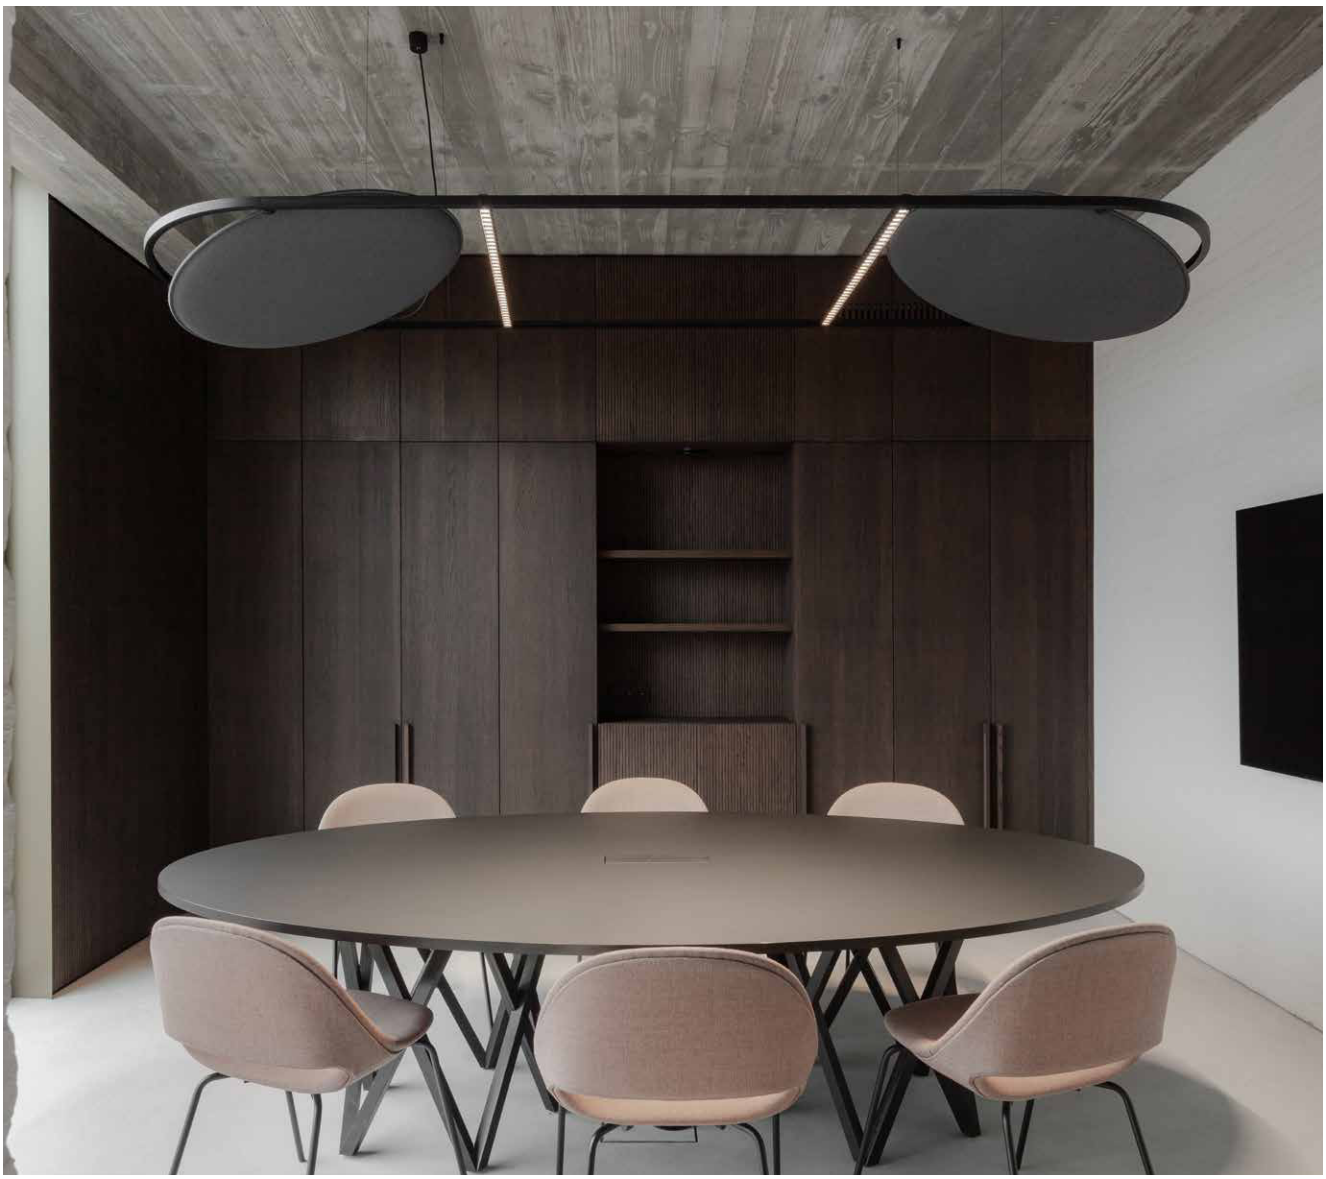

SHARP INSURANCE
DNA ARCHITECTEN






SHARP INSURANCE
DNA ARCHITECTEN



W : ARCHITEKTEN
PHOTOGRAPHY FOTOGRAFIE FREI & STEFFEN SCHRAEGLE

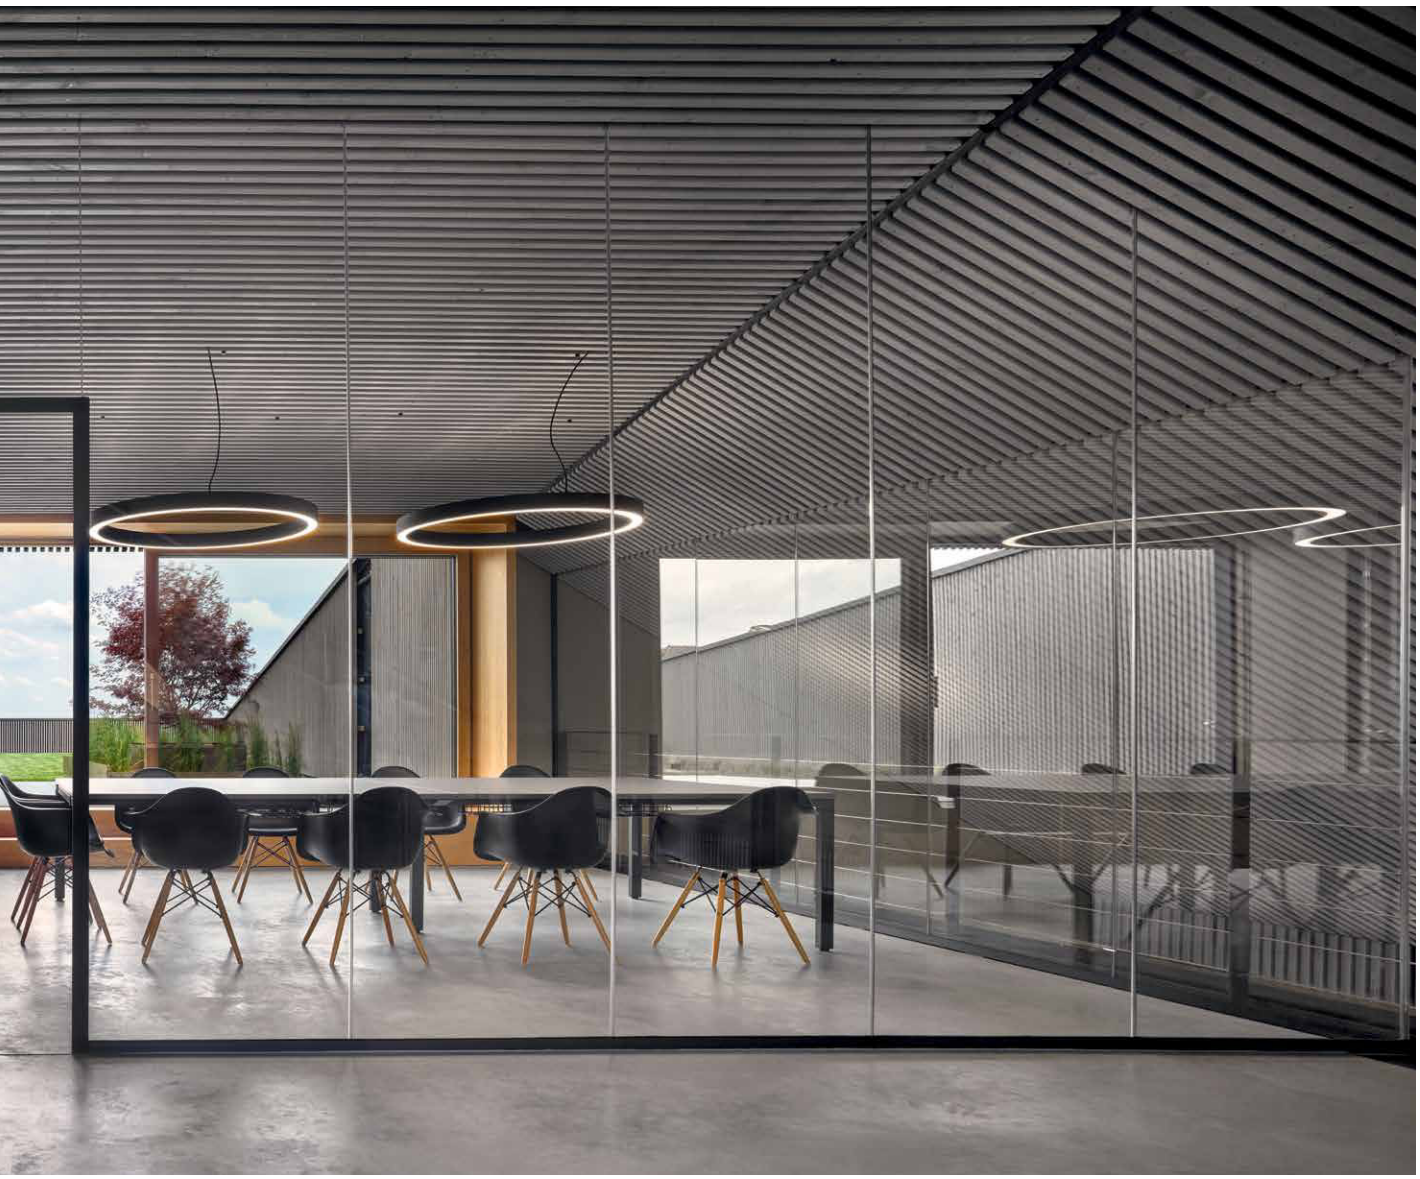



ARCHITECT MILENA VUKMIROVIĆ DARCH





Architects O'Donnell + Tuomey



NEELS ARCHITECTEN



Hospitality

INTERIOR DESIGN STUDIO DOTT.
PHOTOGRAPHY OLIVIER VAN DAELE



ARCHITECT OLSON KUNDIG
LIGHTING DESIGN NITEO LIGHTING
PHOTOGRAPHY AARON LEITZ




ARCHITECT OLSON KUNDIG
LIGHTING DESIGN NITEO LIGHTING
PHOTOGRAPHY AARON LEITZ





RESTAURANT COMMOTIE
INTERIOR DESIGN MERIJN DEGRAEVE
LIGHTING DESIGN JULIAN LANGERAERT (ALFALICHT GENT)

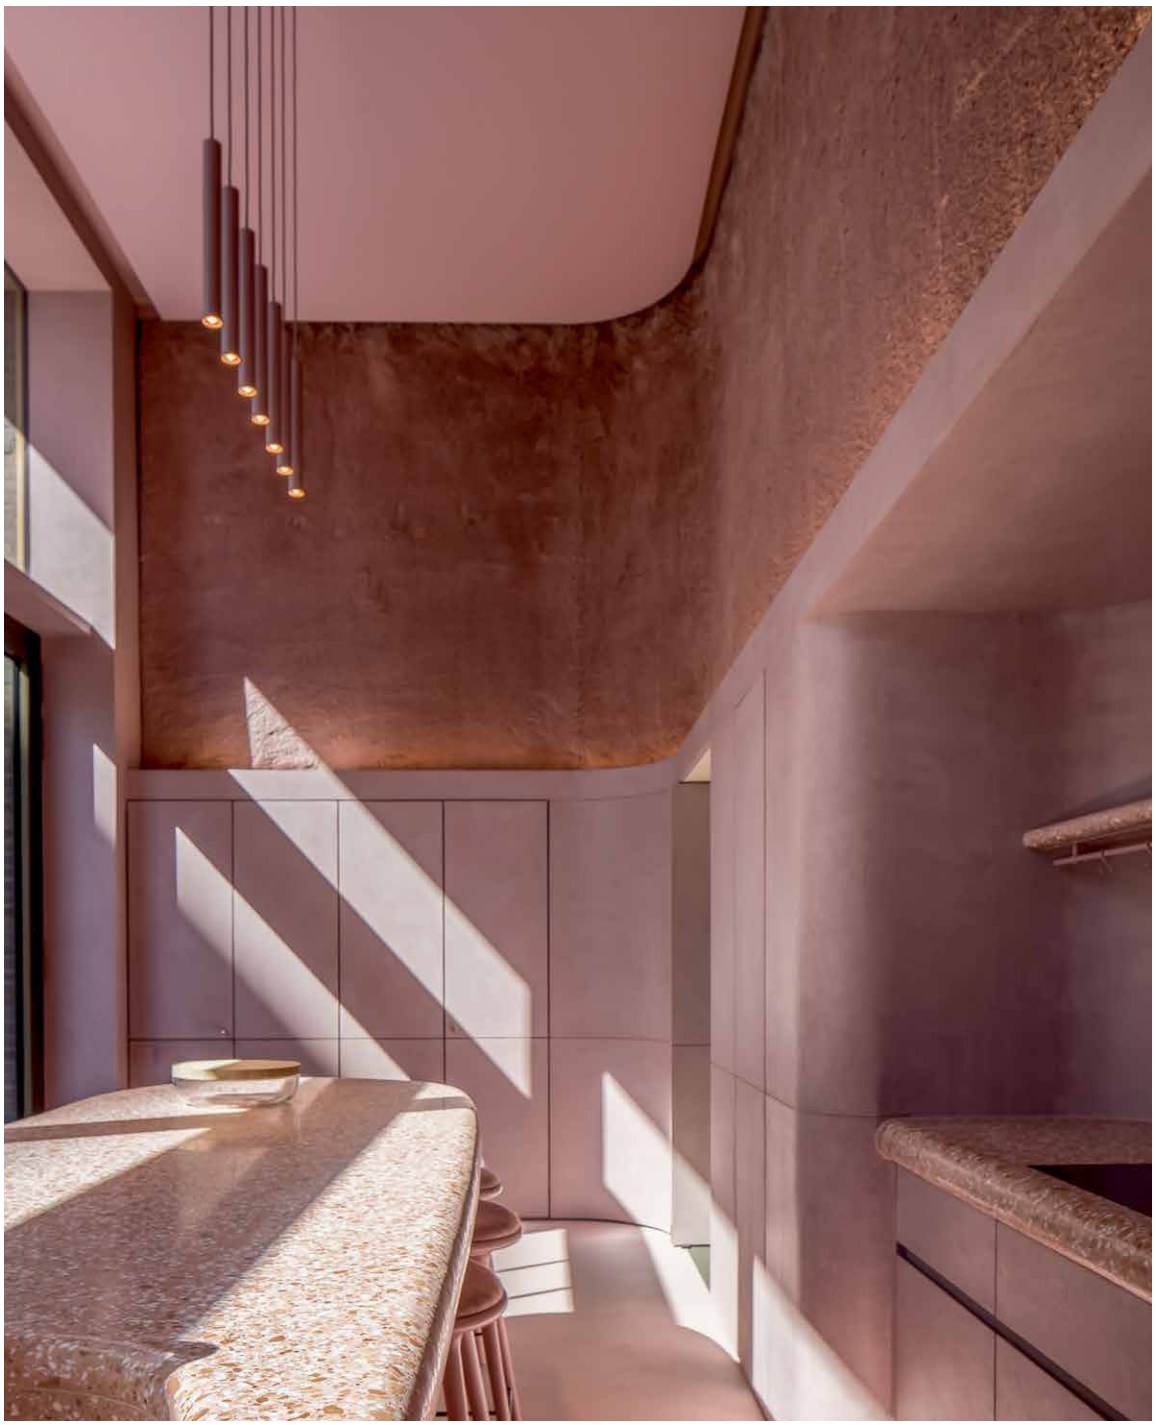

INTERIOR DESIGN MAISTER
PHOTOGRAPHY CAFEINE

Residential

DDM ARCHITECTUUR
PHOTOGRAPHY LENZER





DDM ARCHITECTUUR
PHOTOGRAPHY LENZER



DDM ARCHITECTUUR
PHOTOGRAPHY LENZER








SOULAGES







SABATO
HEY SMELLY

Retail

ARCHITECT STARBUCKS INHOUSE / PERKINS & WILL
LIGHTING DESIGN NITEO LIGHTING



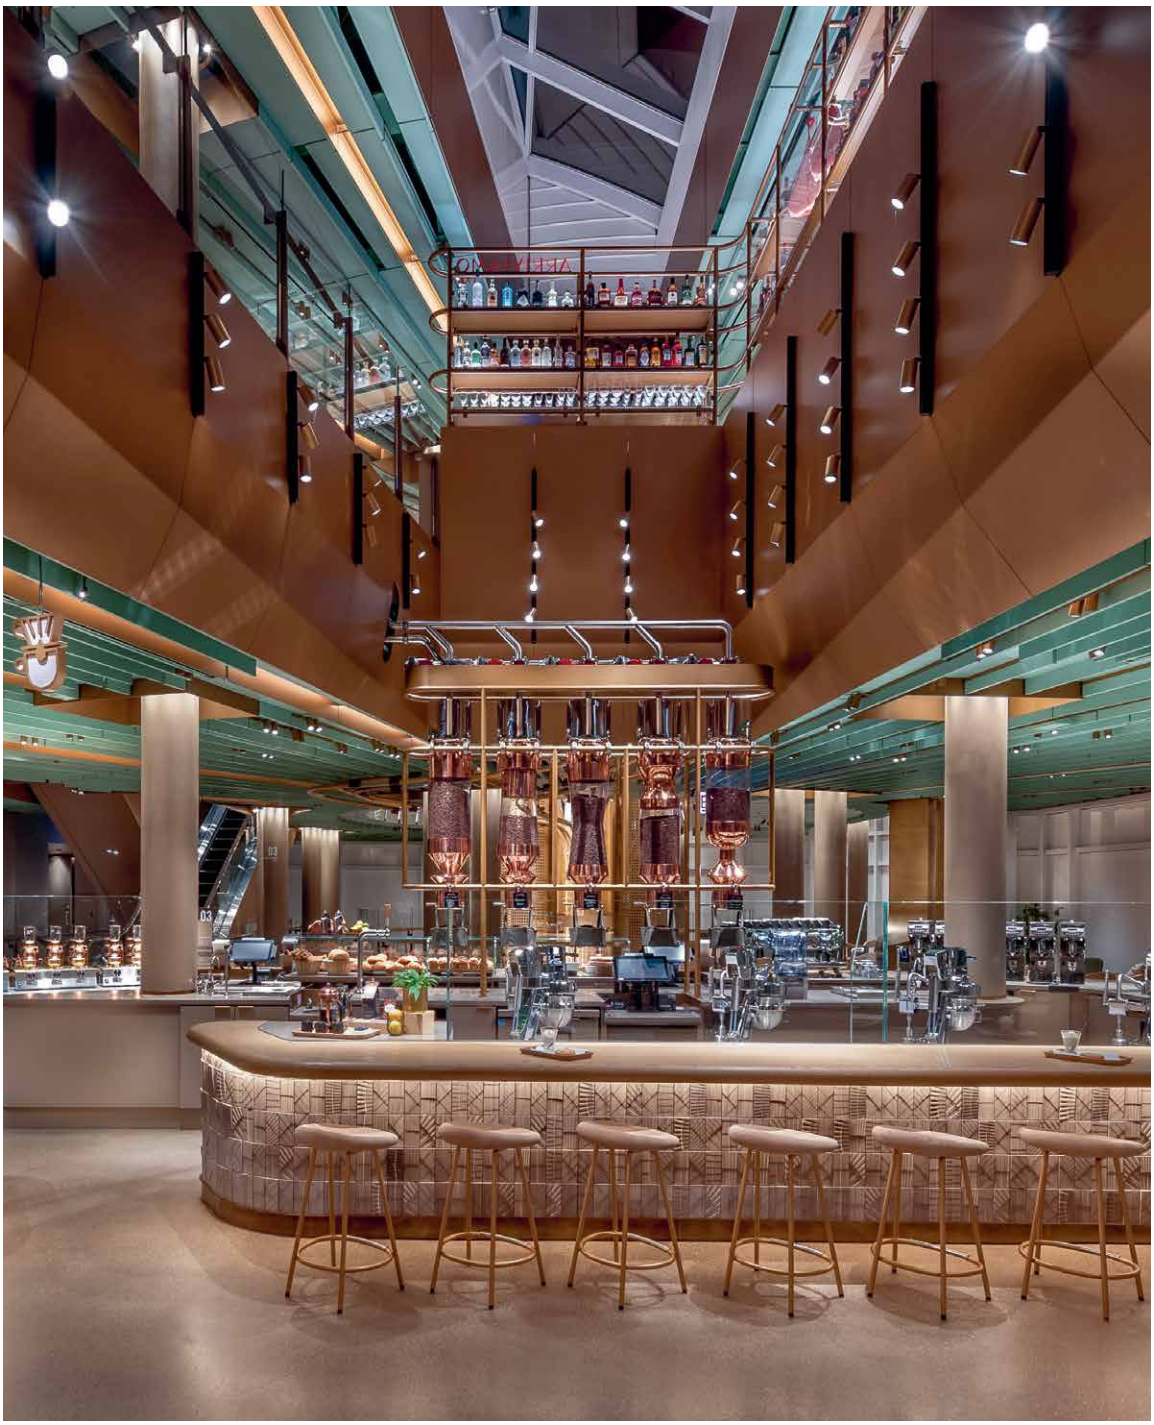

ARCHITECT STARBUCKS INHOUSE / PERKINS & WILL
LIGHTING DESIGN NITEO LIGHTING






MANIA-K





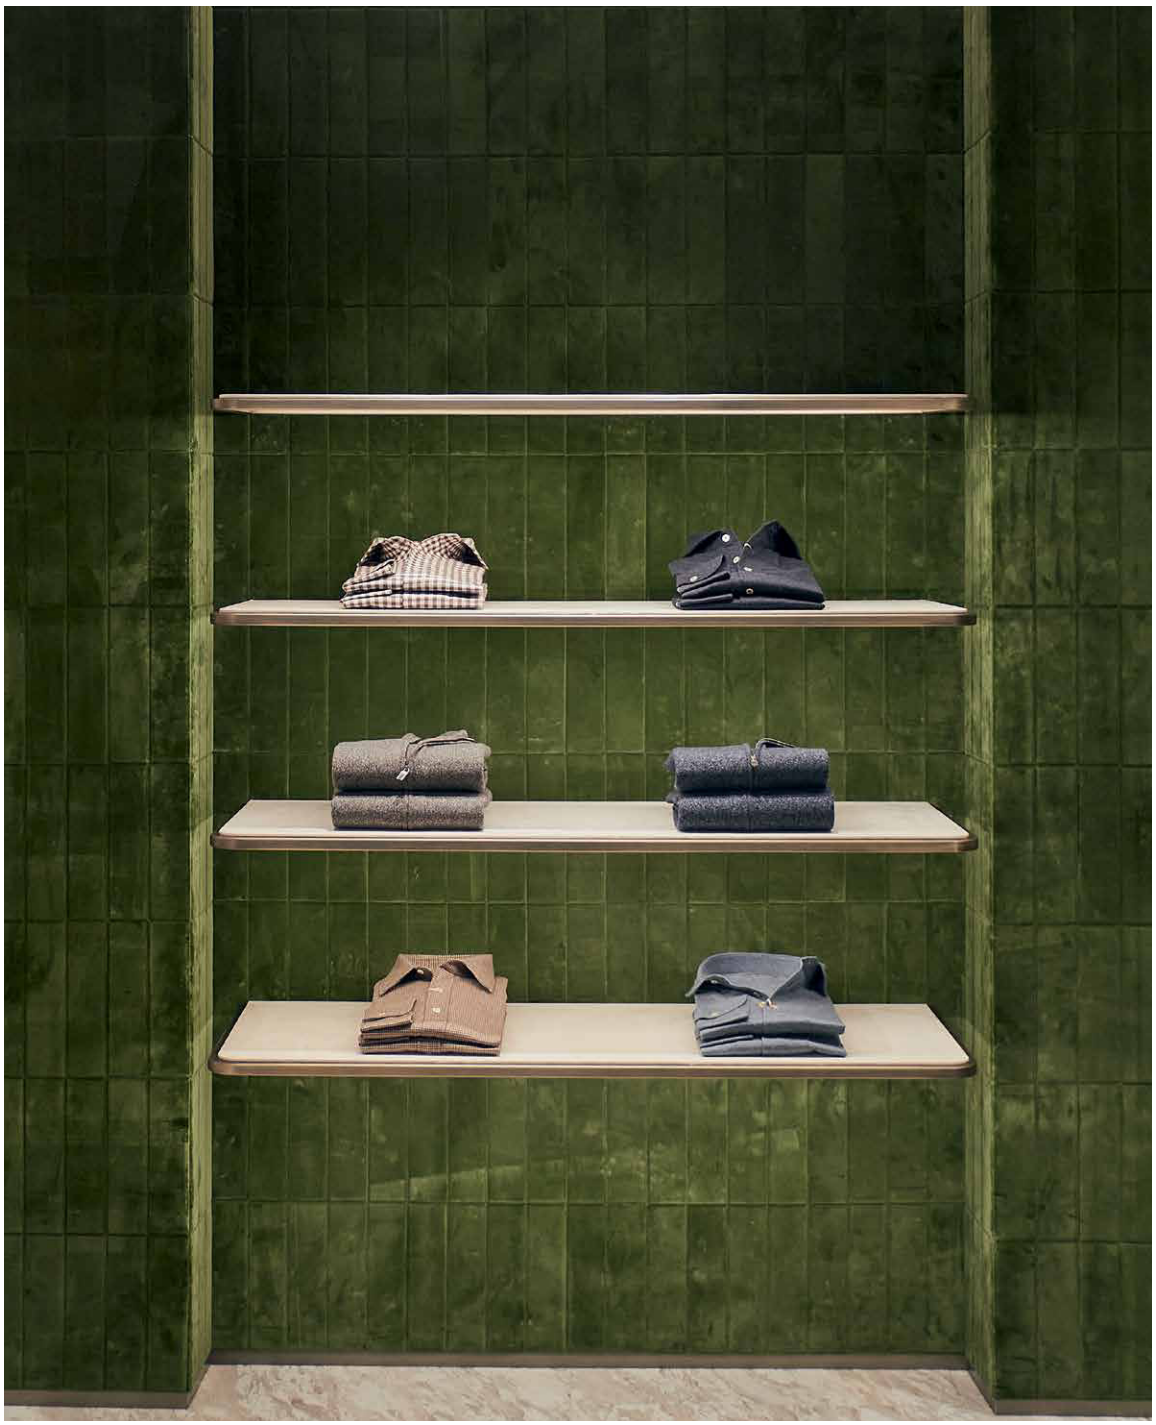

ARCHITECT HANGAR DESIGN



BAPE STORE LONDON
INTERIOR DESIGN I.T


BATHING APE



ARCHITECT TANNER DESIGN
LIGHTING DESIGN DPA LIGHTING CONSULTANTS
CREATIVE STUDIO MYTHOLOGY
PROJECT MGT DECON PROJECT MANAGEMENT




IE ITALIA

Public



ARCHITECTS HELIOPOLIS 21 & ARX
PHOTOGRAPHY LUCA CIOCI



ARCHITECTS HELIOPOLIS 21 & ARX
PHOTOGRAPHY LUCA CIOCI


11



PROJECT CAMPUS DELL'UNIVERSITA' CATTOLICA A CREMONA
ARCHITECT LAMBERTO ROSSI ASSOCIATI / L. ROSSI E M. TARABELLA
CLIENT FONDAZIONE GIOVANNI ARVEDI E LUCIANA BUSCHINI




ARCHITECTS DREAMER + ROGER NELSON
PHOTOGRAPHY NICOLE ENGLAND








Outdoor

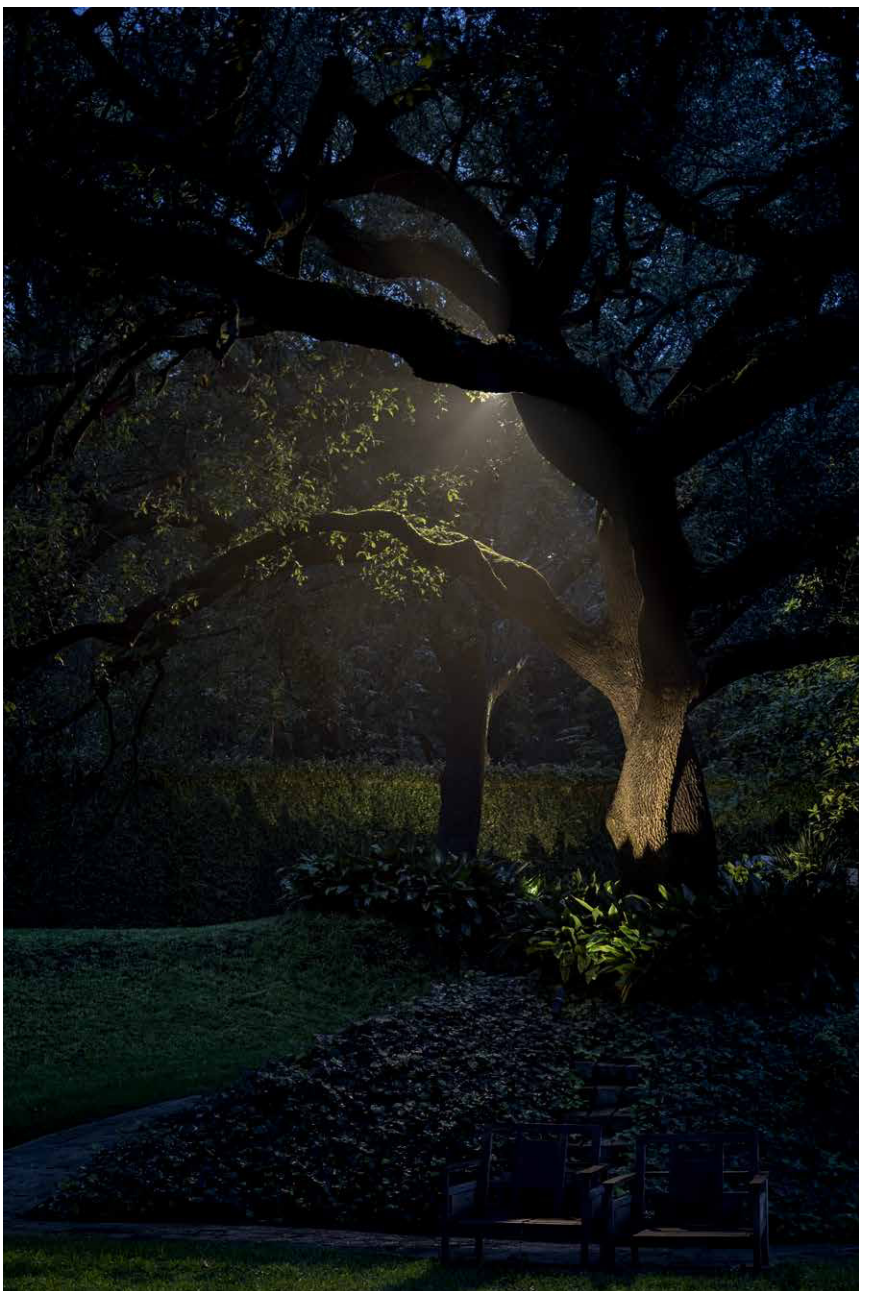





ARCHITECT ANARCHITECT / PHOTOGRAPHY LUCA CIOCI











GOVAERT & VANHOUTTE ARCHITECTS



W ARCHITEKTEN / PHOTOGRAPHY STEFFEN SCHRAEGLE



Create on paper.
Imagine online.

We are Delta Light

Delta Light's success is built on the determination, passion, and talent of our global team.
We hereby thank all of our colleagues and partners for their invaluable work. The lighting industry is evolving and growing at very high speed.

As a family run business, we have a personal stake in keeping our clients happy. As such we are committed to make a difference through original designs, outstanding service levels, an eye for detail and personal contact and striving to be the best in all we do.

Our product development process is based on a combination of creativity and technological innovation. It is our mission to present to the world a portfolio of lighting solutions that satisfy people's desires and needs, realise peoples visions, whilst creating a perfect symbiosis between architecture, function and atmosphere.



Jan, Peter & Paul Ameloot



worldwide

#wearedeltalight

For additional product information, technical downloads, project inspiration, contact details and much more… please go to
deltalight.com

Whether you access the site via your desktop computer or mobile device, an inspiring platform opens up with up-to-date content, exciting images, extensive product information, upgraded user experience… all in a fresh look & feel.

The **product search engine** will quickly guide you to the right product page, where you can download 3D files, Revit files, product data sheets, manual, IES files and drawings.

The **My Delta Light Toolbox**
helps you to quickly collect, save, download and share images and product information. Start creating your personal shortlists and share them with your partner, client, architect, electrical installer or other people involved in your project. You are free to use this feature without login, or you can register to save and edit multiple pinlists.

If you are looking for a contact person in your region or country please go to
deltalight.com/contact

offices

Asia

Delta Light Asia
asia@deltalight.com
deltalight.com

South East Asia
T +65 9832 3753

North East Asia
T +852 9293 0096

China

Delta Light China
china@deltalight.com
deltalight.com

Beijing
T+86 138 1070 8782

Shanghai
T+86 135 8578 5451

Latin America

Delta Light Latin America
M +32 492 724 070
latin@deltalight.com
deltalight.com

Colombia
T +57 1 749 5307
M +57 321 202 5501
Colombia@deltalight.com

Mexico
Mexico@deltalight.com

Mexico City
M +52 556 204 1203

Monterrey
M +52 181 3081 4196

Russia / Eastern Europe,/ Middle Asia

Delta Light REEMA
reema@deltalight.com
deltalight.com

Moscow
T +7 926 167 76 98

Saint-Petersburg
T +7 921 79 183 88

United Kingdom

Delta Light UK LTD
T +44 (0)20 7960 5030
uk@deltalight.com
deltalight.com

Belgium / Luxembourg

Delta Light nv
T +32 (0)56 435 735
F +32 (0)56 435 736
belux@deltalight.com
deltalight.com

France

Delta Light SAS
T +33 (0)9 70 73 52 42
T +33 (0)9 70 73 52 43
france@deltalight.com
deltalight.com

USA

Delta Light USA, LLC.
T +1 (954) 677 9800
F +1 (954) 677 1007
usa@deltalight.us
deltalight.com

New York
T +1 (646) 973-3284
nyc@deltalight.us

Los Angeles
T +1 (213) 289-3048
la@deltalight.us

Miami
T +1 (954) 677-9800
miami@deltalight.us

Canada

Delta Light Canada Inc.
T +1 905 813 6130
F +1 289 805 7388
canada@deltalight.com
deltalight.com

Germany / Austria

Delta Light GmbH
T +49 (0)2451 4090-0
F +49 (0)2451 4090-200
germany@deltalight.com
deltalight.com

Middle East / North Africa

Delta Light Mena
T +961 1 492 175
mena@deltalight.com
deltalight.com

Dubai
Delta Light EMEA
T +971 568 659 725
uae@deltalight.com

Slovakia

Delta Light Slovakia s.r.o.
T +421 2 6353 0180
F +421 2 6353 0181
slovakia@deltalight.com
deltalight.com

Czech Republic

Delta Light Czech s.r.o.
T(1) +420 241 740 775
T(2) +420 241 740 776
czech@deltalight.com
deltalight.com

India

Delta Light India
T +9111 4056 2720
india@deltalight.com
deltalight.com

The Netherlands

Delta Light Nederland B.V.
T +31 (0)88 80 40 600
F +31 (0)88 80 40 699
netherlands@deltalight.com
deltalight.com

Spain

Delta Light Iberia S.L.
T +34 659 157 430
+34 910 489 336
hola@deltalight.com
deltalight.com

Italy

Delta Light Italia S.r.l.
T +39 02 2305 6210
F +39 02 2316 6064
italy@deltalight.com
deltalight.com

Poland

Delta Light Poland
T +48 694 402 808
F +48 661 057 211
poland@deltalight.com
deltalight.com

Switzerland

Delta Light AG
T +41 (0)61 485 99 10
F +41 (0)61 485 99 11
switzerland@deltalight.com
deltalight.com

HQ

Delta Light nv
Muizelstraat 2
B-8560 Wevelgem (Moorsele)
Belgium
T +32 (0)56 435 735
F +32 (0)56 435 736
info@deltalight.com
deltalight.com

Manufacturer Delta Light nv

Product Design - Research - Development: Delta Light Team & Nice 2C
Coordination - Concept: Delta Light Team & Nice 2C
Graphic Design - Realisation: Delta Light Team & Nice 2C

Finally, to everyone who contributed in some way
to the realisation of this Lighting Bible...
Thanks.

Copyright © Delta Light nv
First Print - DOC 100 00022
Second Print - DOC 100 00030
Made in Belgium

For the latest edition of the Lighting Bible, please visit
deltalight.com

All information in this catalogue is provided for information purposes only and Delta Light NV makes no representations about the accuracy or completeness of the information in this catalogue.
Delta Light NV may, in its sole discretion, revise the information and technical data contained herein at any time without notice. The catalogue does not contain any guarantee on the Delta Light NV products nor any warranty of merchantability or fitness for a particular purpose or use
All Delta Light products are supplied without lamps and any lamp data is given as a mere example.

The general terms & conditions of Delta Light NV shall be applicable on each sale of a Delta Light product.
Any trademarks, texts, images, graphics, designs and other information in this catalogue are the sole property and subject to the intellectual property rights of Delta Light NV and may not be copied, modified or used for any purpose without Delta Light's prior written consent.

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C014767

INDEX

by Reference

100001 XXX0	160
100002 XXX0	160
100003 XXX0	160
100004 XXX0	160
100005 XXX8	160
100006 XXX8	160
100008 0000	162
100009 XXX0	162
100013 XXX0	162
100015 0000	162
100016 XXX0	162
100017 XXX0	162
100023 0000	162
100024 XXX0	162
100025 XXX0	162
100034 0000	162
100035 XXX0	162
100036 XXX0	162
100044 XXX8	162
100045 XXX8	162
100046 XXX8	162
100047 XXX0	162
100048 XXX0	162
100049 XXX0	162
100050 XXX0	162
100051 XXX0	150
100052 XXX0	150
100053 XXX0	324
100054 XXX0	324
100055 XXX0	160
100057 XXX0	160
100059 XXX0	160
100066 XXX0	150
100068 XXX0	150
100069 XXX0	132
100070 XXX0	132
100071 XXX0	132
100072 XXX0	132
100073 XXX0	132
100074 XXX0	132
100075 XXX0	132
100076 XXX0	132
100081 XXX0	162
100082 XXX0	162
100083 XXX0	162
100084 XXX0	162
100085 XXX0	150
100086 XXX0	150
100087 XXX8	162
100088 XXX8	162
100089 XXX8	162
10034 0010	161, 229
10212 XXX8	342
10214 XXX0	342, 488
10215 0010	343
10722 XXX5	202
10723 XXX5	204
10726 XXX8	204
10727 XXX8	204
10729 XXX0	391
10730 XXX0	391
10731 XXX5	391
10732 XXX5	391
10733 XXX5	391
10734 XXX0	391
10735 XXX0	391
10736 XXX5	391
10737 XXX5	391
10738 XXX5	391
10739 XXX0	391
10740 XXX0	391
10741 XXX5	391
10742 XXX5	391
10743 XXX5	391
10744 XXX8	204
10745 XXX8	202
11045 XXX0	134
11046 XXX0	134
11048 XXX0	134
11049 XXX0	134
11435 XXX0	156
11436 XXX0	156
11522 XXX0	210
11523 XXX0	210
11524 XXX0	210
11525 XXX0	209
12219 XXX8	336
12220 XXX0	336
12816 0000	131
12817 XXX0	130
12820 0050	131
12820 0090	131
13210 0010	565
13210 0030	565
13210 0040	565
13210 0050	565
13210 0060	565
13210 0070	565
13211 XXX0	328
13213 XXX0	328
13214 XXX0	328
13215 XXX0	328
13216 XXX0	328
13217 XXX0	328
13528 XXX0	494
13529 XXX0	512
13530 XXX0	512
13531 XXX0	512
13532 XXX0	494
13533 XXX0	494
13534 XXX0	494
13535 XXX0	512
13536 XXX0	512
13537 XXX0	512
13538 XXX0	512
13910 0010	568
13955 XXX0	506
13956 XXX0	506
13957 XXX0	506
13958 XXX0	506
13959 XXX0	506
13960 XXX0	506
13961 XXX0	506
13962 XXX0	506
13963 XXX0	506
13964 XXX0	506
13965 XXX0	507
13966 XXX0	507
13967 XXX0	507
13968 XXX0	507
13969 XXX0	507
13970 XXX0	507
13971 XXX0	507
15112 XXX0	528
15113 XXX0	528
15114 XXX0	528
15115 XXX0	528
15116 XXX0	528
15117 XXX0	528
15118 XXX0	528
15212 0060	565
15212 0070	565
15212 0080	565
15212 0090	565
15212 0110	565
15212 0120	565
15212 0130	565
15212 0140	565
15212 0150	565
15212 0160	565
15212 0170	565
15212 0180	565
15212 2000	565
15212 2010	565
15212 2020	229
15212 2030	565
15212 2040	229
15212 2050	565
15212 2060	225
15222 0170	569
15222 0180	569
15223 0120	521
15225 0280	249
15225 0290	249
15225 0300	291
15225 0310	291
15225 0320	291
15225 0330	291
15225 0340	567
15225 0350	567
15225 0360	567
15229 0010	567
15411 XXX0	138
15412 XXX0	138
15413 XXX0	138
15414 XXX0	138
15931 XX40	536
15932 0020	537
15932 0030	537
16312 0000	420
16312 0310	420
16312 0620	420
16312 0630	420
16313 XXX0	210
16314 XXX0	210
16315 XXX0	210
16410 0010	428, 430
16427 0000	426
16427 0310	426
16427 1480	426
16428 0000	428
16428 0310	428
16428 0620	428
16428 0630	428
16429 0000	428
16430 0000	428
16431 0000	430
16432 0000	430
16433 0000	428
16434 0000	428
18428 XXX0	412
18431 XXX0	412
18434 XXX0	412
18696 XXX0	450
18717 XXX0	417
19310 0050	565
19310 0060	565
19310 0110	565
19310 0120	565
19351 XXX0	138
19352 XXX0	456
19353 XXX0	138
19354 XXX0	456
19410 0010	565
19423 XXX0	148
19424 XXX0	458
19425 XXX0	148
19434 XXX0	458
19435 XXX0	148
19436 XXX0	148
19437 XXX0	148
19438 XXX0	148
19439 XXX0	148
19810 0010	133
19810 0020	133
19810 0030	133
19810 0040	133
19810 0050	133
19810 0060	133
19810 0100	566
19810 0110	221
19810 0120	237
19810 0130	237
19810 0140	237
19810 0150	237
19810 0160	237
19810 0170	566
19810 0180	353
19810 0190	353
19810 0200	357
19810 0210	357
19810 0220	357
19810 0230	149
19811 XXX0	234
19813 XXX0	234
19814 XXX0	234
19816 XXX0	234
19820 XXX0	234
19822 XXX0	234
19823 XXX0	234
19825 XXX0	234
19826 XXX8	234
19827 XXX8	234
19828 XXX8	234
19831 XXX8	234
19832 XXX8	234
19834 XXX0	352
19834 XXX5	352
19836 XXX0	352
19836 XXX5	352
19840 XXX0	234
19841 XXX0	234
19842 XXX0	234
19843 XXX0	234
19844 XXX5	352
19845 XXX5	352
19873 XXX0	240
19874 XXX0	240
19875 XXX0	352
19875 XXX5	352
19876 XXX8	238
19877 XXX0	240
19878 XXX0	240
19879 XXX0	352
19879 XXX5	352
19881 XXX5	352
19882 XXX1	236
19883 XXX0	356
19883 XXX1	356
19883 XXX5	356
19884 XXX0	234
19885 XXX0	352
19885 XXX5	352
19886 XXX0	352
19886 XXX5	352
19887 XXX0	400
19888 XXX5	400
19889 XXX0	400
19890 XXX5	400
19891 XXX0	234
19892 XXX0	400
19893 XXX5	400
19894 XXX0	400
19895 XXX5	400
19896 XXX0	234
19897 XXX0	234
19898 XXX0	234
19899 XXX0	234
200 12 01	348
200 12 02	348
200 12 11	348
200 12 12	348
200 12 13	348
200 12 14	348
200 12 21	348
200 12 24	348
200 12 34	348
200 12 35	348
200 12 41	348
200 12 410	348
200 12 420	348
200 12 430	348
200 12 50	348
200 13 11	348
200 13 12	348
200 13 14	348
200 13 14 01	348
200 13 41	348
200 13 410	348
200 13 420	348
200 13 430	348
200 14 06	349
200 14 11	348
200 14 12	348
200 14 13	348
200 14 14	348
200 14 21	348
200 14 34	348
200 14 35	348
200 14 41	348
200 14 410	348
200 14 420	348
200 14 430	348
200 99 53	348
201 02 01	203
201 02 04	203
201 02 05	203
201 05 01	163
201 05 04	163
201 50 50	131
202 00 75	565
202 01 26	148
202 01 75	565
202 01 75 OFA	565
202 014 26	148
202 04 1X	324
202 04 2X	474
202 11 19	563
202 11 26	148
202 144 811 XXX	148
202 145 811 XXX	148
202 146 811 XXX	148
202 20 811 XXX	462
202 206 811 XXX	462
202 207 811 XXX	462
202 25 811 XXX	456
202 252 811 XXX	456
202 256 811 XXX	456
202 2562 811 XXX	456
202 26 811 XXX	138
202 262 811 XXX	138
202 272 811 XXX	148
202 273 811 XXX	148
202 274 811 XXX	148
202 275 811 XXX	148
202 296 XX	156
202 297 XX	156
202 37 811 XXX	138
202 372 811 XXX	138
202 38 811 XXX	138
202 38 812 XXX	138
202 510 811 XXX	134
202 511 811 XXX	134
202 71 95 01	565
202 71 95 01 HP	565
202 71 95 01L	565
202 71 95 02	565
202 71 95 02 HP	565
202 71 95 02L	565
202 71 96 01	566

202 71 96 02	566
202 72 99 01	563
202 72 99 02	563
202 91 97 01	131
202 91 97 11	131
202 911 811 XXX	130
202 912 811 XXX	130
202 913 XXX	130
202 914 XXX	130
203 99 55	567
203 99 56	567
204 00 100	567
20514 XXX0	254
20543 XXX0	254
20546 XXX0	255
20547 XXX0	255
20548 0015	557
20548 0025	557
20548 0030	253, 257
20548 0040	253, 257
20548 0050	253, 257
20548 0060	253, 257
20548 0070	253, 257
20548 0080	253, 257
20549 XXX0	256
20550 XXX0	256
20551 XXX0	256
20552 XXX0	256
20553 XXX0	256
20554 XXX0	256
20555 0000	252
20556 0000	252
20557 0000	252
20558 0000	252
20559 0000	252
20560 0000	252
20561 XXX0	256
20562 XXX0	256
20563 XXX0	256
20564 0000	252
20565 0000	252
20566 0000	252
20567 XXX0	255
20569 XXX0	255
20570 XXX0	256
20571 XXX0	256
20572 XXX0	258
20573 XXX0	258
20574 XXX0	258
20575 XXX0	258
20576 XXX0	258
20577 XXX0	258
20578 XXX0	258
20579 XXX0	258
20580 XXX0	258
20582 XXX0	258
20583 XXX0	255
20612 XXX0	180
20612 XXX1	180
20612 XXX5	180
20613 XXX0	180
20613 XXX1	180
20613 XXX5	180
20614 XXX0	180
20614 XXX1	180
20614 XXX5	180
20615 XXX0	180
20615 XXX1	180
20615 XXX5	180
20616 XXX0	178
20616 XXX1	178
20616 XXX5	178
20618 XXX0	178
20618 XXX1	178
20618 XXX5	178
20620 XXX0	178
20620 XXX1	178
20620 XXX5	178
20622 XXX0	178
20622 XXX1	178
20622 XXX5	178
20624 XXX0	178
20624 XXX1	178
20624 XXX5	178
20626 XXX0	178
20626 XXX1	178
20626 XXX5	178
20628 XXX0	176
20628 XXX1	176
20628 XXX5	176
20629 XXX0	176
20629 XXX1	176
20629 XXX5	176
20630 XXX0	176
20630 XXX1	176
20630 XXX5	176
20631 XXX0	180
20631 XXX1	180
20631 XXX5	180
20632 XXX0	180
20632 XXX1	180
20632 XXX5	180
20633 XXX0	180
20633 XXX1	180
20633 XXX5	180
20634 XXX0	180
20634 XXX1	180
20634 XXX5	180
20635 XXX0	180
20635 XXX1	180
20635 XXX5	180
20636 XXX0	180
20636 XXX1	180
20636 XXX5	180
20637 XXX0	180
20637 XXX1	180
20637 XXX5	180
20638 XXX0	180
20638 XXX1	180
20638 XXX5	180
207 01 161	563
207 01 170	563
207 01 186	563
20729 XXX1	246
20729 XXX5	246
20730 XXX1	246
20730 XXX5	246
20733 XXX0	248
20733 XXX4	248
20734 XXX0	248
20734 XXX4	248
20735 XXX0	248
20735 XXX4	248
20736 XXX0	248
20736 XXX4	248
20737 XXX0	248
20737 XXX4	248
20738 XXX0	248
20738 XXX4	248
20739 XXX0	248
20739 XXX4	248
20740 XXX0	248
20740 XXX4	248
20741 XXX0	248
20741 XXX4	248
20742 XXX0	248
20742 XXX4	248
20743 XXX0	248
20743 XXX4	248
20744 XXX0	248
20744 XXX4	248
21012 0010	554
21012 0021	554
21012 0035	554
21012 005W	555
21012 0080	555
21012 0101	556
21012 0111	556
21012 0121	556
21012 0135	556
21012 0145	556
21012 0155	556
21012 0160	556
21012 0171	556
21012 0181	556
21012 0191	556
21012 0205	556
21012 0225	556
21012 0230	556
21012 0240	556
21012 0258	555
21012 0268	555
21012 0278	555
21012 0288	555
21012 0298	555
21012 0308	555
21012 0318	555
21012 0328	555
21012 0355	555
21024 0060	545
21024 0070	545
21024 0080	545
21024 0090	545
21024 0110	545
21024 0120	545
21024 0130	545
21024 0280	545
21030 0020	546
21030 0030	546
21030 0040	546
21030 0060	546
21030 0070	546
21030 0080	546
21030 0100	546
21030 0110	546
21030 0120	546
21030 0140	546
21030 0150	546
21030 0160	546
21030 0180	546
21030 0190	546
21030 0200	546
21030 0220	546
21030 0230	546
21030 0240	546
21030 0260	546
21030 0270	546
21030 0280	546
21030 0300	546
21030 0310	547
21030 0320	547
21030 0340	547
21030 0350	547
21030 0360	547
21030 0380	547
21030 0390	546
21030 0400	546
21030 0410	546
21030 0420	546
21031 0020	437
21031 0030	437
21031 0040	437
21031 0060	437
21031 0070	437
21031 0080	437
21031 0100	437
21031 0110	437, 439
21031 0120	437, 439
21031 0140	437, 439
21031 0150	437
21031 0160	437
21031 0180	437
21031 0190	437
21031 0200	437
21031 0220	437
21031 0230	437
21031 0240	437
21031 0260	437
21031 0270	437
21031 0280	437
21031 0300	437
21031 0390	437
21031 0400	437
21031 0410	437
21031 0420	437
21031 0430	547
21031 0440	547
21031 0450	547
21031 0460	547
21031 0470	547
21031 0480	547
21031 0490	547
21031 0500	547
21031 0510	547
21032 0010	559
21032 0020	542
21032 0030	543
21032 0040	387
21032 0065	542
21032 0075	542
21032 0085	542
21032 0090	542
21032 0120	559
21032 0130	559
21032 0145	559
21032 0150	275, 279
21032 0160	275, 279
21032 0170	275, 279
21032 0185	387
21032 0190	387
21032 0205	544
21032 0210	544
21032 0220	279
21032 0245	387
21032 0250	387
21032 0260	387
21032 0270	558
21032 0320	542
21032 0331	556
21032 0345	556
21032 0358	556
21032 0368	556
21034 0010	537
21034 0150	568
213 19 08	568
213 19 09	568
213 19 10	568
213 45 10 811 XXX	506
213 45 15	506
213 45 212	506
213 45 2125	506
213 45 811 XXX	506
213 46 10 811 XXX	506
213 46 15	506
213 46 811 XXX	506
213 47 112	508
213 47 122	508
213 47 811 XXX	507
213 473 811 XXX	507
213 474 811 XXX	507
213 48 811 XXX	507
213 483 811 XXX	507
213 484 811 XXX	507
213 49 811 XXX	507
21401 0000	276
21402 0000	276
21403 0000	276
21404 0000	276
21405 0000	276
21406 0000	276
21407 0000	276
21408 0000	276
21409 0000	276
21410 0000	276
21411 0000	276
21412 0000	276
21413 0005	276
21414 0005	276
21415 0005	276
21416 0005	276
21417 0005	276
21418 0005	276
21419 0005	276
21420 0005	276
21421 0005	276
21422 0005	276
21423 0005	276
21424 0005	276
21425 0005	276
21426 0005	276
21427 0005	276
21428 0005	276
216 12 00	568
216 12 01	568
216 12 02	568
216 14 35	568
21612 XXX0	218
21613 XXX0	218
220 74 811 XXX	528
220 77 811 XXX	528
222 121 12	532
222 123 12	532
222 126 12	532
223 00 10	521, 531
223 00 12	530
223 122 XX	526
223 126 XX	526
223 13 811 XXX	482
223 16 811 XXX	530
223 17 811 XXX	530
223 24 XX	526
223 26 XX	526
223 34 XX	526
223 36 XX	526
223 53 812 XXX	482
223 54 XX	478
223 55 XX	478
223 751 811 XXX ED8	336, 482
223 752 811 XXX ED8	336, 482
223 753 01	337
223 753 811 XXX ED8	336
22519 XXX0	192
22525 XXX0	192
22528 XXX0	192
22532 XXX0	192
22534 XXX0	338
22535 XXX0	338
22536 XXX0	338
22618 XXX0	488
22619 XXX0	488
22624 XXX0	526
22625 XXX0	526
22626 XXX0	526
22627 XXX0	526
22628 XXX0	526
22629 XXX0	526
229 01 01	569
229 01 03	569
229 01 04	569
229 01 11	569
229 01 12	569
229 02 01	569
229 02 03	569
229 02 07	569
229 02 11	569
23110 0040	215, 397
23110 0050	215, 397
23110 0060	215, 397
23111 XXX0	214
23112 XXX0	214
23114 XXX0	214
23115 XXX0	214
23117 XXX0	214
23118 XXX0	214
23120 XXX0	214
23121 XXX0	214
23123 XXX0	396
23124 XXX5	396
23125 XXX0	396
23126 XXX5	396
23129 XXX0	396
23130 XXX5	396
23131 XXX0	396
23132 XXX5	396
23135 XXX0	396
23136 XXX5	396
23137 XXX0	396
23138 XXX5	396
23141 XXX0	396
23142 XXX5	396

23143 XXX0	396
23144 XXX5	396
23147 XXX8	214
23148 XXX8	214
23149 XXX8	214
23150 XXX8	214
232 012 XX	490
232 08 XXX	494
232 09 XXX	512
232 10 00	495, 513
232 10 03	495, 513
232 111 00	330
232 112 XX	330, 490
232 12 9XX	494
232 13 9XX	512
232 20 99	495
232 211 00	330
232 212 XX	330, 490
232 213 00	330, 490
232 318 XX	330, 490
232 321 00	330
232 659 XX	524
23210 XXX0	398
23211 XXX5	398
23212 XXX0	398
23213 XXX5	398
23215 XXX5	400
23230 XXX0	402
23231 XXX5	402
23232 XXX0	402
23233 XXX5	402
23242 XXX0	404
23243 XXX5	404
23244 XXX0	397
23245 XXX5	397
23246 9XX0	402
23247 9XX5	402
23248 XXX0	403
23249 XXX5	403
23250 9XX0	403
23251 9XX5	403
23252 XXX0	403
23253 XXX5	403
23258 XXX0	260, 399
23259 XXX5	399
23260 XXX0	260, 399
23261 XXX5	399
23274 XXX0	400
23275 XXX5	400
23278 XXX0	401
23279 XXX5	401
23280 XXX0	398
23281 XXX5	398
23282 XXX0	398
23283 XXX5	398
23284 XXX0	399
23285 XXX5	399
23292 XXX5	401
23293 XXX0	400
23294 XXX5	400
23295 XXX0	400
23296 XXX5	400
23297 XXX0	400
23298 XXX5	400
23300 9920	384
23301 0000	380
23301 0690	380
23302 0010	380
23302 0020	380
23302 0030	380
23302 0040	380
23303 XXX0	388
23304 XXX0	388
23305 XXX0	388
23306 XXX0	388
23307 XXX5	388
23308 XXX5	388
23309 XXX5	388
23310 XXX5	388
23311 XXX0	398
23312 XXX5	398
23313 XXX0	398
23314 XXX5	398
23315 XXX0	260, 399
23316 XXX5	399
23317 XXX0	260, 399
23318 XXX5	399
23319 XXX5	388
23320 XXX5	388
23321 XXX5	388
23322 XXX5	388
23323 XXX0	400
23324 XXX5	400
23327 XXX0	401
23328 XXX5	401
23331 XXX5	400
23332 XXX0	402
23347 XXX5	388
23348 XXX5	388
23349 XXX5	388
23350 XXX5	388
23352 XXX5	404
23353 XXX5	404
23354 XXX5	404
23355 XXX5	389
23358 0000	384
23358 0010	384
23358 0020	384
23358 0030	384
23358 0320	384
23358 0620	384
23358 1410	384
23358 1510	384
23358 1520	384
23358 1540	384
23358 9640	384
23358 9810	384
23358 9820	384
23358 9830	384
23359 0000	384
23359 0010	384
23359 0020	384
23359 0030	384
23359 0320	384
23359 0510	384
23359 0620	384
23359 0690	384
23359 0700	384
23359 1410	384
23359 2120	384
23359 2140	384
23359 2160	384
23359 2220	384
23359 2240	384
23359 2260	384
23359 2340	384
23359 2440	384
23359 9640	384
23360 XXX5	401
23362 XXX5	403
23363 9XX5	403
23364 XXX5	403
23365 XXX0	402
23366 XXX0	403
23367 XXX5	389
23368 XXX5	389
23369 XXX5	389
23370 XXX5	389
23371 9XX5	402
23372 XXX5	397
23373 XXX5	402
23376 XXX0	388
23377 0030	384
23377 0040	557
23377 0050	557
23378 XXX0	402
23379 XXX5	402
23380 0030	557
23380 004W	557
23380 0050	557
23380 0060	557
23380 007W	557
23381 XXX0	388
23382 XXX5	388
23383 XXX0	388
23384 XXX5	388
23385 XXX0	398
23386 XXX5	398
23387 XXX0	398
23388 XXX5	398
23389 XXX0	399
23390 XXX5	399
23397 0000	380
23397 0020	380
23397 0030	380
23397 0140	380
23397 0310	380
23397 0640	380
23398 XXX0	400
23399 XXX5	400
23411 XXX0	400
23412 XXX5	400
23413 XXX0	400
23414 XXX5	400
23610 XXX0	361
23610 XXX1	361
23610 XXX5	361
23610 XXXP	361
23610 XXXW	361
23611 XXX0	360
23611 XXX1	360
23611 XXX5	360
23611 XXXP	360
23611 XXXW	360
23612 XXX0	360
23612 XXX1	360
23612 XXX5	360
23612 XXXP	360
23612 XXXW	360
23613 0010	361
23613 0020	360
23613 0030	360
23613 0040	361
23613 0050	360
23613 0060	360
23613 0070	361
23613 0080	361
23613 0090	361
23613 0100	361
23613 0120	361
23613 0140	361
23613 0160	361
23613 0170	361
23613 0180	361
23613 0190	361
23613 0200	361
23613 0220	361
23613 0230	361
23613 0240	361
23613 0250	361
23613 0260	361
23613 0270	361
23614 XXX0	360
23614 XXX1	360
23614 XXXP	360
23614 XXXW	360
23615 XXX1	360
23615 XXX5	360
23615 XXXP	360
23615 XXXW	360
23616 XXX0	361
23616 XXX1	361
23616 XXX5	361
23616 XXXP	361
23616 XXXW	361
23910 0000	312
23911 0000	312
23912 0000	312
23913 0000	312
23914 0000	312
23915 0000	312
23916 0000	312
23917 0000	312
23918 0000	312
23919 0000	312
23920 0000	312
23921 0000	312
23922 0000	312
23923 0000	312
23924 0000	312
23925 0000	312
23926 XXX0	312
23927 XXX0	312
23928 XXX0	312
23929 XXX0	312
23930 XXX0	312
23931 XXX0	312
23932 XXX0	312
23933 XXX0	312
23934 XXX0	312
23935 XXX0	312
23936 XXX0	312
23937 XXX0	312
23938 XXX0	312
23939 XXX0	312
23940 XXX0	312
23941 XXX0	312
23942 0018	557
23943 0010	313, 315, 317
23943 0020	315
23943 0030	311, 315
23944 0010	313, 315
23945 0010	313
23945 0020	313
24010 0000	318
24011 0000	318
24013 0000	318
24014 0000	318
24015 0000	318
24016 0000	318
24017 0000	318
24018 XXX0	496
24019 XXX0	496
24020 XXX0	496
24110 XXX0	228
24111 XXX0	228
24112 XXX0	228
24113 XXX0	228
24118 XXX0	230
24119 XXX8	230
24120 XXX8	230
24121 XXX0	232
24123 XXX0	232
24125 XXX0	232
24127 XXX0	232
24129 XXX8	232
24130 XXX8	232
24133 XXX0	230
24134 XXX0	232
24136 XXX0	232
24138 XXX8	232
24140 XXX8	232
24142 XXX0	232
24144 0010	566
24144 0020	566
24144 0030	233, 383
24144 0040	231
24144 0050	565
24144 0060	565
24144 0070	233
24145 XXX8	230
24147 XXX0	492
24148 XXX0	492
24149 XXX0	232
24210 XXX0	128
24211 XXX0	128
24213 0010	566
24213 0020	566
24213 0030	566
24213 0040	566
24213 0050	129
24213 0060	129
24213 0070	129
24213 0080	566
24213 0090	129
24213 0100	129
24214 XXX0	128
24215 XXX0	128
24217 XXX0	128
24218 XXX0	128
24220 XXX0	128
24224 XXX0	128
24225 XXX0	128
24227 XXX0	128
24229 XXX0	128
24231 XXX0	128
24413 0000	380
24414 XXX5	392
24415 XXX5	393
24417 XXX5	392
24418 XXX5	393
24419 XXX5	392
24426 XXX0	402
24427 XXX5	402
24428 XXX0	402
24429 XXX5	402
24430 XXX0	399
24431 XXX5	399
24434 XXX0	400
24435 XXX5	400
24438 XXX0	401
24439 XXX5	401
24440 XXX0	399
24441 XXX5	399
24445 XXX5	400
24446 XXX5	401
24451 XXX0	400
24452 XXX5	400
24610 XXX0	354
24610 XXX5	354
24611 0010	566
24611 0050	355
24611 0060	355
24611 0070	355
24611 0090	355
24611 0100	566
24611 0150	237
24611 0160	237
24611 0170	237
24611 0190	237
24611 0200	237
24611 0210	237
24611 0220	355
24611 0230	355
24611 0240	355
24612 XX10	354
24612 XX15	354
24612 XX20	354
24612 XX25	354
24612 XXX0	354
24612 XXX5	354
24621 XXX0	236
24622 XXX0	236
24623 XXX0	236
24624 XXX0	236
24625 XXX0	354
24625 XXX5	354
24626 XXX0	354
24626 XXX5	354
24629 XXX5	354
24630 XXX0	236
24631 XXX0	354
24631 XXX5	354
24632 XXX0	354
24632 XXX5	354
24633 XXX0	401
24634 XXX5	401
24635 XXX0	401
24636 XXX5	401
24811 XXX0	262
24812 XXX0	262
24813 XXX0	262
24814 0010	557
24814 0011	557
24814 0015	557
24814 0020	263
24814 0030	263
24814 0075	557
24814 0080	557

24816 XXX0	262
24818 XXX0	262
24819 XXX0	262
24821 XXX0	262
24822 XXX0	262
25010 XXX0	198
25011 XXX0	198
25014 XXX0	198
25015 XXX0	198
25016 XXX0	395
25017 XXX5	395
25018 XXX0	395
25019 XXX5	395
251 67 20	204
251 67 811 XXX ED8	464
251 67 811 XXX WDL	204
251 67 812 XXX ED8	464
251 70 03 01	203
251 70 03 04	203
251 70 03 05	203
251 70 811 XXX	202, 464
251 70 811 XXX ED8	202, 464
251 70 811 XXX WDL	202
251 71 21 9XX	202
251 71 21 9XX ED1	202
251 72 21 9XX	204
251 72 21 9XX ED1	204
251 73 21 9XX	202
251 77 811 XXX ED8	202
251 77 XX	156
251 81 XX	156
25211 XXX0	152
25213 XXX0	152
25214 XXX0	152
25216 XXX0	152
25312 XXX0	478
25314 XXX0	478
25501 XXX0	282
25502 XXX0	282
25503 XXX0	282
25510 0010	557
25510 0015	557
25510 0020	557
25510 0025	557
25510 0030	557
25510 0045	557
25510 0075	554
25510 0085	554
25510 0375	554
25510 0385	554
25510 0395	554
25510 0405	554
25510 0415	554
25510 0420	554
25510 0430	554
25510 0440	554
25510 0450	554
25510 0460	554
25510 0475	557
25510 0480	557
25510 0495	557
25510 0500	557
25510 0515	557
25511 XXX0	284
25512 XXX0	286
25513 XXX0	284
25514 XXX0	286
25515 XXX0	284
25516 XXX0	286
25517 XXX0	284
25518 XXX0	286
25519 XXX0	284
25520 XXX0	286
25521 XXX0	284
25522 XXX0	286
25523 XXX0	282
25524 XXX0	282
25525 XXX0	282
25526 XXX0	282
25527 XXX0	282
25528 XXX0	282
25570 XXX0	284
25571 XXX0	286
25572 XXX0	284
25573 XXX0	286
25574 XXX0	284
25575 XXX0	286
25610 0020	311
25611 0000	310
25811 0000	314
25813 0000	314
25814 0000	314
25816 0000	314
25817 0000	314
25818 0000	314
25821 0000	314
25822 0000	314
26000 XX10	514
26000 XX20	514
26000 XX30	514
26000 XX40	514
26000 XX50	514
26000 XX60	514
26000 XX70	514
26000 XX80	514
26000 XX90	514
26001 XX10	514
26001 XX20	514
26001 XX30	514
26001 XX40	514
26001 XX50	514
26001 XX60	514
26001 XX70	514
26001 XX80	514
26001 XX90	514
26010 XX10	514
26010 XX20	514
26010 XX30	514
26010 XX40	514
26010 XX50	514
26010 XX60	514
26010 XX70	514
26010 XX80	514
26010 XX90	514
26011 XX10	514
26011 XX20	514
26011 XX30	514
26011 XX40	514
26011 XX50	514
26011 XX60	514
26011 XX70	514
26011 XX80	514
26011 XX90	514
26020 XXX0	516
26021 XXX0	516
26022 XXX0	516
26023 XXX0	516
26025 XXX0	516
26026 XXX0	516
26070 0010	515
26070 0020	515, 517
26070 0030	515, 517
26070 0040	515
26070 0050	515
26070 0060	515
26071 0010	516
26071 0020	516
26071 0030	516
26071 0040	516
26071 0050	517
26071 0060	517
26100 XX10	514
26100 XX20	514
26101 XX10	514
26101 XX20	514
26110 XX10	514
26110 XX20	514
26111 XX10	514
26111 XX20	514
26210 0020	261, 395
26213 XXX0	222
26214 XXX8	222
26215 XXX8	222
26216 XXX0	260, 394
26217 XXX5	394
26218 XXX0	260, 394
26219 XXX5	394
26220 XXX0	260, 394
26221 XXX5	394
26222 XXX0	260, 394
26223 XXX5	394
26410 0010	565
26411 XXX0	116
26412 XXX0	116
26413 XXX0	116
26414 XXX0	116
26415 XXX0	116
26510 0010	289, 305
26510 0020	289, 305
26511 XXX4	304
26512 XXX4	304
26513 XXX4	304
26514 XXX0	304
26515 XXX0	304
26516 XXX0	304
26713 XXX0	222
26714 XXX8	222
26715 XXX8	222
26716 XXX0	394
26717 XXX5	394
26718 XXX0	394
26719 XXX5	394
26720 XXX0	394
26721 XXX5	394
26722 XXX0	394
26723 XXX5	394
26810 0015	557
26810 0025	557
26811 XXX0	290
26812 XXX0	290
26813 XXX5	290
26814 XXX5	290
26815 XXX5	290
26816 XXX5	290
26817 XXX0	290
26818 XXX0	290
26819 XXX5	290
26820 XXX5	290
26821 XXX5	290
26822 XXX0	290
26823 XXX0	290
26824 XXX0	292
26825 XXX0	292
26826 XXX0	292
270 11 161	563
270 11 186	563
270 11 187	563
270 11 188	563
270 11 191	563
270 11 192	563
270 63 06 XX	344
270 63 12 XX	344
270 73 075	522
270 73 130	522
270 75 060	344
270 75 100	344
27011 0050	408
27011 0060	408
27011 0310	408
27011 0630	408
27011 0670	408
27011 0910	408
27011 9910	272, 408
27011 9920	272, 408
27011 9930	408
27020 XXX0	409
27021 XXX5	409
27022 XXX0	409
27023 XXX5	409
27024 XXX0	409
27025 XXX5	409
27028 XXX0	409
27029 XXX5	409
27030 XXX0	409
27031 XXX5	409
27032 XXX0	409
27033 XXX5	409
271 04 XX ED8	338
271 05 XX	338
271 08 XX ED8	338
27110 0010	272
27110 0020	272
27110 0030	272
27110 0040	272
27110 0055	279
27110 0070	279
27110 0080	279
27110 0090	557
27110 0100	557
27110 0110	272
27110 0120	272
27110 0130	272
27110 0140	272
27110 0150	272
27110 0160	272
27110 0170	272
27110 0180	272
27111 0020	272
27111 0030	272
27111 0410	272
27111 0530	272
27111 0620	272
27111 0630	272
27111 0640	272
27111 0650	272
27111 0720	272
27111 0730	272
27111 9940	272
27111 9950	272
27111 9960	272
27112 XXX0	274
27113 XXX0	274
27115 XXX5	274
27116 XXX5	274
27118 XXXQ	274
27119 XXXQ	274
27121 XXX0	274
27122 XXX0	274
27123 XXX5	274
27124 XXX5	274
27125 XXXQ	274
27126 XXXQ	274
27127 XXX0	275
27128 XXX0	275
27129 XXX0	275
27130 XXX5	275
27131 XXX5	275
27132 XXX5	275
27133 XXXQ	275
27134 XXXQ	275
27135 XXXQ	275
27136 XXX0	275
27137 XXX0	275
27138 XXX0	275
27139 XXX5	275
27140 XXX5	275
27141 XXX5	275
27142 XXX5	275
27143 XXX5	275
27144 XXXQ	275
27145 XXXQ	275
27146 XXXQ	275
27147 XXXQ	275
27148 XXXQ	275
27149 XXX0	275
27150 XXX0	275
27151 XXX0	275
27152 XXX5	275
27153 XXX5	275
27154 XXX5	275
27155 XXXQ	275
27156 XXXQ	275
27157 XXXQ	275
27158 XXX0	275
27159 XXX0	275
27160 XXX0	275
27161 XXX5	275
27162 XXX5	275
27163 XXX5	275
27164 XXXQ	275
27165 XXXQ	275
27166 XXXQ	275
27167 0000	276
27168 0000	276
27169 0000	276
27170 0000	276
27171 0000	276
27172 0000	276
27173 0005	276
27174 0005	276
27175 0005	276
27176 0005	276
27177 0005	276
27178 0005	276
27179 0005	276
27180 0005	276
27181 XXX0	276
27182 XXX0	276
27184 XXX0	274
27185 XXX5	274
27186 XXX0	274
27187 XXX0	276
27211 XXX0	224
27212 XXX0	224
27214 XXX0	224
27215 XXX0	224
27216 XXX0	224
27217 XXX0	224
27218 XXX0	224
27300 0020	408
27300 0030	408
27300 0300	408
27300 0640	408
27300 0650	408
27300 0910	408
27300 9970	408
27311 XXX0	303, 409
27312 XXX5	303, 409
27313 XXX0	303, 409
27314 XXX5	303, 409
27315 XXX0	303, 409
27316 XXX5	303, 409
27319 XXX0	303, 409
27320 XXX5	303, 409
27321 XXX0	303, 409
27322 XXX5	303, 409
27323 XXX0	303, 409
27324 XXX5	303, 409
274 87 2610 83	466
274 88 2610 83	466
274 89 06 26 ED5	176
274 89 06 26 WD	176
274 89 09 26 ED5	176
274 89 09 26 WD	176
274 89 12 26 ED5	176
274 89 12 26 WD	176
274 94 0710	179
274 94 1010	179
274 94 1310	179
274 95 06 26 ED5	178
274 95 06 26 WD	178
274 95 09 26 ED5	178
274 95 09 26 WD	178
274 95 12 26 ED5	178
274 95 12 26 WD	178
274 96 06 26 ED5	178
274 96 09 26 ED5	178
274 96 12 26 ED5	178
274 97 10	181
275 12 82 XX ED8	336
275 13 82 XX ED8	336
275 161 XX ED8	336
275 162 XX ED1	336
27710 0010	143
27710 0020	143
27711 XXX0	142
27712 XXX0	142
27713 XXX0	142
27714 XXX0	142
27715 XXX0	142

27717 XXX0	142
27719 XXX0	142
27720 XXX0	142
27721 XXX0	142
27722 XXX0	142
27723 XXX0	142
27724 XXX0	142
27725 XXX0	142
27726 XXX0	142
27727 XXX0	142
27729 XXX0	142
27800 0000	436
27800 0310	436
27800 1410	436
27800 1490	436
27810 XXX0	522
279 61 811 XXX	492
279 61 812 XXX	492
279 72 20	202
279 773 811 XXX	238
279 776 811 XXX ED8	238
27910 0010	169
27910 0020	169
27910 0030	169
27910 0040	169
27910 0050	169
27911 XXX0	168
27911 XXX4	168
27912 XXX0	168
27912 XXX4	168
27913 XXX0	168
27913 XXX4	168
27914 XXX5	168
27915 XXX5	168
27916 XXX5	168
27917 XXX0	168
27917 XXX4	168
27918 XXX0	168
27918 XXX4	168
27919 XXX0	168
27919 XXX4	168
27920 XXX5	168
27921 XXX5	168
27928 XXX0	170
27928 XXX4	170
27929 XXX0	170
27929 XXX4	170
27930 XXX0	170
27930 XXX4	170
27931 XXX0	362
27931 XXX5	362
27932 XXX0	362
27932 XXX5	362
27933 XXX5	362
27934 XXX5	362
27935 XXX0	362
27935 XXX5	362
27936 XXX0	362
27936 XXX5	362
27937 XXX0	362
27937 XXX5	362
27938 XXX0	396
27939 XXX5	396
27940 XXX0	396
27941 XXX5	396
27942 XXX0	396
27943 XXX5	396
27944 XXX5	396
27945 XXX5	396
27946 XXX5	396
27947 XXX0	396
27948 XXX5	396
27949 XXX0	396
27950 XXX5	396
27951 XXX0	396
27952 XXX5	396
27953 XXX5	396
27954 XXX5	396
27955 XXX5	396
28010 0050	169
28011 XXX0	168
28011 XXX4	168
28012 XXX0	168
28012 XXX4	168
28013 XXX0	168
28013 XXX4	168
28014 XXX5	168
28015 XXX5	168
28016 XXX5	168
28017 XXX0	168
28017 XXX4	168
28018 XXX0	168
28018 XXX4	168
28019 XXX0	168
28019 XXX4	168
28020 XXX5	168
28021 XXX5	168
28022 XXX0	170
28022 XXX4	170
28023 XXX0	170
28023 XXX4	170
28024 XXX0	170
28024 XXX4	170
28025 XXX0	170
28025 XXX4	170
28026 XXX0	170
28026 XXX4	170
28027 XXX0	170
28027 XXX4	170
28028 XXX0	170
28028 XXX4	170
28029 XXX0	170
28029 XXX4	170
28030 XXX0	170
28030 XXX4	170
28031 XXX0	362
28031 XXX5	362
28032 XXX0	362
28032 XXX5	362
28033 XXX5	362
28034 XXX5	362
28056 XXX4	170
28057 XXX4	170
28058 XXX4	170
28059 XXX5	170
28060 XXX5	170
28061 XXX5	170
28062 XXX4	170
28063 XXX4	170
28064 XXX4	170
28065 XXX5	170
28066 XXX5	170
28067 XXX5	170
28101 0000	418
28101 0310	418
28102 0000	418
28102 0310	418
28211 XXX0	320
28211 XXX4	320
28212 XXX0	320
28212 XXX4	320
28213 XXX0	320
28213 XXX4	320
28214 XXX0	320
28214 XXX4	320
28215 0005	320
28216 0005	320
28217 0005	320
28218 0005	320
28219 XXX0	320
28219 XXX4	320
28220 XXX0	320
28220 XXX4	320
28221 XXX0	320
28221 XXX4	320
28222 XXX0	320
28222 XXX4	320
28400 0010	565
28400 0020	565
28400 0030	565
28400 0040	565
28400 0050	565
28400 0060	565
28400 0070	565
28400 0080	565
28400 0090	565
28400 0100	565
28400 0110	565
28400 0120	565
28400 0130	565
28400 0140	565
28400 0150	565
28400 0160	565
28400 0170	565
28400 0180	565
28401 XXX0	120
28402 XXX0	120
28404 XXX0	120
28405 XXX0	120
28406 XXX0	120
28408 XXX0	120
28409 XXX0	122
28410 XXX0	122
28411 XXX0	122
28412 XXX0	122
28413 XXX0	122
28414 XXX0	122
28415 XXX0	122
28416 XXX0	122
28417 XXX0	124
28418 XXX0	124
28420 XXX0	124
28421 XXX0	124
28423 XXX0	124
28424 XXX0	120
28425 XXX0	120
28427 XXX0	120
28428 XXX0	120
28429 XXX0	122
28430 XXX0	122
28431 XXX0	122
28432 XXX0	122
28433 XXX0	122
28434 XXX0	124
28435 XXX0	124
28437 XXX0	124
28438 XXX0	460
28439 XXX0	460
28441 XXX0	460
28442 XXX0	460
28443 XXX0	460
28444 XXX0	460
28445 XXX0	460
28446 XXX0	461
28447 XXX0	461
28449 XXX0	461
28450 XXX0	120
28452 XXX0	120
28453 XXX0	122
28454 XXX0	122
28455 XXX0	122
28456 XXX0	120
28457 XXX0	120
28458 XXX0	120
28459 XXX0	120
28460 XXX0	122
28461 XXX0	122
28462 XXX0	122
28463 XXX0	122
28464 XXX0	120
28465 XXX0	120
28466 XXX0	120
28467 XXX0	122
28468 XXX0	122
28469 XXX0	122
28470 XXX0	460
28471 XXX0	460
28472 XXX0	120
28473 XXX0	122
28474 XXX0	124
28476 XXX0	124
28477 XXX0	124
28479 XXX0	124
28480 XXX0	120
28481 XXX0	120
28482 XXX0	120
28483 XXX0	460
28484 XXX0	120
285 501 124 ED8	242
285 501 224 ED8	242
285 501 324 ED8	242
28500 0010	121
28500 0020	121
28500 0030	121
28500 0040	121
28500 0050	121
28500 0060	121
28500 0070	123
28500 0080	123
28500 0090	123
28500 0100	123
28500 0110	123
28500 0120	123
28500 0130	125
28500 0140	125
28500 0150	125
28500 0160	125
28500 0170	125
28500 0180	125
28500 0190	121
28500 0200	123
28500 0210	125
28500 0220	565
28501 XXX0	120
28502 XXX0	120
28504 XXX0	120
28505 XXX0	120
28506 XXX0	120
28508 XXX0	120
28509 XXX0	122
28510 XXX0	122
28511 XXX0	122
28512 XXX0	122
28513 XXX0	122
28514 XXX0	122
28515 XXX0	122
28516 XXX0	122
28517 XXX0	124
28518 XXX0	124
28520 XXX0	124
28521 XXX0	124
28523 XXX0	124
28524 XXX0	120
28525 XXX0	120
28527 XXX0	120
28528 XXX0	120
28529 XXX0	122
28530 XXX0	122
28531 XXX0	122
28532 XXX0	122
28533 XXX0	122
28534 XXX0	124
28535 XXX0	124
28537 XXX0	124
28538 XXX0	460
28539 XXX0	460
28541 XXX0	460
28542 XXX0	460
28543 XXX0	460
28544 XXX0	460
28545 XXX0	460
28546 XXX0	461
28547 XXX0	461
28549 XXX0	461
28550 XXX0	120
28552 XXX0	120
28553 XXX0	122
28554 XXX0	122
28555 XXX0	122
28556 XXX0	120
28557 XXX0	120
28558 XXX0	120
28559 XXX0	120
28560 XXX0	122
28561 XXX0	122
28562 XXX0	122
28563 XXX0	122
28564 XXX0	120
28565 XXX0	120
28566 XXX0	120
28567 XXX0	122
28568 XXX0	122
28569 XXX0	122
28570 XXX0	460
28571 XXX0	460
28572 XXX0	120
28573 XXX0	122
28580 XXX0	120
28581 XXX0	120
28582 XXX0	120
28583 XXX0	460
28584 XXX0	120
286 67 01	309, 405
286 67 02	309, 405
286 67 03	309, 405
286 67 811 XXX ED8	308
28700 0040	217, 317
28700 0070	217, 317
28800 0010	317, 405
28800 0020	317, 405
28800 0030	317, 405
28800 0040	317, 405
28811 XXX0	405
28812 XXX5	405
28813 XXX0	405
28814 XXX5	405
28815 XXX0	316
28816 XXX0	316
29011 XXX0	196
29012 XXX0	397
29013 XXX0	397
29014 XXX5	397
29015 XXX5	397
29016 XXX0	196
29018 XXX8	196
29019 XXX8	196
29020 XXX0	397
29021 XXX0	397
29022 XXX5	397
29023 XXX5	397
29110 0010	302
29110 0030	302
29110 0065	297
29111 XXX0	298
29112 XXX0	298
29113 XXX0	298
29114 XXX5	298
29115 XXX5	298
29116 XXX5	298
29117 XXX0	298
29118 XXX0	298
29119 XXX0	298
29120 XXX5	298
29121 XXX5	298
29122 XXX5	298
29123 XXX0	299
29124 XXX0	299
29125 XXX0	299
29126 XXX5	299
29127 XXX5	299
29128 XXX5	299
29129 XXX0	297
29130 XXX0	297
29131 XXX0	297
29211 XXX0	300
29212 XXX0	300
29213 XXX0	300
29214 XXX5	300
29215 XXX5	300
29216 XXX5	300
29217 XXX0	300
29218 XXX0	300
29219 XXX0	300
29220 XXX5	300
29221 XXX5	300
29222 XXX5	300
29223 XXX0	301
29224 XXX0	301
29225 XXX0	301
29226 XXX5	301

29227 XXX5	301
29228 XXX5	301
29311 XXX0	366
29311 XXX5	366
29312 XXX0	366
29312 XXX5	366
29315 XXX0	388
29316 XXX5	388
29319 XXX0	388
29320 XXX5	388
29321 0010	260
29322 002W	260
29323 XXXW	260
29411 XXX0	390
29412 XXX5	390
29413 XXX0	390
29414 XXX5	390
29415 XXX0	390
29416 XXX5	390
29417 XXX0	390
29418 XXX5	390
29510 0020	565
29511 XXX0	144
29512 XXX0	144
29513 XXX0	144
29514 XXX0	144
29611 XXX8	332, 476
29612 XXX8	332, 476
29613 XXX0	332, 476
29614 XXX0	216
29615 XXX8	518
29616 XXX8	518
29617 XXX0	518
29618 XXX0	518
29619 XXX0	518
29621 0000	216
29622 0000	216
29624 XXX0	216
29711 XXX0	520
29712 XXX0	520
29713 XXX0	520
29714 XXX0	520
29715 XXX0	520
29716 XXX0	520
29717 XXX0	520
29718 XXX0	520
29810 0010	565
29810 0020	565
29810 0030	565
29810 0040	565
29810 0050	565
29810 0060	565
29810 0070	565
29810 0080	565
29810 0100	565
29810 0110	565
29810 0120	565
29810 0130	565
29810 0200	565
29810 0210	565
29810 0220	565
29810 0230	565
29810 0240	225
29810 1010	380
29810 1020	380
29811 XXX0	382
29813 XXX0	382
29815 XXX0	382
29911 0000	374
29912 0000	374
29913 0000	374
29914 0000	374
300 24 060	557
300 24 060 ED1	557
300 24 150 ED5	557
300 48 060	557
300 48 350 ED5	558
300 48 500 ED5	558
300 48 500 PRO ED5	413
300 48 700 ED5	558
300 48 700 PRO ED5	413
300 89 12 71	559
300 89 24 150	556
300 89 48 100	556
300 89 48 240	556
300 90 003 ED1	559
300 90 003 ED5	559
300 90 004 ED5	541
300 90 004 ED8	541
300 90 005	541
300 90 006	541
300 90 007	541
300 90 009	542
300 90 010	559
300 90 011	543
300 90 012	543
300 90 013	552
300 90 014	552
300 90 015	552
300 90 016 ED1	541
300 90 017	552
300 90 018	552
300 90 110	554
300 90 124	555
300 90 125	555
300 90 126	559
300 90 127	554
300 90 128	554
300 90 129	554
300 90 130	554
300 90 131	554
300 90 132	554
300 90 133	554
300 90 136	555
300 90 137	541
300 90 148	555
300 90 24 ED2	559
300 90 311	544
300 90 312	542
300 90 330	559
300 90 331	559
300 90 332	559
300 90 63	555
300 90 68	555
300 90 69	555
300 90 91	554
300 91 51 XX	417, 419
300 94 017 XX	412
300 94 050 XX	412
300 94 100 XX	412
300 94 93 04	413
30111 XXX0	486
30111 XXX5	486
30112 XXX0	486
30113 XXX0	486
30114 XXX0	486
30114 XXX5	486
30115 XXX0	486
30115 XXX5	486
30116 XXX0	486
30116 XXX5	486
30117 XXX0	487
30117 XXX5	487
30118 XXX0	487
30119 XXX0	487
30120 XXX0	487
30120 XXX5	487
30121 XXX0	487
30121 XXX5	487
30122 XXX0	487
30122 XXX5	487
30123 XXX0	487
30123 XXX5	487
30124 XXX0	487
30126 XXX0	487
30127 XXX0	487
30128 XXX0	487
30128 XXX5	487
30129 XXX0	487
30129 XXX5	487
30131 XXX0	487
30131 XXX5	487
30132 XXX0	487
30132 XXX5	487
302 10 3X	474, 510
302 19 21	563
302 19 22	563
302 20 21	563
302 20 22	563
302 20 3X	474, 510
302 22 811 XXX	138
302 23 811 XXX	138, 456
30210 0010	568
30210 0020	503
30211 XXX0	502
30211 XXX5	502
30212 XXX0	502
30212 XXX5	502
30213 XXX0	502
30213 XXX5	502
30215 XXX0	502
30215 XXX5	502
30216 XXX0	502
30216 XXX5	502
30217 XXX0	502
30217 XXX5	502
30218 XXX0	502
30218 XXX5	502
30219 XXX0	502
30219 XXX5	502
30220 XXX0	502
30220 XXX5	502
30221 XXX0	502
30221 XXX5	502
30222 XXX0	502
30222 XXX5	502
30223 XXX0	502
30223 XXX5	502
30224 XXX0	502
30224 XXX5	502
30225 XXX0	503
30225 XXX5	503
30226 XXX0	503
30226 XXX5	503
30311 XXX8	334
304 05 01	565
304 05 1X	328
304 05 98	563
304 05 99	563
304 17 0X	340
304 17 5X	480
304 30 1X	326, 472
304 31 1X	326, 472
304 32 01 XX	326, 472
304 32 02 XX	326, 472
304 32 96	566
304 33 811 XXX	326, 472
304 33 96	566
30411 XXX5	384
30412 XXX5	384
30413 XXX5	384
30511 XXX5	220
30511 XXX8	220
30512 XXX8	220
30513 XXX0	390
30514 XXX5	390
30610 0010	267
30610 0020	267
30610 0030	267
30610 0040	267
30610 0050	267
30610 0060	267
30610 0070	267
30610 0080	267
30610 0090	267
30610 0100	267
30610 0110	267
30610 0120	267
30610 0140	267
30610 0150	267
30610 0160	267
30610 0170	557
30610 0180	267
30610 0190	267
30611 XXX0	266
30612 XXX0	266
30613 XXX0	266
30614 XXX0	266
30615 XXX0	266
30616 XXX0	266
30710 0010	289
30710 0020	289
30710 0030	289
30710 0040	289
30711 XXX5	288
30712 XXX5	288
30713 XXX5	288
30714 XXX5	288
30715 XXX5	288
30716 XXX5	288
30717 XXX5	288
30718 XXX5	288
30719 XXX5	288
30720 XXX5	288
30721 XXX5	289
30722 XXX5	289
30723 XXX5	289
30724 XXX5	289
30725 XXX5	289
30726 XXX5	289
30727 XXX5	289
30728 XXX5	289
30729 XXX5	288
30730 XXX5	288
30731 XXX5	288
30732 XXX5	288
308 21 02 XX ED8	246
308 21 03 XX ED8	246
308 22 02 83 ADM ED8	364
308 22 02 XX ED8	246
308 22 03 83 ADM ED8	364
308 22 03 XX ED8	246
308 24 99	247
308 241 03 XX ED8	246
30810 0010	568
30810 0030	568
30811 XXX0	504
30811 XXX5	504
30812 XXX0	504
30812 XXX5	504
30813 XXX0	504
30813 XXX5	504
30814 XXX0	504
30814 XXX5	504
30815 XXX0	504
30815 XXX5	504
30816 XXX0	504
30816 XXX5	504
30817 XXX0	504
30817 XXX5	504
30818 XXX0	504
30818 XXX5	504
30819 XXX0	504
30819 XXX5	504
30820 XXX0	504
30820 XXX5	504
30821 XXX0	504
30821 XXX5	504
30822 XXX0	504
30822 XXX5	504
30823 XXX0	504
30823 XXX5	504
30824 XXX0	504
30824 XXX5	504
30825 XXX0	504
30825 XXX5	504
30826 XXX0	504
30826 XXX5	504
309 107 38 32	545
309 109 01 27	545
309 109 02 27	545
309 109 03 27	545
309 109 04 27	545
309 109 05 27	545
309 109 06 27	545
321 107 XX	256
321 109 XX	256
321 112 XX	256
321 117 XX	256
321 207 XX	256
321 209 XX	256
321 212 XX	256
321 217 XX	256
321 407 XX	256
321 409 XX	256
321 412 XX	256
321 507 XX	256
321 509 XX	256
321 512 XX	256
321 55 205 ED1	557
321 55 207 ED1	557
321 55 307 ED5	557
321 55 312 ED1	557
321 55 317 ED1	557
321 96 1036	183
321 96 9528 ED1	182
328 10 01	567
328 10 02	567
328 10 03	567
328 12 01	444
328 12 06	444
328 18 43	179
328 18 43 ED1	179
328 18 43 TW ED5	179
328 24 61	179
328 24 91	179
328 25 43	181
328 25 43 ED	181
328 26 23	181
328 27 40	438
328 27 80	438
328 90 01	445, 450
364 03 01	432
366 00 00 CL	432
366 00 00 SBL	432
371 00 00	434
371 06 01	434
371 06 06	434
371 06 16	434
372 01 00	410
372 01 06 05	410
372 01 06 06	410
372 01 06 090	410
372 01 06 10	410
372 01 06 11	410
372 01 06 150	410
372 01 06 16	410
375 00 00	424
375 03 01	424
375 06 06	424
376 00 00	432
376 03 01	432
376 06 06	432
376 14 01	432
377 20 21	448
377 20 26	448
377 98 51	438, 448
377 98 56	438, 448
377 99 51	438, 448
377 99 56	438, 448
381 00 00	424
381 01 00 00	424
381 01 03 01	424
381 03 01	424
382 00 00	424
382 03 01	424
382 06 06	424
388 01 22	468
388 01 32	468
388 01 42	468
389 01 00 00	448
389 01 03 01	448
389 01 06 01	448
389 01 06 06	448
389 01 620 12 E	450
389 01 620 12 ED1	450
389 01 620 12 ED2	450
389 01 620 24 E	450

389 01 620 24 ED1 450
389 01 620 24 ED2 450
389 02 00 00 448
389 02 03 01 448
389 02 05 SBL 448
389 02 06 PR 448
389 02 620 12 E 450
389 02 620 12 ED1 450
389 02 620 12 ED2 450
389 02 620 24 E 450
389 02 620 24 ED1 450
389 02 620 24 ED2 450
389 03 00 00 448
389 03 03 01 448
389 03 06 01 448
389 03 06 06 448
389 03 14 01 448
389 04 00 00 448
389 04 03 01 448
389 04 14 01 448
389 610 12 E 450
389 610 12 ED1 450
389 610 12 ED2 450
389 610 18 E 450
389 610 18 ED1 450
389 610 18 ED2 450
389 610 212 E 450
389 610 212 ED1 450
389 610 212 ED2 450
389 610 24 E 450
389 610 24 E EM1 450
389 610 24 ED1 450
389 610 24 ED1 EM1 450
389 610 24 ED2 450
389 610 24 ED2 EM1 450
389 610 26 18 ED5 450
389 610 26 24 ED5 450
389 610 26 30 ED5 450
389 610 26 36 ED5 450
389 610 26 48 ED5 450
389 610 30 E 450
389 610 30 ED1 450
389 610 30 ED2 450
389 610 36 E 450
389 610 36 ED1 450
389 610 36 ED2 450
389 610 48 E 450
389 610 48 ED1 450
389 610 48 ED2 450
389 611 XXX 450
389 612 XXX 450
389 613 06 E 450
389 613 09 E 450
389 613 12 E 450
389 613 12 E EM1 450
389 613 15 E 450
389 613 18 E 450
389 613 206 E 450
389 613 24 E 450
389 90 01 450
389 90 01 ED1 450
389 90 01 ED5 450
389 90 02 450
389 90 02 ED1 450
389 90 02 ED5 450
389 92 00 ED2 544
391 00 00 426
391 03 01 426
391 06 06 428, 430
391 06 11 428, 430
391 09 01 428, 430
391 97 51 428, 430
392 01 00 00 430
392 01 03 01 430
392 02 00 00 430
392 02 02 05 SBL 430
392 02 03 01 430
392 02 06 01 430
392 02 09 01 430
392 02 97 51 430
393 00 00 426
393 03 01 426
393 06 01 426
393 06 06 426
393 14 01 426
398 01 00 440
398 01 03 01 440
398 02 00 440
398 02 03 01 440
398 02 06 11 440
398 02 06 45 440
398 03 00 349, 440
398 03 03 01 349, 440
398 03 05 CL 349, 440
398 03 05 SBL 349, 440
398 03 06 11 432,440
398 03 06 45 440
399 01 00 444
399 01 02 05 SBL HE 444
399 01 03 01 444
399 02 02 05 SBL HE 444
399 02 03 01 444
399 03 00 444
399 03 03 01 444
399 03 14 01 444
399 06 01 444
399 06 06 444
399 610 12 E 445
399 610 12 ED1 445
399 610 12 ED2 445
399 610 18 E 445
399 610 18 ED1 445
399 610 18 ED2 445
399 610 24 E 445
399 610 24 ED1 445
399 610 24 ED2 445
399 610 30 E 445
399 610 30 ED1 445
399 610 30 ED2 445
399 610 36 E 445
399 610 36 ED2 445
399 610 48 E 445
399 610 48 ED2 445
399 613 06 E 445
399 613 09 E 445
399 613 12 E 445
399 613 15 E 445
399 613 18 E 445
399 613 24 E 445
399 98 51 444
399 98 56 444
399 99 51 444
399 99 56 444
400 03 01 129
400 92 00 565
400 92 00 OFA 565
404 00 00 438
404 03 01 438
404 09 01 438
404 12 XX 306
404 12 XX ED1 306
404 20 XX 306
404 20 XX ED1 306
404 20 XX ED5 306
404 24 100 438
404 24 60 ED1 438
413 03 01 131
413 03 02 187
413 03 03 187
413 03 04 187
413 03 05 187
414 01 00 566
414 03 00 566
414 90 01 565
415 35 00 154
416 99 00 410
418 11 811 XXX 218
418 161 XXX MDL 254
418 162 XXX MDL 254
418 163 01 255
418 163 02 255
418 163 XXX MDL 254
418 21 811 XXX 218
418 263 XXX MDL 254
418 367 811 XXX MDL 254
418 368 811 XXX MDL 254
418 48 050 557
418 48 100 557
418 481 07 252
418 481 09 252
418 481 12 252
418 481 17 252
418 482 106 252
418 482 109 252
418 482 211 252
418 482 217 252
418 51 811 XXX ED8 218
418 51 811 XXX WDL 218
418 51 812 XXX ED8 218
418 51 812 XXX WDL 218
418 561 XX MDL 254
420 06 01 380, 408
420 20 03 01 380
420 20 06 06 380
420 20 06 17 380
420 20 10 00 380
420 20 14 01 380, 408
420 20 20 00 380
420 20 30 00 380
420 52 03 01 380
420 52 06 06 380
420 52 10 00 380
420 52 20 00 380
420 52 30 00 380
420 52 98 01 380
420 99 01 380, 384
420 99 02 380
420 99 03 380, 384
421 218 1XXX MDL 392
421 218 2XXX MDL 392
421 228 811 XXX D MDL 393
421 228 812 XXX D MDL 393
421 248 2XXX MDL 392
421 313 06 XX MDL 388
421 313 08 XX MDL 388
421 313 10 XX MDL 388
421 313 12 XX MDL 388
421 522 811 XXX MDL 404
421 612 811 XXX MDL 404
421 622 811 XXX MDL 404
422 111 XX 186
422 111 XX ED1 186
422 111 XX ED5 186
422 112 XX 186
422 112 XX ED1 186
422 112 XX ED5 186
422 121 XX 186
422 121 XX ED1 186
422 121 XX ED5 186
422 122 XX 186
422 122 XX ED1 186
422 122 XX ED5 186
422 131 XX 186
422 132 XX 186
422 141 XX 186
422 141 XX ED1 186
422 141 XX ED5 186
422 142 XX 186
422 142 XX ED1 186
422 142 XX ED5 186
422 161 811 XXX 186
422 161 811 XXX ED1 186
422 161 811 XXX ED5 186
422 162 811 XXX 186
422 162 811 XXX ED1 186
422 162 811 XXX ED5 186
422 912 XX WDL 186
422 99 01 187
424 01 00 00 420
424 01 03 01 420
424 01 06 01 420
424 01 06 06 420
424 02 00 00 420
424 02 03 01 420
424 113 02 XXX ED8 209
424 211 03 XXX 208
424 211 06 XXX 208
424 213 02 XXX 209
424 213 04 XXX 209
424 222 04 XXX 208
424 242 02 XX 210
424 512 04 00 565
424 512 04 XXX 208
424 612 04 XXX MDL 389
424 642 02 XX MDL 389
424 642 06 XX MDL 389
424 642 08 XX MDL 389
424 642 12 XX MDL 389
425 01 00 00 416
425 01 03 01 416
425 01 06 06 416
425 02 00 00 416
425 02 03 01 416
425 02 06 06 416
425 02 06 16 416
425 03 00 00 416
425 03 03 01 416
425 04 00 00 416
425 04 03 01 416
425 04 06 06 416
425 04 06 11 416
425 05 00 00 416
425 05 03 01 416
425 05 06 06 416
425 05 14 01 416
425 09 01 416
425 97 51 416
426 00 00 432
426 03 01 432
426 06 01 432
426 14 01 432
431 03 01 537
431 03 02 537
431 400 111 11 536
431 400 111 211 536
431 400 111 221 536
431 400 111 31 536
431 400 111 41 536
431 400 221 11 536
431 400 221 211 536
431 400 221 221 536
431 400 221 31 536
431 400 221 41 536
431 600 121 11 536
431 600 121 211 536
431 600 121 221 536
431 600 121 31 536
431 600 121 41 536
431 600 321 11 536
431 600 321 211 536
431 600 321 221 536
431 600 321 31 536
431 600 321 41 536
431 99 01 517, 537
431 99 02 568
471 111 811 XXX 188
471 151 811 XXX MDL 397
471 152 811 XXX MDL 403
473 211 811 XXX 192
473 212 811 XXX 192
473 231 811 XXX 192
473 231 812 XXX ED1 194
473 232 811 XXX 192
473 252 811 XXX MDL 403

INDEX

by Name

24V-DC / 2 x 4A WIRELESS DIM UNIT	559
24V-DC UNIT DIM1	559
24V-DC UNIT DIM5	559
AC SURGE PROTECTOR	552
AMBIENT LIGHT SENSOR & 24V DIMMER (PWM)	542
ARTUUR R	142
ARTUUR R WALLWASH	142
ARTUUR S	142
ARTUUR S WALLWASH	142
ARTUUR SA	142
BACKSPACE II 22	342
BACKSPACE II 22 X	342, 488
BACKSPACE II REFLECTOR	343
BAND-OH!	334
BAZIL 12	532
B-LINER 65 IP	468
BORDERLINE - PROFILE	434
BOWIE CLIP	222
BOWIE ON	222
BOWL GLASS	309, 405
BOXY 2 L	204
BOXY 2 L+	464
BOXY GLASS SBL	203
BOXY Hi	204
BOXY HONEYCOMB	203
BOXY L	204
BOXY L+	464
BOXY R	202, 464
BOXY R DIM8	202, 464
BOXY R Hi	202
BOXY R OK	202
BOXY SOFTENING LENS	203
BOXY XL R	202
BOXY XL R C	202
BOXY XL S	204
CABLE BASE R	567
CABLE BASE S	567
CABLE CLAMP	567
CARREE ST	134
CARREE ST OK	134
CARREE TRIMLESS	134
CARREE TRIMLESS OK	134
CARREE X	462
CBOX	568
CBOX 350 mA / 10W	568
CEILING BASE 1RC	311, 315
CEILING BASE 3L	313
CEILING BASE 3R	313
CEILING BASE 3RC	311
CEILING BASE 3ROC	315
CEILING BASE MULTI 1	217, 317
CEILING BASE MULTI 3	217, 317
CEILING BASE R	313, 315, 317
CENTRAL ROD SUSPENSION	179
CENTRAL ROD SUSPENSION SUPERNOVA FLAT	181
CENTRAL SUSPENSION SUPERNOVA FLAT	181
CONCRETE BOX	563
CONCRETE BOX TR	563
CONCRETE PACK LOGIC W L	566
CONCRETE PACK LOGIC W S	566
CONCRETE PACK MGIT 1	566
CONCRETE PACK MGIT 2	566
CONE PUT LED	131
CONFORM P DOWN-UP	304
CONFORM P PDS DOWN-UP	304
CONNECT-A - PROFILE	418
CONNECT-I - PROFILE	418
CONNECTION ST	567
CONNECTION TRIMLESS O.F.A.	567
COVERSET R	567
CTRL DELTA GATEWAY	542
CUPPA C	316
CUPPA DISK	317, 405
CUPPA SHADE	317, 405
DALI POWER SUPPLY	542
DALI REPEATER	541
DALI VOICE CONTROL	387
DC SURGE PROTECTOR	552
DEEP RINGO	148
DEEP RINGO OK	148
DEEP RINGO RIBS	148
DEEP RINGO TRIMLESS	148
DEEP RINGO TRIMLESS OK	148
DEEP RINGO X	458
DIRO SBL	156
DIRO SBL ON	156
D-LINER 19 INF SAPP/30BD	297
D-LINER 19 SL PROFILE SET	302
D-LINER 30 INF 30BD	298
D-LINER 30 INF HF40	299
D-LINER 30 INF SAPP	298
D-LINER 30 SBL 30BD	300
D-LINER 30 SBL HF40	301
D-LINER 30 SBL SAPP	300
D-LINER DALI PRESENCE AND DAYLIGHT SENSOR	297
DOT.COM L WALLWASH ST	210
DOT.COM L2 ON	209
DOT.COM L2 ST	209
DOT.COM L4 ON	209
DOT.COM L4 ST	209
DOT.COM LEDLINE - PROFILE	420
DOT.COM M4 ST OK	208
DOT.COM M4 TRIMLESS	208
DOT.COM ON - PROFILE	420
DOT.COM ON WALLWASH	210
DOT.COM S3 ST	208
DOT.COM S6 ST	208
DOT.COM TRIMLESS - PROFILE	420
ELBO ASYMMETRIC P	526
ELBO BRIDGE P	526
ELBO SYMMETRIC P	526
EMERGENCY UNIT 7W	558
ENTERO L GLASS SBL	125
ENTERO L HONEYCOMB	125
ENTERO L LINEAR SPREAD LENS	125
ENTERO L SOFTENING LENS	125
ENTERO L SPREAD LENS	125
ENTERO M GLASS SBL	123
ENTERO M HONEYCOMB	123
ENTERO M LINEAR SPREAD LENS	123
ENTERO M SOFTENING LENS	123
ENTERO M SPREAD LENS	123
ENTERO RD-L	124
ENTERO RD-L MOUNTING SET S2	125
ENTERO RD-L TRIMLESS	124
ENTERO RD-L TRIMLESS WALLWASH	124
ENTERO RD-L WALLWASH	124
ENTERO RD-L X	461
ENTERO RD-M	122
ENTERO RD-M MOUNTING SET S2	123
ENTERO RD-M TRIMLESS	122
ENTERO RD-M TRIMLESS WALLWASH	122
ENTERO RD-M WALLWASH	122
ENTERO RD-M X	460
ENTERO RD-S	120
ENTERO RD-S MOUNTING SET S2	121
ENTERO RD-S TRIMLESS	120
ENTERO RD-S TRIMLESS WALLWASH	120
ENTERO RD-S WALLWASH	120
ENTERO RD-S X	460
ENTERO S GLASS SBL	121
ENTERO S HONEYCOMB	121
ENTERO S LINEAR SPREAD LENS	121
ENTERO S SOFTENING LENS	121
ENTERO S SPREAD LENS	121
ENTERO SQ-L	124
ENTERO SQ-L TRIMLESS	124
ENTERO SQ-L X	461
ENTERO SQ-M	122
ENTERO SQ-M TRIMLESS	122
ENTERO SQ-M TRIMLESS WALLWASH	122
ENTERO SQ-M WALLWASH	122
ENTERO SQ-M X	460
ENTERO SQ-S	120
ENTERO SQ-S TRIMLESS	120
ENTERO SQ-S TRIMLESS WALLWASH	120
ENTERO SQ-S WALLWASH	120
ENTERO SQ-S X	460
FALLING EDGE DIMMER 200W DIM2	559
FEMTOLINE 25 - PROFILE	424
FEMTOLINE 25 FLUSH - PROFILE	424
FEMTOLINE 25 T - PROFILE	424
FEMTOLINE 25 TP - PROFILE	424
FEMTOLINE 35 - PROFILE	426
FEMTOLINE 35 F HE - PROFILE	430
FEMTOLINE 35 F HE D/U - PROFILE	430
FEMTOLINE 35 F HE TR - PROFILE	428
FEMTOLINE 35 F HE TRW+ - PROFILE	428
FEMTOLINE 35 TR - PROFILE	426
FEMTOLINE 35 WG - PROFILE	426
FEMTOLINE 45 - PROFILE	432
FEMTOLINE TP WALL	344
FEMTOLINE W DOWN-UP	344
FEMTOLINE WALL - PROFILE	432
FEMTOLINE WALL D/U - PROFILE	432
FIX 40 GLASS	255
FRAGMA L ADM	361
FRAGMA L BEAM LENS	361
FRAGMA L FLAPS	361
FRAGMA L HONEYCOMB	361
FRAGMA L LINEAR SPREAD LENS	361
FRAGMA L RASTER	361
FRAGMA L SOFTENING LENS	361
FRAGMA L WALLWASH LENS	361
FRAGMA M ADM	360
FRAGMA M BEAM LENS	360
FRAGMA M FLAPS	361
FRAGMA M HONEYCOMB	361
FRAGMA M LINEAR SPREAD LENS	361
FRAGMA M RASTER	361
FRAGMA M SOFTENING LENS	361
FRAGMA M WALLWASH LENS	361
FRAGMA S ADM	360
FRAGMA S BEAM LENS	360
FRAGMA S HONEYCOMB	361
FRAGMA S LINEAR SPREAD LENS	361
FRAGMA S RASTER	361
FRAGMA S SOFTENING LENS	361
FRAGMA S WALLWASH LENS	361
FRAX ANTI VANDAL SCREWS	515, 517
FRAX BRACKET	515
FRAX M	514
FRAX M KAP	515, 517
FRAX MB	514
FRAX MB POLE	516
FRAX PIN	515
FRAX POLE BRACKET	517
FRAX S	514
FRAX S KAP	515
FRAX SB	514
FRAX STRAP	515
GALA T	336
GALA XL	336

GALA XL HP 336
GALA XL LP 336
GIBBO 308
GLASS SBL 42 133
GLASS SBL 50 187
GLASS SBL 57 237
GLASS SBL 75 237
GLASS SBL 78 203
GYN 150
GYN D 150
GYN DS 150
GYN OK 150
GYN W M 324
GYN W S 324
HALOLED Hi 545
HALOSCAN CLIP 214
HALOSCAN HONEYCOMB 215, 397
HALOSCAN KAP MP 215, 397
HALOSCAN LINEAR SPREAD LENS 215, 397
HALOSCAN ON 1 214
HALOSCAN ON 2 214
HALOSCAN ST 214
HEDRA 39 W 338
HEDRA 39 W 40 338
HEDRA 39 W 60 338
HEDRA 391 C 194
HEDRA 392 C 194
HEDRA 393 C 194
HEDRA 451 C 194
HEDRA 452 C 194
HEDRA 62 ON 194
HEDRA 62 W 338
HEDRA CLIP 192
HEDRA L CLIP 192
HEDRA L ON 192
HEDRA ON 192
HELI 1 SCREEN LED 324
HELI X SCREEN LED 474
HIGH PROFILE C 374
HIGH PROFILE F1 374
HIGH PROFILE F2 374
HIGH PROFILE W 374
HOLE IN ONE R15 131
HOLE IN ONE S15 131
HOLE IN ONE S6 131
HONEYCOMB 42 133
HONEYCOMB 50 131
HONEYCOMB 57 237
HONEYCOMB 72 163
HONEYCOMB 75 221
HONEYCOMB 78 203
HONEYCOMB KIX 495, 513
HONEYCOMB S105 537
iMAX HONEYCOMB 129
iMAX II ADJUSTABLE TRIMLESS 128
iMAX II GLASS SBL 129
iMAX II HONEYCOMB 129
iMAX II LINEAR SPREAD LENS 129
iMAX II ROUND ADJUSTABLE 128
iMAX II ROUND ADJUSTABLE TRIMLESS 128
iMAX II SOFTENING LENS 129
iMAX II SPREAD LENS 129
iMAX II SQUARE ADJUSTABLE 128
iMAX II SQUARE ADJUSTABLE TRIMLESS 128
iMAX II TUBE 566
INFORM 40 SQ 288
INFORM 40 SQ DOWN-UP 289
INFORM 40 SQ PDS 288
INFORM 40 SQ UP 288
INFORM 40 SQ UP TW 288
INFORM OK ADM SLIM 366
INFORM POWER SUPPLY 554
INFORM R POWERBOX D 557
INFORM R POWERBOX D/U 557
INFORM R1 DOWN 290
INFORM R1 DOWN-UP 290
INFORM R1+ CS DOWN 290
INFORM R1+ CS DOWN-UP 290
INFORM R1+ DOWN 290
INFORM R1+ DOWN-UP 290
INFORM R2 DOWN 290
INFORM R2 DOWN-UP 290
INFORM R2+ DOWN 290
INFORM R2+ DOWN-UP 290
INFORM R3 DOWN 290
INFORM R3 DOWN-UP 290
INFORM R3+ DOWN 290
INFORM R4 C DOWN 292
INFORM R4 C DOWN-UP 292
INFORM R4 DOWN 292
INFORM SQ F 282
INFORM SQ P DOWN 284
INFORM SQ P DOWN-UP 286
INFORM SQ POWERBOX 557
INFORM SQ POWERBOX L 557
INFORM ST 282
INLET S 328
INLET TRIMLESS H20 328
INLET TRIMLESS H7 328
INLET TRIMLESS L113 328
INLET TRIMLESS L20 328
INLET TRIMLESS L38 328
INLET TRIMLESS XS 328
IP68 CONNECTION KIT 568
IP68 CONNECTOR 3P 568
IP68 CONNECTOR 4P 537
IP68 JUNCTION BOX 4P 568
IP68 Y-CONNECTOR 5P 568
JIHA! 263
KAP KIX 495, 513
KAP STRIPER 521, 531
KIX II 494
KIX II PIN 512
KIX M 494
KIX M PIN 512
KIX S 494
KIX S PIN 512
LASS-OH! 262
LASS-OH! L 262
LASS-OH! POWERBOX 557
LASS-OH! R 262
LED DIMMODULE 24V / 3CH / 6A DIM2 559
LED DIMMODULE 24V / 5CH / 5A DIM5 559
LED FILAMENT LAMP 545
LED LAMP 545
LED LINE OK ADM SLIM 366
LED POWER CONVERTER 48V-DC to 350 mA-DC DIM5 558
LED POWER CONVERTER 48V-DC to 500 mA-DC DIM5 558
LED POWER CONVERTER 48V-DC to 500 mA-DC PRO DIM5 413
LED POWER CONVERTER 48V-DC to 700 mA-DC DIM5 558
LED POWER CONVERTER 48V-DC to 700 mA-DC PRO DIM5 413
LED POWER SUPPLY 1050mA-DC 555
LED POWER SUPPLY 1200mA-DC DIM1 554
LED POWER SUPPLY 1200mA-DC DIM5 554
LED POWER SUPPLY 1700mA-DC DIM1 554
LED POWER SUPPLY 24V-DC 556
LED POWER SUPPLY 350mA 554
LED POWER SUPPLY 48V-DC 556
LED POWER SUPPLY 500mA 554
LED POWER SUPPLY 700mA 554
LED POWER SUPPLY 900mA 554
LED POWER SUPPLY MULTI POWER 554
LED POWER SUPPLY MULTI-POWER 554
LED TRANSFO 12V 559
LEDFLEX IN 437
LEDFLEX IN 5m 546
LEDFLEX IN CL 5m 547
LEDFLEX IN CONNECTION CLIP SET 547
LEDFLEX IN CONNECTION SET 547
LEDFLEX IN DIM 437
LEDFLEX IN DIM 5m 546
LEDFLEX IN FP 437
LEDFLEX IN FP 5m 546
LEDFLEX IN FP CONNECTION CLIP SET 547
LEDFLEX IN FP CONNECTION SET 547
LEDFLEX IN FP SUPPLY CABLE SET 547
LEDFLEX IN HP 437
LEDFLEX IN HP 5m 546
LEDFLEX IN MP 437, 439
LEDFLEX IN MP / HP CONNECTION CLIP SET 547
LEDFLEX IN MP / HP CONNECTION SET 547
LEDFLEX IN MP / HP SUPPLY CABLE SET 547
LEDFLEX IN MP 5m 546
LEDFLEX IN RGB 437
LEDFLEX IN RGB 5m 546
LEDFLEX IN RGB/TW 437
LEDFLEX IN RGBTW 5m 546
LEDFLEX IN SMALL 417, 419
LEDFLEX IN SUPPLY CABLE SET 547
LEDFLEX IN TW 437
LEDFLEX IN TW 5m 546
LEDFLEX OUT 437
LEDFLEX OUT 5m 546
LEDFLEX OUT CL 5m 547
LEDFLEX OUT FP 437
LEDFLEX OUT FP 5m 546
LEDFLEX OUT MP 437
LEDFLEX OUT MP 5m 546
LEDFLEX OUT RGB 437
LEDFLEX OUT RGB 5m 546
LEDS C R ST 474, 510
LEDS GO IN FORTE 474, 510
LINEAR SPREAD LENS 42 133
LINEAR SPREAD LENS 50 187
LINEAR SPREAD LENS 57 237
LINEAR SPREAD LENS 75 237
LINEAR SPREAD LENS S105 537
LOGIC 190 ANTI VANDAL SCREWS 503
LOGIC 190 R 502
LOGIC 190 R BOX 568
LOGIC 190 R OK 502
LOGIC 190 R REFL 503
LOGIC 40 BOX R 568
LOGIC 40 R 506
LOGIC 40 R A 506
LOGIC 40 R A MOON 506
LOGIC 40 R MOON 506
LOGIC 60 BOX R 568
LOGIC 60 R 506
LOGIC 60 R A 506
LOGIC 60 R A MOON 506
LOGIC 60 R MOON 506
LOGIC 60 R WALLWASH 506
LOGIC 90 BOX R 568
LOGIC 90 BOX S 568
LOGIC 90 R 507
LOGIC 90 R A 507
LOGIC 90 R A WALLWASH 507
LOGIC 90 R WALLWASH 507
LOGIC 90 S 507
LOGIC F1 508
LOGIC F2 508
LOGIC LINEAR 504
LOGIC LINEAR BOX 568
LOGIC MINI W R 326, 472
LOGIC MINI W S 326, 472
LOGIC W L 326, 472
LOGIC W L F 326, 472
LOGIC W S 326, 472
M - CUPPA C 405
M - DALI PRESENCE AND DAYLIGHT SENSOR 387
M - DOT.COM M4 389
M - DOT.COM WALLWASH 389
M - INFORM L 388
M - LED LINE HE 388
M - LED LINE UP 388
M - MICROSPY 39 C 404
M - WIRELESS CONTROL 542
M - WIRELESS PRESENCE & DAYLIGHT SENSOR 387
M - WIRELESS SENSOR HUB 387
M20/M26H - BOWIE 394
M20/M26H - HALOSCAN 396
M20/M26H - HEDRA 403
M20/M26H - HEDRA L 403
M20/M26H - JUM-OH! 2R 390
M20/M26H - JUM-OH! 4R 390
M20/M26H - MULTINOVA 30 396

M20/M26H - NEEDLE 395
M20/M26H - NEEDLE OK 395
M20/M26H - OBIN 390
M20/M26H - OCTAV 27 397
M20/M26H - OCTAV 39 397
M20/M26H - ODRON 260, 394
M20/M26H - PUNK 39 397
M20/M26H - SPY 271 398
M20/M26H - SPY 271 L 398
M20/M26H - SPY 272 398
M20/M26H - SPY 272 L 398
M20/M26H - SPY 391 260, 399
M20/M26H - SPY 391 L 399
M20/M26H - SPY 392 260, 399
M20/M26H - SPY 52 400
M20/M26H - SPY 52 FOCUS 400
M20/M26H - SPY 52 TW 400
M20/M26H - SPY 52 WALLWASH 400
M20/M26H - SPY 66 401
M20/M26H - SPY 66 WALLWASH 401
M20/M26H - SPY FOCUS 402
M20/M26H - TWEETER BL 404
M20/M26H - VIZIR 402
M20/M26H - VIZIR L 403
M26H - LED LINE OK 388
M26H - VOICE COMMAND GOOGLE HOLDER 387
M26L - BOWIE 394
M26L - BOXY L 391
M26L - BOXY L A 391
M26L - BOXY R 391
M26L - HALOSCAN 396
M26L - HEDRA 403
M26L - HEDRA L 403
M26L - JUM-OH! 2R 390
M26L - JUM-OH! 4R 390
M26L - LED LINE OK 388
M26L - MULTINOVA 30 396
M26L - OCTAV 27 397
M26L - OCTAV 39 397
M26L - ODRON 260, 394
M26L - PUNK 39 397
M26L - SPY 271 398
M26L - SPY 271 L 398
M26L - SPY 272 398
M26L - SPY 272 L 398
M26L - SPY 391 260, 399
M26L - SPY 391 L 399
M26L - SPY 392 260, 399
M26L - SPY 52 400
M26L - SPY 52 FOCUS 400
M26L - SPY 52 WALLWASH 400
M26L - SPY 66 401
M26L - SPY 66 WALLWASH 401
M26L - SPY FOCUS 402
M26L - TWEETER BL 404
M26L - VIZIR 402
M26L - VIZIR L 403
M26L - VOICE COMMAND GOOGLE HOLDER 387
M52 - 1 LED 392
M52 - 1 LED D 393
M52 - 2 LED 392
M52 - 2 LED D 393
M52 - 2 LED OK 392
M52 - SPY 391 399
M52 - SPY 391 L 399
M52 - SPY 52 400
M52 - SPY 66 401
M52 - SPY FOCUS 402
MANTELLO 314
MANTELLO GLASS 314
MICRO REO 138
MICRO REO X 138, 456
MICROSPY IN TRIMLESS 228
MICROSPY IN TRIMLESS OK 228
MICRO VISOR 161, 229
MICROGRID IN 160
MICROLINE 40 - PROFILE 444
MICROLINE 60 - PROFILE 444
MICROSPY 39 C 238
MICROSPY IN 228
MICROSPY IN OK 228
MIDISPY TUBE 566
MIKALINE L 266
MIKALINE-OH! 266
MILES C1 312
MILES C2 312
MILES C3 312
MILES C4 312
MILES POWERBOX 557
MILES TUBE 313, 315
MINI DEEP RINGO II 148
MINI DEEP RINGO II OK 148
MINI DEEP RINGO II TRIMLESS 148
MINI DEEP RINGO II X 458
MINI PARTOU IP 152
MINI REO II 138
MINI REO II OK 138
MINI REO II OK X 456
MINI REO II X 456
MINIGRID 67 IN 160
MINIGRID 67 IN TRIMLESS 160
MINIGRID 67 ON 160
MINIGRID IN 162
MINIGRID IN 1 MOUNTING KIT 565
MINIGRID IN 2 MOUNTING KIT 565
MINIGRID IN TRIMLESS 162
MINIGRID ON 162
MONO II 482
MONO II DOWN-UP 482
MONOPOL 530
MONTUR 330, 490
MONTUR L O 330
MONTUR L P 524
MONTUR L PC 330, 490
MONTUR M 330, 490
MONTUR M O 330
MONTUR MINI M 490
MONTUR S 330, 490
MONTUR S O 330
MONTUR S P 524
MOUNTING KIT 1 LARGE MINIGRID 67 565
MOUNTING KIT 1 MINIGRID 67 565
MOUNTING KIT 2 LARGE MINIGRID 67 565
MOUNTING KIT 2 MINIGRID 67 565
MOUNTING KIT 75 565
MOUNTING KIT 75 TRIMLESS 565
MOUNTING KIT 75 TRIMLESS O.F.A. 565
MOUNTING KIT DEEP ENTERO RD-S TRIMLESS 565
MOUNTING KIT DOT.COM M4 TRIMLESS 565
MOUNTING KIT ENTERO RD-L 565
MOUNTING KIT ENTERO RD-M 565
MOUNTING KIT ENTERO RD-S 565
MOUNTING KIT ENTERO SQ-L 565
MOUNTING KIT ENTERO SQ-M 565
MOUNTING KIT ENTERO SQ-S 565
MOUNTING KIT FLUSH INLET 565
MOUNTING KIT FLUSH SPY 565
MOUNTING KIT INLET TRIMLESS 565
MOUNTING KIT MINI DEEP RINGO II TRIMLESS 565
MOUNTING KIT MINIGRID IN 1 565
MOUNTING KIT MINIGRID IN 2 565
MOUNTING KIT NIME O.F.A. 565
MOUNTING KIT NO AIR 565
MOUNTING KIT PLAT-OH! TRIMLESS 565
MOUNTING KIT PLUG O.F.A. 565
MOUNTING KIT R102 TRIMLESS 565
MOUNTING KIT R60 TRIMLESS 565
MOUNTING KIT R82 TRIMLESS 565
MOUNTING KIT S102 TRIMLESS 565
MOUNTING KIT SIDE AIR 565
MOUNTING KIT SIDE AIR ONLY 565
MOUNTING KIT SPY 39 TRIMLESS IN 565
MOUNTING KIT SPY 39/52 TRIMLESS 565
MOUNTING KIT TOP AIR 565
MOUNTING KIT TOP AIR ONLY 565
MOUNTING KIT TRIMLESS ARTUUR S/SA 143
MOUNTING KIT TRIMLESS MICROSPY IN 229
MOUNTING KIT TRIMLESS MICROSPY IN OK 229
MOUNTING KIT TRIMLESS O.F.A. ARTUUR R 143
MOUNTING KIT UHO L TRIMLESS 225
MULTINOVA 255 170
MULTINOVA 30 168
MULTINOVA 30 ADM 362
MULTINOVA 30 ADM 362
MULTINOVA 30 DOWN-UP 168
MULTINOVA 30 PIVOT 170
MULTINOVA 30 PIVOT ADM 362
MULTINOVA 30 PRISM 168
MULTINOVA 30 PRISM ADM 362
MULTINOVA 30 SUSPENSION SET 169
MULTINOVA 355 170
MULTINOVA 55 168
MULTINOVA 55 ADM 362
MULTINOVA 55 DOWN-UP 168
MULTINOVA 55 OK 170
MULTINOVA 55 PIVOT 170
MULTINOVA 55 PRISM 168
MULTINOVA 55 PRISM ADM 362
MULTINOVA 55 ROD SUSPENSION 169
MULTINOVA 55 SMOKE 168
MULTINOVA 55 SUSPENSION SET 169
MULTINOVA RECESSED KIT 169
NEEDLE 1 198
NEEDLE 1 OK 198
NEEDLE 1 TRC 198
NEEDLE 1 TRC OK 198
NIME II 116
NIME II AIR 116
NIME II TRIMLESS 116
NIME II TRIMLESS OK 116
NIME TRIMLESS 116
NOCTA RD80 486
NOCTA RD80 DOWN-UP 486
NOCTA SQ155 487
NOCTA SQ155 DOWN-UP 487
NOCTA SQ85 487
NOCTA SQ85 DOWN-UP 487
OAO - ROD SUSPENSION 438
OBIN ON 220
OBLIX 528
OBLIX F 528
OBLIX S 528
OCTAV 27 CLIP 196
OCTAV 39 CLIP 196
OCTAV 39 ON 196
ODRON CLIP 222
ODRON COVER 261, 395
ODRON ON 222
ONE-AND-ONLY - PROFILE 438
ONE-AND-ONLY P 306
OONO C 216
OONO F 518
OONO F PORTABLE 518
OONO L TABLE LIGHT 216
OONO ON 216
OONO ON 2 216
OONO P 518
OONO W L 332, 476
OONO W M 332, 476
OONO W S 332, 476
ORBIT LED 338
ORBIT PUNK Hi 338
ORBIT PUNK LED 338
ORBIT T LED 338
OUTLINER - PROFILE 436
OUTLINER 100 522
PANEL 120 DARK GREY 253, 257
PANEL 120 LIGHT GREY 253, 257
PANEL 70 DARK GREY 253, 257
PANEL 70 LIGHT GREY 253, 257
PANEL 90 DARK GREY 253, 257
PANEL 90 LIGHT GREY 253, 257
PARTOU IP 152
PARTOU OK 152
PARTOU S IP 152
PDS REMOTE CONTROL 289, 305
PDS SENSOR PROGRAMMER 289, 305
PIN 569
PLASTERKIT 563

PLATE	569
PLAT-OH!	144
PLAT-OH! TRIMLESS	144
POLE 60	516
POLE 80	516
POLESANO	536
POLESANO CAMERA HEAD	537
POLESANO FUSE BOX	517, 537
POLESANO W	536
POLESANO WIFI PUCK	537
PRESENCE DETECTION HF SENSOR	544
PUNK 39 CLIP	188
PUNK 451 C	188
PUNK 452 C	188
PUNK 621 C	188
PUNK 622 C	188
PUT CENTER	130
PUT MAGNETIC	130
PUT S6 HONEYCOMB	131
PUT S6 MAGNETIC	130
PUT S6 SOFTENING LENS	131
Q-CONTROL	275, 279
Q-GATEWAY	275, 279
Q-PUSH BUTTON INTERFACE	275, 279
RAND 111 LED	242
RAND 211 LED	242
RAND 311 LED	242
REO	138
REO 2 S OK	138
REO OK	138
REO S OK	138
REO X	456
RGB DRIVER	559
RGB TOUCH CONTROLLER DMX	559
RGB/TW DRIVER	559
RGB/TW REPEATER	559
RGB/TW TOUCH CONTROLLER DMX	559
SHELFLINE 18 - PROFILE	440
SHELFLINE 19 - PROFILE	349, 440
SHELFLINE 20 ST - PROFILE	440
SHIFTLINE 19 - PROFILE	408
SHIFTLINE M26H - PROFILE	384
SHIFTLINE M26H + SBL	384
SHIFTLINE M26L - PROFILE	384
SKOV M	478
SKOV S	478
SL19 - SPY 27	409
SL19 - SPY 27 L	409
SL19 - SPY 39	409
SL19 - SPY 39 L	409
SL19 - UHO	409
SL19 - UHO L	409
SLM26H F	260
SLM26L F	260
SMART 48 MODULATOR	543
SOFTENING LENS 42	133
SOFTENING LENS 50	187
SOFTENING LENS 57	237
SOFTENING LENS 72	163
SOFTENING LENS 75	237
SOFTENING LENS 78	203
SOIREE RC	318
SOIREE RC OPAL	318
SOIREE SC	318
SOIREE SC OPAL	318
SOIREE WR X	496
SOIREE WS X	496
SOIREE WS X DOWN-UP	496
SOLI - 52	274
SOLI - 52 NLT	274
SOLI - 52 SHHH	276
SOLI - 52 SHHH NLT	276
SOLI - 66	274
SOLI - 66 NLT	274
SOLI - FORM DOWN	275
SOLI - FORM DOWN-UP	275
SOLI - LINE DOWN	275
SOLI - LINE UP	275
SOLI - POWERBOX	557
SOLI - SENSE	279
SOLI - SHHH 120 C	276
SOLI - SHHH 60	272
SOLI - SHHH 60 C	276
SOLI - SHHH 90	272
SOLI - SHHH 90 C	276
SOLI - SHHH PLUS 120	276
SOLI - SHHH PLUS 60	276
SOLI - SHHH PLUS 90	276
SOLI - VOICE COMMAND GOOGLE HOLDER	279
SOLISCAPE - PROFILE	272
SPIX M	520
SPIX M 2	520
SPIX M PIN	520
SPIX P	520
SPIX S	520
SPIX S PIN	520
SPL14 - SPY 27	303, 409
SPL14 - SPY 27 L	303, 409
SPL14 - SPY 39	303, 409
SPL14 - SPY 39 L	303, 409
SPL14 - UHO	303, 409
SPL14 - UHO L	303, 409
SPLITBOX SPY 52	132
SPLITBOX SPY FOCUS	132
SPLIT-IT PRO - PROFILE	410
SPLIT-IT SPY 52	412
SPLIT-IT SPY 66	412
SPLIT-IT SPY FOCUS	412
SPLITLINE 14 - PROFILE	408
SPLITLINE M20 - PROFILE	380
SPLITLINE M20 ST - PROFILE	380
SPLITLINE M52 - PROFILE	380
SPM20 - AIR JUM-OH! 4R	382
SPM20 - AIR KIT	380
SPM20 - AIR SPY 392	382
SPM20 - AIR SPY 522	382
SPM20 - GIBBO	404
SPREAD LENS 42	133
SPREAD LENS 50	187
SPREAD LENS 57	237
SPREAD LENS 75	237
SPT PRO - LED LINE	412
SPY 27 CLIP	230
SPY 27 L CLIP	230
SPY 27 L ON 4	230
SPY 27 ON 1	230
SPY 27 ON 2	230
SPY 39 CLIP	232
SPY 39 L CLIP	232
SPY 39 L ON	232
SPY 39 L ON 1	232
SPY 39 L ON 2	232
SPY 39 L TUBE	566
SPY 39 ON	232
SPY 39 ON 1	232
SPY 39 ON 2	232
SPY 39 PLUG	232
SPY 39 ST	232
SPY 39 TRIMLESS	232
SPY 39 TRIMLESS IN	232
SPY 39 TUBE	566
SPY 39 W X	492
SPY 39 W X DOWN-UP	492
SPY 52 ADM	352
SPY 52 ADM SLIM	352
SPY 52 CLIP	234
SPY 52 CLIP WALLWASH	234
SPY 52 FOCUS CLIP	234
SPY 52 FOCUS TRIMLESS	234
SPY 52 M10	450
SPY 52 ON	234
SPY 52 ON 1	234
SPY 52 ON 2	234
SPY 52 ON 3	234
SPY 52 REFLECTOR	353
SPY 52 ST	234
SPY 52 TRIMLESS	234
SPY 52 TUBE	566
SPY 52 WALLWASH ADM	352
SPY 52 WALLWASH ADM SLIM	352
SPY 66 ADM	354
SPY 66 ADM SLIM	354
SPY 66 CLIP	236
SPY 66 CLIP WALLWASH	236
SPY 66 LP ADM	354
SPY 66 LP/MP GLASS SBL	355
SPY 66 LP/MP HONEYCOMB	355
SPY 66 LP/MP LINEAR SPREAD LENS	355
SPY 66 LP/MP SOFTENING LENS	355
SPY 66 LP/MP TUBE	566
SPY 66 MP ADM	354
SPY 66 ON	236
SPY 66 REFLECTOR	355
SPY 66 TUBE	566
SPY 66 WALLWASH ADM	354
SPY 66 WALLWASH ADM SLIM	354
SPY 90 ADM	356
SPY 90 ON	236
SPY 90 REFLECTOR	357
SPY 90 TUBE	566
SPY C	238
SPY FOCUS ADM	352
SPY FOCUS CLIP	240
SPY FOCUS ON	240
SPY S	238
SPY TUBE	566
ST - DALI PRESENCE AND DAYLIGHT	544
ST - WIRELESS SENSOR HUB	544
STIEVIE	522
STILL	310
STIP W R	478
STIP W S	478
STRAP	495
STREAMLINER 70L - PROFILE	448
STREAMLINER 70S - PROFILE	448
STREAMLINER 85 - PROFILE	448
STREAMLINER TRIMLESS - PROFILE	448
STRIPER	530
SUPERDOME RECESSED	182
SUPERDOME RECESSED KIT	183
SUPERLOOP HC MDL	252
SUPERLOOP HC SBL	256
SUPERLOOP HC SBL OVAL	256
SUPERLOOP HC SPR	256
SUPERLOOP PLUS HC	256
SUPERLOOP PLUS HC MDL	252
SUPERLOOP POWERBOX F - 48V	557
SUPERLOOP POWERBOX H - 48V	557
SUPERLOOP POWERBOX H8	557
SUPERLOOP POWERBOX H9	557
SUPERLOOP POWERBOX L	557
SUPERLOOP POWERBOX L - 48V	557
SUPERLOOP S HC MDL	252
SUPERLOOP SLIM DOWN	258
SUPERLOOP SLIM IN	258
SUPERLOOP SLIM OUT	258
SUPERLOOP VC SBL	256
SUPERLOOP VR SBL	256
SUPERLOOP-FIX 40	254
SUPERLOOP-FIX 40 DOWN-UP	254
SUPERLOOP-FIX 40 DOWN-UP GT	254
SUPERLOOP-FIX 45	254
SUPERLOOP-HEDRA	254
SUPERLOOP-SPY 52	255
SUPERLOOP-SPY 66	255
SUPERLOOP-SPY FOCUS	255
SUPERLOOP-VIZIR	254
SUPERLOOP-XY180	254
SUPERNOVA 125 RECESSED KIT	179
SUPERNOVA 65 RECESSED KIT	179
SUPERNOVA 95 RECESSED KIT	179
SUPERNOVA FLAT 65	180
SUPERNOVA FLAT 65 DOWN-UP	180
SUPERNOVA FLAT 65 PRISMATIC	180
SUPERNOVA FLAT 65 PRISMATIC DOWN-UP	180
SUPERNOVA FLAT 65 PRISMATIC SMOOTH UP	180
SUPERNOVA FLAT 65 SMOOTH UP	180
SUPERNOVA FLAT 95	180
SUPERNOVA FLAT 95 DOWN-UP	180
SUPERNOVA FLAT 95 PRISMATIC	180
SUPERNOVA FLAT 95 PRISMATIC DOWN-UP	180
SUPERNOVA FLAT 95 PRISMATIC SMOOTH UP	180

SUPERNOVA FLAT 95 SMOOTH UP	180
SUPERNOVA LINE 125	178
SUPERNOVA LINE 125 DOWN-UP	178
SUPERNOVA LINE 65	178
SUPERNOVA LINE 65 DOWN-UP	178
SUPERNOVA LINE 95 DOWN-UP	178
SUPERNOVA LINE 95 SBL	178
SUPERNOVA LINE 95 TW	178
SUPERNOVA LINE 95 TW DOWN-UP	178
SUPERNOVA LINE TRIMLESS 125	176
SUPERNOVA LINE TRIMLESS 65	176
SUPERNOVA LINE TRIMLESS 95	176
SUPERNOVA XS 260 X	466
SUPERNOVA XS PIVOT 260 X	466
SUPER-OH! 120 SBL TRIMLESS	246
SUPER-OH! 70 SBL TRIMLESS	246
SUPER-OH! SLIM 120 C DOWN-UP	248
SUPER-OH! SLIM 120 CS DOWN	248
SUPER-OH! SLIM 120 CS DOWN-UP	248
SUPER-OH! SLIM 120 DOWN	248
SUPER-OH! SLIM 80 C DOWN-UP	248
SUPER-OH! SLIM 80 CS	248
SUPER-OH! SLIM 80 CS DOWN	248
SUPER-OH! SLIM 80 CS DOWN-UP	248
SUPER-OH! SLIM 80 DOWN	248
SUPER-OH! XS	246
SUPER-OH! XS C	246
SUPER-OH! XS CEILING BASE	247
SUPER-OH! XS PIVOT	246
SUPER-OH! XS PIVOT ADM	364
SUPPLY CABLE LED LINE	413
SUSPENSION + CONNECTION ST	567
SUSPENSION + CONNECTION TRIMLESS	567
SUSPENSION SET 18	179
SUSPENSION SET 25	181
SUSPENSION SET 28	249
SUSPENSION SET 29	249
SUSPENSION SET 30	291
SUSPENSION SET 31	291
SUSPENSION SET 32	291
SUSPENSION SET 33	291
SUSPENSION ST	567
SUSPENSION TRIMLESS O.F.A.	567
TAGLINE LEDLINE - PROFILE	416
TAGLINE ON - PROFILE	416
TAGLINE ST - PROFILE	416
TAGLINE TRIMLESS - PROFILE	416
TAGLINE TRIMLESS WALL - PROFILE	416
TGL-TR - SPY 27	417
TIGA IN LED	336
TIGA LED	336, 482
TIGA LED BS	336, 482
TIGA V-PLATE	337
TOPIX	340
TOPIX L X	480
TRACK 3F DIM CORNER	348
TRACK 3F DIM CUTTING TOOL	348
TRACK 3F DIM H	348
TRACK 3F DIM H CORNER	348
TRACK 3F DIM H END CAP	348
TRACK 3F DIM H SUPPLY	348
TRACK 3F DIM H SUSPENSION	348
TRACK 3F DIM IN	348
TRACK 3F DIM IN - INSIDE CLIP	348
TRACK 3F DIM IN END CAP	348
TRACK 3F DIM IN RECESSED COVER	348
TRACK 3F DIM ON	348
TRACK 3F DIM ON CORNER	348
TRACK 3F DIM ON DIRECT FIXATION	348
TRACK 3F DIM ON END CAP	348
TRACK 3F DIM ON ROD SUSPENSION	348
TRACK 3F DIM ON SUSPENSION	348
TRACK 3F DIM SUPPLY	348
TRACK CURRENT SUPPLY	348
TRACK DIM MIDDLE SUPPLY	348
TRACK SHL 19 - MOUNTING CLIP SET	349
TUBE 52	149
TUNABLE WHITE TOUCH CONTROLLER DMX	559
TWEETER M ON 1	218
TWEETER M ON 1 WDL	218
TWEETER M ON 2	218
TWEETER M ON 2 WDL	218
TWEETER M ST	218
TWEETER M TRIMLESS	218
TWENTY-7 TRIMLESS	154
UHO CLIP	224
UHO CLIP 2	224
UHO L 2 AIR	224
UHO L CLIP	224
UHO L CLIP 2	224
UHO L ON 3	224
UHO L TRIMLESS	224
ULTRA X DOWN-UP LED	492
ULTRA X LED	492
VISION LED	340
VISION OUT LED	480
VISION S OUT LED	480
VISOR 27	231
VISOR 39	233, 383
VIZIR CLIP	192
VIZIR HONEYCOMB	193
VIZIR L CLIP	192
VIZIR L ON	192
VIZIR ON	192
VIZIR SOFTENING LENS	193
VIZIR TUBE	566
WALKER II	526
WALKER II W	488
WANT-IT L	336
WANT-IT S	336
WIRELESS CONTROL	541
WIRELESS CONTROL 2 CHANNEL TUNABLE WHITE	541
WIRELESS CONTROL 5A DIM1	541
WIRELESS CONTROL DIM5	541
WIRELESS CONTROL DIM5 + DALI GATE-WAY	542
WIRELESS CONTROL DIM8	541
WIRELESS CONTROL RGB	541
WIRELESS PUSH BUTTON INTERFACE	542
WIRELESS SWITCHBOARD - 4 FUNCTIONS	542
XY180 CONNECTION BOX	187
XY180 F120 WDL	186
XY180 S120 MINI	186
XY180 S121	186
XY180 S121 MINI	186
XY180 S121 PUNK	186
XY180 S122	186
XY180 S80 MINI	186
XY180 S81	186
XY180 S81 MINI	186
XY180 S81 PUNK	186
XY180 S82	186
ZOOVER 120	320
ZOOVER 120 DOWN-UP	320
ZOOVER 140	320
ZOOVER 140 DOWN-UP	320
ZOOVER 140 DOWN-UP DIM4	320
ZOOVER 4CLIP 120	320
ZOOVER 4CLIP 140	320

HOW TO USE THIS MATRIX

NEW

ENTERO SMALL WALLWASH



				ROUND TRIMLESS	ROUND	SQUARE TRIMLESS	SQUARE
				⏀ ØKT x 95	⏀ Ø76 x 95 / ▟ max.16	▙ KIT x 95	▙ 76 x 76 x 95 / ▟ 12,5 or 25
★	3000K CRI>90	LED [U] 8,6W / 1080lm / 500mA	IP20	28428 9300 ◇	28405 9300 ◇	28528 9300 ◇	28505 9300 ◇
	2700K CRI>90	LED [U] 8,6W / 1041lm / 500mA		28428 9200 ◇	28405 9200 ◇	28528 9200 ◇	28505 9200 ◇
	DUAL WHITE	4000-1800K / CRI>90 LED [Y] 9W / 979lm / 500mA		28465 9000 ◇	28457 9000 ◇	28565 9000 ◇	28557 9000 ◇
		6500-2700K / CRI>90 LED [Y] 9W / 1087lm / 500mA		28466 9000 ◇	28458 9000 ◇	28566 9000 ◇	28558 9000 ◇

WALL-WASH

◇ B ● / GC ● / W ○

⏸

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			SMALL		SMALL IP		SMALL WALLWASH	
			TRIMLESS		TRIMLESS		TRIMLESS	
			●	■	●	■	●	■
LED POWER SUPPLY MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
MAINS DIM (FE)	11	21012 0298	⏀ min. 55	R	R	R	R	R	R	R	R	R	R
1-10V DIM	15	300 90 124	⏀ min. 55	R	R	R	R	R	R	R	R	R	R
DALI DIM	14	300 90 125	⏀ min. 55	R	R	R	R	R	R	R	R	R	R
TUNABLE WHITE DALI DT8	20	21012 0355	⏀ min. 86	R	R	R	R	R	R	R	R	R	R

★ **A. EXAMPLE CURRENT CONTROLLED POWER SUPPLY**

1.LED Power Supply MAINS DIM (FE)
21012 0298
Min.1 / Max.2 ENTERO SMALL WALLWASH can be connected (220-240V)
Max 1 ENTERO SMALL WALLWASH can be connected (110V)
(Power Supply fits through cut out of 55mm)

2.LED Power Supply 1-10V DIM
300 90 124
Min.1 / Max.2 ENTERO SMALL WALLWASH can be connected (220-240V)
Max 1 ENTERO SMALL WALLWASH can be connected (110V)
Dimming by 1-10V
(Power Supply fits through cut out of 55mm)

3.LED Power Supply DALI DIM
300 90 125
Min.1 / Max.2 ENTERO SMALL WALLWASH can be connected (220-240V)
Max 1 ENTERO SMALL WALLWASH can be connected (110V)
Dimming by DALI
(Power Supply fits through cut out of 55mm)

B. EXAMPLE POWER CONVERTOR (FULL INFO PAG TEC 24-25)

1.LED Power Convertor 48V-DC to 350mA/15W DIM5
300 48 350 ED5 + 48V-DC Power Supply *
Max.2 ENTERO SMALL WALLWASH can be connected
Dimming by DALI

* Minimum power 48V-DC Power Supply =
(number of luminaires x power of luminaire) + 15%


					A				C		D		E			F		G		H		I
	LED POWER SUPPLY		⏀ MIN	mA	0,5w	1w	1,4w	2w	2,6w	3w	4,1w	6w	6,4w	9,5w	3,9w	5,1w	5,7w	8,2w	10,7w	2W	3,2W	4,3W	3,2W	6,8W	7,1W	10,4W	15W	11,3W
3	**180mA-DC / 7,4W 21012 0080** 110-240V / 50-60Hz / IP20		min.40	180	1-15 (14)																					
4	**350mA-DC / 6W DIM5 21012 0308** 220-240V / 50-60Hz / IP44		min.38	350		5-7						1-1									2-2		1-1			
5	**500mA-DC / 10W DIM5 21012 0318** 220-240V / 50-60Hz / IP44		min.38	500			5-7						1-1													
6	**700mA-DC / 10W DIM5 21012 0328** 220-240V / 50-60Hz / IP44		min.38	700				5-7											5-7		2-2					
7	**MULTI-POWER 10W DIM5 21012 0208** 220-240V / 50-60Hz / IP20		min.50	350		7-10					2-2		1-1		2-2						3-3		1-1			
8	**MULTI-POWER 15W DIM5 21012 0268** 220-240V / 50-60Hz / IP20		min.50	350		10-14					3-3		2-2		3-3						4-5		2-2			1-1
9	**MULTI-POWER 20W DIM5 21012 0278** 220-240V / 50-60Hz / IP20		min.55	500			6-9					2-2		1-1		2-2								1-1		
				700				6-9									2-2		6-9		2-3				1-1	
10	**MULTI-POWER 36W DIM5 21012 0288** 220-240V / 50-60Hz / IP20		min.55	500		12-18						3-4		2-2		3-4								2-2		
				700			12-18										3-4		11-17		4-5				2-2	
11	**MULTI-POWER 20W DIM8 21012 0298** 220-240V / 50-60Hz / IP20		min.48	350		3-15					1-3		1-2		1-3						1-5		1-2			1-1
				450											1-3											
				500			3-14					1-3		1-2		1-3								1-1		
				700				3-9									1-2		3-9		1-3			1-1		
				900					3-7									1-1								
12	**1050mA-DC / 22W 300 90 145** 110-240V / 50-60Hz / IP20		min.46	1050						1-7 (4)									1-7 (3)							
13	**MULTI-POWER DIM5 300 90 60** 110-240V / 50-60Hz / IP20		min.72	350		2-16 (13)					1-4 (3)		1-2 (2)		1-4 (3)						1-5 (5)		1-2 (2)			1-1 (1)
				450											1-4 (2)											
				500			2-16 (13)				1-4 (2)		1-2 (1)		1-4 (2)								1-2 (1)			
				700					2-16 (7)							1-3 (1)		2-15 (7)			1-5 (2)		1-2 (2)			1-1 (2)
14	**MULTI-POWER MINI DIM5 300 90 135** 110-240V / 50-60Hz / IP20		min.55	350		4-17 (13)					1-4 (3)		1-2 (2)		1-4 (3)						2-5 (5)		1-2 (2)			1-1 (1)
				450											1-3 (2)											
				500			2-14 (13)				1-3 (2)		1-2 (1)		1-3 (2)								1-1 (1)			
				700					2-9 (7)							1-2 (1)		2-9 (7)			1-3 (2)		1-1 (2)			
15	**MULTI-POWER DIM7 300 90 125** 110-240V / 50-60Hz / IP20		min.55	350		6-17 (13)					2-4 (3)		1-2 (2)		2-4 (3)						2-5 (5)		1-2 (2)			1-1 (1)
				450											1-3 (2)											
				500			2-14 (13)				1-3 (2)		1-2 (1)		1-3 (2)								1-1 (1)			
				700					2-10 (7)							1-2 (1)		2-10 (7)			1-3 (2)		1-1 (2)			
				900					2-7 (5)									1-1 (1)								
16	**MULTI-POWER DIM9 300 90 65** 110-240V / 50-60Hz / IP20		min.84	350		1-25 (23)					1-6 (6)		1-4 (3)		1-6 (6)						1-8 (8)		1-3 (3)			1-2 (2)
				500		1-25 (23)					1-6 (5)		1-3 (3)		1-6 (5)								1-3 (3)			
				700			1-25 (19)											1-6 (4)			1-8 (6)		1-3 (2)			
				900				1-22 (15)										1-5 (3)								
				1050					1-20 (13)										1-19 (12)							
17	**MULTI-POWER HC DIM9 300 90 136** 110-240V / 50-60Hz / IP20		min.90	1050					1-15 (13)										1-14 (12)							
				1200																						
				1400															1-13 (9)							
18	**MULTI-POWER HV DIM9 300 90 66** 110-240V / 50-60Hz / IP20	30%	min.90	350		8-39 (38)					2-9 (9)		2-6 (6)		2-9 (10)						3-13 (12)		2-5 (5)			1-3 (3)
				450											2-9 (4)											
				500			1-39 (28)				1-9 (8)		1-5 (4)		1-9 (8)								1-5 (3)			
				700				1-29 (19)									1-7 (4)		1-29 (19)		1-9 (8)		1-4 (2)			
19	**MULTI-POWER COMPACT WO 21012 0058** 220-240V / 50-60Hz / IP20	40%	min.54	350		4-18					1-4		1-2		1-4						2-6		1-2			1-1
				450											1-4											
				500			4-18				1-4		1-2		1-4								1-2			
				700				4-17									1-4		4-17		2-6		1-2			
				900					4-14									1-3								
				1050						4-12									4-12							
20	**500mA-DC 2CH TW DIM5 DT8 21012 0355** 220-240V / 50-60Hz / IP20		min.85	500																						

DIM1: dimming by 1-10V
DIM5: dimming by Dali
DIM7: dimming by push button / falling edge dimmer
DIM7: dimming by push button / 1-10V
DIM8: dimming by falling edge dimmer
DIM9: dimming by push button / 1-10V / Dali

Example:
4-14(11) min.4 - max.14 LED for 240V / min.4 - max.11 LED for 110V

		I		J			Q			R			U		W	X			Y	DOT.COM							
	LED POWER SUPPLY	16,4W	30,8W	35,5W	16,3W	23,2W	36W	5,8W	7,7W	8,6W	12,5W	11,8W	15,3W	17,2W	25W	5,8W	8,6W	12,4W	6W	11,8W	16,1W	10,2W	9W	17,8W	S3	S6	M4	L2	L4	W02	W06	W08	W12
3	**180mA-DC / 7,4W 21012 0080** 110-240V / 50-60Hz / IP20																								3W	6W	5,6W	6,2W	12,4W	10W	12,6W	19,4W	25,2W
4	**350mA-DC / 6W DIM5 21012 0308** 220-240V / 50-60Hz / IP44				1-1											1-1			1-1					2-2	1							
5	**500mA-DC / 10W DIM5 21012 0318** 220-240V / 50-60Hz / IP44					1-1											1-1									1-1							
6	**700mA-DC / 10W DIM5 21012 0328** 220-240V / 50-60Hz / IP44						1-1											1-1															
7	**MULTI-POWER 10W DIM5 21012 0208** 220-240V / 50-60Hz / IP20															1-1									2-3	1			1-1				
8	**MULTI-POWER 15W DIM5 21012 0268** 220-240V / 50-60Hz / IP20				2-2					1-1						2-2			2-2	1-1					4-4	2-2			1-1	1-1			
9	**MULTI-POWER 20W DIM5 21012 0278** 220-240V / 50-60Hz / IP20					1-1											1-1					1-1					2-2						
							1-1											1-1															
10	**MULTI-POWER 36W DIM5 21012 0288** 220-240V / 50-60Hz / IP20	1-1					2-3					1-1				2-3						2-2				3-4				1-1		
					1-1					2-2			1-1				2-2															1-1	
11	**MULTI-POWER 20W DIM8 21012 0298** 220-240V / 50-60Hz / IP20					1-2				1-1						1-2				1-1					1-5	1-2			1-1	1-1			
											1-1						★				1-1												
		1-1		1-1			1-2									1-2						1-1					1-3				1-1		
								1-1																									
12	**1050mA-DC / 22W 300 90 145** 110-240V / 50-60Hz / IP20																										1-3 (1)	1-1 (0)					
13	**MULTI-POWER DIM5 300 90 60** 110-240V / 50-60Hz / IP20					1-2 (2)				1-1 (1)						1-2 (2)			1-2 (2)	1-1 (1)					1-5 (4)	1-2 (2)			1-1 (1)	1-1 (1)			
											1-1 (0)										1-1 (0)												
					1-2 (1)				1-1 (0)													1-1 (0)											
		1-1 (0)		1-1 (0)			1-2 (1)																			1-4 (2)				1-1 (0)			
						1-1 (0)																											
				1-1 (0)																													
14	**MULTI-POWER MINI DIM5 300 90 135** 110-240V / 50-60Hz / IP20				1-2 (2)					1-1 (1)						1-2 (2)			1-2 (2)	1-1 (1)					2-5 (4)	1-2 (2)			1-1 (1)	1-1 (1)			
									1-1 (0)								★				1-1 (0)												
		1-1 (0)		1-1 (0)			1-2 (1)									1-2 (1)						1-1 (0)				1-3 (2)				1-1 (0)		
						1-1 (1)																											
15	**MULTI-POWER DIM7 300 90 125** 110-240V / 50-60Hz / IP20				1-2 (2)					1-1 (1)						1-3 (2)			1-2 (2)	1-1 (1)					2-5 (4)	1-2 (2)			1-1 (1)	1-1 (1)			
									1-2 (1)								★				1-1 (0)												
		1-1 (0)		1-1 (0)			1-2 (1)									1-2 (1)						1-1 (1)				1-3 (2)				1-1 (0)		
						1-1 (1)																											
16	**MULTI-POWER DIM9 300 90 65** 110-240V / 50-60Hz / IP20				1-4 (4)					1-2 (2)						1-4 (4)			1-4 (4)	1-2 (2)					1-8 (8)	1-4 (4)			1-2 (2)	1-2 (1)			
		1-2 (2)		1-2 (2)			1-4 (4)				1-2 (2)					1-4 (4)						1-3 (3)				1-6 (6)				1-2 (1)		
						1-4 (3)											1-4 (3)																
				1-2 (1)									1-2 (1)																			1-2 (1)	
		1-1 (1)																															
			1-1 (1)		1-1 (1)																					1-9 (6)	1-4 (3)						
			1-1 (1)		1-1 (1)																					1-7 (5)	1-3 (3)						
17	**MULTI-POWER HC DIM9 300 90 136** 110-240V / 50-60Hz / IP20																																
18	**MULTI-POWER HV DIM9 300 90 66** 110-240V / 50-60Hz / IP20																																
					2-6 (6)					1-3 (3)						2-6 (6)			2-6 (6)	1-3 (3)					3-13 (13)	2-6 (6)			1-3 (3)	1-3 (3)			
											1-3 (1)										1-3 (1)												
				2-6 (2)																													
		1-3 (2)		1-3 (2)			1-6 (4)				1-3 (2)					1-6 (4)						1-5 (3)				1-9 (6)				1-3 (2)		
						1-4 (3)																											
				1-2 (1)									1-2 (1)																			1-2 (1)	
																										1-7 (5)	1-3 (3)						
19	**MULTI-POWER COMPACT WO 21012 0058** 220-240V / 50-60Hz / IP20				1-3					1-1						1-3			1-3	1-1					2-6	1-3			1-1	1-1			
							1-3				1-1										1-1												
		1-1		1-1			1-3				1-1		1-3									1-2				1-4				1-1			
					1-1					1-2						1-2																	
		1-1		1-1																													
			1-1		1-1																					2-6	1-3			1-1	1-1			
20	**500mA-DC 2CH TW DIM5 DT8 21012 0355** 220-240V / 50-60Hz / IP20																						1-1	1-1									

SUSPENSION / CONNECTION ST



SUSPENSION ST
27 x 60 max. 25
15225 0340 ◇
◇ B / W
INCL. 1 x AUTOMATIC ADJUSTMENT

SUSPENSION + CONNECTION ST
27 x 60 max. 25
15225 0350 ◇
◇ B / W
ONLY ✳ CONNECTION
INCL. 1 x CONNECTOR max. 2x 1,5 mm² 1 x AUTOMATIC ADJUSTMENT

CONNECTION ST
43 x 80 max. 25
15225 0360 ◇
◇ B / W
16A / 250V
INCL. 1 x CONNECTOR max. 5x 1,5 mm²

SUSPENSION / CONNECTION TRIMLESS

play.deltalight.com/suspension/trimlessconcrete
play.deltalight.com/suspension/trimlessplasterboard



SUSPENSION TRIMLESS O.F.A.
62 x 80 9 or 12
102 x 80 (CONCRETE)
328 10 01
INCL. 1 x AUTOMATIC ADJUSTMENT

SUSPENSION + CONNECTION TRIMLESS O.F.A.
62 x 80 9 or 12
102 x 80 (CONCRETE)
328 10 02
4A / 250V
INCL. 1 x CONNECTOR max. 3x 2,5 mm² 1 x AUTOMATIC ADJUSTMENT

CONNECTION TRIMLESS O.F.A.
62 x 80 9 or 12
102 x 80 (CONCRETE)
328 10 03
4A / 250V
INCL. 1 x CONNECTOR max. 3x 2,5 mm²

CABLE BASE



CABLE BASE R
203 99 55 ◇
◇ ANO / B / W

CABLE BASE



CABLE BASE S
203 99 56 ◇
◇ ANO / B / W

COVERSET



COVERSET R 100
204 00 100 ◇
◇ B / W

HOW TO MOUNT KITS

CSC



O.F.A



STRETCHED CEILING*



* STRETCHED CEILING kits available:
for both COLD STRETCHED CEILING and WARM STRETCHED CEILING


CONCRETE



PLASTERBOARD



FULL I NFO ON RECESSED KITS ON **PAG 565**



24V-DC

DIM	CLASS / IP	Power / 24V-DC	Art number	Voltage	LAMBDA	A x B x C	TYPE
NON DIMMABLE	IP20	24W	**21012 0160**	220-240V / 50-60Hz	λ > 0,95	137 x 50 x 16	1
	IP67	150W	**300 89 24 150**	100-240V / 0|50-60Hz		180 x 63 x 36	2
MAINS DIM (FE)	IP20	75W	**21032 0358**	220-240V / 50-60Hz		110 x 75 x 30	1
		150W	**21032 0368**			170 x 75 x 30	1
0-10V (DIM1)	IP20	60W	**21012 0171**	220-240V / 50-60Hz		170 x 57 x 18	1 (PWM)
		90W	**21012 0181**			190 x 65 x 22	1 (PWM)
		120W	**21012 0191**			190 x 65 x 22	1 (PWM)
	IP67	60W	**21012 0101**	110-240V / 0|50-60Hz		150 x 53 x 35	2 (PWM)
		90W	**21012 0111**			171 x 63 x 38	2 (PWM)
		120W	**21012 0121**			171 x 63 x 38	2 (PWM)
DALI DIM (DIM5)	IP20	60W	**21012 0205**	220-240V / 50-60Hz		170 x 57 x 18	1
		100W	**21012 0225**			190 x 65 x 22	1
	IP67	60W	**21012 0135**	110-240V / 0|50-60Hz		150 x 53 x 35	2 (PWM)
		90W	**21012 0145**			171 x 63 x 38	2 (PWM)
		120W	**21012 0155**			171 x 63 x 38	2 (PWM)

48V-DC

DIM	CLASS / IP	Power / 48V-DC	Art number	Voltage	LAMBDA	A x B x C	TYPE
NON DIMMABLE	IP20	100W (120V: 80W)	**21012 0230**	120-240V / 50-60Hz	λ > 0,95	298 x 30 x 17	3
		100W	**300 89 48 100**	110-240V / 50-60Hz	λ > 0,90	100 x 55 x 90	4
		200W (120V: 150W)	**21012 0240**	120-240V / 50-60Hz	λ > 0,95	332 x 30 x 22	3
		240W	**300 89 48 240**	100-240V / 50-60Hz	λ > 0,90	114 x 63 x 125	4
1-10V (DIM1)	IP67	90W	**21032 0331**	110-240V / 50-60Hz	λ > 0,90	171 x 63 x 38	2
DALI DIM (DIM5)	IP67	90W	**21032 0345**	110-240V / 50-60Hz	λ > 0,90	171 x 63 x 38	2

HOW TO READ THIS CATALOGUE

SIMPLE AS ABC

GO ONLINE
FOR MORE INSPIRATION

C

Derived from the lampshade as an archetype, the 4 shades evolve from a dome shape into a flat disk.

CUPPA

READ MY COLOUR


CHOOSE YOUR SHADE(S)

PRODUCT
WITH ALL ITS PRODUCT DETAILS

A

B

FINISH YOUR SPECIFICATION WITH
REQUIREMENTS / OPTIONS / ACCESSORIES

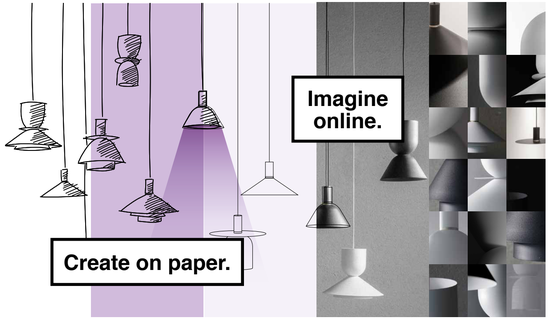

DELTALIGHT®



PB / PIANO BLACK



BP / BLACK PURE



BRAT / BRUSHED ANTHRACITE



MMAT / GOLD MATT



BRB / BRUSHED BRONZE



BRA / BRUSHED ALU



B / BLACK RAL 9005



PA / POLISHED ALU



BRG / BRUSHED GOLD



FBR / FLEMISH BRONZE



ANO / ANODIZED



BROB / BRUSHED OLD BRONZE



FG / FLEMISH GOLD



GC / GOLD COLOURED



BRCU / BRUSHED COPPER



BBR / BLACK BRONZE

W / WHITE RAL 9003



AM / ALU MARBLED




G / GREY BROWN



BL / BARRIER BLUE



GM / GOLD MARBLED



PGR / PINE GREEN



A / ALU GREY




N / DARK GREY

RW / RAW WHITE

Browse through our Digital Material Library to get the look & feel of our finishes and textures.

DIGITAL MATERIAL LIBRARY



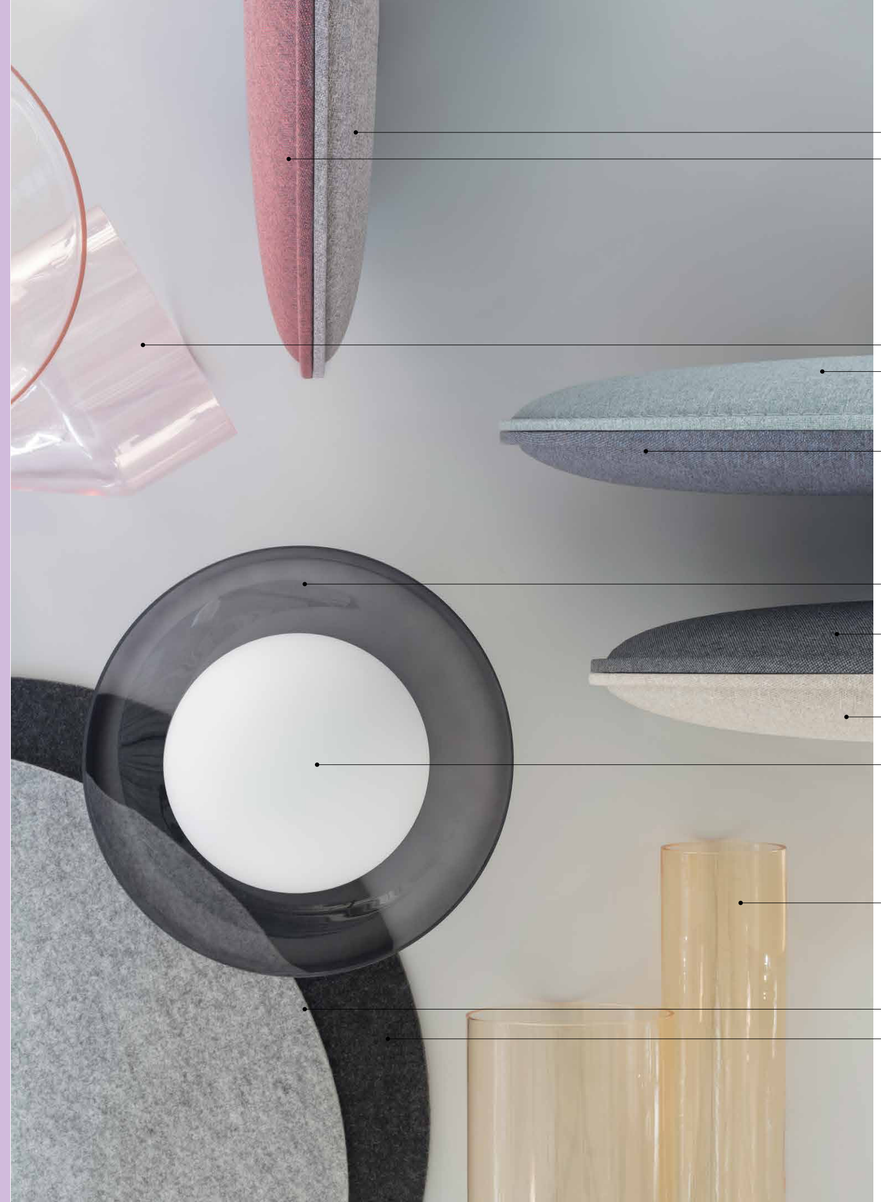


DIGITAL MATERIAL LIBRARY

Browse through our Digital Material Library to get the look & feel of our finishes and textures.



SAND / SOLI-SHHH


SCARLET / SOLI-SHHH



PINK GLASS


ARCTIC / SOLI-SHHH


AMBER GLASS



LILAC / SOLI-SHHH



SMOKE GLASS


DARK GREY / SOLI-SHHH


OPAL / MIST GLASS


LIGHT GREY / SOLI-SHHH


LIGHT GREY / PET FELT


DARK GREY / PET FELT