

Calipso
by
Neil Poulton

Artemide®

Calipso

Neil Poulton

↪ 2017

Calipso comes to life thanks to the calculation of an algorithm that starts from a photo of the moon.

The result is a fractal shape, an impure geometry that displays the irregular beauty of nature. Lots of small circles with varying diameters are arranged side by side with precision to produce an organic set.

This grid gives Calipso its aesthetic and optical character: it is a highly emotional lighting object and define a comfort emission.

Calipso is a product perfectly half-way between home and professional use, suited for a variety of application fields according to the traditional approach of Artemide to deliver high performance lighting, yet with a unique and emotional expressiveness.



Artemide
App




↗ Calipso Ceiling/Wall & Suspension



↗ Transversal Light

The round version of Calipso has UGR<19. While its performance is ideal for office use, it moves away from the traditional look of technical appliances designed for work environments. Calipso is a product perfectly half-way between home and professional use, suited for a variety of application fields according to the traditional approach of Artemide to high performance lighting, yet with a unique and emotional expressiveness.



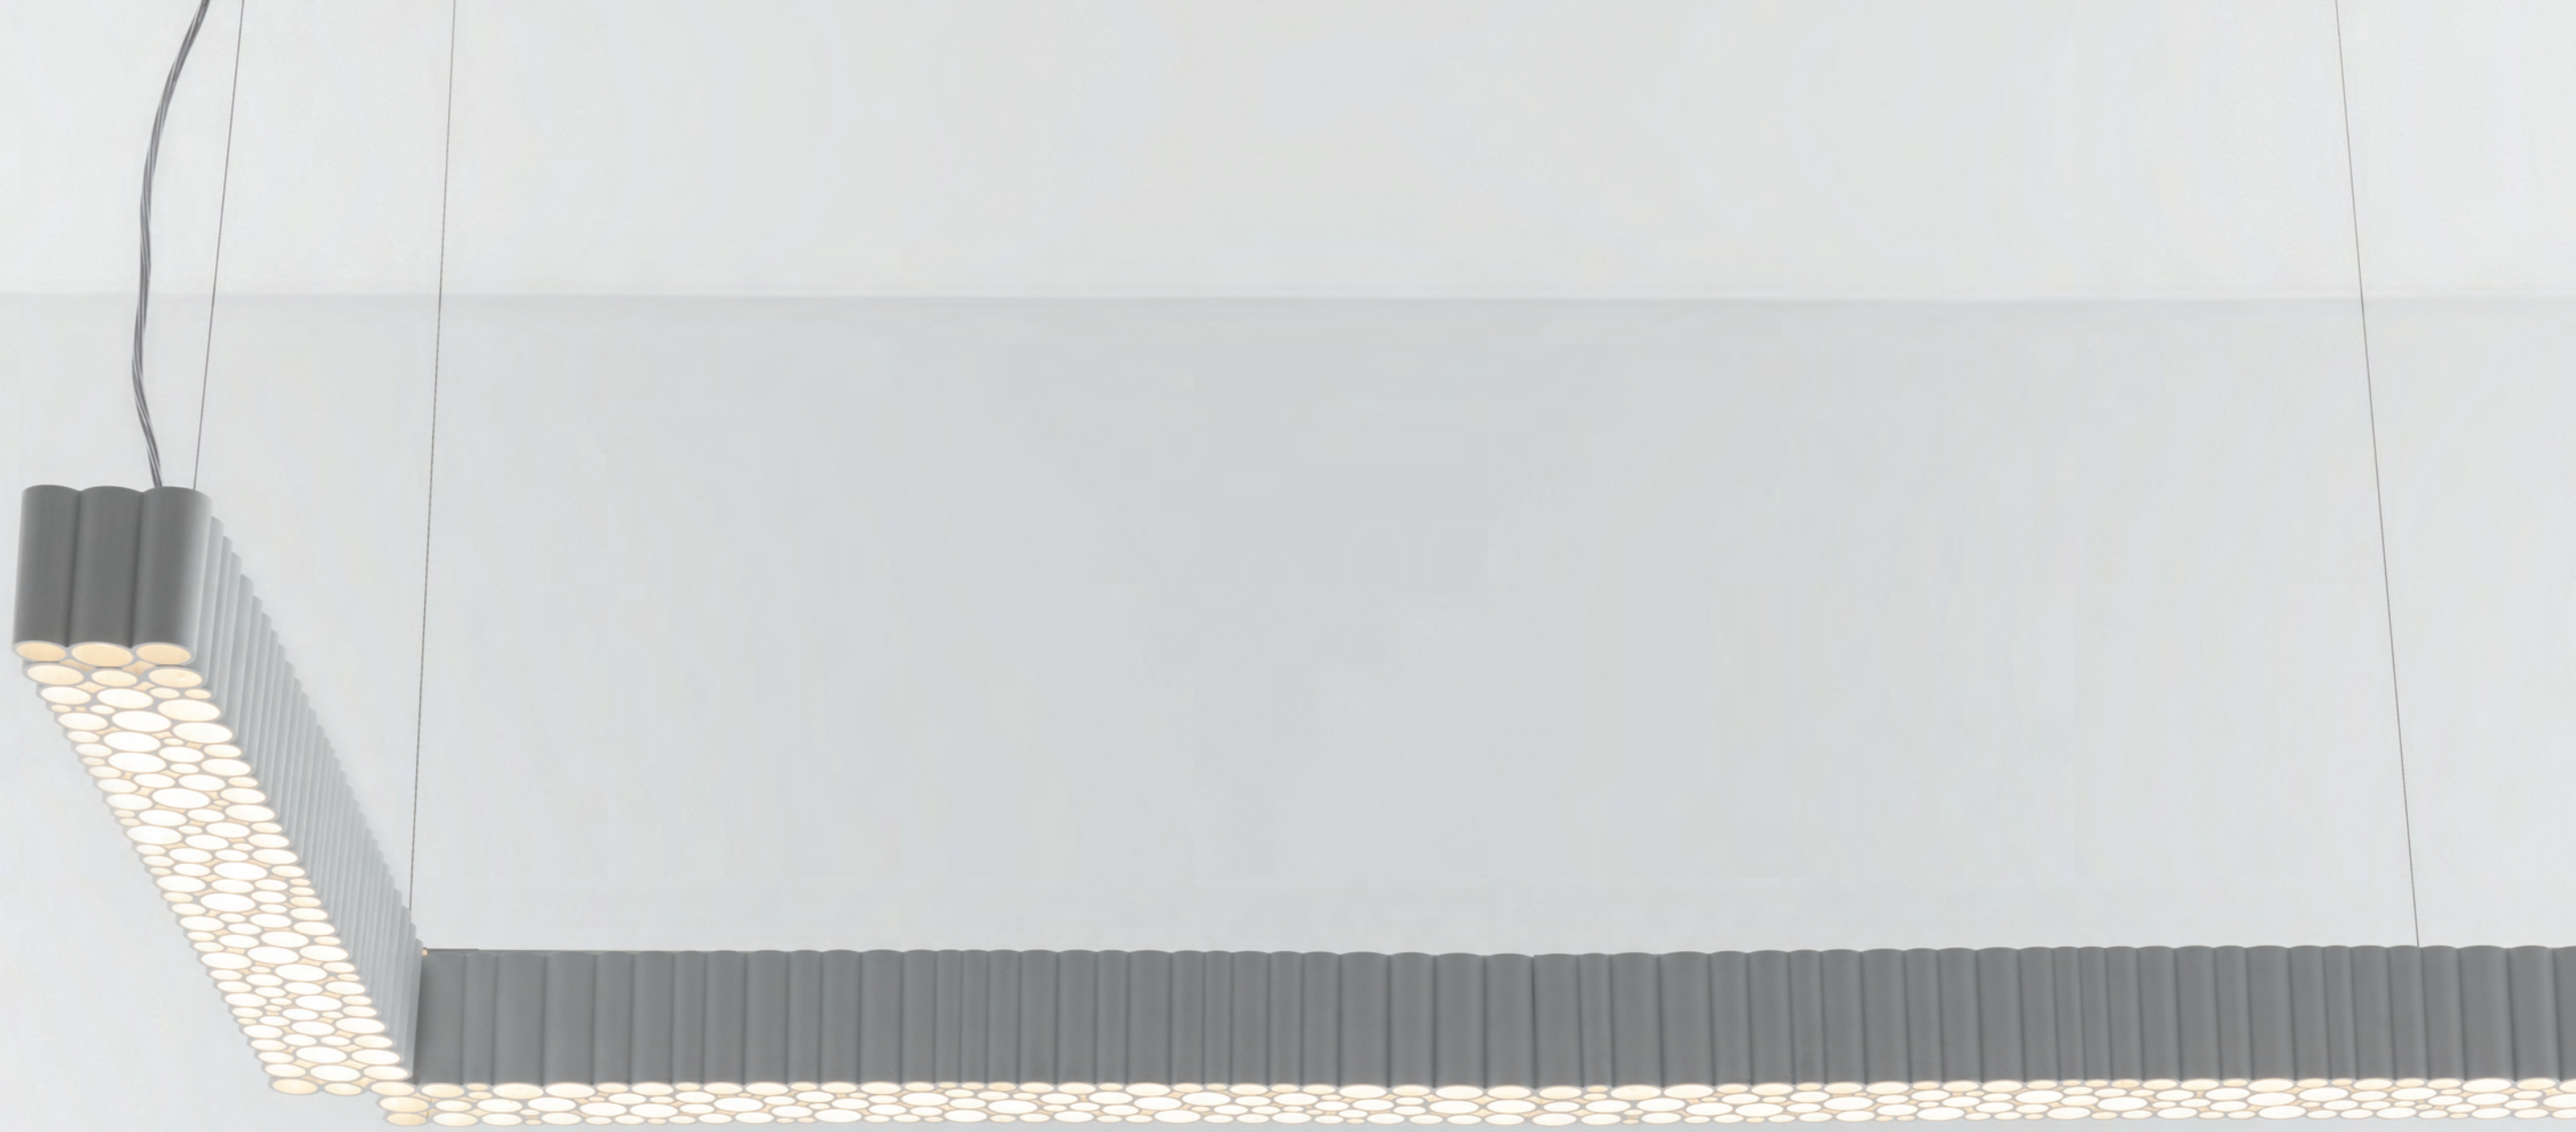


↗ Calipso Linear System

The straight module of Calipso linear can be combined in long line or design geometries with 90° angles by means of a joint that integrates continuously into the fractal luminous pattern of the holes.

Calipso bears evidence of the optical skills of Artemide, as well as of a manufacturing intelligence that translates design complexity into utmost flexibility and simple composition.




↗ Calipso Stand Alone

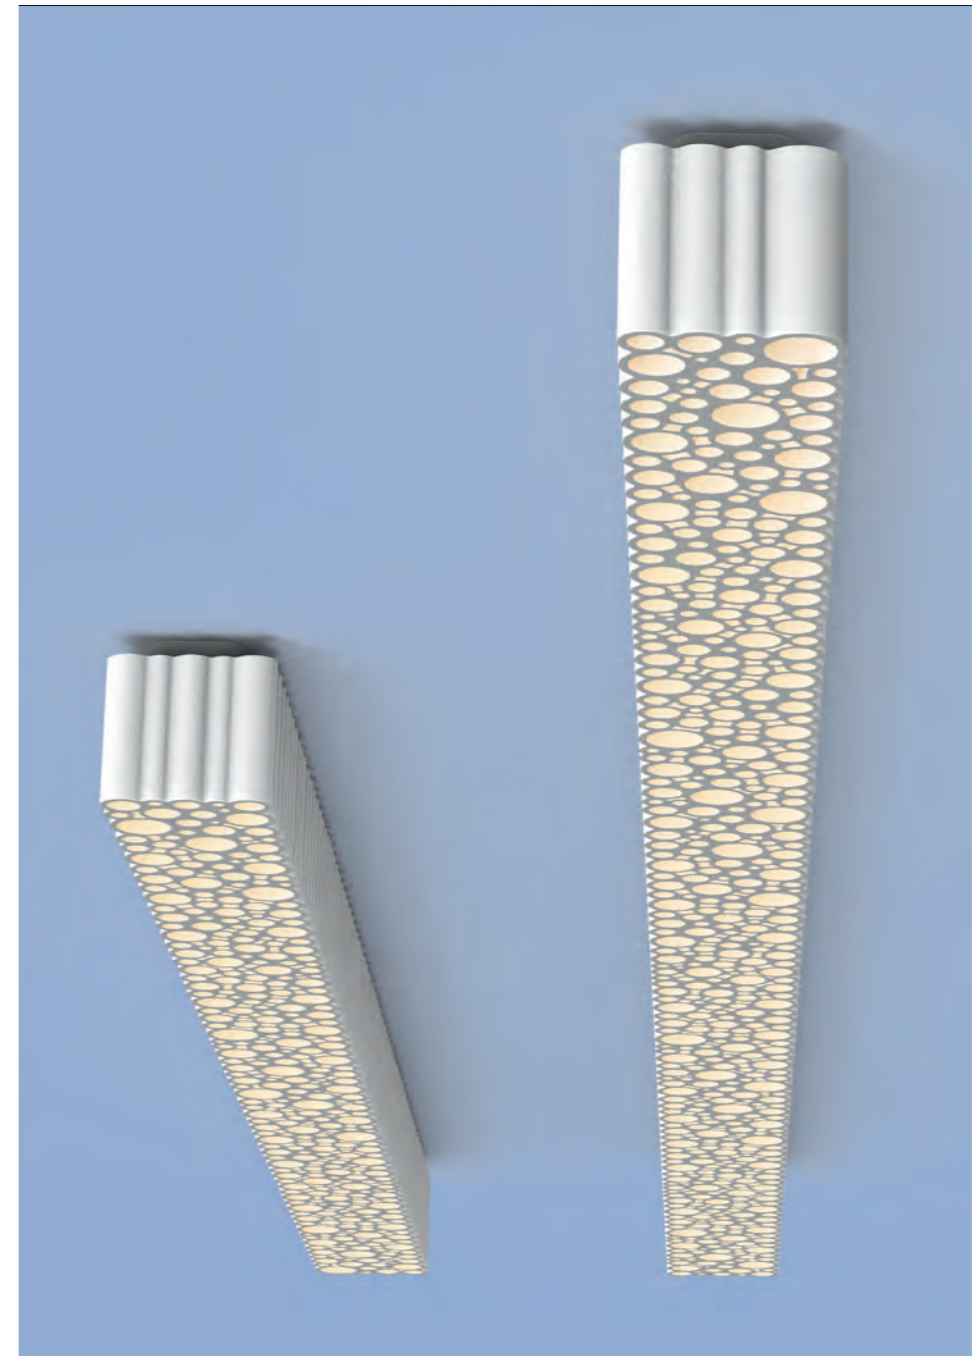



Calipso typologies


STAND ALONE - CEILING



LINEAR L=1200 MM



XF
(>45°)
43 W
2985 lm



LINEAR L=1800 MM



XF
(>45°)
63 W
4477 lm

STAND ALONE - SUSPENSION



LINEAR L=1200 MM



XF
(>45°)
43 W
2985 lm




LINEAR L=1800 MM



XF
(>45°)
63 W
4477 lm

WALL - CEILING



XF
(>45°)
55 W
2884 lm

SUSPENSION



XF
(>45°)
55 W
2884 lm

The fractal shape of the small circles works as an optical grid and defines a comfort emission.

Round version is available in one diameter (526mm), suspension and ceiling / wall.

Linear version are available in two lengths (1200 and 1800 mm), suspension and ceiling.

System version available in three lengths (600, 1200 and 1800 mm) suspension and ceiling. Can be composed in line or with 90° right or left angles.

Materials: matt white technopolymer body and aluminum structure.

SYSTEM - SUSPENSION - CEILING



LINEAR SYSTEM L=600 MM



XF
(>45°)
22 W
1492 lm



LINEAR SYSTEM L=1200 MM



XF
(>45°)
43 W
2985 lm



LINEAR SYSTEM L=1800 MM



XF
(>45°)
63 W
4477 lm

↳ CALIPSO STAND ALONE

White



XF



*The APP driver can not be controlled by DALI dimming system and viceversa.

MacAdam 3SDCM
Life L90 (6K) 50000h
CRI =90


IP20

CALIPSO WALL - CEILING

W	Beam	Flux	CCT
55 W	XF	2884 lm	2700K
			3000K

PUSH
Code
0210W10A
0210010A

PUSH & APP*
Code
0210W10APP
0210010APP




CALIPSO SUSPENSION

W	Beam	Flux	CCT
55 W	XF	2884 lm	2700K
			3000K

PUSH
Code
0213W10A
0213010A

PUSH & APP*
Code
0213W10APP
0213010APP




CALIPSO LINEAR STAND ALONE CEILING

Lenght	W	Beam	Flux	CCT
1210 mm	43 W	XF	2985 lm	3000K
1790 mm	63 W	XF	4477 lm	3000K

PUSH/DALI*
Code
0220010A
0221010A

PUSH/APP*
Code
0220010APP
0221010APP

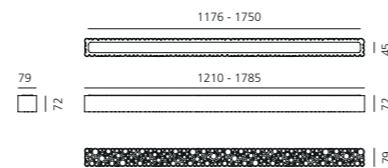


CALIPSO LINEAR STAND ALONE SUSPENSION

Lenght	W	Beam	Flux	CCT
1210 mm	43 W	XF	2985 lm	3000K
1790 mm	63 W	XF	4477 lm	3000K


PUSH/DALI*
Code
0223010A
0224010A

PUSH/APP*
Code
0223010APP
0224010APP

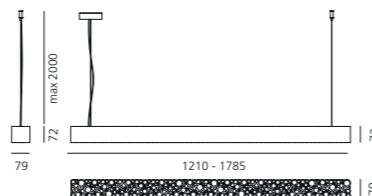


Calipso

↳ linear system

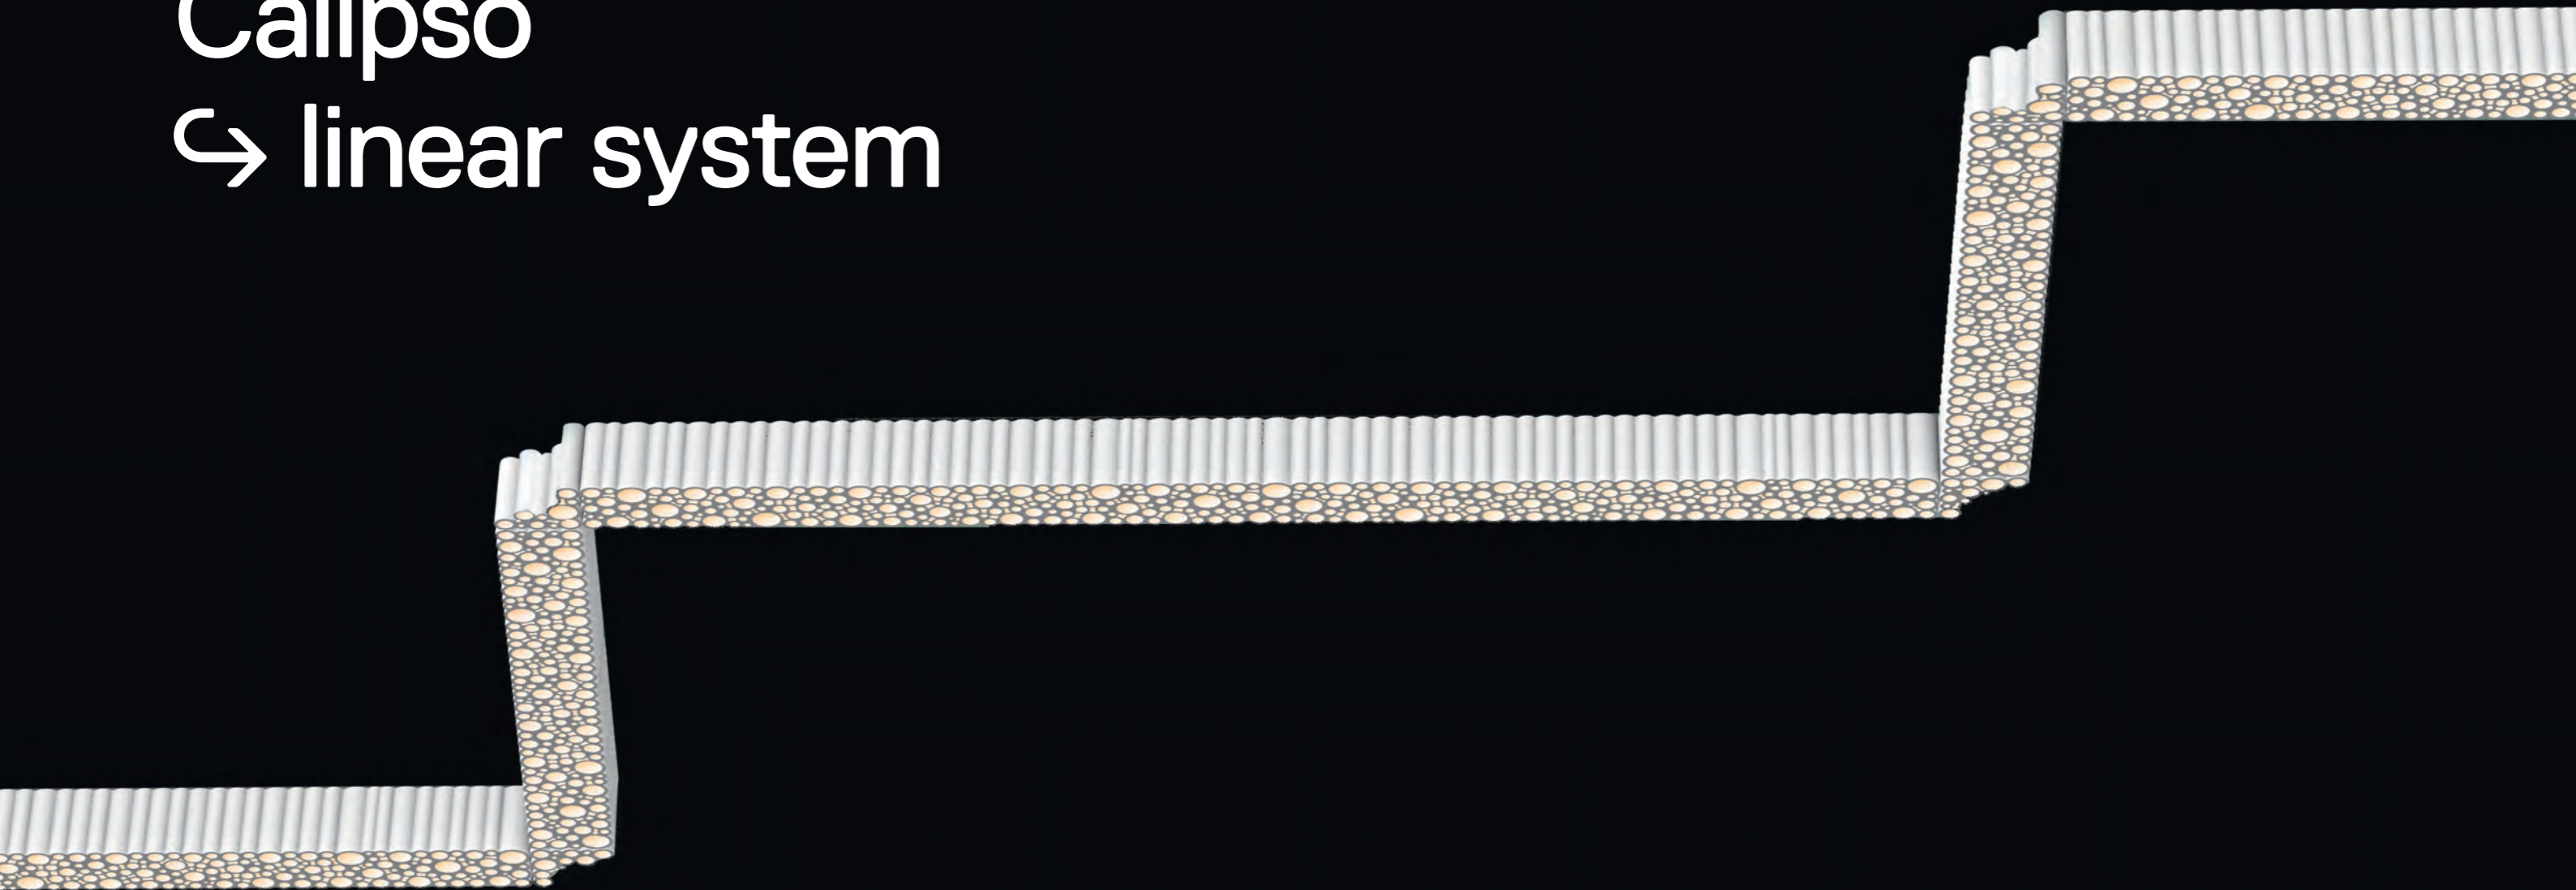

↳ CALIPSO LINEAR SYSTEM / CONFIGURATIONS

In APP configurations must be only one App master module others must be DALI

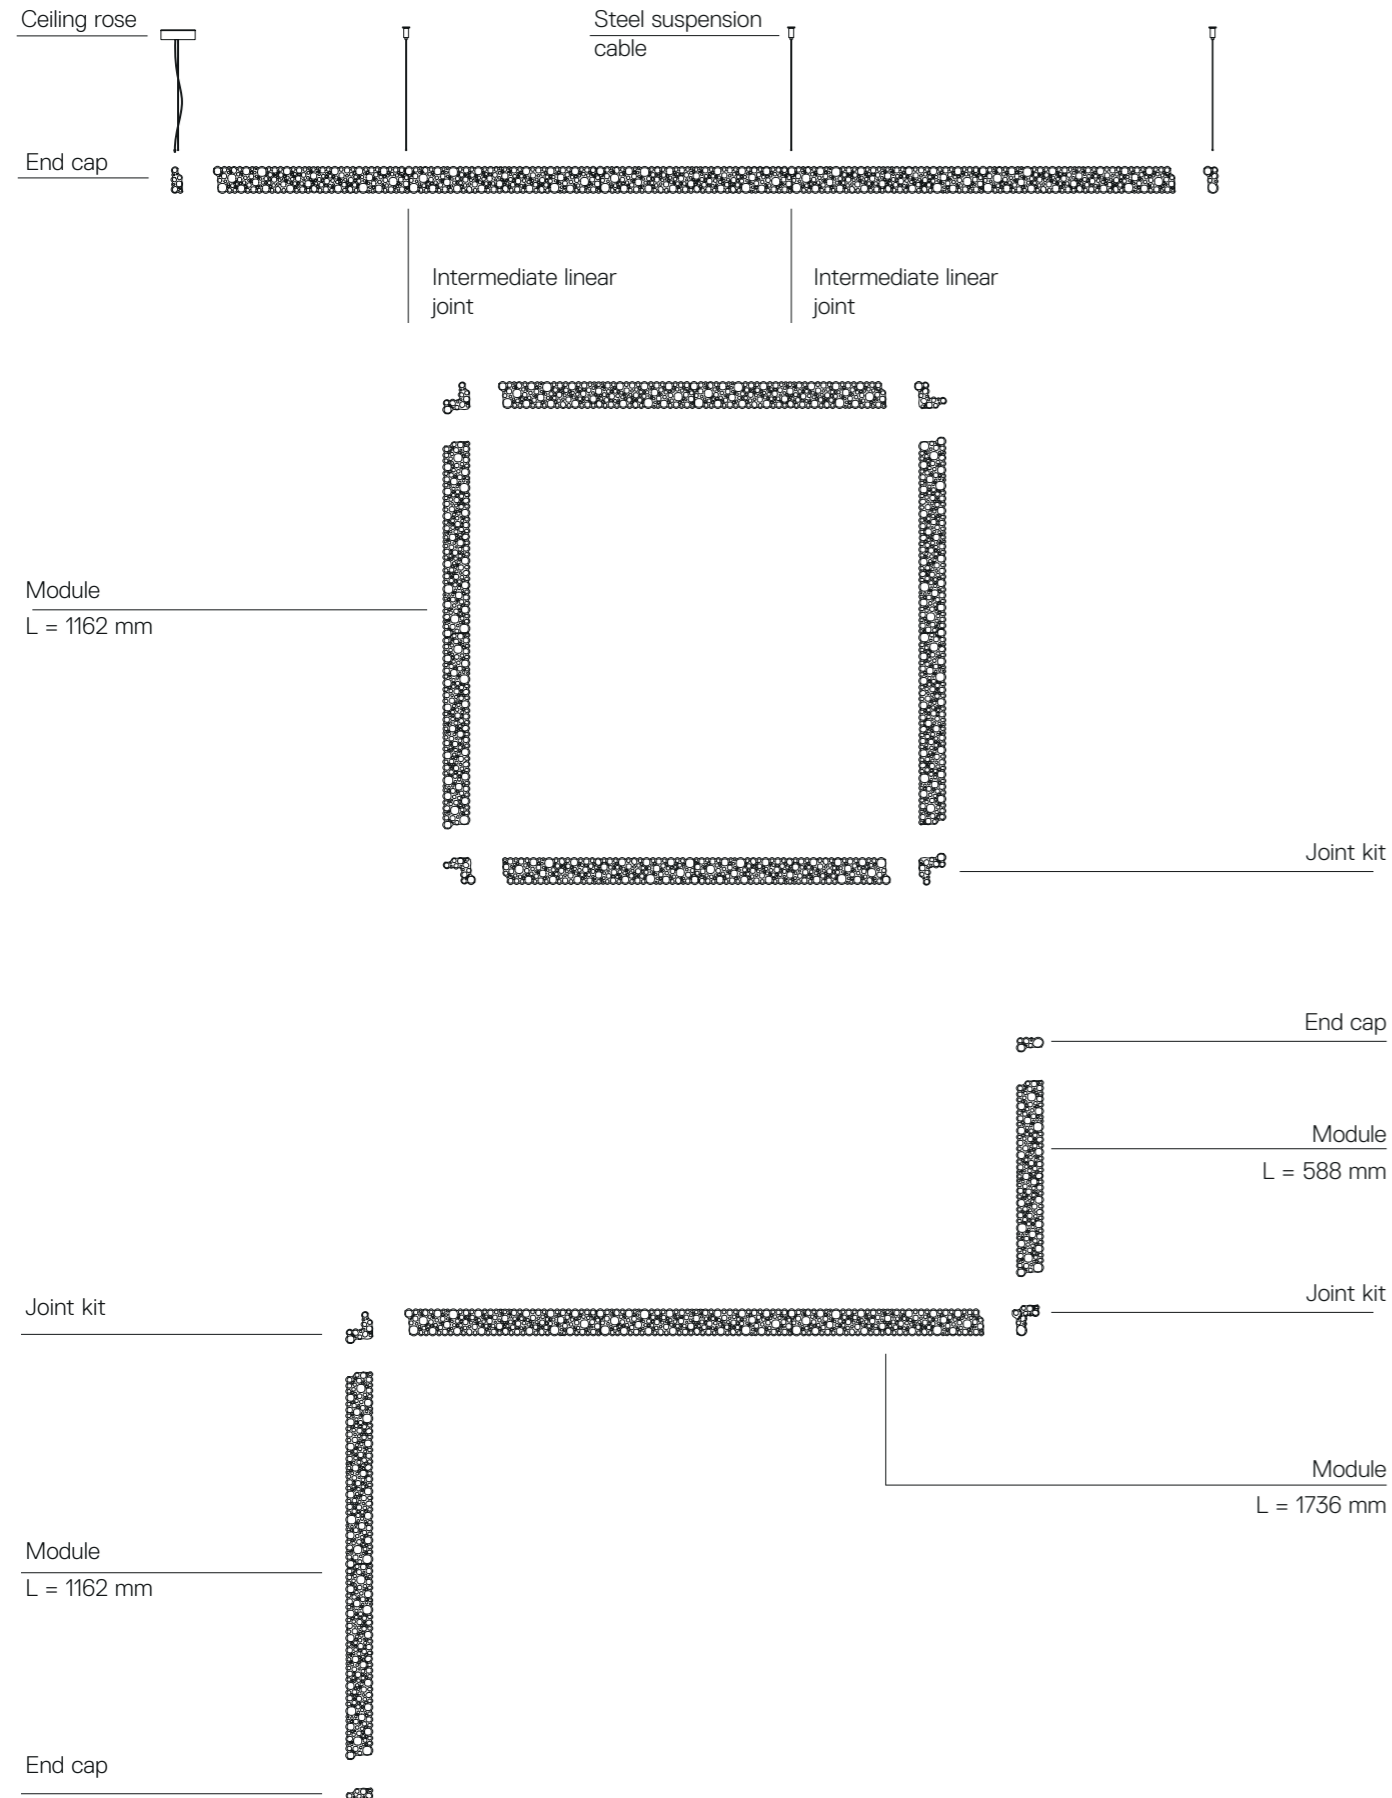

↳ CALIPSO LINEAR SYSTEM

White 	XF 	* APP driver can not be controlled by a DALI dimming/Push system and viceversa. In any APP configurations there must be only one App module (master) while the others must be DALI.	MacAdam 3SDCM Life L90 (6K) 50000h CRI =90	IP20
-----------	--------	---	--	----------

SUSPENSION**

Modules					PUSH/DALI	APP*
Lenght	W	Beam	Flux	CCT	Code	Code
588 mm	22 W	XF	1492 lm	3000K	2013010A	
1210 mm	43 W	XF	2985 lm	3000K	2014010A	2014010APP
1785 mm	63 W	XF	4477 lm	3000K	2015010A	2015010APP

** It includes accessories for electrical connection between modules.

Accessories - suspension		Code
	End caps kit (2 pcs)	2022010A
	Joint 90° kit (dx/sx) It allows to mechanically connect two modules at 90°.	2023010A
	Intermediate linear joint It allows to mechanically connect two modules in-line.	2021010A
	Power supply kit - terminal and angular 1 steel suspension cable + 1 alimentation cable It allows feeding at the series of modules end or at a Joint 90°.	2020010A
	Connection cable It allows to use "Power supply kit - terminal and angular" as an intermediate power supply between two in-line modules.	2024010A
	Steel suspension cable (1 pc) Length 1,5 meters One steel suspension cable must be used in correspondence with each linear or angular joint. For L=1785 modules it is recommended to use an intermediate cable.	2266010A

CEILING**

Modules					PUSH/DALI	APP*
Lenght	W	Beam	Flux	CCT	Code	Code
588 mm	22 W	XF	1492 lm	3000K	2010010A	
1210 mm	43 W	XF	2985 lm	3000K	2011010A	2011010APP
1785 mm	63 W	XF	4477 lm	3000K	2012010A	2012010APP

** It includes accessories for electrical connection between modules.

Accessories - ceiling		Code
	End cap kit (2 pcs)	2026010A
	Joint 90° kit (dx/sx) It allows to mechanically connect two modules at 90°.	2027010A
	Intermediate linear joint It allows to mechanically connect two modules in-line.	2025010A

Calipso is compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.



Download Artemide App
and find more information on
artemide.com

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20010 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(for Italy only)
info@artemide.com
artemide.com

Communication and Marketing Department

Via Canova, 34
20145 Milan (MI), Italy
Tel. +39 02.349611
marketing@artemide.com
artemide.com

Artemide S.p.A.
si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.
reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.
se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.
behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.
se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.

For information regarding distributors and points of sale, please visit our website artemide.com or email: info@artemide.com



ISO 9001:2015



ISO 14001:2015



ISO 45001:2018



CTF STAGE2
ISO 17025