



TABLE OF CONTENTS

RESOURCES

Eglo Story.....	3	Ceiling Height.....	8
Eglo Fan Story.....	5	Builder Ceiling Fan.....	9
Smart Compatibility.....	6	Decorative Ceiling Fans.....	10
LED Lighting.....	7	Specifications.....	138
Room Size.....	8		

CEILING FANS

Westerly 84".....	15	Surflin 60".....	87
72".....	19	52".....	91
60".....	23	Surflin LED 60".....	95
52".....	27	52".....	99
Williwaw 84".....	34	Naples LED 52".....	104
72".....	36	Swiftsure 52".....	108
60".....	38	Swiftsure LED 52".....	110
52".....	40	Pierport LED 60".....	114
Mission Bay 72".....	44	52".....	116
60".....	46	44".....	118
52".....	48	Pierport 60".....	120
Mission Bay LED 72".....	50	52".....	122
60".....	52	44".....	124
52".....	54	Pierport E26 60".....	126
Arlington 56".....	59	52".....	128
Arlington LED 56".....	63	44".....	130
Tirol 60".....	69		
52".....	73		
Tirol LED 60".....	77		
52".....	81		

ACCESSORIES

Westerly Light Kit.....	30	AC Remote Controls.....	135
Westerly Fan Cap.....	31	Downrods.....	136
Smart Control Kits.....	133	Downrod Couplers (Joiners).....	136
AC Wall Controls.....	134	Sloped Ceiling Canopy.....	137



FROM THE HEART OF TYROL TO THE WORLD.

EGLO's success story began around 50 years ago when Ludwig Obwieser opened a small electrical retailer, which has since become a global corporation in the interior and exterior lighting industry. EGLO's history was established in 1969 when the founder returned from a trip

to Milan. Soon after, the first Italian lights landed in the shop windows of specialist retailers. After the first orders in Salzburg, Austria, EGLO expanded, and production started in Pill, Tyrol; where the company headquarters remains.




The company's development continues to accelerate at high speeds: from the number of employees and sales development to the production facilities and subsidiaries around the world. For EGLO to continue future growth,

business development is driven forward with sustainable thinking. With the concept of EGLO World of Lights, a flagship showroom near the Headquarters, EGLO is showing it's love for lighting and paving the way for an even brighter future.

EGLO is a family business and can therefore act independently. From the start, control over development, production and logistics has been a success factor for business growth. For that reason, EGLO continues to observe market developments closely, manufactures

efficiently and offers care and support to all customers.

Every day we learn and invest in our customers, our partners, our employees, our products and our service – worldwide.

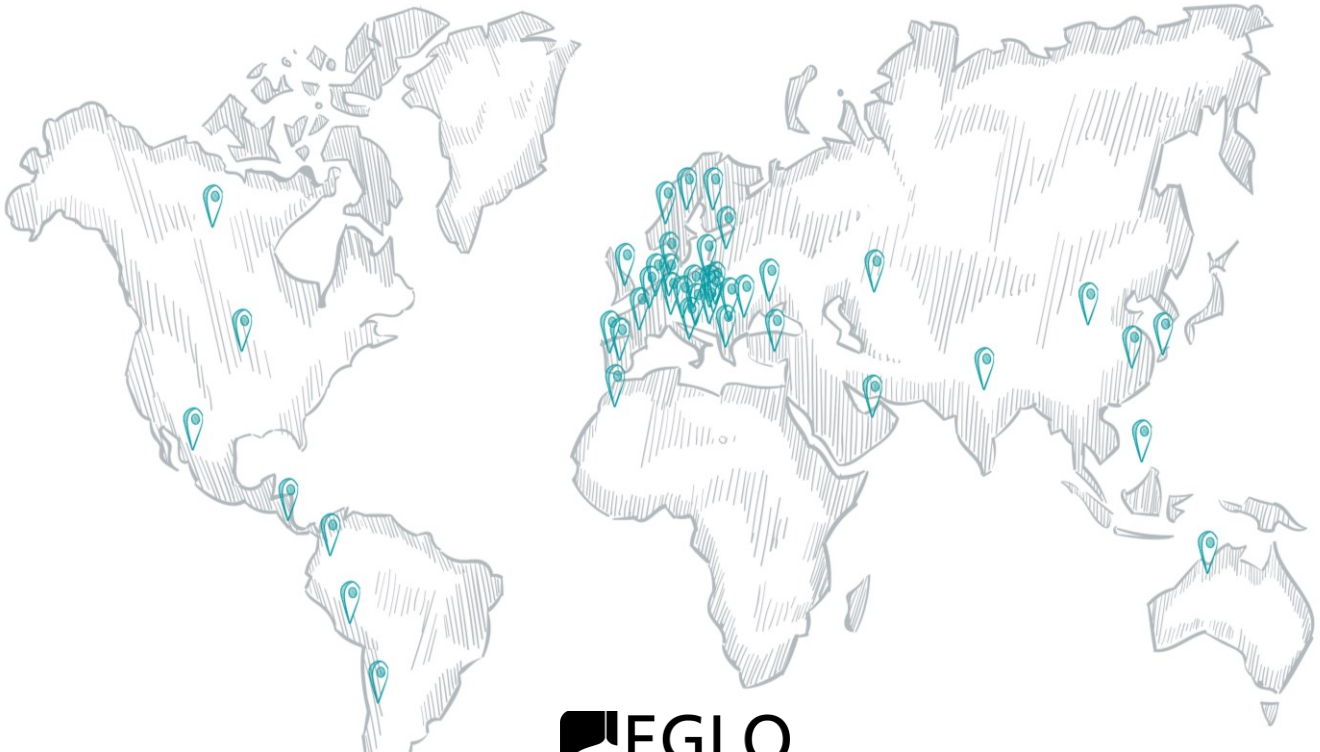



YOUR FAN, YOUR STYLE

Recognizing the pivotal role ceiling fans play in shaping the ambiance and habitability of American homes, and through a culmination of extensive research and a fresh approach to design, EGLO is pleased to present our all-new collection of meticulously crafted ceiling fans. This range showcases our commitment to elegant simplicity, seamless functionality, and optimum performance. With EGLO, it's not just a fan; it's **"Your Fan, Your Style."**

Craftsmanship takes center stage, each fan carefully crafted using premium materials and innovative manufacturing techniques to ensure unparalleled durability and longevity. Simplicity in design is a hallmark, ensuring these fans not only effectively and efficiently circulate air, but also embrace the whole-of-house concept, with sizes that seamlessly integrate into any space within your home.

The range embraces our design-centric philosophy, introducing a fresh aesthetic that marries contemporary elegance, meticulous attention to finishes, with top-notch performance.

Pairing exquisite craftsmanship, elegant contemporary silhouettes, seamless functionality, and optimum performance.
Your fan, Your way!




EGLO's distinctive silhouettes, fantastic finishes and effortless functionality serve to elevate your space with the optional smart controls, dimmable color selectable LED lighting, and fresh natural breezes.

For those prioritizing simplicity in design, the Builder and Builder+ collections offer a great solution, and for the outdoor enthusiasts, many fans specifically have been specially crafted for outdoor areas, from covered alfresco areas, to areas with full exposure to the elements.

EGLO's unwavering commitment to quality permeates every aspect of these ceiling fans and the range showcases stylish, contemporary, high-quality fans tailored to individual preferences, reiterating the mantra: **"Your Fan, Your Style."**

EGLO invites you to experience a harmonious blend of form and function, where impressive looks meet superior performance in every spin.

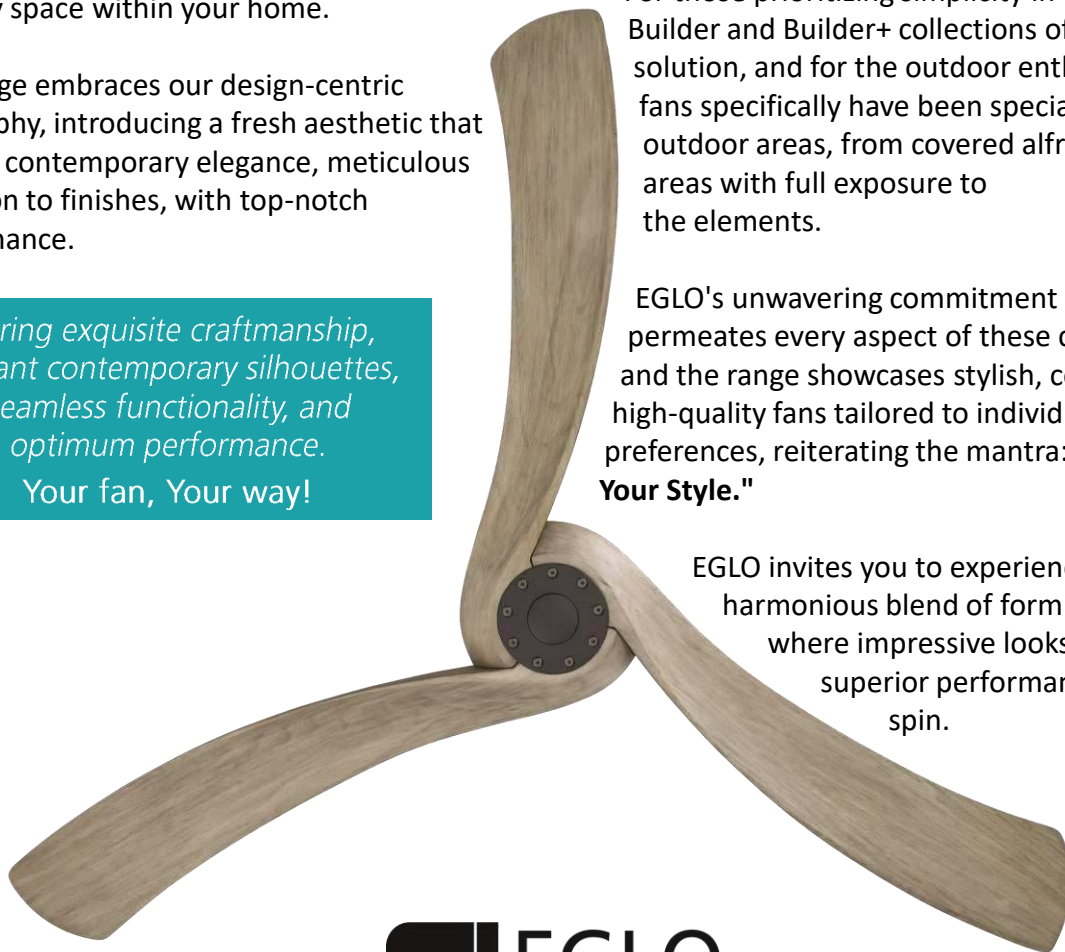

SMART CONTROL


Smart compatibility has revolutionized the way we interact with our household appliances, and ceiling fans are no exception. With the integration of smart technology, ceiling fans have become more convenient, energy efficient, and customizable than ever before, allowing users to control and monitor their ceiling fans from various devices such as smartphones, tablets, or voice assistants.

By embracing smart technology in ceiling fans, homeowners can enjoy a more comfortable living environment while reducing their energy consumption and contributing to a smarter, and a greener home.

Whether you are at home and simply don't want to get off the sofa or want to automate your ceiling fans operation through scheduling, you can now control your ceiling fans easily via your smart device.

Many EGLO ceiling fans come with built-in smart compatibility allowing you to effortlessly adjust the fan speed, change the fans direction, control the fans lighting, and set timers and schedules to suit you.

Look for the Smart Compatible, or Smart Enabled icon and revolutionize the way you interact with your ceiling fan. **Your Fan, Your Way!**

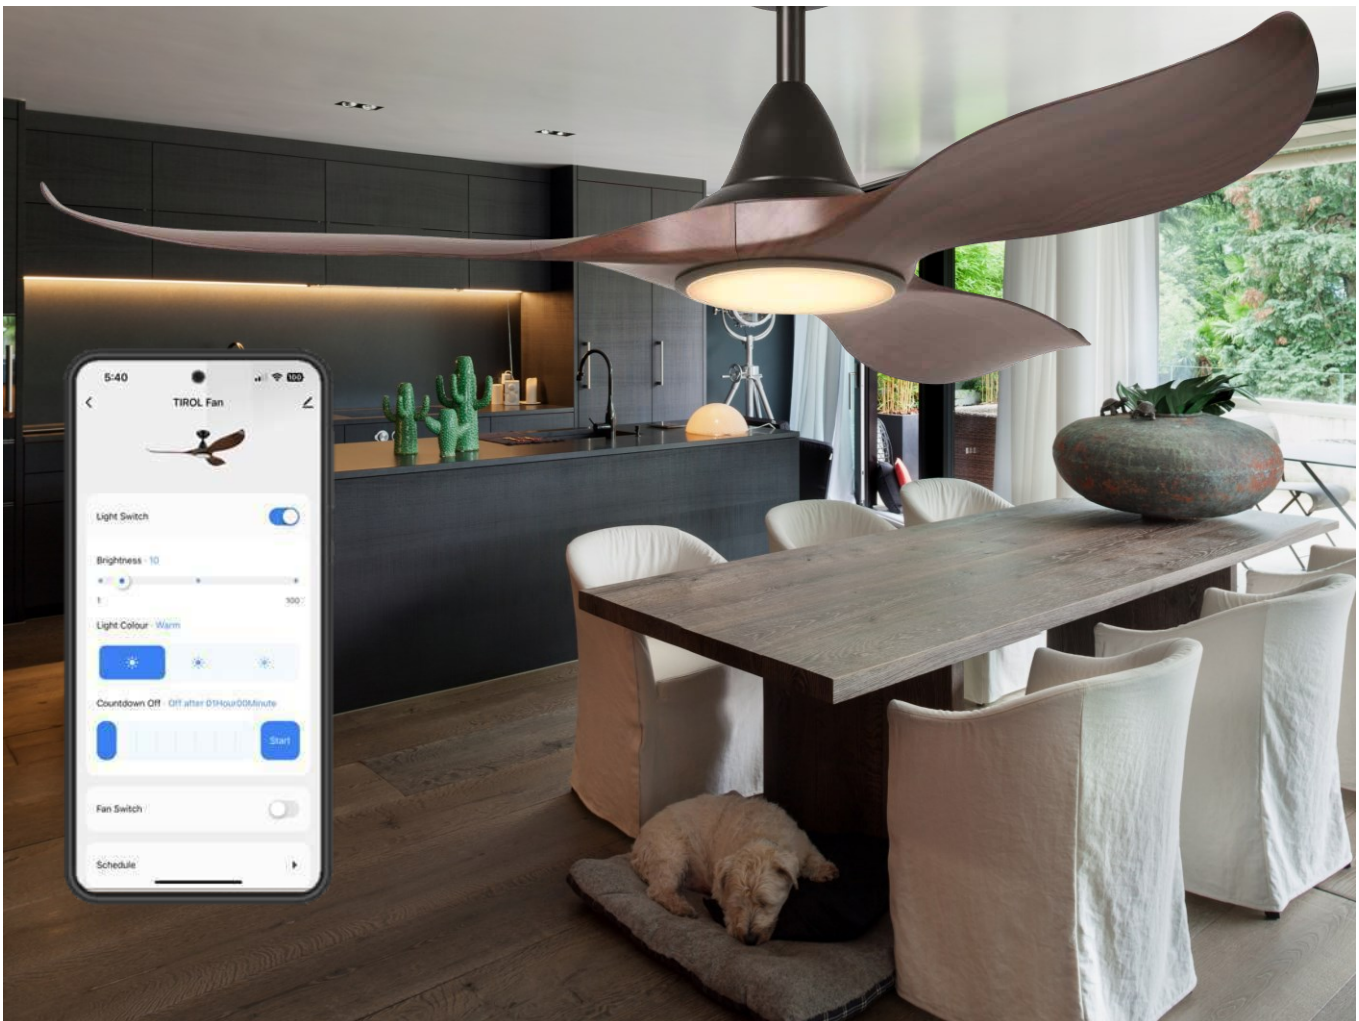

LED LIGHTS

Energy Efficient

LED Lighting uses 25% to 90% less electricity than conventional light sources to emit the same level of light.

Color Rendering (CRI)

LED Lighting provides a higher color rendering than any other conventional light source. Simply put, LED lighting helps us to see better!

Durability

Without breakable glass or filaments like conventional light sources, LED Lights can withstand significant impact and vibration.

Long Life


Depending on the application, LED Lighting in ceiling fans can last anywhere between 30,000 to 50,000 hours before requiring replacement.

Dimmable

LED Light technology has progressed to the point where it is just as dimmable as conventional light sources.

Environmentally Friendly

LED Lights contain no mercury or CFC's and emit 80% fewer greenhouse gases than conventional light sources. Add lower energy usage, and LEDs are simply better for the environment.

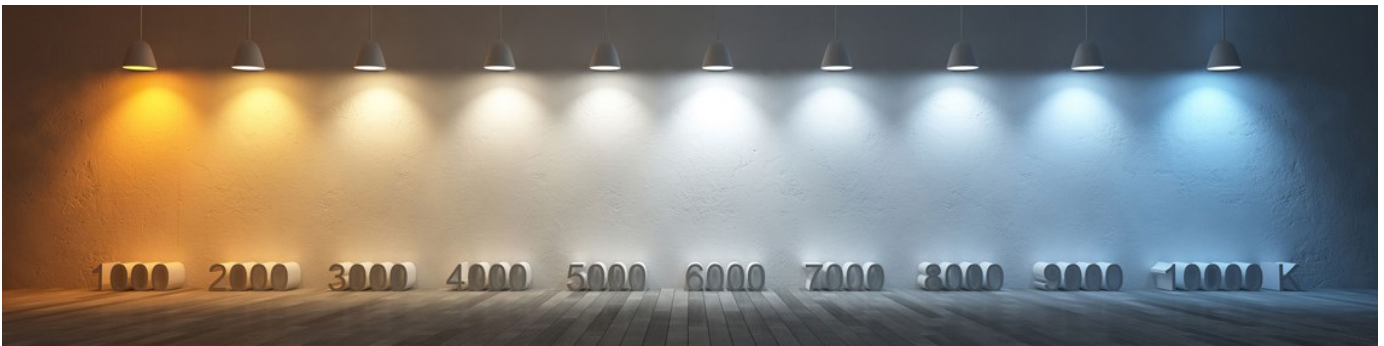

The EGLO Advantage

Tri-Color

LED Lighting in EGLO ceiling fans provide 3 different color temperature options: 2700K (warm white), 3000K (soft white) and 4000K (neutral white) to suit any setting.

Stepless Dimming

LED Lighting in EGLO ceiling fans offer stepless dimming from 10% or 20% of full output, all the way to 100% output, without flickering or buzzing.


Color Rendering

LED Lighting in ceiling fans has a Color Rendering Index or CRI of 85 (100 being natural sunlight), and excellent choice when color rendition is important for an appropriate ambience.

Serviceability


In the unlikely circumstance an EGLO LED light requires replacement, LED lights in EGLO fans are fully serviceable – just unplug, remove and replace!

ROOM SIZE

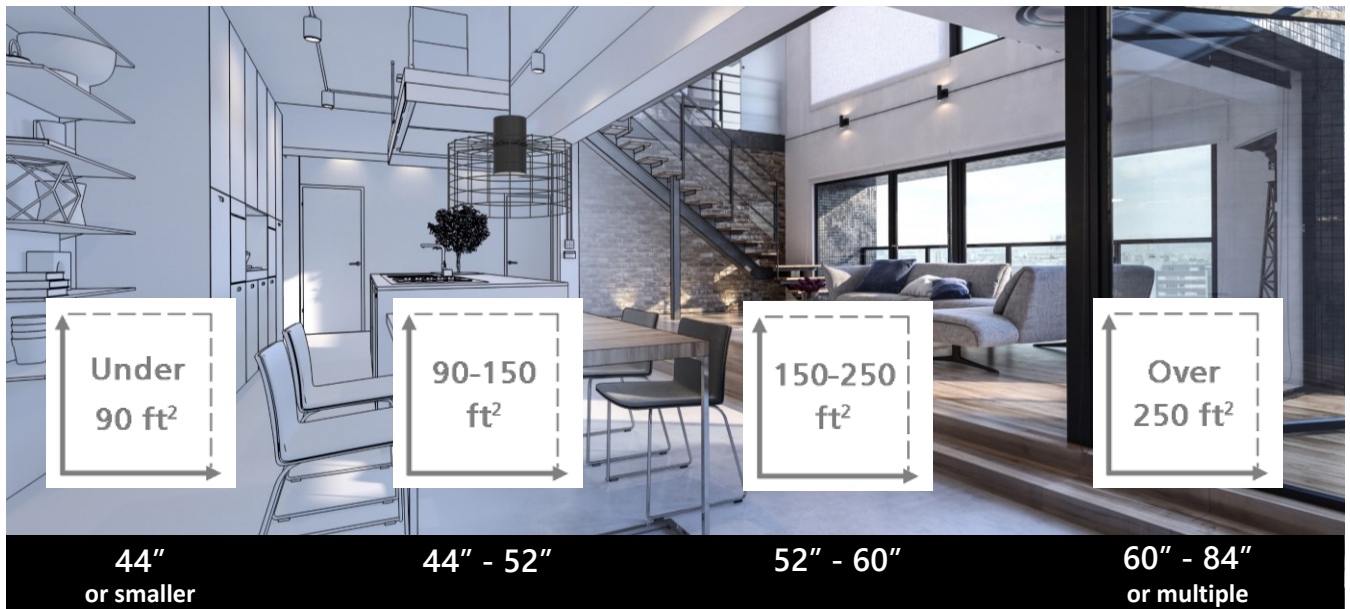

These recommendations are based on product performance and general airflow requirements. Other factors, such as design and/or HVAC influences should be considered. Multiple fans should be considered for large rooms for additional airflow.

CEILING HEIGHT

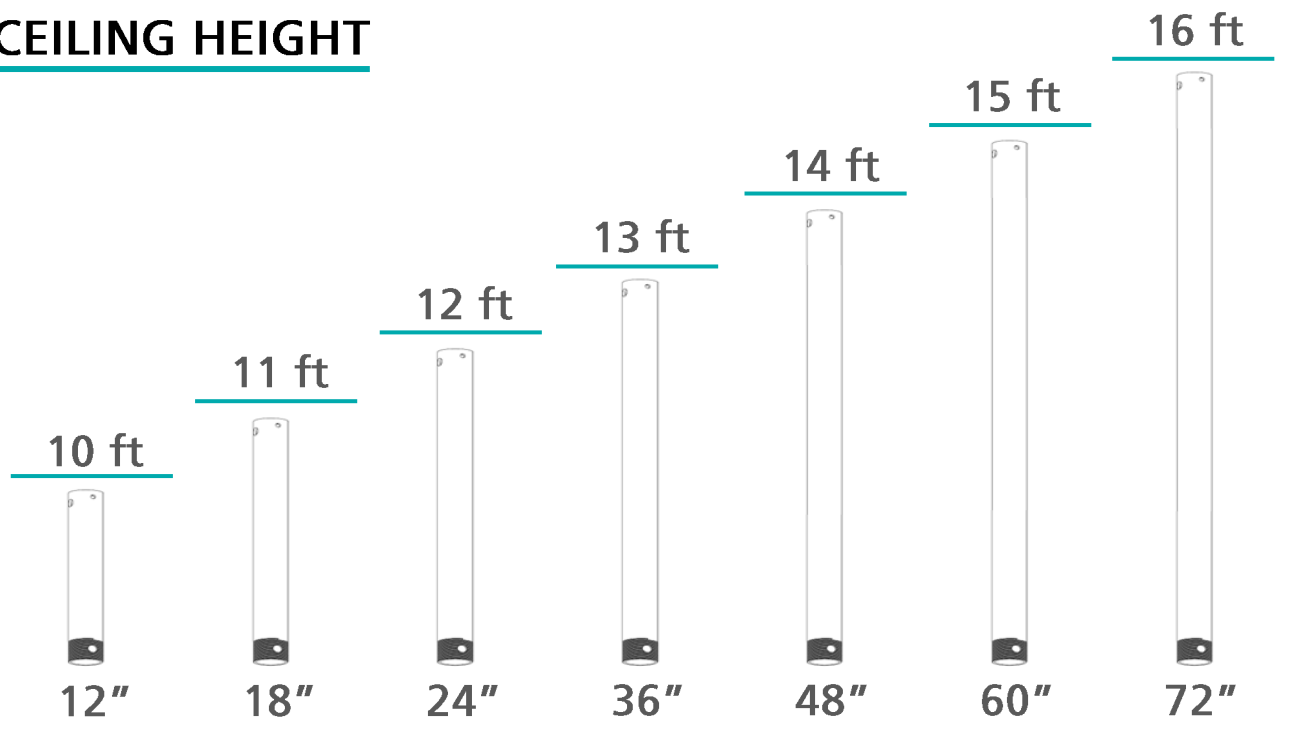

BUILDER CEILING FANS



PIERPORT LED
Pg 114



PIERPORT
Pg 120



PIERPORT E26
Pg 126



SWIFTSURE
Pg 108



SWIFTSURE LED
Pg 110



NAPLES
Pg 104

DESIGNER CEILING FANS



WESTERLY
Pg 15



WILLIWAW
Pg 34



MISSION BAY
Pg 44



MISSION BAY LED
Pg 50



ARLINGTON
Pg 59



ARLINGTON LED
Pg 63

DESIGNER CEILING FANS



TIROL
Pg 69



TIROL LED
Pg 77



SURFLINE
Pg 87



SURFLINE LED
Pg 95



WESTERLY

The essence of stylish cool comfort; smooth curved lines, hand-carved upswept wood blades and a modern vibe. It's more than just a fan; it's a bold statement that brings timeless elegance to every home.





WESTERLY

84"



Shown with optional downrod extension

OVERVIEW

- DC Motor 155 x 20mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4339)
- 6" & 18" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- 235992 -WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Hand Carved Wood Blades
- Light Adaptable (2100lm 3CCT)
- Smart Enabled (Built-In)
- Wood Cap Adaptable
- Damp Rated - Painted models only

ACCESSORIES

- Light Kit (pg. 30)
- Wood Cap (pg. 31)
- Downrods ¾" (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- Light On/Off, Fan Off
- Light Dimming
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 84"
- Total Height: 15.18"
- Blade Drop: 14.94"

	Energy Use	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	22W	2700K 3000K 4000K	1850lm 2100lm 2300lm	83 CRI 83 CRI 82 CRI

	Airflow CFM	Rotations RPM	Energy Use WATTS	Airflow Efficiency CFM/W
PERFORMANCE Fan	10,666	99	40	266.6



235400-8411A
Satin Brass / Satin Brass / Matte White
Dry Indoor Rated



235400-8402A
Matte Black / Matte Black / Matte Black
Damp Rated



235400-8432A
Brushed Nickel / Brushed Nickel / Acacia Wood
Dry Indoor Rated



235400-8427A
Matte Black / Matte Black / Driftwood
Damp Rated



235400-8401A
Matte White / Matte White / Matte White
Damp Rated



235400-8425A
Matte Black / Matte Black / Walnut
Damp Rated



WESTERLY

72"



Shown with optional downrod extension

OVERVIEW

- DC Motor 155 x 20mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4339)
- 6" & 18" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- 235992 -WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Hand Carved Wood Blades
- Light Adaptable (2100lm 3CCT)
- Smart Enabled (Built-In)
- Wood Cap Adaptable
- Damp Rated - Painted models only

ACCESSORIES

- Light Kit (pg. 30)
- Wood Cap (pg. 31)
- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- Light On/Off, Fan Off
- Light Dimming
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 72"
- Total Height: 15.06"
- Blade Drop: 15.06"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	22W	2700K 3000K 4000K	1850lm 2100lm 2300lm	83 CRI 83 CRI 82 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	10,022	150	40	250.5



235400-7202A
Matte Black / Matte Black / Matte Black
Damp Rated



235400-7232A
Brushed Nickel / Brushed Nickel / Acacia Wood
Indoor Dry Rated



235400-7225A
Matte Black / Matte Black / Walnut
Damp Rated



235400-7211A
Satin Brass / Satin Brass / Matte White
Indoor Dry Rated



235400-7227A
Matte Black / Matte Black / Driftwood
Damp Rated



235400-7201A
Matte White / Matte White / Matte White
Damp Rated



WESTERLY

60"



Shown with optional downrod extension

OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4379)
- 6" & 12" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- 235992 -WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Hand Carved Wood Blades
- Light Adaptable (2100lm 3CCT)
- Smart Enabled (Built-In)
- Wood Cap Adaptable
- Damp Rated - Painted models only

ACCESSORIES

- Light Kit (pg. 30)
- Wood Cap (pg. 31)
- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- Light On/Off, Fan Off
- Light Dimming
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 15.18"
- Blade Drop: 14.65"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	22W	2700K 3000K 4000K	1850lm 2100lm 2300lm	83 CRI 83 CRI 82 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	6,986	179	33	211.7



235400-6027A
Matte Black / Matte Black / Driftwood
Damp Rated



235400-6001A
Matte White / Matte White / Matte White
Damp Rated



235400-6025A
Matte Black / Matte Black / Walnut
Damp Rated



235400-6032A
Brushed Nickel / Brushed Nickel / Acacia Wood
Indoor Dry Rated



235400-6002A
Matte Black / Matte Black / Matte Black
Damp Rated



235400-6011A
Satin Brass / Satin Brass / Matte White
Indoor Dry Rated



WESTERLY

52"



Shown with optional downrod extension

OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4379)
- 6" Downrod (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- 235992 -WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Hand Carved Wood Blades
- Light Adaptable (2100lm 3CCT)
- Smart Enabled (Built-In)
- Wood Cap Adaptable
- Damp Rated - Painted models only

ACCESSORIES

- Light Kit (pg. 30)
- Wood Cap (pg. 31)
- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- Light On/Off, Fan Off
- Light Dimming
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 15.18"
- Blade Drop: 14.55"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	22W	2700K 3000K 4000K	1850lm 2100lm 2300lm	83 CRI 83 CRI 82 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	5,592	201	24	233



235400-5201A
Matte White / Matte White / Matte White
Damp Rated



235400-5202A
Matte Black / Matte Black / Matte Black
Damp Rated



235400-5211A
Satin Brass / Satin Brass / Matte White
Indoor Dry Rated



235400-5225A
Matte Black / Matte Black / Walnut
Damp Rated



235400-5227A
Matte Black / Matte Black / Driftwood
Damp Rated



235400-5232A
Brushed Nickel / Brushed Nickel / Acacia Wood
Indoor Dry Rated

WESTERLY LIGHT KIT



235400-LT01A Matte White



235400-LT02A Matte Black



235400-LT11A Satin Brass



235400-LT32A Brushed Nickel


FEATURES

- 22W 3CCT
- Stepless Dimming, 20–100%
- Plug connection to Westerly ceiling fans
- Damp Rated - Painted models only

PERFORMANCE

- 1850lm, CRI 83 (2700K)
- 2100lm, CRI 83 (3000K)
- 2300lm, CRI 82 (4000K)

WESTERLY WOOD CAP

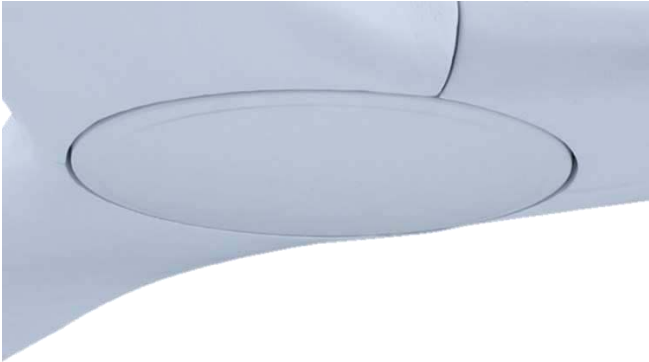

235400-DC01A Matte White



235400-DC02A Matte Black



235400-DC25A Walnut



235400-DC27A Driftwood



235400-DC32A Acacia Wood

FEATURES

Hand Carved Plantation Wood

Twist & lock installation

Damp Rated





WILLIWAU

Immerse yourself in the modern aesthetic as the bold wooden blades of the Williwaw gracefully extend and curve from its minimalist body, for a room that exudes strong and effortless contemporary style.



WILLIWAW

84"



OVERVIEW

- DC Motor 155 x 20mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4370)
- 6" & 18" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA

FEATURES

- Hand Carved Wood Blades
- Damp Rated - Painted models only

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 84"
- Total Height: 13.18"
- Blade Drop: 13.18"

PERFORMANCE

Fan

Airflow
CFM
10,997

Rotation
RPM
99

Energy Use
WATTS
46

Airflow Efficiency
CFMW
239.1



235370-8425A

Matte Black / Matte Black / Walnut
Damp Rated



235370-8427A

Matte Black / Matte Black / Driftwood
Damp Rated



235370-8432A

Brushed Nickel / Brushed Nickel / Acacia Wood
Dry Indoor Rated

WILLIWAW

72"



OVERVIEW

- DC Motor 155 x 20mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4370)
- 6" & 18" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA

FEATURES

- Hand Carved Wood Blades
- Damp Rated - Painted models only

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 72"
- Total Height: 13.18"
- Blade Drop: 13.18"

PERFORMANCE

Fan	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFM/W
	9,576	128	44	217.6



235370-7227A

Matte Black / Matte Black / Driftwood
Damp Rated



235370-7232A

Brushed Nickel / Brushed Nickel / Acacia Wood
Dry Indoor Rated



235370-7225A

Matte Black / Matte Black / Walnut
Damp Rated

WILLIWAW

60"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4370)
- 6" & 12" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA

FEATURES

- Hand Carved Wood Blades
- Damp Rated - Painted models only

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 13.18"
- Blade Drop: 13.18"

PERFORMANCE

Fan

Airflow
CFM
7,624

Rotation
RPM
161

Energy Use
WATTS
36

Airflow Efficiency
CFMW
211.8



235370-6032A

Brushed Nickel / Brushed Nickel / Acacia Wood
Dry Indoor Rated



235370-6025A

Matte Black / Matte Black / Walnut
Damp Rated



235370-6027A

Matte Black / Matte Black / Driftwood
Damp Rated

WILLIWAW

52"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4370)
- 6" Downrod (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA

FEATURES

- Hand Carved Wood Blades
- Damp Rated - Painted models only

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 13.18"
- Blade Drop: 13.18"

PERFORMANCE

Fan

Airflow
CFM
6,686

Rotation
RPM
192

Energy Use
WATTS
34

Airflow Efficiency
CFMW
196.6



235370-5225A
Matte Black / Matte Black / Walnut
Damp Rated




235370-5227A
Matte Black / Matte Black / Driftwood
Damp Rated



235370-5232A
Brushed Nickel / Brushed Nickel / Acacia Wood
Dry Indoor Rated

MISSION BAY

A Wet Rated fan boasting both striking looks and outstanding performance. Crafted from rugged ABS materials and built to withstand the elements, recreate a cool breeze and bring a touch of nature to your space.

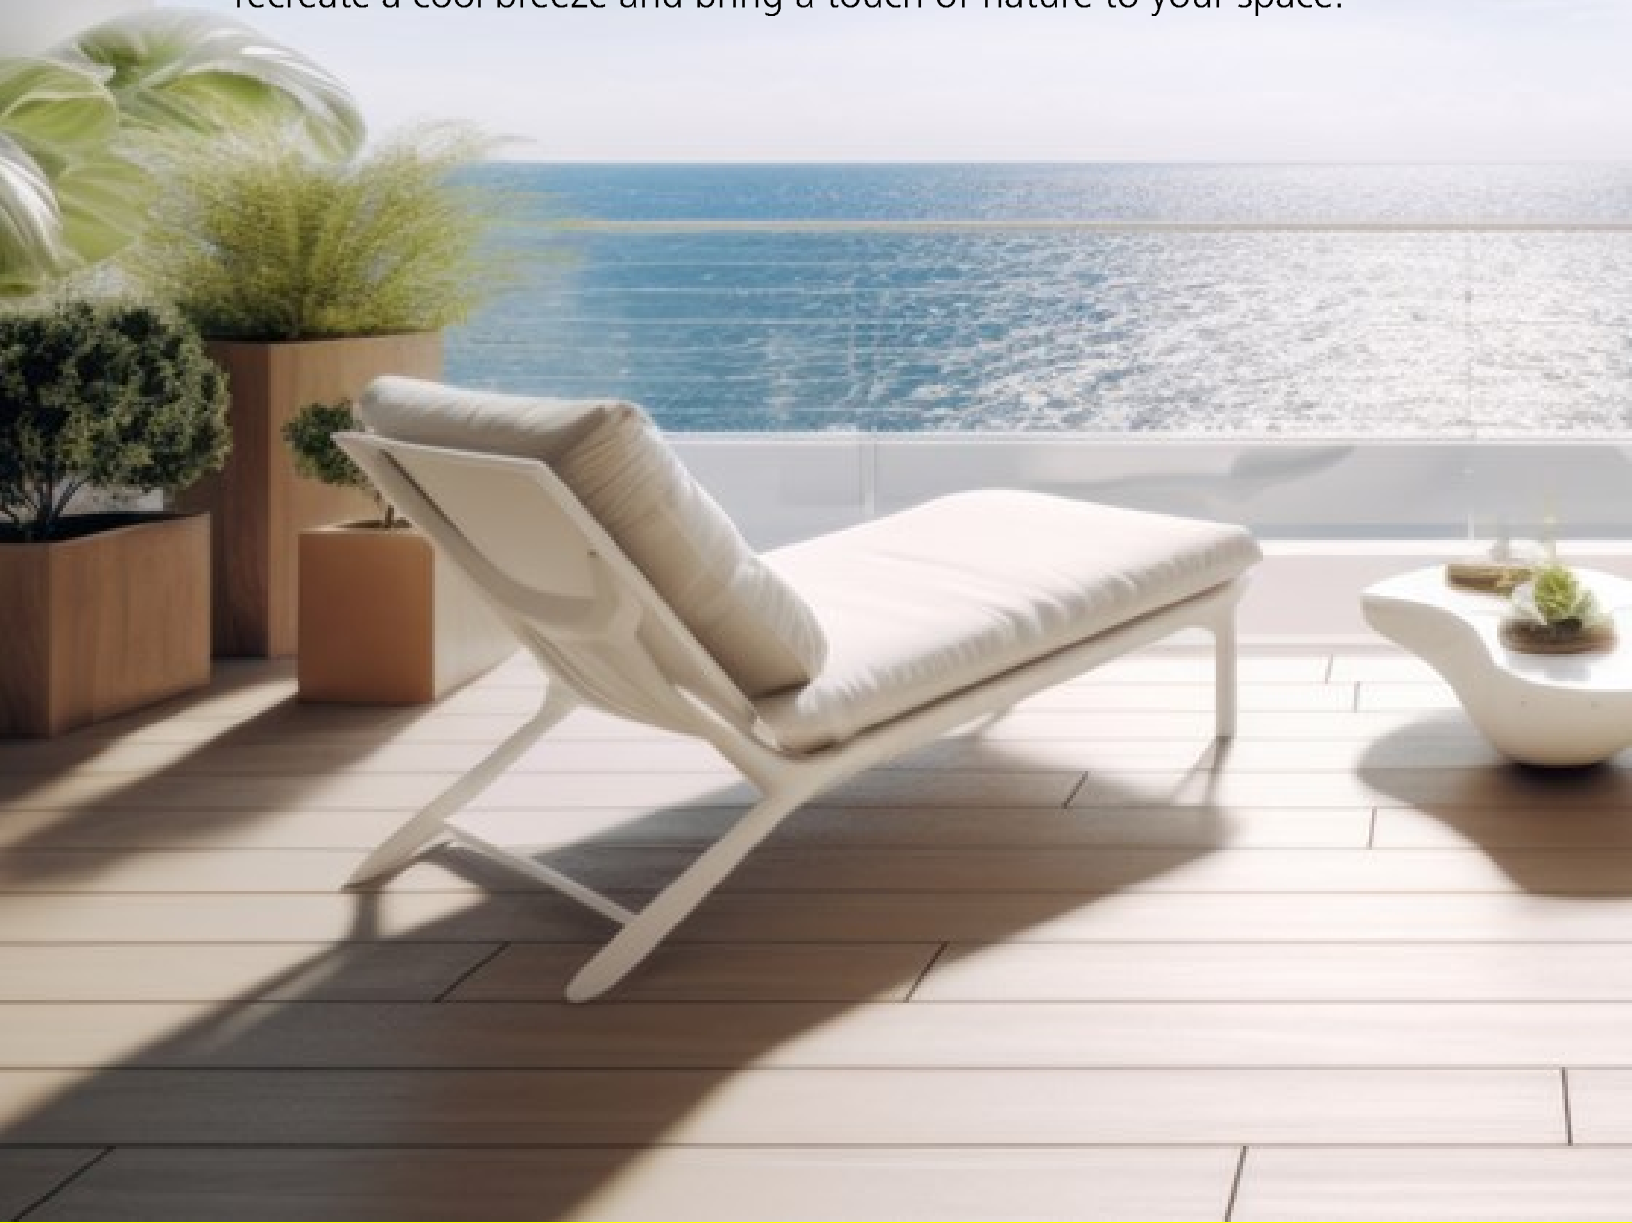



MISSION BAY

72"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4337)
- 6" & 12" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Wet Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)
- Light model (pg. 50)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 72"
- Total Height: 12.54"
- Blade Drop: 12.26"

PERFORMANCE

Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFM/W
8,936	131	30	297.9



235500-7201A
Matte White / Matte White / Matte White
Wet Rated



235500-7202A
Matte Black / Matte Black / Matte Black
Wet Rated

MISSION BAY

60"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4337)
- 6" & 12" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Wet Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)
- Light model (pg. 52)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 12.04"
- Blade Drop: 11.54"

PERFORMANCE

Airflow
CFM

8,381

Rotation
RPM

176

Energy Use
WATTS

29

Airflow Efficiency
CFM/W

289



235500-6002A

Matte Black / Matte Black / Matte Black
Wet Rated



235500-6001A

Matte White / Matte White / Matte White
Wet Rated

MISSION BAY

52"



OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4337)
- 6" Downrod (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Wet Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)
- Light model (pg. 54)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.04"
- Blade Drop: 11.60"

PERFORMANCE

Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFM/W
6,114	193	24	254.7



235500-5201A

Matte White / Matte White / Matte White
Wet Rated



235500-5202A

Matte Black / Matte Black / Matte Black
Wet Rated

MISSION BAY

LED 72"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4337)
- 6" & 12" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Wet Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 72"
- Total Height: 12.95"
- Blade Drop: 12.26"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	22W	2700K 3000K 4000K	1780lm 2000lm 2100lm	84 CRI 84 CRI 83 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	8,936	131	30	297.9



235501-7202A
Matte Black / Matte Black / Matte Black
Wet Rated



235501-7201A
Matte White / Matte White / Matte White
Wet Rated

MISSION BAY

LED 60"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4337)
- 6" & 12" Downrods (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Wet Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 12.45"
- Blade Drop: 11.54"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	22W	2700K 3000K 4000K	1780lm 2000lm 2100lm	84 CRI 84 CRI 83 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	8,381	176	29	289



235501-6001A
Matte White / Matte White / Matte White
Wet Rated



235501-6002A
Matte Black / Matte Black / Matte Black
Wet Rated

MISSION BAY

LED 52"



OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4338)
- 6" Downrod (incl.)
- 0-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Wet Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.45"
- Blade Drop: 11.60"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	22W	2700K 3000K 4000K	1780lm 2000lm 2100lm	84 CRI 84 CRI 83 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	6,114	193	24	254.7



235501-5202A
Matte Black / Matte Black / Matte Black
Wet Rated



235501-5201A
Matte White / Matte White / Matte White
Wet Rated



ARLINGTON

A classic look evolves into modern day with ABS blades, trending finishes, and excellent performance. A 56" blade sweep and optional LED light makes the Arlington very versatile.





ARLINGTON

56"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4470)
- 4.5" Downrod (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Compatible (pg. 133)

FEATURES

- UV resistant ABS blades
- Smart Compatible (pg. 133)
- Light model (pg. 63)
- Damp Rated - Painted models only

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 56"
- Total Height: 11.93"
- Blade Drop: 11.93"

PERFORMANCE

Airflow
CFM

7,127

Rotation
RPM

186

Energy Use
WATTS

29

Airflow Efficiency
CFM/W

245.7



235144-5623A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



235144-5612A
Oil Rubbed Bronze / Oil Rubbed Bronze / Koa
Damp Rated



235144-5601A
Matte White / Matte White / Matte White
Damp Rated



235144-5602A
Matte Black / Matte Black / Matte Black
Damp Rated



235144-5618A
Matte White / Satin Brass / Matte White
Dry Indoor Rated



ARLINGTON

LED 56"



OVERVIEW

- DC Motor 155 x 16mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4471)
- 4.5" Downrod (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Compatible (pg. 133)

FEATURES

- UV resistant ABS blades
- Smart Compatible (pg. 133)
- 20W 3CCT LED Light
- Damp Rated - Painted models only

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 56"
- Total Height: 12.26"
- Blade Drop: 11.93"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1550lm 1850lm 1900lm	84 CRI 84 CRI 82 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	7,127	186	29	245.7



235145-5612A

Oil Rubbed Bronze / Oil Rubbed Bronze / Koa
Damp Rated



235145-5602A

Matte Black / Matte Black / Matte Black
Damp Rated



235145-5618A
Matte White / Satin Brass / Matte White
Dry Indoor Rated



235145-5623A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



235145-5601A
Matte White / Matte White / Matte White
Damp Rated





TIROL

Discover a new era of contemporary air movement as graceful curves, upswept blades, captivating illumination, and finishes of furniture-grade quality converge to redefine elegance.



TIROL

60"



OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4437)
- 4.5" & 12" Downrods (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Damp Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)
- Light model (pg. 77)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 12.20"
- Blade Drop: 11.73"

PERFORMANCE

Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFM/W
8,124	166	25.4	319.8



235223-6026A
Matte Black / Matte Black / Acacia Wood
Damp Rated



235223-6001A
Matte White / Matte White / Matte White
Damp Rated



235223-6027A

Matte Black / Matte Black / Driftwood
Damp Rated



235223-6002A

Matte Black / Matte Black / Matte Black
Damp Rated



TIROL

52"



OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4437)
- 4.5" Downrod (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Damp Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)
- Light model (pg. 81)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.20"
- Blade Drop: 11.81"

PERFORMANCE

Airflow
CFM

6,471

Rotation
RPM

185

Energy Use
WATTS

26

Airflow Efficiency
CFM/W

248.9



235223-5201A
Matte White / Matte White / Matte White
Damp Rated



235223-5202A
Matte Black / Matte Black / Matte Black
Damp Rated



235223-5226A
Matte Black / Matte Black / Acacia Wood
Damp Rated



235223-5227A
Matte Black / Matte Black / Driftwood
Damp Rated



TIROL

LED 60"



OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4379)
- 4.5" & 12" Downrods (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- UV resistant ABS construction
- Smart Enabled (Built-In)
- 20W 3CCT LED Light
- Damp Rated

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 12.20"
- Blade Drop: 11.73"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	2300lm 2400lm 2500lm	82 CRI 84 CRI 84 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	8,124	166	25.4	319.8



235224-6027A

Matte Black / Matte Black / Driftwood
Damp Rated



235224-6026A

Matte Black / Matte Black / Acacia Wood
Damp Rated



235224-6002A
Matte Black / Matte Black / Matte Black
Damp Rated



235224-6001A
Matte White / Matte White / Matte White
Damp Rated



TIROL

LED 52"



OVERVIEW

- DC Motor 155 x 12mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4379)
- 4.5" Downrod (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- UV resistant ABS construction
- Smart Enabled (Built-In)
- 20W 3CCT LED Light
- Damp Rated

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.20"
- Blade Drop: 11.81"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	2300lm 2400lm 2500lm	82 CRI 84 CRI 84 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	6,471	185	26	248.9



235224-5202A
Matte Black / Matte Black / Matte Black
Damp Rated



235224-5227A
Matte Black / Matte Black / Driftwood
Damp Rated



235224-5226A

Matte Black / Matte Black / Acacia Wood
Damp Rated



235224-5201A

Matte White / Matte White / Matte White
Damp Rated



SURFLINE

Modern design featuring durable ABS construction with coastal influences, ideal for any location. Seamless functionality, high-quality finishes reminiscent of fine furniture, and straightforward installation.





SURFLINE

60"



Shown with optional downrod extension

OVERVIEW

- DC Motor 108 x 18mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4437)
- 5.5" & 12" Downrods (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Damp Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)
- Light model (pg. 95)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 12.69"
- Blade Drop: 12.68"

PERFORMANCE

Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFM/W
6,587	167	27	243.9



235111-6016A
Matte White / Matte White / Coastal Oak
Damp Rated



235111-6025A
Matte Black / Matte Black / Walnut
Damp Rated



235111-6002A

Matte Black / Matte Black / Matte Black
Damp Rated



235111-6001A

Matte White / Matte White / Matte White
Damp Rated



SURFLINE

52"



Shown with optional downrod extension

OVERVIEW

- DC Motor 108 x 18mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4437)
- 5.5" Downrod (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235991-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- Damp Rated
- UV resistant ABS construction
- Smart Enabled (Built-In)
- Light model (pg. 99)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 1hr, 2hr, 4hr, 8hr
- Natural Breeze



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.96"
- Blade Drop: 12.95"

PERFORMANCE

Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFM/W
5,556	180	26	213.7



235111-5201A
Matte White / Matte White / Matte White
Damp Rated



235111-5202A
Matte Black / Matte Black / Matte Black
Damp Rated



235111-5225A
Matte Black / Matte Black / Walnut
Damp Rated



235111-5216A
Matte White / Matte White / Coastal Oak
Damp Rated



SURFLINE

LED 60"



Shown with optional downrod extension

OVERVIEW

- DC Motor 106 x 18mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4379)
- 5.5" & 12" Downrods (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- UV resistant ABS construction
- Smart Enabled (Built-In)
- 20W 3CCT LED Light
- Damp Rated

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 13.51"
- Blade Drop: 12.80"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1790lm 2000lm 2200lm	84 CRI 84 CRI 82 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	6,587	167	27	243.9



235112-6002A

Matte Black / Matte Black / Matte Black
Damp Rated



235112-6016A

Matte White / Matte White / Coastal Oak
Damp Rated



235112-6001A
Matte White / Matte White / Matte White
Damp Rated



235112-6025A
Matte Black / Matte Black / Walnut
Damp Rated



SURFLINE

LED 52"



Shown with optional downrod extension

OVERVIEW

- DC Motor 106 x 18mm
- 3 Blades, Variable Blade Pitch
- 5 Speed Remote (ET4379)
- 5.5" Downrod (incl.)
- 20-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA
- Smart Enabled (pg. 6)

FEATURES

- UV resistant ABS construction
- Smart Enabled (Built-In)
- 20W 3CCT LED Light
- Damp Rated

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 5 Speed, Reversible
- Timer: 2hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 13.51"
- Blade Drop: 13.07"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1790lm 2000lm 2200lm	84 CRI 84 CRI 82 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	5,556	180	26	213.7



235112-5225A
Matte Black / Matte Black / Walnut
Damp Rated



235112-5201A
Matte White / Matte White / Matte White
Damp Rated



235112-5216A
Matte White / Matte White / Coastal Oak
Damp Rated



235112-5202A
Matte Black / Matte Black / Matte Black
Damp Rated



NAPLES

A sleek and stylish look, the Naples fan also features a dimmable, 3CCT, 1800 lumen LED light for excellent illumination.



NAPLES

LED 52"



235050-5201A

Matte White / Matte White / Matte White
Damp Rated

OVERVIEW

- DC Motor 153 x 10mm
- 3 Blades, Variable Blade Pitch
- 6 Speed Remote (ET4271)
- 6.0" Downrod (incl.)
- 13-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- 235992-WCDCA

FEATURES

- UV resistant ABS Blades
- 20W 3CCT LED Light

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 6 Speed, Reversible
- Timer: 2hr, 4hr, 8hr
- Natural Breeze
- 3CCT via Remote



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 14.96"
- Blade Drop: 13.58"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1720lm 1820lm 1900lm	82 CRI

	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	6,115	172	26	235.2



235050-5202A
Matte Black / Matte Black / Matte Black
Damp Rated



235050-5218A
Matte White / Satin Brass / Matte White
Dry Indoor Rated



235050-5223A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



SWIFTSURE

Crafted from durable UV-resistant ABS, this 5-blade damp location fan is designed for rugged environments. With or without LED light, Swiftsure is perfect for patios, coastal areas, and interior spaces alike.



SWIFTSURE

52"



OVERVIEW

- AC Motor 172 x 18mm
- 5 Blades, Variable Blade Pitch
- 3 speed Wall Control
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Damp Rated
- UV resistant ABS construction
- Smart Compatible
- Light model (pg. 110)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 3 speed
- Reversible on Housing



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.30"
- Blade Drop: 10.94"

PERFORMANCE

Airflow
CFM
4,735

Rotation
RPM
170

Energy Use
WATTS
47

Airflow Efficiency
CFM/W
100.7



235040-5202A

Matte Black / Matte Black / Matte Black
Damp Rated



235040-5201A

Matte White / Matte White / Matte White
Damp Rated

SWIFTSURE

LED 52"



OVERVIEW

- AC Motor 172 x 18mm
- 5 Blades, Variable Blade Pitch
- 3 speed Wall Control
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control LED (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Damp Rated
- UV resistant ABS construction
- Smart Compatible
- 20W 3CCT LED Light

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- 3 speed
- Reversible on Housing
- 3CCT on LED Board



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.98"
- Blade Drop: 10.94"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1560lm 1750lm 1700lm	84 CRI 85 CRI 83 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFM/W
PERFORMANCE Fan	4,735	170	47	100.7



235041-5201A

Matte White / Matte White / Matte White
Damp Rated



235041-5202A

Matte Black / Matte Black / Matte Black
Damp Rated



PIERPORT

Simple, industrial design and great performance meet style and versatility; the Pierport is available in various finishes, light and control options.



PIERPORT

LED 60"



235003-6018A
Matte White / Satin Brass / Matte White
Dry Indoor Rated



235003-6023A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 18mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4312)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control, LED (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Dry Indoor Rated
- Wood Laminate Blades
- Smart Compatible
- 20W 3CCT LED Light

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- Reversible
- 3CCT on LED Board



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 12.91"
- Blade Drop: 11.10"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1560lm 1750lm 1700lm	84 CRI 85 CRI 83 CRI

PERFORMANCE Fan	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
	5,103	166	60	85.04



235003-6031A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated



235003-6002A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated



235003-6001A
Matte White / Matte White / Matte White
Dry Indoor Rated

PIERPORT

LED 52"



235003-5231A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated



235003-5218A
Matte White / Satin Brass / Matte White
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 12mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4312)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control, LED (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Dry Indoor Rated
- Wood Laminate Blades
- Smart Compatible
- 20W 3CCT LED Light

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- Reversible
- 3CCT on LED Board



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.91"
- Blade Drop: 11.10"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1560lm 1750lm 1700lm	84 CRI 85 CRI 83 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	4,226	201	58	72.86



235003-5202A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated



235003-5201A
Matte White / Matte White / Matte White
Dry Indoor Rated



235003-5223A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated

PIERPORT

LED 44"



235003-4402A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated



235003-4431A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 9mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4312)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control, LED (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Dry Indoor Rated
- Wood Laminate Blades
- Smart Compatible
- 20W 3CCT LED Light

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- Reversible
- 3CCT on LED Board



DIMENSIONS

- Blade Sweep: 44"
- Total Height: 12.91"
- Blade Drop: 11.10"

	Watt	Kelvin	Lumen	Color Rendering
PERFORMANCE Light	20W	2700K 3000K 4000K	1560lm 1750lm 1700lm	84 CRI 85 CRI 83 CRI
	Airflow CFM	Rotation RPM	Energy Use WATTS	Airflow Efficiency CFMW
PERFORMANCE Fan	2,907	226	45	64.6



235003-4401A
Matte White / Matte White / Matte White
Dry Indoor Rated



235003-4423A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



235003-4418A
Matte White / Satin Brass / Matte White
Dry Indoor Rated

PIERPORT

60"



235001-6031A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated



235001-6018A
Matte White / Satin Brass / Matte White
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 18mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4311)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Dry Indoor Rated
- Wood Laminate Blades
- Smart Compatible
- LED Light model (pg. 120)
- E26 Light model (pg. 132)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- Reversible



DIMENSIONS

- Blade Sweep: 60"
- Total Height: 12.50"
- Blade Drop: 11.10"

PERFORMANCE

Fan

Airflow
CFM
5,103

Rotation
RPM
166

Energy Use
WATTS
60

Airflow Efficiency
CFM/W
85.04



235001-6002A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated



235001-6001A
Matte White / Matte White / Matte White
Dry Indoor Rated



235001-6023A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated

PIERPORT

52"



235001-5202A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated



235001-5231A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 12mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4311)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Dry Indoor Rated
- Wood Laminate Blades
- Smart Compatible
- LED Light model (pg. 120)
- E26 Light model (pg. 132)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- Reversible



DIMENSIONS

- Blade Sweep: 52"
- Total Height: 12.50"
- Blade Drop: 11.10"

PERFORMANCE

Fan

Airflow
CFM
4,226

Rotation
RPM
201

Energy Use
WATTS
58

Airflow Efficiency
CFMW
72.86



235001-5201A
Matte White / Matte White / Matte White
Dry Indoor Rated



235001-5223A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



235001-5218A
Matte White / Satin Brass / Matte White
Dry Indoor Rated

PIERPORT

44"



235001-4401A
Matte White / Matte White / Matte White
Dry Indoor Rated



235001-4402A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 9mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4311)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Dry Indoor Rated
- Wood Laminate Blades
- Smart Compatible
- LED Light model (pg. 120)
- E26 Light model (pg. 132)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- Reversible



DIMENSIONS

- Blade Sweep: 44"
- Total Height: 12.50"
- Blade Drop: 11.10"

PERFORMANCE

Fan

Airflow
CFM
2,907

Rotation
RPM
226

Energy Use
WATTS
45

Airflow Efficiency
CFMW
64.6



235001-4423A

Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



235001-4418A

Matte White / Satin Brass / Matte White
Dry Indoor Rated



235001-4431A

Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated

PIERPORT

E26 60"



MADE TO ORDER

235002-6001A
Matte White / Matte White / Matte White
Dry Indoor Rated



MADE TO ORDER

235002-6002A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 18mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4312)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

FEATURES

- Dry Indoor Rated
- 2 x E26, 7W max. (bulb not incl)
- Wood Laminate Blades
- Smart Compatible
- LED Light model (pg. 120)

FUNCTIONS

- Reversible



OPTIONAL CONTROLS

- Slide Wall Control Light (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

DIMENSIONS

- Blade Sweep: 60"
- Total Height: 15.30"
- Blade Drop: 11.10"

PERFORMANCE

Fan

Airflow
CFM
5,103

Rotation
RPM
166

Energy Use
WATTS
60

Airflow Efficiency
CFMW
85.04



**MADE TO
ORDER**

235002-6023A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



**MADE TO
ORDER**

235002-6018A
Matte White / Satin Brass / Matte White
Dry Indoor Rated



**MADE TO
ORDER**

235002-6031A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated

PIERPORT

E26 52"



MADE TO ORDER

235002-5223A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated



MADE TO ORDER

235002-5201A
Matte White / Matte White / Matte White
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 12mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4312)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

FEATURES

- Dry Indoor Rated
- 2 x E26, 7W max. (bulb not incl)
- Wood Laminate Blades
- Smart Compatible
- LED Light model (pg. 120)

FUNCTIONS

- Reversible



OPTIONAL CONTROLS

- Slide Wall Control Light (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

DIMENSIONS

- Blade Sweep: 60"
- Total Height: 15.30"
- Blade Drop: 11.10"

PERFORMANCE

Fan

Airflow
CFM
4,226

Rotation
RPM
201

Energy Use
WATTS
58

Airflow Efficiency
CFMW
72.86



**MADE TO
ORDER**

235002-5218A
Matte White / Satin Brass / Matte White
Dry Indoor Rated



**MADE TO
ORDER**

235002-5231A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated



**MADE TO
ORDER**

235002-5202A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated

PIERPORT

E26 44"



MADE TO ORDER

235002-4418A
Matte White / Satin Brass / Matte White
Dry Indoor Rated



MADE TO ORDER

235002-4423A
Matte Black / Brushed Nickel / Matte Black
Dry Indoor Rated

OVERVIEW

- AC Motor 153 x 9mm
- 3 Blades, 10-deg Blade Pitch
- 3 speed Wall Control (ET4312)
- 5.5" Downrod (incl.)
- 12-deg Canopy Angle
- 80" Lead Wire

OPTIONAL CONTROLS

- Slide Wall Control Light (pg. 134)
- Remote Control (pg. 135)
- Smart Compatible (pg. 133)

FEATURES

- Dry Indoor Rated
- 2 x E26, 7W max. (bulb not incl)
- Wood Laminate Blades
- Smart Compatible
- LED Light model (pg. 120)

ACCESSORIES

- Downrods (pg. 136)
- Downrod Coupler (pg. 136)
- Sloped Ceiling Kit (pg. 137)

FUNCTIONS

- Reversible



DIMENSIONS

- Blade Sweep: 44"
- Total Height: 15.30"
- Blade Drop: 11.10"

PERFORMANCE

Fan

Airflow
CFM
2,907

Rotation
RPM
226

Energy Use
WATTS
45

Airflow Efficiency
CFMW
64.6



**MADE TO
ORDER**

235002-4431A
Brushed Nickel / Matte Black / Matte Black
Dry Indoor Rated



**MADE TO
ORDER**

235002-4402A
Matte Black / Matte Black / Matte Black
Dry Indoor Rated




**MADE TO
ORDER**

235002-4401A
Matte White / Matte White / Matte White
Dry Indoor Rated

ACCESSORIES

EGLO has you covered with a range of accessories to suit, whatever your application.

SMART COMPATIBLE KITS

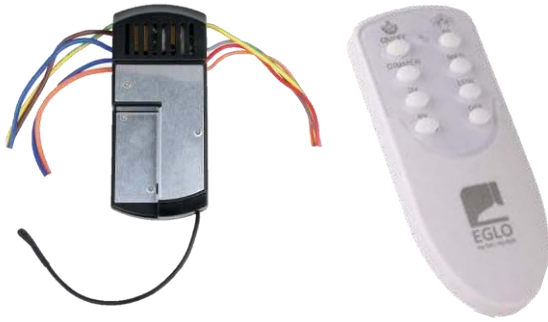

235980-SKACA

- Remote control & receiver unit for AC ceiling fans
- Fan On/Off, Fan Speeds, Fan Schedules
- Light On/Off, Light Dimming, Light Schedules
- Compatible with Alexa, Google Home, Siri & more
- Handheld remote, smart device or voice control

Compatible EGLO Fans:

- PIERPORT LED (44", 52", 60")
- PIERPORT No-Light (44", 52", 60")
- PIERPORT E26 (44", 52", 60")



235981-SKACA

- Remote control & receiver unit for AC ceiling fans
- Fan On/Off, Fan Speeds, Fan Schedules
- Light On/Off, Light Dimming, Light Schedules
- Compatible with Alexa, Google Home, Siri & more
- Handheld remote, smart device or voice control

Compatible EGLO Fans:

- SWIFTSURE LED (52")
- SWIFTSURE No-Light (52")



235982-SKDCA

- Receiver control unit for DC fans without light
- Fan On/Off, Fan Speeds, Fan Schedules
- Light On/Off, Light Dimming, Light Schedules
- Compatible with Alexa, Google Home, Siri & more
- Handheld remote, smart device or voice control

Compatible EGLO Fans:

- ARLINGTON No-Light (56")



235983-SKDCA

- Receiver control unit for DC fans with light
- Fan On/Off, Fan Speeds, Fan Schedules
- Light On/Off, Light Dimming, Light Schedules
- Compatible with Alexa, Google Home, Siri & more
- Handheld remote, smart device or voice control

Compatible EGLO Fans:

- ARLINGTON LED (56")

AC WALL CONTROLS



235984-WCACA

- Wall control for AC ceiling fans
- Slide control
- 3 speeds

Compatible EGLO Fans:

- PIERPORT No-Light (235001-44yyA)
- PIERPORT No-Light (235001-52yyA)



235987-WCACA

- Wall control for AC ceiling fans
- Slide control
- 4 speeds

Compatible EGLO Fans:

- SWIFTSURE No-Light (235040-52yyA)



235988-WCACA

- Wall control for AC ceiling fans
- Slide fan control – 4 speeds
- Slide light control

Compatible EGLO Fans:

- PIERPORT LED (235003-44yyA)
- PIERPORT LED (235003-52yyA)
- PIERPORT E26 (235002-44yyA) *
- PIERPORT E26 (235002-52yyA) *

* Bulbs must be dimmable.



235986-WCACA

- Wall control for AC ceiling fans
- Slide fan control – 4 speeds
- Slide light control

Compatible EGLO Fans:

- SWIFTSURE LED (235041-52yyA)

AC REMOTE CONTROLS



235989-RCACA

- Remote control for AC ceiling fans
- 3 speeds
- Timer 2hr, 4hr
- Light dimmer (fans with light)

Compatible EGLO Fans:

- PIERPORT No-Light (235001-xxyyA)
- PIERPORT E26 (235002-xxyyA)
- PIERPORT LED (235003-xxyyA)



235990-RCACA

- Remote control for AC ceiling fans
- 4 speeds
- Timer 2hr
- Light dimmer (fans with light)

Compatible EGLO Fans:

- SWIFTSURE No-Light (235040-52yyA)
- SWIFTSURE LED (235041-52yyA)

DOWNRODS



EGLO's standard 3/4" downrods are available in all lengths and finishes to suit your specific needs and preferences.

Equipped with pre-drilled holes and threaded connections offering enhanced safety by providing a secure and stable attachment between the downrod and the fan motor, minimizing the risk of the downrod detaching or loosening over time, even in high-speed operation.

Downrod Length	Matte White	Matte Black	Oil Rubbed Bronze	Satin Brass	Brushed Nickel
12"	235997-1201A	235997-1202A	235997-1212A	235997-1218A	235997-1232A
18"	235997-1801A	235997-1802A	235997-1812A	235997-1818A	235997-1832A
24"	235997-2401A	235997-2402A	235997-2412A	235997-2418A	235997-2432A
36"	235997-3601A	235997-3602A	235997-3612A	235997-3618A	235997-3632A
48"	235997-4801A	235997-4802A	235997-4812A	235997-4818A	235997-4832A
60"	235997-6001A	235997-6002A	235997-6012A	235997-6018A	235997-6032A
72"	235997-7201A	235997-7202A	235997-7212A	235997-7218A	235997-7232A

DOWNROD COUPLER (JOINER)

When more than one downrod is needed, EGLO's Downrod Coupler can join two rods up to a maximum of 144".



				
Matte White	Matte Black	Oil Rubbed Bronze	Satin Brass	Brushed Nickel
235998-DJ01A	235998-DJ02A	235998-DJ12A	235998-DJ18A	235998-DJ32A

SLOPED CEILING CANOPY



EGLO sloped ceiling canopies are designed to work with all EGLO 3/4" ID downrods, and blend seamlessly with the ceiling and fan, providing a clean and finished look to your installation up to 38 degrees, indoors or outdoors.

Indoor Dry rated models available in various metal finishes to suit all indoor fans.

Damp rated models made from UV resistant ABS in various finishes to suit all Damp or Wet rated fans.



Color		Model	Location
	Matte White	235999-CI01A	Dry
	Matte Black	235999-CI02A	Dry
	Oil Rubbed Bronze	235999-CI12A	Dry
	Satin Brass	235999-CI18A	Dry
	Brushed Nickel	235999-CI32A	Dry
	Matte White	235999-CD01A	Damp
	Matte Black	235999-CD02A	Damp
	Oil Rubbed Bronze	235999-CD12A	Damp

SPECIFICATIONS

SERIES	Page No.	Blade Sweep	Motor Type	Motor Size	Incl. Downrod	Lead Wire	Total Height	Blade Drop	Blade Pitch	Max. Slope incl.	Max. Slope with Kit	Inc. Control	Speeds
Arlington 56"	61	56"	DC	155*16mm	4.5"	80"	11.93"	11.93"	Variable	20°	38°	Remote	5
Arlington LED 56"	65	56"	DC	155*16mm	4.5"	80"	12.26"	11.93"	Variable	20°	38°	Remote	5
Mission Bay 52"	44	52"	DC	155*12mm	6"	80"	12.04"	11.60"	Variable	0°	38°	Remote	5
Mission Bay 60"	46	60"	DC	155*16mm	6"+12"	80"	12.04"	11.54"	Variable	0°	38°	Remote	5
Mission Bay 72"	48	72"	DC	155*16mm	6"+12"	80"	12.54"	12.26"	Variable	0°	38°	Remote	5
Mission Bay LED 52"	52	52"	DC	155*12mm	6"	80"	12.45"	11.60"	Variable	0°	38°	Remote	5
Mission Bay LED 60"	54	60"	DC	155*16mm	6"+12"	80"	12.45"	11.54"	Variable	0°	38°	Remote	5
Mission Bay LED 72"	56	72"	DC	155*16mm	6"+12"	80"	12.95"	12.26"	Variable	0°	38°	Remote	5
Naples LED 52"	106	52"	DC	153*10mm	6"	40"	14.96"	13.58"	11°	13°	38°	Remote	6
Pierport 44"	122	44"	AC	153*9mm	5.5"	40"	12.50"	11.10"	10°	12°	38°	Wall	3
Pierport 52"	124	52"	AC	153*12mm	5.5"	40"	12.50"	11.10"	10°	12°	38°	Wall	3
Pierport 60"	126	60"	AC	153*18mm	5.5"	40"	12.50"	11.10"	10°	12°	38°	Wall	3
Pierport E26 44"	128	44"	AC	153*9mm	5.5"	40"	15.30"	11.10"	10°	12°	38°	Wall	3
Pierport E26 52"	130	52"	AC	153*12mm	5.5"	40"	15.30"	11.10"	10°	12°	38°	Wall	3
Pierport E26 60"	132	60"	AC	153*18mm	5.5"	40"	15.30"	11.10"	10°	12°	38°	Wall	3
Pierport LED 44"	116	44"	AC	153*9mm	5.5"	40"	12.91"	11.10"	10°	12°	38°	Wall	3
Pierport LED 52"	118	52"	AC	153*12mm	5.5"	40"	12.91"	11.10"	10°	12°	38°	Wall	3
Pierport LED 60"	120	60"	AC	153*18mm	5.5"	40"	12.91"	11.10"	10°	12°	38°	Wall	3

SPECIFICATIONS

Light Kit	Light Watt	Light Lumen	Light CRI	Timer (Hours)	Reversible	Smart Control	ENERGY STAR	Airflow High Speed	Efficiency High Speed	Wattage High Speed	RPM High Speed
-	-	-	-	1,2,4,8hr	Yes	Optional	No	7,127	345.76	29	186
Incl	20W	1550lm (2700K) 1850lm (3000K) 1900lm (4000K)	84 (2700K) 84 (3000K) 82 (4000K)	1~8hr	Yes	Optional	No	7,127	345.76	29	186
-	-	-	-	1,2,4,8hr	Yes	Built In	No	6,114	254.73	24	193
-	-	-	-	1,2,4,8hr	Yes	Built In	No	8,381	288.99	29	176
-	-	-	-	1,2,4,8hr	Yes	Built In	No	8,936	297.86	30	131
Incl	22W	1780lm (2700K) 2000lm (3000K) 2100lm (4000K)	84 (2700K) 84 (3000K) 83 (4000K)	2,8hr	Yes	Built In	No	6,114	254.73	24	193
Incl	22W	1780lm (2700K) 2000lm (3000K) 2100lm (4000K)	84 (2700K) 84 (3000K) 83 (4000K)	2,8hr	Yes	Built In	No	8,381	288.99	29	176
Incl	22W	1780lm (2700K) 2000lm (3000K) 2100lm (4000K)	84 (2700K) 84 (3000K) 83 (4000K)	2,8hr	Yes	Built In	No	8,936	297.86	30	131
Incl	20W	1720lm (2700K) 1820lm (3000K) 1900lm (4000K)	82 (3000K)	2,4,8hr	Yes	-	No	6,115	235.19	26	172
-	-	-	-	-	Yes	Optional	No	2,907	64.60	45	226
-	-	-	-	-	Yes	Optional	No	4,226	72.86	58	201
-	-	-	-	-	Yes	Optional	No	5,103	85.04	60	166
Incl	Bulb	-	-	-	Yes	Optional	No	2,907	64.60	45	226
Incl	Bulb	-	-	-	Yes	Optional	No	4,226	72.86	58	201
Incl	Bulb	-	-	-	Yes	Optional	No	5,103	85.04	60	166
Incl	20W	1560lm (2700K) 1750lm (3000K) 1700lm (4000K)	84 (2700K) 85 (3000K) 83 (4000K)	-	Yes	Optional	No	2,907	64.60	45	226
Incl	20W	1560lm (2700K) 1750lm (3000K) 1700lm (4000K)	84 (2700K) 85 (3000K) 83 (4000K)	-	Yes	Optional	No	4,226	72.86	58	201
Incl	20W	1560lm (2700K) 1750lm (3000K) 1700lm (4000K)	84 (2700K) 85 (3000K) 83 (4000K)	-	Yes	Optional	No	5,103	85.04	60	166

SPECIFICATIONS

SERIES	Page No.	Blade Sweep	Motor Type	Motor Size	Incl. Downrod	Lead Wire	Total Height	Blade Drop	Blade Pitch	Max. Slope incl.	Max. Slope with Kit	Inc. Control	Speeds
Surflite 52"	89	52"	DC	106*18mm	5.5"	80"	12.96"	12.95"	Variable	20°	38°	Remote	5
Surflite 60"	93	60"	DC	106*18mm	5.5"+12"	80"	12.69"	12.68"	Variable	20°	38°	Remote	5
Surflite LED 52"	97	52"	DC	108*18mm	5.5"	80"	13.51"	13.07"	Variable	20°	38°	Remote	5
Surflite LED 60"	101	60"	DC	108*18mm	5.5"+12"	80"	13.51"	12.80"	Variable	20°	38°	Remote	5
Swiftsure 52"	110	52"	AC	172*18mm	5.5"	40"	12.30"	10.94"	Variable	12°	38°	Wall	3
Swiftsure LED 52"	112	52"	AC	172*18mm	5.5"	40"	12.98"	10.94"	Variable	12°	38°	Wall	3
Tirol 52"	71	52"	DC	155*12mm	4.5"	80"	12.20"	11.81"	Variable	20°	38°	Remote	5
Tirol 60"	75	60"	DC	155*16mm	4.5"+12"	80"	12.20"	11.73"	Variable	20°	38°	Remote	5
Tirol LED 52"	79	52"	DC	155*12mm	4.5"	80"	12.20"	11.81"	Variable	20°	38°	Remote	5
Tirol LED 60"	83	60"	DC	155*16mm	4.5"+12"	80"	12.20"	11.73"	Variable	20°	38°	Remote	5
Westerly 52"	15	52"	DC	155*12mm	6"	80"	15.18"	14.55"	Variable	0°	38°	Remote	5
Westerly 60"	19	60"	DC	155*12mm	6"+12"	80"	15.18"	14.65"	Variable	0°	38°	Remote	5
Westerly 72"	23	72"	DC	155*20mm	6"+18"	80"	15.06"	15.06"	Variable	0°	38°	Remote	5
Westerly 84"	27	84"	DC	155*20mm	6"+18"	80"	15.18"	14.94"	Variable	0°	38°	Remote	5
Williwaw 52"	34	52"	DC	155*16mm	6"	80"	13.18"	13.18"	Variable	0°	38°	Remote	5
Williwaw 60"	36	60"	DC	155*16mm	6"+12"	80"	13.18"	13.18"	Variable	0°	38°	Remote	5
Williwaw 72"	38	72"	DC	155*20mm	6"+18"	80"	13.18"	13.18"	Variable	0°	38°	Remote	5
Williwaw 84"	40	84"	DC	155*20mm	6"+18"	80"	13.18"	13.18"	Variable	0°	38°	Remote	5
Westerly Light Kit	30	-	-	-	-	-	2.15"	-	-	-	-	-	-

SPECIFICATIONS

Light Kit	Light Watt	Light Lumen	Light CRI	Timer (Hours)	Reversible	Smart Control	ENERGY STAR	Airflow High Speed	Efficiency High Speed	Wattage High Speed	RPM High Speed
-	-	-	-	1,2,4,8hr	Yes	Built In	No	5,556	213.68	26	180
-	-	-	-	1,2,4,8hr	Yes	Built In	No	6,587	243.95	27	167
Incl	20W	1790lm (2700K) 2000lm (3000K) 2200lm (4000K)	84 (2700K) 84 (3000K) 82 (4000K)	2,8hr	Yes	Built In	No	5,556	213.68	26	180
Incl	20W	1790lm (2700K) 2000lm (3000K) 2200lm (4000K)	84 (2700K) 84 (3000K) 82 (4000K)	2,8hr	Yes	Built In	No	6,587	243.95	27	167
-	-	-	-	-	Yes	Optional	Yes	4,735	100.74	47	170
Incl	20W	1560lm (2700K) 1750lm (3000K) 1700lm (4000K)	84 (2700K) 85 (3000K) 83 (4000K)	-	Yes	Optional	Yes	4,735	100.74	47	170
-	-	-	-	1,2,4,8hr	Yes	Built In	No	6,471	248.90	26	185
-	-	-	-	1,2,4,8hr	Yes	Built In	No	8,124	319.86	25.4	166
Incl	20W	2300lm (2700K) 2400lm (3000K) 2500lm (4000K)	82 (2700K) 84 (3000K) 84 (4000K)	2,8hr	Yes	Built In	No	6,471	248.90	26	185
Incl	20W	2300lm (2700K) 2400lm (3000K) 2500lm (4000K)	82 (2700K) 84 (3000K) 84 (4000K)	2,8hr	Yes	Built In	No	8,124	319.86	25.4	166
-	-	-	-	2,8hr	Yes	Built In	Yes	5,592	233.00	24	201
-	-	-	-	2,8hr	Yes	Built In	Yes	6,986	211.69	33	179
-	-	-	-	2,8hr	Yes	Built In	Yes	10,022	250.54	40	150
-	-	-	-	2,8hr	Yes	Built In	Yes	10,666	266.65	40	99
-	-	-	-	1,2,4,8hr	Yes	No	Yes	6,686	196.64	34	192
-	-	-	-	1,2,4,8hr	Yes	No	Yes	7,624	211.78	36	161
-	-	-	-	1,2,4,8hr	Yes	No	Yes	9,576	217.64	44	128
-	-	-	-	1,2,4,8hr	Yes	No	Yes	10,997	239.07	46	99
Incl	22W	1850lm (2700K) 2100lm (3000K) 2300lm (4000K)	83 (2700K) 83 (3000K) 82 (4000K)	-	-	Yes	-	-	-	-	-

NOTES

A large grid of graph paper for taking notes, consisting of 20 columns and 30 rows of small squares.

NOTES

A large grid of graph paper for taking notes, consisting of 20 columns and 40 rows of small squares.

All previous catalogues and price lists are no longer valid with the issue of this catalogue. Errors, misprints, model and price changes and technical modifications are reserved. We deliver based on our terms of delivery and payment. Our products comply with all applicable laws, regulations, and industry standards, including but not limited to: Consumer Product Safety Improvement Act (CPSIA), Federal Communications Commission (FCC) Compliance, Environmental Protection Agency (EPA) Compliance, Energy Star Compliance (if applicable), California Proposition 65, Packaging and Labelling Compliance.

This Product Compliance Statement is a testament to our commitment to delivering products that not only meet the highest quality and performance standards but also contribute to the safety, health, and environmental well-being of our customers and communities in the United States.

The content of this catalogue is protected under copyright law for EGLO Leuchten GmbH. all rights reserved. Our specific written consent must be obtained before using any illustrations and texts. the pictures are 4C prints and may differ from the original.

The product pictures and ambiances in this catalogue can deviate from reality, and they do not necessarily concur with the usual application of the product. EGLO does not assume liability for the correctness, completeness or the application depiction of the products and/or the product information.

Pictures: EGLO, adobe Stock, istockphoto.com



EGLO USA INC.: 3640 Royal South Parkway, ATLANTA, GEORGIA 30349
Phone: +1 404 477 5601, Email: info-usa@eglo.com