SLV
EXPERIENCE LIGHT

BIG WHITE®

'22

SLV LIGHTING CATALOGUE

OUR PROMISE.



FAST AND
RELIABLE DELIVERY
24h (GERMANY), 48h (EUROPE)



5 YEAR
WARRANTY*



PRICE AND PERFORMANCE
IN PERFECT HARMONY



GERMAN
ENGINEERING



WE ARE YOUR WAREHOUSE
98% AVAILABILITY

INTERNATIONAL SALES

Telephone number:
+49 2451 4833 - 355

Fax number:
+49 2451 4833 - 179

Mail:
export@slv.de

Monday - Thursday:
08:00 - 17:00

Friday:
08:00 – 14:30

TECHNICAL SERVICE

Telephone number:
+49 2451 4833 - 600

Fax number:
+49 2451 4833 - 519

Mail:
service@slv.de

Monday - Thursday:
08:00 - 17:00

Friday:
08:00 – 14:30

CENTRAL

SLV GmbH
Daimlerstrasse 21-23
52531 Uebach-Palenberg
Germany

Telephone number:
+49 2451 4833 - 0

Monday - Thursday:
08:00 - 17:00

Friday:
08:00 – 14:30

slv.com

LOGISTICS CENTRE

SLV GmbH
Werkstrasse 8 – 10
52531 Uebach-Palenberg
Germany

CUSTOMER SATISFACTION

SLV will impress you with its excellent customer service and delivery service! Our committed team will be happy to help you out with any request!

Call us **(+49 2451 4833 - 355),** contact us via e-mail **(export@slv.de)**, or order directly from our website **slv.com**.
We look forward to hearing about your project!

CUSTOMER INFO

Please note our guidelines for returns and conditions for repairs, which can be found on our website: **slv.com/en/service/downloads.**

Unless otherwise agreed, all deliveries and services are subject to our General Terms and Conditions, which can be viewed on our website at **slv.com/en/general-terms-and-conditions.**

SLV has the right to adapt the relevant price list in line with changes in market conditions, in the event of substantial changes in procurement costs or similar circumstances.

*Please note the warranty conditions under slv.com → Service → Downloads → Warranty Conditions

BIG WHITE®

Whether printed or digital – with us, the choice is yours.

SLV.COM – EXPERIENCE LIGHT ONLINE

On our online platform you will find the complete SLV range with all product details, descriptions, availability, and much more. Our filter makes looking for the perfect product easy. Useful design files, 3D data, configurators and calculation tools such as FastCalc by DIAL are there to help you create your perfect lighting design. Always in line with the times, with news from the world of lighting. Visit **slv.com**




THE DIGITAL BIG WHITE® CATALOG – YOUR FLEXIBLE COMPANION



Our digital catalog is a tool that will make your customer visits more efficient than ever: as well as having a digital copy of our main catalog to hand, you also get additional services offering a quick insight into the specific SLV products you want to see.

SLV EXPERIENCE LIGHT APP: NOW YOU CAN EXPERIENCE REAL INSPIRATION VIRTUALLY TOO.

Understand in advance what SLV lights can do for customers.
With our augmented reality app, SLV EXPERIENCE LIGHT, you can always find the perfect lighting – on the spot, indoors and outdoors. The app is extremely easy to use, making it an important consultation tool for electrical installers and lighting designers. Because where the customer's imagination ends, the possibilities of our app begin: give a virtual presentation of how our lights will work in their future location.

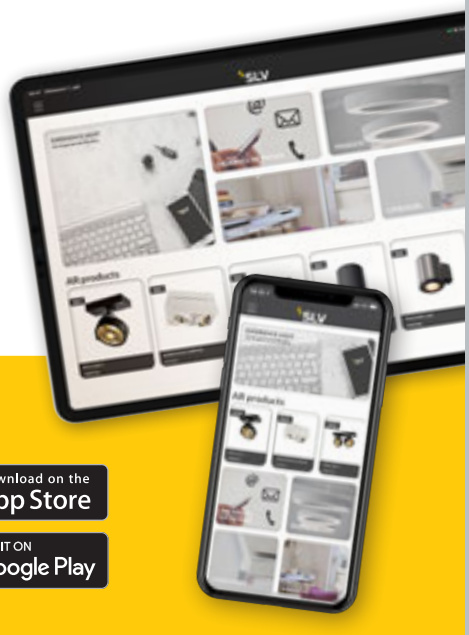

Download the SLV EXPERIENCE LIGHT app for free.
Download our free augmented reality app from the iTunes Apple Store or Google Play Store onto your smartphone or tablet.

Download on the App Store

GET IT ON Google Play

SLV – EXPERIENCE LIGHT EVEN BETTER.

Light illuminates, sets the scene, and influences us in all areas. Because digitalization, sustainability and quality are more in focus than ever before, SLV is always reinventing its appeal.

EXPERIENCE LIGHT.
SLV's goal is to make light an experience in all its facets: with products that are progressive, resource-saving and high-quality. We also provide a first-class service, reliable delivery, and easy installation to significantly reduce expenses in terms of time, costs, and effort.




TRUST SUSTAINABILITY.
SLV develops its lights in Germany and guarantees satisfaction through consistent quality assurance. In addition, we have a strong focus on sustainability, which we consider holistically across all core processes.

CERTIFIED QUALITY.
With its German engineering approach, SLV develops lights and guarantees satisfaction through consistent quality assurance. SLV luminaires are put through their paces in our own laboratories, which are located at SLV's German headquarters in Übach-Palenberg (North Rhine-Westphalia) and in Shanghai, Asia. This means that we don't just offer quality, we guarantee it: for 5 years. We also focus on sustainability, which we consider holistically across all core processes.
As you can see: you can rely on the SLV brand.

FUTURE-PROOF LIGHTING.
Constant product development and finding new solutions are what motivate us at SLV. Whether we are developing digital technologies or setting new standards, intelligently networking devices or offering system solutions: SLV stands for modern and future-proof lighting.

RELIABLE DELIVERY.
With a constant product availability of 98%, we can supply all customers reliably and quickly from our German logistics centre.

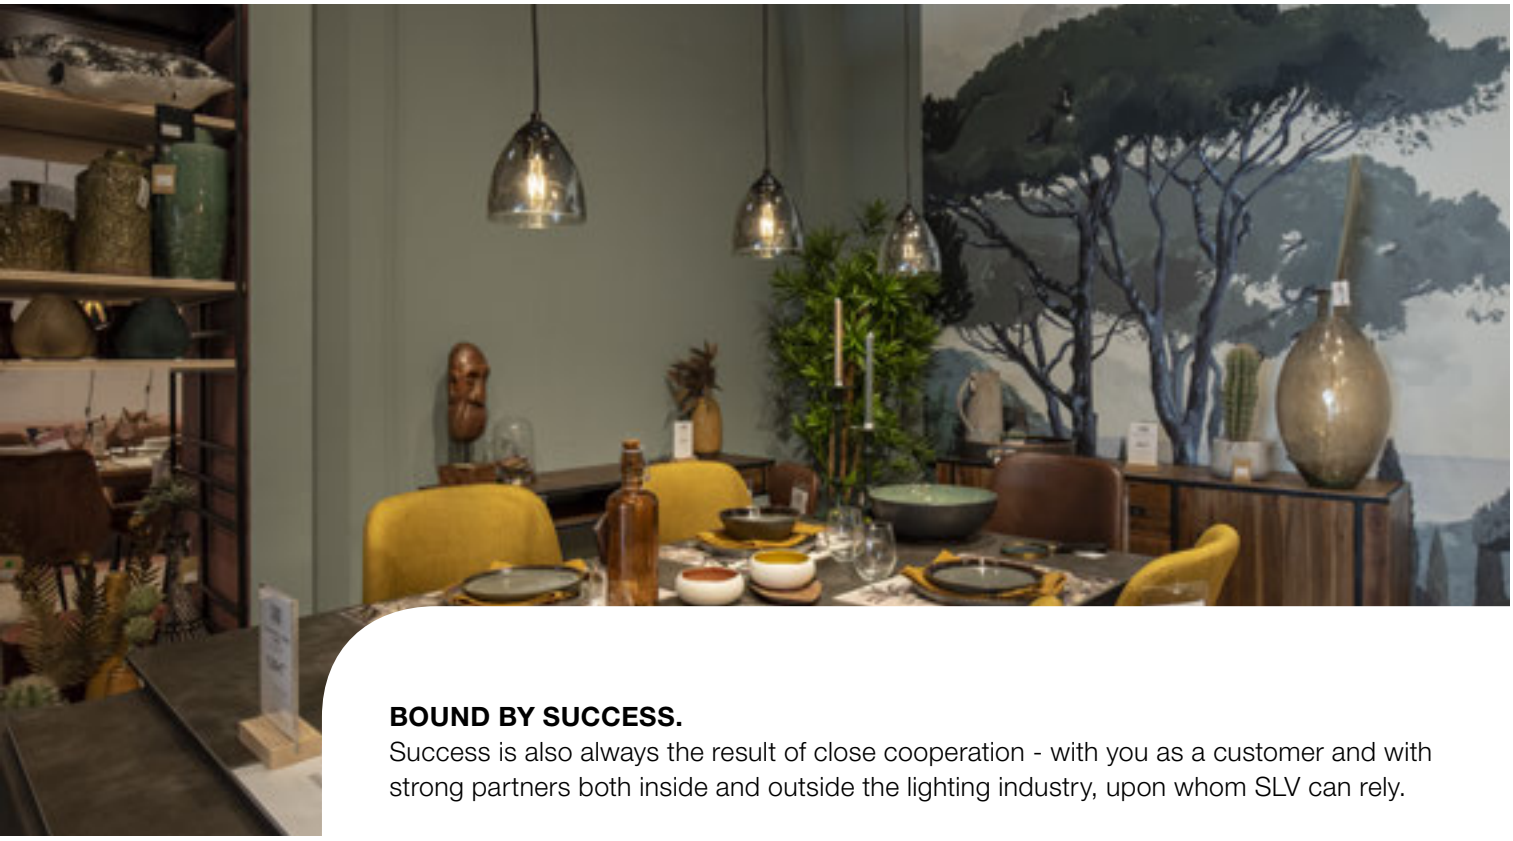


BOUND BY SUCCESS.
Success is also always the result of close cooperation - with you as a customer and with strong partners both inside and outside the lighting industry, upon whom SLV can rely.

GOOD FOR THE ENVIRONMENT.
GOOD FOR YOU.

Every day, we strive towards our aim of achieving sustainable results across the entire value chain. With various measures in the areas of production, packaging, logistics, and more.

THE FUTURE IS NOW.
At SLV we focus on avoiding, reducing, reusing and recycling: we design products and packaging in an environmentally friendly way, reduce hidden waste, cut emissions and optimize logistics processes. Today, we are already consistently focusing on sustainability in the development of lighting technology.

SUSTAINABLE PACKAGING SOLUTIONS.
Thanks to packaging solutions on demand (On Demand Packaging), we can save time, packaging material and costs. By using customized boxes from Packsize NOW, we can significantly reduce the amount of corrugated cardboard and filling material used. Our lower transport volume also results in fewer CO_2 emissions during shipping. To this end, we rely on recycled material, limit ourselves to two printing inks, and try to avoid adhesives and glossy varnishes as much as possible.

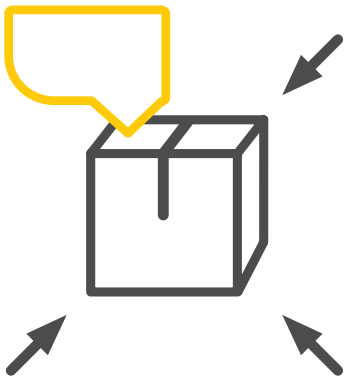

A LARGE CATALOG WITH A SMALL CO_2-FOOTPRINT.
In addition to our classic DIN A4 catalog size, we offer the BIG WHITE® in a handy DIN A5 format as well as digitally. This helps us to conserve valuable resources but also reduce CO_2 emissions and costs. Our printed BIG WHITE® is FSC Mix certified – in addition to using 100% recycled paper, we also only use paper that is obtained from sustainably managed forests. This allows us to make our catalog production sustainable and environmentally friendly.






1004757 592

PRODUCTS WITH RECYCLED SECONDARY RESOURCES.

To preserve resources, we successively replace primary raw materials with secondary raw materials whenever technically possible. Our SAMRINA ground spike light, for example, is partly made using a plastic that contains up to 35% recycled raw materials. The proportion of recycled material in the total mass of the light is 17%. At the same time, SAMRINA impresses customers with the quality and durability they expect from SLV. To protect the environment, we ensure that all our products are easy to recycle at the end of their lifespan.

NEW **ENERGY EFFICIENCY CLASSES.**

As of September 2021, new rules for the environmentally compatible design (ecodesign) and energy consumption labeling (product information) of energy-relevant products apply. These rules affect lightsources such as LED modules or lamps with pedestals.

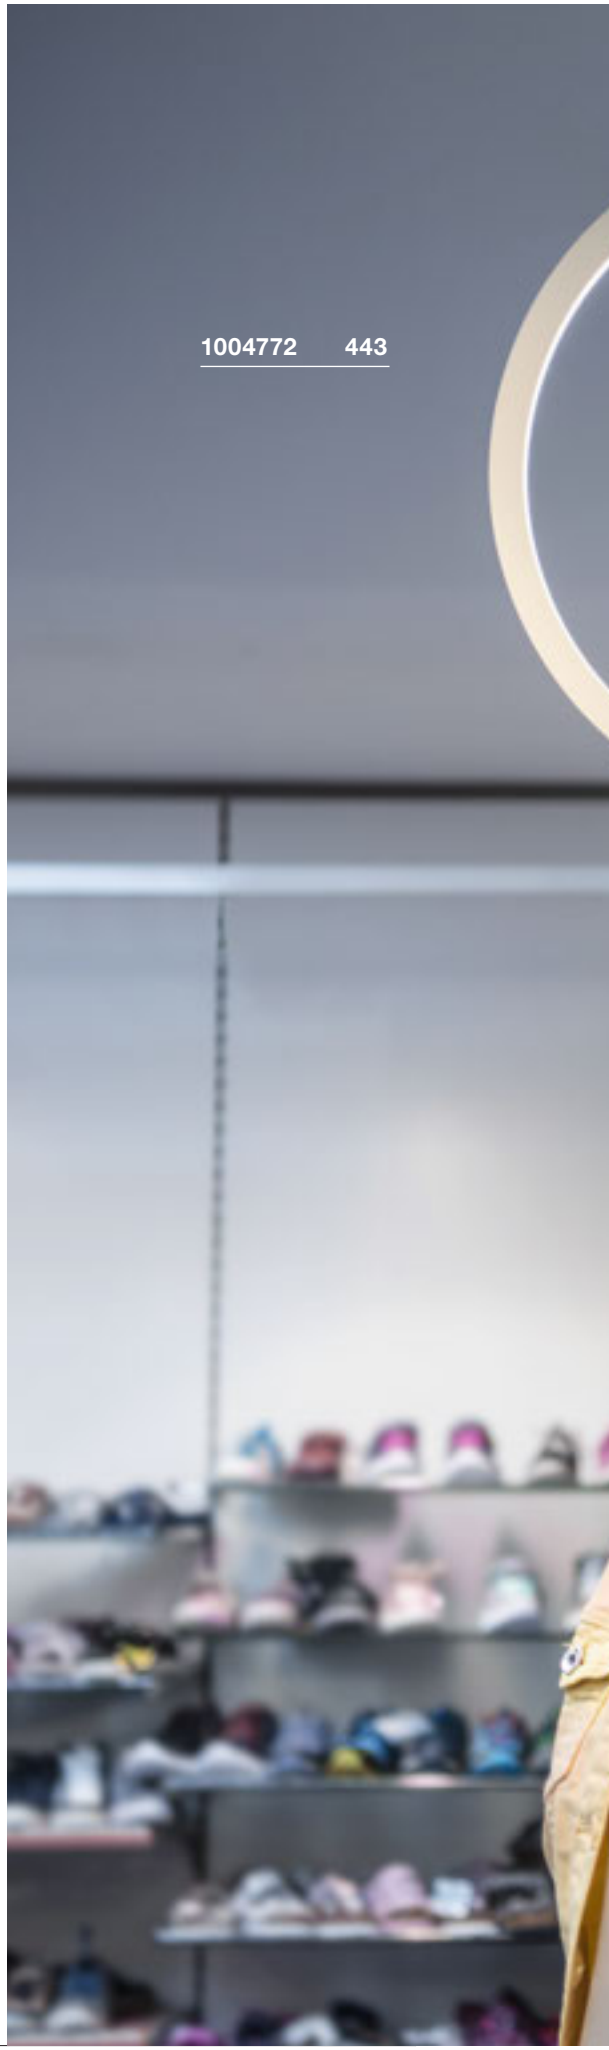

NO NEW LABEL FOR LIGHTS.
The implementation of the new regulations for lighting is governed by EU regulations 2019/2015 or 2021/340 (product information) and 2019/2020 or 2021/341 (product design), which replace and supplement the previous requirements. These rules affect lightsources such as lamps with pedestals and LED modules. Lights with integrated non-destructively removable lightbulbs, on the other hand, are regarded as surrounding products and do not receive their own energy label – but the energy class of the integrated lightbulb must be stated in the instructions.

A FUTURE-PROOF SCALE.
The new EU regulation provides for a rescaling of the energy classes. The future energy label scale ranges from A to G and is not related to the previous scale. To ensure that the classification remains sustainable, the legislator has designed the requirements in such a way that the higher classes can only be reached in the future. This means, to give an example, that even a lightbulb with an energy class E has good efficiency.

NEW ENERGY LABELS.
The design of the new energy labels has also changed. To ensure that the energy label can be used in all EU member states, the linguistic components have been removed. The label also features a QR code that refers to a product's corresponding entry in the publicly accessible part of the European product database for energy labelling (EPREL database).

COMMITTED TO EFFICIENCY.
As a company, SLV ensures that all products comply with the new regulations. Stationary traders with a stock of affected products acquired before September 1, 2021 will have a transitional period of 18 months during which the old energy labels may continue to be used.






DO YOU KNOW..?

How to understand the new
energy efficiency classes.

Our example – the SLV One 40 Track:



The product continues to show good efficiency: only the classification itself changes. This ensures that the energy efficiency classes remain valid in the long term.


You can find more information about the light in question by using the QR code on the energy label.
Simply scan it!

NEW **PRODUCT PRESENTATION.**

We have thoroughly revised our product presentation – so that you can offer your customers optimum advice. Clear, detailed, and customer-orientated.

A LOOK AT THE ESSENTIALS

New icons and symbols summarize important technical details for you.



- Integrated LED technology
- Luminous flux
- Color temperature
- Color rendering index



- Light with lamp holder
- Lamp
- Maximum wattage

KNOW HOW LONG IT LASTS

All information is marked with new symbols.

PRODUCT DETAILS

All technical product information for the lighting professional.

LAMP DETAILS

Always find the matching lamp

RECOMMENDED LAMP

Complete your pedestal lamp and order the matching lamp at the same time.

RECOMMENDED ACCESSORIES

Expand the function of your light and complement it with matching accessories.

EEC INFORMATION


The energy efficiency of all lightbulbs and variants at a glance.


		A→G
1001309, 1001310	3700lm 3000K	A→G E



WORKLIGHT
FL

NEW








7600lm

INSIDE

CRI 80

4000K



IP 20 | IK02 | 80° | 110° | UGR 19 | L80B10

250

200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

• Euro plug

		A→G
Up/Down	3800lm 4000K	E

Options	Prod. no.	EUR
Up: 3800lm | 4000K | CRI80 Down: 3800lm | 4000K | CRI80		
black	1005390	

Better readability
Our “NEW", “NEW VARIANT” and “FOLLOWER” products are now even easier to recognize.

At a glance:
The most important information, summarized for your customers.


For the lighting professional
Technical details, accessories, and suitable lamps.


New EEC information
Sustainable and economical LED lighting. For the future, too.


NEW ONE 60


NEW ONE LINEAR


NEW PANEL TRACK

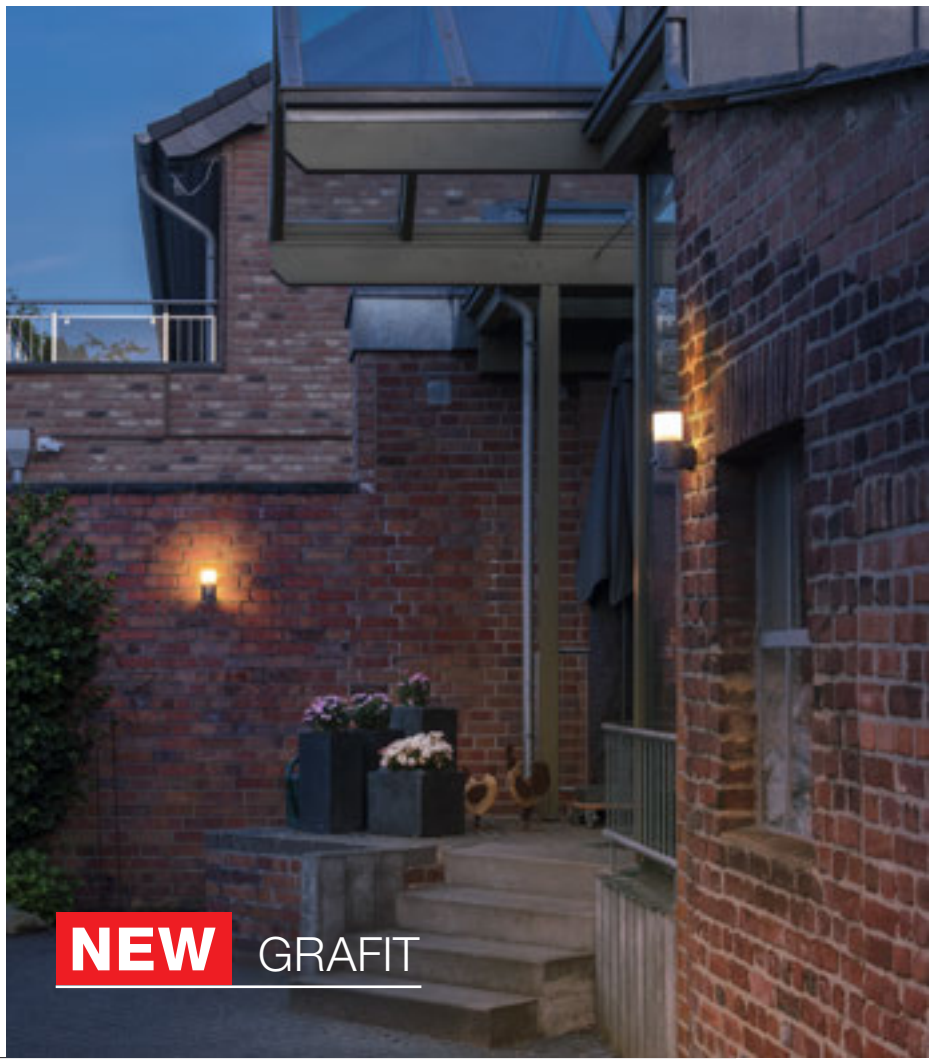
NEW GRAFIT

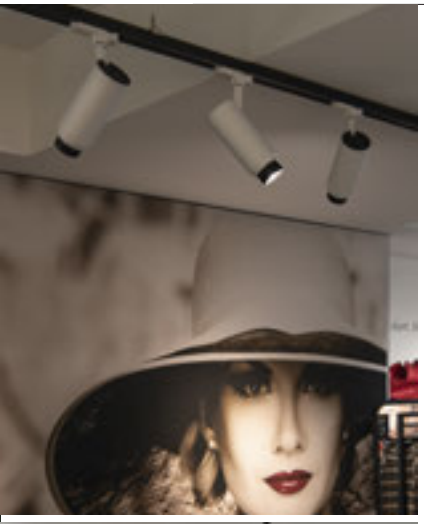







NUMINOS® 014 - 095

N

Lighting system ... 014 - 027
Downlights ... 028 - 061
High-voltage 3-phase track systems ... 062 - 071
Wall and ceiling lights ... 072 - 073
Ceiling lights ... 074 - 087
Pendant lights ... 088 - 095

INDOOR 096 - 507

Table and floor lamps ... 096 - 113
Pendant lights ... 114 - 179
Wall lights ... 180 - 245
Ceiling lights ... 246 - 289
Wall and ceiling lights ... 290 - 341

Recessed lights ... 342 - 423

High-voltage 3-phase track systems ... 424 - 459
High-voltage single-phase track systems ... 460 - 485
High-voltage Easytec® II track system ... 486 - 495
Low-voltage cable system ... 496 - 507

OUTDOOR 508 - 731

Mobile lights and floor lights ... 508 - 583
Spotlights ... 584 - 603
Wall and ceiling lights ... 604 - 693

Recessed wall lights ... 694 - 703
Recessed ceiling lights ... 704 - 713
Recessed floor lights ... 714 - 731

PROFILE SOLUTIONS 732 - 749

LED STRIPS 750 - 763

CONNECTED LIGHTING 764 - 787

DALI – Professionally connected lighting. ... 764 - 777
ZIGBEE® 3.0 – The smart wireless system ... 778 - 787

ACCESSORIES 788 - 807

A+

LAMPS 808 - 819

LUMINAIRE FAMILIES, INDEX AND REFERENCES 820 - 866

0-9 A-Z

SLV's luminaire families ... 820 - 835
Numerical ... 838 - 851
Alphabetical ... 855 - 859
References ... 860 - 866

You can find more lights and variants at www.slv.com

All prices are recommended retail prices (RRP) and listed without VAT.







NUMINOS®
ONE LIGHTING SYSTEM – A THOUSAND POSSIBILITIES.

THE PERFECT LIGHTING SOLUTION FOR EVERY CONTEXT.

THE FREELY CONFIGURABLE LIGHTING SYSTEM THAT CASTS A GOOD LIGHT ON EVERY SETTING.

No two projects are the same, but many projects demand a coherent lighting and design concept. NUMINOS® is a perfectly coordinated lighting system that harmonizes function, design and technology. For planners and doers. For every need. For maximum variety with minimum effort.

NUMINOS®



HIGH-PERFORMANCE LED MODULE WITH BRILLIANT COLOR RENDERING



WIDE SELECTION OF DOWNLIGHTS AND SPOTS FOR A HARMONIOUS DESIGN CONCEPT

MORE FREEDOM WITH A SYSTEM.


WHATEVER YOU'RE PLANNING –
THE NUMINOS® LIGHTING SYSTEM
CREATES SPACE FOR NEW IDEAS.



The NUMINOS® lighting system offers constant lighting characteristics and modern design for all uses:

- **Office spaces**
- **Shops & boutiques**
- **Hotels & gastronomy**
- **At home**
- **and much more**

From hotels and offices to commercial or private rooms and from application to technology right through to detailed design: one great feature is that the modular downlights and spotlights can be configured exactly as required, depending on the design or space in question. And the more multifaceted your project is, the more you benefit from the NUMINOS® lighting system.

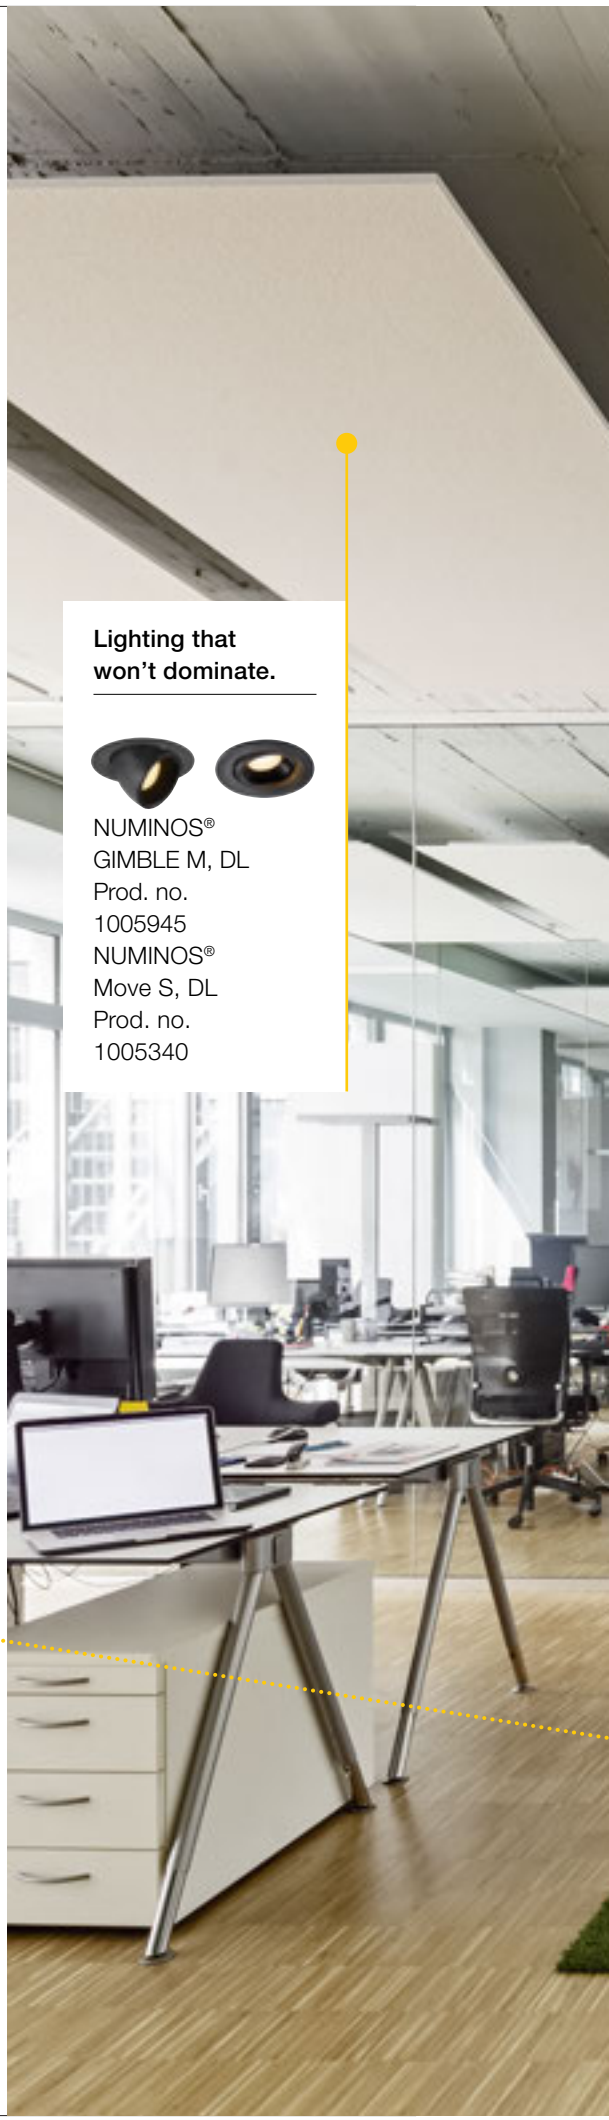

Lighting that won't dominate.

NUMINOS®
GIMBLE M, DL
Prod. no.
1005945
NUMINOS®
Move S, DL
Prod. no.
1005340

Highlights that shine down.



NUMINOS® XL, CL
Prod. no.
1005767

Free for all dimensions.



NUMINOS®
ZOOM M, 3-phase
Prod. no.
1006116

Perfect for suspending and height-adjustable.



NUMINOS® XL, PD
Prod. no.
1005783


UNPARALLELED VARIETY, SHARED HIGHLIGHTS.

Choose between:

- Downlight or spotlight
- Various sizes and diameters
- Housing colors (black/white)
- Reflector variants
- Fixed or swiveling versions
- Performance classes

The different variants feature:

- High-performance LED module with the light colors 2700K/3000K/4000K
- Color quality CRI>90
- Glare rating UGR min. <22

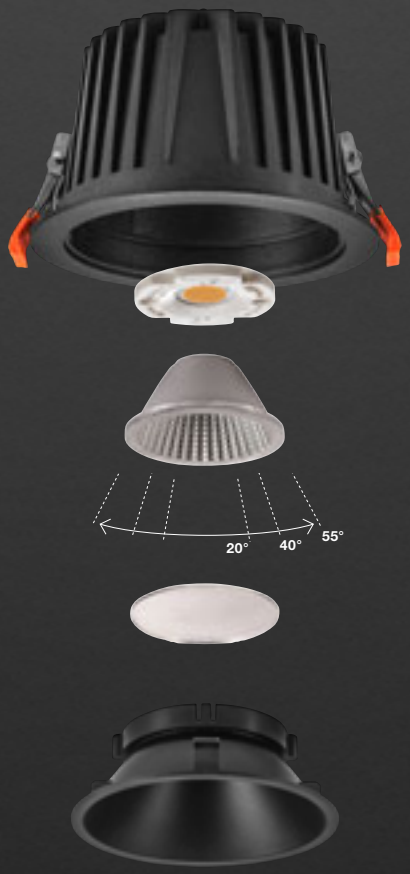

DOWNLIGHTS

Available in seven versions (68-75mm to 176-186mm) with a high-performance LED module in three light colors (2700K, 3000K, 4000K) and glare ratings (UGR 16, 19, 22).

Selectable reflectors with half beam angles of 20°, 40° or 55°.

Various effect filters (frosted / prismatic / elliptical / honeycomb) available as accessories.

The decorative ring can be selected in white, black or chrome as a visible border.

NUMINOS® downlights are available as fixed or swiveling versions (4x fixed and 3x swiveling and rotating).



XS S M L XL

Accessories with a system:
You can easily add an optional driver (on/off, phase dimming, DALI) and suitable diffusers using the color coding system.

You can find drivers and diffusers for the SLV NUMINOS® Downlight system on pages 58-61.

A WELL-THOUGHT-OUT LIGHTING SYSTEM DOWN TO THE LAST DETAIL.

Thanks to the wide selection of modules, there is a suitable solution to meet every need. Fixed configuration. Fast and safe to install.



SPOTLIGHTS

Available in three housing sizes (65x155mm, 85x175mm, 100x203mm) with high-power LED module in three light colors (2700K, 3000K, 4000K).

Thanks to the built-in LED driver (phase dimming, DALI), all spotlights are suitable for direct connection to 230V mains voltage.

Selectable lenses with half beam angles of 24°, 36° or 60°.

NUMINOS® spotlights are available as swiveling or fixed ceiling spots, pendant lights and as spots for 3-phase track systems.




Easy to install.

Because efficiency always pays off, SLV lights are easy, quick and safe to install. Connection via mounting plate, tracksystem, quick-release coupling, spring clips and color-coded drivers for downlights offers a key advantage: it saves you time and effort – and therefore costs.



A LIGHTING SYSTEM. FOR EVERY SCENARIO.

For success in all conditions, you need team players who shine with individual strengths. Discover the applications for which the individual NUMINOS® lights are particularly well suited.

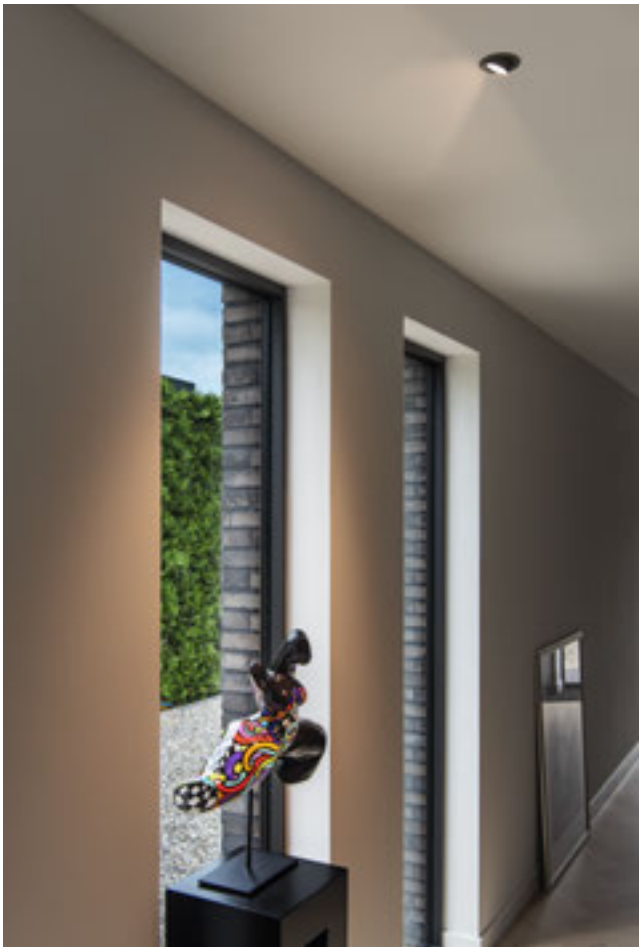

Transform objects into eye-catching featues



NUMINOS®
GIMBLE XS, DL
Prod. no.
1005817

Downlights.
Unobtrusive, modern and space-saving lighting that directs the gaze to particular objects or the room in general: the downlights in the NUMINOS® lighting system can be used variably in commercial and private settings.




For elegant illumination of lounge areas.


NUMINOS®
GIMBLE XS, DL
Prod. no.
1005843

For entrance areas that really welcome guests in.



NUMINOS® XS, DL
Prod. no.
1005520

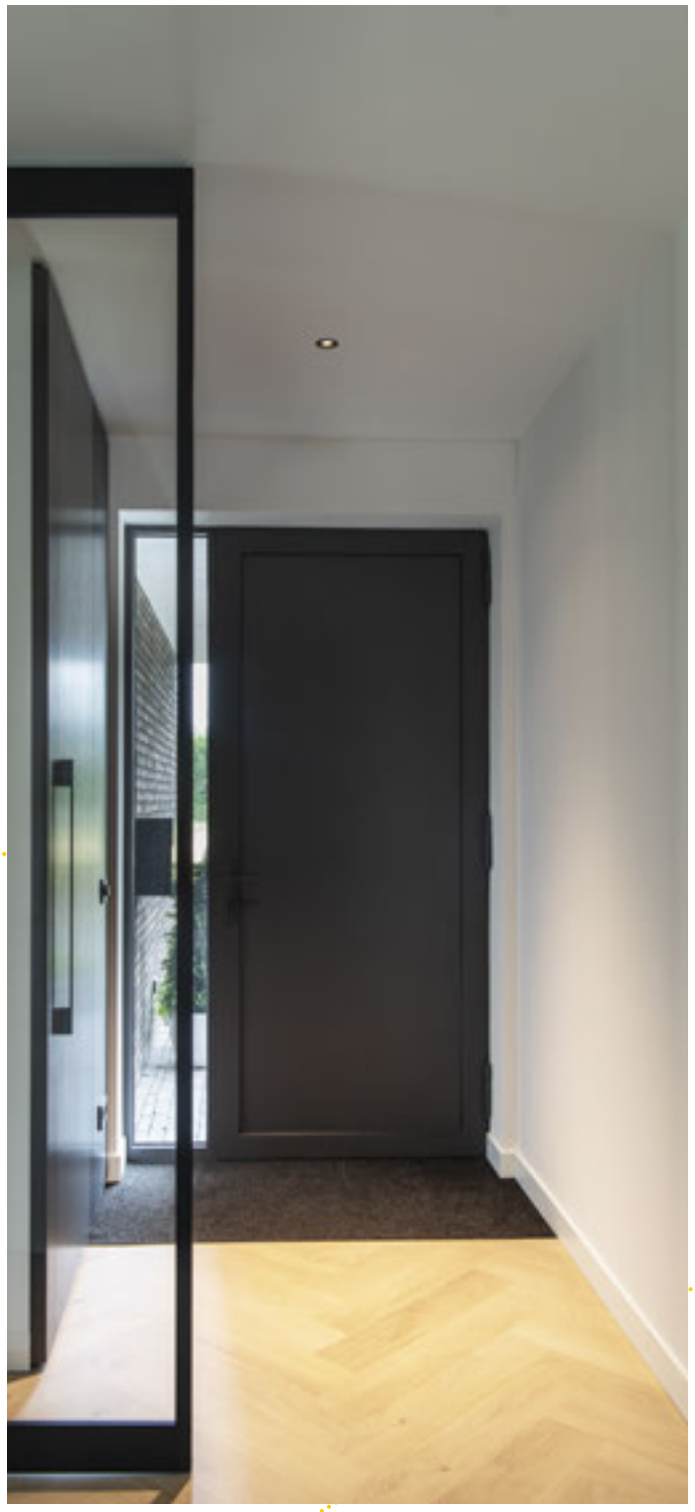

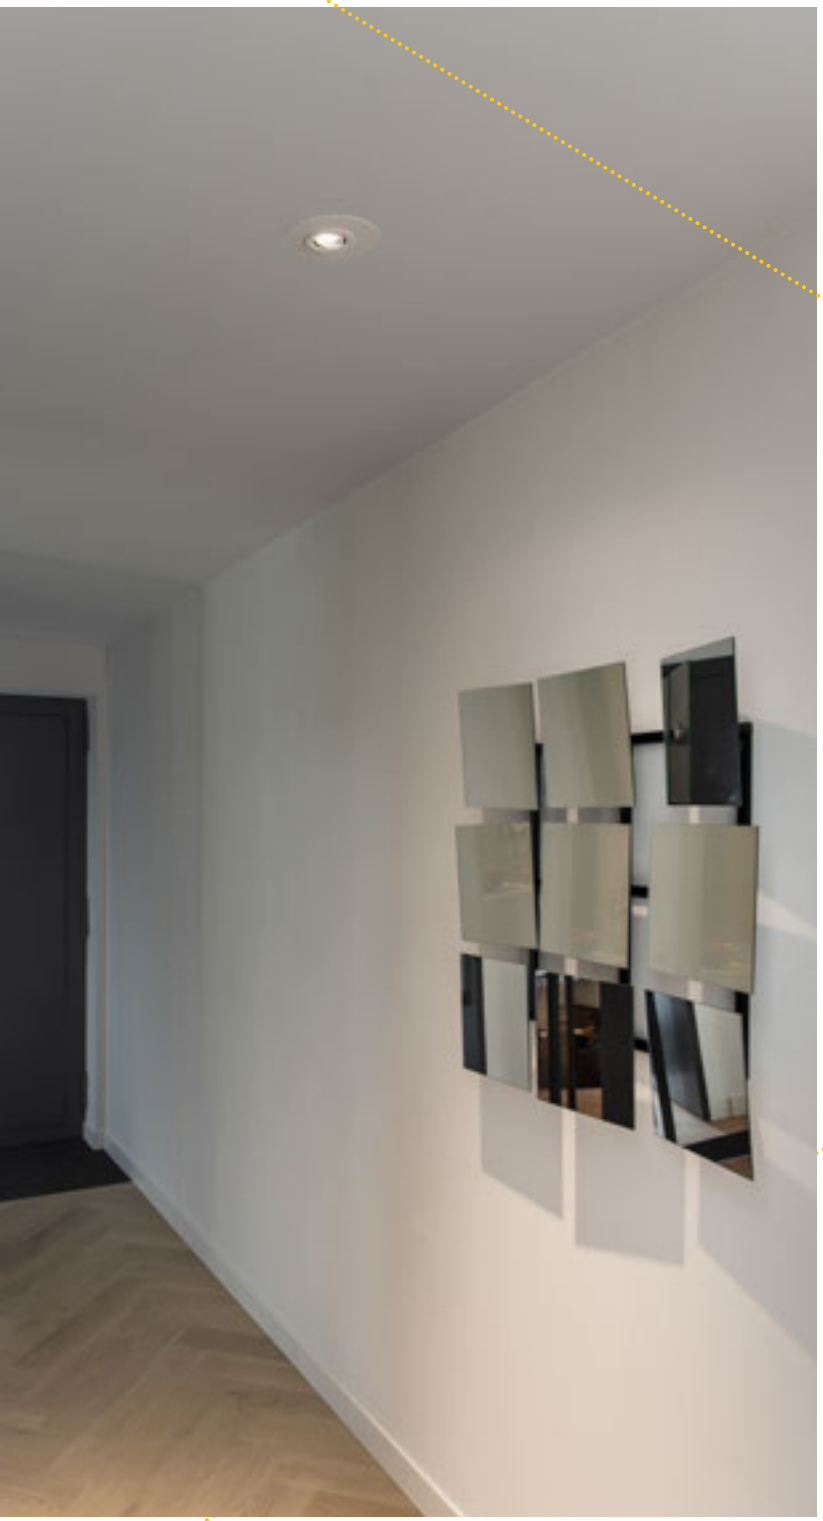

Guide the way in hallways.




NUMINOS®
MOVE XS, DL
Prod. no.
1005584



To create accents in sales areas.

NUMINOS®
GIMBLE M, DL
Prod. no.
1005953

Individually designed illumination.
Thanks to the large selection of reflectors on offer, the NUMINOS® lighting system is suitable for accent lighting as well as for the illumination of products and sales areas.

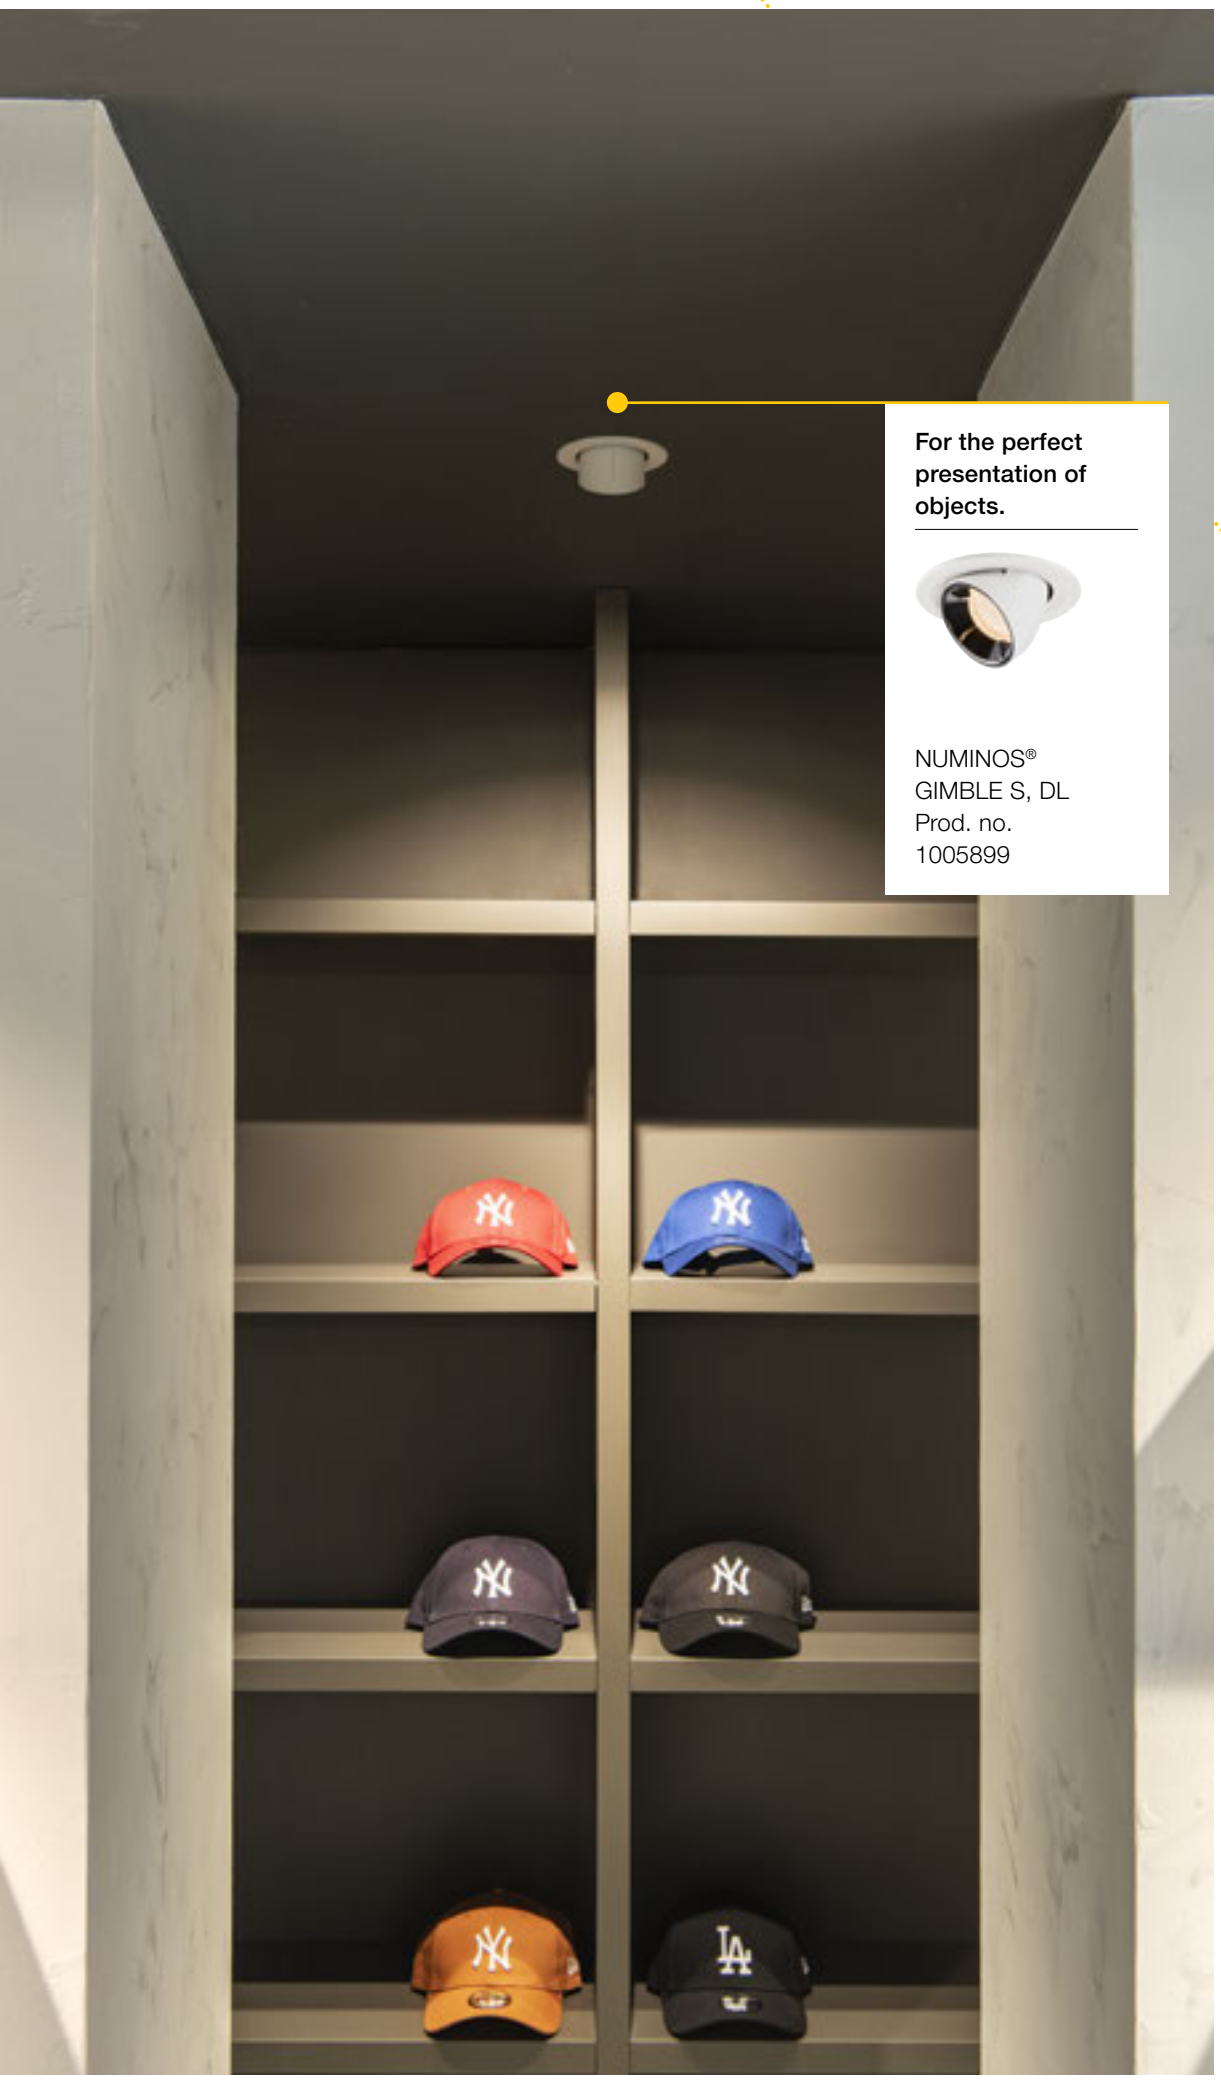

For the perfect presentation of objects.

NUMINOS®
GIMBLE S, DL
Prod. no.
1005899



For the flexible illumination of spaces of all sizes.

NUMINOS® ZOOM M
3Ph., PHASE
Prod. no.
1006108


Skilfully showcase products.



NUMINOS® ZOOM M
3-phase., DALI
Prod. no.
1006119


Spotlights.
Be it in shops and boutiques or restaurants, bars, museums, studios and surgeries – every space depends on expert accent lighting. Spotlights can be used to illuminate larger spaces as well as for targeted lighting.



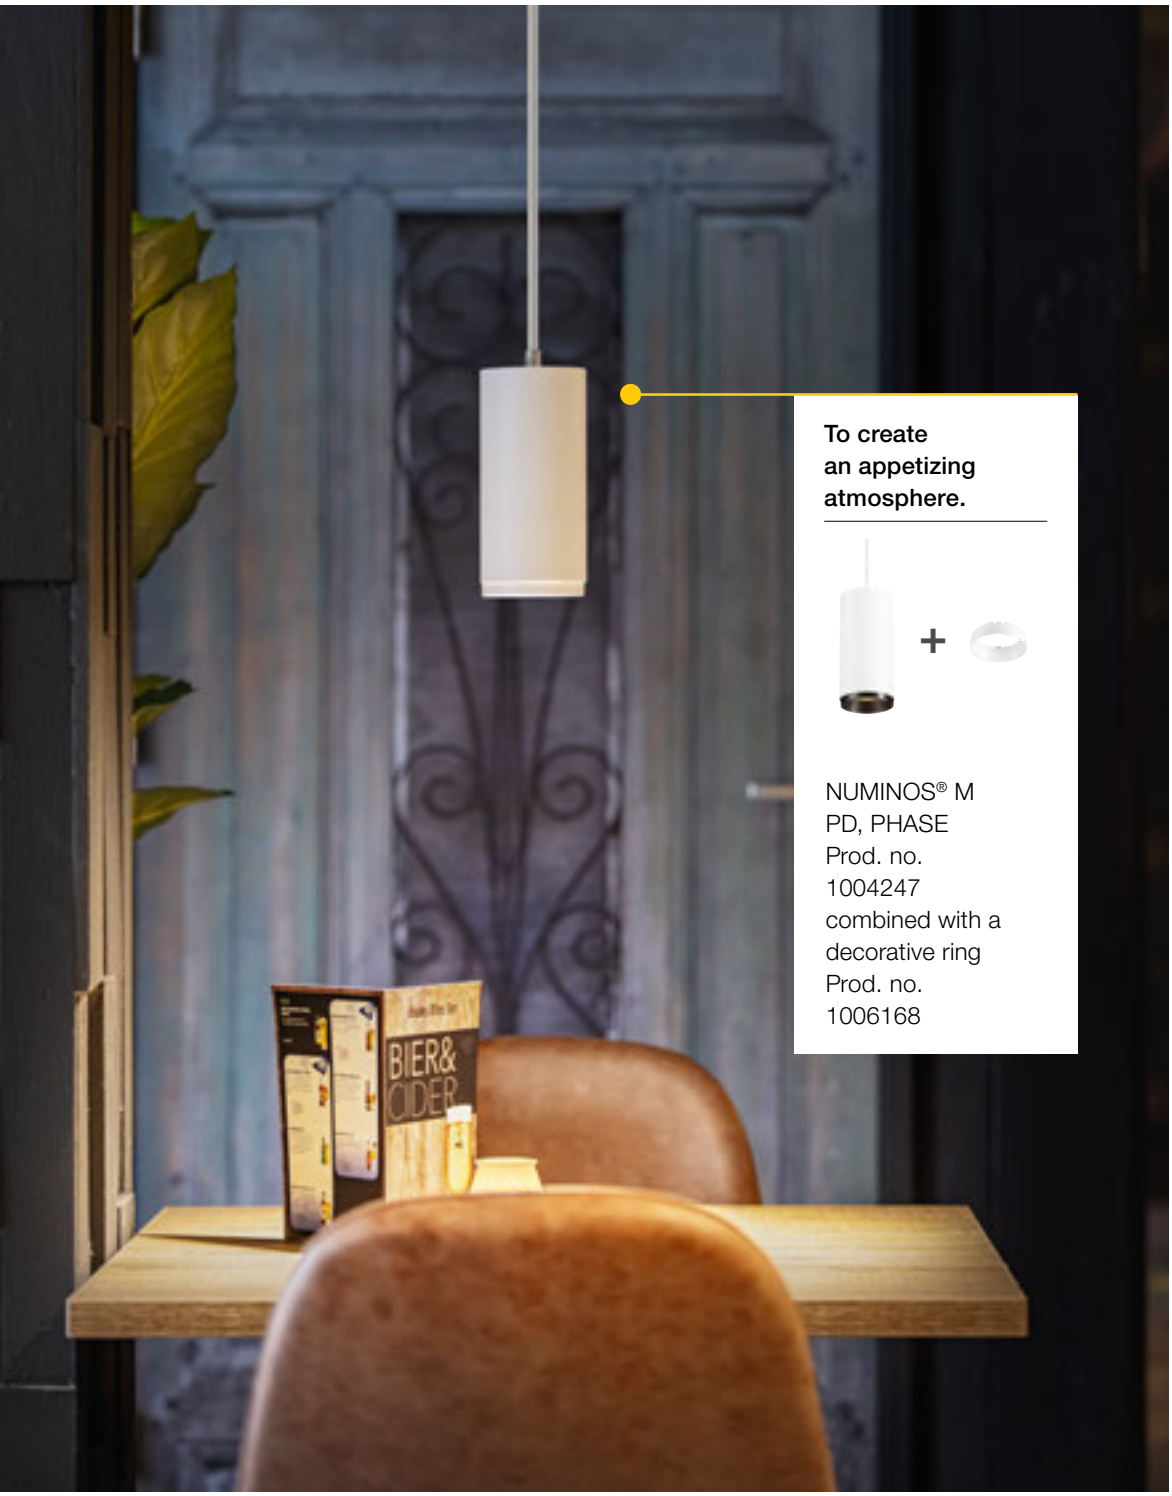

To create an appetizing atmosphere.

NUMINOS® M
PD, PHASE
Prod. no.
1004247
combined with a
decorative ring
Prod. no.
1006168

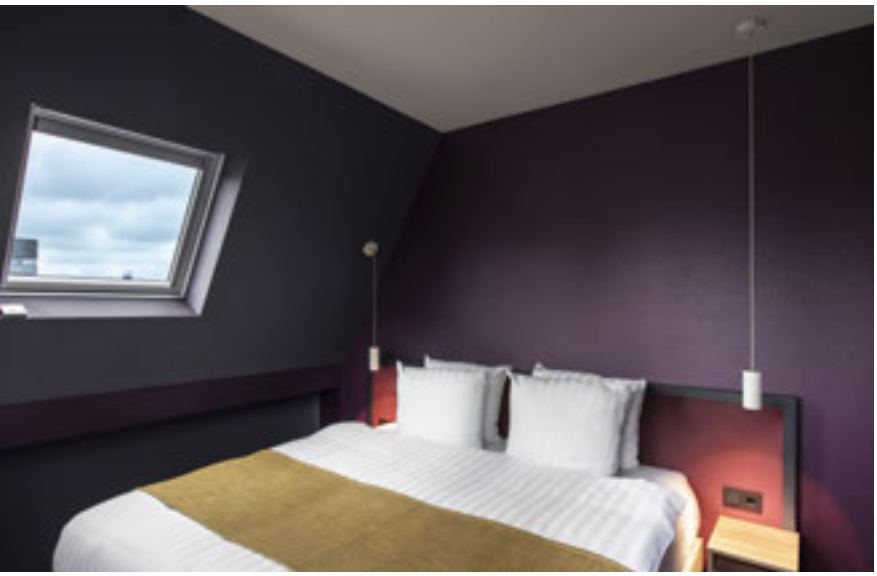

For a cozier home.



NUMINOS® S, PD, DALI
Prod. no.: 1004439
combined with a decorative ring
Prod. no.: 1006167



SYSTEMATICALLY
ACHIEVING YOUR OBJECTIVE.

With the NUMINOS® Online Configurator.

Our configurator really is this easy:
The first question is: downlight or spotlight? You can then choose between preconfigured and additionally customizable application scenarios or free configuration.

If you are still unsure about the selection of attributes, don't worry: we offer suitable explanations for each selected configuration.

This way to the NUMINOS® Configurator:


www.numinos.SLV.com

Just three steps to reach your goal:

1. **TECHNICAL CONFIGURATION**
2. **OPTICAL CONFIGURATION**
3. **VISUAL REPRESENTATION & COMPLETION**

Reach your goal here and now – configure your lighting with the BIG WHITE® catalog.

Put together your dream lighting over the next pages. The following product overviews will help you reach your goal just as easily: scroll to your desired light type, follow the columns from left to right and make your individual selection. At the end, you will find the relevant product number for direct ordering.

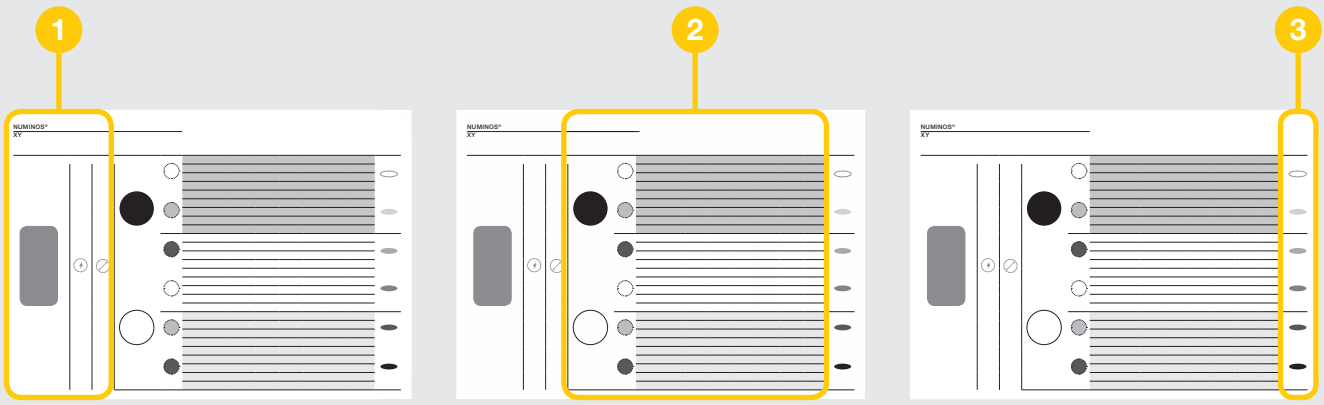

STEP 1

SPOTLIGHT OR DOWNLIGHT?

Choose the most suitable light type for your needs. The diameter (downlights) or housing size (spotlights) are coupled with the total wattage.

STEP 2

TECHNICAL CONFIGURATION & SELECTION OF DETAILS

Column by column, you can select optical and technical attributes such as housing color or decorative colors, the color temperature, half beam angle and more.

STEP 3

PRODUCT

Get a visual impression of your fully configured light and order it right away using the relevant product number.

STILL UNSURE ABOUT SOMETHING?

Scan me to view a video that shows how to configure NUMINOS® lights.

In addition to the familiar catalog icons, you will find the following icons in this chapter:

UGR	**Glare rating**
	Color temperature
	Beam angle
lm	**Lumen**
	Controller

NUMINOS® XS

NEW VARIANT

DL


XS



Product details:

200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)



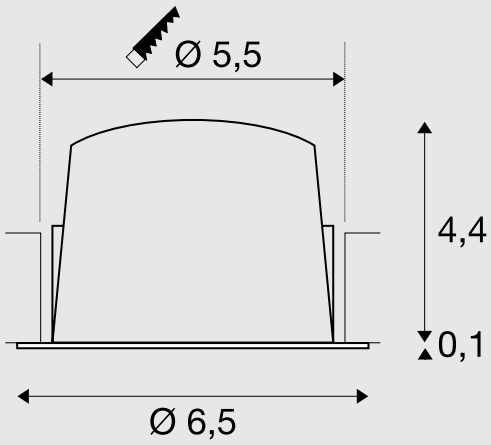


Tip:

Low-voltage plug
Driver not included
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	640lm	20°	16	**1005499**	
		620lm	40°	22	**1005502**	
		640lm	55°	25	**1005505**	
E	3000 K	700lm	20°	16	**1005517**	
		670 lm	40°	22	**1005520**	
		690lm	55°	25	**1005523**	
E	4000 K	720lm	20°	16	**1005535**	
		700lm	40°	22	**1005538**	
		710lm	55°	25	**1005541**	
F	2700 K	670 lm	20°	16	**1005500**	
		650lm	40°	22	**1005503**	
		670 lm	55°	25	**1005506**	
E	3000 K	730lm	20°	16	**1005518**	
		700lm	40°	22	**1005521**	
		720lm	55°	25	**1005524**	
E	4000 K	750lm	20°	16	**1005536**	
		730lm	40°	22	**1005539**	
		740lm	55°	25	**1005542**	
F	2700 K	670 lm	20°	16	**1005501**	
		650lm	40°	22	**1005504**	
		670 lm	55°	25	**1005507**	
E	3000 K	730lm	20°	16	**1005519**	
		700lm	40°	22	**1005522**	
		720lm	55°	25	**1005525**	
E	4000 K	750lm	20°	16	**1005537**	
		730lm	40°	22	**1005540**	
		740lm	55°	25	**1005543**	
F	2700 K	640lm	20°	16	**1005508**	
		620lm	40°	22	**1005511**	
		640lm	55°	25	**1005514**	
E	3000 K	700lm	20°	16	**1005526**	
		670 lm	40°	22	**1005529**	
		690lm	55°	25	**1005532**	
E	4000 K	720lm	20°	16	**1005544**	
		700lm	40°	22	**1005547**	
		710lm	55°	25	**1005550**	
F	2700 K	670 lm	20°	16	**1005509**	
		650lm	40°	22	**1005512**	
		670 lm	55°	25	**1005515**	
E	3000 K	730lm	20°	16	**1005527**	
		700lm	40°	22	**1005530**	
		720lm	55°	25	**1005533**	
E	4000 K	750lm	20°	16	**1005545**	
		730lm	40°	22	**1005548**	
		740lm	55°	25	**1005551**	
F	2700 K	670 lm	20°	16	**1005510**	
		650lm	40°	22	**1005513**	
		670 lm	55°	25	**1005516**	
E	3000 K	730lm	20°	16	**1005528**	
		700lm	40°	22	**1005531**	
		720lm	55°	25	**1005534**	
E	4000 K	750lm	20°	16	**1005546**	
		730lm	40°	22	**1005549**	
		740lm	55°	25	**1005552**	

NUMINOS® S

DL


S



Product details:

250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)
Installation dimensions: diameter: 6.8 cm D: 5.5 cm

IP 20 / IP 44 | IK02 | L80B50 | 10

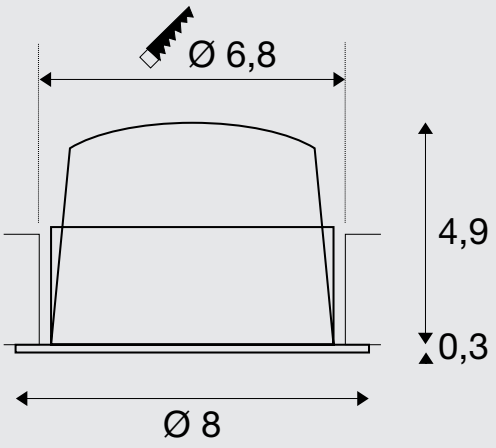


Tip:

Low-voltage plug
Driver not included
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	670 lm	20°	19	**1003769**	
		670 lm	40°	18,5	**1003772**	
		670 lm	55°	22	**1003775**	
E	3000 K	690lm	20°	19	**1003793**	
		690lm	40°	19	**1003796**	
		690lm	55°	22	**1003799**	
E	4000 K	730lm	20°	19	**1003817**	
		730lm	40°	19	**1003820**	
		730lm	55°	22	**1003823**	
F	2700 K	720lm	20°	18,5	**1003770**	
		720lm	40°	19	**1003773**	
		720lm	55°	22	**1003776**	
E	3000 K	730lm	20°	19	**1003794**	
		730lm	40°	19	**1003797**	
		730lm	55°	22	**1003800**	
E	4000 K	790lm	20°	19	**1003818**	
		790lm	40°	19	**1003821**	
		790lm	55°	22	**1003824**	
F	2700 K	690lm	20°	19	**1003771**	
		690lm	40°	19	**1003774**	
		690lm	55°	22	**1003777**	
E	3000 K	700lm	20°	19	**1003795**	
		700lm	40°	19	**1003798**	
		700lm	55°	19	**1003801**	
E	4000 K	750lm	20°	19	**1003819**	
		750lm	40°	19	**1003822**	
		750lm	55°	22	**1003825**	
F	2700 K	670 lm	20°	19	**1003781**	
		670 lm	40°	19	**1003784**	
		670 lm	55°	22	**1003787**	
E	3000 K	690lm	20°	19	**1003805**	
		690lm	40°	19	**1003808**	
		690lm	55°	22	**1003811**	
E	4000 K	730lm	20°	19	**1003829**	
		730lm	40°	19	**1003832**	
		730lm	55°	22	**1003835**	
F	2700 K	720lm	20°	18,5	**1003782**	
		720lm	40°	19	**1003785**	
		720lm	55°	22	**1003788**	
E	3000 K	730lm	20°	19	**1003806**	
		730lm	40°	19	**1003809**	
		730lm	55°	22	**1003812**	
E	4000 K	790lm	20°	19	**1003830**	
		790lm	40°	19	**1003833**	
		790lm	55°	22	**1003836**	
F	2700 K	690lm	20°	19	**1003783**	
		690lm	40°	19	**1003786**	
		690lm	55°	22	**1003789**	
E	3000 K	700lm	20°	19	**1003807**	
		700lm	40°	19	**1003810**	
		700lm	55°	22	**1003813**	
E	4000 K	750lm	20°	19	**1003831**	
		750lm	40°	19	**1003834**	
		750lm	55°	22	**1003837**	

NUMINOS® M

DL


M



Product details:

500mA
Power consumption: 17.5W
Material: aluminium/polycarbonate (PC)
Installation dimensions: diameter: 9 cm D: 7.5 cm

IP 20 / IP 44 | IK02 | L80B50 | 10

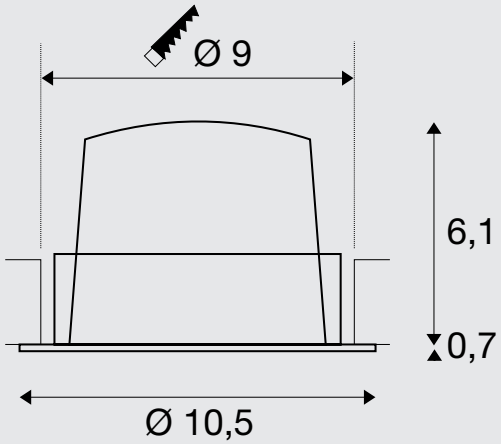


Tip:

Low-voltage plug
Driver not included
Leaf springs are included with the product and can be replaced.

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
E	2700 K	1460lm	20°	19	**1003841**	
		1460lm	40°	22	**1003844**	
		1460lm	55°	22	**1003847**	
E	3000 K	1500lm	20°	19	**1003865**	
		1500lm	40°	22	**1003868**	
		1500lm	55°	22	**1003871**	
E	4000 K	1600lm	20°	19	**1003889**	
		1600lm	40°	22	**1003892**	
		1600lm	55°	22	**1003895**	
E	2700 K	1600lm	20°	22	**1003842**	
		1600lm	40°	19,4	**1003845**	
		1600lm	55°	22	**1003848**	
E	3000 K	1600lm	20°	22	**1003866**	
		1600lm	40°	22	**1003869**	
		1600lm	55°	22	**1003872**	
E	4000 K	1750lm	20°	22	**1003890**	
		1750lm	40°	22	**1003893**	
		1750lm	55°	22	**1003896**	
E	2700 K	1550lm	20°	19	**1003843**	
		1550lm	40°	19	**1003846**	
		1550lm	55°	19	**1003849**	
E	3000 K	1550lm	20°	19	**1003867**	
		1550lm	40°	19	**1003870**	
		1550lm	55°	19	**1003873**	
E	4000 K	1660lm	20°	19	**1003891**	
		1660lm	40°	19	**1003894**	
		1660lm	55°	19	**1003897**	
E	2700 K	1460lm	20°	19	**1003853**	
		1460lm	40°	22	**1003856**	
		1460lm	55°	22	**1003859**	
E	3000 K	1500lm	20°	19	**1003877**	
		1500lm	40°	22	**1003880**	
		1500lm	55°	22	**1003883**	
E	4000 K	1600lm	20°	19	**1003901**	
		1600lm	40°	22	**1003904**	
		1600lm	55°	22	**1003907**	
E	2700 K	1600lm	20°	22	**1003854**	
		1600lm	40°	19	**1003857**	
		1600lm	55°	22	**1003860**	
E	3000 K	1600lm	20°	22	**1003878**	
		1600lm	40°	22	**1003881**	
		1600lm	55°	22	**1003884**	
E	4000 K	1750lm	20°	22	**1003902**	
		1750lm	40°	22	**1003905**	
		1750lm	55°	22	**1003908**	
E	2700 K	1550lm	20°	19	**1003855**	
		1550lm	40°	19	**1003858**	
		1550lm	55°	19	**1003861**	
E	3000 K	1550lm	20°	19	**1003879**	
		1550lm	40°	19	**1003882**	
		1550lm	55°	19	**1003885**	
E	4000 K	1660lm	20°	19	**1003903**	
		1660lm	40°	19	**1003906**	
		1660lm	55°	19	**1003909**	













NUMINOS® L

DL


L



Product details:

700mA
Power consumption: 25.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: diameter: 11.7 cm D: 9 cm



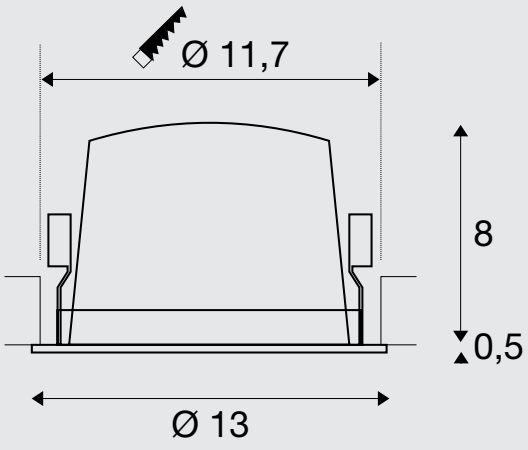


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
E	2700 K	2150lm	20°	22	**1003913**	
		2150lm	40°	22	**1003916**	
		2150lm	55°	22	**1003919**	
E	3000 K	2150lm	20°	22	**1003937**	
		2150lm	40°	22	**1003940**	
		2150lm	55°	25	**1003943**	
E	4000 K	2350lm	20°	22	**1003961**	
		2350lm	40°	22	**1003964**	
		2350lm	55°	25	**1003967**	
E	2700 K	2250lm	20°	19	**1003914**	
		2250lm	40°	19	**1003917**	
		2250lm	55°	22	**1003920**	
E	3000 K	2300lm	20°	19	**1003938**	
		2300lm	40°	19	**1003941**	
		2300lm	55°	20	**1003944**	
E	4000 K	2450lm	20°	19	**1003962**	
		2450lm	40°	19	**1003965**	
		2450lm	55°	22	**1003968**	
E	2700 K	2150lm	20°	19	**1003915**	
		2150lm	40°	19	**1003918**	
		2150lm	55°	19	**1003921**	
E	3000 K	2200lm	20°	19	**1003939**	
		2200lm	40°	19	**1003942**	
		2200lm	55°	19	**1003945**	
E	4000 K	2350lm	20°	19	**1003963**	
		2350lm	40°	19	**1003966**	
		2350lm	55°	19	**1003969**	
E	2700 K	2150lm	20°	22	**1003925**	
		2150lm	40°	22	**1003928**	
		2150lm	55°	22	**1003931**	
E	3000 K	2150lm	20°	22	**1003949**	
		2150lm	40°	22	**1003952**	
		2150lm	55°	25	**1003955**	
E	4000 K	2350lm	20°	22	**1003973**	
		2350lm	40°	22	**1003976**	
		2350lm	55°	25	**1003979**	
E	2700 K	2250lm	20°	19	**1003926**	
		2250lm	40°	19	**1003929**	
		2250lm	55°	22	**1003932**	
E	3000 K	2300lm	20°	19	**1003950**	
		2300lm	40°	19	**1003953**	
		2300lm	55°	22	**1003956**	
E	4000 K	2450lm	20°	19	**1003974**	
		2450lm	40°	19	**1003977**	
		2450lm	55°	22	**1003980**	
E	2700 K	2150lm	20°	19	**1003927**	
		2150lm	40°	19	**1003930**	
		2150lm	55°	19	**1003933**	
E	3000 K	2200lm	20°	19	**1003951**	
		2200lm	40°	19	**1003954**	
		2200lm	55°	19	**1003957**	
E	4000 K	2350lm	20°	19	**1003975**	
		2350lm	40°	19	**1003978**	
		2350lm	55°	19	**1003981**	

NUMINOS® XL

DL


XL



Product details:

1050mA
Power consumption: 37.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: diameter: 14.5 cm D: 11.5 cm

IP 20 / IP 44 | IK02 | L80B50 | 10

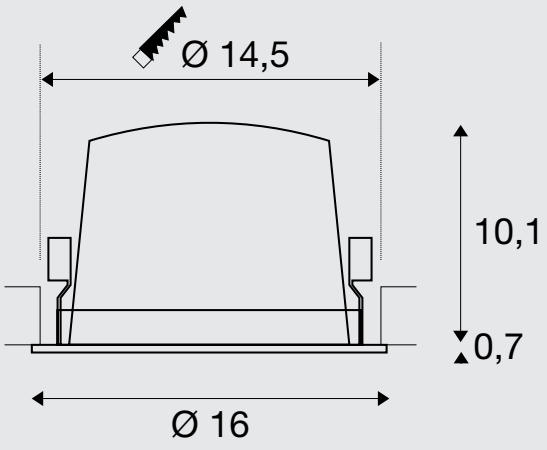


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.






black

white

black

chrome



black

white

black

chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	3300lm	20°	22	**1003985**	
		3300lm	40°	22	**1003988**	
		3300lm	55°	22	**1003991**	
E	3000 K	3300lm	20°	22	**1004009**	
		3300lm	40°	22	**1004012**	
		3300lm	55°	22	**1004015**	
E	4000 K	3600lm	20°	22	**1004033**	
		3600lm	40°	22	**1004036**	
		3600lm	55°	25	**1004039**	
F	2700 K	3500lm	20°	19	**1003986**	
		3500lm	40°	19	**1003989**	
		3500lm	55°	19	**1003992**	
E	3000 K	3550lm	20°	19	**1004010**	
		3550lm	40°	19	**1004013**	
		3550lm	55°	19	**1004016**	
E	4000 K	3800lm	20°	19	**1004034**	
		3800lm	40°	19	**1004037**	
		3800lm	55°	19	**1004040**	
F	2700 K	3400lm	20°	19	**1003987**	
		3400lm	40°	19	**1003990**	
		3400lm	55°	19	**1003993**	
E	3000 K	3500lm	20°	19	**1004011**	
		3500lm	40°	19	**1004014**	
		3500lm	55°	19	**1004017**	
E	4000 K	3750lm	20°	19	**1004035**	
		3750lm	40°	19	**1004038**	
		3750lm	55°	19	**1004041**	
F	2700 K	3300lm	20°	22	**1003997**	
		3300lm	40°	22	**1004000**	
		3300lm	55°	22	**1004003**	
E	3000 K	3300lm	20°	22	**1004021**	
		3300lm	40°	22	**1004024**	
		3300lm	55°	22	**1004027**	
E	4000 K	3600lm	20°	22	**1004045**	
		3600lm	40°	22	**1004048**	
		3600lm	55°	25	**1004051**	
F	2700 K	3500lm	20°	19	**1003998**	
		3500lm	40°	19	**1004001**	
		3500lm	55°	19	**1004004**	
E	3000 K	3550lm	20°	19	**1004022**	
		3550lm	40°	19	**1004025**	
		3550lm	55°	19	**1004028**	
E	4000 K	3800lm	20°	19	**1004046**	
		3800lm	40°	19	**1004049**	
		3800lm	55°	19	**1004052**	
F	2700 K	3400lm	20°	19	**1003999**	
		3400lm	40°	19	**1004002**	
		3400lm	55°	19	**1004005**	
E	3000 K	3500lm	20°	19	**1004023**	
		3500lm	40°	19	**1004026**	
		3500lm	55°	19	**1004029**	
E	4000 K	3750lm	20°	19	**1004047**	
		3750lm	40°	19	**1004050**	
		3750lm	55°	19	**1004053**	

NUMINOS® MOVE XS

NEW VARIANT

DL


XS



Product details:

200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)



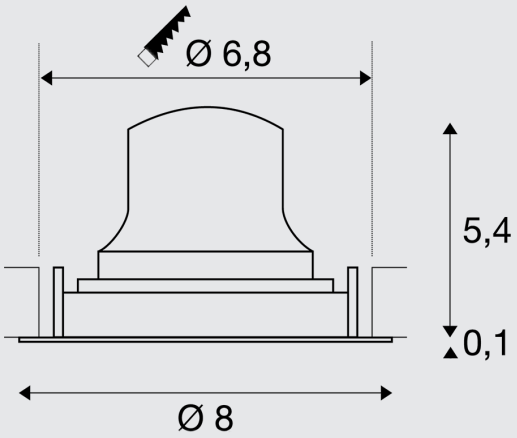


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	640lm	20°	16	**1005553**	
		620lm	40°	22	**1005556**	
		640lm	55°	25	**1005559**	
E	3000 K	700lm	20°	16	**1005571**	
		670lm	40°	22	**1005574**	
		690lm	55°	25	**1005577**	
E	4000 K	720lm	20°	16	**1005589**	
		700lm	40°	22	**1005592**	
		710lm	55°	25	**1005595**	
F	2700 K	670lm	20°	16	**1005554**	
		650lm	40°	22	**1005557**	
		670lm	55°	25	**1005560**	
E	3000 K	730lm	20°	16	**1005572**	
		700lm	40°	22	**1005575**	
		720lm	55°	25	**1005578**	
E	4000 K	750lm	20°	16	**1005590**	
		730lm	40°	22	**1005593**	
		740lm	55°	25	**1005596**	
F	2700 K	670lm	20°	16	**1005555**	
		650lm	40°	22	**1005558**	
		670lm	55°	25	**1005561**	
E	3000 K	730lm	20°	16	**1005573**	
		700lm	40°	22	**1005576**	
		720lm	55°	25	**1005579**	
E	4000 K	750lm	20°	16	**1005591**	
		730lm	40°	22	**1005594**	
		740lm	55°	25	**1005597**	
F	2700 K	640lm	20°	16	**1005562**	
		620lm	40°	22	**1005565**	
		640lm	55°	25	**1005568**	
E	3000 K	700lm	20°	16	**1005580**	
		670lm	40°	22	**1005583**	
		690lm	55°	25	**1005586**	
E	4000 K	720lm	20°	16	**1005598**	
		700lm	40°	22	**1005603**	
		710lm	55°	25	**1005606**	
F	2700 K	670lm	20°	16	**1005563**	
		650lm	40°	22	**1005566**	
		670lm	55°	25	**1005569**	
E	3000 K	730lm	20°	16	**1005581**	
		700lm	40°	22	**1005584**	
		720lm	55°	25	**1005587**	
E	4000 K	750lm	20°	16	**1005599**	
		730lm	40°	22	**1005604**	
		740lm	55°	25	**1005607**	
F	2700 K	670lm	20°	16	**1005564**	
		650lm	40°	22	**1005567**	
		670lm	55°	25	**1005570**	
E	3000 K	730lm	20°	16	**1005582**	
		700lm	40°	22	**1005585**	
		720lm	55°	25	**1005588**	
E	4000 K	750lm	20°	16	**1005600**	
		730lm	40°	22	**1005605**	
		740lm	55°	25	**1005608**	

NUMINOS® MOVE S

NEW VARIANT

DL


S



Product details:

250 mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)



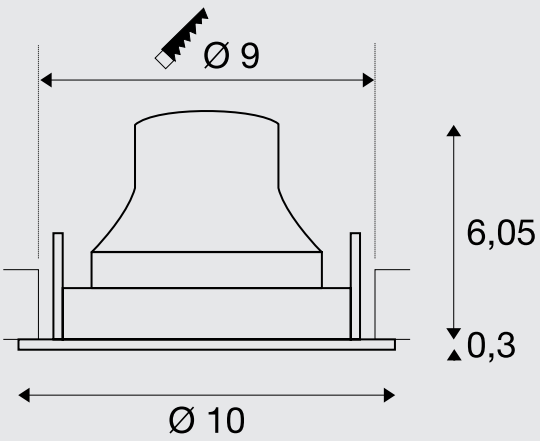


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black



black




white



chrome



black



white



white



chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	670 lm	20°	19	**1005319**	
		670 lm	40°	19	**1005322**	
		670 lm	55°	22	**1005325**	
E	3000 K	690lm	20°	19	**1005337**	
		690lm	40°	19	**1005340**	
		690lm	55°	22	**1005343**	
E	4000 K	730lm	20°	19	**1005355**	
		730lm	40°	19	**1005358**	
		730lm	55°	22	**1005361**	
F	2700 K	720lm	20°	19	**1005320**	
		720lm	40°	19	**1005323**	
		720lm	55°	22	**1005326**	
E	3000 K	730lm	20°	19	**1005338**	
		730lm	40°	19	**1005341**	
		730lm	55°	22	**1005344**	
E	4000 K	790lm	20°	19	**1005356**	
		790lm	40°	19	**1005359**	
		790lm	55°	22	**1005362**	
F	2700 K	690lm	20°	19	**1005321**	
		690lm	40°	19	**1005324**	
		690lm	55°	22	**1005327**	
E	3000 K	700lm	20°	19	**1005339**	
		700lm	40°	19	**1005342**	
		700lm	55°	22	**1005345**	
E	4000 K	750lm	20°	19	**1005357**	
		750lm	40°	19	**1005360**	
		750lm	55°	22	**1005363**	
F	2700 K	670 lm	20°	19	**1005328**	
		670 lm	40°	19	**1005331**	
		670 lm	55°	22	**1005334**	
E	3000 K	690lm	20°	19	**1005346**	
		690lm	40°	19	**1005349**	
		690lm	55°	22	**1005352**	
E	4000 K	730lm	20°	19	**1005364**	
		730lm	40°	19	**1005367**	
		730lm	55°	22	**1005370**	
F	2700 K	720lm	20°	19	**1005329**	
		720lm	40°	19	**1005332**	
		720lm	55°	22	**1005335**	
E	3000 K	730lm	20°	19	**1005347**	
		730lm	40°	19	**1005350**	
		730lm	55°	22	**1005353**	
E	4000 K	790lm	20°	19	**1005365**	
		790lm	40°	19	**1005368**	
		790lm	55°	22	**1005371**	
F	2700 K	690lm	20°	19	**1005330**	
		690lm	40°	19	**1005333**	
		690lm	55°	22	**1005336**	
E	3000 K	700lm	20°	19	**1005348**	
		700lm	40°	19	**1005351**	
		700lm	55°	22	**1005354**	
E	4000 K	750lm	20°	19	**1005366**	
		750lm	40°	19	**1005369**	
		750lm	55°	22	**1005372**	

NUMINOS® MOVE M

DL


M



Product details:

500mA
Power consumption: 17.5W
Material: aluminium/polycarbonate (PC)
Installation dimensions: diameter: 12 cm D: 10 cm



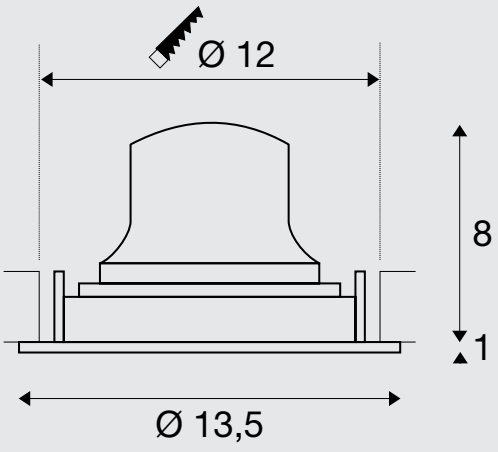


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black



black




white



chrome



black



white



white



chrome

A→G		lm		UGR	PROD. NO.	
E	2700 K	1460lm	20°	19	**1003553**	
		1460lm	40°	22	**1003556**	
		1460lm	55°	22	**1003559**	
E	3000 K	1500lm	20°	19	**1003577**	
		1500lm	40°	22	**1003580**	
		1500lm	55°	22	**1003583**	
E	4000 K	1600lm	20°	19	**1003601**	
		1600lm	40°	22	**1003604**	
		1600lm	55°	22	**1003607**	
E	2700 K	1600lm	20°	22	**1003554**	
		1600lm	40°	19	**1003557**	
		1600lm	55°	22	**1003560**	
E	3000 K	1600lm	20°	22	**1003578**	
		1600lm	40°	22	**1003581**	
		1600lm	55°	22	**1003584**	
E	4000 K	1750lm	20°	22	**1003602**	
		1750lm	40°	22	**1003605**	
		1750lm	55°	22	**1003608**	
E	2700 K	1550lm	20°	19	**1003555**	
		1550lm	40°	19	**1003558**	
		1550lm	55°	19	**1003561**	
E	3000 K	1550lm	20°	19	**1003579**	
		1550lm	40°	19	**1003582**	
		1550lm	55°	19	**1003585**	
E	4000 K	1660lm	20°	19	**1003603**	
		1660lm	40°	19	**1003606**	
		1660lm	55°	19	**1003609**	
E	2700 K	1460lm	20°	19	**1003565**	
		1460lm	40°	22	**1003568**	
		1460lm	55°	22	**1003571**	
E	3000 K	1500lm	20°	19	**1003589**	
		1500lm	40°	22	**1003592**	
		1500lm	55°	22	**1003595**	
E	4000 K	1600lm	20°	19	**1003613**	
		1600lm	40°	22	**1003616**	
		1600lm	55°	22	**1003619**	
E	2700 K	1600lm	20°	22	**1003566**	
		1600lm	40°	22	**1003569**	
		1600lm	55°	22	**1003572**	
E	3000 K	1600lm	20°	22	**1003590**	
		1600lm	40°	22	**1003593**	
		1600lm	55°	22	**1003596**	
E	4000 K	1750lm	20°	22	**1003614**	
		1750lm	40°	22	**1003617**	
		1750lm	55°	22	**1003620**	
E	2700 K	1550lm	20°	19	**1003567**	
		1550lm	40°	19	**1003570**	
		1550lm	55°	19	**1003573**	
E	3000 K	1550lm	20°	19	**1003591**	
		1550lm	40°	19	**1003594**	
		1550lm	55°	19	**1003597**	
E	4000 K	1660lm	20°	19	**1003615**	
		1660lm	40°	19	**1003618**	
		1660lm	55°	19	**1003621**	













NUMINOS® MOVE L

DL


L



Product details:

750mA
Power consumption: 25.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: diameter: 14.5 cm D: 10.5 cm



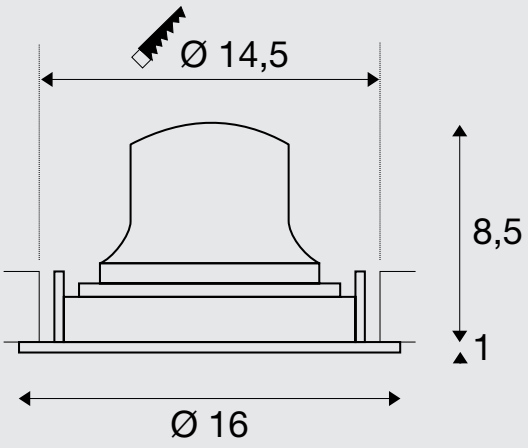


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black



black




white



chrome



black



white



white



chrome

A→G		lm		UGR	PROD. NO.	
E	2700 K	2150lm	20°	22	**1003625**	
		2150lm	40°	22	**1003628**	
		2150lm	55°	22	**1003631**	
E	3000 K	2150lm	20°	22	**1003649**	
		2150lm	40°	22	**1003652**	
		2150lm	55°	25	**1003655**	
E	4000 K	2350lm	20°	22	**1003673**	
		2350lm	40°	22	**1003676**	
		2350lm	55°	25	**1003679**	
E	2700 K	2250lm	20°	19	**1003626**	
		2250lm	40°	19	**1003629**	
		2250lm	55°	22	**1003632**	
E	3000 K	2300lm	20°	19	**1003650**	
		2300lm	40°	19	**1003653**	
		2300lm	55°	22	**1003656**	
E	4000 K	2450lm	20°	19	**1003674**	
		2450lm	40°	19	**1003677**	
		2450lm	55°	22	**1003680**	
E	2700 K	2150lm	20°	19	**1003627**	
		2150lm	40°	19	**1003630**	
		2150lm	55°	19	**1003633**	
E	3000 K	2200lm	20°	19	**1003651**	
		2200lm	40°	19	**1003654**	
		2200lm	55°	19	**1003657**	
E	4000 K	2350lm	20°	19	**1003675**	
		2350lm	40°	19	**1003678**	
		2350lm	55°	19	**1003681**	
E	2700 K	2150lm	20°	22	**1003637**	
		2150lm	40°	22	**1003640**	
		2150lm	55°	22	**1003643**	
E	3000 K	2150lm	20°	22	**1003661**	
		2150lm	40°	22	**1003664**	
		2150lm	55°	25	**1003667**	
E	4000 K	2350lm	20°	22	**1003685**	
		2350lm	40°	22	**1003688**	
		2350lm	55°	25	**1003691**	
E	2700 K	2250lm	20°	19	**1003638**	
		2250lm	40°	19	**1003641**	
		2250lm	55°	22	**1003644**	
E	3000 K	2300lm	20°	19	**1003662**	
		2300lm	40°	19	**1003665**	
		2300lm	55°	22	**1003668**	
E	4000 K	2450lm	20°	19	**1003686**	
		2450lm	40°	19	**1003689**	
		2450lm	55°	22	**1003692**	
E	2700 K	2150lm	20°	19	**1003639**	
		2150lm	40°	19	**1003642**	
		2150lm	55°	19	**1003645**	
E	3000 K	2200lm	20°	19	**1003663**	
		2200lm	40°	19	**1003666**	
		2200lm	55°	19	**1003669**	
E	4000 K	2350lm	20°	19	**1003687**	
		2350lm	40°	19	**1003690**	
		2350lm	55°	19	**1003693**	

NUMINOS® MOVE XL

DL


XL



Product details:

1050mA
Power consumption: 37.4W
Material: aluminium/polycarbonate (PC)
Installation dimensions: diameter: 17.5 cm D: 13 cm



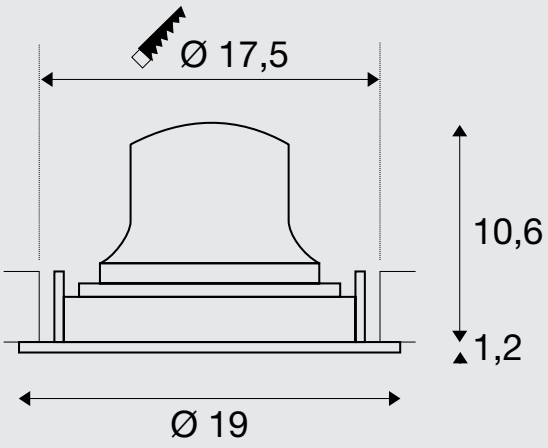


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black



black




white



chrome



black



white



white



chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	3300lm	20°	22	**1003697**	
		3300lm	40°	22	**1003700**	
		3300lm	55°	22	**1003703**	
E	3000 K	3300lm	20°	22	**1003721**	
		3300lm	40°	22	**1003724**	
		3300lm	55°	22	**1003727**	
E	4000 K	3600lm	20°	22	**1003745**	
		3600lm	40°	22	**1003748**	
		3600lm	55°	25	**1003751**	
F	2700 K	3500lm	20°	19	**1003698**	
		3500lm	40°	19	**1003701**	
		3500lm	55°	19	**1003704**	
E	3000 K	3550lm	20°	19	**1003722**	
		3550lm	40°	19	**1003725**	
		3550lm	55°	19	**1003728**	
E	4000 K	3800lm	20°	19	**1003746**	
		3800lm	40°	19	**1003749**	
		3800lm	55°	19	**1003752**	
F	2700 K	3400lm	20°	19	**1003699**	
		3400lm	40°	19	**1003702**	
		3400lm	55°	19	**1003705**	
E	3000 K	3500lm	20°	19	**1003723**	
		3500lm	40°	19	**1003726**	
		3500lm	55°	19	**1003729**	
E	4000 K	3750lm	20°	19	**1003747**	
		3750lm	40°	19	**1003750**	
		3750lm	55°	19	**1003753**	
F	2700 K	3300lm	20°	22	**1003709**	
		3300lm	40°	22	**1003712**	
		3300lm	55°	22	**1003715**	
E	3000 K	3300lm	20°	22	**1003733**	
		3300lm	40°	22	**1003736**	
		3300lm	55°	22	**1003739**	
E	4000 K	3600lm	20°	22	**1003757**	
		3600lm	40°	22	**1003760**	
		3600lm	55°	25	**1003763**	
F	2700 K	3500lm	20°	19	**1003710**	
		3500lm	40°	19	**1003713**	
		3500lm	55°	19	**1003716**	
E	3000 K	3550lm	20°	19	**1003734**	
		3550lm	40°	19	**1003737**	
		3550lm	55°	19	**1003740**	
E	4000 K	3800lm	20°	19	**1003758**	
		3800lm	40°	19	**1003761**	
		3800lm	55°	19	**1003764**	
F	2700 K	3400lm	20°	19	**1003711**	
		3400lm	40°	19	**1003714**	
		3400lm	55°	19	**1003717**	
E	3000 K	3500lm	20°	19	**1003735**	
		3500lm	40°	19	**1003738**	
		3500lm	55°	19	**1003741**	
E	4000 K	3750lm	20°	19	**1003759**	
		3750lm	40°	19	**1003762**	
		3750lm	55°	19	**1003765**	

NUMINOS® GIMBLE XS

DL


NEW


XS



Product details:

200mA
Power consumption: 7W
Material: aluminium/polycarbonate (PC)



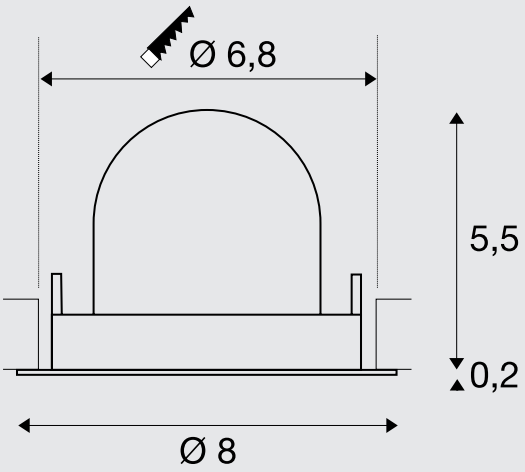


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	640lm	20°	16	**1005813**	
		620lm	40°	22	**1005816**	
		640lm	55°	25	**1005819**	
E	3000 K	700lm	20°	16	**1005831**	
		670 lm	40°	22	**1005834**	
		690lm	55°	25	**1005837**	
E	4000 K	720lm	20°	16	**1005849**	
		700lm	40°	22	**1005852**	
		710lm	55°	25	**1005855**	
F	2700 K	670 lm	20°	16	**1005814**	
		650lm	40°	22	**1005817**	
		670 lm	55°	25	**1005820**	
E	3000 K	730lm	20°	16	**1005832**	
		700lm	40°	22	**1005835**	
		720lm	55°	25	**1005838**	
E	4000 K	750lm	20°	16	**1005850**	
		730lm	40°	22	**1005853**	
		740lm	55°	25	**1005856**	
F	2700 K	670 lm	20°	16	**1005815**	
		650lm	40°	22	**1005818**	
		670 lm	55°	25	**1005821**	
E	3000 K	730lm	20°	16	**1005833**	
		700lm	40°	22	**1005836**	
		720lm	55°	25	**1005839**	
E	4000 K	750lm	20°	16	**1005851**	
		730lm	40°	22	**1005854**	
		740lm	55°	25	**1005857**	
F	2700 K	640lm	20°	16	**1005822**	
		620lm	40°	22	**1005825**	
		640lm	55°	25	**1005828**	
E	3000 K	700lm	20°	16	**1005840**	
		670 lm	40°	22	**1005843**	
		690lm	55°	25	**1005846**	
E	4000 K	720lm	20°	16	**1005858**	
		700lm	40°	22	**1005861**	
		710lm	55°	25	**1005864**	
F	2700 K	670 lm	20°	16	**1005823**	
		650lm	40°	22	**1005826**	
		670 lm	55°	25	**1005829**	
E	3000 K	730lm	20°	16	**1005841**	
		700lm	40°	22	**1005844**	
		720lm	55°	25	**1005847**	
E	4000 K	750lm	20°	16	**1005859**	
		730lm	40°	22	**1005862**	
		740lm	55°	25	**1005865**	
F	2700 K	670 lm	20°	16	**1005824**	
		650lm	40°	22	**1005827**	
		670 lm	55°	25	**1005830**	
E	3000 K	730lm	20°	16	**1005842**	
		700lm	40°	22	**1005845**	
		720lm	55°	25	**1005848**	
E	4000 K	750lm	20°	16	**1005860**	
		730lm	40°	22	**1005863**	
		740lm	55°	25	**1005866**	

NUMINOS® GIMBLE S

DL


NEW


S



Product details:

250mA
Power consumption: 8.6W
Material: aluminium/polycarbonate (PC)



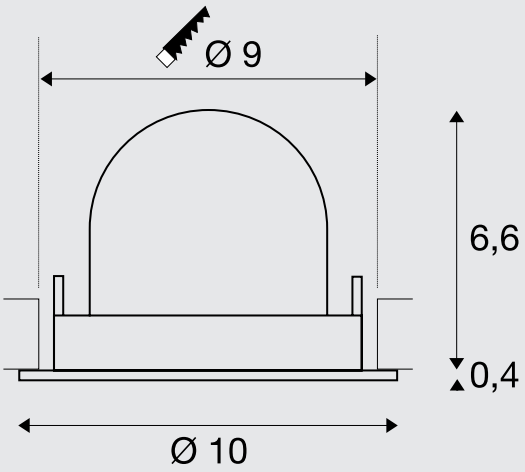


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
F	2700 K	670 lm	20°	19	**1005867**	
		670 lm	40°	19	**1005870**	
		670 lm	55°	22	**1005873**	
E	3000 K	690lm	20°	19	**1005885**	
		690lm	40°	19	**1005888**	
		690lm	55°	22	**1005891**	
E	4000 K	730lm	20°	19	**1005903**	
		730lm	40°	19	**1005906**	
		730lm	55°	22	**1005909**	
F	2700 K	720lm	20°	19	**1005868**	
		720lm	40°	19	**1005871**	
		720lm	55°	22	**1005874**	
E	3000 K	730lm	20°	19	**1005886**	
		730lm	40°	19	**1005889**	
		730lm	55°	22	**1005892**	
E	4000 K	790lm	20°	19	**1005904**	
		790lm	40°	19	**1005907**	
		790lm	55°	22	**1005910**	
F	2700 K	690lm	20°	19	**1005869**	
		690lm	40°	19	**1005872**	
		690lm	55°	22	**1005875**	
E	3000 K	700lm	20°	19	**1005887**	
		700lm	40°	19	**1005890**	
		700lm	55°	22	**1005893**	
E	4000 K	750lm	20°	19	**1005905**	
		750lm	40°	19	**1005908**	
		750lm	55°	22	**1005911**	
F	2700 K	670 lm	20°	19	**1005876**	
		670 lm	40°	19	**1005879**	
		670 lm	55°	22	**1005882**	
E	3000 K	690lm	20°	19	**1005894**	
		690lm	40°	19	**1005897**	
		690lm	55°	22	**1005900**	
E	4000 K	730lm	20°	19	**1005912**	
		730lm	40°	19	**1005915**	
		730lm	55°	22	**1005918**	
F	2700 K	720lm	20°	19	**1005877**	
		720lm	40°	19	**1005880**	
		720lm	55°	22	**1005883**	
E	3000 K	730lm	20°	19	**1005895**	
		730lm	40°	19	**1005898**	
		730lm	55°	22	**1005901**	
E	4000 K	790lm	20°	19	**1005913**	
		790lm	40°	19	**1005916**	
		790lm	55°	22	**1005919**	
F	2700 K	690lm	20°	19	**1005878**	
		690lm	40°	19	**1005881**	
		690lm	55°	22	**1005884**	
E	3000 K	700lm	20°	19	**1005896**	
		700lm	40°	19	**1005899**	
		700lm	55°	22	**1005902**	
E	4000 K	750lm	20°	19	**1005914**	
		750lm	40°	19	**1005917**	
		750lm	55°	22	**1005920**	

NUMINOS® GIMBLE M

DL


NEW


M



Product details:

500mA
Power consumption: 17.5W
Material: aluminium/polycarbonate (PC)



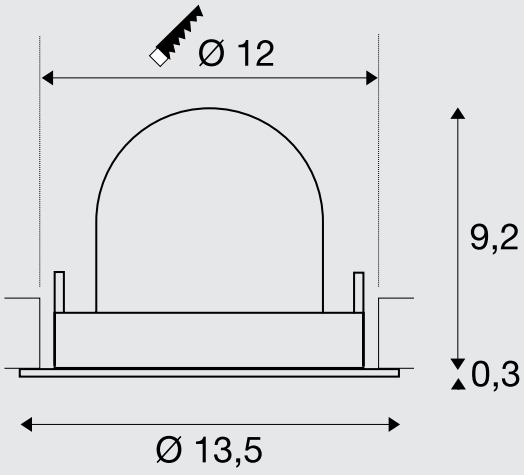


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
E	2700 K	1460lm	20°	22	**1005921**	
		1460lm	40°	22	**1005924**	
		1460lm	55°	22	**1005927**	
E	3000 K	1500lm	20°	22	**1005939**	
		1500lm	40°	22	**1005942**	
		1500lm	55°	22	**1005945**	
E	4000 K	1600lm	20°	22	**1005957**	
		1600lm	40°	22	**1005960**	
		1600lm	55°	22	**1005963**	
E	2700 K	1600lm	20°	22	**1005922**	
		1600lm	40°	22	**1005925**	
		1600lm	55°	22	**1005928**	
E	3000 K	1600lm	20°	22	**1005940**	
		1600lm	40°	22	**1005943**	
		1600lm	55°	22	**1005946**	
E	4000 K	1750lm	20°	22	**1005958**	
		1750lm	40°	22	**1005961**	
		1750lm	55°	22	**1005964**	
E	2700 K	1550lm	20°	22	**1005923**	
		1550lm	40°	22	**1005926**	
		1550lm	55°	22	**1005929**	
E	3000 K	1550lm	20°	22	**1005941**	
		1550lm	40°	22	**1005944**	
		1550lm	55°	22	**1005947**	
E	4000 K	1660lm	20°	22	**1005959**	
		1660lm	40°	22	**1005962**	
		1660lm	55°	22	**1005965**	
E	2700 K	1460lm	20°	22	**1005930**	
		1460lm	40°	22	**1005933**	
		1460lm	55°	22	**1005936**	
E	3000 K	1500lm	20°	22	**1005948**	
		1500lm	40°	22	**1005951**	
		1500lm	55°	22	**1005954**	
E	4000 K	1600lm	20°	22	**1005966**	
		1600lm	40°	22	**1005969**	
		1600lm	55°	22	**1005972**	
E	2700 K	1600lm	20°	22	**1005931**	
		1600lm	40°	22	**1005934**	
		1600lm	55°	22	**1005937**	
E	3000 K	1600lm	20°	22	**1005949**	
		1600lm	40°	22	**1005952**	
		1600lm	55°	22	**1005955**	
E	4000 K	1750lm	20°	22	**1005967**	
		1750lm	40°	22	**1005970**	
		1750lm	55°	22	**1005973**	
E	2700 K	1550lm	20°	22	**1005932**	
		1550lm	40°	22	**1005935**	
		1550lm	55°	22	**1005938**	
E	3000 K	1550lm	20°	22	**1005950**	
		1550lm	40°	22	**1005953**	
		1550lm	55°	22	**1005956**	
E	4000 K	1660lm	20°	22	**1005968**	
		1660lm	40°	22	**1005971**	
		1660lm	55°	22	**1005974**	

NUMINOS® GIMBLE L

DL


NEW


L



Product details:

700mA
Power consumption: 25.4W
Material: aluminium/polycarbonate (PC)



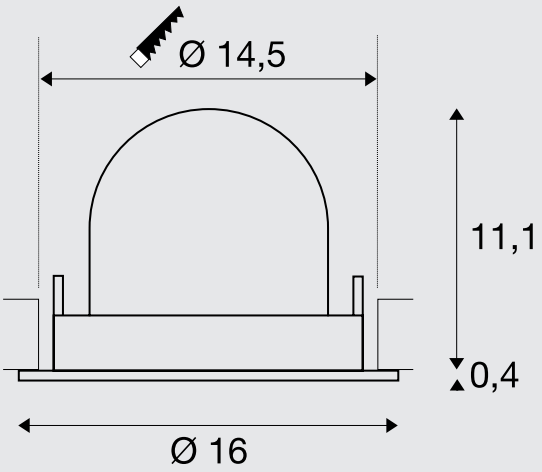


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white



chrome

A→G		lm		UGR	PROD. NO.	
E	2700 K	2150lm	20°	22	**1005975**	
		2150lm	40°	22	**1005978**	
		2150lm	55°	22	**1005981**	
E	3000 K	2150lm	20°	22	**1005993**	
		2150lm	40°	22	**1005996**	
		2150lm	55°	22	**1005999**	
E	4000 K	2350lm	20°	22	**1006011**	
		2350lm	40°	22	**1006014**	
		2350lm	55°	22	**1006017**	
E	2700 K	2250lm	20°	22	**1005976**	
		2250lm	40°	22	**1005979**	
		2250lm	55°	22	**1005982**	
E	3000 K	2300lm	20°	22	**1005994**	
		2300lm	40°	22	**1005997**	
		2300lm	55°	22	**1006000**	
E	4000 K	2450lm	20°	22	**1006012**	
		2450lm	40°	22	**1006015**	
		2450lm	55°	22	**1006018**	
E	2700 K	2150lm	20°	22	**1005977**	
		2150lm	40°	22	**1005980**	
		2150lm	55°	22	**1005983**	
E	3000 K	2200lm	20°	22	**1005995**	
		2200lm	40°	22	**1005998**	
		2200lm	55°	22	**1006001**	
E	4000 K	2350lm	20°	22	**1006013**	
		2350lm	40°	22	**1006016**	
		2350lm	55°	22	**1006019**	
E	2700 K	2150lm	20°	22	**1005984**	
		2150lm	40°	22	**1005987**	
		2150lm	55°	22	**1005990**	
E	3000 K	2150lm	20°	22	**1006002**	
		2150lm	40°	22	**1006005**	
		2150lm	55°	22	**1006008**	
E	4000 K	2350lm	20°	22	**1006020**	
		2350lm	40°	22	**1006023**	
		2350lm	55°	22	**1006026**	
E	2700 K	2250lm	20°	22	**1005985**	
		2250lm	40°	22	**1005988**	
		2250lm	55°	22	**1005991**	
E	3000 K	2300lm	20°	22	**1006003**	
		2300lm	40°	22	**1006006**	
		2300lm	55°	22	**1006009**	
E	4000 K	2450lm	20°	22	**1006021**	
		2450lm	40°	22	**1006024**	
		2450lm	55°	22	**1006027**	
E	2700 K	2150lm	20°	22	**1005986**	
		2150lm	40°	22	**1005989**	
		2150lm	55°	22	**1005992**	
E	3000 K	2200lm	20°	22	**1006004**	
		2200lm	40°	22	**1006007**	
		2200lm	55°	22	**1006010**	
E	4000 K	2350lm	20°	22	**1006022**	
		2350lm	40°	22	**1006025**	
		2350lm	55°	22	**1006028**	

NUMINOS® GIMBLE XL

NEW LED INSIDE


DL


XL



Product details:

1000/1050mA
Power consumption: 37.4W
Material: aluminium/polycarbonate (PC)



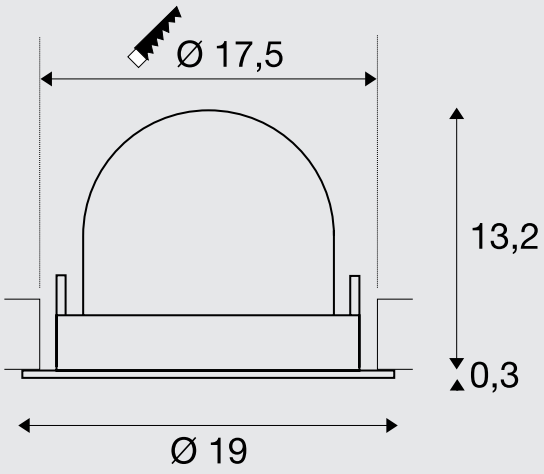


Tip:

Low-voltage plug
Driver not included

You can find suitable drivers, diffusers and reducer rings on pages 58-61.





black




black



white



chrome



white



black



white









chrome

A→G				UGR	PROD. NO.	
F	2700 K	3300lm	20°	22	**1006029**	
		3300lm	40°	22	**1006032**	
		3300lm	55°	22	**1006035**	
E	3000 K	3300lm	20°	22	**1006047**	
		3300lm	40°	22	**1006050**	
		3300lm	55°	22	**1006053**	
E	4000 K	3600lm	20°	22	**1006065**	
		3600lm	40°	22	**1006068**	
		3600lm	55°	22	**1006071**	
F	2700 K	3500lm	20°	22	**1006030**	
		3500lm	40°	22	**1006033**	
		3500lm	55°	22	**1006036**	
E	3000 K	3550lm	20°	22	**1006048**	
		3550lm	40°	22	**1006051**	
		3550lm	55°	22	**1006054**	
E	4000 K	3800lm	20°	22	**1006066**	
		3800lm	40°	22	**1006069**	
		3800lm	55°	22	**1006072**	
F	2700 K	3400lm	20°	22	**1006031**	
		3400lm	40°	22	**1006034**	
		3400lm	55°	22	**1006037**	
E	3000 K	3500lm	20°	22	**1006049**	
		3500lm	40°	22	**1006052**	
		3500lm	55°	22	**1006055**	
E	4000 K	3750lm	20°	22	**1006067**	
		3750lm	40°	22	**1006070**	
		3750lm	55°	22	**1006073**	
F	2700 K	3300lm	20°	22	**1006038**	
		3300lm	40°	22	**1006041**	
		3300lm	55°	22	**1006044**	
E	3000 K	3300lm	20°	22	**1006056**	
		3300lm	40°	22	**1006059**	
		3300lm	55°	22	**1006062**	
E	4000 K	3600lm	20°	22	**1006074**	
		3600lm	40°	22	**1006077**	
		3600lm	55°	22	**1006080**	
F	2700 K	3500lm	20°	22	**1006039**	
		3500lm	40°	22	**1006042**	
		3500lm	55°	22	**1006045**	
E	3000 K	3550lm	20°	22	**1006057**	
		3550lm	40°	22	**1006060**	
		3550lm	55°	22	**1006063**	
E	4000 K	3800lm	20°	22	**1006075**	
		3800lm	40°	22	**1006078**	
		3800lm	55°	22	**1006081**	
F	2700 K	3400lm	20°	22	**1006040**	
		3400lm	40°	22	**1006043**	
		3400lm	55°	22	**1006046**	
E	3000 K	3500lm	20°	22	**1006058**	
		3500lm	40°	22	**1006061**	
		3500lm	55°	22	**1006064**	
E	4000 K	3750lm	20°	22	**1006076**	
		3750lm	40°	22	**1006079**	
		3750lm	55°	22	**1006082**	




Accessories

Perfect driver assignment

	NEW 	NEW 	NEW 			
	LED driver, 200mA, 10W QC	**LED driver, 200mA, 10W, PHASE QC**	**LED driver 200mA, 30W, DALI QC**	**LED driver 250mA, 10W**	**LED driver 250mA, 10W, PHASE**	**LED driver 250mA, 20W, DALI**
	XS	XS	XS	S	S	S
						
	200mA	**200mA**	**200mA**	**250mA**	**250mA**	**250/350/500/700mA**
Material	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)
Color	white	white	white	white	white	white
Primary voltage	200-240V ~50/60Hz	200-240V ~50/60Hz	200-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Secondary voltage	29-42V DC	30-42V DC	15-54V DC	26-40V	30-42V	6-60V
Output current	200mA	200mA	200mA	250mA	250mA	250mA
Sec. number of outputs	1	1	1	1	1	1
Wattage of	5.8W	6W	3.8W	6.5W	7.5W	1.5W
Wattage up to	8.4W	8.4W	13.5W	10W	10W	15W
Min. environmental temp.	–	–	–	-20°C	-20°C	-20°C
Max. environmental temp.	–	–	–	45°C	50°C	50°C
Thermal protection	110°C	110°C	110°C	110°C	110°C	110°C
IP protection rating	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Dimmable	–	PHASE C	DALI	–	PHASE C	DALI
Length	6.5 cm	8.5 cm	18 cm	6.5 cm	8.5 cm	15 cm
Width	3.9 cm	4.1cm	4.5 cm	3.9 cm	3.9 cm	5.2 cm
Height	3.5cm	3 cm	3 cm	2 cm	2.2 cm	2.8 cm
Prod. no.	**1005610**	**1005609**	**1005611**	**1004058**	**1004055**	**1004067**

Diffusers







	XS				S			
	NEW 	NEW 	NEW 	NEW 				
	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
Prod. no.	**1005612**	**1005613**	**1005614**	**1005615**	**1004786**	**1004787**	**1004788**	**1004789**

			
	LED driver 500mA, 30W	**LED driver 500mA, 30W, PHASE**	**LED driver 500mA, 40W, DALI**
	M	**M**	**M**
			
	500/600/700mA	**500mA**	**250/350/500/700mA**
Material	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)
Color	white	white	white
Primary voltage	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Secondary voltage	30-42V	25-42V	6-58V
Output current	500mA	500mA	500mA
Sec. number of outputs	1	1	1
Wattage of	15W	12.5W	1.5W
Wattage up to	29.5W	21W	40.6W
Min. environmental temp.	-20°C	-25°C	-25°C
Max. environmental temp.	50°C	50°C	50°C
Thermal protection	110°C	110°C	110°C
IP protection rating	IP 20	IP 20	IP 20
Dimmable	–	PHASE C	DALI
Length	14.7 cm	11.5W	12.3 cm
Width	4.3 cm	4.1cm	7.9 cm
Height	3 cm	2.5 cm	2.4 cm
Prod. no.	**1004064**	**1004054**	**1004069**

	M			
				
	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
Prod. no.	**1004790**	**1004791**	**1004792**	**1004793**

Accessories

Perfect driver assignment

						
	LED driver 1050mA, 40W	**LED driver 700mA, 30W, PHASE**	**LED driver 700mA, 40W, DALI**	**LED driver 1050mA, 40W**	**LED driver 1000mA, 40W, PHASE**	**LED driver 1050mA, 50W, DALI**
	L	**L**	**L**	**XL**	**XL**	**XL**
						
	500/600/700mA	**700mA**	**700mA**	**800/900/1050mA**	**1000mA**	**1050mA**
Material	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)	Polycarbonate (PC)
Color	white	white	white	white	white	white
Primary voltage	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Secondary voltage	30-42V	30-42V	6-58V	30-42V	25-40V DC	6-58V
Output current	700mA	700mA	250/350/500/700mA	1050mA	1050mA	1050mA
Sec. number of outputs	1	1	1	1	1	1
Wattage of	15W	21W	1.5W	24W	26.3W	4.2W
Wattage up to	29.5W	29.4W	40.6W	44W	42W	50W
Min. environmental temp.	-20°C	-20°C	-25°C	-20°C	-20°C	-25°C
Max. environmental temp.	50°C	50°C	50°C	50°C	50°C	50°C
Thermal protection	110°C	110°C	110°C	110°C	110°C	110°C
IP protection rating	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20
Dimmable	–	PHASE C	DALI	–	PHASE C	DALI
Length	14.7 cm	11.5W	12.3 cm	9.7 cm	14.5 cm	12.3 cm
Width	4.3 cm	4.4 cm	7.9 cm	4.3 cm	4 cm	7.9 cm
Height	3 cm	3 cm	2.4 cm	3 cm	3 cm	2.4 cm
Prod. no.	**1004062**	**1004065**	**1004070**	**1004059**	**1004066**	**1004071**

Diffusers

	L				**XL**			
								
	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb	Diffuser elliptical	Diffuser prismatic	Diffuser frosted	Diffuser honeycomb
Prod. no.	**1004794**	**1004795**	**1004796**	**1004797**	**1004798**	**1004799**	**1004800**	**1004801**

NEW

TIME FOR A CHANGE. TIME FOR AN UPDATE.

An old recessed ceiling light, often still fitted with conventional bulbs, should give way to an energy-efficient and cost-effective alternative. When removing the old fitting, a larger ceiling cut-out than before will often be required.

SLV offers the ideal solution to this problem – our new reducer rings.
The reducer rings completely cover the larger ceiling cut-out, while at the same time providing perfect support for your new, compact, recessed ceiling light.

Neat, time-saving and uncomplicated.
And also perfectly tailored to the NUMINOS® downlight and spotlight system.



1. Old recessed ceiling light with a larger ceiling cut-out



2. Removal of the old recessed ceiling light



3. Installation of the reducer ring



4. Reducer ring installed and larger ceiling cut-out fully covered



5. Electrical connection and installation of the new recessed ceiling light



6. New recessed ceiling light placed into the reducer ring


Reducer ring, round						
Material	steel	steel	steel	steel	steel
External diameter	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal diameter	7 cm	9 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006135**	**1006139**	**1006143**	**1006147**	**1006151**
Prod. no. white	**1006136**	**1006140**	**1006144**	**1006148**	**1006152**

Reducer ring, square						
Material	steel	steel	steel	steel	steel
Length	16 cm	16 cm	24 cm	24 cm	24 cm
Width	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal diameter	7 cm	9 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006137**	**1006141**	**1006145**	**1006149**	**1006153**
Prod. no. white	**1006138**	**1006142**	**1006146**	**1006150**	**1006154**


NUMINOS® S


3-phase

Product details:
220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)



L80B50 350° 90°

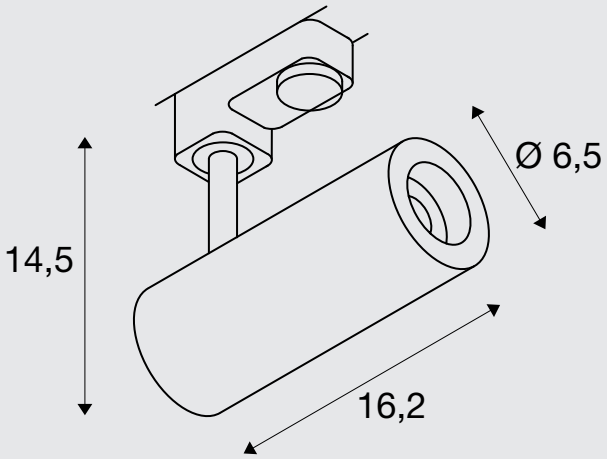

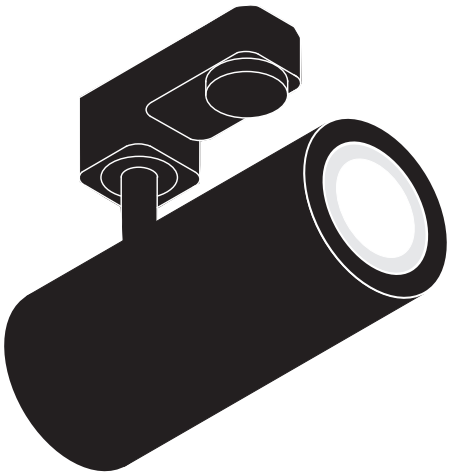


black

Tip:
Decorative ring also available in white



Decorative ring S	white	Prod. no. **1006167**

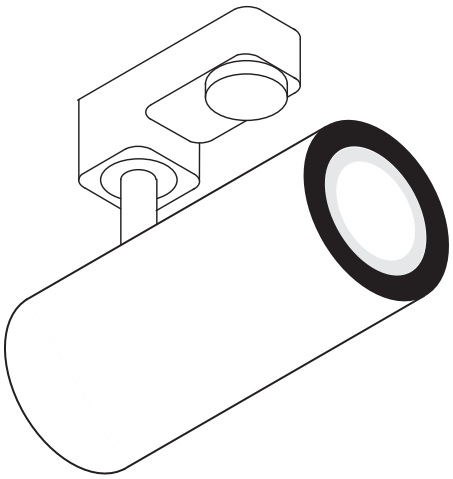


white

	A→G		lm		UGR	PROD. NO.	
C	F	2700 K	985lm	24°	16	**1004074**	
			985lm	36°	16	**1004075**	
			980lm	60°	19	**1004076**	
	E	3000 K	1020lm	24°	13	**1004082**	
			1020lm	36°	13	**1004083**	
			1020lm	60°	19	**1004084**	
	E	4000 K	1100lm	24°	16	**1004090**	
			1100lm	36°	16	**1004091**	
			1100lm	60°	19	**1004092**	
Dali	F	2700 K	985lm	24°	16	**1004362**	
			985lm	36°	16	**1004363**	
			980lm	60°	19	**1004364**	
	E	3000 K	1020lm	24°	13	**1004370**	
			1020lm	36°	13	**1004371**	
			1020lm	60°	19	**1004372**	
	E	4000 K	1100lm	24°	16	**1004378**	
			1100lm	36°	16	**1004379**	
			1100lm	60°	19	**1004380**	
C	F	2700 K	985lm	24°	16	**1004078**	
			985lm	36°	16	**1004079**	
			980lm	60°	19	**1004080**	
	E	3000 K	1020lm	24°	13	**1004086**	
			1020lm	36°	13	**1004087**	
			1020lm	60°	19	**1004088**	
	E	4000 K	1100lm	24°	16	**1004094**	
			1100lm	36°	16	**1004095**	
			1100lm	60°	19	**1004096**	
Dali	F	2700 K	985lm	24°	16	**1004366**	
			985lm	36°	16	**1004367**	
			980lm	60°	19	**1004368**	
	E	3000 K	1020lm	24°	13	**1004374**	
			1020lm	36°	13	**1004375**	
			1020lm	60°	19	**1004376**	
	E	4000 K	1100lm	24°	16	**1004382**	
			1100lm	36°	16	**1004383**	
			1100lm	60°	19	**1004384**	


NUMINOS® M

3-phase

Product details:
220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)




L80B50 350° 90°

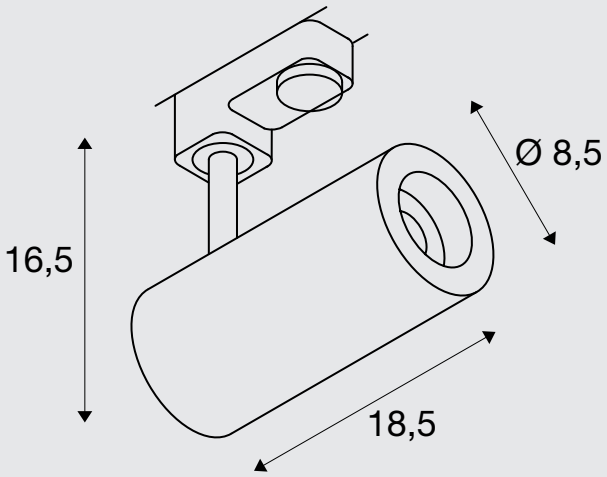


Tip:
Decorative ring also available in white



Decorative ring M	white	Prod. no. **1006168**

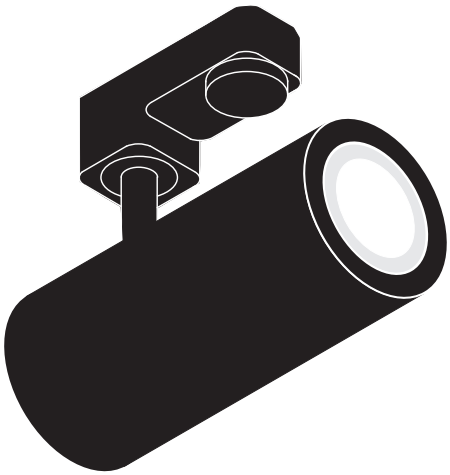

black

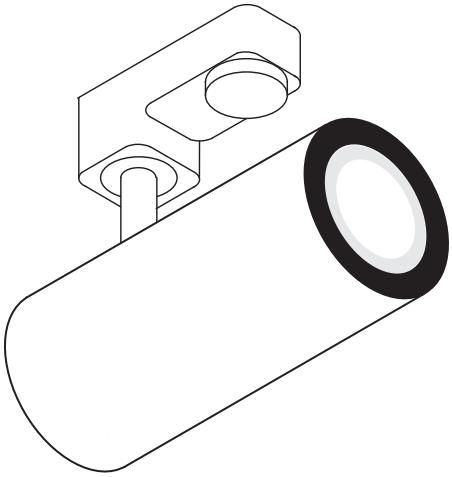


white

	A→G		lm		UGR	PROD. NO.	
			1925lm	24°	16	**1004170**	
		2700 K	1935lm	36°	16	**1004171**	
			1885lm	60°	22	**1004172**	
			1955lm	24°	16	**1004178**	
C		3000 K	1970lm	36°	13	**1004179**	
			1880lm	60°	22	**1004180**	
			2125lm	24°	19	**1004186**	
		4000 K	2120lm	36°	16	**1004187**	
			2060lm	60°	25	**1004188**	
			1925lm	24°	16	**1004458**	
		2700 K	1935lm	36°	16	**1004459**	
			1885lm	60°	22	**1004460**	
			1955lm	24°	16	**1004466**	
Dali		3000 K	1970lm	36°	13	**1004467**	
			1880lm	60°	22	**1004468**	
			2125lm	24°	19	**1004474**	
		4000 K	2120lm	36°	16	**1004475**	
			2060lm	60°	25	**1004476**	
			1925lm	24°	16	**1004174**	
		2700 K	1935lm	36°	16	**1004175**	
			1885lm	60°	22	**1004176**	
			1955lm	24°	16	**1004182**	
C		3000 K	1970lm	36°	13	**1004183**	
			1880lm	60°	22	**1004184**	
			2125lm	24°	19	**1004190**	
		4000 K	2120lm	36°	16	**1004191**	
			2060lm	60°	25	**1004192**	
			1925lm	24°	16	**1004462**	
		2700 K	1935lm	36°	16	**1004463**	
			1885lm	60°	22	**1004464**	
			1955lm	24°	16	**1004470**	
Dali		3000 K	1970lm	36°	13	**1004471**	
			1880lm	60°	22	**1004472**	
			2125lm	24°	19	**1004478**	
		4000 K	2120lm	36°	16	**1004479**	
			2060lm	60°	25	**1004480**	


NUMINOS® L


3-phase

Product details:
220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)



L80B50 350° 90°

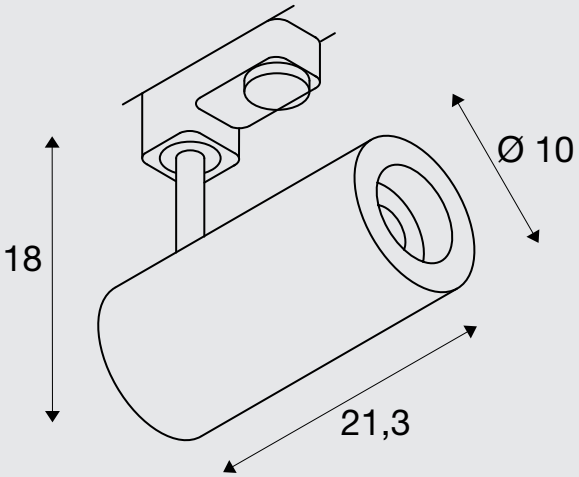

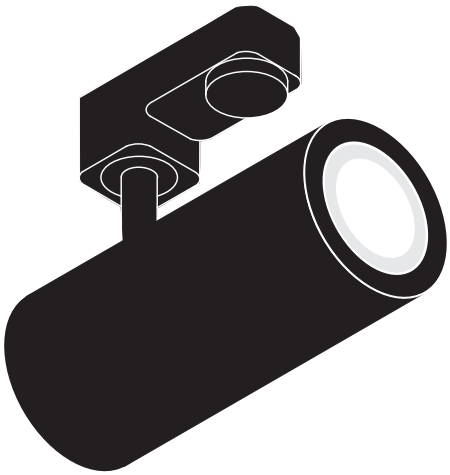


black

Tip:
Decorative ring also available in white



Decorative ring L	white	Prod. no. **1006169**

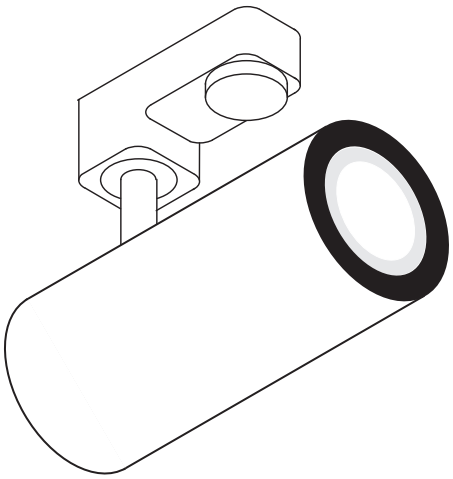

white

							PROD. NO.	
C	A→G	2700 K	2440lm	24°	19	**1004266**		
			2400lm	36°	19	**1004267**		
			2475lm	60°	22	**1004268**		
		3000 K	2430lm	24°	13	**1004274**		
			2340lm	36°	13	**1004275**		
			2400lm	60°	22	**1004276**		
		4000 K	2675lm	24°	19	**1004282**		
			2620lm	36°	19	**1004283**		
			2715lm	60°	22	**1004284**		
Dali		2700 K	2440lm	24°	19	**1004554**		
			2400lm	36°	19	**1004555**		
			2475lm	60°	22	**1004556**		
		3000 K	2430lm	24°	13	**1004562**		
			2340lm	36°	13	**1004563**		
			2400lm	60°	22	**1004564**		
		4000 K	2675lm	24°	19	**1004570**		
			2620lm	36°	19	**1004571**		
			2715lm	60°	22	**1004572**		
C		2700 K	2440lm	24°	19	**1004270**		
			2400lm	36°	19	**1004271**		
			2475lm	60°	22	**1004272**		
		3000 K	2430lm	24°	13	**1004278**		
			2340lm	36°	13	**1004279**		
			2400lm	60°	22	**1004280**		
		4000 K	2675lm	24°	19	**1004286**		
			2620lm	36°	19	**1004287**		
			2715lm	60°	22	**1004288**		
Dali		2700 K	2440lm	24°	19	**1004558**		
			2400lm	36°	19	**1004559**		
			2475lm	60°	22	**1004560**		
		3000 K	2430lm	24°	13	**1004566**		
			2340lm	36°	13	**1004567**		
			2400lm	60°	22	**1004568**		
		4000 K	2675lm	24°	19	**1004574**		
			2620lm	36°	19	**1004575**		
			2715lm	60°	22	**1004576**		


NUMINOS® XL

NEW VARIANT LED INSIDE


3-phase


Product details:

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)



L80B50 350° 90°

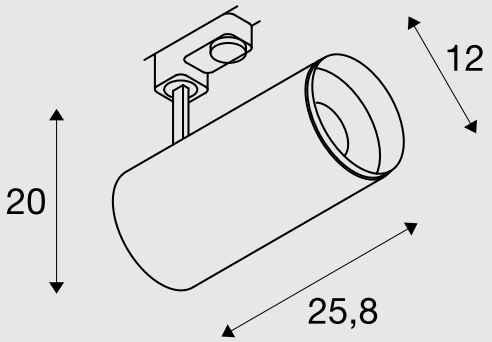

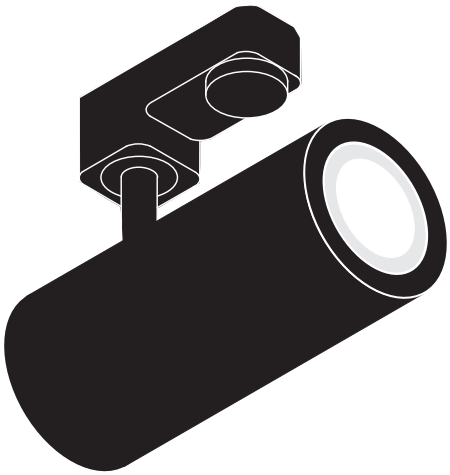


black

Tip:



Decorative ring also available in white



Decorative ring XL	white	Prod. no. **1006170**

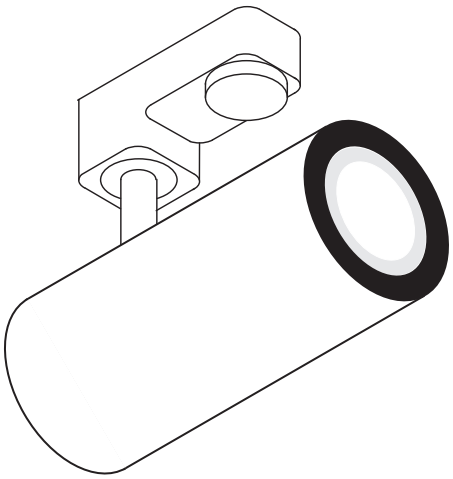

white

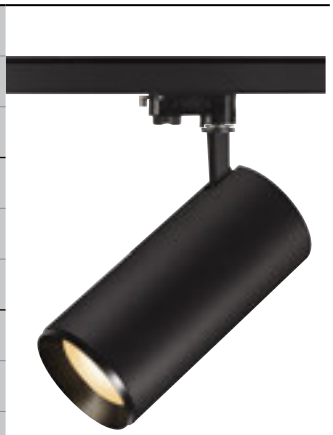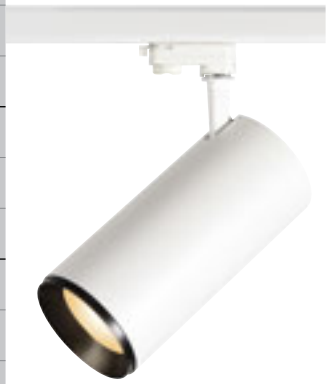	A→G		lm		UGR	PROD. NO.	
	F	2700 K	3290lm	24°	19	**1005723**	
			3250lm	36°	19	**1005724**	
			2980lm	60°	25	**1005725**	
C	E	3000 K	3530lm	24°	19	**1005729**	
			3490lm	36°	19	**1005730**	
			3210lm	60°	25	**1005731**	
	E	4000 K	3800lm	24°	19	**1005735**	
			3760lm	36°	19	**1005736**	
			3460lm	60°	25	**1005737**	
	F	2700 K	3290lm	24°	19	**1005795**	
			3250lm	36°	19	**1005796**	
			2980lm	60°	25	**1005797**	
Dali	E	3000 K	3530lm	24°	19	**1005801**	
			3490lm	36°	19	**1005802**	
			3210lm	60°	25	**1005803**	
	E	4000 K	3800lm	24°	19	**1005807**	
			3760lm	36°	19	**1005808**	
			3460lm	60°	25	**1005809**	
	F	2700 K	3290lm	24°	19	**1005726**	
			3250lm	36°	19	**1005727**	
			2980lm	60°	25	**1005728**	
C	E	3000 K	3530lm	24°	19	**1005732**	
			3490lm	36°	19	**1005733**	
			3210lm	60°	25	**1005734**	
	E	4000 K	3800lm	24°	19	**1005738**	
			3760lm	36°	19	**1005739**	
			3460lm	60°	25	**1005740**	
	F	2700 K	3290lm	24°	19	**1005798**	
			3250lm	36°	19	**1005799**	
			2980lm	60°	25	**1005800**	
Dali	E	3000 K	3530lm	24°	19	**1005804**	
			3490lm	36°	19	**1005805**	
			3210lm	60°	25	**1005806**	
	E	4000 K	3800lm	24°	19	**1005810**	
			3760lm	36°	19	**1005811**	
			3460lm	60°	25	**1005812**	


NUMINOS® ZOOM M


NEW LED INSIDE

3-phase


Product details:
220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

• Half-peak divergence adjustable from 15°-60°.




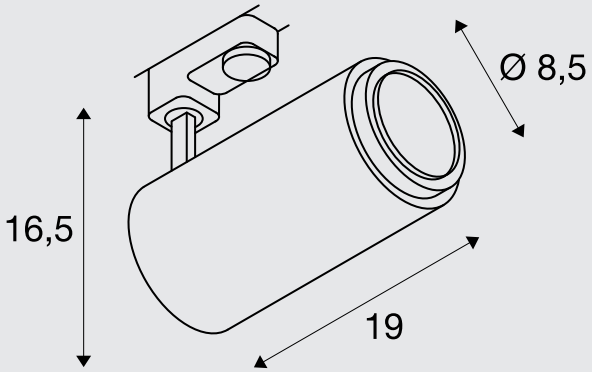





black




white








C	A→G	2700 K	680-1650lm	15°-60°	25	**1006108**
		3000 K	750-1800lm	15°-60°	25	**1006110**
		4000 K	780-1900lm	15°-60°	25	**1006112**
Dali		2700 K	680-1650lm	15°-60°	25	**1006114**
		3000 K	750-1800lm	15°-60°	25	**1006116**
		4000 K	780-1900lm	15°-60°	25	**1006118**
C		2700 K	680-1650lm	15°-60°	25	**1006109**
		3000 K	750-1800lm	15°-60°	25	**1006111**
		4000 K	780-1900lm	15°-60°	25	**1006113**
Dali		2700 K	680-1650lm	15°-60°	25	**1006115**
		3000 K	750-1800lm	15°-60°	25	**1006117**
		4000 K	780-1900lm	15°-60°	25	**1006119**

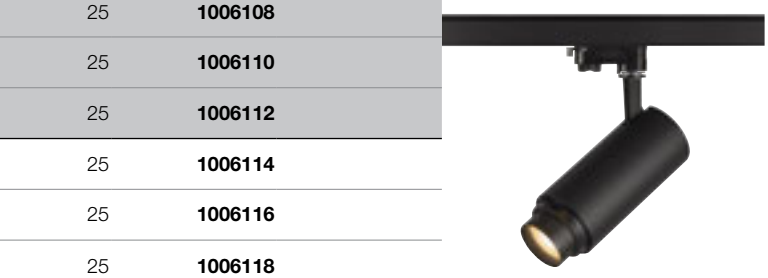

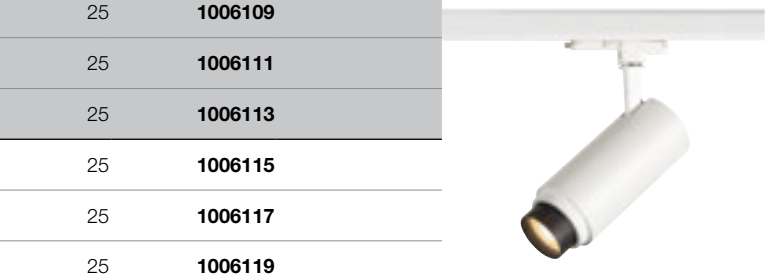







NUMINOS® S


CW

Product details:
220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)



L80B50 350° 90°

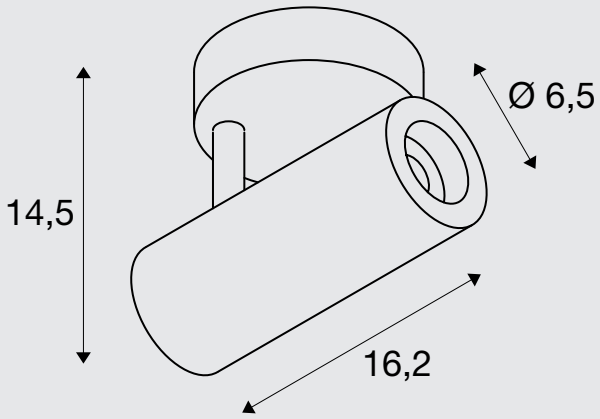

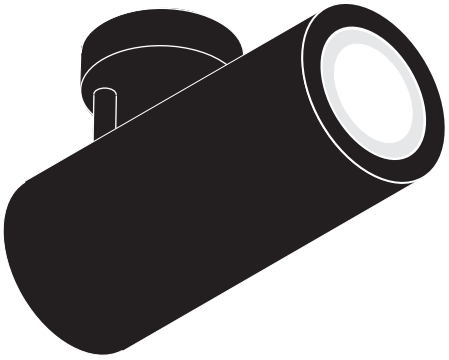


black

Tip:
Decorative ring also available in white



Decorative ring S	white	Prod. no. **1006167**

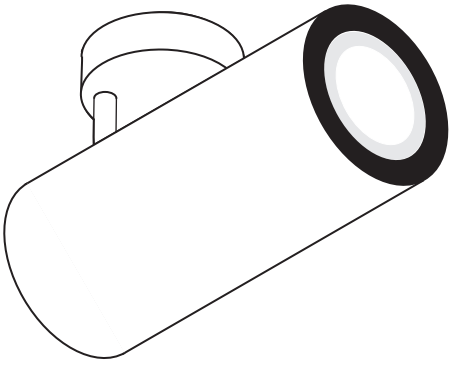


white


	A→G		lm		UGR	PROD. NO.	
C	F	2700 K	985lm	24°	16	**1004098**	
			985lm	36°	16	**1004099**	
			980lm	60°	19	**1004100**	
	E	3000 K	1020lm	24°	13	**1004106**	
			1020lm	36°	13	**1004107**	
			1020lm	60°	19	**1004108**	
	E	4000 K	1100lm	24°	16	**1004114**	
			1100lm	36°	16	**1004115**	
			1100lm	60°	19	**1004116**	
Dali	F	2700 K	985lm	24°	16	**1004386**	
			985lm	36°	16	**1004387**	
			980lm	60°	19	**1004388**	
	E	3000 K	1020lm	24°	13	**1004394**	
			1020lm	36°	13	**1004395**	
			1020lm	60°	19	**1004396**	
	E	4000 K	1100lm	24°	16	**1004402**	
			1100lm	36°	16	**1004403**	
			1100lm	60°	19	**1004404**	
C	F	2700 K	985lm	24°	16	**1004102**	
			985lm	36°	16	**1004103**	
			980lm	60°	19	**1004104**	
	E	3000 K	1020lm	24°	13	**1004110**	
			1020lm	36°	13	**1004111**	
			1020lm	60°	19	**1004112**	
	E	4000 K	1100lm	24°	16	**1004118**	
			1100lm	36°	16	**1004119**	
			1100lm	60°	19	**1004120**	
Dali	F	2700 K	985lm	24°	16	**1004390**	
			985lm	36°	16	**1004391**	
			980lm	60°	19	**1004392**	
	E	3000 K	1020lm	24°	13	**1004398**	
			1020lm	36°	13	**1004399**	
			1020lm	60°	19	**1004400**	
	E	4000 K	1100lm	24°	16	**1004406**	
			1100lm	36°	16	**1004407**	
			1100lm	60°	19	**1004408**	

NUMINOS® M

CL

Product details:
220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)




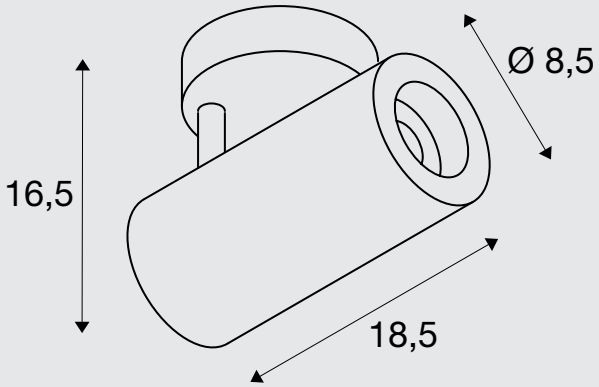


Tip:
Decorative ring also available in white



Decorative ring M	white	Prod. no. **1006168**

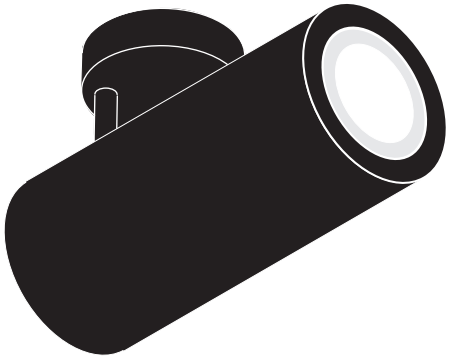

black

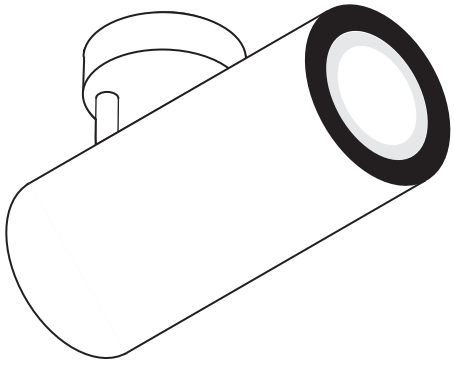

white


	A→G		lm		UGR	PROD. NO.	
			1925lm	24°	16	**1004194**	
	E	2700 K	1935lm	36°	16	**1004195**	
			1885lm	60°	22	**1004196**	
			1955lm	24°	16	**1004202**	
C	E	3000 K	1970lm	36°	13	**1004203**	
			1880lm	60°	22	**1004204**	
			2125lm	24°	19	**1004210**	
	E	4000 K	2120lm	36°	16	**1004211**	
			2060lm	60°	25	**1004212**	
			1925lm	24°	16	**1004482**	
	E	2700 K	1935lm	36°	16	**1004483**	
			1885lm	60°	22	**1004484**	
			1955lm	24°	16	**1004490**	
Dali	E	3000 K	1970lm	36°	13	**1004491**	
			1880lm	60°	22	**1004492**	
			2125lm	24°	19	**1004498**	
	E	4000 K	2120lm	36°	16	**1004499**	
			2060lm	60°	25	**1004500**	
			1925lm	24°	16	**1004198**	
	E	2700 K	1935lm	36°	16	**1004199**	
			1885lm	60°	22	**1004200**	
			1955lm	24°	16	**1004206**	
C	E	3000 K	1970lm	36°	13	**1004207**	
			1880lm	60°	22	**1004208**	
			2125lm	24°	19	**1004214**	
	E	4000 K	2120lm	36°	16	**1004215**	
			2060lm	60°	25	**1004216**	
			1925lm	24°	16	**1004486**	
	E	2700 K	1935lm	36°	16	**1004487**	
			1885lm	60°	22	**1004488**	
			1955lm	24°	16	**1004494**	
Dali	E	3000 K	1970lm	36°	13	**1004495**	
			1880lm	60°	22	**1004496**	
			2125lm	24°	19	**1004502**	
	E	4000 K	2120lm	36°	16	**1004503**	
			2060lm	60°	25	**1004504**	


NUMINOS® L


CL

Product details:

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)



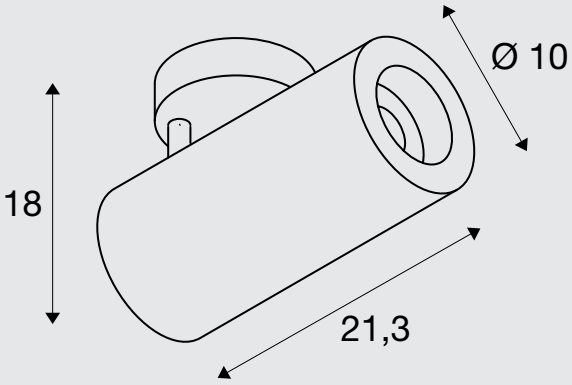

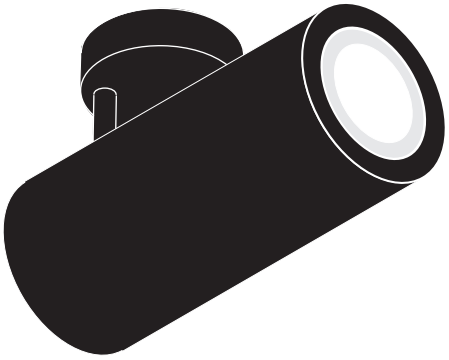


black

Tip:
Decorative ring also available in white



Decorative ring L	white	Prod. no. **1006169**

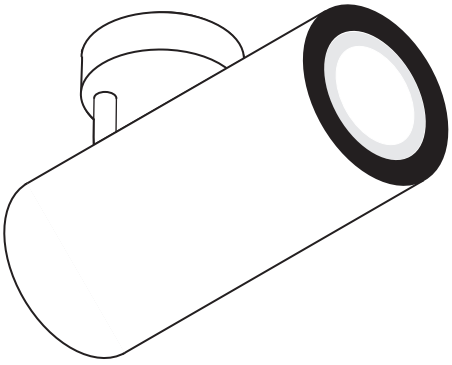

white


	A→G		lm		UGR	PROD. NO.	
C	E	2700 K	2440lm	24°	19	**1004290**	
			2400lm	36°	19	**1004291**	
			2475lm	60°	22	**1004292**	
	E	3000 K	2430lm	24°	13	**1004298**	
			2340lm	36°	13	**1004299**	
			2400lm	60°	22	**1004300**	
	E	4000 K	2675lm	24°	19	**1004306**	
			2620lm	36°	19	**1004307**	
			2715lm	60°	22	**1004308**	
Dali	E	2700 K	2440lm	24°	19	**1004578**	
			2400lm	36°	19	**1004579**	
			2475lm	60°	22	**1004580**	
	E	3000 K	2430lm	24°	13	**1004586**	
			2340lm	36°	13	**1004587**	
			2400lm	60°	22	**1004588**	
	E	4000 K	2675lm	24°	19	**1004594**	
			2620lm	36°	19	**1004595**	
			2715lm	60°	22	**1004596**	
C	E	2700 K	2440lm	24°	19	**1004294**	
			2400lm	36°	19	**1004295**	
			2475lm	60°	22	**1004296**	
	E	3000 K	2430lm	24°	13	**1004302**	
			2340lm	36°	13	**1004303**	
			2400lm	60°	22	**1004304**	
	E	4000 K	2675lm	24°	19	**1004310**	
			2620lm	36°	19	**1004311**	
			2715lm	60°	22	**1004312**	
Dali	E	2700 K	2440lm	24°	19	**1004582**	
			2400lm	36°	19	**1004583**	
			2475lm	60°	22	**1004584**	
	E	3000 K	2430lm	24°	13	**1004590**	
			2340lm	36°	13	**1004591**	
			2400lm	60°	22	**1004592**	
	E	4000 K	2675lm	24°	19	**1004598**	
			2620lm	36°	19	**1004599**	
			2715lm	60°	22	**1004600**	


NUMINOS® XL


NEW VARIANT LED INSIDE

CL

Product details:
220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)



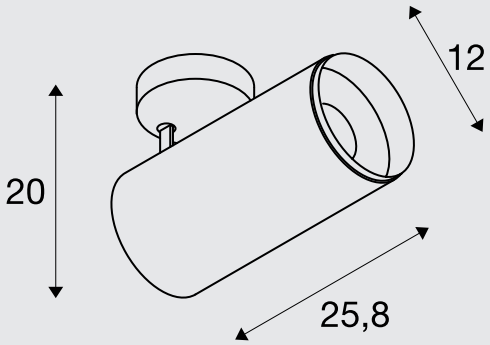

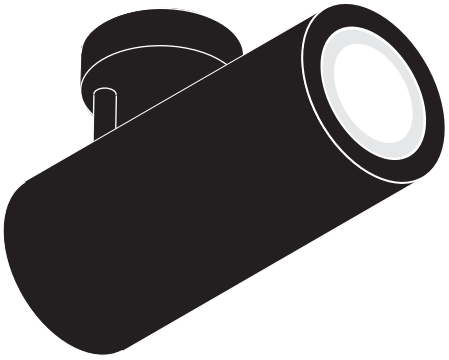


black

Tip:
Decorative ring also available in white



Decorative ring XL	white	Prod. no. **1006170**

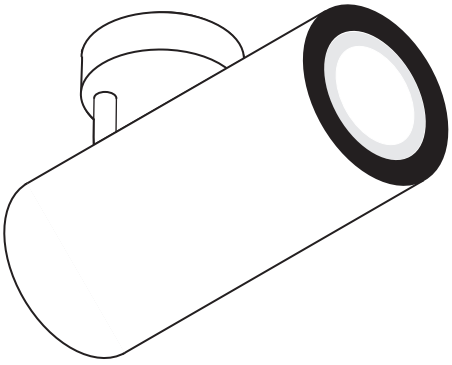

white


	A→G		lm		UGR	PROD. NO.	
C	F	2700 K	3290lm	24°	19	**1006083**	
			3250lm	36°	19	**1006084**	
			2980lm	60°	25	**1006085**	
	E	3000 K	3530lm	24°	19	**1006089**	
			3490lm	36°	19	**1006090**	
			3210lm	60°	25	**1006091**	
	E	4000 K	3800lm	24°	19	**1006095**	
			3760lm	36°	19	**1006096**	
			3460lm	60°	25	**1006097**	
Dali	F	2700 K	3290lm	24°	19	**1005741**	
			3250lm	36°	19	**1005742**	
			2980lm	60°	25	**1005743**	
	E	3000 K	3530lm	24°	19	**1005747**	
			3490lm	36°	19	**1005748**	
			3210lm	60°	25	**1005749**	
	E	4000 K	3800lm	24°	19	**1005753**	
			3760lm	36°	19	**1005754**	
			3460lm	60°	25	**1005755**	
C	F	2700 K	3290lm	24°	19	**1006086**	
			3250lm	36°	19	**1006087**	
			2980lm	60°	25	**1006088**	
	E	3000 K	3530lm	24°	19	**1006092**	
			3490lm	36°	19	**1006093**	
			3210lm	60°	25	**1006094**	
	E	4000 K	3800lm	24°	19	**1006098**	
			3760lm	36°	19	**1006099**	
			3460lm	60°	25	**1006100**	
Dali	F	2700 K	3290lm	24°	19	**1005744**	
			3250lm	36°	19	**1005745**	
			2980lm	60°	25	**1005746**	
	E	3000 K	3530lm	24°	19	**1005750**	
			3490lm	36°	19	**1005751**	
			3210lm	60°	25	**1005752**	
	E	4000 K	3800lm	24°	19	**1005756**	
			3760lm	36°	19	**1005757**	
			3460lm	60°	25	**1005758**	

NUMINOS® S

CL

Product details:
220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

L80B50

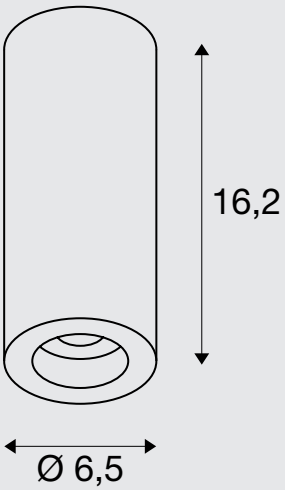




black

Tip:
Decorative ring also available in white



Decorative ring S	white	Prod. no. **1006167**

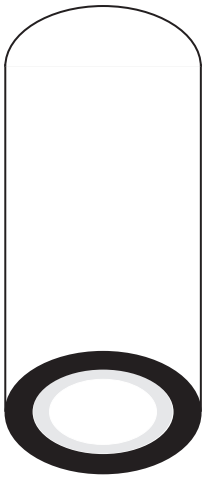

white


	A→G		lm		UGR	PROD. NO.	
C	F	2700 K	985lm	24°	16	**1004122**	
			985lm	36°	16	**1004123**	
			980lm	60°	19	**1004124**	
	E	3000 K	1020lm	24°	13	**1004130**	
			1020lm	36°	13	**1004131**	
			1020lm	60°	19	**1004132**	
	E	4000 K	1100lm	24°	16	**1004138**	
			1100lm	36°	16	**1004139**	
			1100lm	60°	19	**1004140**	
Dali	F	2700 K	985lm	24°	16	**1004410**	
			985lm	36°	16	**1004411**	
			980lm	60°	19	**1004412**	
	E	3000 K	1020lm	24°	13	**1004418**	
			1020lm	36°	13	**1004419**	
			1020lm	60°	19	**1004420**	
	E	4000 K	1100lm	24°	16	**1004426**	
			1100lm	36°	16	**1004427**	
			1100lm	60°	19	**1004428**	
C	F	2700 K	985lm	24°	16	**1004126**	
			985lm	36°	16	**1004127**	
			980lm	60°	19	**1004128**	
	E	3000 K	1020lm	24°	13	**1004134**	
			1020lm	36°	13	**1004135**	
			1020lm	60°	19	**1004136**	
	E	4000 K	1100lm	24°	16	**1004142**	
			1100lm	36°	16	**1004143**	
			1100lm	60°	19	**1004144**	
Dali	F	2700 K	985lm	24°	16	**1004414**	
			985lm	36°	16	**1004415**	
			980lm	60°	19	**1004416**	
	E	3000 K	1020lm	24°	13	**1004422**	
			1020lm	36°	13	**1004423**	
			1020lm	60°	19	**1004424**	
	E	4000 K	1100lm	24°	16	**1004430**	
			1100lm	36°	16	**1004431**	
			1100lm	60°	19	**1004432**	

NUMINOS® M

CL

Product details:
220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

L80B50

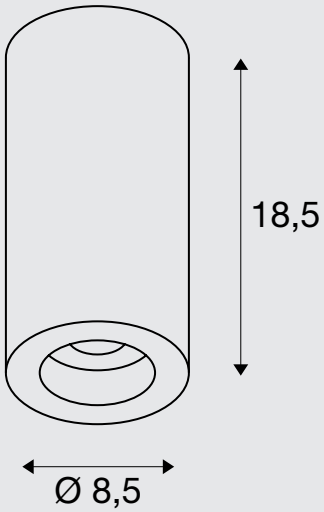


Tip:
Decorative ring also available in white



Decorative ring M	white	Prod. no. **1006168**



black

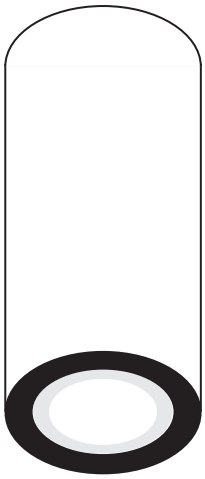

white


	A→G		lm		UGR	PROD. NO.	
C	E	2700 K	1925lm	24°	16	**1004218**	
			1935lm	36°	16	**1004219**	
			1885lm	60°	22	**1004220**	
	E	3000 K	1955lm	24°	16	**1004226**	
			1970lm	36°	13	**1004227**	
			1880lm	60°	22	**1004228**	
	E	4000 K	2125lm	24°	19	**1004234**	
			2120lm	36°	16	**1004235**	
			2060lm	60°	25	**1004236**	
Dali	E	2700 K	1925lm	24°	16	**1004506**	
			1935lm	36°	16	**1004507**	
			1885lm	60°	22	**1004508**	
	E	3000 K	1955lm	24°	16	**1004514**	
			1970lm	36°	13	**1004515**	
			1880lm	60°	22	**1004516**	
	E	4000 K	2125lm	24°	19	**1004522**	
			2120lm	36°	16	**1004523**	
			2060lm	60°	25	**1004524**	
C	E	2700 K	1925lm	24°	16	**1004222**	
			1935lm	36°	16	**1004223**	
			1885lm	60°	22	**1004224**	
	E	3000 K	1955lm	24°	16	**1004230**	
			1970lm	36°	13	**1004231**	
			1880lm	60°	22	**1004232**	
	E	4000 K	2125lm	24°	19	**1004238**	
			2120lm	36°	16	**1004239**	
			2060lm	60°	25	**1004240**	
Dali	E	2700 K	1925lm	24°	16	**1004510**	
			1935lm	36°	16	**1004511**	
			1885lm	60°	22	**1004512**	
	E	3000 K	1955lm	24°	16	**1004518**	
			1970lm	36°	13	**1004519**	
			1880lm	60°	22	**1004520**	
	E	4000 K	2125lm	24°	19	**1004526**	
			2120lm	36°	16	**1004527**	
			2060lm	60°	25	**1004528**	

NUMINOS® L

CL

Product details:
220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)

L80B50

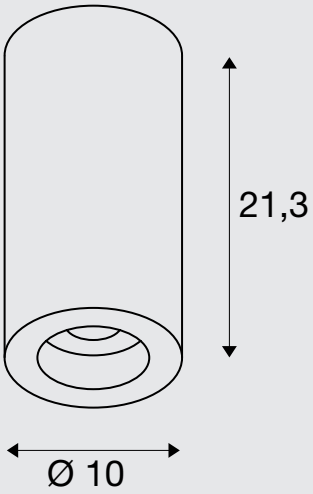


Tip:
Decorative ring also available in white



Decorative ring L	white	Prod. no. **1006169**



black

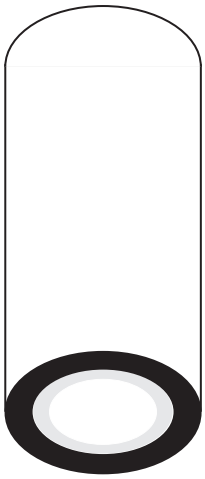

white

	A→G		lm		UGR	PROD. NO.	
			2440lm	24°	19	**1004314**	
		2700 K	2400lm	36°	19	**1004315**	
			2475lm	60°	22	**1004316**	
			2430lm	24°	13	**1004322**	
C		3000 K	2340lm	36°	13	**1004323**	
			2400lm	60°	22	**1004324**	
			2675lm	24°	19	**1004330**	
		4000 K	2620lm	36°	19	**1004331**	
			2715lm	60°	22	**1004332**	
			2440lm	24°	19	**1004602**	
		2700 K	2400lm	36°	19	**1004603**	
			2475lm	60°	22	**1004604**	
			2430lm	24°	13	**1004610**	
Dali		3000 K	2340lm	36°	13	**1004611**	
			2400lm	60°	22	**1004612**	
			2675lm	24°	19	**1004618**	
		4000 K	2620lm	36°	19	**1004619**	
			2715lm	60°	22	**1004620**	
			2440lm	24°	19	**1004318**	
		2700 K	2400lm	36°	19	**1004319**	
			2475lm	60°	22	**1004320**	
			2430lm	24°	13	**1004326**	
C		3000 K	2340lm	36°	13	**1004327**	
			2400lm	60°	22	**1004328**	
			2675lm	24°	19	**1004334**	
		4000 K	2620lm	36°	19	**1004335**	
			2715lm	60°	22	**1004336**	
			2440lm	24°	19	**1004606**	
		2700 K	2400lm	36°	19	**1004607**	
			2475lm	60°	22	**1004608**	
			2430lm	24°	13	**1004614**	
Dali		3000 K	2340lm	36°	13	**1004615**	
			2400lm	60°	22	**1004616**	
			2675lm	24°	19	**1004622**	
		4000 K	2620lm	36°	19	**1004623**	
			2715lm	60°	22	**1004624**	


NUMINOS® XL

NEW VARIANT LED INSIDE

CL

Product details:
220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)

50 000 Hours LED
L80B50

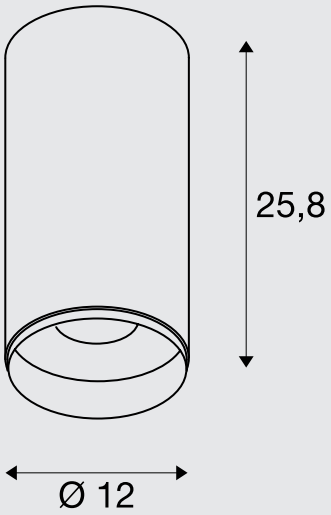




black

Tip:
Decorative ring also available in white



Decorative ring XL	white	Prod. no. **1006170**

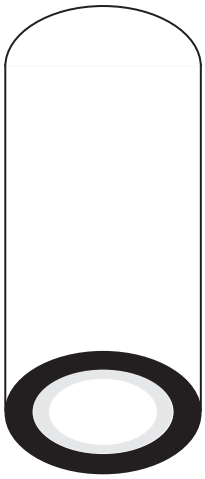


white

	A→G		lm		UGR	PROD. NO.	
	F	2700 K	3290lm	24°	19	**1005687**	
			3250lm	36°	19	**1005688**	
			2980lm	60°	25	**1005689**	
C	E	3000 K	3530lm	24°	19	**1005693**	
			3490lm	36°	19	**1005694**	
			3210lm	60°	25	**1005695**	
	E	4000 K	3800lm	24°	19	**1005699**	
			3760lm	36°	19	**1005700**	
			3460lm	60°	25	**1005701**	
	F	2700 K	3290lm	24°	19	**1005759**	
			3250lm	36°	19	**1005760**	
			2980lm	60°	25	**1005761**	
Dali	E	3000 K	3530lm	24°	19	**1005765**	
			3490lm	36°	19	**1005766**	
			3210lm	60°	25	**1005767**	
	E	4000 K	3800lm	24°	19	**1005771**	
			3760lm	36°	19	**1005772**	
			3460lm	60°	25	**1005773**	
	F	2700 K	3290lm	24°	19	**1005690**	
			3250lm	36°	19	**1005691**	
			2980lm	60°	25	**1005692**	
C	E	3000 K	3530lm	24°	19	**1005696**	
			3490lm	36°	19	**1005697**	
			3210lm	60°	25	**1005698**	
	E	4000 K	3800lm	24°	19	**1005702**	
			3760lm	36°	19	**1005703**	
			3460lm	60°	25	**1005704**	
	F	2700 K	3290lm	24°	19	**1005762**	
			3250lm	36°	19	**1005763**	
			2980lm	60°	25	**1005764**	
Dali	E	3000 K	3530lm	24°	19	**1005768**	
			3490lm	36°	19	**1005769**	
			3210lm	60°	25	**1005770**	
	E	4000 K	3800lm	24°	19	**1005774**	
			3760lm	36°	19	**1005775**	
			3460lm	60°	25	**1005776**	


NUMINOS® S

PD

Product details:
220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)




L80B50 250

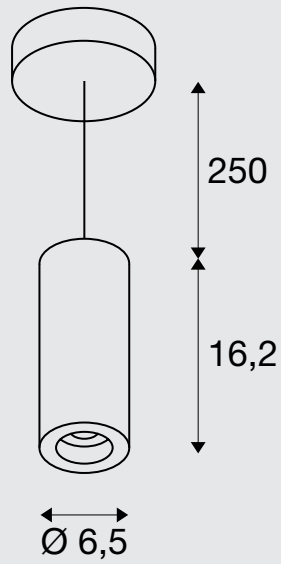


Tip:
Decorative ring also available in white



Decorative ring S	white	Prod. no. **1006167**

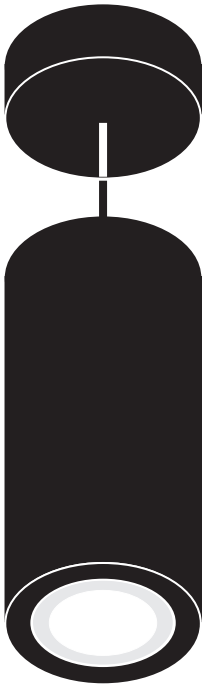

black

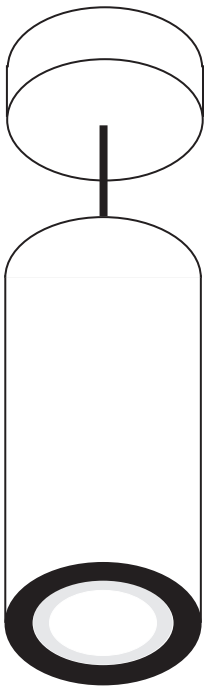


white

	A→G		lm		UGR	PROD. NO.	
C	F	2700 K	985lm	24°	16	**1004146**	
			985lm	36°	16	**1004147**	
			980lm	60°	19	**1004148**	
	E	3000 K	1020lm	24°	13	**1004154**	
			1020lm	36°	13	**1004155**	
			1020lm	60°	19	**1004156**	
	E	4000 K	1100lm	24°	16	**1004162**	
			1100lm	36°	16	**1004163**	
			1100lm	60°	19	**1004164**	
Dali	F	2700 K	985lm	24°	16	**1004434**	
			985lm	36°	16	**1004435**	
			980lm	60°	19	**1004436**	
	E	3000 K	1020lm	24°	13	**1004442**	
			1020lm	36°	13	**1004443**	
			1020lm	60°	19	**1004444**	
	E	4000 K	1100lm	24°	16	**1004450**	
			1100lm	36°	16	**1004451**	
			1100lm	60°	19	**1004452**	
C	F	2700 K	985lm	24°	16	**1004150**	
			985lm	36°	16	**1004151**	
			980lm	60°	19	**1004152**	
	E	3000 K	1020lm	24°	13	**1004158**	
			1020lm	36°	13	**1004159**	
			1020lm	60°	19	**1004160**	
	E	4000 K	1100lm	24°	16	**1004166**	
			1100lm	36°	16	**1004167**	
			1100lm	60°	19	**1004168**	
Dali	F	2700 K	985lm	24°	16	**1004438**	
			985lm	36°	16	**1004439**	
			980lm	60°	19	**1004440**	
	E	3000 K	1020lm	24°	13	**1004446**	
			1020lm	36°	13	**1004447**	
			1020lm	60°	19	**1004448**	
	E	4000 K	1100lm	24°	16	**1004454**	
			1100lm	36°	16	**1004455**	
			1100lm	60°	19	**1004456**	


NUMINOS® M

PD

Product details:
220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)



L80B50 250

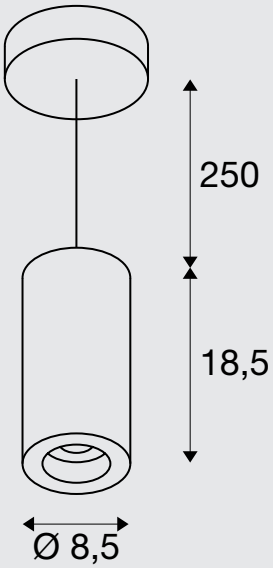


Tip:
Decorative ring also available in white



Decorative ring M	white	Prod. no. **1006168**



black

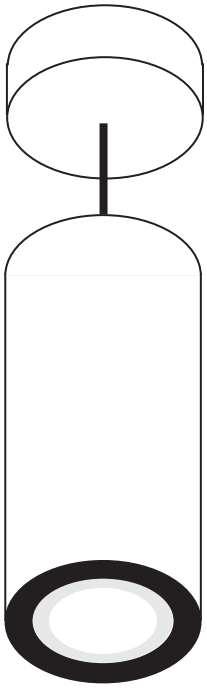


white

							PROD. NO.	
C	A→G		1925lm	24°	16	**1004242**		
	A→G	2700 K	1935lm	36°	16	**1004243**		
			1885lm	60°	22	**1004244**		
			1955lm	24°	16	**1004250**		
	A→G	3000 K	1970lm	36°	13	**1004251**		
			1880lm	60°	22	**1004252**		
			2125lm	24°	19	**1004258**		
	A→G	4000 K	2120lm	36°	16	**1004259**		
			2060lm	60°	25	**1004260**		
Dali			1925lm	24°	16	**1004530**		
	A→G	2700 K	1935lm	36°	16	**1004531**		
			1885lm	60°	22	**1004532**		
			1955lm	24°	16	**1004538**		
	A→G	3000 K	1970lm	36°	13	**1004539**		
			1880lm	60°	22	**1004540**		
			2125lm	24°	19	**1004546**		
	A→G	4000 K	2120lm	36°	16	**1004547**		
			2060lm	60°	25	**1004548**		
C			1925lm	24°	16	**1004246**		
	A→G	2700 K	1935lm	36°	16	**1004247**		
			1885lm	60°	22	**1004248**		
			1955lm	24°	16	**1004254**		
	A→G	3000 K	1970lm	36°	13	**1004255**		
			1880lm	60°	22	**1004256**		
			2125lm	24°	19	**1004262**		
	A→G	4000 K	2120lm	36°	16	**1004263**		
			2060lm	60°	25	**1004264**		
Dali			1925lm	24°	16	**1004534**		
	A→G	2700 K	1935lm	36°	16	**1004535**		
			1885lm	60°	22	**1004536**		
			1955lm	24°	16	**1004542**		
	A→G	3000 K	1970lm	36°	13	**1004543**		
			1880lm	60°	22	**1004544**		
			2125lm	24°	19	**1004550**		
	A→G	4000 K	2120lm	36°	16	**1004551**		
			2060lm	60°	25	**1004552**		


NUMINOS® L

PD

Product details:
220-240V ~50/60Hz| 700mA
Total wattage: 28W
Material: aluminium/polycarbonate (PC)




L80B50 250

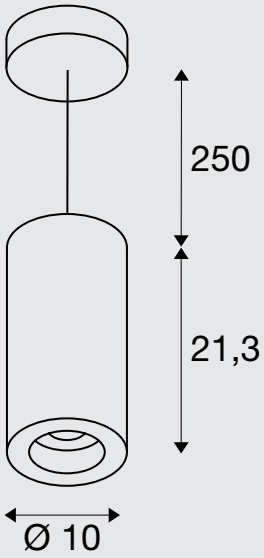


Tip:
Decorative ring also available in white



Decorative ring L	white	Prod. no. **1006169**

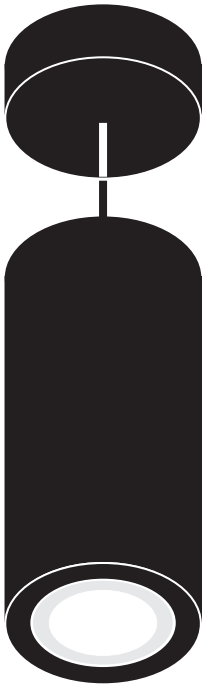

black

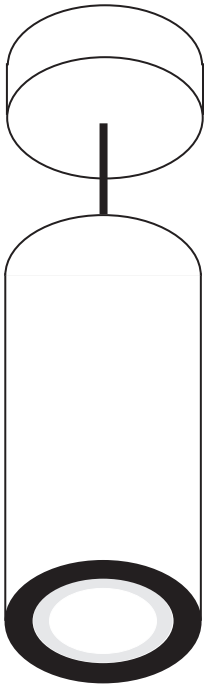

white


	A→G		lm		UGR	PROD. NO.	
C	E	2700 K	2440lm	24°	19	**1004338**	
			2400lm	36°	19	**1004339**	
			2475lm	60°	22	**1004340**	
	E	3000 K	2430lm	24°	13	**1004346**	
			2340lm	36°	13	**1004347**	
			2400lm	60°	22	**1004348**	
	E	4000 K	2675lm	24°	19	**1004354**	
			2620lm	36°	19	**1004355**	
			2715lm	60°	22	**1004356**	
Dali	E	2700 K	2440lm	24°	19	**1004626**	
			2400lm	36°	19	**1004627**	
			2475lm	60°	22	**1004628**	
	E	3000 K	2430lm	24°	13	**1004634**	
			2340lm	36°	13	**1004635**	
			2400lm	60°	22	**1004636**	
	E	4000 K	2675lm	24°	19	**1004642**	
			2620lm	36°	19	**1004643**	
			2715lm	60°	22	**1004644**	
C	E	2700 K	2440lm	24°	19	**1004342**	
			2400lm	36°	19	**1004343**	
			2475lm	60°	22	**1004344**	
	E	3000 K	2430lm	24°	13	**1004350**	
			2340lm	36°	13	**1004351**	
			2400lm	60°	22	**1004352**	
	E	4000 K	2675lm	24°	19	**1004358**	
			2620lm	36°	19	**1004359**	
			2715lm	60°	22	**1004360**	
Dali	E	2700 K	2440lm	24°	19	**1004630**	
			2400lm	36°	19	**1004631**	
			2475lm	60°	22	**1004632**	
	E	3000 K	2430lm	24°	13	**1004638**	
			2340lm	36°	13	**1004639**	
			2400lm	60°	22	**1004640**	
	E	4000 K	2675lm	24°	19	**1004646**	
			2620lm	36°	19	**1004647**	
			2715lm	60°	22	**1004648**	

NUMINOS® XL


NEW VARIANT LED INSIDE

PD

Product details:
220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/polycarbonate (PC)




L80B50 250

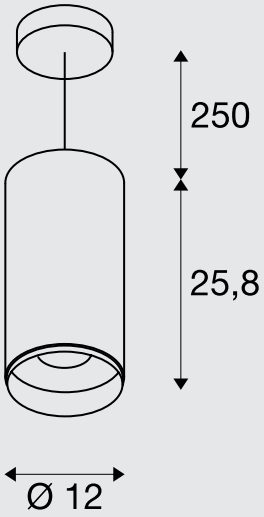




Tip:
Decorative ring also available in white

Decorative ring XL	white	Prod. no. **1006170**

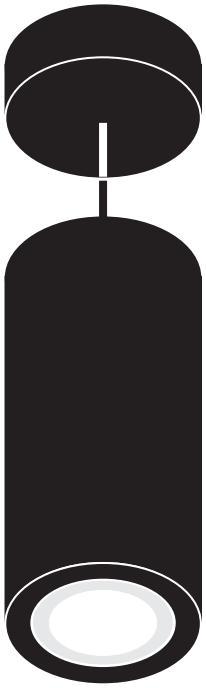

black

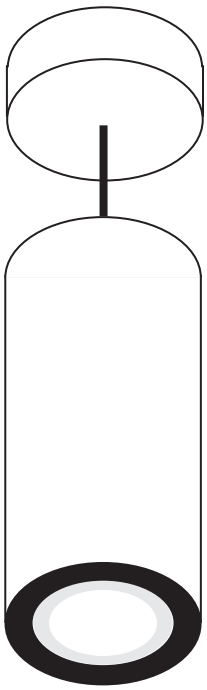

white

	A→G		lm		UGR	PROD. NO.	
C	F	2700 K	3290lm	24°	19	**1005705**	
			3250lm	36°	19	**1005706**	
			2980lm	60°	25	**1005707**	
	E	3000 K	3530lm	24°	19	**1005711**	
			3490lm	36°	19	**1005712**	
			3210lm	60°	25	**1005713**	
	E	4000 K	3800lm	24°	19	**1005717**	
			3760lm	36°	19	**1005718**	
			3460lm	60°	25	**1005719**	
Dali	F	2700 K	3290lm	24°	19	**1005777**	
			3250lm	36°	19	**1005778**	
			2980lm	60°	25	**1005779**	
	E	3000 K	3530lm	24°	19	**1005783**	
			3490lm	36°	19	**1005784**	
			3210lm	60°	25	**1005785**	
	E	4000 K	3800lm	24°	19	**1005789**	
			3760lm	36°	19	**1005790**	
			3460lm	60°	25	**1005791**	
C	F	2700 K	3290lm	24°	19	**1005708**	
			3250lm	36°	19	**1005709**	
			2980lm	60°	25	**1005710**	
	E	3000 K	3530lm	24°	19	**1005714**	
			3490lm	36°	19	**1005715**	
			3210lm	60°	25	**1005716**	
	E	4000 K	3800lm	24°	19	**1005720**	
			3760lm	36°	19	**1005721**	
			3460lm	60°	25	**1005722**	
Dali	F	2700 K	3290lm	24°	19	**1005780**	
			3250lm	36°	19	**1005781**	
			2980lm	60°	25	**1005782**	
	E	3000 K	3530lm	24°	19	**1005786**	
			3490lm	36°	19	**1005787**	
			3210lm	60°	25	**1005788**	
	E	4000 K	3800lm	24°	19	**1005792**	
			3760lm	36°	19	**1005793**	
			3460lm	60°	25	**1005794**	

TIMELESS CLASSICS

PERFECT TABLE AND FLOOR LAMPS FOR EVERY ROOM.

Classic lamps: our table and floor lamps blend seamlessly into any interior thanks to their simple, slimline design, making them the perfect elegant choice for an office, living room or retail outlet.





155540 + 155592 105 + 107



1002146 109



TABLE AND FLOOR LAMPS

NEW LED 100
NEW LED 101
104
104
105
105
106
NEW VARIANT 107
NEW VARIANT 107
NEW VARIANT 107
107
107
LED 108
LED 108
109
109
110
110
LED 111
LED 111
LED 112
LED 113

You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808

WORKLIGHT TL


NEW







7600lm
INSIDE
CRI 80
4000K



IP 20 | IK02 | 80° | 110° | UGR 19 | L80B10 | 250 | LED

200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

- Euro plug
- Clamping range: 6–40 mm

Up/Down	3800lm 4000K	A→G / A G E

Options	Prod. no.
Up: 3800lm | 4000K | CRI80 Down: 3800lm | 4000K | CRI80	
■ black	**1005392**

WORKLIGHT TL


NEW







7600lm
INSIDE
CRI 80
4000K



IP 20 | IK02 | 80° | 110° | UGR 19 | L80B10 | 250 | LED

200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium


- Euro plug
- Clamping range: 6–40 mm

Up/Down	3800lm 4000K	A→G / A G E

Options	Prod. no.
Up: 3800lm | 4000K | CRI80 Down: 3800lm | 4000K | CRI80	
□ white	**1005394**





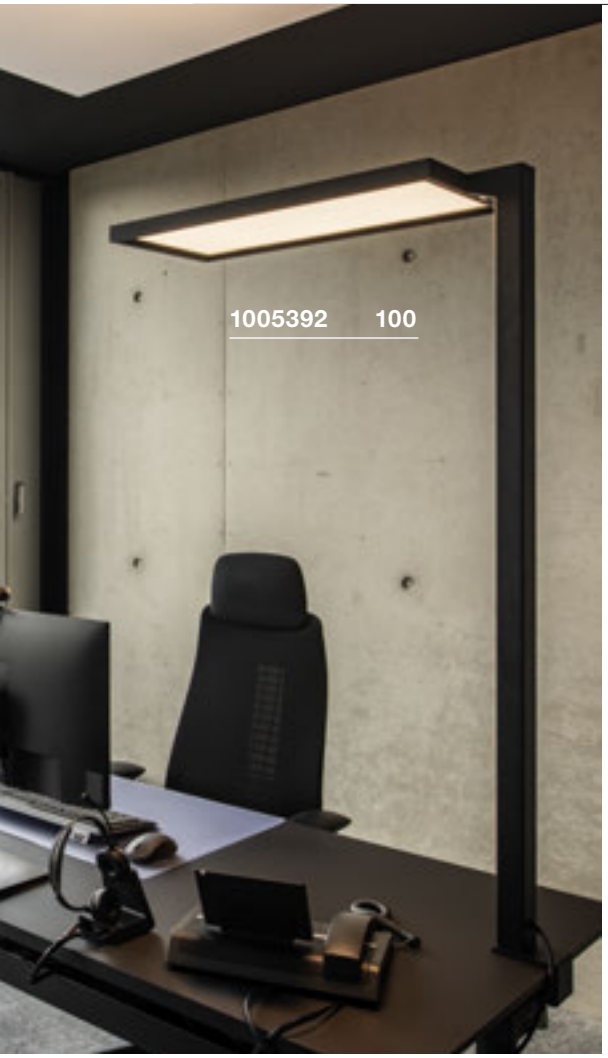



WORKLIGHT
FL

NEW








7600lm

INSIDE

CRI 80

4000K



IP 20 | IK02 | 80° | 110° | 19 | L80B10

250

200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

- Euro plug

Up/Down	3800lm 4000K	A→G A G E

Options	Prod. no.
Up: 3800lm | 4000K | CRI80 Down: 3800lm | 4000K | CRI80	
black	1005390

WORKLIGHT
FL

NEW






7600lm

INSIDE

CRI 80

4000K



IP 20 | IK02 | 80° | 110° | 19 | L80B10

250


200-240V ~50/60Hz | 2000mA
Total wattage: 79W
Material: aluminium

- Euro plug

Up/Down	3800lm 4000K	A→G A G E

Options	Prod. no.
Up: 3800lm | 4000K | CRI80 Down: 3800lm | 4000K | CRI80	
white	1005391

SLV FENDA. MIX & MATCH.

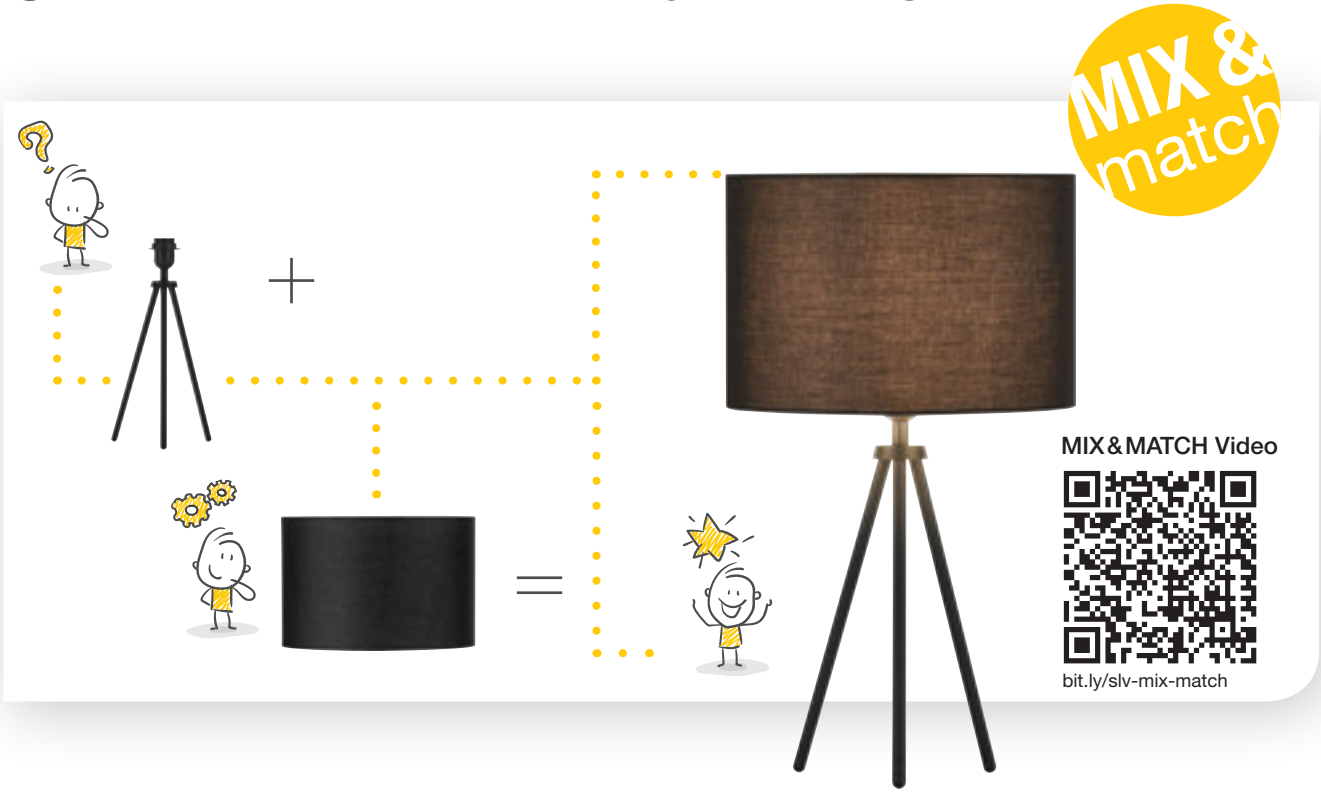






1003029 + 100763 99 + 106



1004773 + 155780 155 + 104

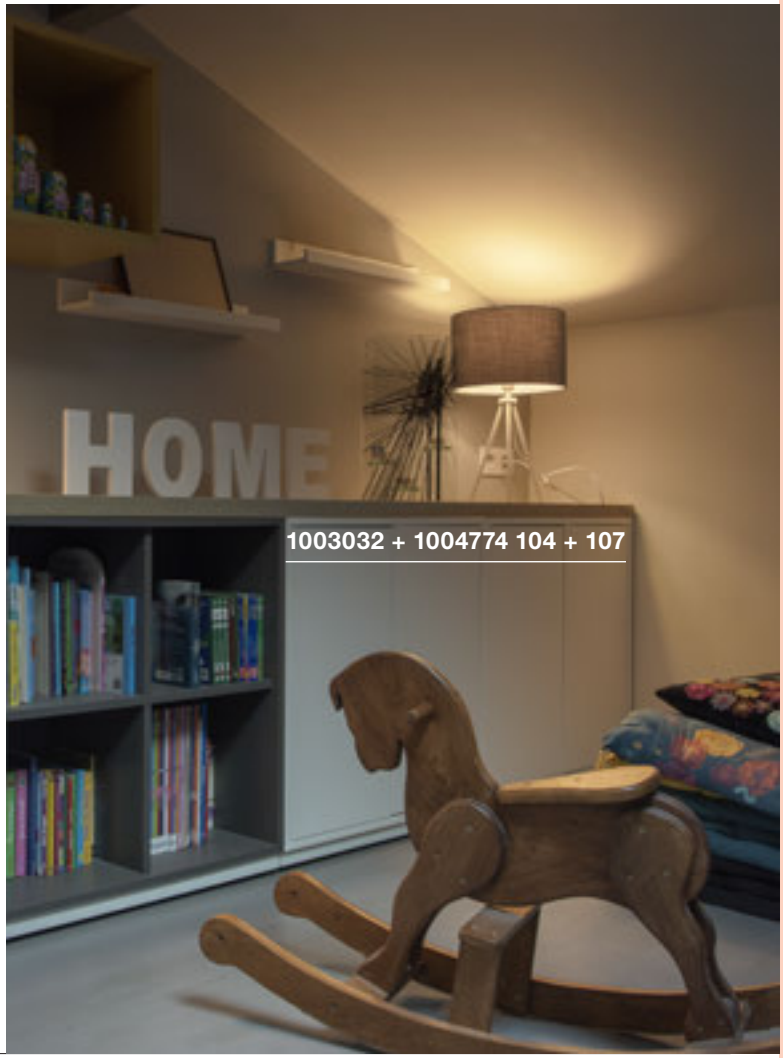


1003032 + 1004774 104 + 107

FENDA
TL, E27



SOCKET INSIDE <60 W



IP 20 IK03 200

220-240V ~50/60Hz
Material: steel

- Euro plug and switch

E27 <60W

LED E27 | 7.5W | 320°
2700K | 700lm | EEK=F
8kWh/1000h



Prod. no. 1005304

Options	Prod. no.
1xE27	
black	**155780**
1xE27	
white	**1003030** ▼
1xE27	
metal	**155785**


FENDA
FL, E27







SOCKET INSIDE <60 W



IP 20 IK03 200

220-240V ~50/60Hz
Material: steel

- Euro plug and switch

E27 <60W

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h




Prod. no. 1005301

Options	Prod. no.
1xE27	
black	**155790**
1xE27	
white	**1003031** ▼
1xE27	
metal	**155795**







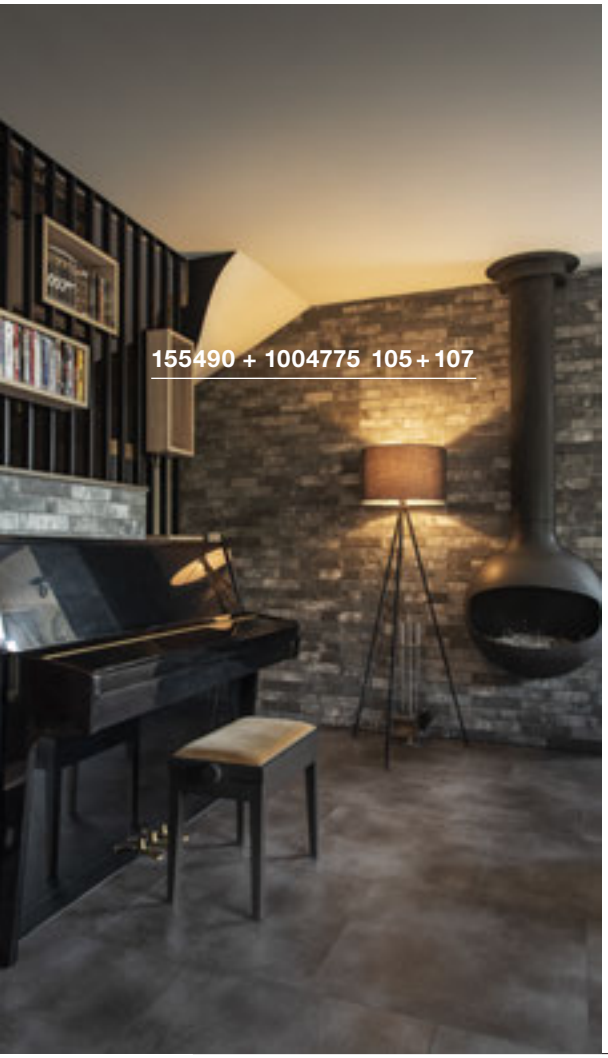

FENDA
TL, E27










SOCKET INSIDE <40 W





220-240V ~50/60Hz
Material: aluminium

- Euro plug

E27 <40W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h



Prod. no. 1005265

Options	Prod. no.
1xE27	
black	**155540**
1xE27	
white	**1003032** ▼


FENDA
FL, E27







SOCKET INSIDE <40 W





220-240V ~50/60Hz
Material: aluminium

- Euro plug

E27 <40W

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h



Prod. no. 1005302

Options	Prod. no.
1xE27	
black	**155490**
1xE27	
white	**1003033** ▼
1xE27	
chrome	**155492** ▼


FENDA BOW BASIS
FL, E27







SOCKET INSIDE <25 W



IP 20 | IK03 | 180° | 200

220-240V ~50/60Hz
Material: steel

- Max. shade weight 900g
- Euro plug and switch

E27 <25W L: 17.5 cm

LED E27 | 7.5W | 320°
2700K | 700lm | EEK=F
8kWh/1000h

C,L

Prod. no. 1005304

Options	Prod. no.
1xE27 ■ black	**1003029**
1xE27 □ white	**1003028** ▼
1xE27 ▨ chrome	**1000763**



FENDA
15 cm, round

NEW VARIANT



H: 40 cm
Diameter: 15 cm
Material: textile/steel

Options	Prod. no.
black/copper	156152
white	156141
beige	156143
grey	1004773

FENDA
30 cm, round

NEW VARIANT



H: 20 cm
Diameter: 30 cm
Material: textile/steel

Options	Prod. no.
black/copper	155592
white	155582
beige	155583
grey	1004774

FENDA
45 cm, round

NEW VARIANT



H: 28 cm
Diameter: 45.5 cm
Material: textile/steel

Options	Prod. no.
black/copper	156122
white	156111
beige	156113
grey	1004775

FENDA
Diameter 70 cm, round



IP 20

H: 36 cm
Diameter: 70 cm
Material: textile/steel

• Max. 20W

Options	Prod. no.
black/copper	1000580
white	1000579

FENDA
Diameter 40 cm, round




IP 20

H: 30 cm
Diameter: 40 cm
Material: poly (methyl methacrylate) (PMMA)

• Max. 40W


Options	Prod. no.
white	1000764

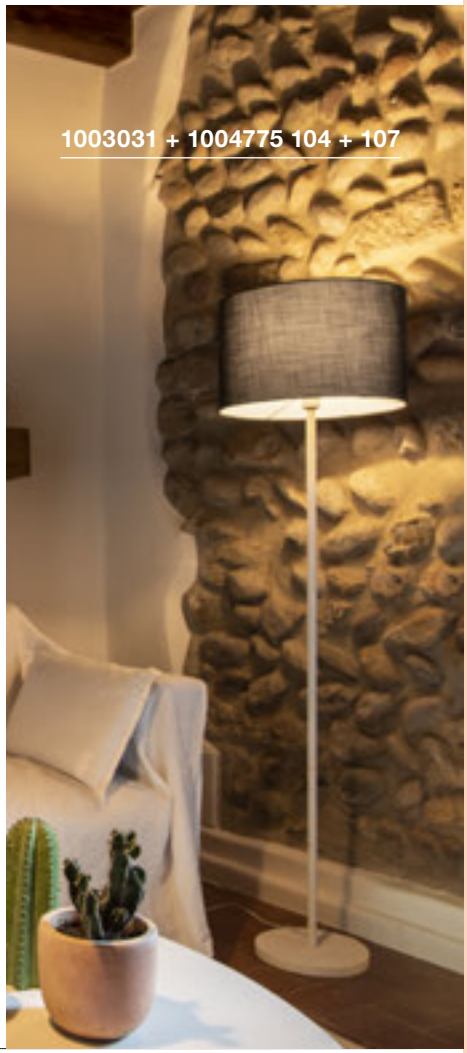


KARPO TL



330|400lm
INSIDE
CRI 80
3000K



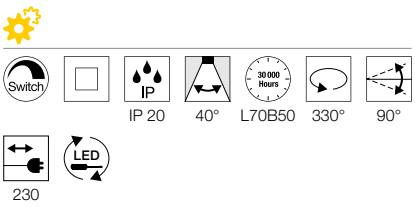

100-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium


- Plug-in power supply




1001461, 1001460	330lm/400lm 3000K	A→G A G E


Options	Prod. no.
330lm | 3000K | CRI80	
■ black	**1001461**
400lm | 3000K | CRI90	
□ white	**1001460**


KARPO FL

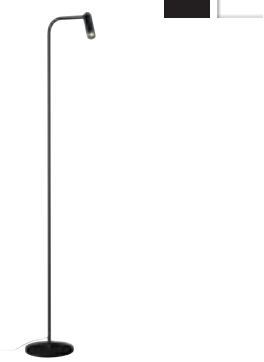

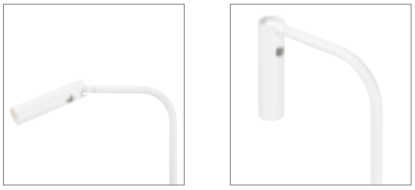

330|400lm
INSIDE
CRI 80
3000K



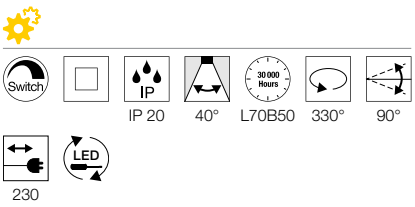

100-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium

- Plug-in power supply



1001463, 1001462	330lm/400lm 3000K	A→G A G E

Options	Prod. no.
330lm | 3000K | CRI80	
■ black	**1001463**
400lm | 3000K | CRI90	
□ white	**1001462**










FITU
TL, E27





SOCKET INSIDE <10 W



IP 20 IK03 200

220-240V ~50/60Hz
Material: aluminium

- Euro plug and switch


E27 <10W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265


Options	Prod. no.
1xE27	
■ black	**1001676**

FITU
FL, E27





SOCKET INSIDE <24 W



IP 20 IK03 200

220-240V ~50/60Hz
Material: aluminium/steel


- Euro plug and switch

Options	Prod. no.
1xE27	
■ black	**1002146**

PHELIA
TL, QPAR51



SOCKET INSIDE <35 W



IP 20 | IK03 | 350° | 90° | 200

230V ~50/60Hz
Material: aluminium/steel

- Safety plug and switch

GU10 <35W
Diameter: 5 cm L: 10.5 cm

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h


Prod. no. 1003101

Options	Prod. no.
1xGU10	
■ black	**146000**

PHELIA
FL, E27



SOCKET INSIDE <23 W



IP 20 | IK03 | 350° | 90° | 200


230V ~50/60Hz
Material: aluminium/steel


- Safety plug and switch

Options	Prod. no.
1xE27	
■ black	**146010**





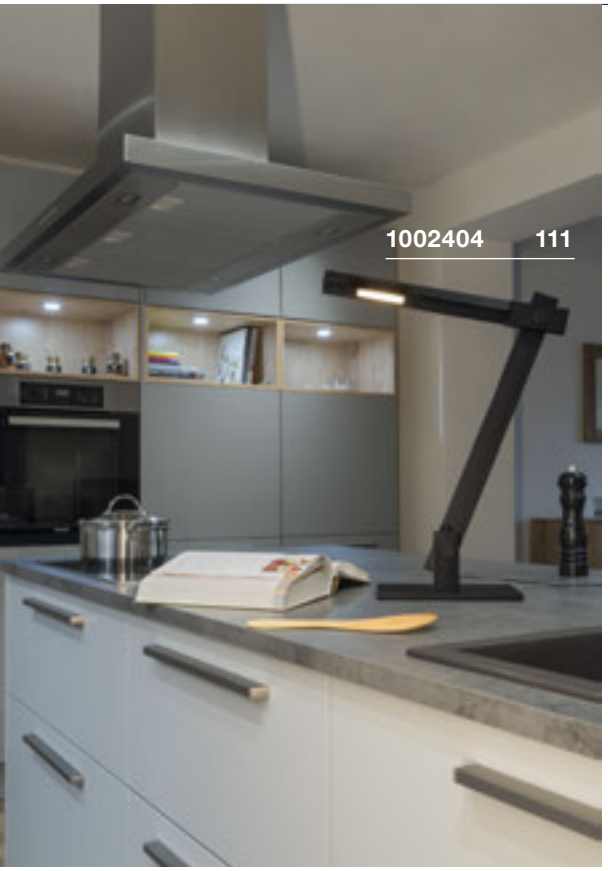


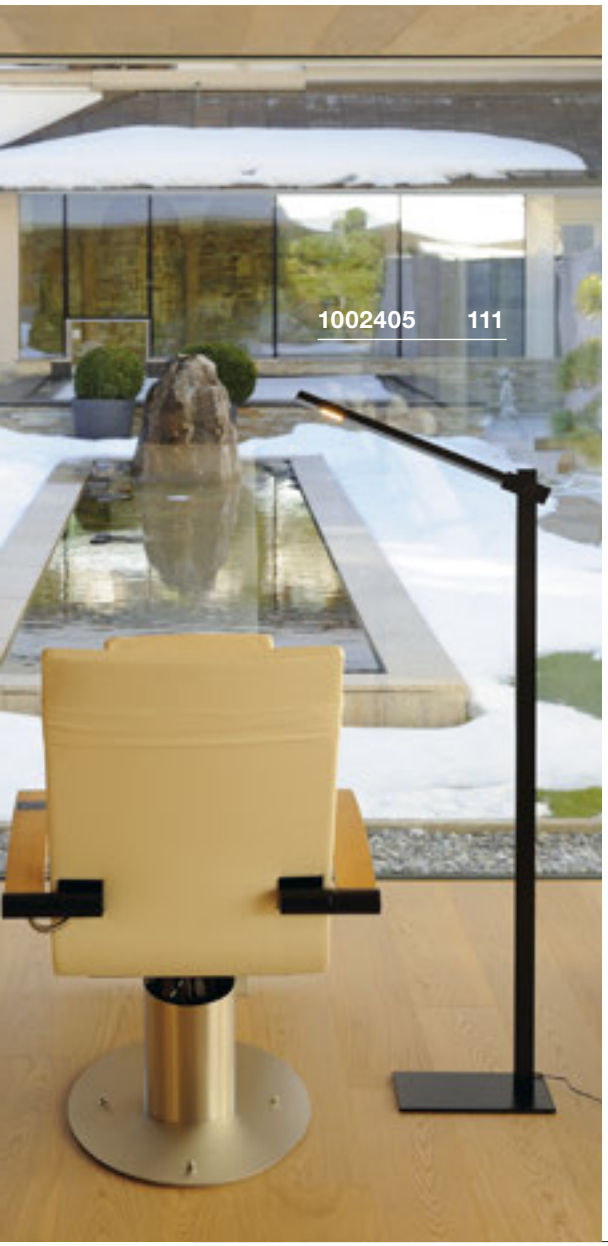

MECANICA PLUS
TL








520lm - 610lm

INSIDE CRI 80

2700K - 6500K



Switch | IP 20 | 100° | L70B50 | 329° | 306°

200 | LED

220-240V ~50/60Hz | 12V
Total wattage: 7.9W
Material: aluminium

- Plug-in power supply


1002404	520-610lm 2700-6500K	A→G A E

Options	Prod. no.
520-610lm | 2700-6500K | CRI80	
■ black	**1002404**

MECANICA PLUS
FL








520lm - 610lm

INSIDE CRI 80

2700K - 6500K



Switch | IP 20 | 100° | L70B50 | 329° | 306°

200 | LED

220-240V ~50/60Hz | 12V
Total wattage: 7.9W
Material: aluminium

- Plug-in power supply

1002405	520-610lm 2700-6500K	A→G A E

Options	Prod. no.
520-610lm | 2700-6500K | CRI80	
■ black	**1002405**


TONILA
TL







90lm
|
INSIDE
|
2700K
CRI 80



Switch | IP 20 | 50 000 Hours | LED L70B50

5V battery operation
Total wattage: 1.6W
Material: aluminium/plastic

- Battery 3.6V 2000mAh included
- Power adapter excl. USB charger 5V DC/1-2A required
- For MINI-USB charging cable
- Can be dimmed to 3 different levels using the switch

		A→G
1002583	90lm 2700K	A→G

Options	Prod. no.
90lm | 2700K | CRI80	
■ black	**1002583**








MAGANDA
TL





45lm / 48lm / 51lm
LED INSIDE
CRI 90
2700K / 3000K / 4000K



IP 44 | IK02 | L70B50 | 340° | 90° | 200

100-240V ~50/60Hz | 12V
Total wattage: 4.8W
Material: steel/glass

- Safety plug
- 3 color temperature options via button

		A→G
1004970	45/48/51lm 2700/3000/4000K	F

Options	Prod. no.
45/48/51lm | 2700/3000/4000K | CRI90	
chrome/frosted	**1004970**

ATTENTION-GRABBING HIGHLIGHTS.

PENDANT LIGHTS ADD EMPHASIS.

Give every room an individual feel: with pendant lights, you can immerse selected areas in atmospheric light, adding optical highlights thanks to a wide variety of styles. Be it in restaurants, cafés, bars or at home, these lights create pleasant environments and make a tasteful statement.




135120 131
SNACKING
Bowling

Pendant lights from the NUMINOS® down and spotlight system can be found on pages 88 to 95. Or for easy online configuration, visit:
www.numinos.slv.com



PENDANT LIGHTS

NEW 118 | NEW 118 | 119 | 120 | 120 | 121 | NEW VARIANT 121 | 122
123 | NEW VARIANT 123 | 128 | 128 | 129 | 130 | 131 | 131
131 | 132 | 133 | 133 | 134 | 134 | 134 | 135
136 | 136 | 136 | 137 | 138 | 139 | 140 | 140
141 | 141 | 142 | 143 | 143 | 144 | 144 | 145


145


145


NEW
146

147


148


148


148

149


149


150

150


154


154


154

NEW VARIANT

155

NEW VARIANT

155

NEW VARIANT

155


155


156


156


157

157

158

158

159

159


160


161


161


162


162


163


163

164


164

165

165

NEW

166


167


169


169


170


170


171


171


172


172


173

174

174

174


175


176


176


176


179


179


179


You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808

ONE LINEAR 100
PD, PHASE, up/down

NEW

CCT




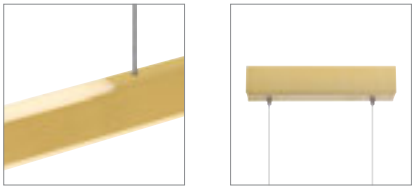

1250lm / 1950lm

INSIDE CRI 90

2700K / 3000K



C LED 180

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

Up	550/580lm 2700/3000K	A→G F
Down	670/700lm 2700/3000K	A→G F


Options	Prod. no.
Up: 550/580lm | 2700/3000K | CRI90 Down: 700/670lm | 2700/3000K | CRI90 black	1006185
Up: 550/580lm | 2700/3000K | CRI90 Down: 700/670lm | 2700/3000K | CRI90 white	1006186
Up: 550/580lm | 2700/3000K | CRI90 Down: 700/670lm | 2700/3000K | CRI90 brass	1006187

ONE LINEAR 140
PD, PHASE, up/down

NEW

CCT




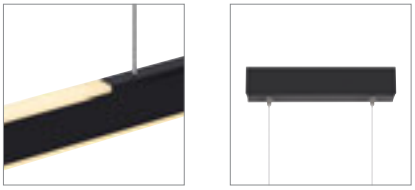

1810lm / 2855lm

INSIDE CRI 90

2700K / 3000K




C LED 180


220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/steel

Up	830/860lm 2700/3000K	A→G F
Down	980/1015lm 2700/3000K	A→G F

Options	Prod. no.
Up: 830/860lm | 2700/3000K | CRI90 Down: 980/1015lm | 2700/3000K | CRI90 black	1006188
Up: 830/860lm | 2700/3000K | CRI90 Down: 980/1015lm | 2700/3000K | CRI90 white	1006189
Up: 830/860lm | 2700/3000K | CRI90 Down: 980/1015lm | 2700/3000K | CRI90 brass	1006190

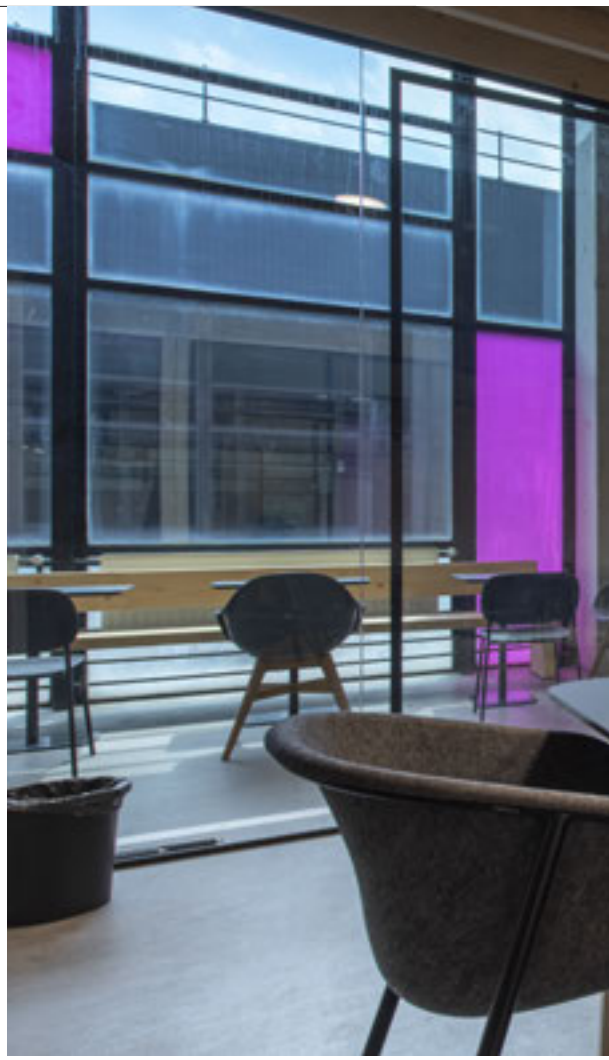



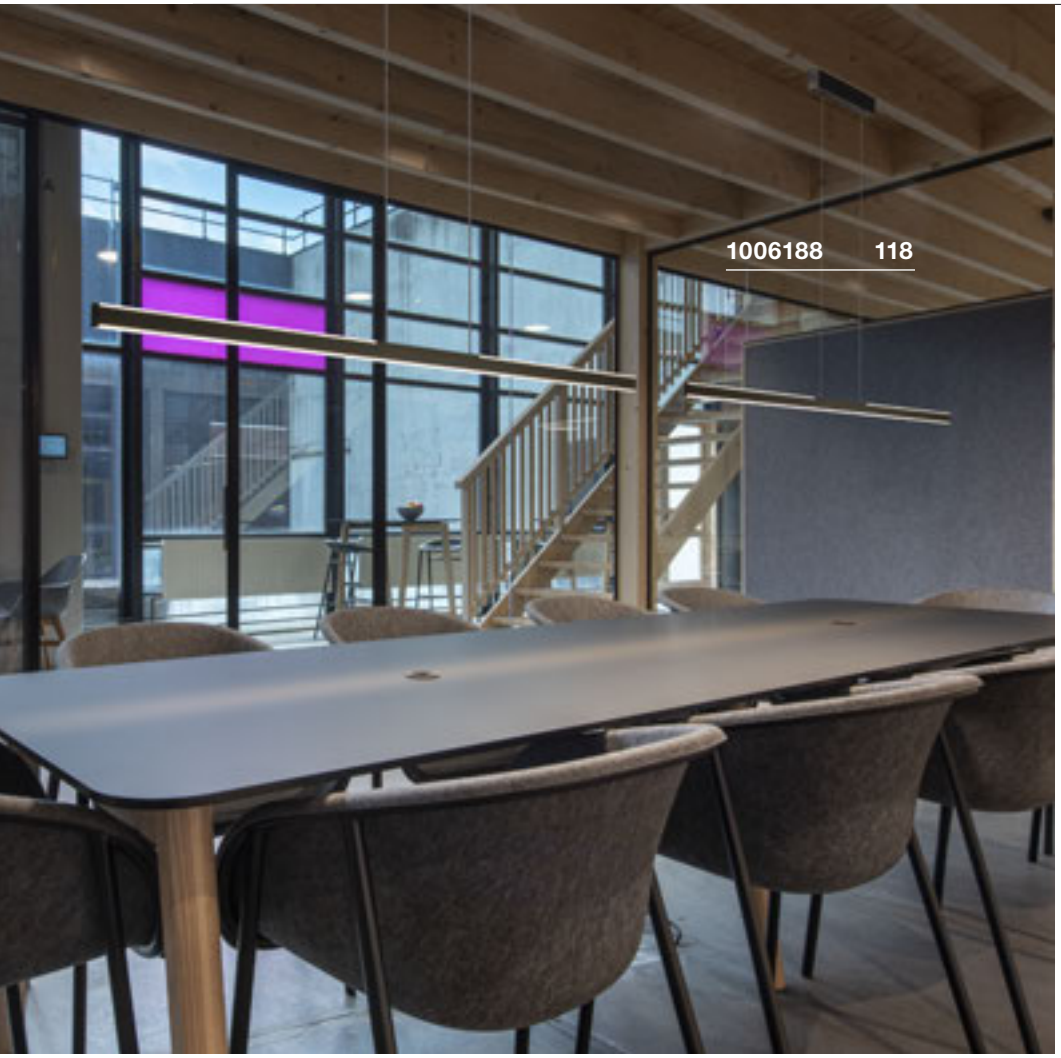





ONE TRIPLE
PD, DALI
















220-240V ~50/60Hz | 1700mA
Total wattage: 64W
Material: aluminium/steel

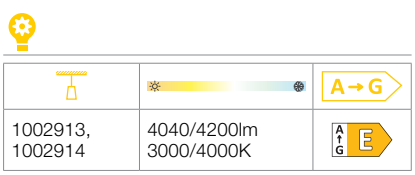

Options	Prod. no.
4040/4200lm | 3000/4000K | CRI90	
■ black	**1002913**
4040/4200lm | 3000/4000K | CRI90	
□ white	**1002914**

ONE 60
PD, DALI




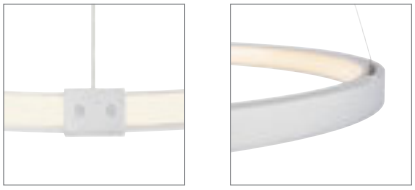

1480lm / 1550lm

INSIDE CRI 90

3000K / 4000K



Dali | IP 20 | 30 000 Hours L70B50 | 300 | LED

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

1002909, 1002910	1480/1550lm 3000/4000K	A→G

Options	Prod. no.
1480/1550lm | 3000/4000K | CRI90	
■ black	**1002909**
1480/1550lm | 3000/4000K | CRI90	
□ white	**1002910**

ONE 80
PD, DALI






1930lm / 2140lm

INSIDE CRI 90

3000K / 4000K




Dali | IP 20 | 30 000 Hours L70B50 | 300 | LED


220-240V ~50/60Hz | 800mA
Total wattage: 32W
Material: aluminium/steel


1002911, 1002912	1930/2140lm 3000/4000K	A→G

Options	Prod. no.
1930/2140lm | 3000/4000K | CRI90	
■ black	**1002911**
1930/2140lm | 3000/4000K | CRI90	
□ white	**1002912**

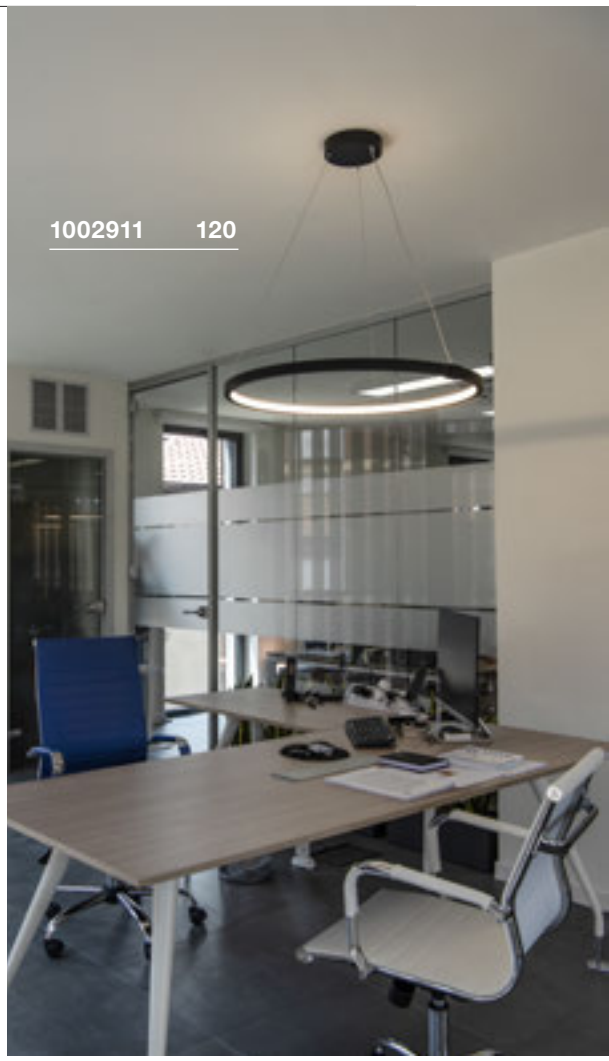



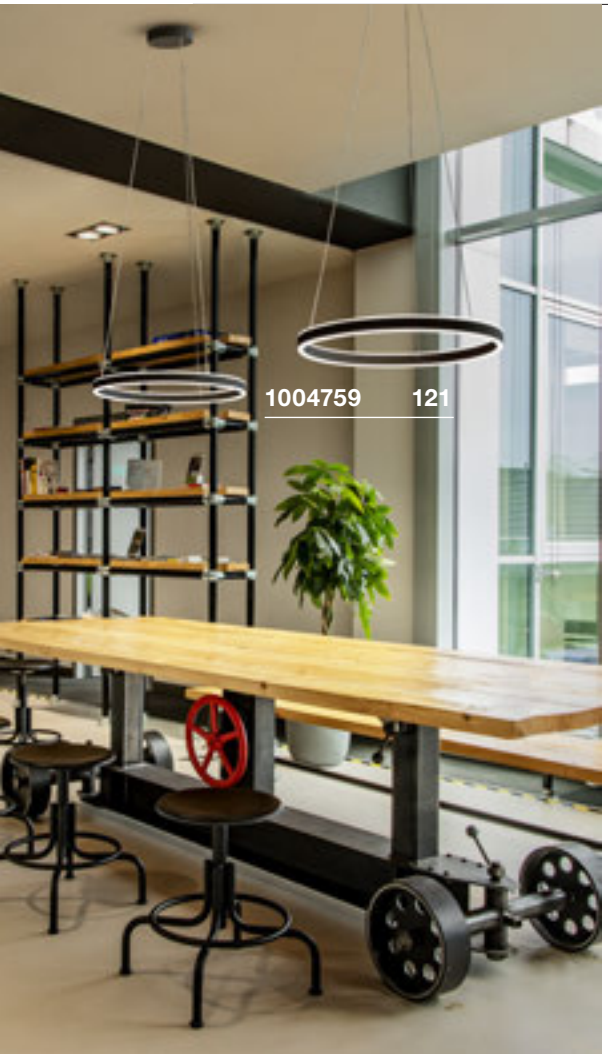

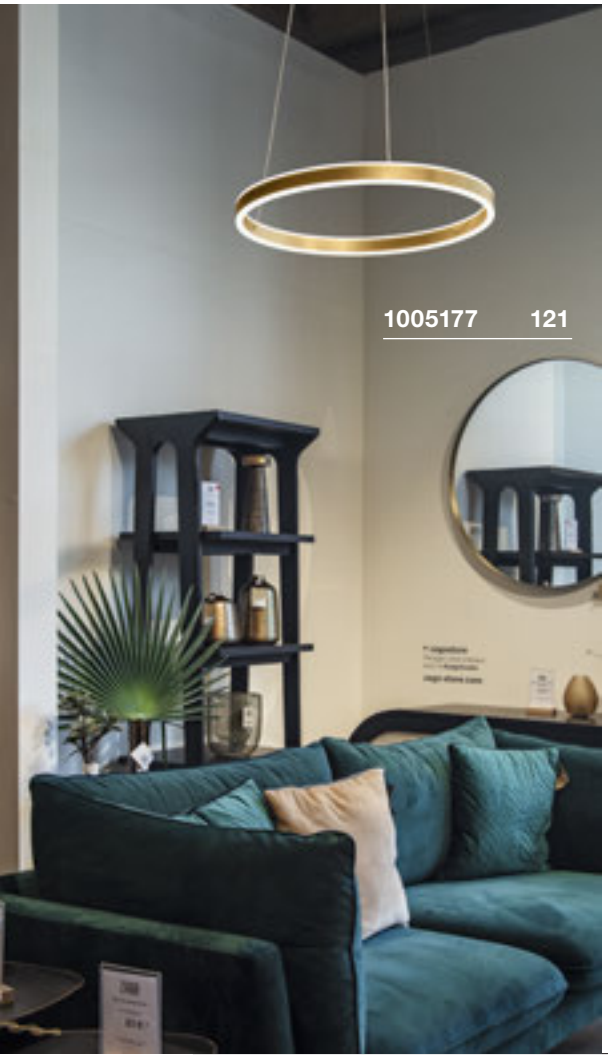



ONE 60
PD, DALI, up/down












220-240V ~50/60Hz | 600mA
Total wattage: 25W
Material: aluminium/steel

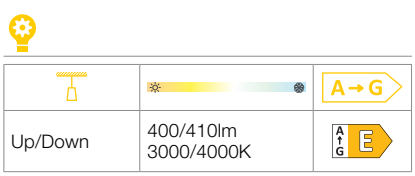



Options	Prod. no.
Up: 400/410lm | 3000/4000K | CRI90 Down: 400/410lm | 3000/4000K | CRI90	
black	1004761
Up: 400/410lm | 3000/4000K | CRI90 Down: 400/410lm | 3000/4000K | CRI90	
white	1004762


ONE 60
PD, PHASE, up/down


NEW VARIANT



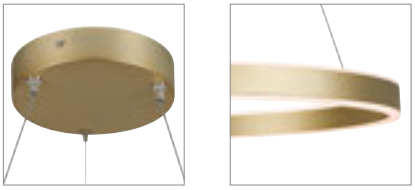








220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

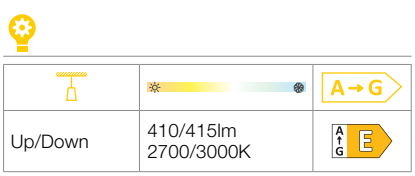

Options	Prod. no.
Up: 410/415lm | 2700/3000K | CRI90 Down: 410/415lm | 2700/3000K | CRI90	
black	1004759
Up: 410/415lm | 2700/3000K | CRI90 Down: 410/415lm | 2700/3000K | CRI90	
white	1004760
Up: 410/415lm | 2700/3000K | CRI90 Down: 410/415lm | 2700/3000K | CRI90	
brass	1005177

ONE 80
PD, DALI, up/down








1230lm / 1270lm

LED INSIDE — CRI 90

3000K / 4000K



Dali — 130° — 130° — 300

220-240V ~50/60Hz | 800mA
Total wattage: 34W
Material: aluminium/steel

		A→G
Up/Down	615/635lm 3000/4000K	

Options	Prod. no.
Up: 615/635lm | 3000/4000K | CRI90 Down: 615/635lm | 3000/4000K | CRI90	
■ black	**1004763**
Up: 615/635lm | 3000/4000K | CRI90 Down: 615/635lm | 3000/4000K | CRI90	
□ white	**1004764**





1004767 123

ONE DOUBLE
PD, DALI, up/down






2100lm / 2120lm

INSIDE CRI 90

3000K / 4000K



Dali | LED

130° | 130° | 300

220-240V ~50/60Hz | 1400mA
Total wattage: 55W
Material: aluminium/steel

Up/Down	1050/1060lm 3000/4000K	A→G A G E

Options	Prod. no.
Up: 1050/1060lm | 3000/4000K | CRI90 Down: 1050/1060lm | 3000/4000K | CRI90	
black	**1004767**
Up: 1050/1060lm | 3000/4000K | CRI90 Down: 1050/1060lm | 3000/4000K | CRI90	
white	**1004768**




1005178 123

ONE DOUBLE
PD, PHASE, up/down

NEW VARIANT




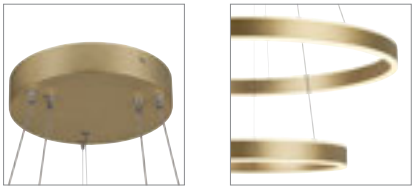

1230lm / 1270lm

INSIDE CRI 90

2700K / 3000K



C | LED

130° | 130° | 180

220-240V ~50/60Hz | 900mA
Total wattage: 35W
Material: aluminium/steel

Up/Down	615/635lm 2700/3000K	A→G A G E

Options	Prod. no.
Up: 615/635lm | 2700/3000K | CRI90 Down: 615/635lm | 2700/3000K | CRI90	
black	**1004765**
Up: 615/635lm | 2700/3000K | CRI90 Down: 615/635lm | 2700/3000K | CRI90	
white	**1004766**
Up: 615/635lm | 2700/3000K | CRI90 Down: 615/635lm | 2700/3000K | CRI90	
brass	**1005178**


MEDO LUMINAIRE FAMILY.
PENDANT OR CEILING LIGHTS.

	MEDO 30 CL, 1-10V	MEDO 40 CL, 1-10V	MEDO 60 CL, 1-10V	MEDO 90 CL, 1-10V
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	1000lm	2000lm	3500lm	11000lm
UGR	25	25	22	25
Dimmable	1-10V	1-10V	1-10V	1-10V
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CL, PHASE	MEDO 40 CL, PHASE
Example		
Lamp	LED INSIDE	LED INSIDE
Size	Diameter: 30 cm	Diameter: 40 cm
Light strength	1200lm	2125lm
UGR	25	25
Dimmable	C, L	C, L
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m



	MEDO 60 CL, square, 1-10V	MEDO 60 CL, square, DALI
Example		
Lamp	LED INSIDE	LED INSIDE
Size	W | L: 60 cm	W | L: 60 cm
Light strength	3300 lm	3300 lm
UGR	22	22
Dimmable	1-10V	DALI
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m

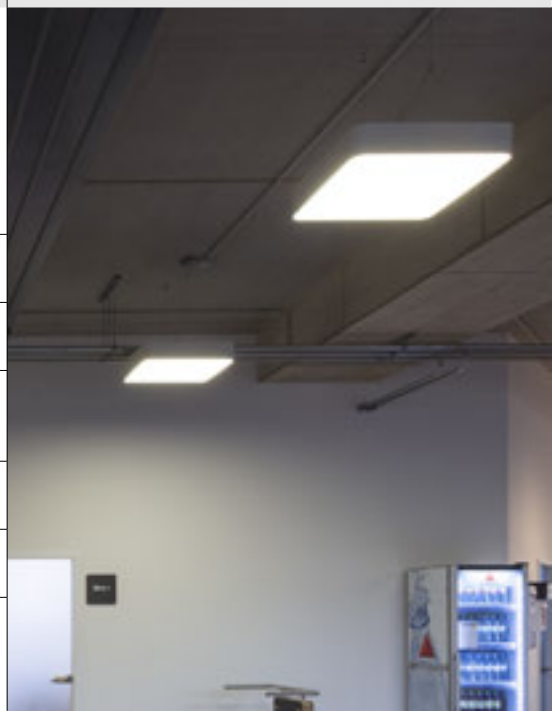

	MEDO RING 60 PD, 1-10V	MEDO RING 90 PD, 1-10V	MEDO RING 60 PD, DALI
Example			
Lamp	LED INSIDE	LED INSIDE	LED INSIDE
Size	Diameter: 60 cm	Diameter: 90 cm	Diameter: 60 cm
Light strength	2000lm	3945lm	2000lm
UGR	–	–	22
Dimmable	1-10V	1-10V	DALI
Suspension kit	not necessary, (incl.) – pure pendant light	not necessary, (incl.) – pure pendant light	not necessary, (incl.) – pure pendant light

MEDO LUMINAIRE FAMILY.
PENDANT OR CEILING LIGHTS.

	MEDO 30 AMBIENT CW, PHASE	MEDO 40 AMBIENT CW, PHASE	MEDO 60 AMBIENT CW, PHASE	MEDO 90 AMBIENT CL, PHASE
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	Down: 1230/1280lM Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	C	C	C	C
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 AMBIENT CW, DALI	MEDO 40 AMBIENT CW, DALI	MEDO 60 AMBIENT CW, DALI	MEDO 90 AMBIENT CL, DALI
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	Down: 1230/1280lM Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	DALI	DALI	DALI	DALI
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m







Ambient effect – These MEDO variants produce even and indirect light in an upwards direction.


Color temperature – With this MEDO variant, you can select the color temperature yourself. The switch on the reverse can be used to choose between 3000k and 4000k.

MEDO RING 60
PD, 1-10V





2200lm
INSIDE
3000K
CRI 80



1-10V | IP 20 | 105° | UGR 22 | L70B50 | 150 | LED

220-240V ~50/60Hz | 700mA
Total wattage: 33W
Material: aluminium/poly (methyl methacrylate) (PMMA)

133840, 133841	2200lm 3000K	A→G E

1-10V dimming
Prod. no. 470505


Options	Prod. no.
2200lm | 3000K | CRI80	
■ black	**133840**
2200lm | 3000K | CRI80	
□ white	**133841**

MEDO RING 90
PD, 1-10V





4900lm
INSIDE
3000K
CRI 80




1-10V | IP 20 | 105° | UGR 22 | L70B50 | 150 | LED

120-277V ~50/60Hz | 1200mA
Total wattage: 56W
Material: aluminium/poly (methyl methacrylate) (PMMA)

133850, 133851	4900lm 3000K	A→G E

1-10V dimming
Prod. no. 470505

Options	Prod. no.
4900lm | 3000K | CRI80	
■ black	**133850**
4900lm | 3000K | CRI80	
□ white	**133851**

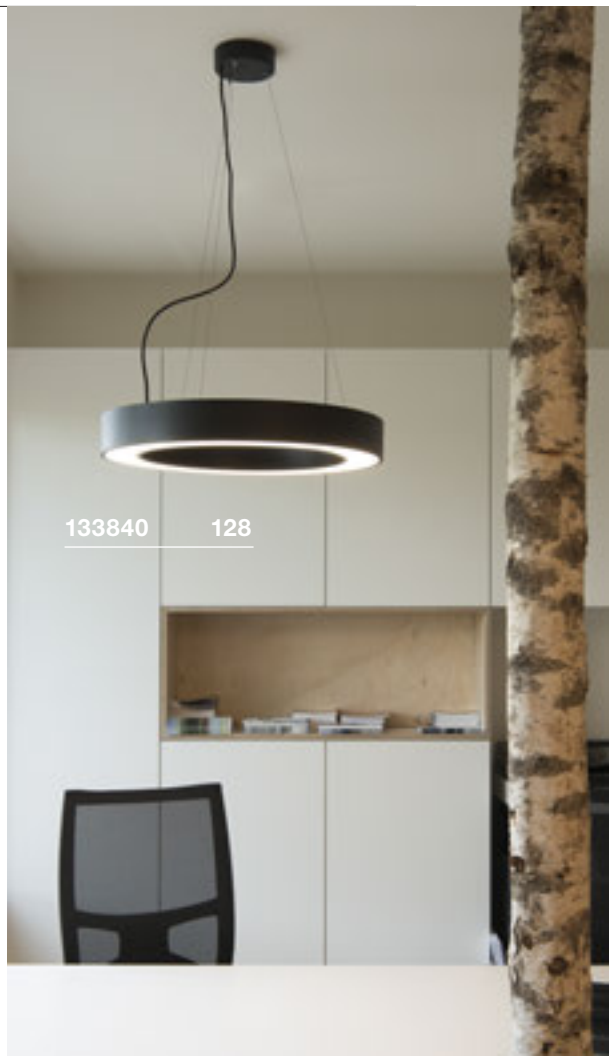






MEDO RING 60
PD, DALI







2000|2095lm
I
LED INSIDE
I
3000K
CRI 80




Dali | IP 20 | 105° | UGR 22 | 20 000 Hours L70B50 | 150

LED

220-240V ~50/60Hz | 700mA
Total wattage: 34W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1002890, 1002891	2000lm | 2095lm 3000K	A→G

Options	Prod. no.
2000lm | 3000K | CRI80	
■ black	**1002890**
2095lm | 3000K | CRI80	
□ white	**1002891**

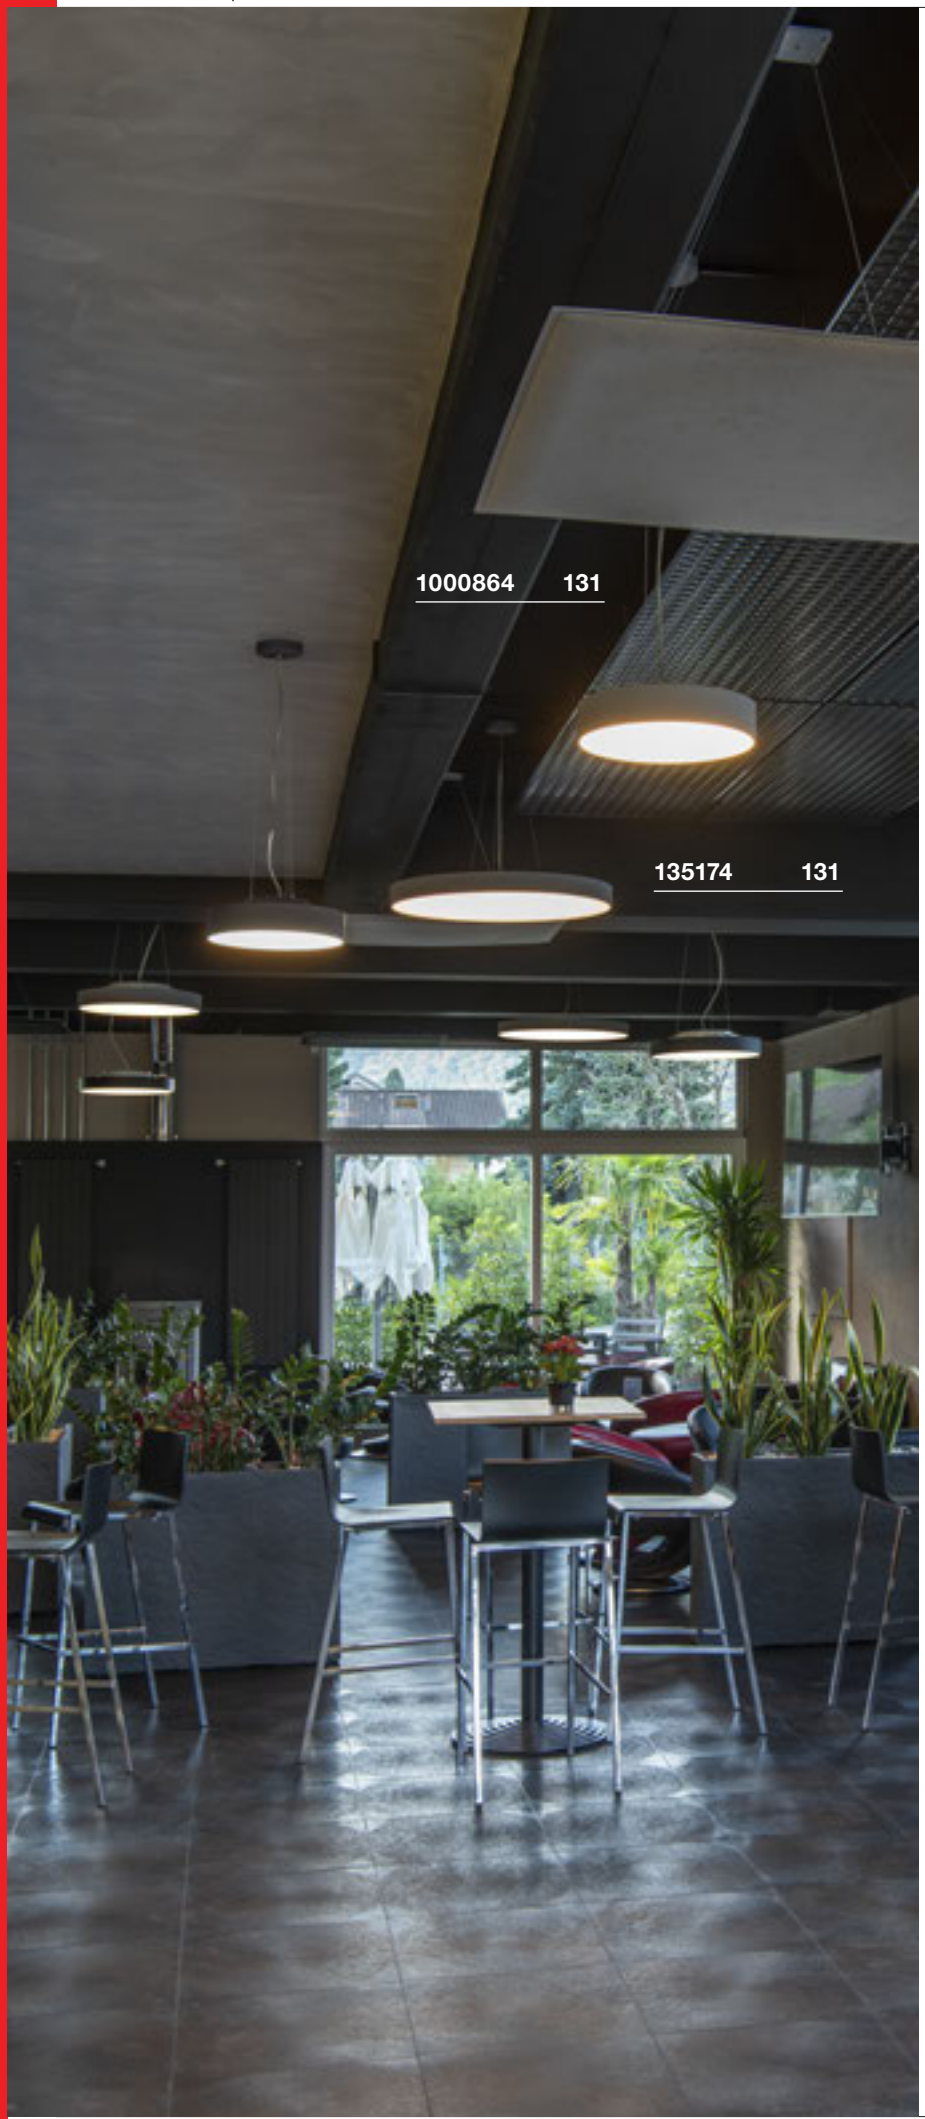


MEDO 30
CL, 1-10V







1000lm
LED INSIDE
CRI 80
3000K



1-10V | IP 20 | 105° | UGR 25 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

1000855, 1000856, 1000857	1000lm 3000K	A→G D

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
1000lm | 3000K | CRI80 black	**1000855**
1000lm | 3000K | CRI80 white	**1000856**
1000lm | 3000K | CRI80 grey	**1000857**

MEDO 40
CL, 1-10V





2450lm
3000K
CRI 80



1-10V | IP 20 | 105° | UGR 25 | 30 000 Hours L70B50 | LED

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included


1000864, 1000865, 1000866	2450lm 3000K	A→G E

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
2450lm | 3000K | CRI80 black	**1000864**
2450lm | 3000K | CRI80 white	**1000865**
2450lm | 3000K | CRI80 grey	**1000866**

MEDO 60
CL, 1-10V



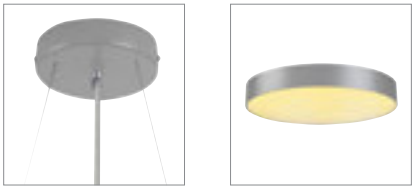

4000lm
3000K
CRI 80



1-10V | IP 20 | 105° | UGR 22 | 30 000 Hours L70B50 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 38W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

135120, 135121, 135124	4000lm 3000K	A→G D

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
4000lm | 3000K | CRI80 black	**135120**
4000lm | 3000K | CRI80 white	**135121**
4000lm | 3000K | CRI80 grey	**135124**

MEDO 90
CL, 1-10V





11560lm
3000K
CRI 80



1-10V | IP 20 | 105° | UGR 25 | 20 000 Hours L70B50 | LED

220-240V ~50/60Hz | 2900mA
Total wattage: 109W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

135170, 135171, 135174	11560lm 3000K	A→G D

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
11560lm | 3000K | CRI80 black	**135170**
11560lm | 3000K | CRI80 white	**135171**
11560lm | 3000K | CRI80 grey	**135174**


MEDO 60
CL, square, 1-10V







3800lm
LED INSIDE
CRI 80
3000K



1-10V | IP 20 | 105° | UGR 22 | 25 000 Hours | L70B50 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic
• Suspension set not included

		A→G
1000725, 1000726, 1000727	3800lm 3000K	A→G E

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
3800lm | 3000K | CRI80 black	**1000725**
3800lm | 3000K | CRI80 white	**1000726**
3800lm | 3000K | CRI80 grey	**1000727**





MEDO 30
CL, PHASE








1200lm

INSIDE CRI 80

3000K







IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included



135020, 135021, 135024	1200lm 3000K	A→G D



- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
1200lm | 3000K | CRI80 black	135020
1200lm | 3000K | CRI80 white	135021
1200lm | 3000K | CRI80 grey	135024

MEDO 40
CL, PHASE






2450lm

INSIDE CRI 80

3000K



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included


135070, 135071, 135074	2450lm 3000K	A→G E

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
2450lm | 3000K | CRI80 black	135070
2450lm | 3000K | CRI80 white	135071
2450lm | 3000K | CRI80 grey	135074

MEDO 30 AMBIENT
CW, PHASE








1270lm / 1320lm

INSIDE CRI 80

3000K / 4000K



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	1270/1320lm 3000/4000K	A→G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 20/20lm | 3000/4000K | CRI80 Down: 1250/1300lm | 3000/4000K | CRI80	
black	1001877
Up: 20/20lm | 3000/4000K | CRI80 Down: 1250/1300lm | 3000/4000K | CRI80	
white	1001881
Up: 20/20lm | 3000/4000K | CRI80 Down: 1250/1300lm | 3000/4000K | CRI80	
grey	1001882

MEDO 40 AMBIENT
CW, PHASE








2800lm / 3000lm

INSIDE CRI 80

3000K / 4000K



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
• Suspension set not included


Up/Down	2750/3000lm 3000/4000K	A→G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2950lm | 3000/4000K | CRI80	
black	1001883
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2950lm | 3000/4000K | CRI80	
white	1001884
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2950lm | 3000/4000K | CRI80	
grey	1001885

MEDO 60 AMBIENT
CW, PHASE








4720lm / 5240lm

INSIDE CRI 80

3000K / 4000K



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 1050mA
Total wattage: 40W
Material: aluminium/polycarbonate (PC)
• Suspension set not included


Up/Down	4720/5240lm 3000/4000K	A→G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 120/120lm | 3000/4000K | CRI80 Down: 4600/5120lm | 3000/4000K | CRI80	
black	1001886
Up: 120/120lm | 3000/4000K | CRI80 Down: 4600/5120lm | 3000/4000K | CRI80	
white	1001887
Up: 120/120lm | 3000/4000K | CRI80 Down: 4600/5120lm | 3000/4000K | CRI80	
grey	1001888

MEDO 90 AMBIENT
CL, PHASE








9750lm / 10350lm

INSIDE

CRI 80

3000K / 4000K



C | IP 20 | 105° | UGR 25 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 1050mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

		A→G
Up/Down	9750/10350lm 3000/4000K	D

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 125/125lm | 3000/4000K | CRI80 Down: 9625/10225lm | 3000/4000K | CRI80	
black	**1001878**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9625/10225lm | 3000/4000K | CRI80	
white	**1001879**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9625/10225lm | 3000/4000K | CRI80	
grey	**1001880**




MEDO 30 AMBIENT
CW, DALI





1250lm / 1300lm
3000K / 4000K
CRI 80



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	1230/1280lm 3000/4000K	A→G A↑G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
Up: 20/20lm | 3000/4000K | CRI80 Down: 1230/1280lm | 3000/4000K | CRI80	
black	**1001889**
Up: 20/20lm | 3000/4000K | CRI80 Down: 1230/1280lm | 3000/4000K | CRI80	
white	**1001893**
Up: 20/20lm | 3000/4000K | CRI80 Down: 1230/1280lm | 3000/4000K | CRI80	
grey	**1001894**

MEDO 40 AMBIENT
CW, DALI





2800lm / 2950lm
3000K / 4000K
CRI 80



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	2800/2950lm 3000/4000K	A→G A↑G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2900lm | 3000/4000K | CRI80	
black	**1001895**
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2900lm | 3000/4000K | CRI80	
white	**1001896**
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2900lm | 3000/4000K | CRI80	
grey	**1001897**

MEDO 60 AMBIENT
CW, DALI





4470lm / 4870lm
3000K / 4000K
CRI 80



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 37W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	4470/4870lm 3000/4000K	A→G A↑G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 120/120lm | 3000/4000K | CRI80 Down: 4350/4750lm | 3000/4000K | CRI80	
black	**1001898**
Up: 120/120lm | 3000/4000K | CRI80 Down: 4350/4750lm | 3000/4000K | CRI80	
white	**1001900**
Up: 120/120lm | 3000/4000K | CRI80 Down: 4350/4750lm | 3000/4000K | CRI80	
grey	**1001899**



MEDO 90 AMBIENT
CL, DALI








9625lm / 10225lm

LED INSIDE

CRI 80

3000K / 4000K



Dali | IP 20 | 105° | UGR 25 | 25 000 Hours | LED L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

		A→G
Up/Down	9625/10225lm 3000/4000K	D


- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
Up: 125/125lm | 3000/4000K | CRI80 Down: 9500/10100lm | 3000/4000K | CRI80 black	**1001890**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9500/10100lm | 3000/4000K | CRI80 white	**1001891**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9500/10100lm | 3000/4000K | CRI80 grey	**1001892**

MEDO 60
CL, square, DALI










Dali | IP 20 | 105° | UGR 22 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic

1002882	3800lm 3000K	A→G A↑G E

- Suspension set 1.5m
  Prod. no. 135250
- Suspension set 1.5m
  Prod. no. 135251
- Suspension set 1.5m
  Prod. no. 135254
- Suspension set 5m
  Prod. no. 1001950
- Suspension set 5m
  Prod. no. 1001951
- Suspension set 5m
  Prod. no. 1001952

Options	Prod. no.
3800lm | 3000K | CRI80	
white	**1002882**

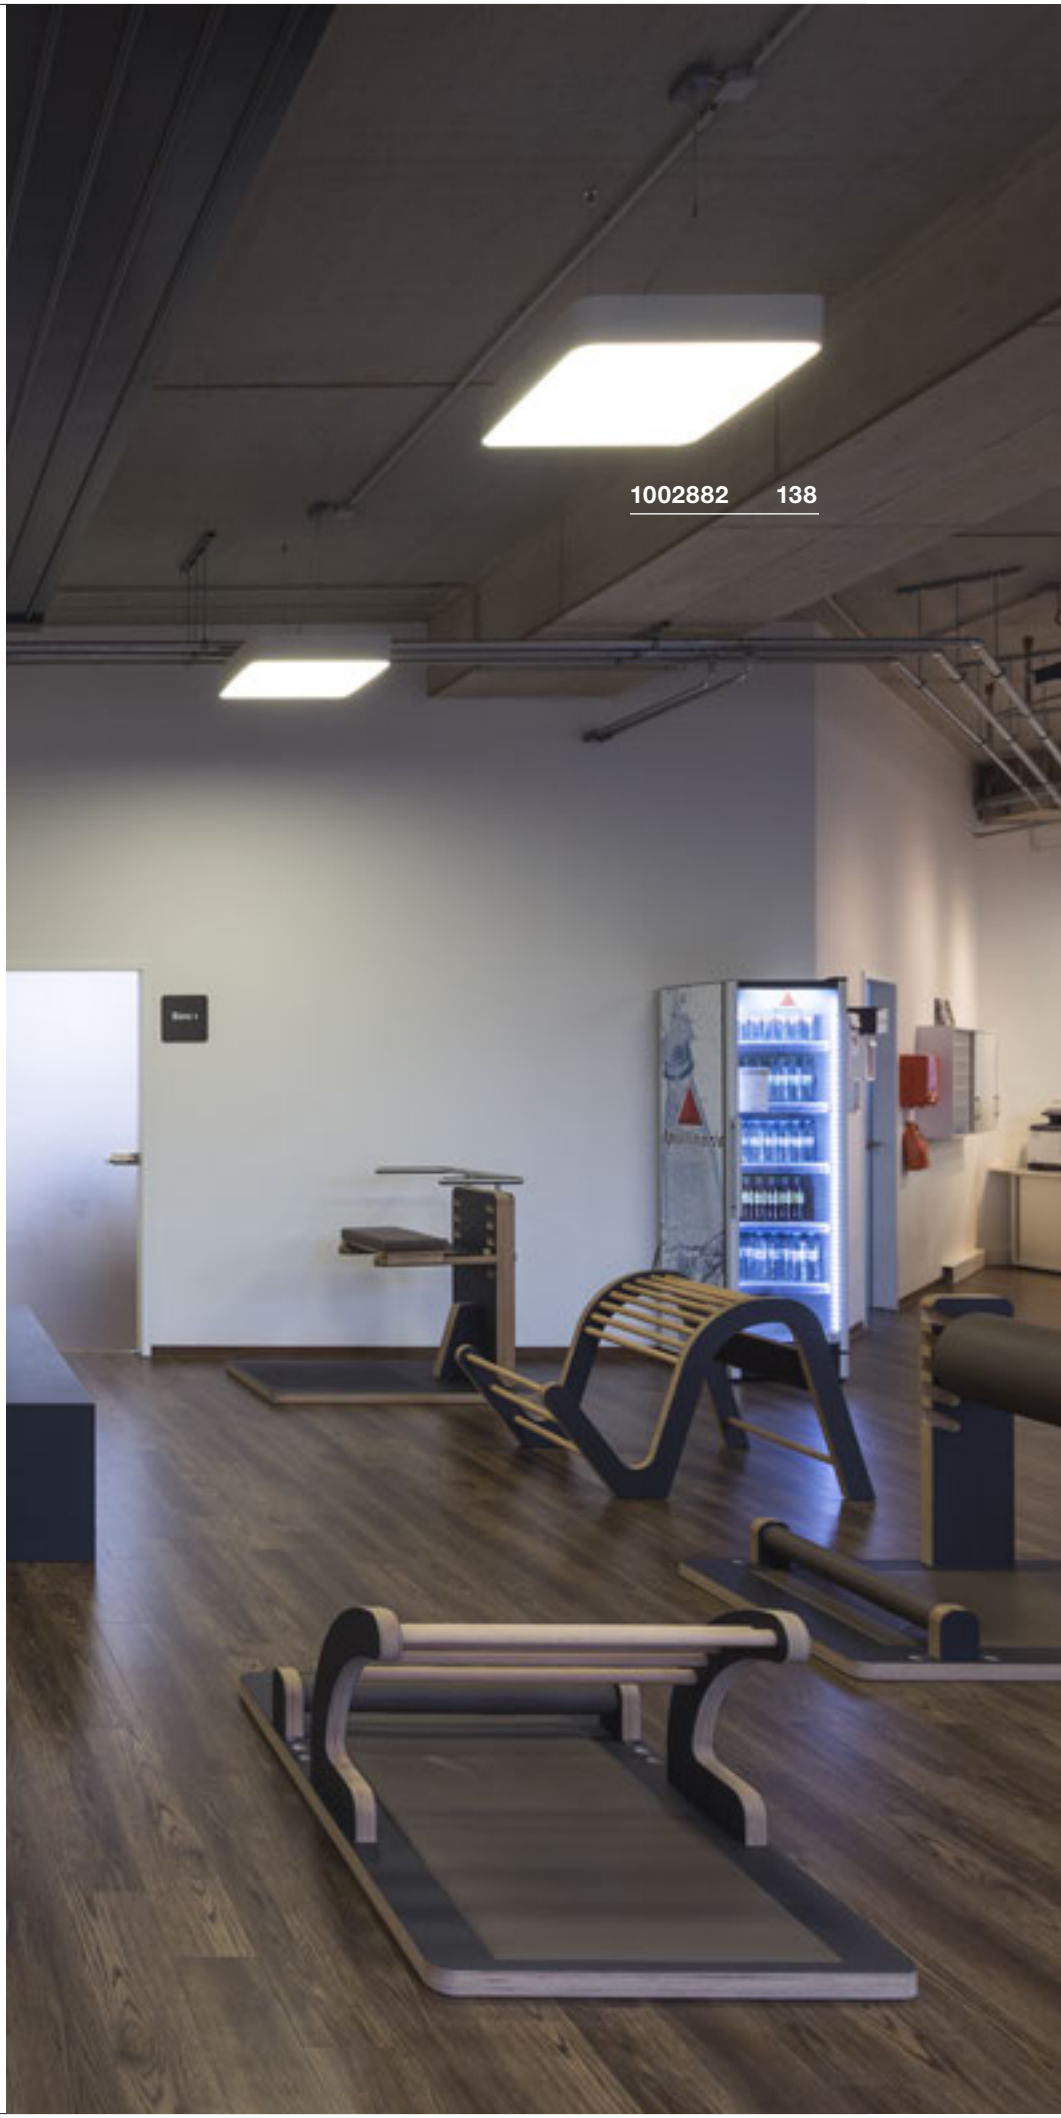







MALANG
CW









IP 20 | 110° | 19 | L70B50

100-240V ~50/60Hz | 24V
Total wattage: 39W
Material: aluminium / polyethylene (PE)


- Can be controlled and dimmed with SLV VALETO remote control 1002994 or Gateway 1002411
- Ring light and panel can be controlled separately (Zigbee 3.0)


The energy efficiency class information for this product was not available at the time of printing. The latest product data can always be found at www.slv.com

Suspension set 1.5m **Prod. no. 135250**	
Suspension set 1.5m **Prod. no. 135251**	
Suspension set 1.5m **Prod. no. 135254**	
Suspension set 5m **Prod. no. 1001950**	
Suspension set 5m **Prod. no. 1001951**	
Suspension set 5m **Prod. no. 1001952**	
SLV VALETO® | remote control, CCT/RGBW **Prod. no. 1002994**	


Options	Prod. no.
Ring: 350lm | RGB+W (3000K) | CRI80 Panel: 2100-2400lm | 2700-6500K | CRI80	
white	**1002858**

I-PENDANT PRO
PD, 1195x295mm, DALI

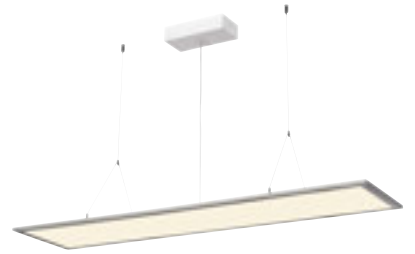

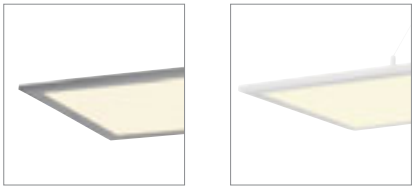

3750lm
INSIDE
CRI 80
3000K



Dali | IP 20 | 90° | UGR 19 | L70B50 | 150


100-277V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1003048, 1003050	3750lm 3000K	A→G E


Options	Prod. no.
3750lm | 3000K | CRI80	
white	**1003048**
3750lm | 3000K | CRI80	
grey	**1003050**

I-PENDANT PRO
PD, 1195x295mm, DALI



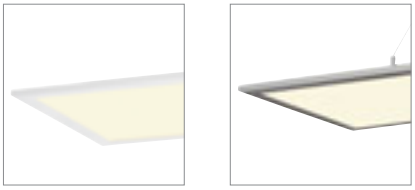

3800lm
INSIDE
CRI 90
4000K





Dali | IP 20 | 90° | UGR 19 | L70B50 | 150


100-240V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1003049, 1003051	3800lm 4000K	A→G D

Options	Prod. no.
3800lm | 4000K | CRI90	
white	**1003049**
3800lm | 4000K | CRI80	
grey	**1003051**

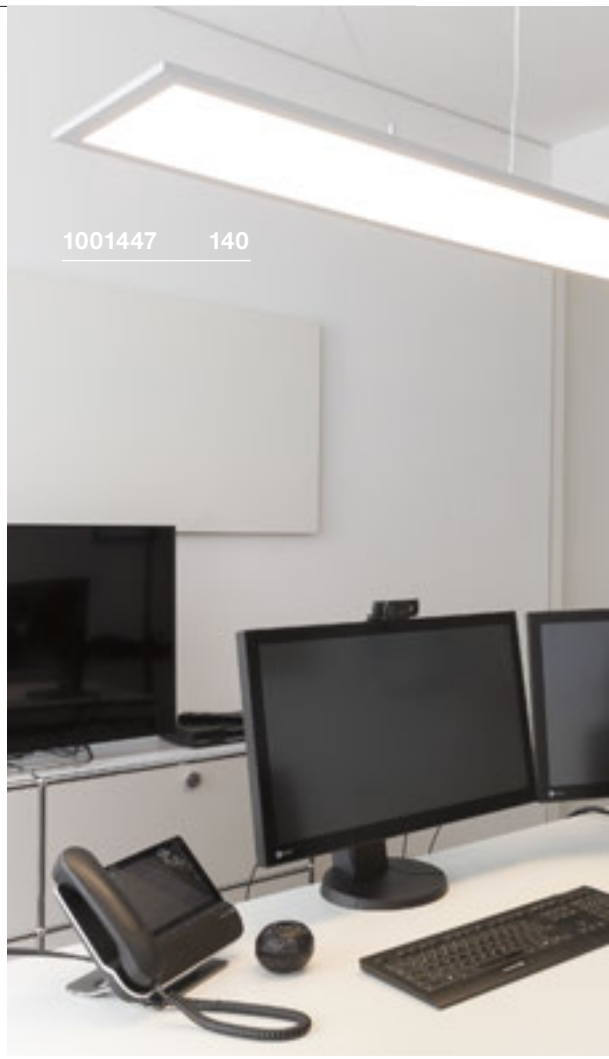

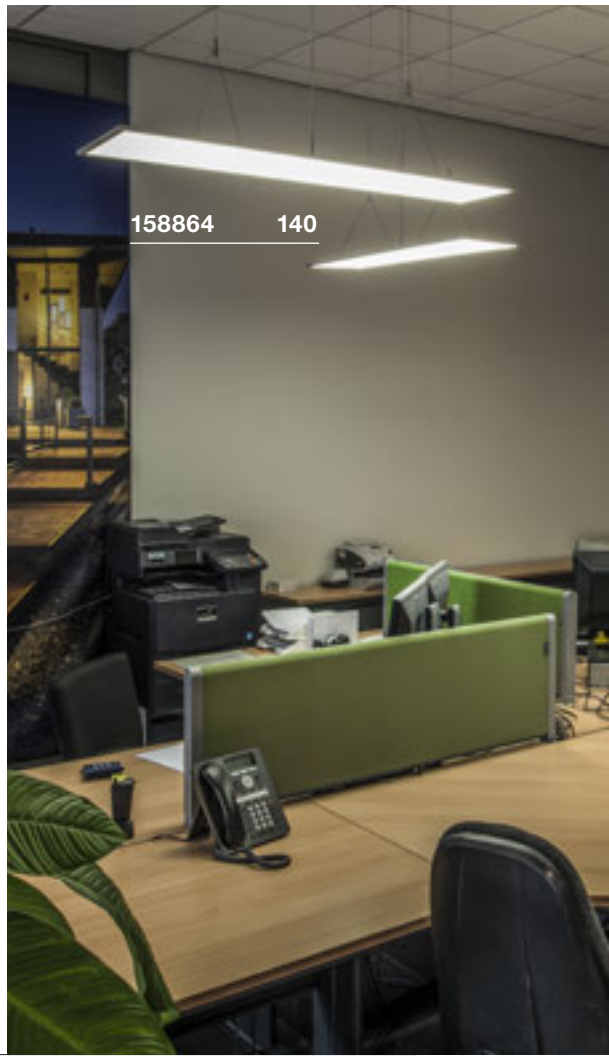


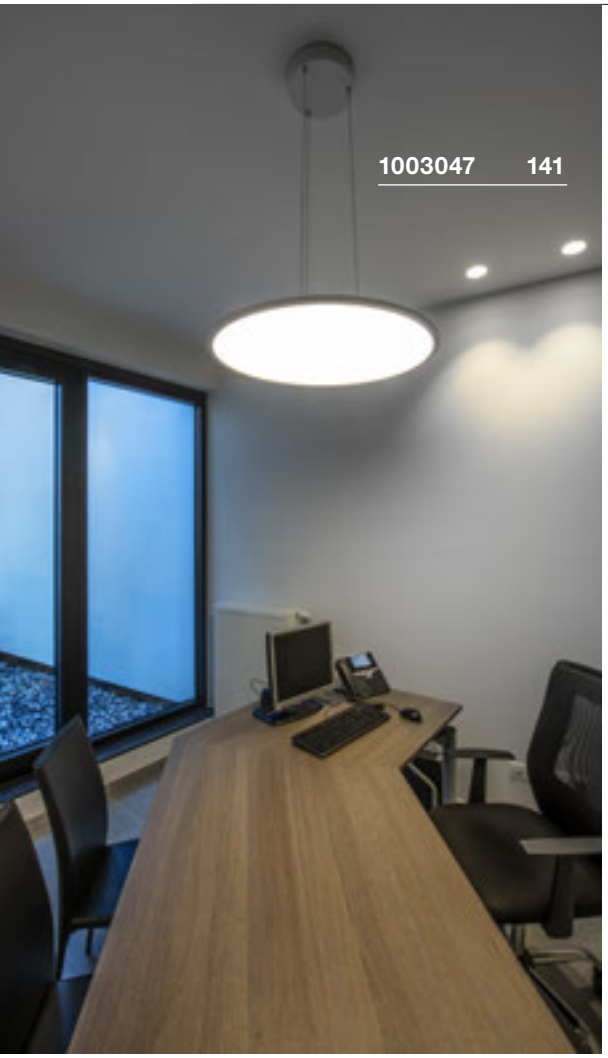



PANEL 60
PD, round, DALI



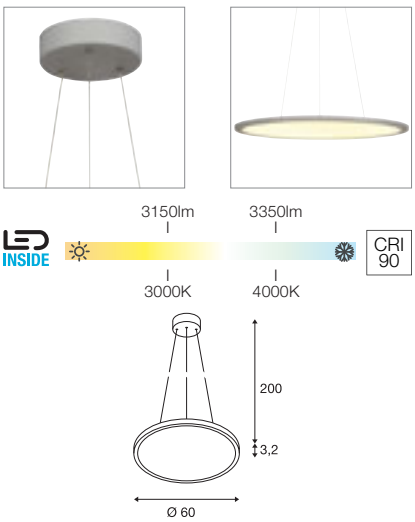

Dali | IP 20 | 110° | UGR 22 | L70B50 | 200


100-277V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1003046, 1003047	3150lm | 3350lm 3000K | 4000K	A→G, E

Options	Prod. no.
3150lm | 3000K | CRI90	
grey	**1003046**
3350lm | 4000K | CRI90	
grey	**1003047**

PANEL 60
PD, round, DALI



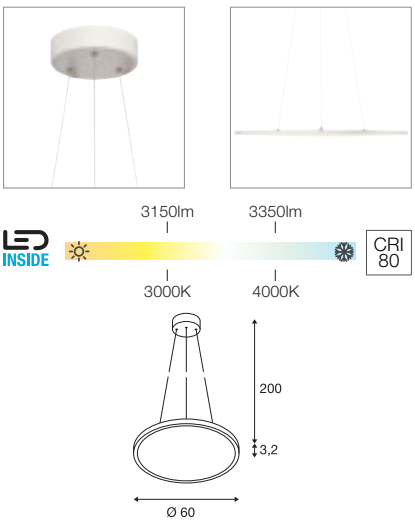

Dali | IP 20 | 110° | UGR 22 | L70B50 | 200

100-277V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1003044, 1003045	3150lm | 3350lm 3000K | 4000K	A→G, E

Options	Prod. no.
3150lm | 3000K | CRI80	
white	**1003044**
3350lm | 4000K | CRI80	
white	**1003045**

NOYA
PD, PHASE








1861lm / 2025lm

INSIDE

CRI 90

2700K / 3000K



IP 20 | 115° | L70B50 | 150


220-240V ~50/60Hz | 700mA
Total wattage: 32W
Material: aluminium/polycarbonate (PC)






1003530, 1003532	1861/2025lm 2700/3000K	A→G / A G E


Options	Prod. no.
1861/2025lm | 2700/3000K | CRI90	
black	**1003530**
1861/2025lm | 2700/3000K | CRI90	
white	**1003532**

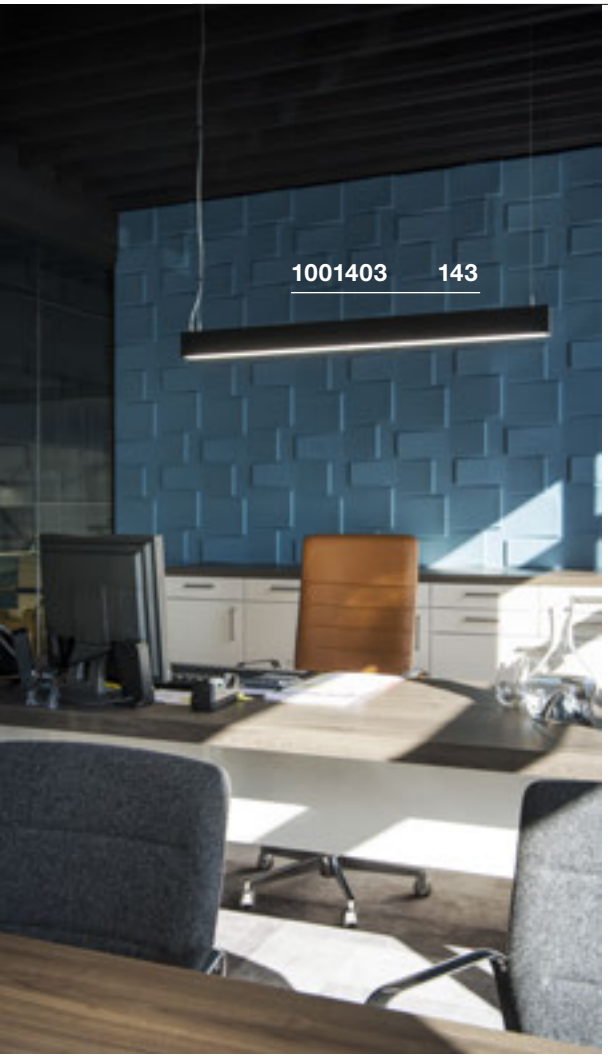

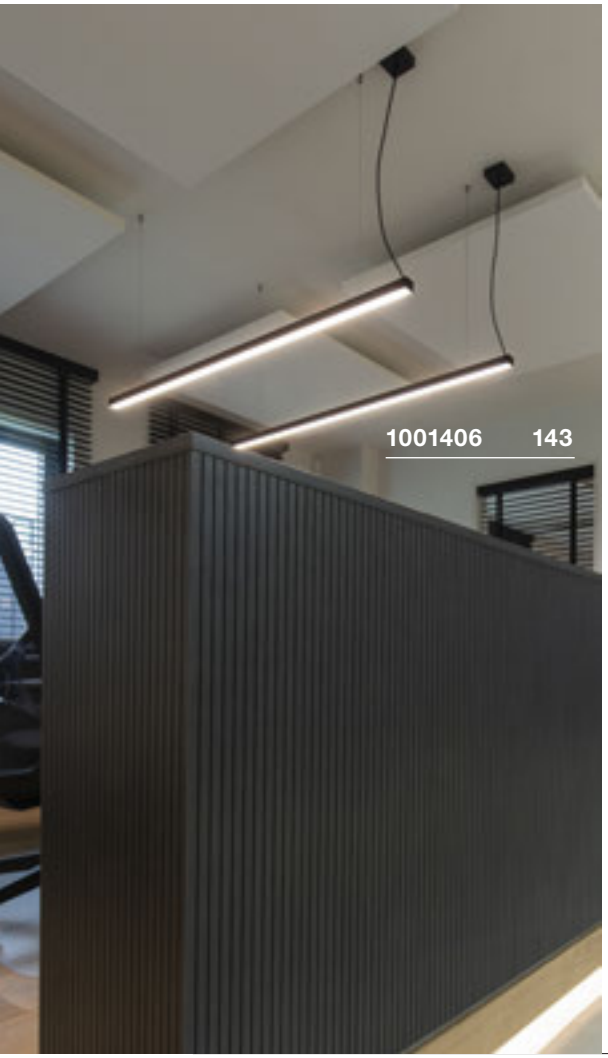

GLENOS
PD, 1m, 1-10V



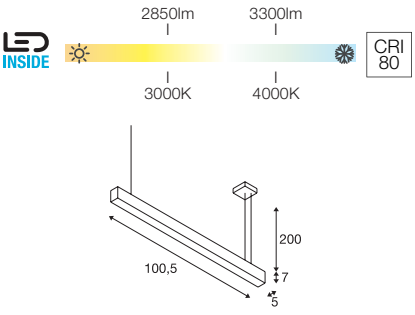

1-10V | IP 20 | UGR 28 | 35 000 Hours L70B50 | 200 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/plastic


1001400, 1001403	2850lm | 3300lm 3000 4000K	A→G A G E

1-10V dimming
Prod. no. 470505

Options	Prod. no.
2850lm | 3000K | CRI80	
■ black	**1001400**
3300lm | 4000K | CRI80	
■ black	**1001403**

GLENOS
PD, 2m, 1-10V





1-10V | IP 20 | UGR 28 | 35 000 Hours L70B50 | 200 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 85W
Material: aluminium/plastic

1001406, 1001409	5700lm | 6600lm 3000 4000K	A→G A G E

1-10V dimming
Prod. no. 470505


Options	Prod. no.
5700lm | 3000K | CRI80	
■ black	**1001406**
6600lm | 4000K | CRI80	
■ black	**1001409**

Q-LINE®
PD, 1m, BAP, PHASE





2100lm
INSIDE
CRI 90
3000K



C | IP 20 | 30° | UGR 10 | 25 000 Hours L70B50 | 150

LED

220-240V ~50/60Hz | 900mA
Total wattage: 46W
Material: aluminium/plastic

1000927, 1000926	2100lm 3000K	A→G / A G F


Options	Prod. no.
2100lm | 3000K | CRI90	
■ black	**1000927**
2100lm | 3000K | CRI90	
□ white	**1000926**

Q-LINE®
PD, 2m, BAP, PHASE





4200lm
INSIDE
CRI 90
3000K




C | IP 20 | 30° | UGR 10 | 25 000 Hours L70B50 | 150


LED

220-240V ~50/60Hz | 900mA
Total wattage: 93W
Material: aluminium/plastic

1000930, 1000929	4200lm 3000K	A→G / A G F

Options	Prod. no.
4200lm | 3000K | CRI90	
■ black	**1000930**
4200lm | 3000K | CRI90	
□ white	**1000929**

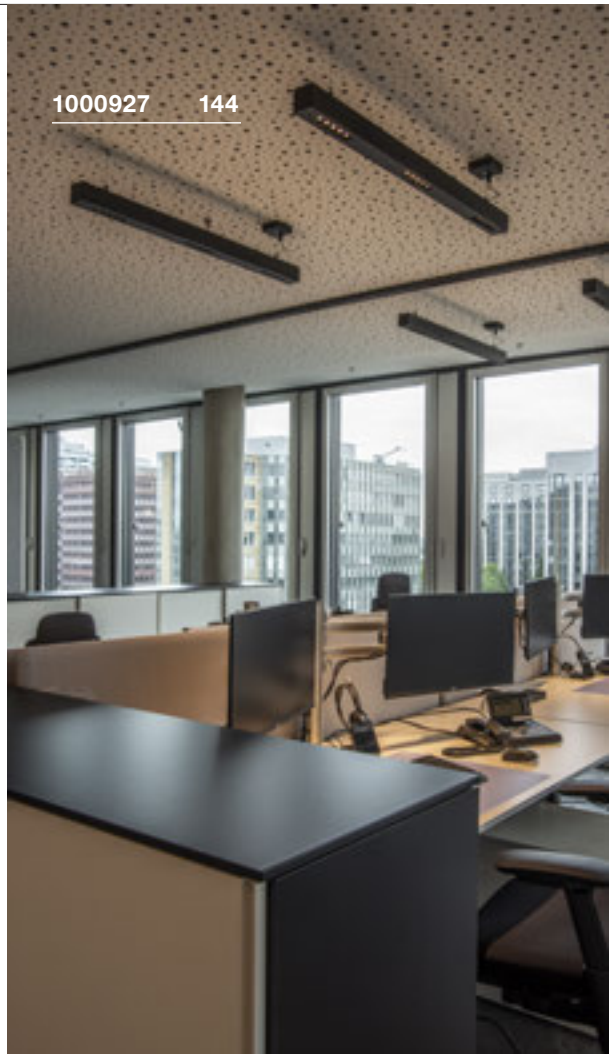

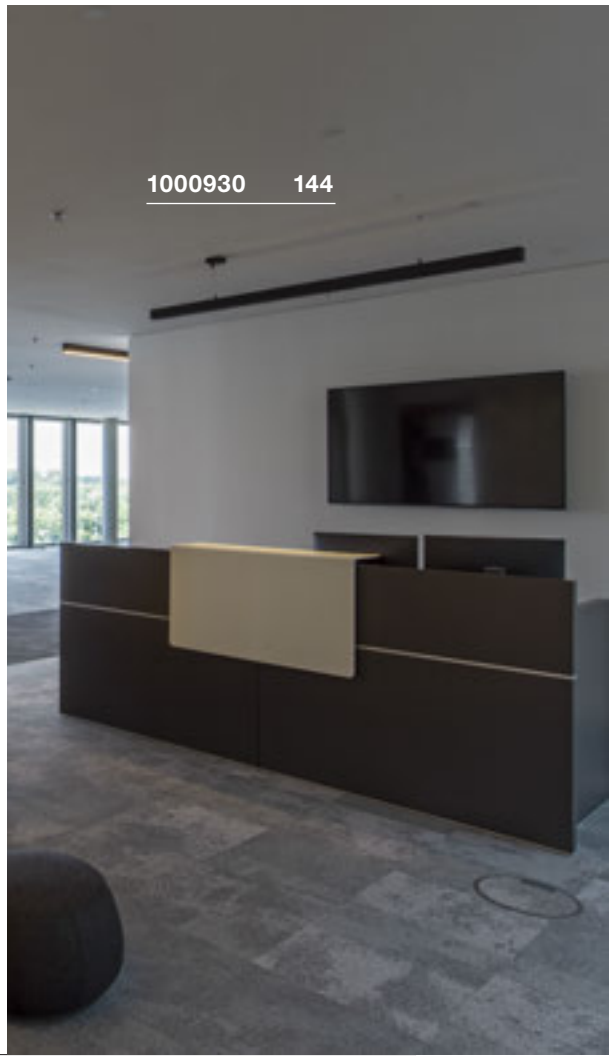


Q-LINE®
PD, 1m, BAP, PHASE





2300lm
4000K
CRI 90



C | IP 20 | 30° | UGR 10 | 25 000 Hours L70B50 | 150

LED


220-240V ~50/60Hz | 900mA
Total wattage: 46W
Material: aluminium/plastic

Q-LINE®
PD, 2m, BAP, PHASE





4600lm
4000K
CRI 90



C | IP 20 | 30° | UGR 10 | 25 000 Hours L70B50 | 150

LED


220-240V ~50/60Hz | 900mA
Total wattage: 93W
Material: aluminium/plastic

Q-LINE®
PD, DALI, single





3700lm
3000K
CRI 80



Dali | IP 20 | 120° | UGR 28 | 30 000 Hours L70B50 | 200

LED

220-240V ~50/60Hz | 700mA
Total wattage: 47W
Material: aluminium/acrylic

1000933, 1000932	2300lm 4000K	A→G F

Options	Prod. no.
2300lm | 4000K | CRI90	
■ black	**1000933**
2300lm | 4000K | CRI90	
□ white	**1000932**

1000936, 1000935	4600lm 4000K	A→G F

Options	Prod. no.
4600lm | 4000K | CRI90	
■ black	**1000936**
4600lm | 4000K | CRI90	
□ white	**1000935**

1001309, 1001310	3700lm 3000K	A→G E

Options	Prod. no.
3700lm | 3000K | CRI80	
■ black	**1001309**
3700lm | 3000K | CRI80	
□ white	**1001310**

WORKLIGHT
PD, DALI


NEW







5000lm
4000K
CRI 80



Dali | IP 20 | IK02 | 80° | 110° | UGR 19

L80B10 | 250 | LED


200-240V ~50/60Hz | 1500mA
Total wattage: 57W
Material: aluminium

Up	2000lm 4000K	D
Down	3000lm 4000K	D

Options	Prod. no.
Up: 2000lm | 4000K | CRI80 Down: 3000lm | 4000K | CRI80 black	1005395
Up: 2000lm | 4000K | CRI80 Down: 3000lm | 4000K | CRI80 white	1005396





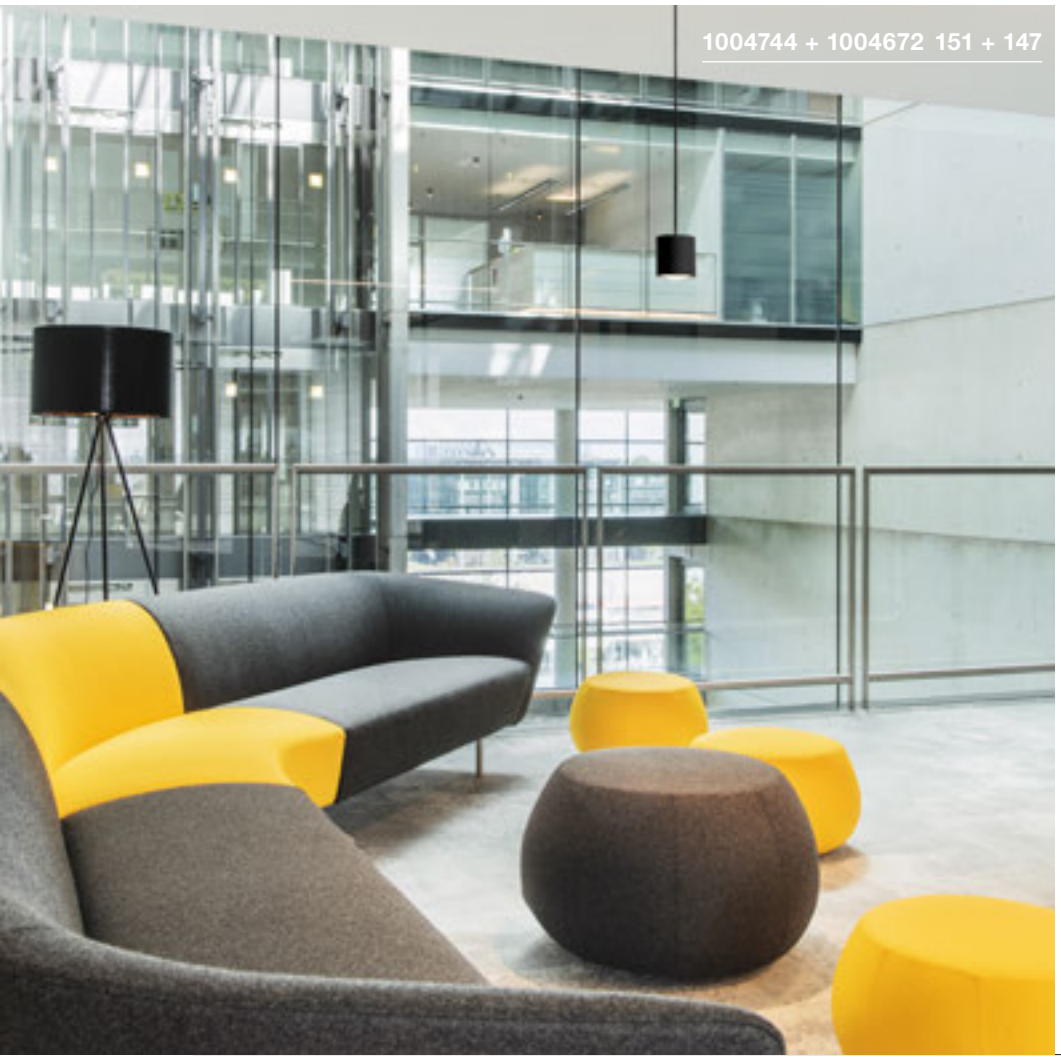

OCULUS
PD, single, PHASE









36lm - 780lm

LED INSIDE

CRI 90

2000K - 3000K





IP 20 | 100° | L70B50 | 250 | 250

LED

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/glass

- Additional frosted lens included
- Matching accessories can be found on page 151

1004672, 1004673	36-780lm 2000-3000K	A→G A G F


Options	Prod. no.
36-780lm | 2000-3000K | CRI90	
■ black	**1004672**
36-780lm | 2000-3000K | CRI90	
□ white	**1004673**

SUPROS 78
PD





700lm
3000K
CRI 80



IP 20 | 60° | L70B50 | 150

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium

133120, 133121	700lm 3000K	A→G A G E

- Lens 20°
  Prod. no. 116302
- Lens 40°
  Prod. no. 116304


Options	Prod. no.
700lm | 3000K | CRI80	
■ black	**133120**
700lm | 3000K | CRI80	
□ white	**133121**

SUPROS
PD





2600lm
3000K
CRI 90



IP 20 | 60° | L70B50 | 200

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

1003275, 1003276	2600lm 3000K	A→G A G E

- Reflector 20°
  Prod. no. 114102
- Reflector 40°
  Prod. no. 114104


Options	Prod. no.
2600lm | 3000K | CRI90	
■ black	**1003275**
2600lm | 3000K | CRI80	
□ white	**1003276**

SUPROS
PD





2700lm
4000K
CRI 90



IP 20 | 60° | L70B50 | 200

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

1003277, 1003278	2700lm 3000K	A→G A G E

- Reflector 20°
  Prod. no. 114102
- Reflector 40°
  Prod. no. 114104

Options	Prod. no.
2700lm | 4000K | CRI90	
■ black	**1003277**
2700lm | 4000K | CRI90	
□ white	**1003278**


SUPROS
PD







3380lm
INSIDE
CRI 90
3000K



IP 20 | 60° | L70B50 | 200

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium

1003279, 1003280	3380lm 3000K	A→G E


Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104

Options	Prod. no.
3380lm | 3000K | CRI90	
■ black	**1003279**
3380lm | 3000K | CRI90	
□ white	**1003280**


SUPROS
PD







3520lm
INSIDE
CRI 90
4000K



IP 20 | 60° | L70B50 | 200

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium

1003281, 1003282	3520lm 3000K	A→G E

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104

Options	Prod. no.
3520lm | 4000K | CRI90	
■ black	**1003281**
3520lm | 4000K | CRI90	
□ white	**1003282**






FITU
PD, E27







SOCKET INSIDE <60 W



IP 20 500

220-240V ~50/60Hz
Material: aluminium

- Textile cable
- Open cable end

E27 <60W

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005303

Options	Prod. no.
1xE27	
black	**132690**
1xE27	
white	**132691**
1xE27	
gold	**1002168**


FITU
PD, E27







SOCKET INSIDE <60 W



IP 20 500

220-240V ~50/60Hz
Material: aluminium


- Textile cable
- Open cable end


E27 <60W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265

Options	Prod. no.
1xE27	
black	**1002558**
1xE27	
white	**1002562**
1xE27	
gold	**1002564**
1xE27	
aluminium	**1002563**

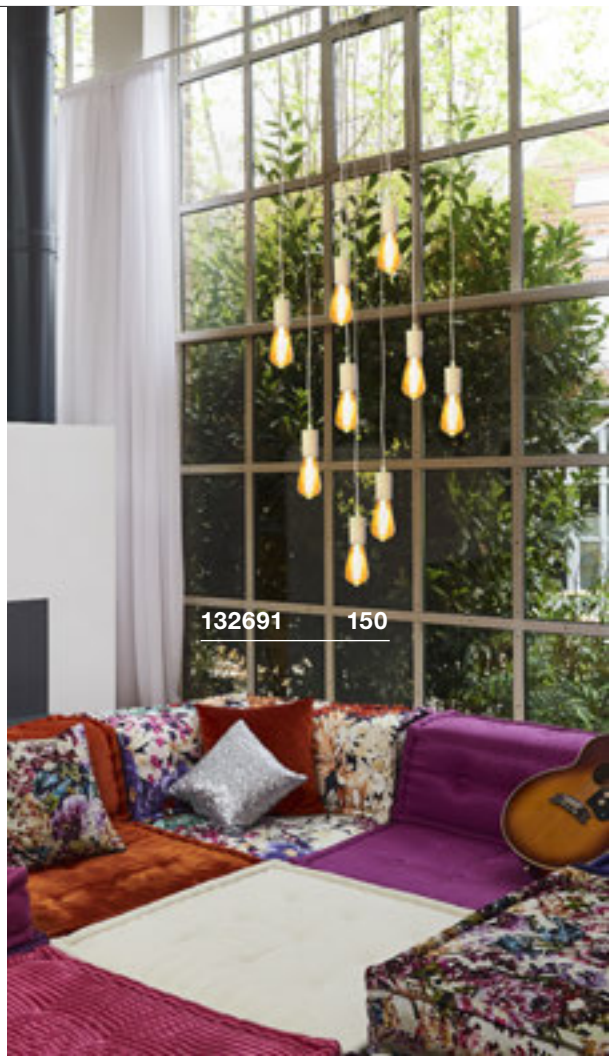

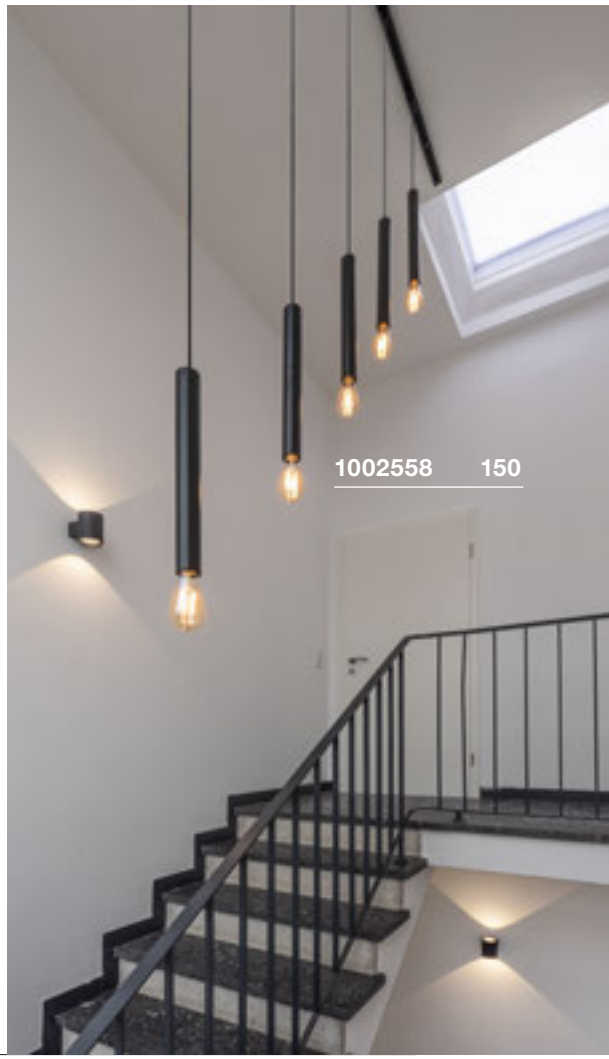

FITU MIX & MATCH ACCESSORIES

Fitu single ceiling rose

16A max.
steel
H: 3.9 cm
Diameter: 8.5 cm
Incl. strain relief



Options	Prod. no.
black	132600
white	132601
chrome	132605
gold	1002163

Fitu triple ceiling rose

16A max.
steel
H: 5.4 cm
Diameter: 22 cm
Incl. strain relief



Options	Prod. no.
black	132610
white	132611
chrome	132615 ▼
gold	1002164

Fitu quintuple ceiling rose

16A max.
steel
H: 6 cm
Diameter: 33 cm
Incl. strain relief



Options	Prod. no.
black	132620
white	132621
chrome	132625 ▼
gold	1002165

Ceiling rose 3-piece

16A max.
steel
L: 60 cm W: 8.5 cm H: 5 cm
Incl. strain relief



Options	Prod. no.
black	1001818
white	1001819
gold	1002264

Ceiling rose 5-piece

16A max.
steel
L: 120 cm W: 8.5 cm H: 5 cm



Options	Prod. no.
black	1001820
white	1001821
gold	1002265

Ceiling rose structure

16A max.
steel
H: 2.6 cm
Diameter: 9 cm



Options	Prod. no.
black	1004744
white	1004745
chrome	1004746

Built-in ceiling rose

16A max.
Steel/polyamide 66 (PA 66)
H: 3.3 cm
Diameter: 8.5 cm



Options	Prod. no.
black	1004674
white	1004675
chrome	1004676

Ceiling hook

aluminium
L: 4.6 cm
Diameter: 1.8 cm



Options	Prod. no.
black	132670
white	132671

Cable hook

aluminium
L: 3.1 cm
Diameter: 1.4 cm



Options	Prod. no.
black	132680
white	132681

1-phase light adapter

6A max.
Polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 4.2 cm
Max. mechanical load 2 kg



Options	Prod. no.
black	143120
white	143121
grey	143124


3-phase light adapter

10A max.
plastic

Max. mechanical load 5 kg



Options	Prod. no.
black	145990
white	1001542
grey	145994

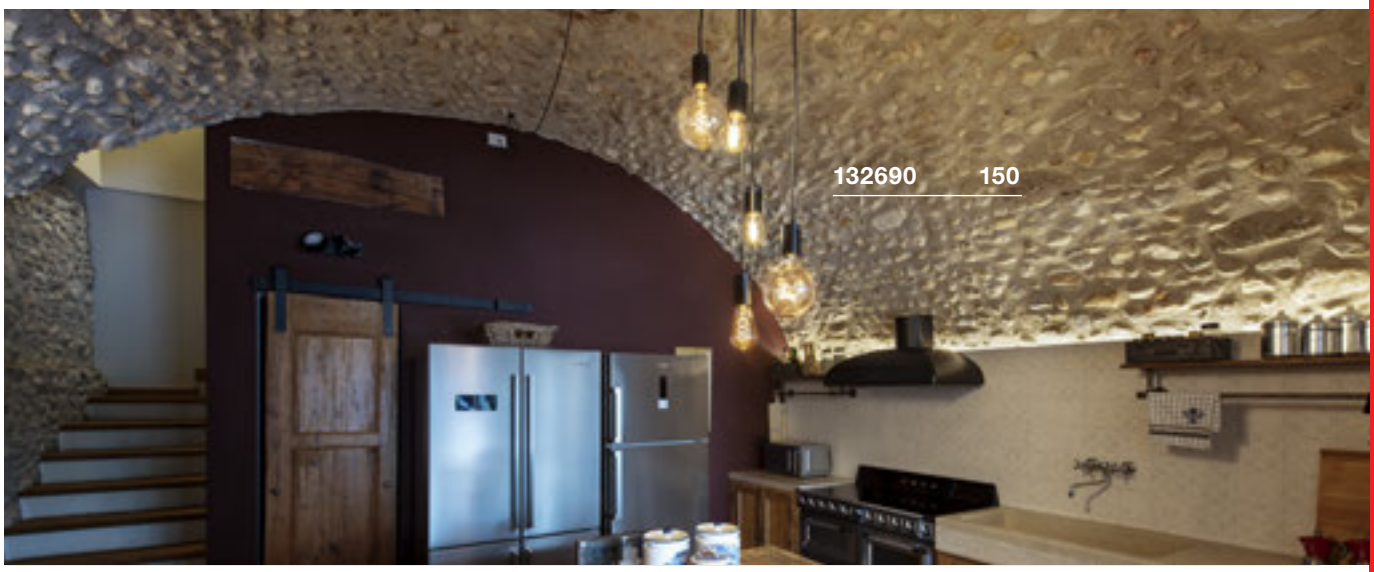

SLV FENDA. MIX & MATCH.






132661 + 1004774 154 + 155
1003031 + 1004775 104 + 155


1000773 154


132660 + 1000580 154 + 155


FENDA
PD, E27







SOCKET INSIDE <60 W



IP 20 150

220-240V ~50/60Hz
Material: steel/plastic

- Open cable end
- Matching accessories can be found on page 151

E27 <60W

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
black	**132660**
1xE27	
white	**132661**
1xE27	
chrome	**132662**

FENDA
Glass shade



IP 20

H: 20 cm
Diameter: 12.5 cm
Material: glass

- Max. 25W

Options	Prod. no.
brown	**1000773**
white	**1002217**

FENDA
Diameter 40cm, round



IP 20


H: 30 cm
Diameter: 40 cm
Material: poly (methyl methacrylate) (PMMA)

- Max. 40W

Options	Prod. no.
white	**1000764**





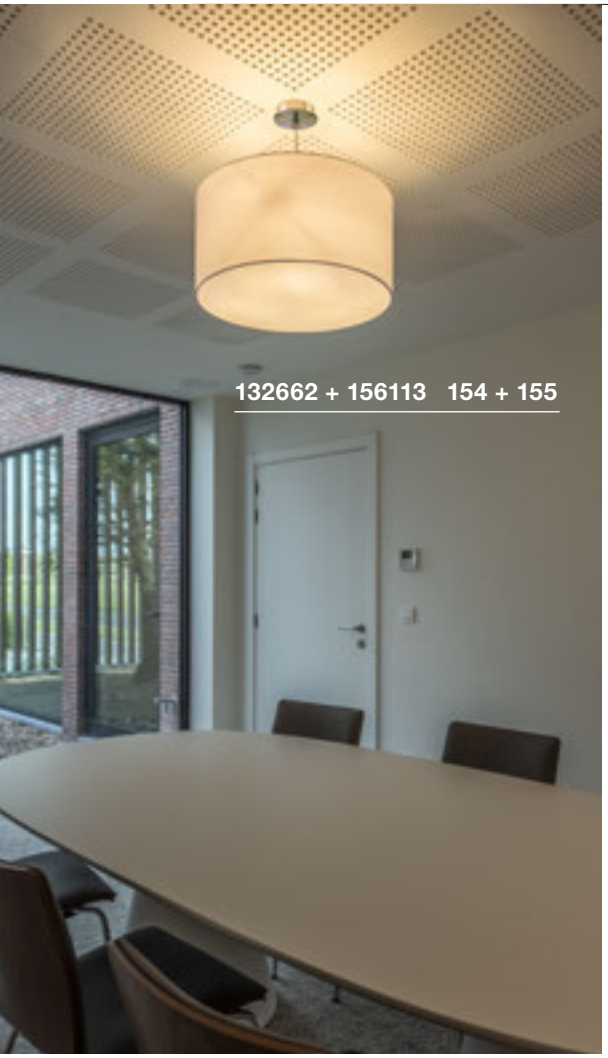

FENDA
15 cm, round

NEW VARIANT



H: 40 cm
Diameter: 15 cm
Material: textile/steel

Options	Prod. no.
black/copper	156152
white	156141
beige	156143
grey	1004773


FENDA
30 cm, round

NEW VARIANT



H: 20 cm
Diameter: 30 cm
Material: textile/steel

Options	Prod. no.
black/copper	155592
white	155582
beige	155583
grey	1004774

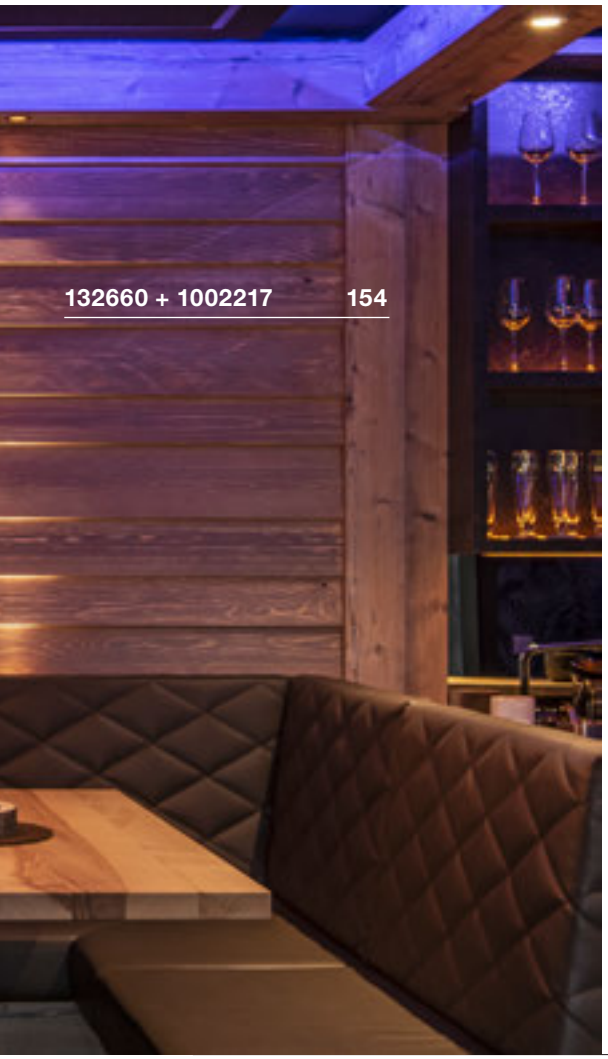

FENDA
45 cm, round

NEW VARIANT



H: 28 cm
Diameter: 45.5 cm
Material: textile/steel

Acrylic glass cover
Prod. no. 156100

Options	Prod. no.
black/copper	156122
white	156111
beige	156113
grey	1004775

FENDA
Diameter 70 cm, round



H: 36 cm
Diameter: 70 cm
Material: textile/steel

- Max. 20W


Acrylic glass cover
Prod. no. 1000957

Options	Prod. no.
black/copper	1000580
white	1000579


ACCANTO
PD, E27







SOCKET INSIDE <40 W



IP 20 150

220-240V ~50/60Hz
Material: steel/textile

E27 <40W L: 13 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h


Prod. no. 1005301

Options	Prod. no.
3xE27	
■ black	**1002946** ▼
3xE27	
□ white	**1002947** ▼


TRIADEM
PD, E27







SOCKET INSIDE <60 W



IP 20 150

220-240V ~50/60Hz
Material: steel/textile

E27 <60W L: 14 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
3xE27	
■ black	**155870** ▼
3xE27	
□ white	**155871** ▼









HELIA AMBIENT 35
PD, PHASE






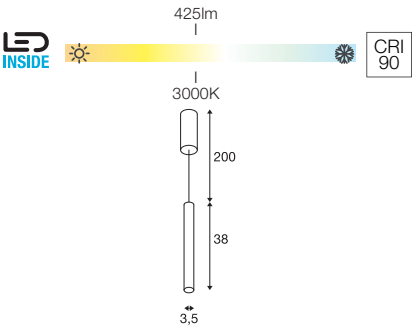




220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/acrylic

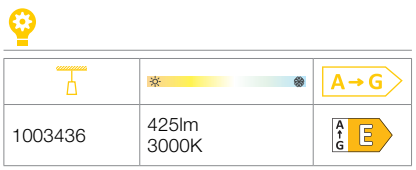



Options	Prod. no.
425lm | 3000K | CRI90	
■ black	**1003436**

HELIA AMBIENT 35
PD



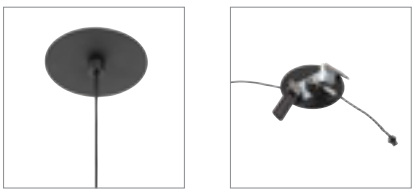


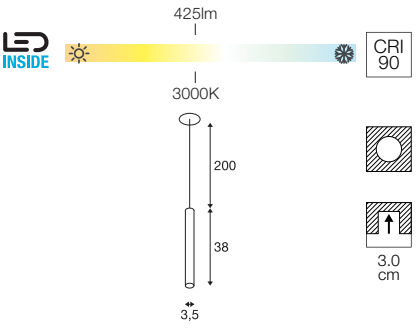



500mA
Total wattage: 7.5W
Material: aluminium/acrylic

- Incl. built-in rose
- Diameter built-in rose 68 mm

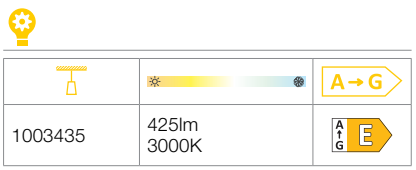


Options	Prod. no.
425lm | 3000K | CRI90	
■ black	**1003435**

HELIA 30
PD, PHASE




590|620|670lm


INSIDE



CRI 90

3000K






220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium

152360, 152361, 1002172	590lm | 670lm | 620lm 3000K	A→G E

Options	Prod. no.
590lm | 3000K | CRI90	
black	**152360**
670lm | 3000K | CRI90	
white	**152361**
620lm | 3000K | CRI90	
gold	**1002172**


HELIA 30
PD



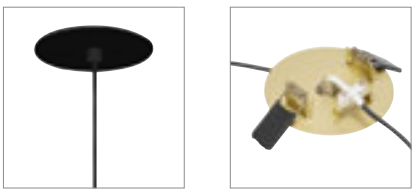

500|550lm


INSIDE




CRI 90

3000K







500mA
Total wattage: 7.5W
Material: aluminium

- LED driver not included
- Material thickness of mounting surface: max. 12 mm


158400, 158401, 1002170	500lm | 550lm 3000K	A→G E

LED Driver 500mA | 15W dimmable
Prod. no. 464144




Options	Prod. no.
500lm | 3000K | CRI90	
black	**158400**
550lm | 3000K | CRI90	
white	**158401**
550lm | 3000K | CRI90	
gold	**1002170**



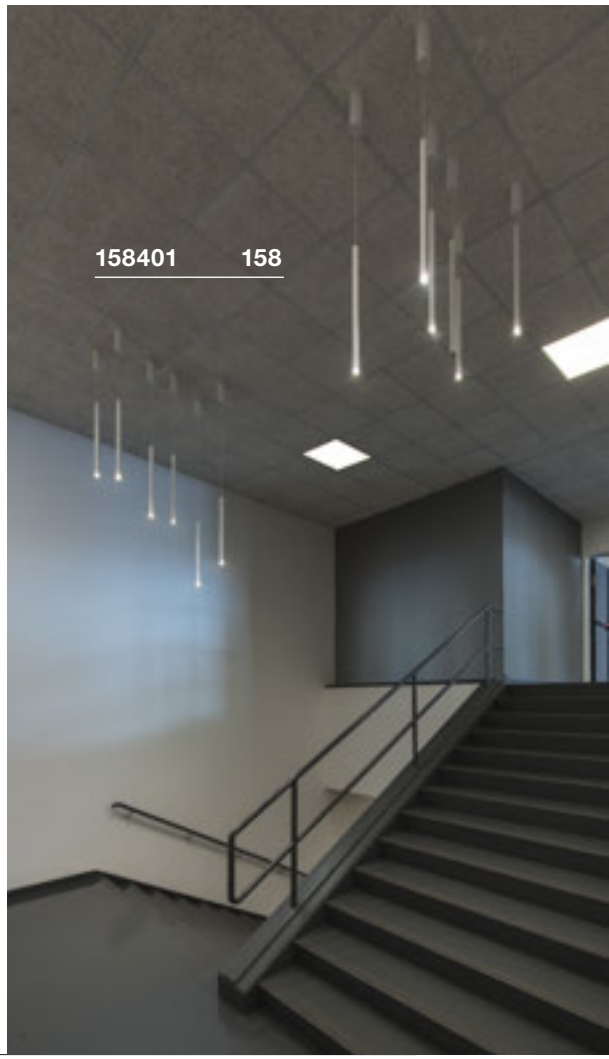




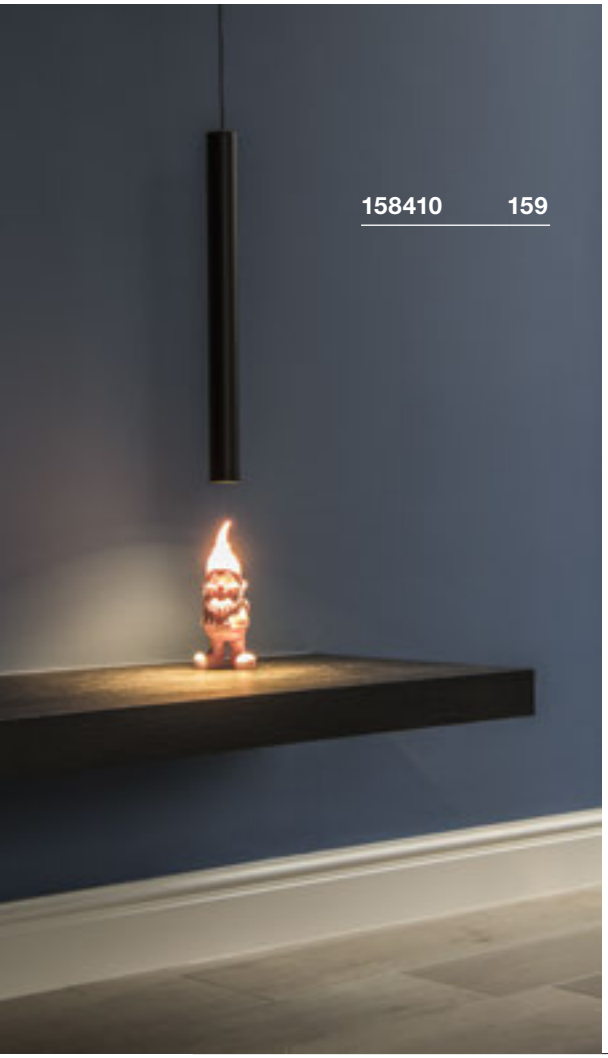

HELIA 40
PD, PHASE







730|790|830lm

INSIDE

CRI 90


3000K





IP 20 30° L70B50 150

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

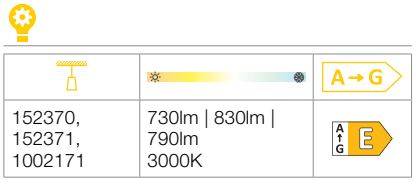


152370, 152371, 1002171	730lm | 830lm | 790lm 3000K	A→G / A G E

Options	Prod. no.
730lm | 3000K | CRI90 ■ black	**152370**
830lm | 3000K | CRI90 □ white	**152371**
790lm | 3000K | CRI90 ■ gold	**1002171**

HELIA 40
PD





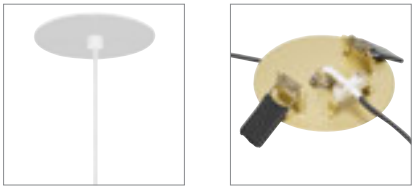



700|720lm

INSIDE

CRI 90

3000K







IP 20 30° L70B50 150

500mA
Total wattage: 9W
Material: aluminium

- LED driver not included
- Material thickness of mounting surface: max. 12 mm

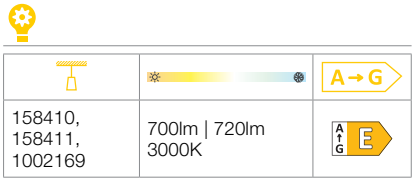

158410, 158411, 1002169	700lm | 720lm 3000K	A→G / A G E



□ LED Driver 500mA | 15W dimmable
Prod. no. 464144

Options	Prod. no.
700lm | 3000K | CRI90 ■ black	**158410**
720lm | 3000K | CRI90 □ white	**158411**
720lm | 3000K | CRI90 ■ gold	**1002169**


ASTINA
PD, QPAR51







SOCKET INSIDE <10 W



IP 20 250

220-240V ~50/60Hz
Material: aluminium

- Open cable end
- Matching accessories can be found on page 151

GU10 <10W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10 ■ black	**1002939**
1xGU10 □ white	**1002937**
1xGU10 ■ grey	**1002938**







ENOLA B
PD, QPAR51










SOCKET INSIDE <50 W



IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972


Options	Prod. no.
1xGU10 ■ black	**151850**
1xGU10 □ white	**151851**
1xGU10 ■ gold	**151853**

ENOLA
PD, E27










SOCKET INSIDE <60 W



IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

E27 <60W
Diameter: 9 cm L: 18 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h



Prod. no. 1005302

Options	Prod. no.
1xE27 ■ black	**149388**
1xE27 □ white	**149381**
1xE27 ■ gold	**149387**

PANTILO 20
PD, E27










SOCKET INSIDE <15 W



IP 20 250

200-240V ~50/60Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 151

E27 <15W

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005303

Options	Prod. no.
1xE27	
chrome	**1003004**
1xE27	
copper	**1003005**

PANTILO 28
PD, E27










SOCKET INSIDE <15 W



IP 20 250

200-240V ~50/60Hz
Material: glass


- Open cable end
- Matching accessories can be found on page 151

E27 <15W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265

Options	Prod. no.
1xE27	
chrome	**1003006**
1xE27	
copper	**1003007**

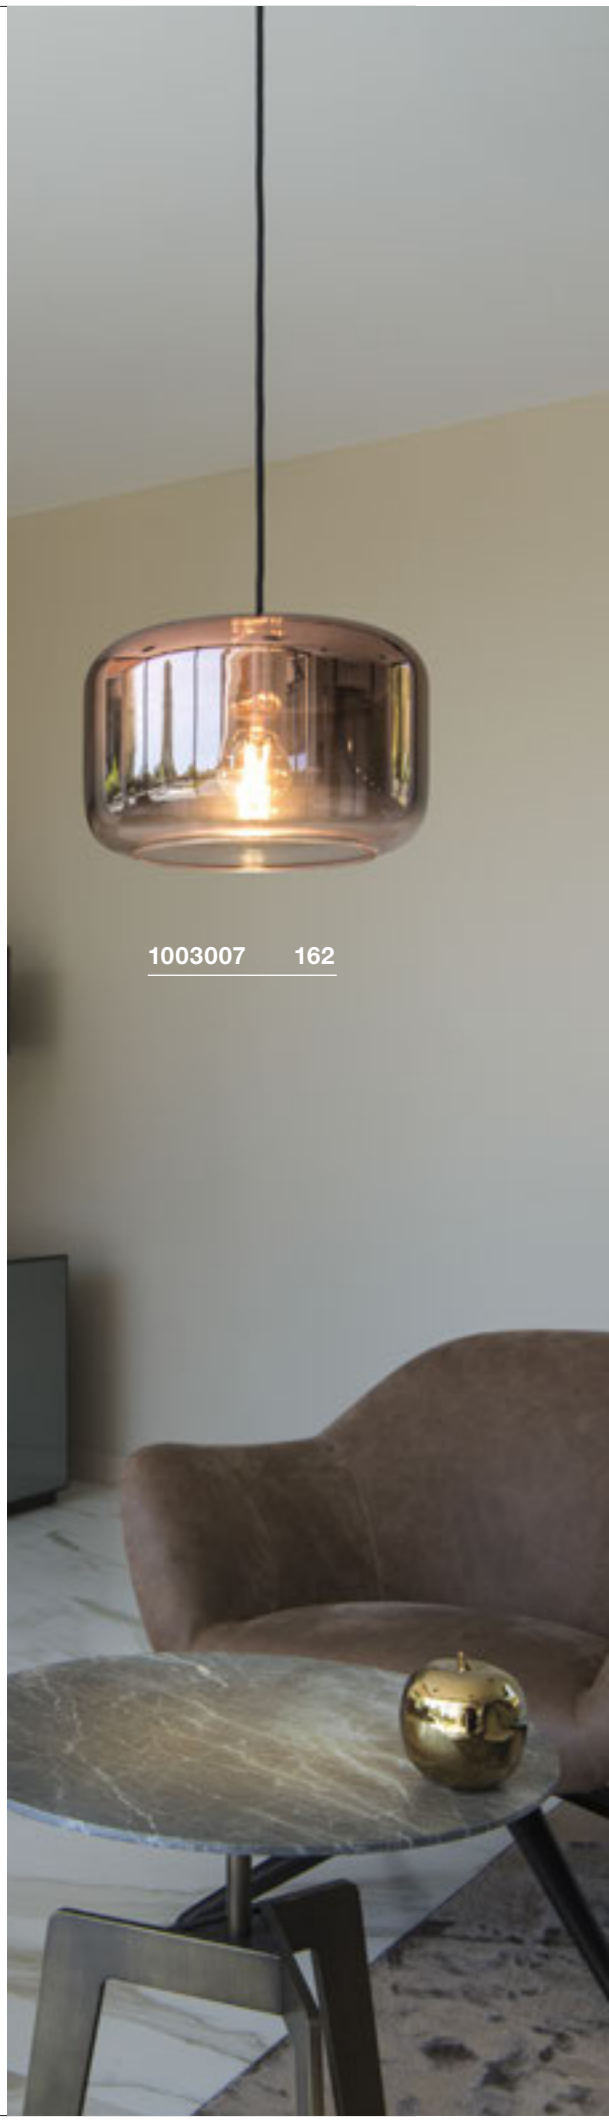

1003007 162






PANTILO CONVEX 29
PD, E27







SOCKET INSIDE <15 W



IP 20 250

200-240V ~50/60Hz
Material: glass

- Open cable end
- Matching accessories can be found on page 151

E27 <15W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265

Options	Prod. no.
E27	
chrome	**1003443**


PANTILO CONVEX 40
PD, E27







SOCKET INSIDE 40 W



IP 20 150

220-240V ~50/60Hz
Material: glass/steel

E27 <15W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265


Options	Prod. no.
E27	
chrome	**1003444**

ANELA
PD, PHASE





220lm - 750lm
LED INSIDE
CRI 90
3000K - 3000K



IP 20 | 28° | L70B50 | 150

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Reflector not included
- Luminous flux with reflector 1000809 = 500lm
  Luminous flux with reflector 1000810 = 620lm
  Luminous flux with reflector 1000811 = 200lm
  Luminous flux with reflector 1000812 = 600lm

		A→G
1000813	220-750lm 3000K	A G E

Reflector 28°
Prod. no. 1000809

Reflector 28°
Prod. no. 1000810

Reflector 28°
Prod. no. 1000811

Reflector 28°
Prod. no. 1000812

Options	Prod. no.
220-750lm | 3000K | CRI90	
glossy black	**1000813**


LISENNE
PD, E27







SOCKET INSIDE
<23 W




IP 20 | 180

220-240V ~50/60Hz
Material: basalt/glass

E27 <23W
Diameter: 5.9 cm L: 15 cm


LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h
Prod. no. 1005268

Options	Prod. no.
1xE27	
grey	**155714**

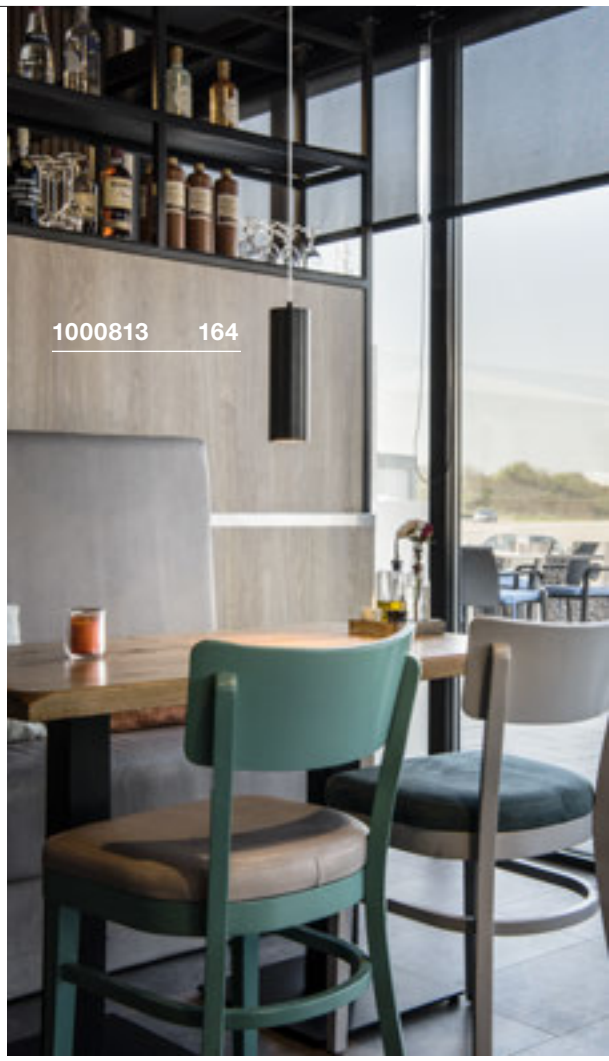





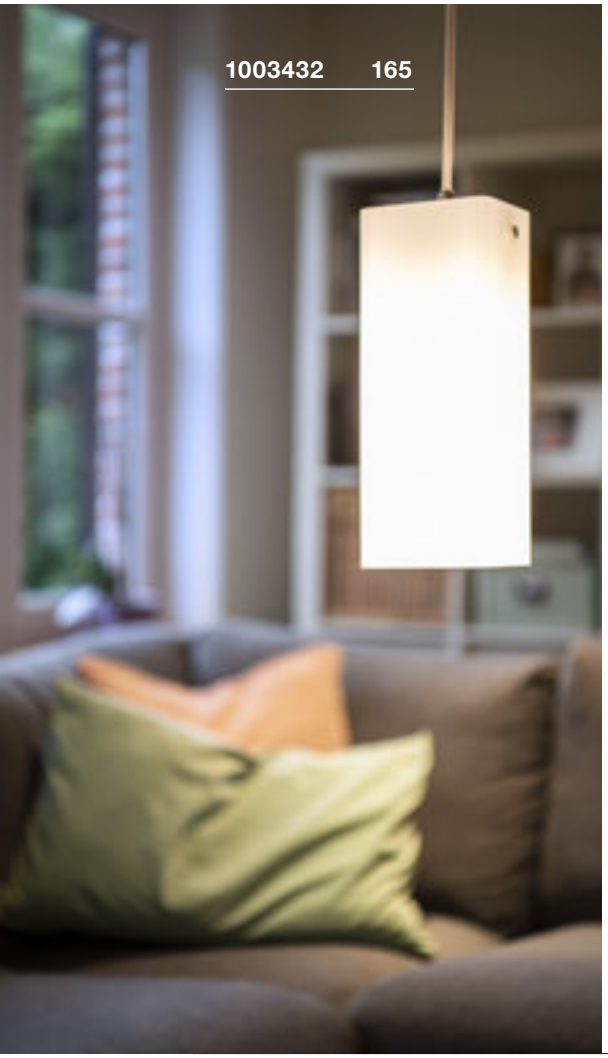


TONGA®
PD, E14





SOCKET INSIDE <60 W



IP 20 150

220-240V ~50/60Hz
Material: aluminium/glass

E14 <60W
Diameter: 5 cm L: 13 cm

LED E14 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no. 1005285


Options	Prod. no.
1xE14	
grey	**133444**

QUADRASS
PD, E27





SOCKET INSIDE <40 W



IP 20 250

220-240V ~50/60Hz
Material: steel/glass

- Open cable end
- Matching accessories can be found on page 151

E27 <40W
Diameter: 6.5 cm L: 18 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
chrome	**1003432**

PARA CONE GL
PD, GU10


NEW







SOCKET INSIDE <25 W



IP 20 250

220-240V ~50/60Hz
Material: aluminium/glass

• Matching accessories can be found on page 151

GU10 <25W

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1003101

Options	Prod. no.
1xGU10	
■ black	**1006159**
1xGU10	
□ white	**1006160**







PARA CONE 30
PD, E27










SOCKET INSIDE  <60 W







220-240V ~50/60Hz
Material: aluminium/steel

- Textile cable
- Black/gold version with golden reflector
- All other versions with white reflector



E27 <15W



LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h



Prod. no. 1005303

Options	Prod. no.
1xE27	
glossy black/gold	**133060**
1xE27	
copper	**133019**


1002949 169





PHELIA 25
PD, E27











SOCKET INSIDE  <23 W







220-240V ~50/60Hz
Material: aluminium

- Textile cable



E27 <23W



LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h



Prod. no. 1005302

Options	Prod. no.
1xE27	
black/gold	**1002949**
1xE27	
black/white	**133310**

PHELIA 30
PD, E27











SOCKET INSIDE  <23 W







220-240V ~50/60Hz
Material: aluminium

- Textile cable



E27 <23W



LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h



Prod. no. 1005268

Options	Prod. no.
1xE27	
black/gold	**1002950**
1xE27	
black/white	**133320**


FORCHINI 50
PD, E27








SOCKET INSIDE  <40 W





230V ~50Hz
Material: fiberglass

E27 <40W L: 20 cm


LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h



Prod. no. 1005301

Options	Prod. no.
1xE27	
black/gold	**155530**


FORCHINI 70
PD, E27








SOCKET INSIDE  <40 W





220-240V ~50/60Hz
Material: fiberglass

E27 <40W L: 20 cm


G125 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h





Prod. no. 1005306

Options	Prod. no.
1xE27	
black/gold	**1001701**










FORCHINI M 40
PD, E27





SOCKET INSIDE <40 W



IP 20 150

230V ~50Hz
Material: aluminium/steel

E27 <40W L: 15.2 cm


A60 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no. 1005305


Options	Prod. no.
1xE27	
black/gold	**155910**

FORCHINI M 50
PD, E27



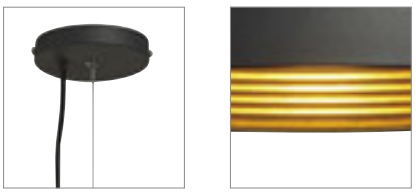

SOCKET INSIDE <40 W



IP 20 150

230V ~50Hz
Material: aluminium/steel

E27 <40W L: 18 cm

G125 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h

Prod. no. 1005306

Options	Prod. no.
1xE27	
black/gold	**155930**


LIGHT EYE® 90
PD, GU10







SOCKET INSIDE  <6 W





220-240V ~50/60Hz
Material: steel

- Textile cable

GU10 <6W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972



■ Decorative lamp ring, diameter 5.7 cm 
Prod. no. 151040

□ Decorative lamp ring, diameter 5.7 cm 
Prod. no. 151041

■ Decorative lamp ring, diameter 5.7 cm 
Prod. no. 151049

Options	Prod. no.
1xGU10	
■ black	**133490**
1xGU10	
□ white	**133491**

LIGHT EYE® 150
PD, QPAR111










SOCKET INSIDE  <75 W





220-240V ~50/60Hz
Material: steel

- Textile cable

GU10 <75W

LED GU10 | 12.5W | 60°
2700K | 1000lm | EEK=F
13kWh/1000h



Prod. no. 1005277

Options	Prod. no.
1xGU10	
white/chrome	**133481**
1xGU10	
chrome	**133482**
1xGU10	
copper	**133489**









SUN / BIG SUN
PD, E27



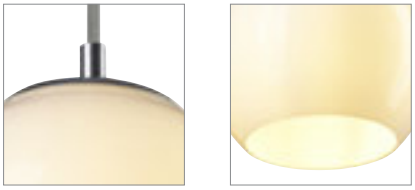

SOCKET INSIDE <60 W



IP 20 | 170

230V ~50Hz
Material: steel/glass

- Open cable end
- Matching accessories can be found on page 151

E27 <60W
Diameter: 7 cm L: 12 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h


Prod. no. 1005302

Options	Prod. no.
1xE27 | Diameter: 19.5 cm	
white/chrome	**1002045**
1xE27 | Diameter: 30 cm	
white/chrome	**1002046**


ROTOBALL 25
PD, E27







SOCKET INSIDE <24 W



IP 20 200

230V ~50Hz
Material: steel/polyethylene (PE)

E27 <24W
Diameter: 7 cm

LED E27 | 7.5W | 320°
2700K | 700lm | EEK=F
8kWh/1000h


Prod. no. 1005304

Options	Prod. no.
1xE27	
white/silver grey	**165390**


ROTOBALL 40
PD, E27







SOCKET INSIDE <24 W



IP 20 200

230V ~50Hz
Material: steel/polyethylene (PE)

E27 <24W
Diameter: 9.5 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h


Prod. no. 1005301

Options	Prod. no.
1xE27	
white/silver grey	**165410**


ROTOBALL 50
PD, E27







SOCKET INSIDE <24 W



IP 20 200

230V ~50Hz
Material: steel/polyethylene (PE)

E27 <24W
Diameter: 9.5 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
1xE27	
white/silver grey	**165400**






PLASTRA 25
PD, round, TCR-TSE







SOCKET INSIDE <11 W



IP 20 150

230V ~50Hz
Material: plaster/steel

GX53 <11W

LED GX53 | 6.1W | 120°
4000K | 520lm | EEK=F
6kWh/1000h

Prod. no. 1005269

Options	Prod. no.
1xGX53	
white	**1002047**


PARA DOME
PD, E27







SOCKET INSIDE <150 W



IP 20

220-240V ~50/60Hz
Material: aluminium

E27 <150W
Diameter: 7 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
black	**1005214**
1xE27	
grey	**1005215**

PARA DOME
Shade



IP 20

H: 20.6 cm
Diameter: 30.8 cm
Material: aluminium

Options	Prod. no.
black	**1005216**
grey	**1005217**


PARA DOME
Shade



IP 20

H: 20 cm
Diameter: 31.5 cm
Material: polycarbonate (PC)

Options	Prod. no.
transparent	**1005218**

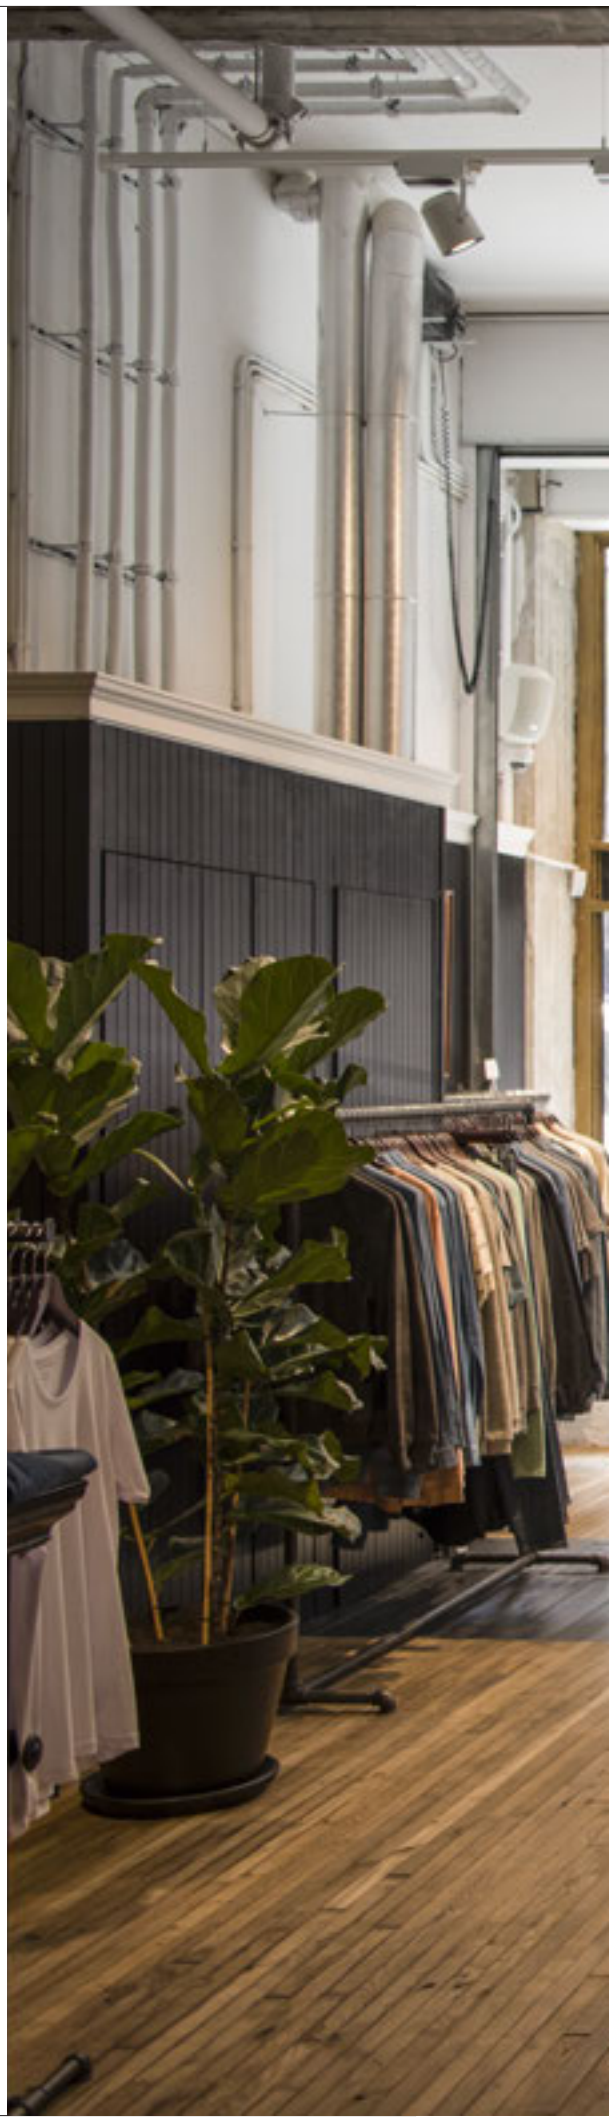


1005214 176
1005218 176



165359 179



1000827 + 1000918 179


PARA 380
PD, E27







SOCKET INSIDE <20 W



IP 20 | 150

220-240V ~50/60Hz
Material: aluminium

E27 <20W

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h



Prod. no. 1005302

Options	Prod. no.
1xE27	
black	**165359**
1xE27	
aluminium	**165358**


PARA FLAC
PD/CL, DALI







12800lm
INSIDE CRI 80
4000K



Dali | IP 65 | 90° | 28 | L70B50 | 150° | 25 | LED

220-240V ~50/60Hz | 1600mA
Total wattage: 104W
Material: aluminium/polycarbonate (PC)

- This product is supplied without a chain and can be hung with standard chains
- Open cable end

1003107	12800lm 4000K	A→G A G E

- Connection box IP68, 3-pole **Prod. no. 228730**
- Reflector **Prod. no. 1000918**
- Reflector **Prod. no. 1001691**
- Reflector cover **Prod. no. 1001692**

Options	Prod. no.
12800lm | 4000K | CRI80	
black	**1003107**


PARA FLAC
PD/CL







12800lm
INSIDE CRI 80
4000K



IP 65 | 90° | 28 | L70B50 | 150° | 25 | LED

220-240V ~50/60Hz | 1600mA
Total wattage: 100W
Material: aluminium/polycarbonate (PC)

- This product is supplied without a chain and can be hung with standard chains
- Open cable end

1000827	12800lm 4000K	A→G A G E


- Connection box IP68, 3-pole **Prod. no. 228730**
- Reflector **Prod. no. 1000918**
- Reflector **Prod. no. 1001691**
- Reflector cover **Prod. no. 1001692**

Options	Prod. no.
12800lm | 4000K | CRI80	
black	**1000827**


SURPRISINGLY VERSATILE.

WALL LIGHTS ADD INDIVIDUAL LIGHT SPOTS.


An eye-catching wall feature and a genuine highlight for the room: wall lights are an ideal, space-saving way to create spots of light. And there is something to suit every taste in the large range of designs and colors available.

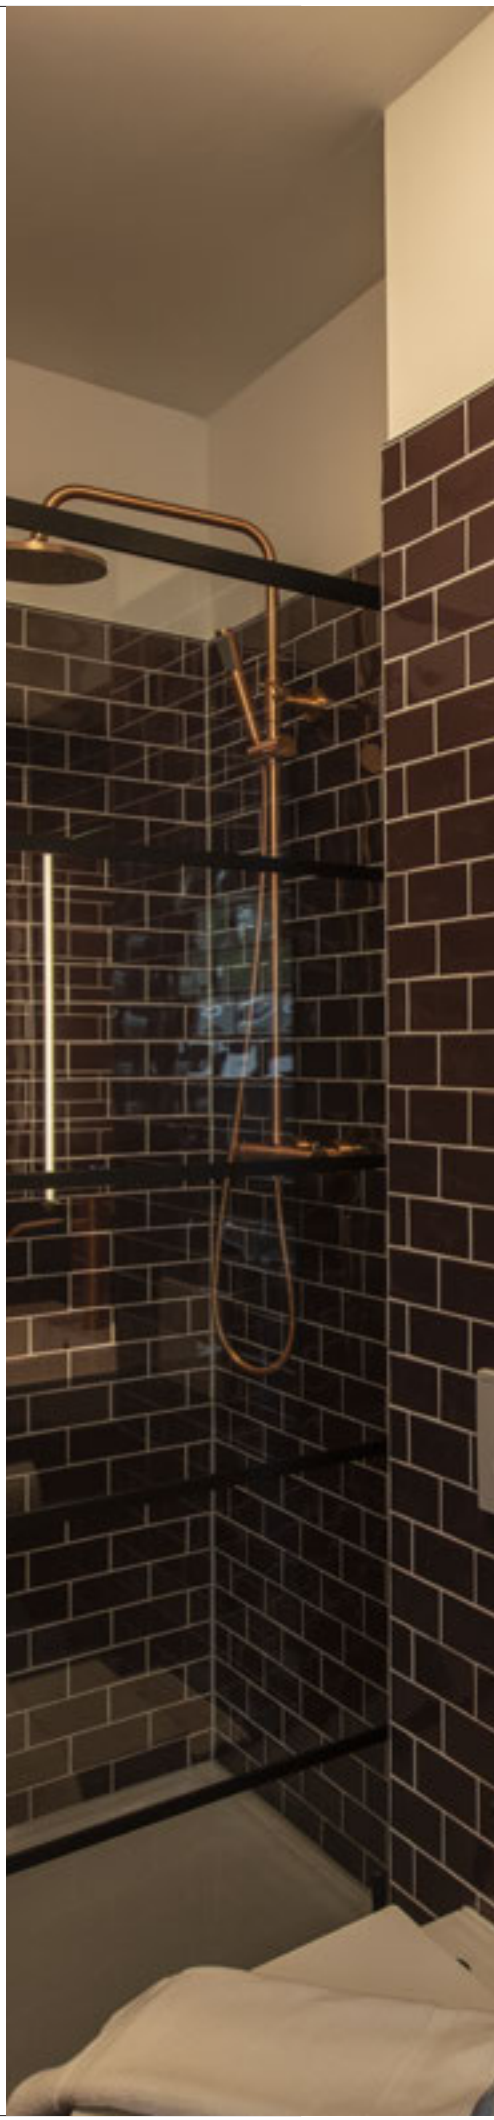


1004729 233

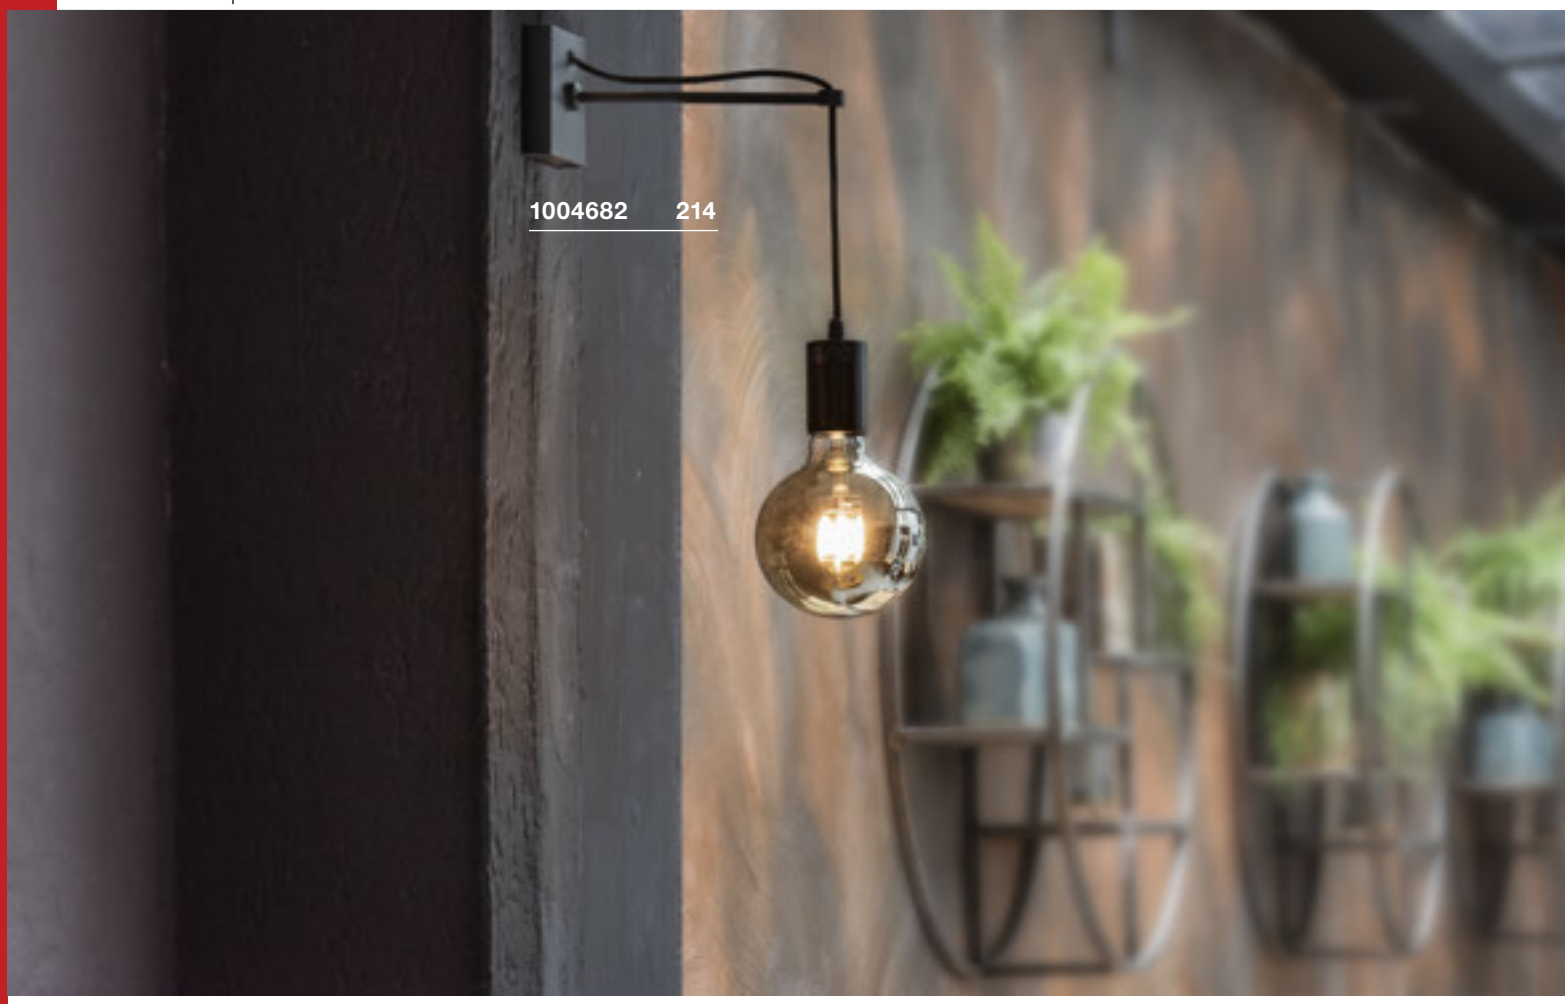

WALL LIGHTS


185

185

185

185

186

186

186

187

187

187

187

188

189

190

190

190

191

193

193

193

194

194

194

196

196

197

197

198

198

199

199

200

201

201

201

202

202

203


203

204



You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps can be found in the chapter 'Lamps', from page 808


1004969 + 1004660 185
1004657 + 1004663 185

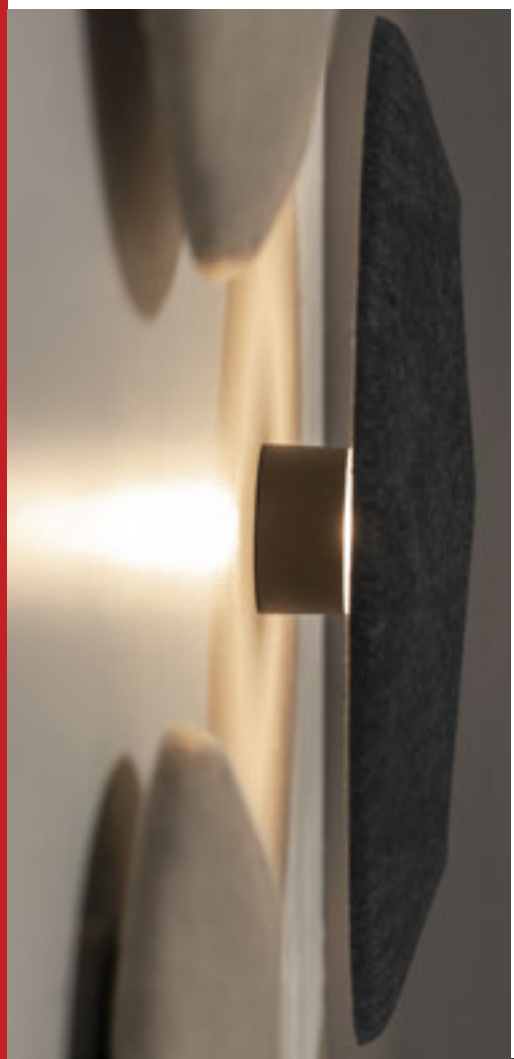



MANA BASE
WL, round, PHASE








800lm / 820lm

LED INSIDE

CRI 90

2700K / 3000K



IP 20 L70B50 68

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)

		A→G
1004657	800/820lm 2700/3000K	A G F


Options	Prod. no.
800/820lm | 2700/3000K | CRI90	
anthracite	**1004657**

MANA BASE
round









Material: aluminium/polycarbonate (PC)

- Non-illuminated base for round MANA shades

Options	Prod. no.
anthracite	**1004969**

MANA 40
Shade, round



IP 20

H: 6 cm
Diameter: 40 cm
Material: felt/aluminium

Options	Prod. no.
beige	**1004660**
grey	**1004661**

MANA 60
Shade, round



IP 20

H: 6 cm
Diameter: 60 cm
Material: felt/aluminium

Options	Prod. no.
beige	**1004662**
grey	**1004663**

MANA
WL, base, PHASE






520lm - 520lm

LED INSIDE

CRI 90

2000K - 3000K



C | IP 20 | 30 000 Hours | LED L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 8.3W
Material: aluminium/steel

		A→G
1000613	520lm 2000-3000K	F

Options	Prod. no.
520lm | 2000-3000K | CRI90	
white	**1000613**

MANA
Shade



IP 20

L: 12 cm H: 10 cm T: 9.0 cm
Material: wood/aluminium

- Suitable only with 1000613

Options	Prod. no.
wood | grey/brown	**1000616**
aluminium | white	**1000618**
aluminium | aluminium	**1000619**

MANA
Shade




IP 20


W: 13.6 cm H: 10 cm D: 9.5 cm
Material: plaster/steel

- Suitable only with 1000613

Options	Prod. no.
white	**1000824**

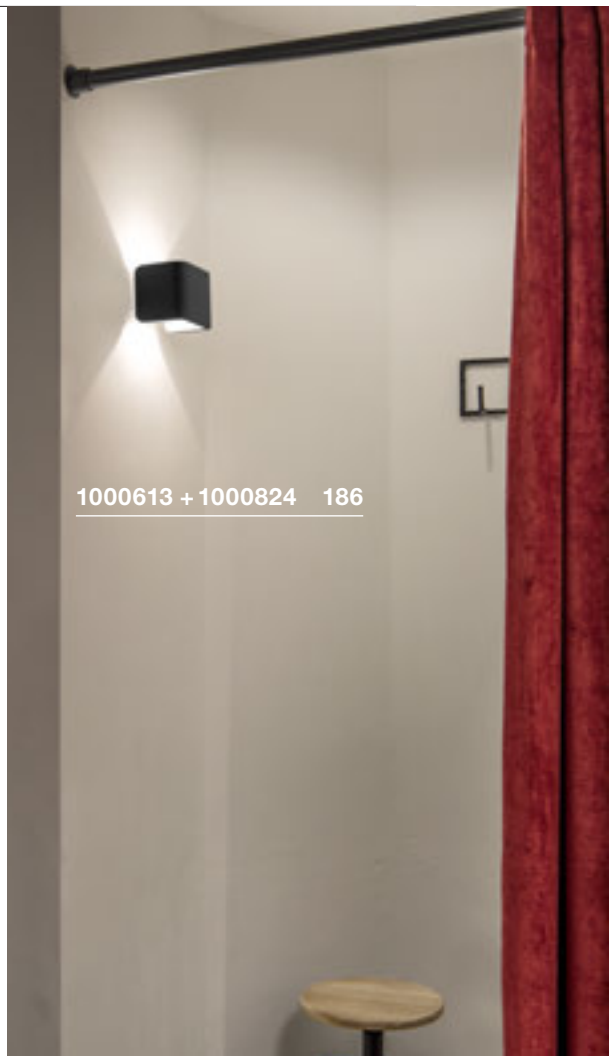

1000613 + 1000824 186

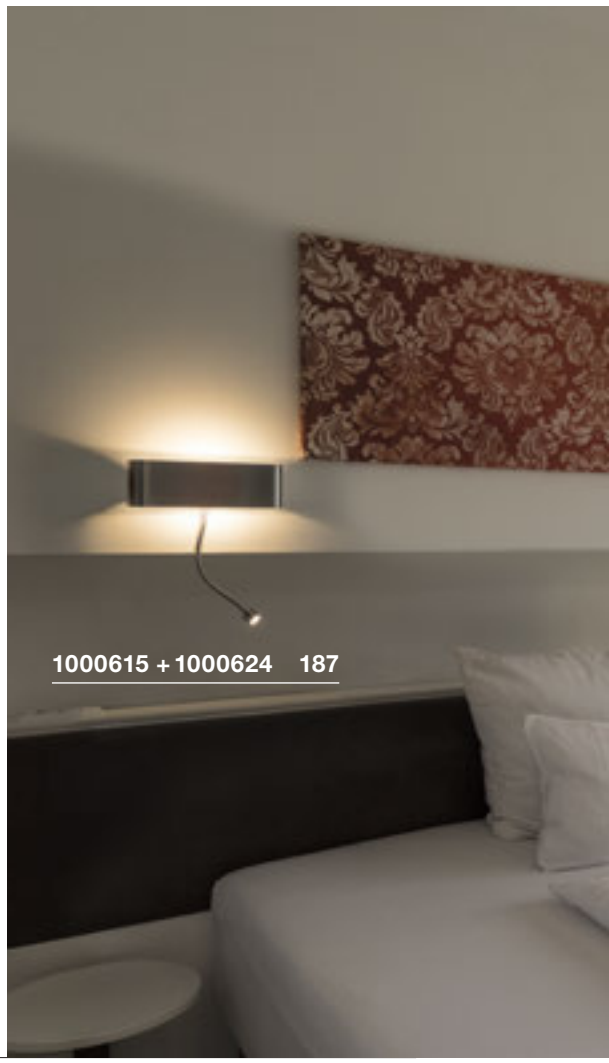


1000615 + 1000624 187

MANA
WL, base, PHASE





700lm - 700lm
2000K - 3000K
CRI 90



IP 20 L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/steel

1000614	700lm 2000-3000K	A→G A↑G F

Options	Prod. no.
700lm | 2000-3000K | CRI90	
white	**1000614**


MANA
WL, base







730lm
3000K
CRI 80



IP 20 30° 30° L70B50

220-240V ~50/60Hz | 350/500mA
Total wattage: 11W
Material: aluminium/steel

- Spot can be switched separately

Indirect	650lm 3000K	A→G A↑G E
Spot	80lm 3000K	A↑G G

Options	Prod. no.
Indirect: 650lm | 3000K | CRI80 Spot: 80lm | 3000K | CRI80	
white/chrome	**1000615**

MANA
Shade



IP 20

L: 29 cm H: 9.5 cm D: 7.0 cm
Material: wood / aluminium

- Suitable only with 1000614/1000615

Options	Prod. no.
wood | grey/brown	**1000621**
aluminium | white	**1000623**
aluminium | aluminium	**1000624**

MANA
Shade

IP 20

W: 30.9 cm H: 9.5 cm D: 7.4 cm
Material: plaster/steel


- Suitable only with 1000614/1000615


Options	Prod. no.
white	**1000825**


OCULUS UP/DOWN
WL, PHASE











220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium/glass

- Additional frosted lens included

Up/Down	22-555lm 2000-3000K	A→G A↑G F

Options	Prod. no.
Up: 22-555lm | 2000-3000K | CRI90 Down: 22-555lm | 2000-3000K | CRI90 ■ black	**1004670**
Up: 22-555lm | 2000-3000K | CRI90 Down: 22-555lm | 2000-3000K | CRI90 □ white	**1004671**









SUPROS 78 UP/DOWN
WL, PHASE














220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium


Up/Down	700lm 3000K	A→G E

Lens 20°
Prod. no. 116302

Lens 40°
Prod. no. 116304

Options	Prod. no.
Up: 700lm | 3000K | CRI80 Down: 700lm | 3000K | CRI80 ■ black	**116340**
Up: 700lm | 3000K | CRI80 Down: 700lm | 3000K | CRI80 □ white	**116341**


PLASTRA
WL, cube, QT14







SOCKET INSIDE <42 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel


G9 <42W

LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no. 1005286

Options	Prod. no.
1xG9	
☐ white	**148018**


PLASTRA
WL, cubes







SOCKET INSIDE 15 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel

G9 15W
Diameter: 7 cm L: 4 cm


LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no. 1005286

Options	Prod. no.
2xG9	
☐ white	**1004733**





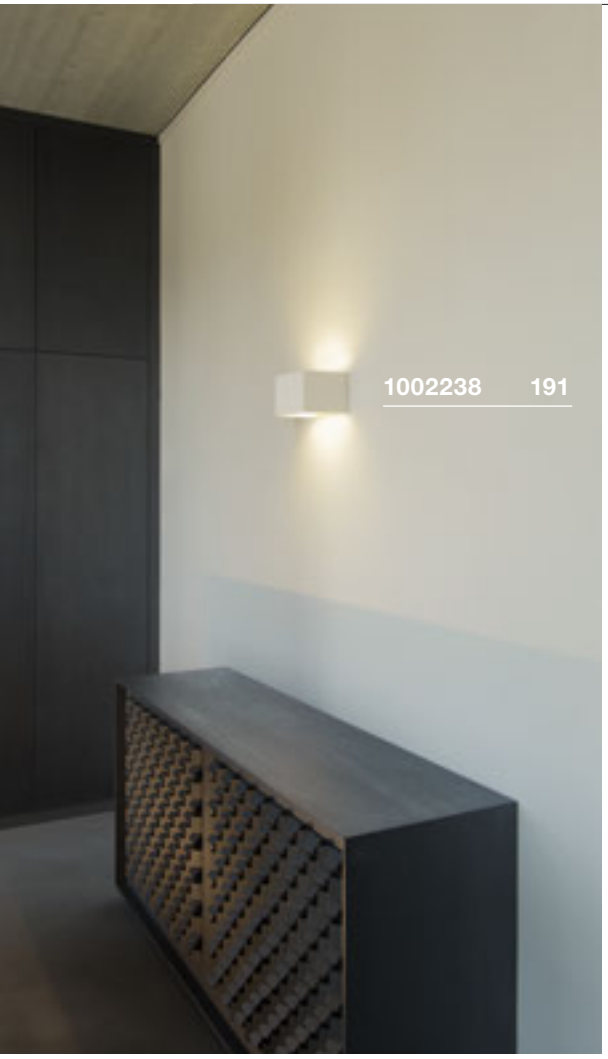




PLASTRA
WL, rectangular, QT-DE12







SOCKET INSIDE <20 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel

R7s 118mm <20W

LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h

Prod. no. 1005288

Options	Prod. no.
1xR7s 118mm	
white	**1002238**


PLASTRA
WL, E14







SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel

E14 <40W

C35 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no. 1005285

Options	Prod. no.
1xE14	
white	**148010**

148060 193

148091 193

1004732 193


PLASTRA
WL, semicircular







SOCKET INSIDE — 20 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel

R7s 118mm 20W
Diameter: 2 cm L: 11.8 cm

LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h

Prod. no. 1005288


Options	Prod. no.
1xR7s 118mm	
white	**1004732**

PLASTRA
CW, round





LED INSIDE — 375lm | 3000K — CRI 80



IP 20 L70B50

100-240V ~50/60Hz | 12V
Total wattage: 6.5W
Material: plaster/steel

		A→G
148091	375lm 3000K	A G F

Options	Prod. no.
375lm | 3000K | CRI80	
white	**148091**


PLASTRA
WL, QPAR51







SOCKET INSIDE — <35 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel

GU10 <35W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
2xGU10	
white	**148060**

PLASTRA 101
WL, E14





SOCKET INSIDE <40 W



IP 20

230V ~50Hz
Material: plaster/steel

E14 <40W
Diameter: 4.5 cm L: 11 cm

LED E14 | 4.2W | 320°
2700K | 370lm | EEK=F
4kWh/1000h

Prod. no. 1005284


Options	Prod. no.
1xE14	
white	**148013**

PLASTRA
WL, curve, QT-DE12





SOCKET INSIDE <100 W



IP 20

230V ~50Hz
Material: plaster/steel

R7s 78mm <100W


LED R7s | 9W | 330°
3000K | 1050lm | EEK=E
9kWh/1000h

Prod. no. 1005287

Options	Prod. no.
1xR7s 78mm	
white	**148012**

PLASTRA 104
WL, QT14

SOCKET INSIDE <42 W




IP 20

220-240V ~50/60Hz
Material: plaster/steel

G9 <42W


Options	Prod. no.
1xG9	
white	**148016**

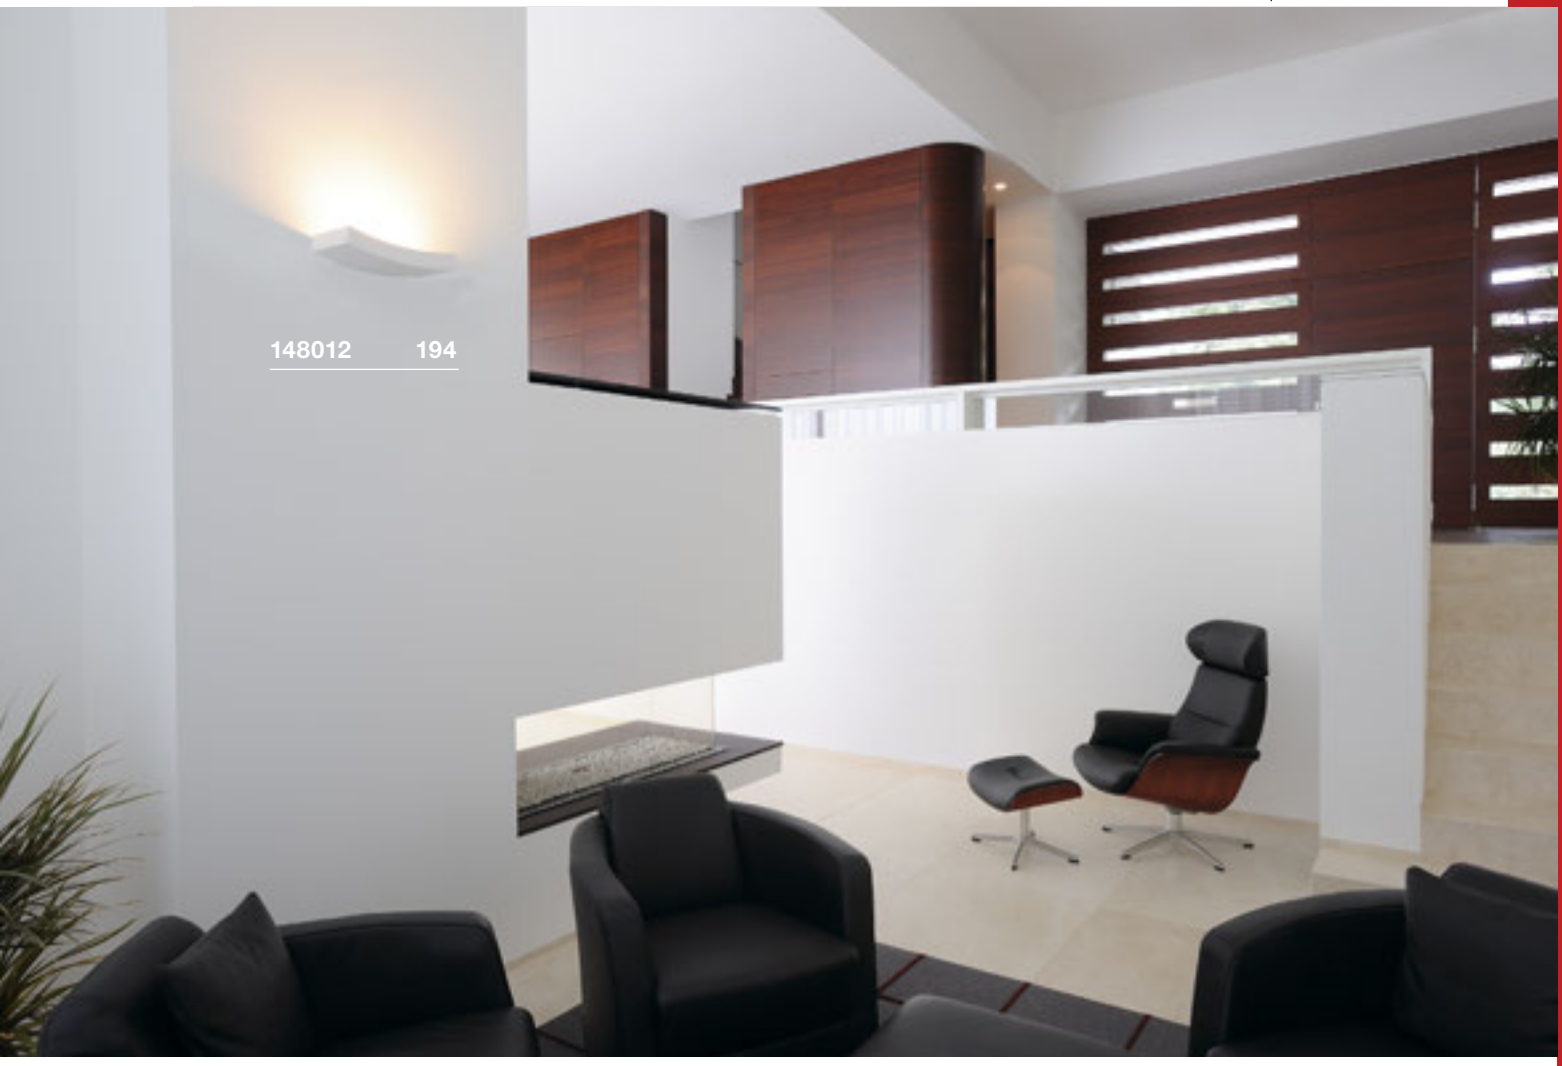

148012 194




148013 194

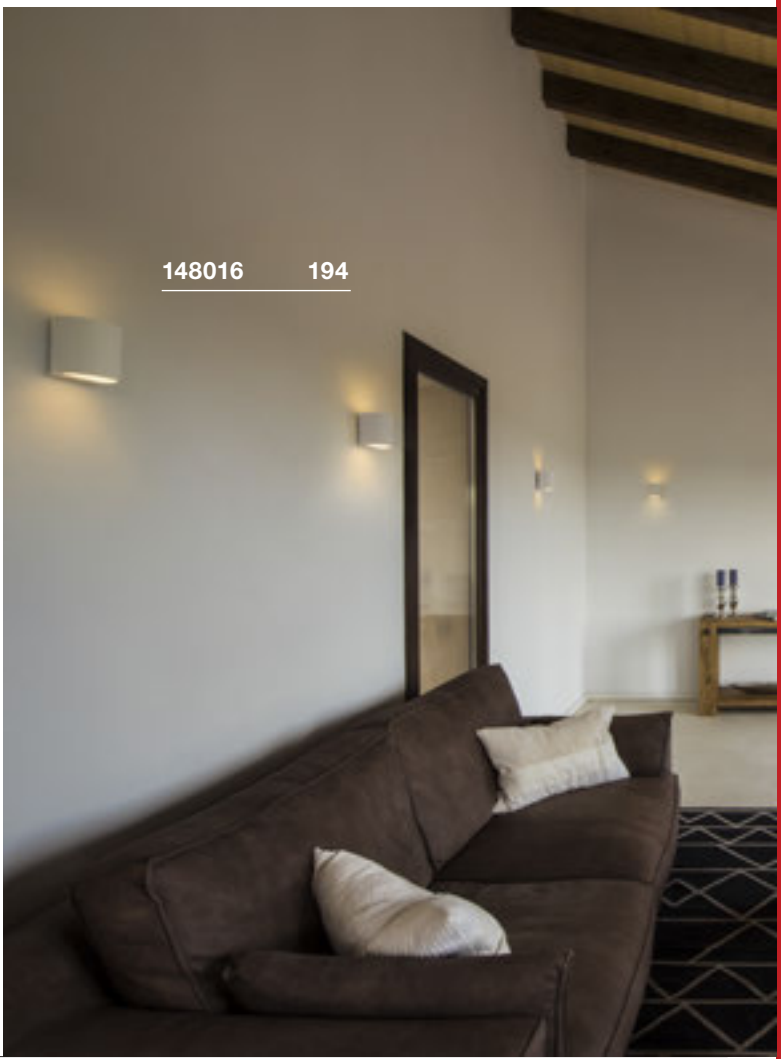


148016 194

LOGS IN
WL



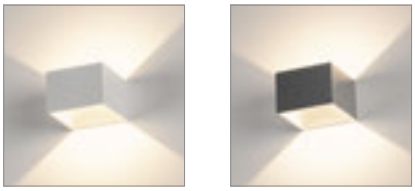

300|470lm
INSIDE
CRI 90
3000K



IP 20 L70B50


100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium

151320, 151321, 151325	300lm | 470lm 3000K	E


Options	Prod. no.
300lm | 3000K | CRI90	
black/gold	**151320**
470lm | 3000K | CRI90	
white	**151321**
470lm | 3000K | CRI90	
aluminium/white	**151325**

LOGS IN
WL, PHASE



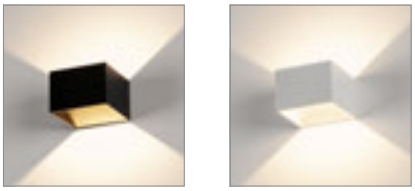

430|690lm - 430|690lm
INSIDE
CRI 90
2000K - 3000K





IP 20 L70B50

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium


1000638, 1000639, 1000640	430lm | 690lm 2000-3000K	F

Options	Prod. no.
430lm | 2000-3000K | CRI90	
black/gold	**1000638**
690lm | 2000-3000K | CRI90	
white	**1000639**
690lm | 2000-3000K | CRI90	
aluminium/white	**1000640**

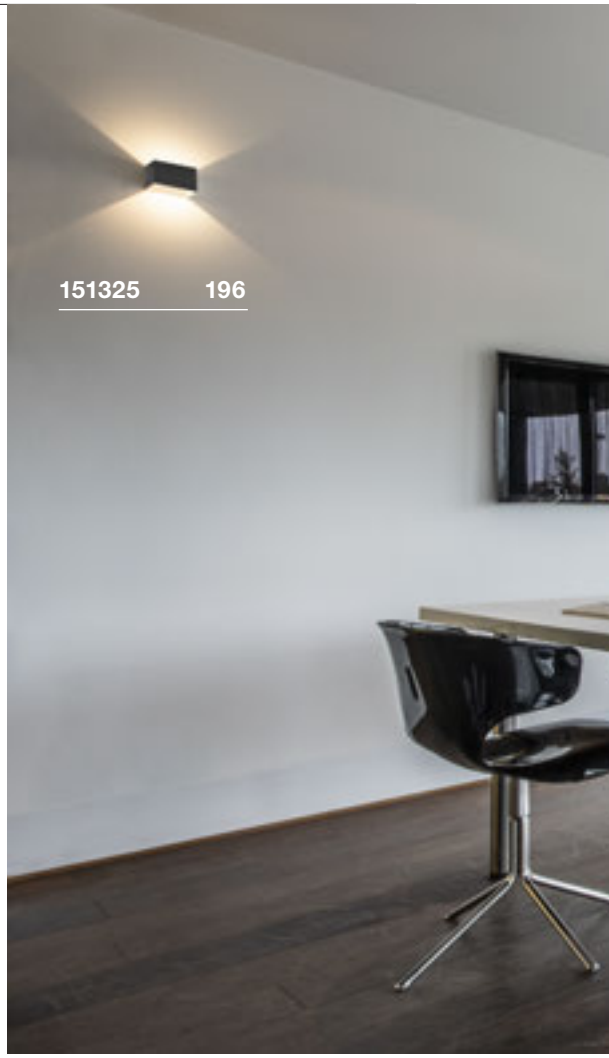


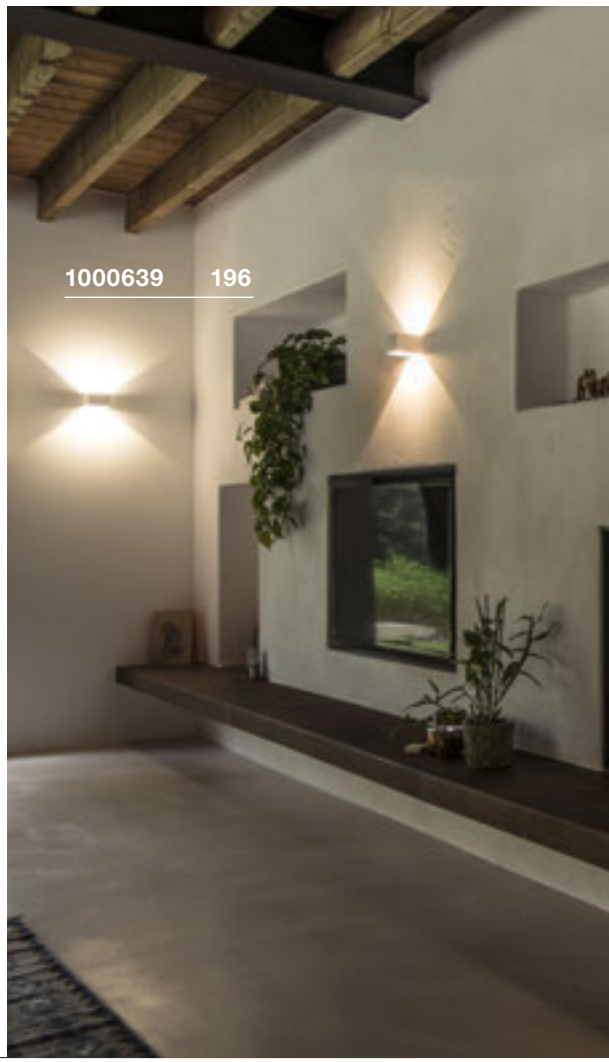



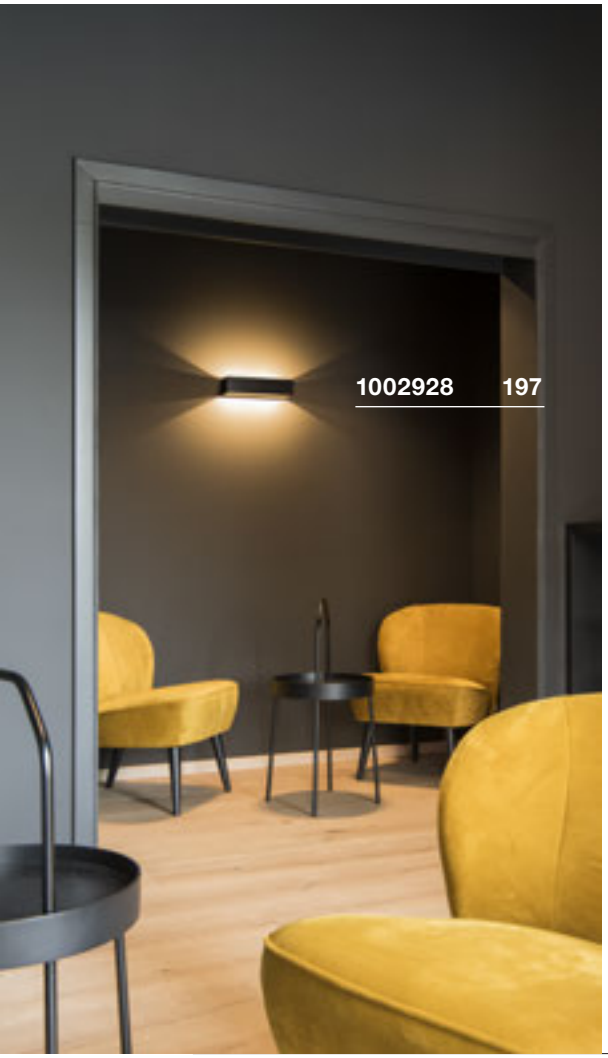

LOGS IN L
WL, PHASE

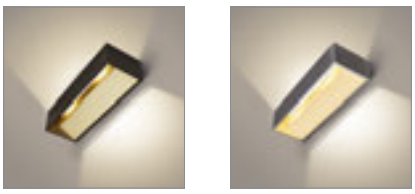


1100|1600lm

LED INSIDE

CRI 90

3000K



C,L | IP 20 | 30 000 Hours | LED L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium


1002842, 1002843, 1002844	1100lm | 1600lm 3000K	A→G: A↑G E

Options	Prod. no.
1100lm | 3000K | CRI90	
black/gold	**1002842**
1600lm | 3000K | CRI90	
white	**1002844**
1600lm | 3000K | CRI90	
aluminium/white	**1002843**

LOGS IN L
WL, PHASE

DIM TO WARM



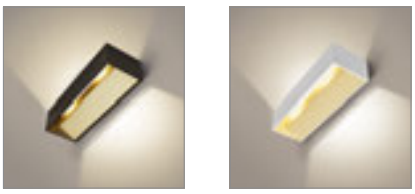


1000|1390lm - 1000|1390lm

LED INSIDE

CRI 90

2000K - 3000K



C,L | IP 20 | 30 000 Hours | LED L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium

1002928, 1002929, 1002930	1000lm | 1390lm 2000-3000K	A→G: A↑G F

Options	Prod. no.
1000lm | 2000-3000K | CRI90	
black/gold	**1002928**
1390lm | 2000-3000K | CRI90	
white	**1002929**
1390lm | 2000-3000K | CRI90	
aluminium/white	**1002930**

QUAD FRAME 14
WL



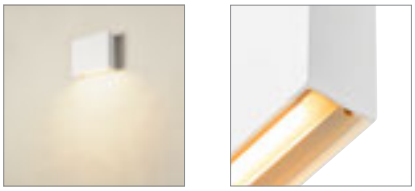


130lm / 165lm

LED INSIDE

2700K / 3000K

CRI 90



95° L70B50 10

100-277V ~50/60Hz | 350mA
Total wattage: 4W
Material: aluminium

1003467	130/165lm 2700/3000K	A→G A G F

Options	Prod. no.
130/165lm | 2700/3000K | CRI90	
white	**1003467**

QUAD FRAME 19
WL






540lm / 640lm

LED INSIDE

2700K / 3000K

CRI 90



100° L70B50 10

100-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

1003468	540/640lm 2700/3000K	A→G A G F

Options	Prod. no.
540/640lm | 2700/3000K | CRI90	
white	**1003468**





1000422 **199**






SHELL 15
WL, PHASE







1400lm
INSIDE CRI 80
3000K



C IP 20 IK02 120° 50 000 Hours L70B50 LED

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/acrylic

1000422	1400lm 3000K	A→G A↑G D

Options	Prod. no.
1400lm | 3000K | CRI80	
white	**1000422**


SHELL 30
WL, PHASE







5600lm
INSIDE CRI 80
3000K



C IP 20 IK02 120° 50 000 Hours L70B50 LED

220-240V ~50/60Hz | 700mA
Total wattage: 54W
Material: aluminium/acrylic

1000423	5600lm 3000K	A→G A↑G D

Options	Prod. no.
5600lm | 3000K | CRI80	
white	**1000423**


ASSO 70
WL







440lm
|
LED INSIDE
|
3000K
CRI 90



IP 20 L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/steel

151311, 151315	440lm 3000K	A→G A↑G E

Options	Prod. no.
440lm | 3000K | CRI90	
white	**151311**
440lm | 3000K | CRI90	
aluminium/white	**151315**






ASSO
WL, PHASE





700lm - 700lm
2000K - 3000K
CRI 90



IP 20 L70B50

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/steel

1000636, 1000637	700lm 2000-3000K	A→G F

Options	Prod. no.
700lm | 2000-3000K | CRI90	
white	**1000636**
700lm | 2000-3000K | CRI90	
aluminium/white	**1000637**


ASSO 300
WL, PHASE







975lm
3000K
CRI 80



IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/steel

151271, 151275	975lm 3000K	A→G E


Options	Prod. no.
975lm | 3000K | CRI80	
white	**151271**
975lm | 3000K | CRI80	
aluminium/white	**151275**

ASSO 300
WL, PHASE





1340lm - 1340lm
2000K - 3000K
CRI 90



IP 20 L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/steel

1000634, 1000635	1340lm 2000-3000K	A→G F


Options	Prod. no.
1340lm | 2000-3000K | CRI90	
white	**1000634**
1340lm | 2000-3000K | CRI90	
aluminium/white	**1000635**

OSSA 180
WL, QT-DE12



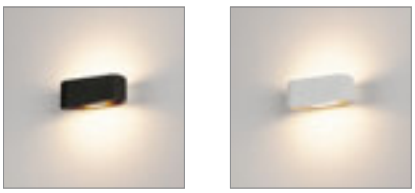

SOCKET INSIDE <100 W



IP 20 UGR 23

230V ~50Hz
Material: aluminium/steel

R7s 78mm <100W


LED R7s | 9W | 330°
3000K | 1050lm | EEK=E
9kWh/1000h

Prod. no. 1005287


Options	Prod. no.
1xR7s 78mm	
black	**151450**
1xR7s 78mm	
white	**151451**
1xR7s 78mm	
aluminium	**151456**

OSSA 300
WL, QT-DE12



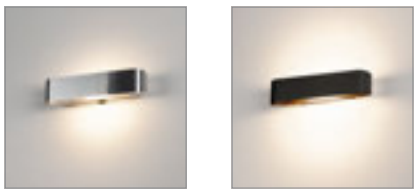

SOCKET INSIDE <120 W



IP 20 UGR 23

230V ~50Hz
Material: aluminium/steel

R7s 118mm <120W


LED R7s | 15W | 330°
3000K | 1960lm | EEK=E
15kWh/1000h


Prod. no. 1005288

Options	Prod. no.
1xR7s 118mm	
black	**151410**
1xR7s 118mm	
white	**151411**
1xR7s 118mm	
aluminium	**151416**






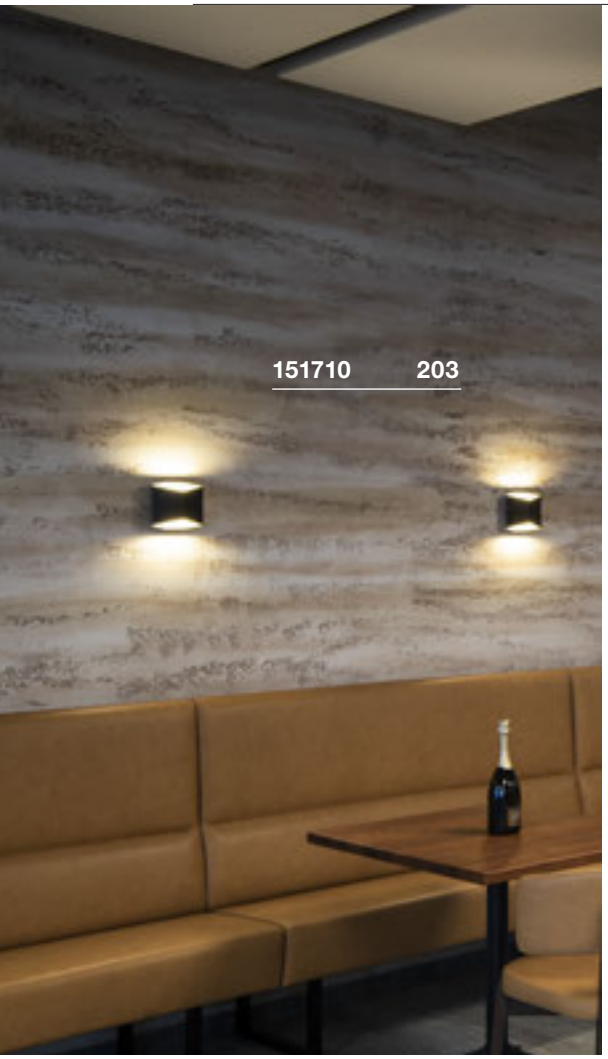


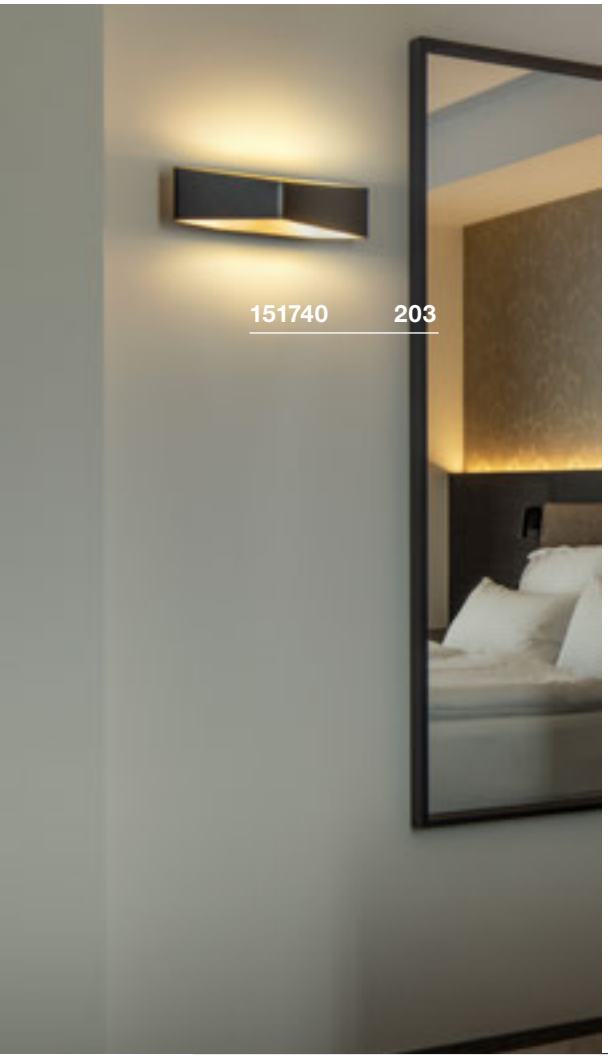

CARISO
WL, PHASE

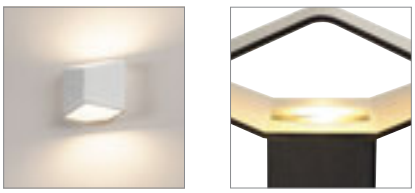

250lm 560lm
INSIDE
CRI 80
2700K 3000K



IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/steel

151710, 151711	250lm | 560lm 2700 3000K	A→G A G D


Options	Prod. no.
250lm | 2700K | CRI80	
black/gold	**151710**
560lm | 3000K | CRI80	
white	**151711**

CARISO
WL, PHASE





580lm - 580|- 1030lm
INSIDE
CRI 90
1700K - 2700|- 3000K



IP 20 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/steel

151740, 151741	580lm | 1030lm 1700-2700 2000-3000K	A→G A G F

Options	Prod. no.
580lm | 1700-2700K | CRI90	
black/gold	**151740**
1030lm | 2000-3000K | CRI90	
white	**151741**

CHROMBO
WL, PHASE







590lm
I
LED INSIDE — CRI 80
I
3000K


C | IP 20 | 120° | 25 000 Hours L70B50 | LED


220-240V ~50/60Hz | 350mA
Total wattage: 11W
Material: steel/glass

1003316, 1003317	590lm 3000K	A→G E

Options	Prod. no.
590lm | 3000K | CRI80	
glossy white	**1003316**
590lm | 3000K | CRI80	
brushed grey	**1003317**



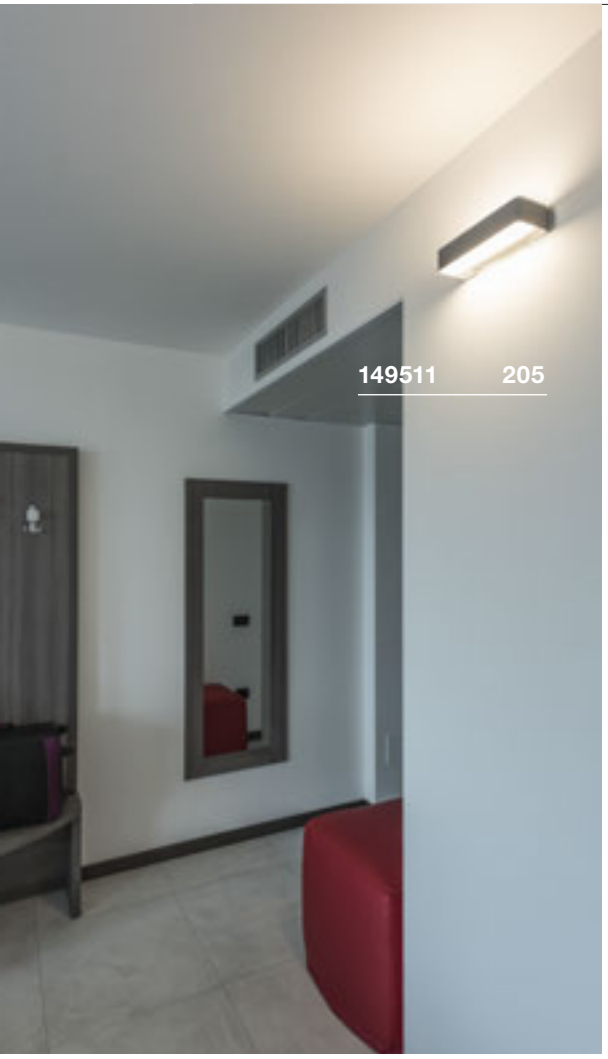


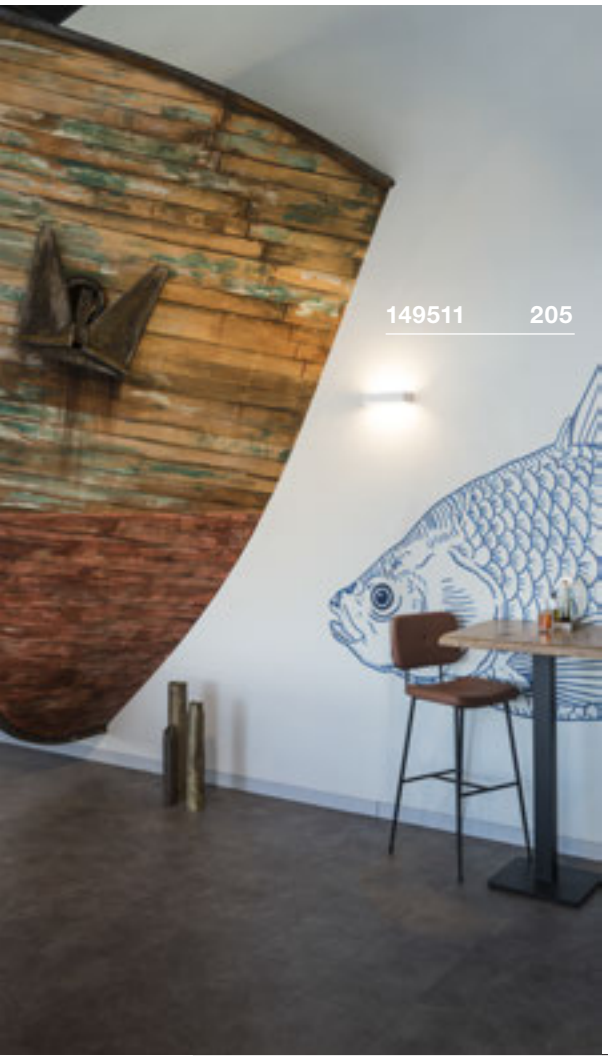

WL 149
WL, PHASE



1050lm
LED INSIDE
3000K
CRI 80



C IP 20 L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: steel/glass


		A→G
149511	1050lm 3000K	A G D

Options	Prod. no.
1050lm | 3000K | CRI80	
white	**149511**

WL 149
WL, QT-DE12



SOCKET INSIDE <60 W



IP 20

220-240V ~50/60Hz
Material: steel/glass

R7s 78mm <60W

LED R7s | 9W | 330°
3000K | 1050lm | EEK=E
9kWh/1000h

Prod. no. 1005287

Options	Prod. no.
R7s 78mm	
white	**149471**


DIRETO 60
WL, PHASE



1180lm / 1250lm

INSIDE CRI 90

2700K / 3000K




C IP 20 180° 180° 30 000 Hours L70B50 LED

220-240V ~50/60Hz | 500mA
Total wattage: 14W
Material: aluminium

Up/Down	590/625lm 2700/3000K	A→G A G E

Options	Prod. no.
Up: 590/625lm | 2700/3000K | CRI90 Down: 590/625lm | 2700/3000K | CRI90	
■ black	**1004740**
Up: 590/625lm | 2700/3000K | CRI90 Down: 590/625lm | 2700/3000K | CRI90	
□ white	**1004741**


DIRETO 90
WL, PHASE

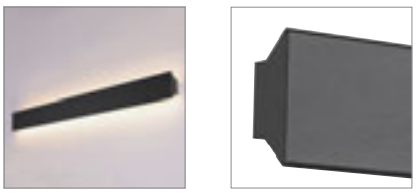

1680lm / 1760lm

INSIDE CRI 90

2700K / 3000K




C IP 20 180° 180° 30 000 Hours L70B50 LED

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium

Up/Down	840/880lm 2700/3000K	A→G A G E


Options	Prod. no.
Up: 840/880lm | 2700/3000K | CRI90 Down: 840/880lm | 2700/3000K | CRI90	
■ black	**1004742**
Up: 840/880lm | 2700/3000K | CRI90 Down: 840/880lm | 2700/3000K | CRI90	
□ white	**1004743**



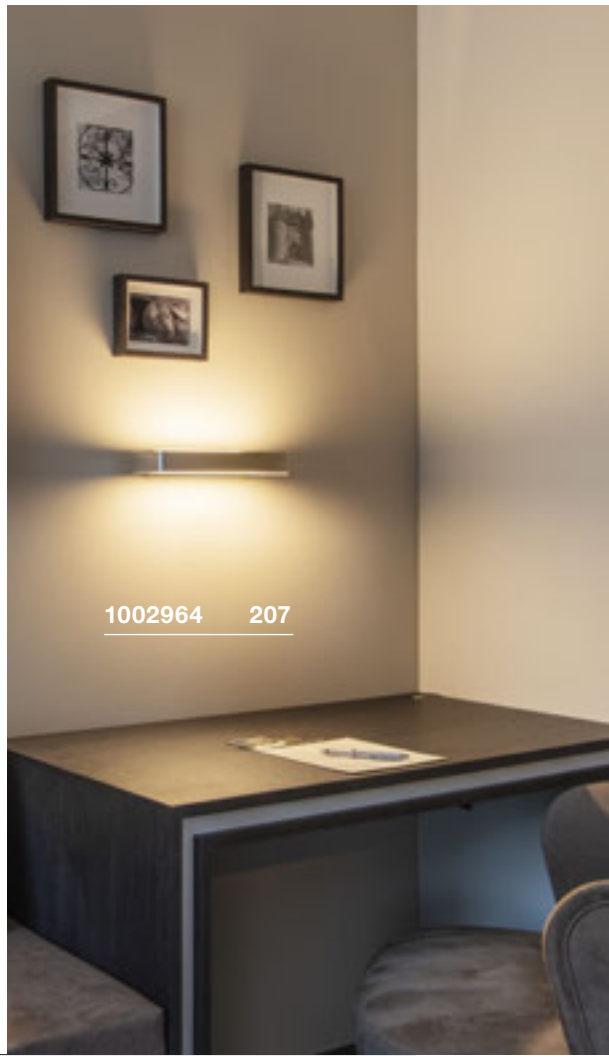


SEDO 7
WL



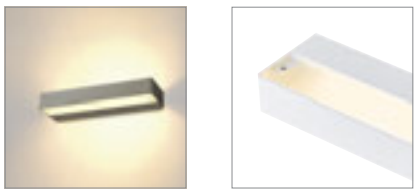

1020lm
INSIDE
CRI 80
3000K



IP 20 L70B50


220-240V ~50/60Hz | 350mA
Total wattage: 11.5W
Material: aluminium/glass

1002962, 1002964	1020lm 3000K	E


Options	Prod. no.
1020lm | 3000K | CRI80	
white	**1002962**
1020lm | 3000K | CRI80	
aluminium	**1002964**

SEDO 14
WL



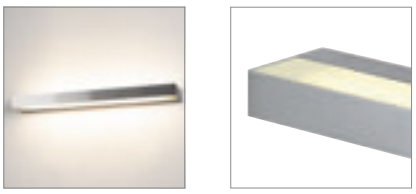

1300lm
INSIDE
CRI 80
3000K



IP 20 L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 16W
Material: aluminium/glass

151781, 151786	1300lm 3000K	E


Options	Prod. no.
1300lm | 3000K | CRI80	
white	**151781**
1300lm | 3000K | CRI80	
aluminium	**151786**

SEDO 21
WL



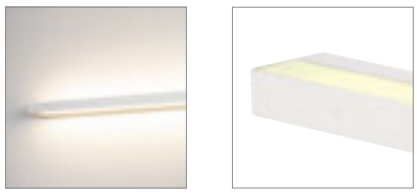

2500lm
INSIDE
CRI 80
3000K



IP 20 L70B50


220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/glass

151791, 151796	2500lm 3000K	F


Options	Prod. no.
2500lm | 3000K | CRI80	
white	**151791**
2500lm | 3000K | CRI80	
aluminium	**151796**

ARLINA 60
WL



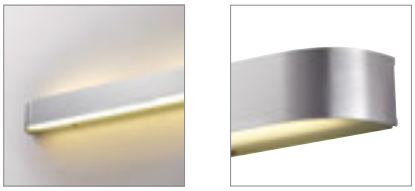

1550lm
INSIDE
3000K
CRI 80



IP 20 L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 23W
Material: aluminium/glass

1002239	1550lm 3000K	A→G A G E


Options	Prod. no.
1550lm | 3000K | CRI80	
aluminium	**1002239**

ARLINA 130
WL



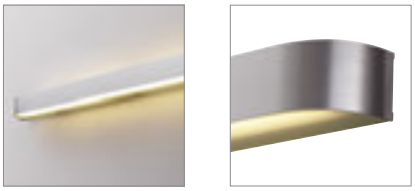

2400lm
INSIDE
3000K
CRI 90



IP 20 L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/glass

1002240	2400lm 3000K	A→G A G E

Options	Prod. no.
2400lm | 3000K | CRI90	
aluminium	**1002240**












NEW FLAT
WL, RGB-W














220-240V ~50/60Hz | 24V
Total wattage: 11.3W
Material: aluminium/acrylic

- Can be controlled with Gateway prod. no. 1002411 or remote control prod. no. 1002994.


		A→G
Up	300lm 3000K	A→G
Down	280lm 3000K	A→G

Options	Prod. no.
Up: RGB-W (300lm | 3000K | CRI>80) Down: RGB-W (280lm | 3000K | CRI>80) white	1003022
Up: RGB-W (300lm | 3000K | CRI>80) Down: RGB-W (280lm | 3000K | CRI>80) aluminium	1003023


ANDREAS
WL, QT-DE12







SOCKET INSIDE <80 W



IP 20


220-240V ~50/60Hz
Material: aluminium/steel

R7s 118mm <80W

LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h

Prod. no. 1005288

Options	Prod. no.
1xR7s 118mm black	**1002927**
1xR7s 118mm white	**1002925**
1xR7s 118mm grey	**1002926**

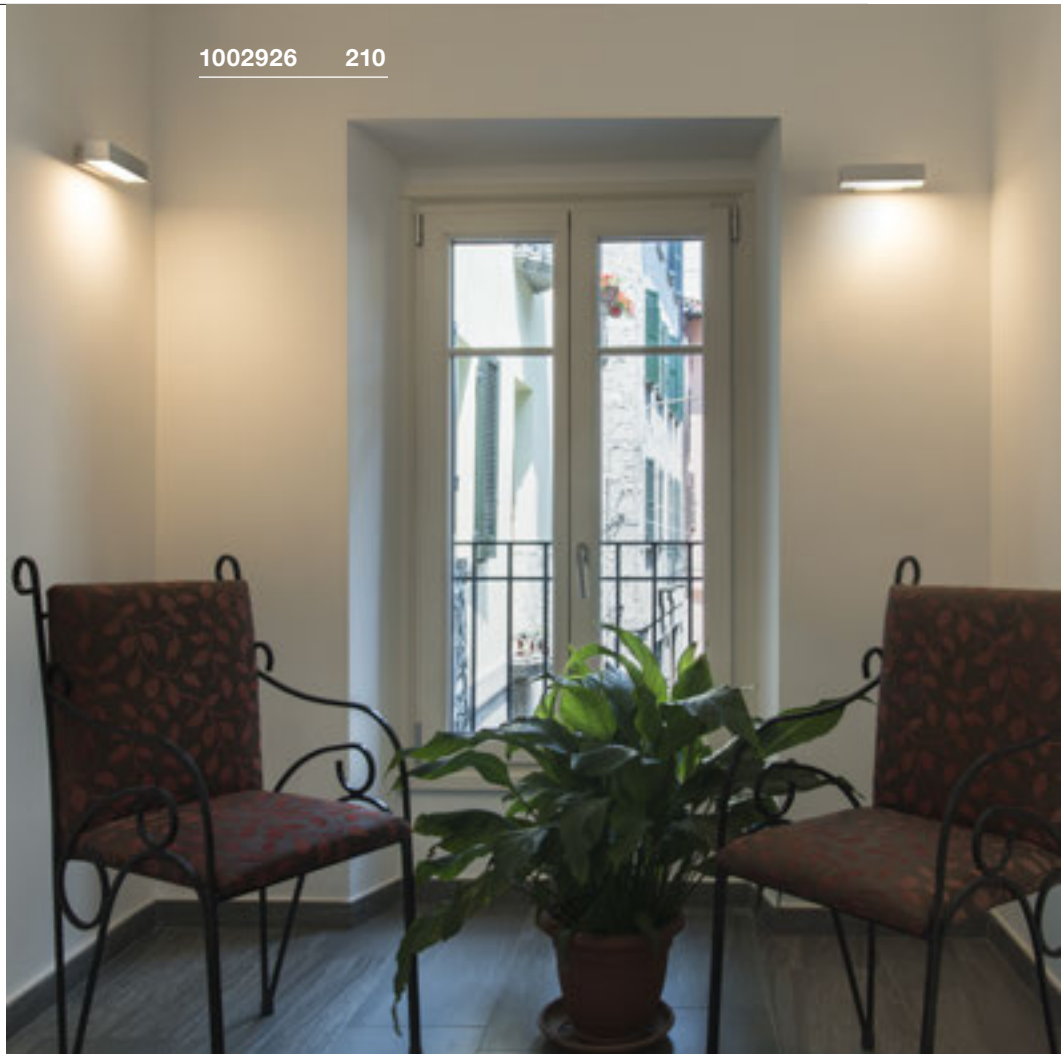





DENA 30
WL, E14







SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: aluminium/glass

E14 <40W
Diameter: 5 cm L: 9.6 cm

LED E14 | 4.2W | 320°
2700K | 370lm | EEK=F
4kWh/1000h


C,L



Prod. no. 1005284


Options	Prod. no.
2xE14	
white/aluminium	**147529**

BASKET
WL, E27





SOCKET INSIDE <60 W



IP 20

230V ~50Hz
Material: aluminium/glass

E27 <60W
Diameter: 5.2 cm L: 15.2 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h



Prod. no. 1005290

Options	Prod. no.
1xE27	
white	**151591**


PURISA
WL, E27







SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: steel/glass

E27 <40W
Diameter: 8 cm L: 15 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h



Prod. no. 1005301


Options	Prod. no.
1xE27	
white	**1002993**

QUADRASS
WL, E27





SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: steel/glass

E27 <40W
Diameter: 6.5 cm L: 18 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301


Options	Prod. no.
1xE27	
■ black	**1003430**
1xE27	
□ white	**1003431**

QUADRASS SPOT
WL, E27





200lm
LED INSIDE CRI 80
3000K
SOCKET INSIDE <40 W



IP 20 25° L70B50 180° 180°

100-240V ~50/60Hz | 700mA
Total wattage: 2W
Material: steel/glass


Spot	200lm 3000K	A→G A↑G F

E27 <40W
Diameter: 6.5 cm L: 18 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
1xE27 200lm | 3000K | CRI80	
■ black/milky	**1003428**
1xE27 200lm | 3000K | CRI80	
□ white/milky	**1003429**

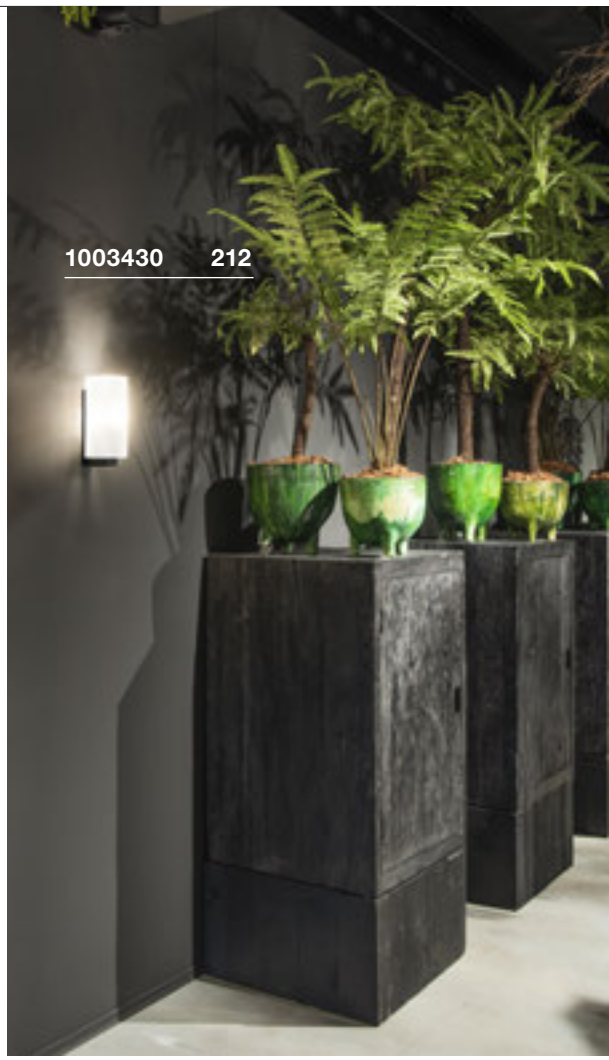








LISENNE
WL, E27



SOCKET INSIDE <23 W



IP 20

220-240V ~50/60Hz
Material: basalt/glass


E27 <23W
Diameter: 5.9 cm L: 15 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005268


Options	Prod. no.
1xE27	
grey/brown	**155752**

FITU
Wall bracket









IP 20

Material: steel


FITU
WL, E27







SOCKET INSIDE <24 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel


E27 <24W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265

Options	Prod. no.
black	**1004682**
white	**1004683**

Options	Prod. no.
1xE27	
black	**1002148**
1xE27	
white	**1002147**
1xE27	
gold	**1002149**

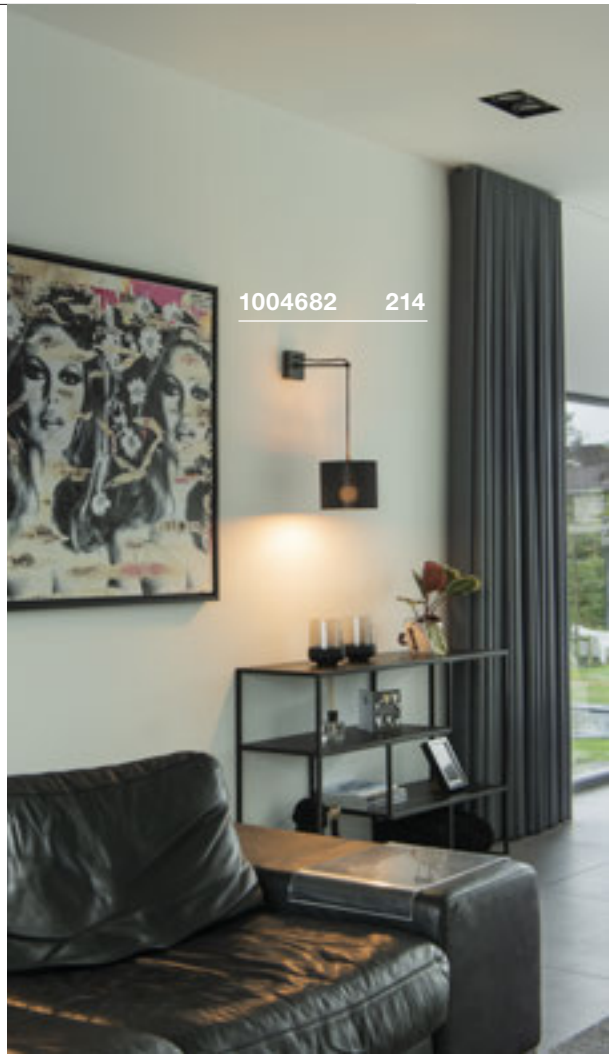





1004738 215


FITU CUBE
WL, E27







SOCKET INSIDE <20 W



IP 20

220-240V ~50/60Hz
Material: steel

E27 <20W
Diameter: 12.5 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=E
8kWh/1000h

C,L

Prod. no. 1005309

Options	Prod. no.
1xE27 ■ black	**1004738**
1xE27 □ white	**1004739**


THEO UP/DOWN
WL, QPAR51







SOCKET INSIDE <50 W



IP 20

230V ~50Hz
Material: aluminium

GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
2xGU10 anthracite	**1000330**
2xGU10 white	**1000327**
2xGU10 aluminium	**1000329**


SOLID CUBE
WL, QT14







SOCKET INSIDE <25 W



IP 20

230V ~50Hz
Material: concrete


G9 <25W


LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h




Prod. no. 1005286

Options	Prod. no.
1xG9 black	**1000911**
1xG9 grey	**1000910**

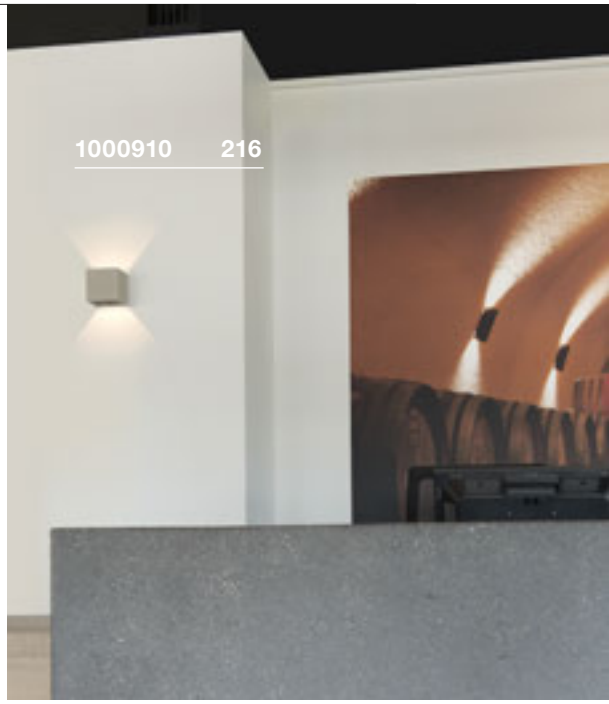

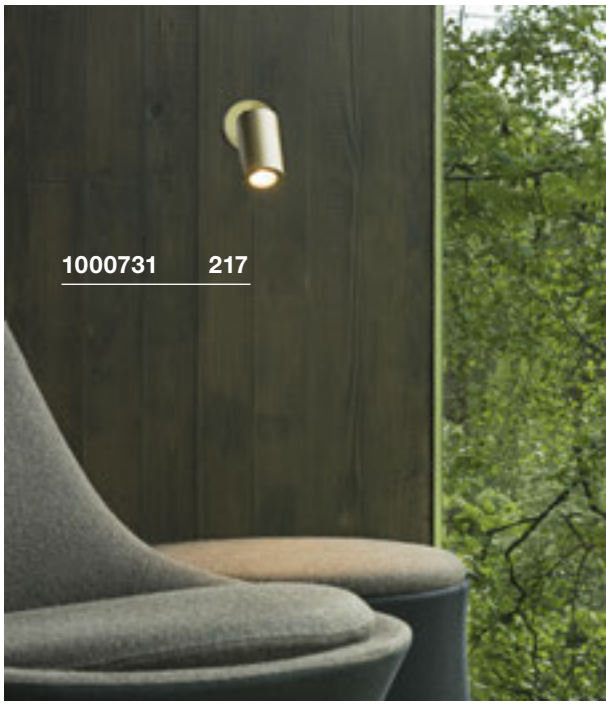


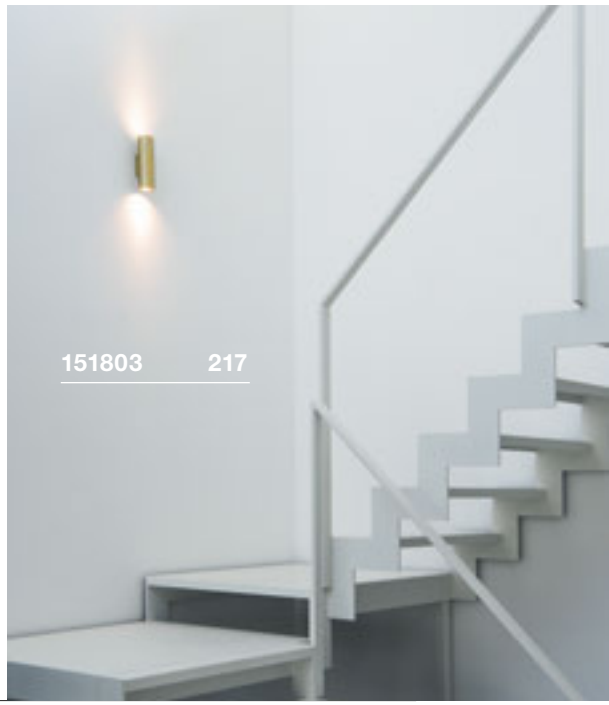


ENOLA B
WL, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 90°

230V ~50Hz
Material: aluminium/steel

GU10 <50W L: 6 cm

LED GU10 51mm | 6W | 36°
2200-2700K | 360lm | EEK=G
6kWh/1000h



Prod. no. 1005273

■ Decorative ring, black
Prod. no. 151840



Options	Prod. no.
1xGU10 ■ black	**1000729**
1xGU10 □ white	**1000730**
1xGU10 ■ gold	**1000731**


ENOLA B
WL, QPAR51







SOCKET INSIDE <50 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

GU10 <50W L: 8.5 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

■ Decorative ring, black
Prod. no. 151840




Options	Prod. no.
2xGU10 ■ black	**151800**
2xGU10 □ white	**151801**
2xGU10 ■ gold	**151803**
2xGU10 ■ grey	**151804**


ASTINA UP/DOWN
WL, QPAR51







SOCKET INSIDE <10 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

GU10 <10W

LED GU10 51mm | 4W | 36°
4000K | 290lm | EEK=F
4kWh/1000h



Prod. no. 1004974

Options	Prod. no.
2xGU10 ■ black	**1002933**
2xGU10 □ white	**1002931**
2xGU10 ■ grey	**1002932**


FENDA
WL, base, E27







SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: steel/plastic

E27 <40W
Diameter: 5 cm L: 20 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h



Prod. no. 1005289

Options	Prod. no.
1xE27	
white	**1001272**

FENDA
Half shade



IP 20

W: 23 cm H: 30.5 cm D: 11.5 cm
Material: textile/steel

- Max. 25W

Options	Prod. no.
black	**1001273**
black/copper	**1001274**
white	**1001275**
beige	**1001276**

FENDA
Diameter 20 cm, round



IP 20


Material: textile/steel

- Max. 40W

Options	Prod. no.
black	**1001451▼**
black/copper	**1001452▼**
white	**1001453▼**
beige	**1001454▼**





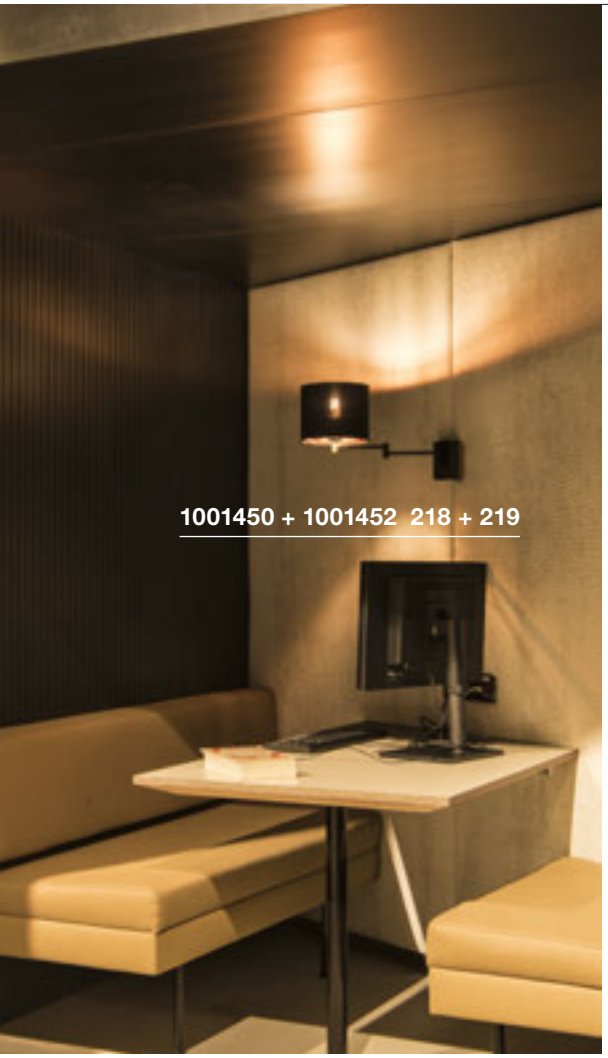

1001450 + 1001452 218 + 219




1001272 + 1001273 218

FENDA
WL, base, E27





SOCKET INSIDE <40 W



IP 20 180°

230V ~50Hz
Material: steel

E27 <40W L: 12 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005303

Options	Prod. no.
1xE27	
■ black	**1001450** ▼
1xE27	
■ chrome	**1001449** ▼


FENDA
WL, E27







SOCKET INSIDE <40 W



IP 20 350° 90°

220-240V ~50/60Hz
Material: steel/aluminium

E27 <40W

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
■ black	**1003034** ▼
1xE27	
□ white	**1003035** ▼

KENKUA SPOT
WL, E27








200lm
|
LED INSIDE
|
3000K
CRI 80

SOCKET INSIDE <40 W



IP 20 | 25° | L70B50 | 180° | 180°

100-240V ~50/60Hz | 700mA
Total wattage: 2W
Material: steel/glass

- Light sources can be switched on/off separately at the light

		A→G
Spot	200lm 3000K	F

E27 <40W
Diameter: 6.5 cm L: 12 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27 200lm | 3000K | CRI80	
chrome/milky	**1002855**


KENKUA
WL, E27







SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: steel/glass


E27 <40W

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h


Prod. no. 1005302

Options	Prod. no.
1xE27	
chrome/milky	**1002856**



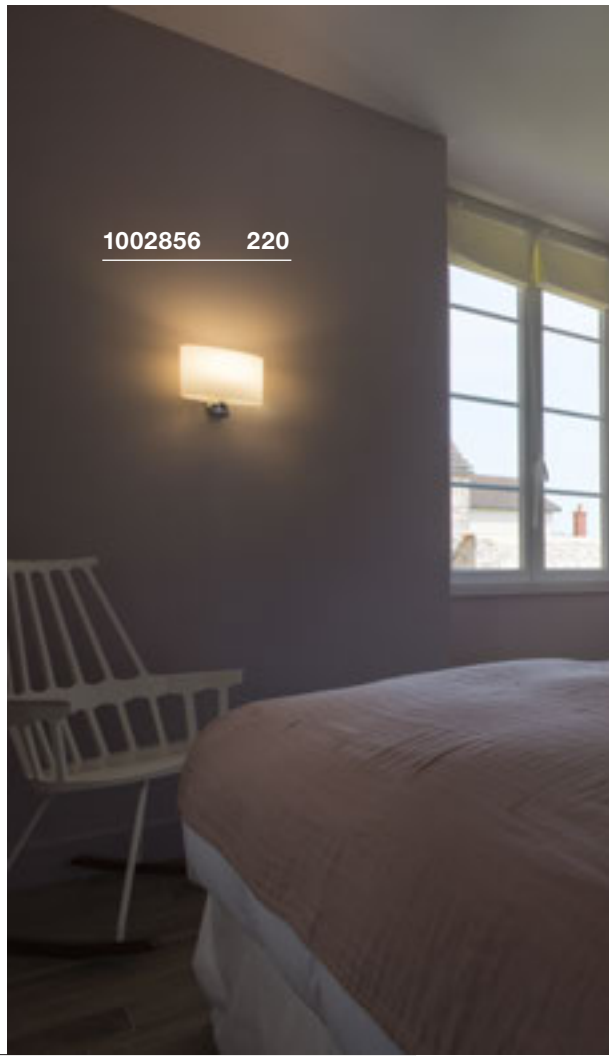



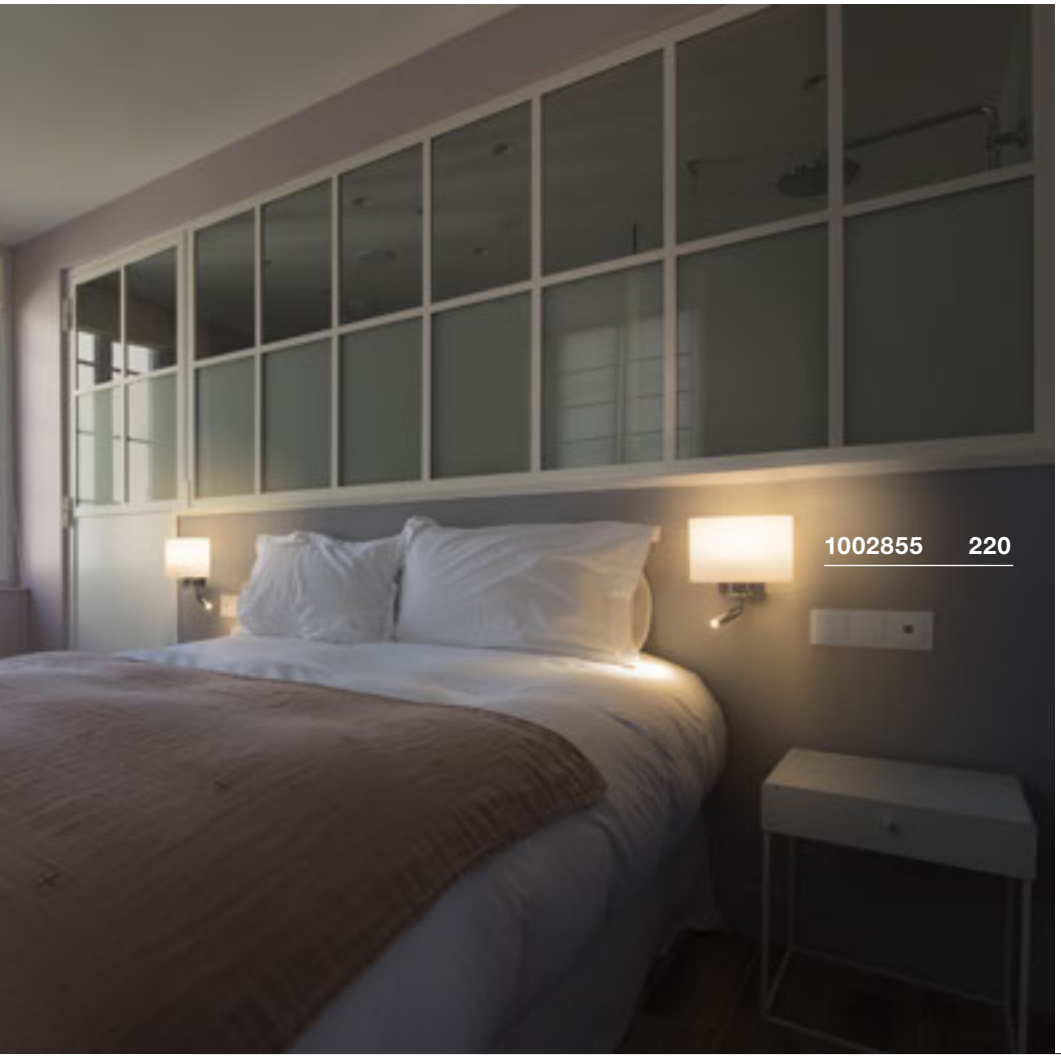


ACCANTO
WL, E27







SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: steel/textile

E27 <40W
Diameter: 8 cm L: 14 cm

LED E27 | 7.5W | 320°
2700K | 700lm | EEK=F
8kWh/1000h

C,L

Prod. no. 1005304

Options	Prod. no.
1xE27 ■ black	**1002942** ▼
1xE27 □ white	**1002943** ▼

COUPA FLEX
WL








175lm
|
LED INSIDE
|
3000K
CRI 80

SOCKET INSIDE <42 W



IP 20 L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 3.4W
Material: steel/glass

• Light sources can be switched on/off separately at the light

Spot	175lm 3000K	A→G

G9 <42W L: 9 cm

LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h




Prod. no. 1005286

Options	Prod. no.
1xG9 175 lm | 3000K | CRI80 chrome/milky	 **149452**


COUPA
WL, QT14







SOCKET INSIDE <42 W



IP 20

220-240V ~50/60Hz
Material: steel/glass

G9 <42W L: 9 cm


LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h



Prod. no. 1005286

Options	Prod. no.
1xG9 chrome/milky	 **1002859**



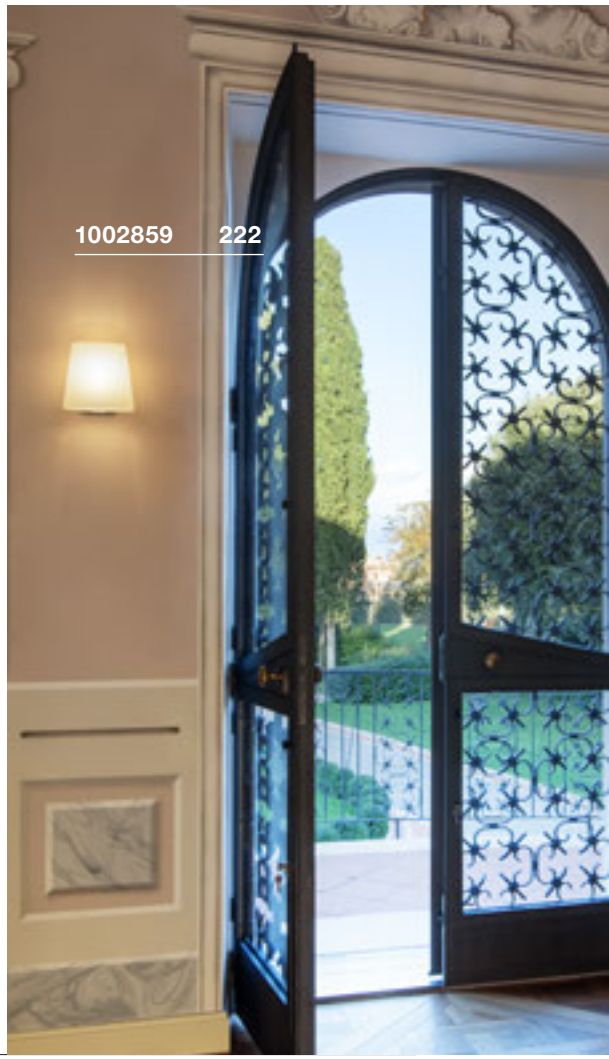




PLASTRA
WL, square







650lm
3000K
CRI 80



IP 20 L70B50

100-240V ~50/60Hz | 12V
Total wattage: 10.5W
Material: plaster/steel

		A→G
148019	650lm 3000K	A G F

Options	Prod. no.
650lm | 3000K | CRI80	
white	**148019**


KARPO MAGN
CW, single, PHASE







350|430lm
INSIDE
CRI 90
3000K



38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: steel/aluminium


1004706, 1004707	350lm | 430lm 3000K	A→G E

Options	Prod. no.
350lm | 3000K | CRI90	
■ black	**1004706**
430lm | 3000K | CRI90	
□ white	**1004707**

KARPO GOOSE
WL


NEW







380|420lm
INSIDE
CRI 90
3000K




Switch 40° L70B50


220-240V ~50/60Hz | 12V
Total wattage: 5.8W
Material: aluminium/steel

- Light can be dimmed via switch on the lamp head

1006162, 1006161	380lm | 420lm 3000K	A→G E

Options	Prod. no.	
380lm | 3000K | CRI90		
■ black	**1006162**	■
420lm | 3000K | CRI90		
□ white	**1006161**	■

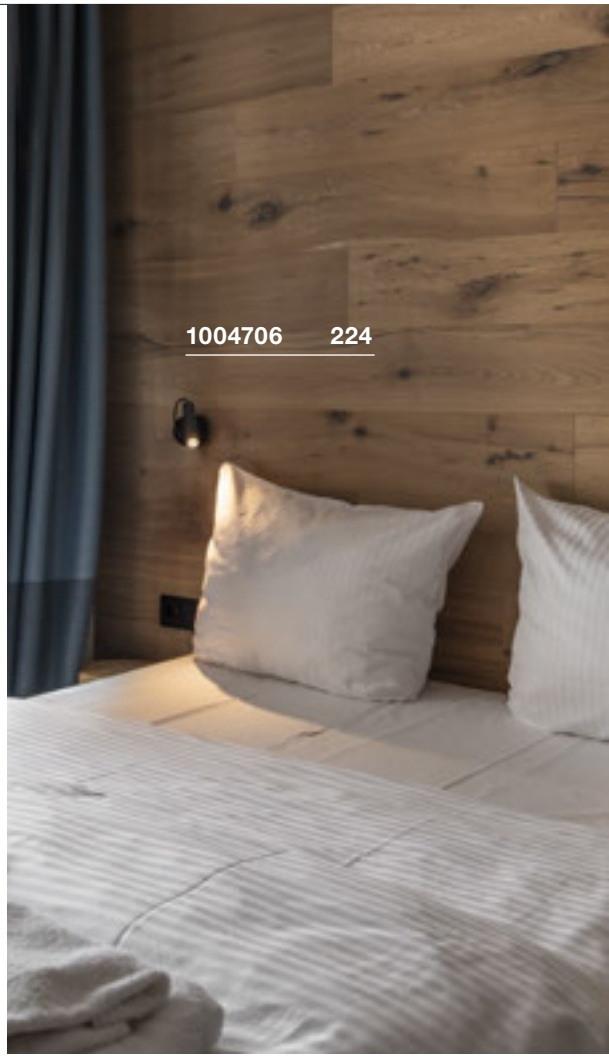

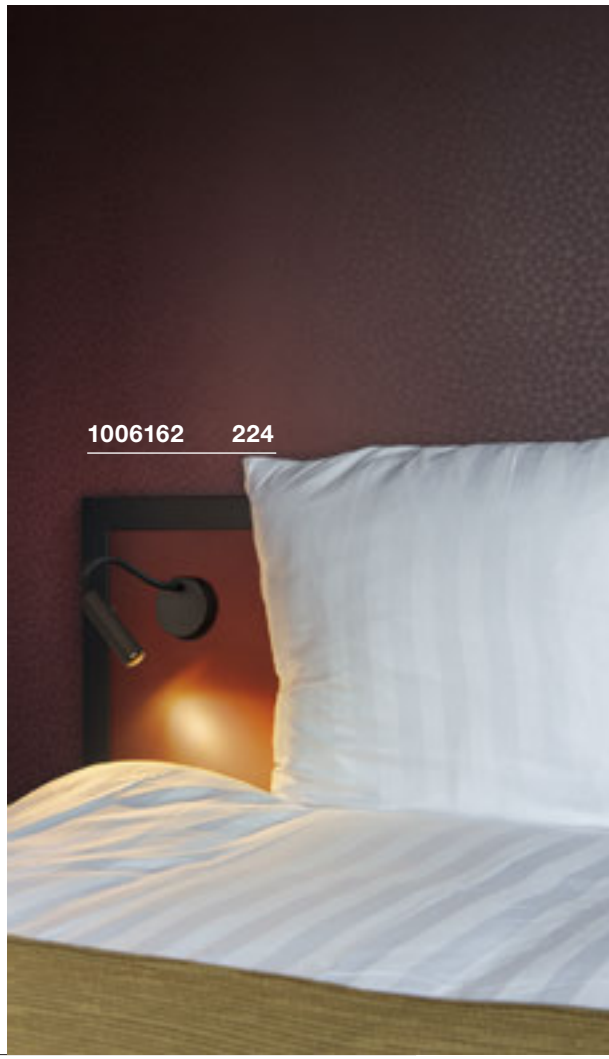






KARPO 30
WL, single







370|400lm
INSIDE
CRI 90
3000K



IP 20 | 40° | L70B50 | 350° | 90°

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/steel

152340, 152341	370lm | 400lm 3000K	A→G / A G E

Options	Prod. no.
370lm | 3000K | CRI90	
■ black	**152340**
400lm | 3000K | CRI90	
□ white	**152341**


KARPO
WL







390lm
INSIDE
CRI 90
3000K



Switch | IP 20 | 40° | L70B50 | 180° | 90°

220-240V ~50/60Hz | 500mA
Total wattage: 6.6W
Material: aluminium

- 2 USB connections 1.5 A max.
- 3 dimming levels via switch on base

1002140	390lm 3000K	A→G / A G E


Options	Prod. no.
390lm | 3000K | CRI90	
□ white	**1002140**

SOMNILA SPOT
WL, left





490|770lm
INSIDE
CRI 90
3000K



110° 340° L70B50 350° 90°

100-240V ~50/60Hz | 12V
Total wattage: 15W
Material: aluminium/steel

- 1 USB connection
- Light sources can be switched on/off separately on the housing

Spot	120lm 3000K	A→G G
Indirect	370lm | 650lm 3000K	A→G F


Options	Prod. no.
Spot: 120lm | 3000K | CRI90 Indirect: 370lm | 3000K | CRI90	
black	1003455
Spot: 120lm | 3000K | CRI90 Indirect: 650lm | 3000K | CRI90	
white	1003457

SOMNILA SPOT
WL, right





490|770lm
INSIDE
CRI 90
3000K



110° 340° L70B50 350° 90°


100-240V ~50/60Hz | 12V
Total wattage: 15W
Material: aluminium/steel


- 1 USB connection
- Light sources can be switched on/off separately on the housing


Spot	120lm 3000K	A→G G
Indirect	370lm | 650lm 3000K	A→G F

Options	Prod. no.
Spot: 120lm | 3000K | CRI90 Indirect: 370lm | 3000K | CRI90	
black	1003456
Spot: 120lm | 3000K | CRI90 Indirect: 650lm | 3000K | CRI90	
white	1003458



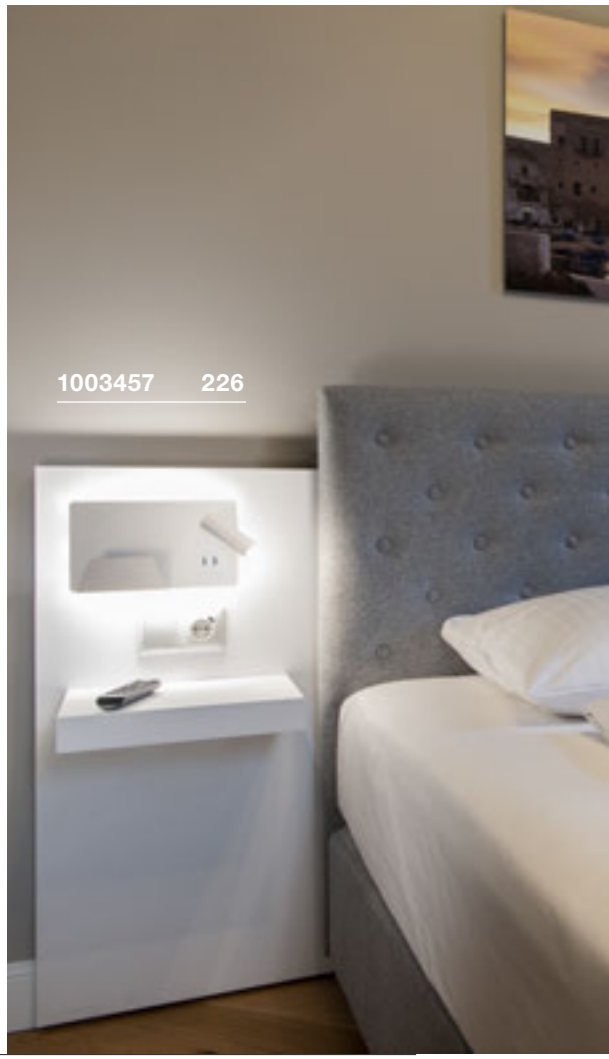

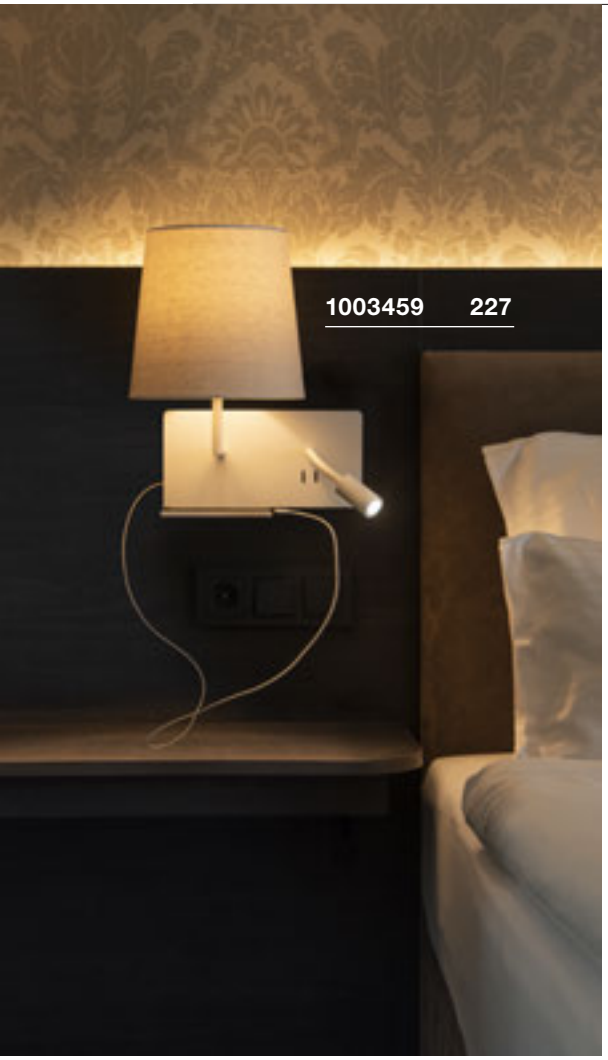

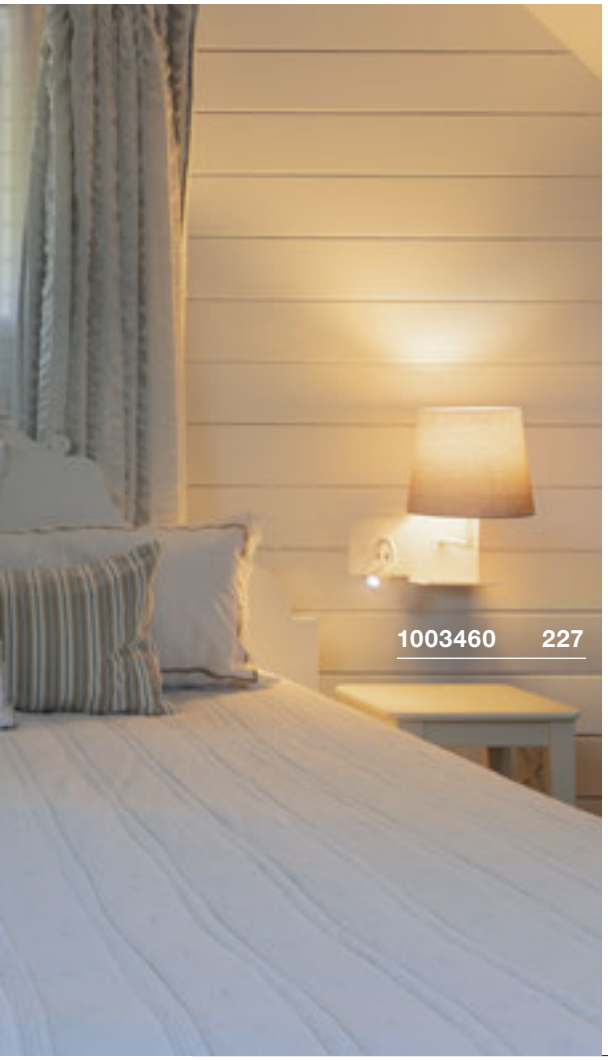


SOMNILA FLEX
WL, left







120lm
LED INSIDE
CRI 90
3000K
SOCKET INSIDE
40 W



110° L70B50

100-240V ~50/60Hz | 12V
Material: aluminium/textile

- 1 USB connection
- Light sources can be switched on/off separately on the housing

Spot	120lm 3000K	A→G A G

E27 40W L: 18 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27 120lm | 3000K | CRI90 white	**1003459**


SOMNILA FLEX
WL, right







120lm
LED INSIDE
CRI 90
3000K
SOCKET INSIDE
40 W



110° L70B50

100-240V ~50/60Hz | 12V
Material: aluminium/textile

- 1 USB connection
- Light sources can be switched on/off separately on the housing

Spot	120lm 3000K	A→G A G

E27 40W L: 18 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
1xE27 120lm | 3000K | CRI90 white	**1003460**


DIO FLEX PLATE
WL QPAR51







SOCKET INSIDE <50 W



IP 20

230V ~50Hz
Material: aluminium

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Decorative lamp ring, diameter 5.7 cm
Prod. no. 151040

Options	Prod. no.
1xGU10	
black	**1002608**
1xGU10	
white	**1002607**
1xGU10	
chrome	**146692**


DIO FLEX PLATE
WL







100lm 100lm 100lm
LED INSIDE CRI 80
2700K 3000K 4000K



IP 20 45° L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 1.9W
Material: aluminium

1002117, 1002118, 1002119	100lm 2700K 3000K 4000K	A→G F

Options	Prod. no.
100lm | 2700K | CRI80	
white	**1002117**
100lm | 3000K | CRI80	
white	**1002118**
100lm | 4000K | CRI80	
white	**1002119**


DIO FLEX PLATE
WL







100lm 100lm 100lm
LED INSIDE CRI 80
2700K 3000K 4000K



IP 20 45° L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 1.9W
Material: aluminium

1002430, 1002431, 1002432	100lm 2700K 3000K 4000K	A→G F


Options	Prod. no.
100lm | 2700K | CRI80	
black	**1002430**
100lm | 3000K | CRI80	
black	**1002431**
100lm | 4000K | CRI80	
black	**1002432**


DIO FLEX PLATE
WL











IP 20 45° L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 1.9W
Material: aluminium

146682, 1002116	100lm 3000K 2700K	A→G F

Options	Prod. no.
100lm | 3000K | CRI80	
chrome	**146682**
100lm | 2700K | CRI80	
chrome	**1002116**






PHELIA
WL, QPAR51







SOCKET INSIDE <35 W



IP 20 350° 90°

230V ~50/60Hz
Material: aluminium/steel

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972

Options	Prod. no.
1xGU10	
■ black	**148540**







MERADO FLOOD
WL, PHASE














220-240V ~50/60Hz | 1000mA
Total wattage: 40W
Material: aluminium

1001468, 1001472	3000lm | 3200lm 3000K | 4000K	A→G A G E

Options	Prod. no.
3000lm | 3000K | CRI80	
white	**1001468**
3200lm | 4000K | CRI80	
white	**1001472**

MAGANDA
WL








45.4lm / 48lm / 51lm

INSIDE

CRI 90

2700K / 3000K / 4000K





IP 44 IK02 L70B50 90°


100-240V ~50/60Hz | 12V
Total wattage: 4.8W
Material: steel/glass

1004971	45,4/48/51lm 2700/3000/4000K	A→G F

Options	Prod. no.
45.4/48/51lm | 2700/3000/4000K | CRI90	
chrome/white	**1004971**

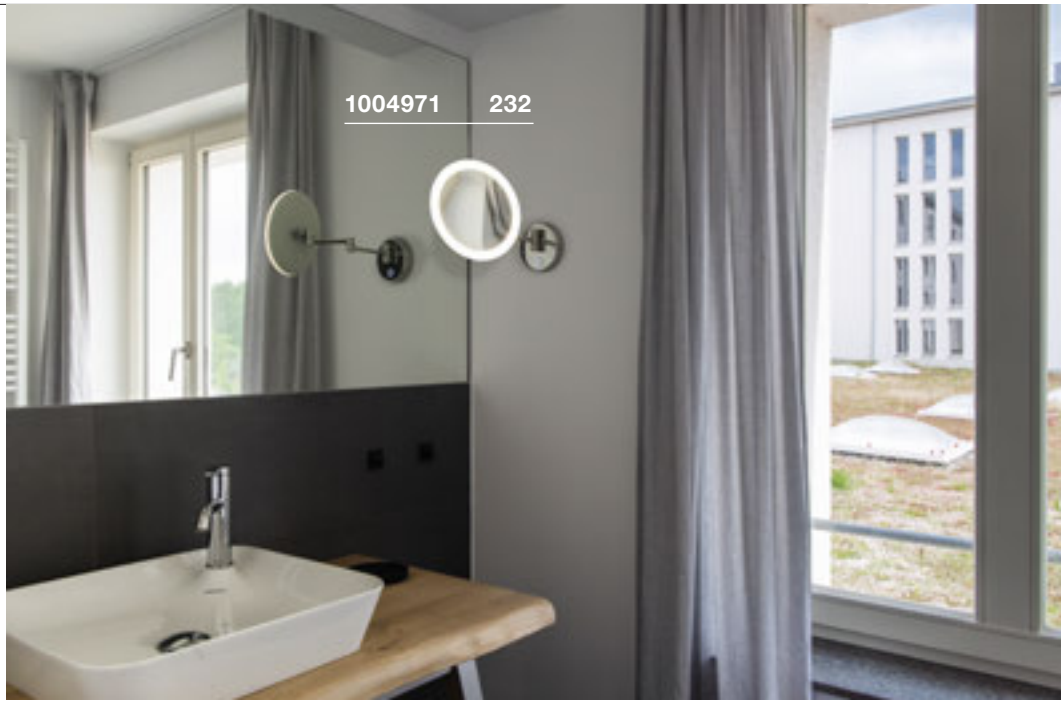

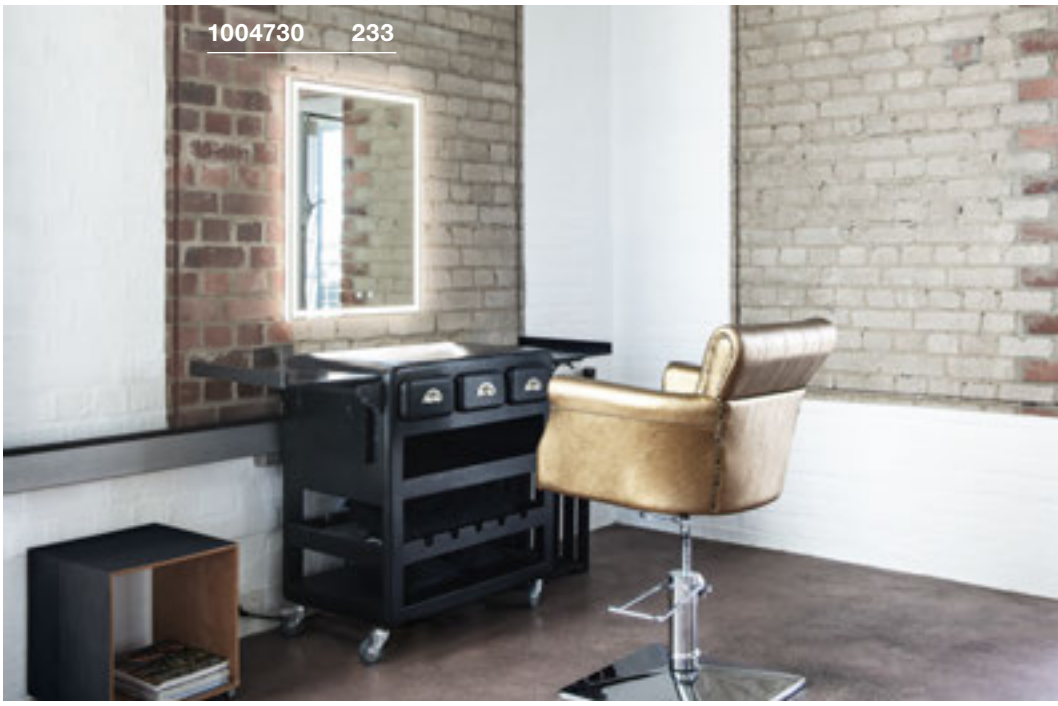

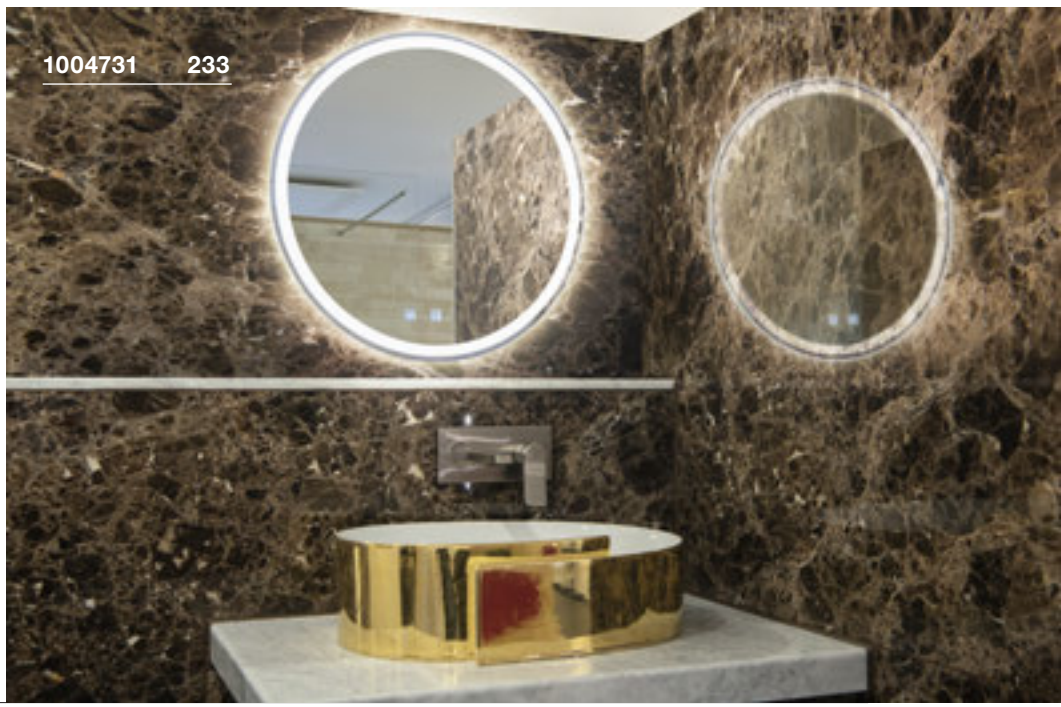

TRUKKO
WL, rectangular

NEW VARIANT

CCT






1310lm / 1320lm / 1340lm

INSIDE

CRI 90

3000K / 4000K / 6500K



Switch | IP 44 | 30 000 Hours | - | LED

220-240V ~50/60Hz | 24V
Total wattage: 24W
Material: glass/aluminium


- Incl. mirror heating

1004729	1310/1320/1340lm 3000/4000/6500K	A→G F

Options	Prod. no.
1310/1320/1340lm | 3000/4000/6500K | CRI90	
silver/milky	1004729

TRUKKO
WL, rectangular

CCT

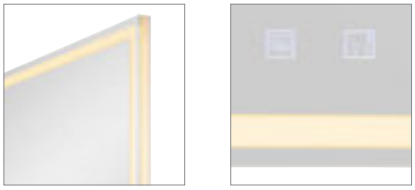


1080lm / 1290lm / 1250lm

INSIDE

CRI 90

3000K / 4000K / 6500K



Switch | IP 44 | 30 000 Hours | - | LED

220-240V ~50/60Hz | 24V
Total wattage: 25W
Material: glass/plastic

- Incl. mirror heating


1004730	1080/1290/1250lm 3000/4000/6500K	A→G E

Options	Prod. no.
1080/1290/1250lm | 3000/4000/6500K | CRI90	
silver/milky	1004730

TRUKKO
WL, round

CCT



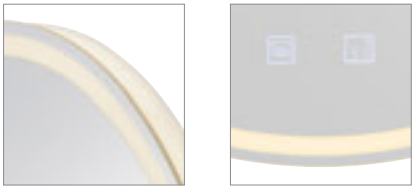


1270lm / 1260lm / 1260lm

INSIDE

CRI 90

3000K / 4000K / 6500K



Switch | IP 44 | 30 000 Hours | - | LED

220-240V ~50/60Hz | 24V
Total wattage: 25W
Material: glass/plastic

- Incl. mirror heating


1004731	1270/1260/1260lm 3000/4000/6500K	A→G E

Options	Prod. no.
1270/1260/1260lm | 3000/4000/6500K | CRI90	
silver/milky	1004731


TRUKKO 60
WL





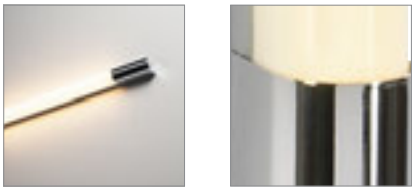

750lm
|
LED INSIDE — CRI 90
|
3000K



IP 44 IK03 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/plastic


149762	750lm 3000K	A→G A G E

Options	Prod. no.
750lm | 3000K | CRI90	
chrome/milky	**149762**


TRUKKO 90
WL





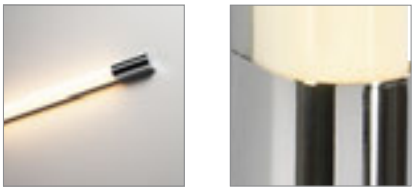

1040lm
|
LED INSIDE — CRI 90
|
3000K



IP 44 IK03 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/plastic

149772	1040lm 3000K	A→G A G D

Options	Prod. no.
1040lm | 3000K | CRI90	
chrome/milky	**149772**








MARYLIN 40/60/90
WL








890|1170|1800lm / 980|1280|1990lm

LED INSIDE

CRI 80

3000K / 4000K



IP 44 | 120° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

		A→G
1002190, 1002191, 1002192	890/980lm | 1170/1280lm | 1800/1990lm 3000/4000K	A G E

Options	Prod. no.
890/980lm | 3000/4000K | CRI80 | L: 40 cm	
chrome/milky	**1002190**
1170/1280lm | 3000/4000K | CRI80 | L: 60 cm	
chrome/milky	**1002191**
1800/1990lm | 3000/4000K | CRI80 | L: 90 cm	
chrome/milky	**1002192**


1002229 237


151282 237

WL 106
E14










SOCKET INSIDE <40 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

E14 <40W
Diameter: 3.6 cm L: 11 cm

LED E14 | 4.2W | 320°
2700K | 370lm | EEK=F
4kWh/1000h

Prod. no. 1005284

Options	Prod. no.
1xE14	
chrome	**1002228**

WL 106
E14










SOCKET INSIDE <40 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

E14 <40W
Diameter: 3.6 cm L: 11 cm


LED E14 | 4.2W | 320°
2700K | 370lm | EEK=F
4kWh/1000h

Prod. no. 1005284

Options	Prod. no.
2xE14	
chrome	**1002229**

MIBO UP/DOWN
WL, QT14










SOCKET INSIDE <25 W



IP 21

220-240V ~50/60Hz
Material: aluminium/glass

G9 <25W

LED G9 | 3.6W | 300°
3000K | 400lm | EEK=E
4kWh/1000h

Prod. no. 1005286


Options	Prod. no.
2xG9	
chrome	**151282**


DORISA 30














200-240V ~50Hz | 340mA
Total wattage: 5.2W
Material: aluminium/plastic

- Clamping range: 0-6 mm. Can be converted to a mirror light by removing the bracket

1000777	300lm 4000K	A→G A G E

Options	Prod. no.
300lm | 4000K | CRI80	
chrome	**1000777**





DORISA 50








370lm

LED INSIDE

CRI 80

4000K



IP 44 110° L70B50

200-240V ~50Hz | 340mA
Total wattage: 6.6W
Material: aluminium/plastic

- Clamping range: 0-6 mm. Can be converted to a mirror light by removing the bracket

		A→G
1000780	370lm 4000K	A→G D

Options	Prod. no.
370lm | 4000K | CRI80	
chrome	**1000780**

MIRROR LIGHT HIGHLIGHTS.
OUR PERFECT LIGHTING FOR YOUR BATHROOM.





GLENOS® 60 | 241




L-LINE 60 | 242



L-LINE 120 | 242





Q-LINE® | 243

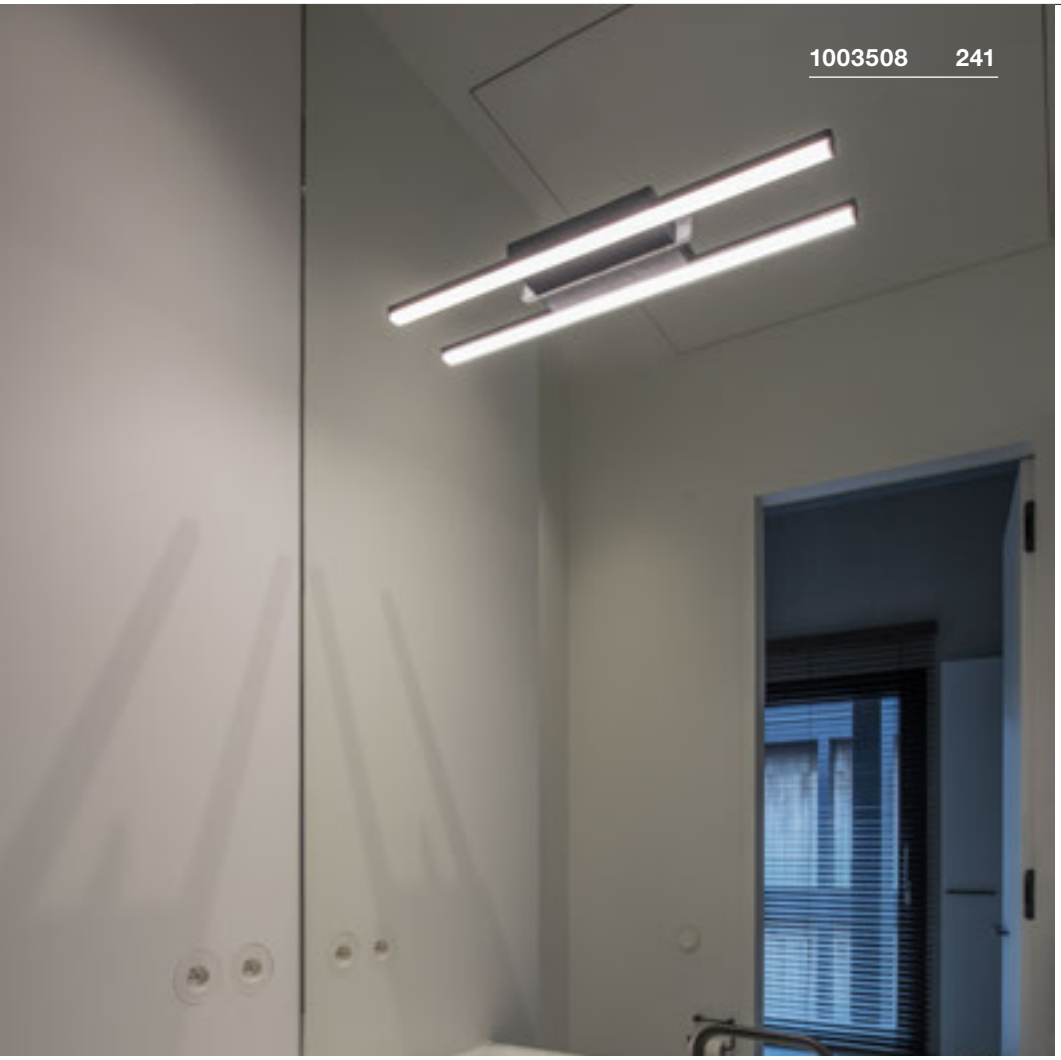



GLENOS® 60
WL






1170lm / 1170lm

LED INSIDE

CRI 80

3000K / 4000K



IP 20 | 120° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/polycarbonate (PC)

1003506, 1003507, 1003508	1170lm 3000/4000K	A→G D


Options	Prod. no.
1170lm | 3000/4000K | CRI80	
black	**1003506**
1170lm | 3000/4000K | CRI80	
white	**1003507**
1170lm | 3000/4000K | CRI80	
grey	**1003508**

L-LINE 60
WL





820lm
3000K
CRI 80



IP 44 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 10W
Material: aluminium/polycarbonate (PC)


1001299, 1001300, 1001301	820lm 3000K	A→G D

Options	Prod. no.
820lm | 3000K | CRI80 white	1001299
820lm | 3000K | CRI80 silver	1001300
820lm | 3000K | CRI80 grey	1001301

L-LINE 120
WL



1650lm
3000K
CRI 80




IP 44 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 18.5W
Material: aluminium/polycarbonate (PC)

1001303, 1001304, 1001305	1650lm 3000K	A→G D

Options	Prod. no.
1650lm | 3000K | CRI80 white	1001303
1650lm | 3000K | CRI80 silver	1001304
1650lm | 3000K | CRI80 grey	1001305

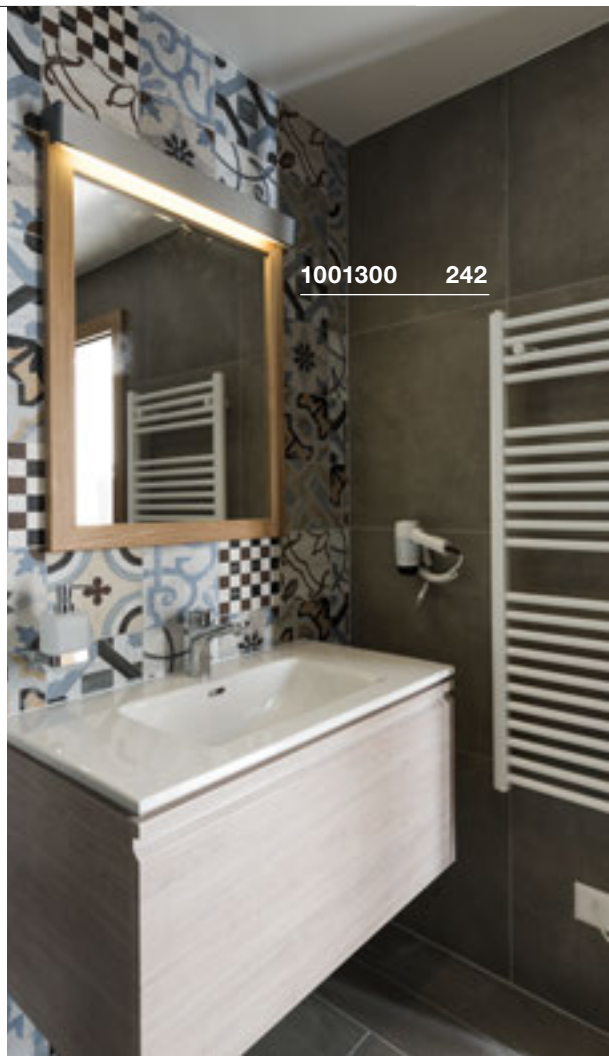








Q-LINE®
WL













IP 20 110° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 45W
Material: aluminium/acrylic

		A→G
1000669, 1000668, 1000670	3800lm 3000K	A G E

Options	Prod. no.
3800lm | 3000K | CRI80 black	**1000669**
3800lm | 3000K | CRI80 white	**1000668**
3800lm | 3000K | CRI80 grey	**1000670**


RETRATO
WL, PHASE








750lm
|
LED INSIDE — CRI 90
|
3000K






IP 20 | 100° | L70B50 | 330° | 90°


LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/steel

		A→G
1002960, 1002961	750lm 3000K	A→G E

Options	Prod. no.
750lm | 3000K | CRI90	
white/chrome	**1002960**
750lm | 3000K | CRI90	
chrome	**1002961**

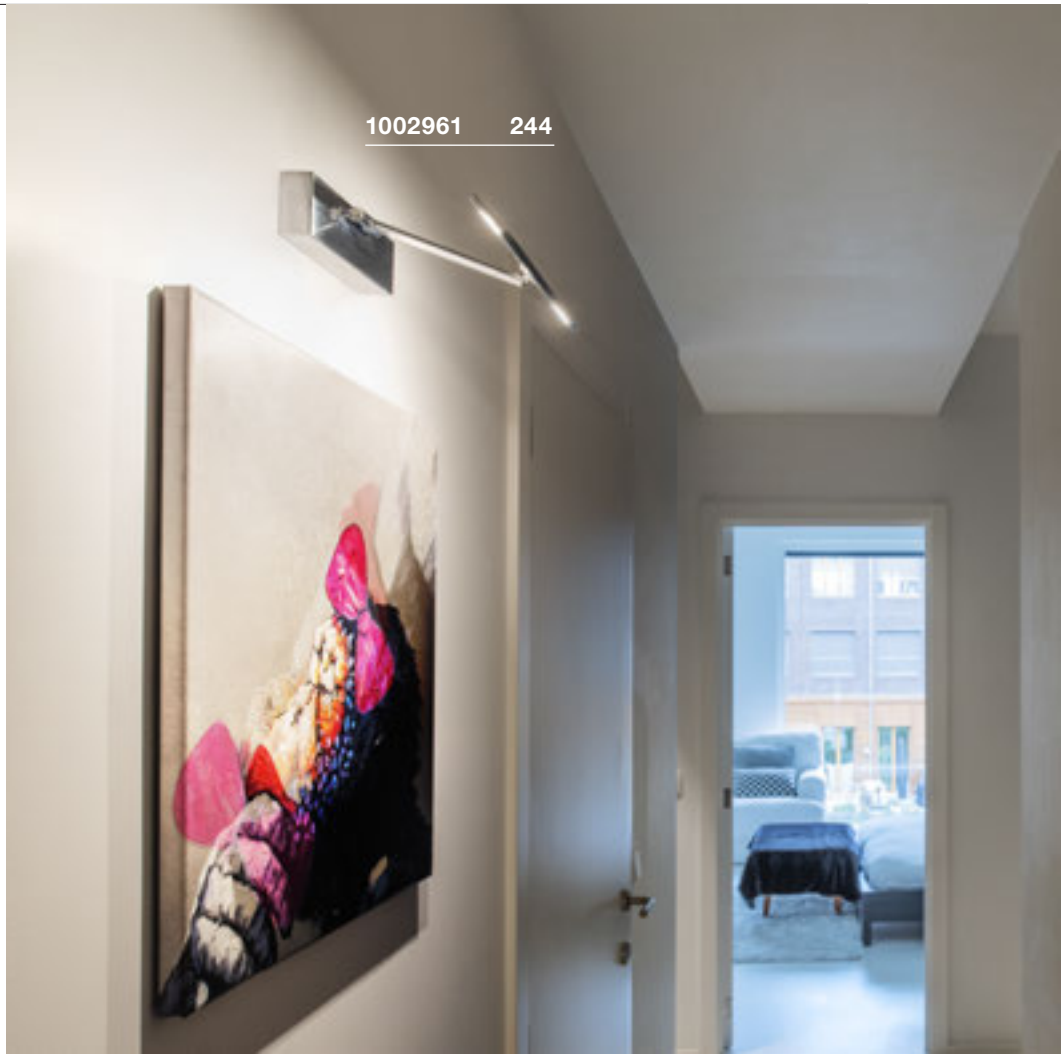

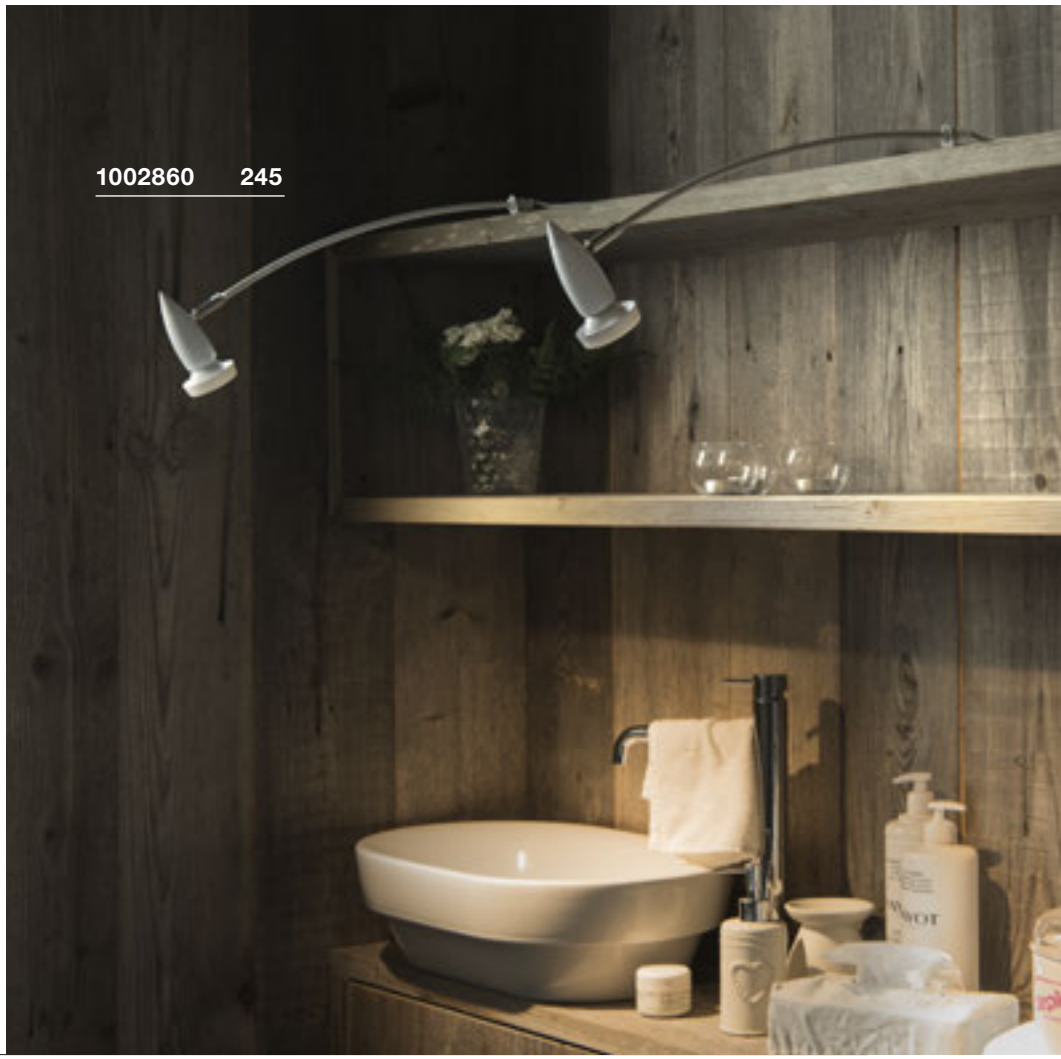


DISPLAY ADL 50
QPAR51







SOCKET INSIDE <50 W



IP 20 200° 90°

220-240V ~50/60Hz
Material: aluminium/brass

GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Decorative lamp ring, diameter 5.7 cm
Prod. no. 151041

Decorative lamp ring, diameter 5.7 cm
Prod. no. 151049



Options	Prod. no.
1xGU10	
white	**1002860**
1xGU10	
chrome	**146332**


SPOT DISPLAY
E27







SOCKET INSIDE <18.5 W



IP 20 IK03 200

220-240V ~50/60Hz
Material: aluminium/steel

- Safety plug
- Clamping range: 10-60 mm

E27 <18.5W

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=E
8kWh/1000h



Prod. no. 1005309

Options	Prod. no.
1xE27	
black	**1002985**
1xE27	
white	**1002986**
1xE27	
grey	**1002987**


NEPRO DISPLAY
QT-DE12







SOCKET INSIDE <300 W



IP 20 IK03 350° 90° 150

230V ~50Hz
Material: aluminium

- Safety plug and switch clamping range: 15-55 mm
- Safety plug and switch

R7s 118mm <300W

LED R7s | 15W | 330°
3000K | 2000lm | EEK=E
15kWh/1000h




Prod. no. 1005288

Options	Prod. no.
1xR7s 118mm	
grey	**146472** ▼

ALL GOOD THINGS COME FROM ABOVE.

CEILING LIGHTS FOR FLEXIBLE LIGHTING.

Ceiling lights are the key component for any room lighting. Their radiance creates a warm atmosphere in any area. You can customize the lights to suit the room design, adding impressive lighting highlights from above.

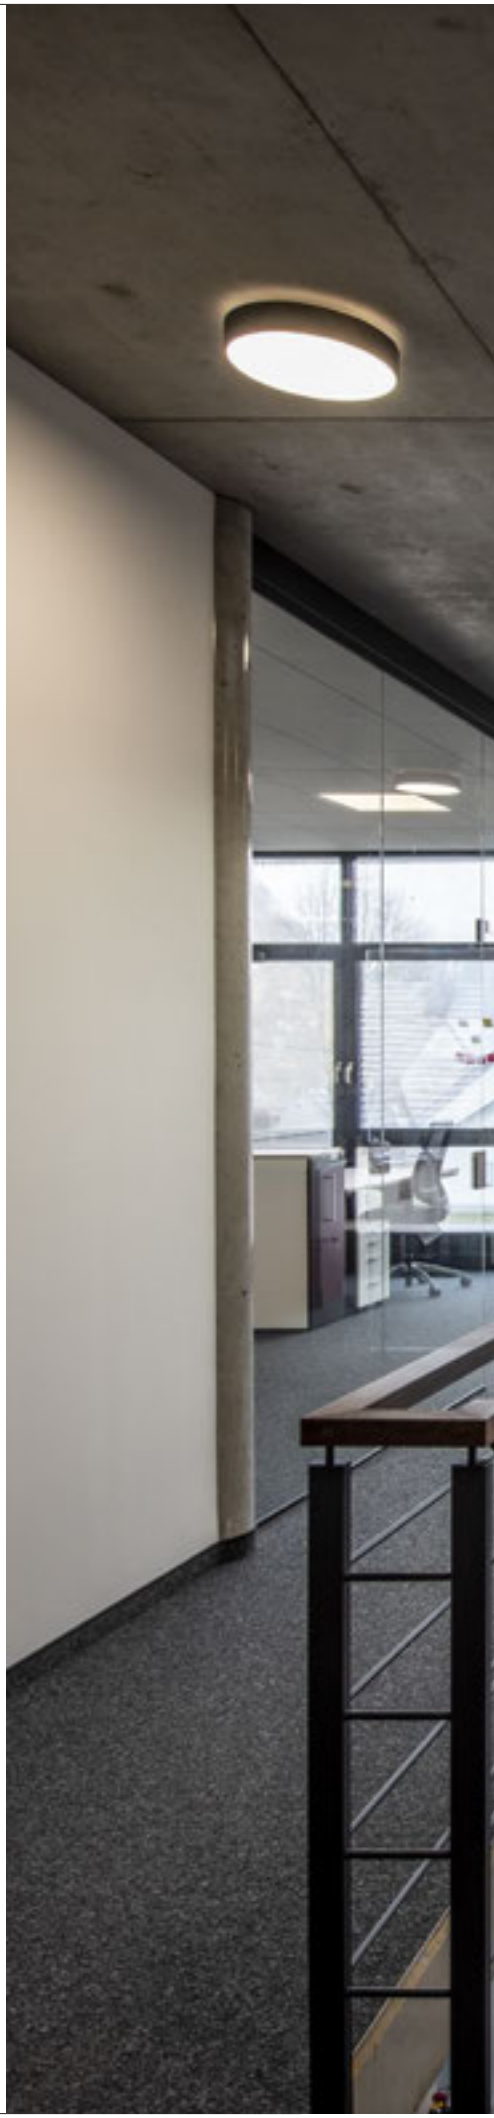


1001886 258

Ceiling lights from the NUMINOS® down and spotlight system can be found on pages 72 to 86. Or for easy online configuration, visit:
www.numinos.slv.com



1004519 83

CEILING LIGHTS


250 251 254 255 255 255 257 258
258 258 259 260 260 260 261 261
262 262 263 263 264 264 265 265
266 266 266 269 269 269 270 270
271 273 273 274 274 275 275 276
NEW VARIANT NEW VARIANT
277 277 277 278 278 279 280 281
281 281 282 282 282 283 284 285
287 287 287 288 288 289 289

You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808

MEDO LUMINAIRE FAMILY.
CEILING OR PENDANT LIGHTS.

	MEDO 30 CL, 1-10V	MEDO 40 CL, 1-10V	MEDO 60 CL, 1-10V	MEDO 90 CL, 1-10V
Example				
Lamp	LED INSIDE	LED INSIDE	LED INSIDE	LED INSIDE
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	1000lm	2000lm	3500lm	11000lm
UGR	25	25	22	25
Dimmable	1-10V	1-10V	1-10V	1-10V
Suspension set	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 CL, PHASE	MEDO 40 CL, PHASE	
Example			
Lamp	LED INSIDE	LED INSIDE	
Size	Diameter: 30 cm	Diameter: 40 cm	
Light strength	1200lm	2125lm	
UGR	25	25	
Dimmable	C, L	C, L	
Suspension set (not included)	1.5 m | 5 m	1.5 m | 5 m	

	MEDO 60 CL, square, 1-10V	MEDO 60 CL, square, DALI
Example		
Lamp	LED INSIDE	LED INSIDE
Size	W | L: 60 cm	W | L: 60 cm
Light strength	3300 lm	3300 lm
UGR	22	22
Dimmable	1-10V	DALI
Suspension set	1.5 m | 5 m	1.5 m | 5 m



MEDO LUMINAIRE FAMILY.
CEILING OR PENDANT LIGHTS.

	MEDO 30 AMBIENT CW, PHASE	MEDO 40 AMBIENT CW, PHASE	MEDO 60 AMBIENT CW, PHASE	MEDO 90 AMBIENT CL, PHASE
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	C	C	C	C
Suspension set	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m

	MEDO 30 AMBIENT CW, DALI	MEDO 40 AMBIENT CW, DALI	MEDO 60 AMBIENT CW, DALI	MEDO 90 AMBIENT CL, DALI
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm
Light strength	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm
UGR	25	25	25	25
Dimmable	DALI	DALI	DALI	DALI
Suspension set	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m








Ambient effect – These MEDO variants produce even and indirect light in an upwards direction.

Color temperature – With this MEDO variant, you can select the color temperature yourself. The switch on the reverse can be used to choose between 3000k and 4000k.

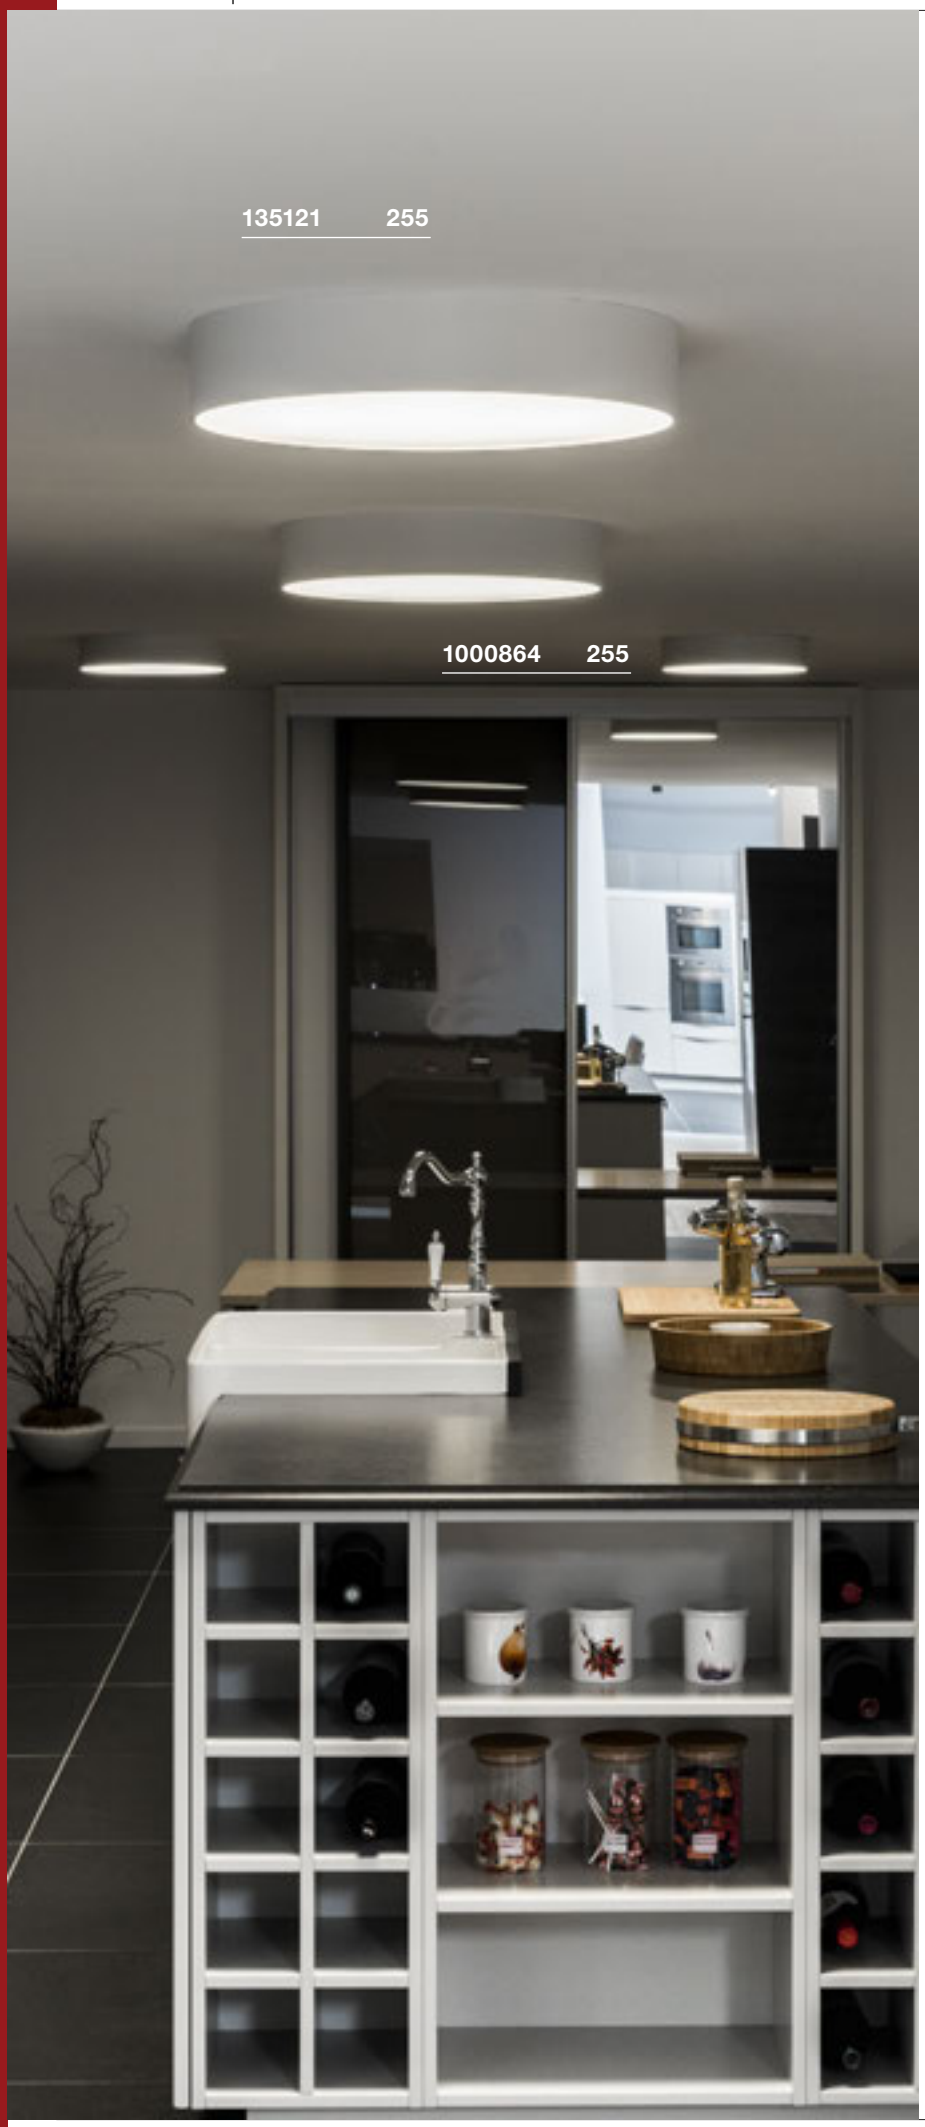



MEDO 30
CL, 1-10V














IP 20 105° 25 L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

1000855, 1000856, 1000857	1000lm 3000K	A→G D

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
1000lm | 3000K | CRI80 black	**1000855**
1000lm | 3000K | CRI80 white	**1000856**
1000lm | 3000K | CRI80 grey	**1000857**

MEDO 40
CL, 1-10V





2450lm
3000K
CRI 80



1-10V | IP 20 | 105° | UGR 25 | 30 000 Hours L70B50 | LED

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

		A→G
1000864, 1000865, 1000866	2450lm 3000K	E

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
2450lm | 3000K | CRI80 black	**1000864**
2450lm | 3000K | CRI80 white	**1000865**
2450lm | 3000K | CRI80 grey	**1000866**

MEDO 60
CL, 1-10V





4000lm
3000K
CRI 80



1-10V | IP 20 | 105° | UGR 22 | 30 000 Hours L70B50 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 38W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

		A→G
135120, 135121, 135124	4000lm 3000K	D


- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
4000lm | 3000K | CRI80 black	**135120**
4000lm | 3000K | CRI80 white	**135121**
4000lm | 3000K | CRI80 grey	**135124**

MEDO 90
CL, 1-10V



11560lm
3000K
CRI 80



1-10V | IP 20 | 105° | UGR 25 | 20 000 Hours L70B50 | LED

220-240V ~50/60Hz | 2900mA
Total wattage: 109W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

		A→G
135170, 135171, 135174	11560lm 3000K	D

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- 1-10V dimming **Prod. no. 470505**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
11560lm | 3000K | CRI80 black	**135170**
11560lm | 3000K | CRI80 white	**135171**
11560lm | 3000K | CRI80 grey	**135174**


MEDO 60
CL, square, 1-10V







3800lm
LED INSIDE
3000K
CRI 80




1-10V | IP 20 | 105° | UGR 22 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic
• Suspension set not included

1000725, 1000726, 1000727	3800lm 3000K	A→G A G E

- Suspension set 1.5m
  Prod. no. 135250
- Suspension set 1.5m
  Prod. no. 135251
- Suspension set 1.5m
  Prod. no. 135254
- 1-10V dimming
  Prod. no. 470505
- Suspension set 5m
  Prod. no. 1001950
- Suspension set 5m
  Prod. no. 1001951
- Suspension set 5m
  Prod. no. 1001952

Options	Prod. no.
3800lm | 3000K | CRI80 black	**1000725**
3800lm | 3000K | CRI80 white	**1000726**
3800lm | 3000K | CRI80 grey	**1000727**

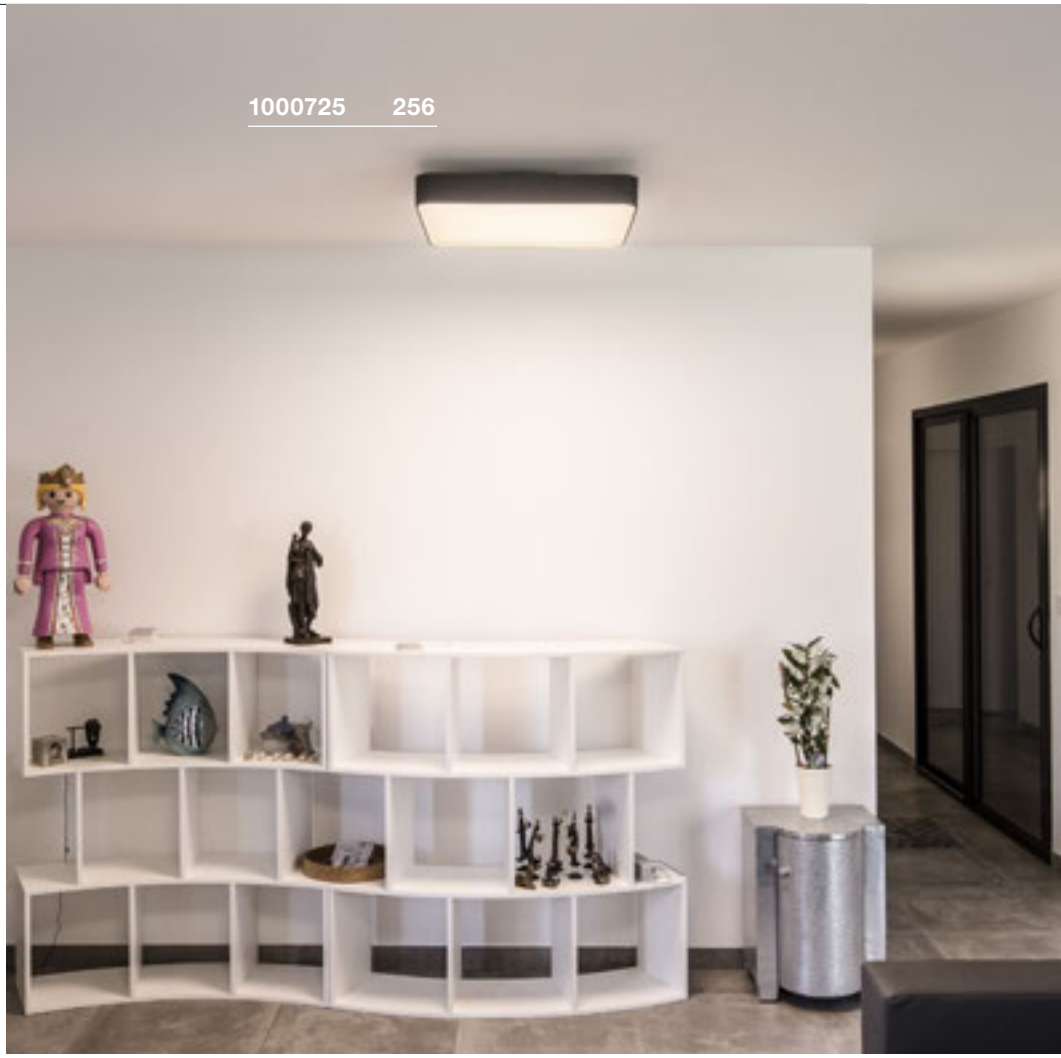






MEDO 30
CL, PHASE



1200lm
INSIDE
CRI 80
3000K



IP 20 | 105° | UGR 25 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

135020, 135021, 135024	1200lm 3000K	A→G D

Suspension set 1.5m
Prod. no. 135250

Suspension set 1.5m
Prod. no. 135251

Suspension set 1.5m
Prod. no. 135254

Suspension set 5m
Prod. no. 1001950

Suspension set 5m
Prod. no. 1001951

Suspension set 5m
Prod. no. 1001952


Options	Prod. no.
1200lm | 3000K | CRI80 black	**135020**
1200lm | 3000K | CRI80 white	**135021**
1200lm | 3000K | CRI80 grey	**135024**

MEDO 40
CL, PHASE





2450lm
INSIDE
CRI 80
3000K



IP 20 | 105° | UGR 25 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: aluminium/poly (methyl methacrylate) (PMMA)
• Suspension set not included

135070, 135071, 135074	2450lm 3000K	A→G E

Suspension set 1.5m
Prod. no. 135250

Suspension set 1.5m
Prod. no. 135251

Suspension set 1.5m
Prod. no. 135254

Suspension set 5m
Prod. no. 1001950

Suspension set 5m
Prod. no. 1001951

Suspension set 5m
Prod. no. 1001952

Options	Prod. no.
2450lm | 3000K | CRI80 black	**135070**
2450lm | 3000K | CRI80 white	**135071**
2450lm | 3000K | CRI80 grey	**135074**

MEDO 30 AMBIENT
CW, PHASE








1270lm / 1320lm

INSIDE CRI 80

3000K / 4000K



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	1270/1320lm 3000/4000K	A→G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 20/20lm | 3000/4000K | CRI80 Down: 1250/1300lm | 3000/4000K | CRI80 black	1001877
Up: 20/20lm | 3000/4000K | CRI80 Down: 1250/1300lm | 3000/4000K | CRI80 white	1001881
Up: 20/20lm | 3000/4000K | CRI80 Down: 1250/1300lm | 3000/4000K | CRI80 grey	1001882

MEDO 40 AMBIENT
CW, PHASE








2800lm / 3000lm

INSIDE CRI 80

3000K / 4000K



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	2750/3000lm 3000/4000K	A→G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2950lm | 3000/4000K | CRI80 black	1001883
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2950lm | 3000/4000K | CRI80 white	1001884
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2950lm | 3000/4000K | CRI80 grey	1001885

MEDO 60 AMBIENT
CW, PHASE








4720lm / 5240lm

INSIDE CRI 80

3000K / 4000K



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 1050mA
Total wattage: 40W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	4720/5240lm 3000/4000K	A→G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 120/120lm | 3000/4000K | CRI80 Down: 4600/5120lm | 3000/4000K | CRI80 black	1001886
Up: 120/120lm | 3000/4000K | CRI80 Down: 4600/5120lm | 3000/4000K | CRI80 white	1001887
Up: 120/120lm | 3000/4000K | CRI80 Down: 4600/5120lm | 3000/4000K | CRI80 grey	1001888

MEDO 90 AMBIENT
CL, PHASE








9750lm / 10350lm

LED INSIDE

CRI 80

3000K / 4000K



C | IP 20 | 105° | UGR 25 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 1050mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

		A→G
Up/Down	9750/10350lm 3000/4000K	D

- Suspension set 1.5m
  Prod. no. 135250
- Suspension set 1.5m
  Prod. no. 135251
- Suspension set 1.5m
  Prod. no. 135254
- Suspension set 5m
  Prod. no. 1001950
- Suspension set 5m
  Prod. no. 1001951
- Suspension set 5m
  Prod. no. 1001952

Options	Prod. no.
Up: 125/125lm | 3000/4000K | CRI80 Down: 9625/10225lm | 3000/4000K | CRI80 black	**1001878**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9625/10225lm | 3000/4000K | CRI80 white	**1001879**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9625/10225lm | 3000/4000K | CRI80 grey	**1001880**



MEDO 30 AMBIENT
CW, DALI








1250lm / 1300lm

INSIDE CRI 80

3000K / 4000K



Dali | IP 20 | 105° | UGR 25 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	1230/1280lm 3000/4000K	A→G A G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 20/20lm | 3000/4000K | CRI80 Down: 1230/1280lm | 3000/4000K | CRI80	
black	**1001889**
Up: 20/20lm | 3000/4000K | CRI80 Down: 1230/1280lm | 3000/4000K | CRI80	
white	**1001893**
Up: 20/20lm | 3000/4000K | CRI80 Down: 1230/1280lm | 3000/4000K | CRI80	
grey	**1001894**

MEDO 40 AMBIENT
CW, DALI








2800lm / 2950lm

INSIDE CRI 80

3000K / 4000K



Dali | IP 20 | 105° | UGR 25 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/polycarbonate (PC)
• Suspension set not included


Up/Down	2800/2950lm 3000/4000K	A→G A G C

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2900lm | 3000/4000K | CRI80	
black	**1001895**
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2900lm | 3000/4000K | CRI80	
white	**1001896**
Up: 50/50lm | 3000/4000K | CRI80 Down: 2750/2900lm | 3000/4000K | CRI80	
grey	**1001897**

MEDO 60 AMBIENT
CW, DALI








4470lm / 4870lm

INSIDE CRI 80

3000K / 4000K



Dali | IP 20 | 105° | UGR 25 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 1000mA
Total wattage: 37W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	4470/4870lm 3000/4000K	A→G A G C


- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 120/120lm | 3000/4000K | CRI80 Down: 4350/4750lm | 3000/4000K | CRI80	
black	**1001898**
Up: 120/120lm | 3000/4000K | CRI80 Down: 4350/4750lm | 3000/4000K | CRI80	
white	**1001900**
Up: 120/120lm | 3000/4000K | CRI80 Down: 4350/4750lm | 3000/4000K | CRI80	
grey	**1001899**


MEDO 90 AMBIENT
CL, DALI







9625lm / 10225lm
3000K / 4000K
CRI 80



IP 20 | 105° | 25 | L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 78W
Material: aluminium/polycarbonate (PC)
• Suspension set not included

Up/Down	9625/10225lm 3000/4000K	D


- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**

Options	Prod. no.
Up: 125/125lm | 3000/4000K | CRI80 Down: 9500/10100lm | 3000/4000K | CRI80 black	**1001890**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9500/10100lm | 3000/4000K | CRI80 white	**1001891**
Up: 125/125lm | 3000/4000K | CRI80 Down: 9500/10100lm | 3000/4000K | CRI80 grey	**1001892**

MEDO 60
CL, square, DALI



3800lm
3000K
CRI 80



IP 20 | 105° | 22 | L70B50


220-240V ~50/60Hz | 1000mA
Total wattage: 39W
Material: aluminium/acrylic

1002882	3800lm 3000K	E

- Suspension set 1.5m **Prod. no. 135250**
- Suspension set 1.5m **Prod. no. 135251**
- Suspension set 1.5m **Prod. no. 135254**
- Suspension set 5m **Prod. no. 1001950**
- Suspension set 5m **Prod. no. 1001951**
- Suspension set 5m **Prod. no. 1001952**


Options	Prod. no.
3800lm | 3000K | CRI80 white	**1002882**




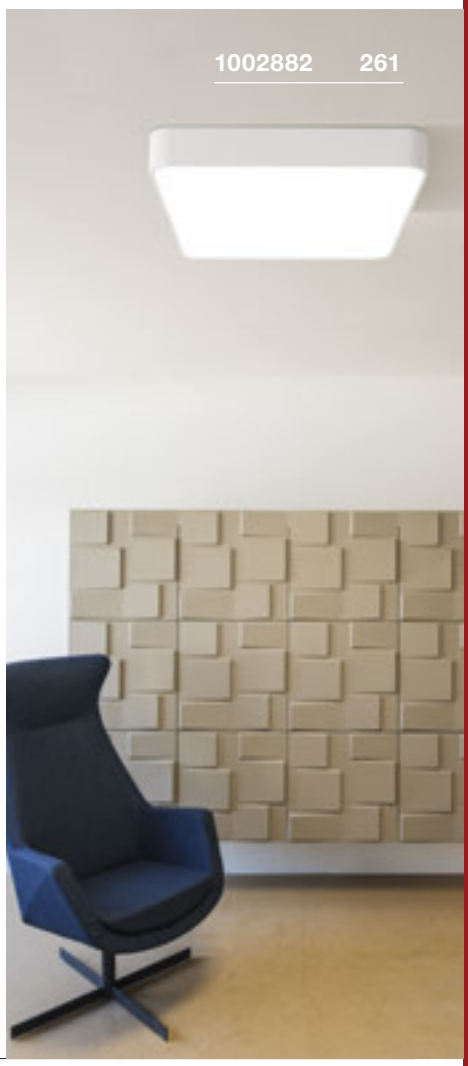

PANEL 60
CL, round, PHASE







IP 20 | 110° | UGR 22 | L70B50 | 40

LED

220-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/poly (methyl methacrylate) (PMMA)


1000783, 1000784, 1000785, 1000786	3150lm | 3350lm 3000K 4000K	A→G E


Options	Prod. no.
3150lm | 3000K | CRI80	
white	**1000783**
3350lm | 4000K | CRI80	
white	**1000784**
3150lm | 3000K | CRI80	
grey	**1000785**
3350lm | 4000K | CRI80	
grey	**1000786**

PANEL
CL, 1200x300mm, PHASE





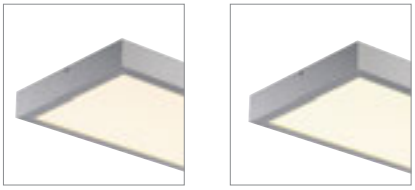



IP 20 | 90° | UGR 19 | L70B50 | 40

LED

220-240V ~50/60Hz | 1000mA
Total wattage: 45W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1001505, 1001506, 1001508, 1001509	3100lm | 3400lm 3000K 4000K	A→G F

Options	Prod. no.
3100lm | 3000K | CRI80	
white	**1001505**
3400lm | 4000K | CRI80	
white	**1001506**
3100lm | 3000K | CRI80	
grey	**1001508**
3400lm | 4000K | CRI80	
grey	**1001509**






1000786 262

PANEL 60
CL, round, DALI





3150lm | 3350lm
INSIDE
3000K | 4000K
CRI 80



Dali | IP 20 | 110° | UGR 22 | L70B50 | 40


LED

100-277V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/poly (methyl methacrylate) (PMMA)


1003040, 1003041, 1003042, 1003043	3150lm | 3350lm 3000K 4000K	A→G E

Options	Prod. no.
3150lm | 3000K | CRI80	
white	**1003040**
3350lm | 4000K | CRI80	
white	**1003041**
3150lm | 3000K | CRI80	
grey	**1003042**
3350lm | 4000K | CRI80	
grey	**1003043**

PANEL
CL, 1200x300mm, DALI

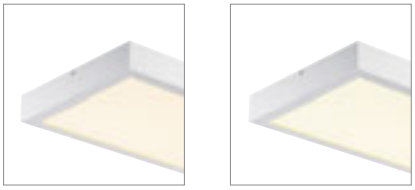

3100lm | 3400lm
INSIDE
3000K | 4000K
CRI 90



Dali | IP 20 | 90° | UGR 19 | L70B50 | 40

LED

100-277V ~50/60Hz | 1000mA
Total wattage: 43W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1003052, 1003053, 1003054, 1003055	3100lm | 3400lm 3000K 4000K	A→G F


Options	Prod. no.
3100lm | 3000K | CRI90	
white	**1003052**
3400lm | 4000K | CRI80	
white	**1003053**
3100lm | 3000K | CRI80	
grey	**1003054**
3400lm | 4000K | CRI80	
grey	**1003055**

Q-LINE®
CL, 1m, BAP, PHASE





2100lm
LED INSIDE
CRI 90
3000K



C | IP 20 | 30° | UGR 10 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 900mA
Total wattage: 46W
Material: aluminium/plastic

1000686, 1000685	2100lm 3000K	A→G / A F G


Options	Prod. no.
2100lm | 3000K | CRI90	
■ black	**1000686**
2100lm | 3000K | CRI90	
□ white	**1000685**

Q-LINE®
CL, 1m, BAP, PHASE





2300lm
LED INSIDE
CRI 90
4000K



C | IP 20 | 30° | UGR 10 | 25 000 Hours L70B50 | LED

220-240V ~50/60Hz | 900mA
Total wattage: 46W
Material: aluminium/plastic

1000689, 1000688	2300lm 4000K	A→G / A F G

Options	Prod. no.
2300lm | 4000K | CRI90	
■ black	**1000689**
2300lm | 4000K | CRI90	
□ white	**1000688**





Q-LINE®
CL, 2m, BAP, PHASE











4200lm



3000K






IP 20 30° 10 L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 93W
Material: aluminium/plastic





Options	Prod. no.
4200lm | 3000K | CRI90	
■ black	**1000692**
4200lm | 3000K | CRI90	
□ white	**1000691**

Q-LINE®
CL, 2m, BAP, PHASE











4600lm



4000K






IP 20 30° 10 L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 93W
Material: aluminium/plastic







Options	Prod. no.
4600lm | 4000K | CRI90	
■ black	**1000695**
4600lm | 4000K | CRI90	
□ white	**1000694**


TRILEDO
CL, single, square, QPAR51







SOCKET INSIDE <10 W



IP 20 350° 20°

220-240V ~50/60Hz
Material: aluminium

GU10 <10W
Diameter: 5 cm L: 5.5 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
1xGU10	
■ black	**1002013**
1xGU10	
□ white	**1002015**
1xGU10	
◧ aluminium	**1002004**


TRILEDO
CL, double, square, QPAR51







SOCKET INSIDE <10 W



IP 20 350° 20°

220-240V ~50/60Hz
Material: aluminium

GU10 <10W
Diameter: 5 cm L: 5.5 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972

Options	Prod. no.
2xGU10	
■ black	**1002005**
2xGU10	
□ white	**1002006**


TRILEDO
CL, single, round, QPAR51







SOCKET INSIDE <10 W



IP 20 350° 20°

220-240V ~50/60Hz
Material: aluminium

GU10 <10W
Diameter: 5 cm L: 5.5 cm

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h



Prod. no. 1005075


Options	Prod. no.
1xGU10	
■ black	**1002010**
1xGU10	
□ white	**1002011**
1xGU10	
◧ aluminium	**1002012**



1002013 266



1002011 266

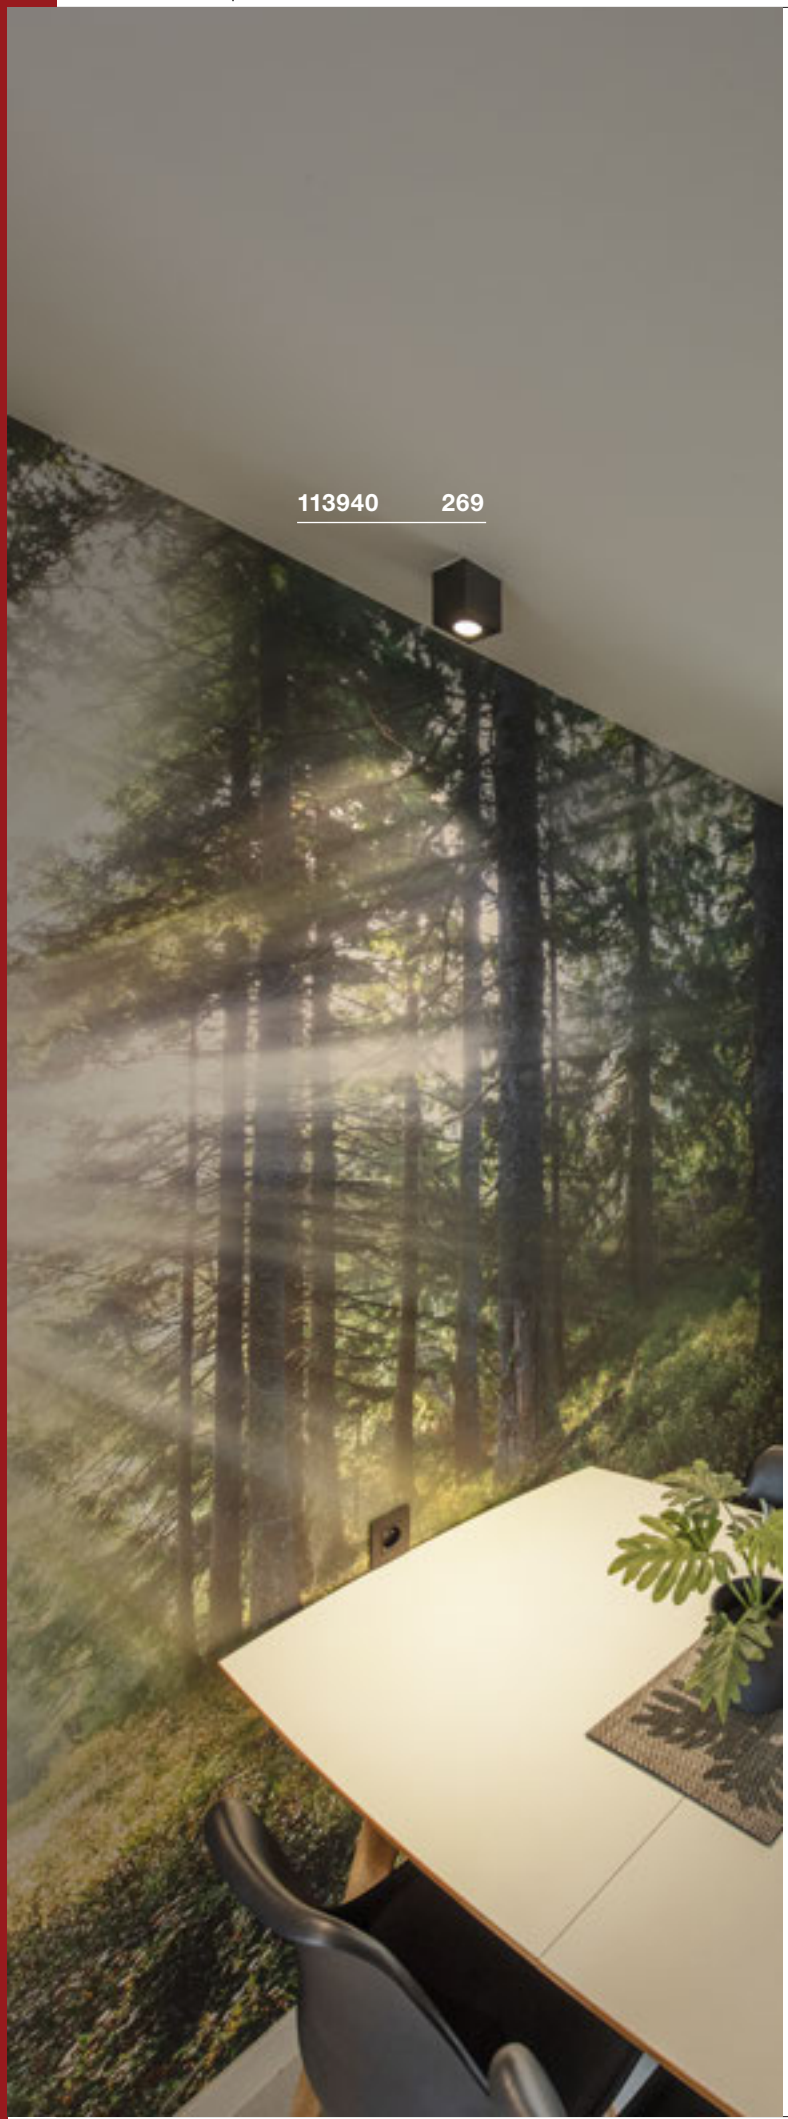
113940 269



113930 269

TRILEDO
CL, single, square





640lm
INSIDE CRI 80
3000K



IP 20 38° L70B50 350° 20°

100-240V ~50/60Hz | 350mA
Total wattage: 7.6W
Material: aluminium

113940, 113941	640lm 3000K	A→G A G E


Options	Prod. no.
640lm | 3000K | CRI80	
■ black	**113940**
640lm | 3000K | CRI80	
□ white	**113941**

TRILEDO
CL, double, square





1300lm
INSIDE CRI 80
3000K



IP 20 38° L70B50 350° 30°

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

1002003, 1002008	1300lm 3000K	A→G A G E


Options	Prod. no.
1300lm | 3000K | CRI80	
■ black	**1002003**
1300lm | 3000K | CRI80	
□ white	**1002008**

TRILEDO
CL, single, round





640lm
INSIDE CRI 80
3000K



IP 20 38° L70B50 350° 20°

100-240V ~50/60Hz | 350mA
Total wattage: 7.6W
Material: aluminium

113930, 113931	640lm 3000K	A→G A G E

Options	Prod. no.
640lm | 3000K | CRI80	
■ black	**113930**
640lm | 3000K | CRI80	
□ white	**113931**

SUPROS
CL, MOVE








3380lm | 3520lm

INSIDE | 3000K | 4000K | CRI 90



IP 20 | 60° | L70B50 | 350° | 50°

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium

1003283, 1003284, 1003285, 1003286	3380lm 3000K 4000K	A→G E

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104

Options	Prod. no.
3380lm | 3000K | CRI90 ■ black	**1003283**
3380lm | 3000K | CRI90 □ white	**1003284**
3520lm | 4000K | CRI90 ■ black	**1003285**
3520lm | 4000K | CRI90 □ white	**1003286**


SUPROS
CL, MOVE





2600lm | 2700lm

INSIDE | 3000K | 4000K | CRI 90



IP 20 | 60° | L70B50 | 350° | 50°

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

1003289, 1003290, 1003287, 1003288	2600lm | 2700lm 3000K | 4000K	A→G E

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104

Options	Prod. no.
2600lm | 3000K | CRI90 ■ black	**1003289**
2600lm | 3000K | CRI90 □ white	**1003290**
2700lm | 4000K | CRI90 ■ black	**1003287**
2700lm | 4000K | CRI90 □ white	**1003288**







SUPROS 78
CL, PHASE














220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium

116330, 116331	700lm 3000K	A→G A G E

Lens 20°
Prod. no. 116302

Lens 40°
Prod. no. 116304

Options	Prod. no.
700lm | 3000K | CRI80 ■ black	**116330**
700lm | 3000K | CRI80 □ white	**116331**

117321 273

DESIGNED BY
David Morgan






"Excellent light quality from innovative, distinctive and attractive luminaire designs."





OCCULDAS 13
DL, indirect, PHASE













220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

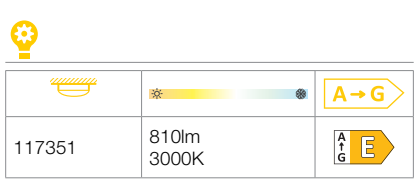



Options	Prod. no.
810lm | 3000K | CRI80	
white	**117351**


OCCULDAS 23
DL, indirect, PHASE












220-240V ~50/60Hz | 700mA
Total wattage: 24W
Material: aluminium/steel

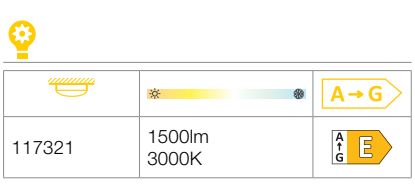


Options	Prod. no.
1500lm | 3000K | CRI80	
white	**117321**


ALTRA DICE
CL, QPAR51







SOCKET INSIDE <35 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

GU10 <35W

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h



Prod. no. 1005075

Options	Prod. no.
1xGU10	
black	**1002216**
1xGU10	
white	**151511**
1xGU10	
grey/black	**151514**


ALTRA DICE
CW, double, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium/steel

GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
2xGU10	
black	**1002215**
2xGU10	
white	**151531**
2xGU10	
grey/black	**151534**







117101 275


KARDAMOD
CL, single, square, QPAR111







SOCKET INSIDE <75 W



IP 20

220-240V ~50/60Hz
Material: steel

GU10 <75W

QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h


Prod. no. 1005274

Options	Prod. no.
1xGU10	
■ black	**117100**
1xGU10	
□ white	**117101**


KARDAMOD
CL, double, square, QPAR111







SOCKET INSIDE <75 W



IP 20

220-240V ~50/60Hz
Material: steel

GU10 <75W

QPAR111 | 12.5W | 30°
4000K | 1000lm | EEK=F
13kWh/1000h


Prod. no. 1005282

Options	Prod. no.
2xGU10	
■ black	**117110**
2xGU10	
□ white	**117111**



117110 275

SLV FENDA.
MIX & MATCH.

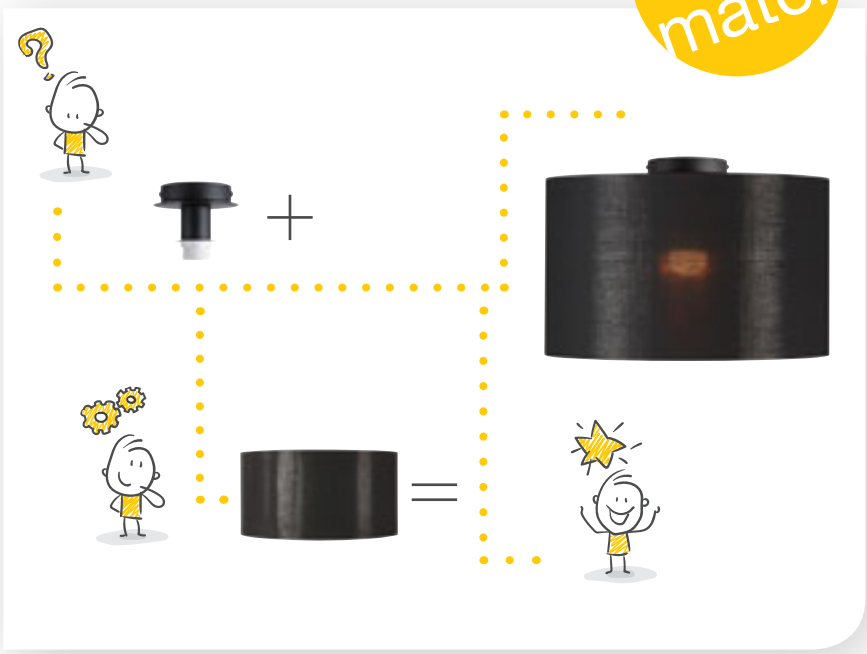




FENDA
Ceiling rose, E27







SOCKET INSIDE <60 W



IP 20

220-240V ~50/60Hz
Material: steel

E27 <60W

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
1xE27 black	**155550**
1xE27 white	**155551**
1xE27 chrome	**155552**



FENDA
30 cm, round

NEW VARIANT



H: 20 cm
Diameter: 30 cm
Material: textile/steel

Options	Prod. no.
black/copper	155592
white	155582
beige	155583
grey	1004774

FENDA
45 cm, round

NEW VARIANT



H: 28 cm
Diameter: 45.5 cm
Material: textile/steel

Acrylic glass cover
Prod. no. 156100

Options	Prod. no.
black/copper	156122
white	156111
beige	156113
grey	1004775

FENDA
70 cm, round



H: 36 cm
Diameter: 70 cm
Material: textile/steel

- Max. 20W

Acrylic glass cover
Prod. no. 1000957

Options	Prod. no.
black/copper	1000580
white	1000579

TENORA
CL, E27










SOCKET INSIDE <23 W



IP 20

220-240V 50/60Hz
Material: steel/textile

E27 <23W L: 14.8 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
3xE27	
■ black	**156050**
3xE27	
□ white	**156051**


SOPRANA
CL, E27







SOCKET INSIDE <60 W



IP 20


220-240V ~50/60Hz
Material: steel/textile

E27 <60W

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
3xE27	
■ beige	**155373**

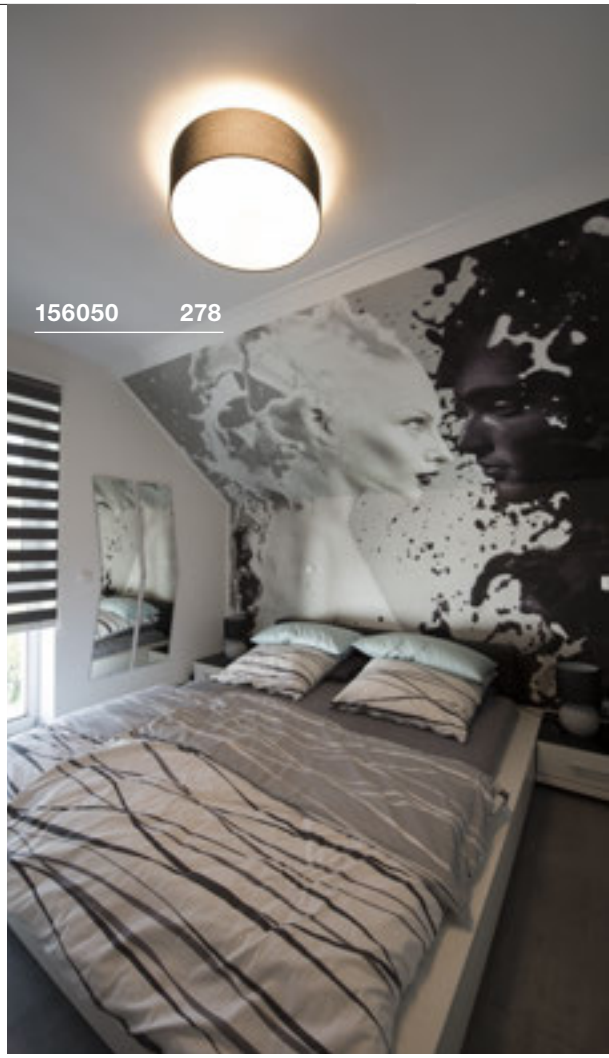






ACCANTO
CL, E27







SOCKET INSIDE <40 W



IP 20

220-240V ~50/60Hz
Material: steel/textile

E27 <40W L: 13 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
2xE27 ■ black	**1002944** ▼
2xE27 □ white	**1002945** ▼

OCULUS
CL, PHASE






36lm - 780lm

INSIDE

CRI 90

2000K - 3000K




IP 20 100° L70B50

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/glass

• Additional frosted lens included

1004666, 1004667	36-780lm 2000-3000K	A→G F

Options	Prod. no.
36-780lm | 2000-3000K | CRI90	
■ black	**1004666**
36-780lm | 2000-3000K | CRI90	
□ white	**1004667**

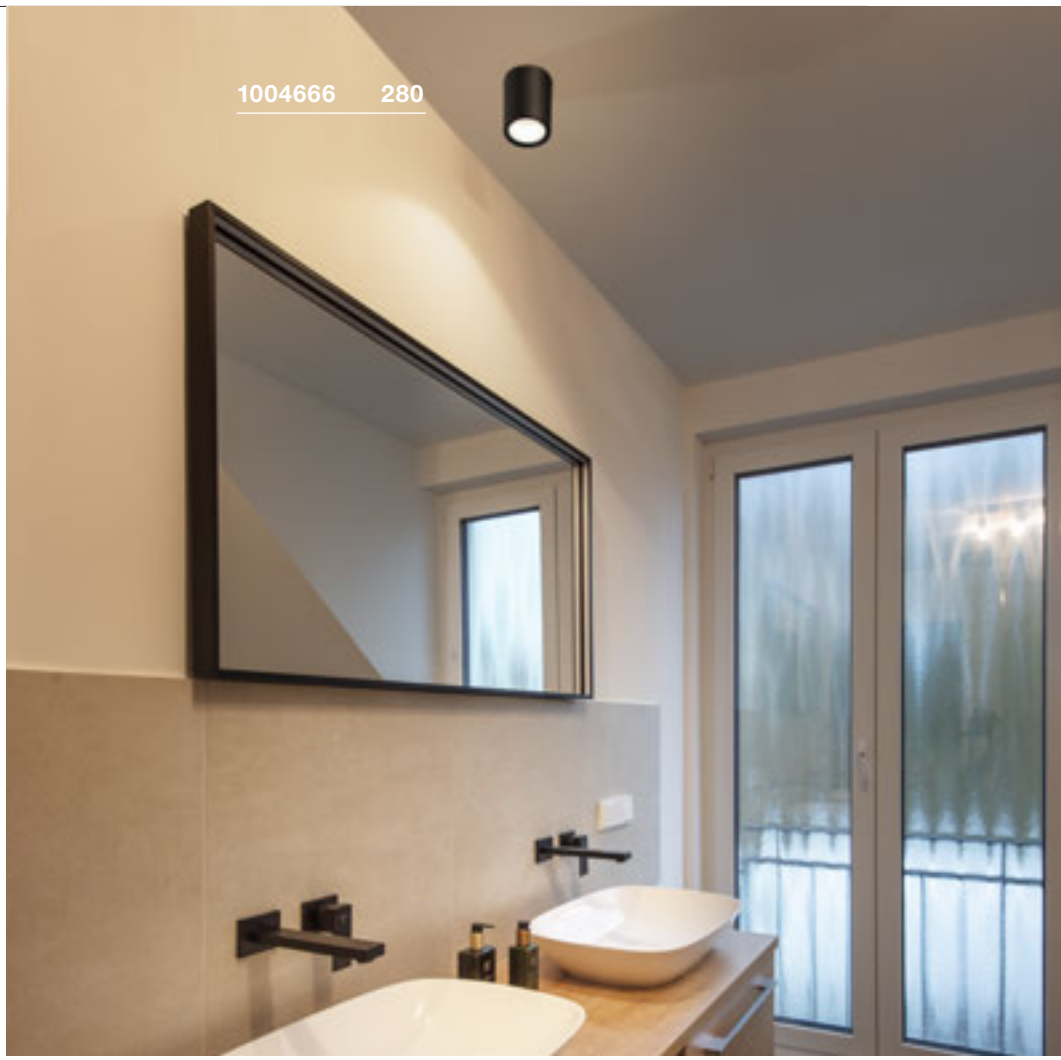




ENOLA B
CL, QPAR51







SOCKET INSIDE <35 W



IP 20

220-240V ~50/60Hz
Material: aluminium

GU10 <35W L: 8.5 cm

LED GU10 51mm | 4W | 36°
4000K | 290lm | EEK=F
4kWh/1000h

Prod. no. 1004974

■ Decorative ring, black
Prod. no. 151840


Options	Prod. no.
1xGU10	
■ black	**151810**
1xGU10	
□ white	**151811**
1xGU10	
■ gold	**151813**

ENOLA C
CL





1020lm
3000K
LED INSIDE CRI 80



IP 20 35° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

		A→G
152101	1020lm 3000K	A G E

Options	Prod. no.
1020lm | 3000K | CRI80	
□ white	**152101**


ENOLA C
CL, PHASE

DIM TO WARM





900lm - 900lm
2000K - 3000K
LED INSIDE CRI 90



C IP 20 35° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/glass

		A→G
1000631	900lm 2000-3000K	A G F

Options	Prod. no.
900lm | 2000-3000K | CRI90	
□ white	**1000631**


PLASTRA
CL, QPAR51







SOCKET INSIDE <35 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel

GU10 <35W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973

Options	Prod. no.
1xGU10	
white	**148004**


PLASTRA
CL, PHASE







990lm
LED INSIDE CRI 80
3000K



C,L IP 20 110° 30 000 Hours L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: plaster/steel

		A→G
148005	990lm 3000K	F

Options	Prod. no.
990lm | 3000K | CRI80	
white	**148005**


PLASTRA 105
CL, E27







SOCKET INSIDE <25 W



IP 20

220-240V ~50/60Hz
Material: plaster/glass


E27 <25W
Diameter: 5 cm L: 14 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289


Options	Prod. no.
2xE27	
white	**148001**

PLASTRA 104
CL, E27





SOCKET INSIDE <25 W



IP 20

220-240V ~50/60Hz
Material: plaster/glass

E27 <25W
Diameter: 5 cm L: 14 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
2xE27	
white	**148002**



FERA 25
CL, DALI






1580lm / 1650lm

INSIDE

CRI 80

3000K / 4000K



Dali IP 20 90° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 19.5W
Material: polycarbonate (PC)/poly (methyl methacrylate) (PMMA)

		A→G
1002968, 1002967	1580/1650lm 3000/4000K	D

Options	Prod. no.
1580/1650lm | 3000/4000K | CRI80	
■ black	**1002968**
1580/1650lm | 3000/4000K | CRI80	
□ white/frosted	**1002967**






FERA 25
CL





1800lm
LED INSIDE
CRI 80
3000K



IP 20 | 100° | L70B50


220-240V ~50/60Hz | 550mA
Total wattage: 23W
Material: aluminium/polystyrene (PS)

		A→G
1001939, 161461	1800lm 3000K	E

Options	Prod. no.
1800lm | 3000K | CRI80	
■ black	**1001939**
1800lm | 3000K | CRI80	
□ white	**161461**


1000808 287


1002936 287

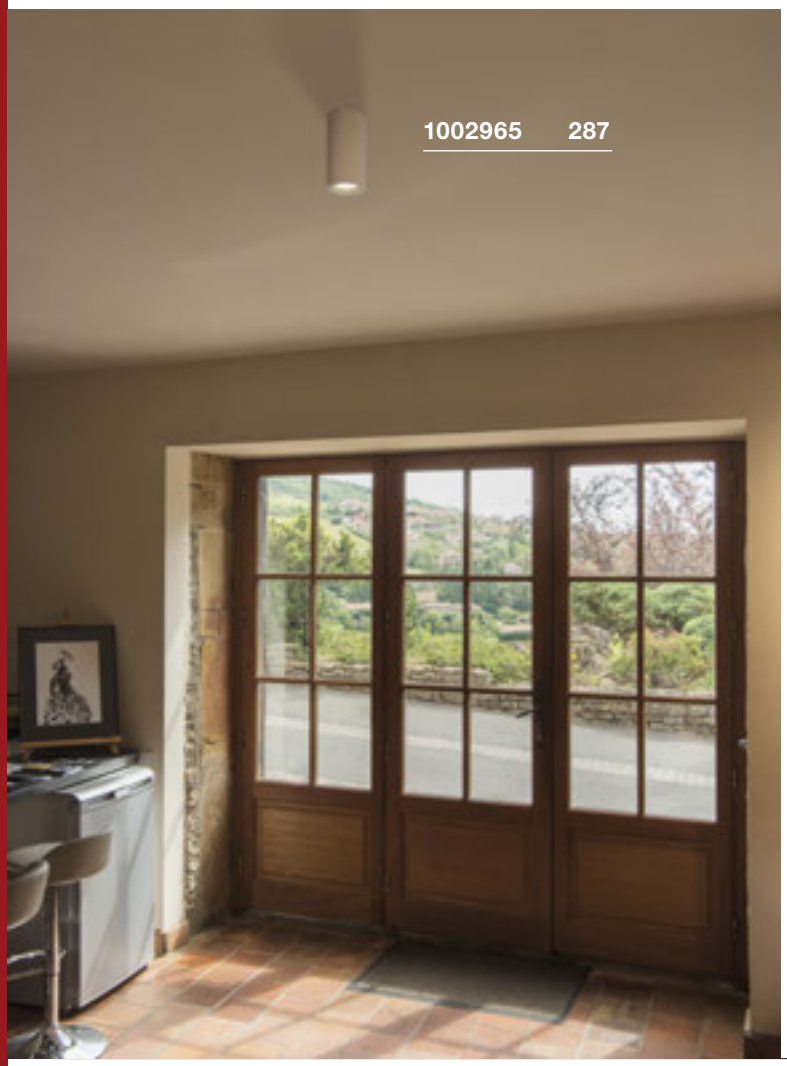
1002965 287


1000807 287


ASTINA
CL, QPAR51







SOCKET INSIDE <10 W



IP 20

220-240V ~50/60Hz
Material: aluminium

GU10 <10W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972


Options	Prod. no.
1xGU10	
black	**1002936**
1xGU10	
white	**1002934**
1xGU10	
grey	**1002935**

NAGY 75
CL, QPAR51





SOCKET INSIDE <10 W



IP 20 IK02

220-240V ~50/60Hz
Material: plaster

GU10 <10W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
1xGU10	
white	**1002965**


ANELA
CL, PHASE







220lm - 750lm
LED INSIDE CRI 90
3000K - 3000K



IP 20 28° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

- Luminous flux with reflector 1000809 = 500lm
  Luminous flux with reflector 1000810 = 620lm
  Luminous flux with reflector 1000811 = 200lm
  Luminous flux with reflector 1000812 = 600lm

1000807, 1000808	220-750lm 3000K	A→G E

Reflector 28°
Prod. no. 1000809

Reflector 28°
Prod. no. 1000810

Reflector 28°
Prod. no. 1000811

Reflector 28°
Prod. no. 1000812

Options	Prod. no.
220-750lm | 3000K | CRI90	
black	**1000807**
220-750lm | 3000K | CRI90	
white	**1000808**


MARONA
WL, PHASE







1200lm
LED INSIDE
3000K
CRI 80



C,L | IP 20 | 120° | L70B50 | LED

200-240V ~50/60Hz | 430mA
Total wattage: 15W
Material: poly (methyl methacrylate) (PMMA)/steel

		A→G
155156	1200lm 3000K	A→G E

Options	Prod. no.
1200lm | 3000K | CRI80	
grey	**155156**

BATO 45
CW, E27










SOCKET INSIDE <60 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel


E27 <60W

LED E27 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h
C,L

Prod. no. 1005305


Options	Prod. no.
1xE27	
black	**1000443**
1xE27	
gold	**1000445**



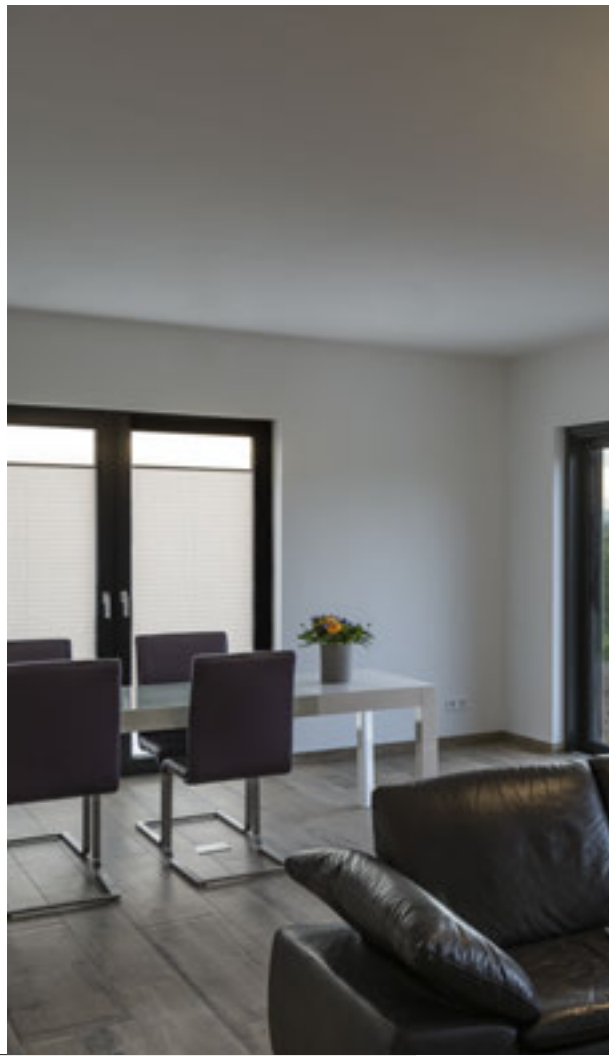



1000443 288

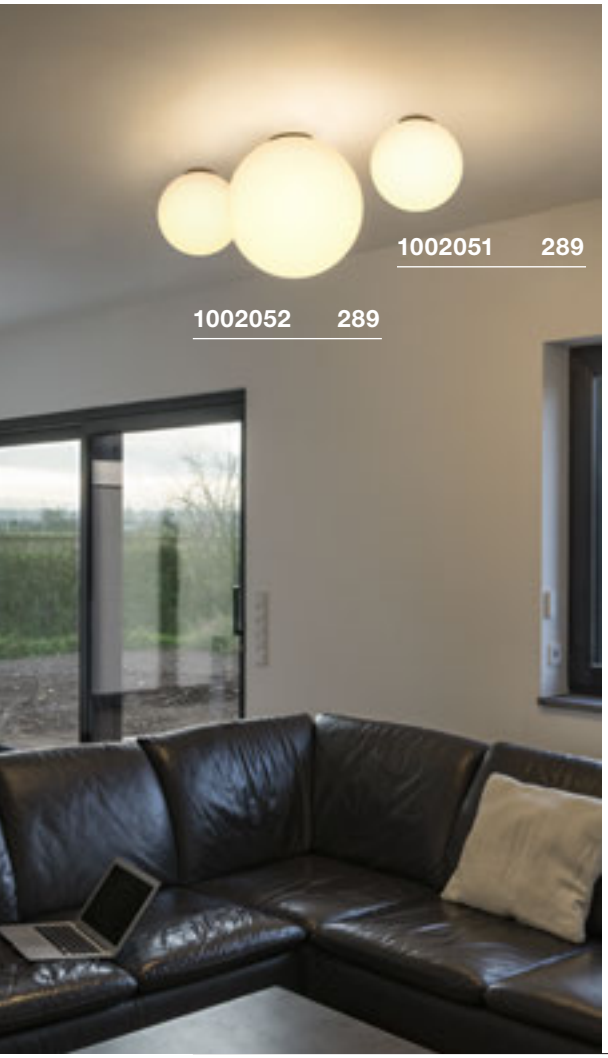


1002051 289

1002052 289

ROTOBALL 25
CL, E27

SOCKET INSIDE <24 W



IP 20

230V ~50Hz
Material: steel/polyethylene (PE)

E27 <24W
Diameter: 6.5 cm


LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
☐ white	**1002051**

ROTOBALL 40
CL, E27

SOCKET INSIDE <24 W



IP 20

230V ~50Hz
Material: steel/polyethylene (PE)

E27 <24W
Diameter: 9.5 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h


Prod. no. 1005302

Options	Prod. no.
1xE27	
☐ white	**1002052** ▼

FOR A RADIANT PERFORMANCE.

COMBINE WALL AND CEILING LIGHTS.

While ceiling lights set the tone for a lighting scheme, wall lights offer individual focus. That is why a combination offers the ideal holistic lighting solution, enabling so many options that there really is no limit to your creativity.

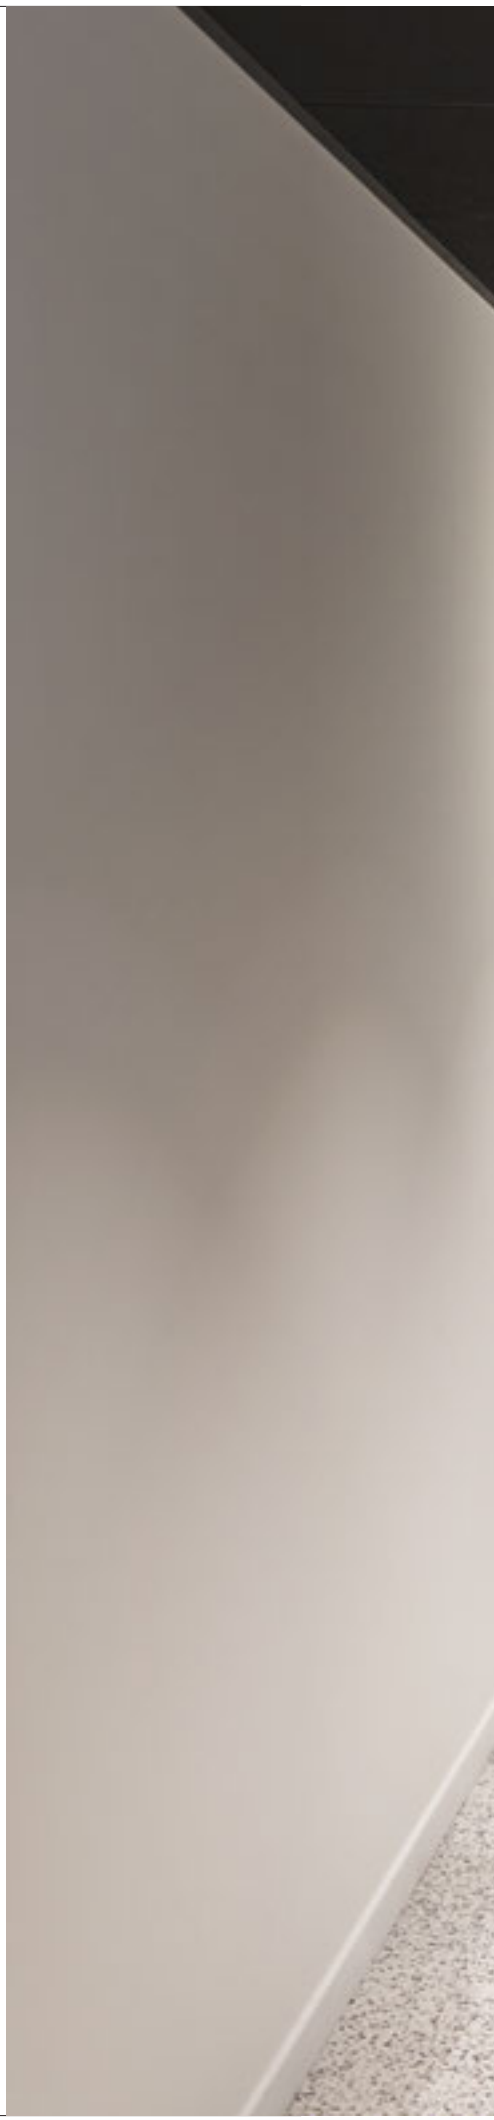


1002919 294

Wall and ceiling lights from the NUMINOS® down and spotlight system can be found on pages 72 to 73. Or for easy online configuration, visit: **www.numinos.slv.com**



1006093 + 1006170 78 + 79

WALL AND CEILING LIGHTS


294

294

295

296

296

296

298

299

299

300

300

300

303

303

303

303

304

304

304

304

307

307

307

308

308

308

311

311

311

312

312

312

312

315

315

315

315

316

316

316

316

318

319

319

319

320

320

320

322

322

323

323

326

326

326

329

329

329

330

330

332

332

333

334

334

336

337

337

339

339

340


340

341

You can find more lights and variants at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lamps', from page 808

ONE 40
CW, DALI




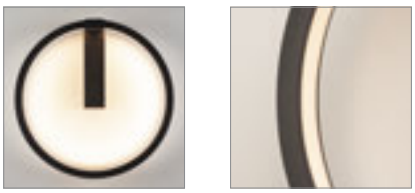

700lm / 730lm

INSIDE CRI 90

3000K / 4000K



Dali IP 20 30 000 Hours LED L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/steel

1002915, 1002917	700/730lm 3000/4000K	A→G A G E

Options	Prod. no.
1350/1430lm | 3000/4000K | CRI90 | Diameter: 40 cm	
■ black	**1002915**
1350/1430lm | 3000/4000K | CRI90 | Diameter: 40 cm	
□ white	**1002917**

ONE 60
WL, DALI






1350lm / 1430lm

INSIDE CRI 90

3000K / 4000K




Dali IP 20 30 000 Hours LED L70B50


220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

1002918, 1002919	1350/1430lm 3000/4000K	A→G A G E

Options	Prod. no.
1350/1430lm | 3000/4000K | CRI90 | Diameter: 60 cm	
■ black	**1002918**
1350/1430lm | 3000/4000K | CRI90 | Diameter: 60 cm	
□ white	**1002919**

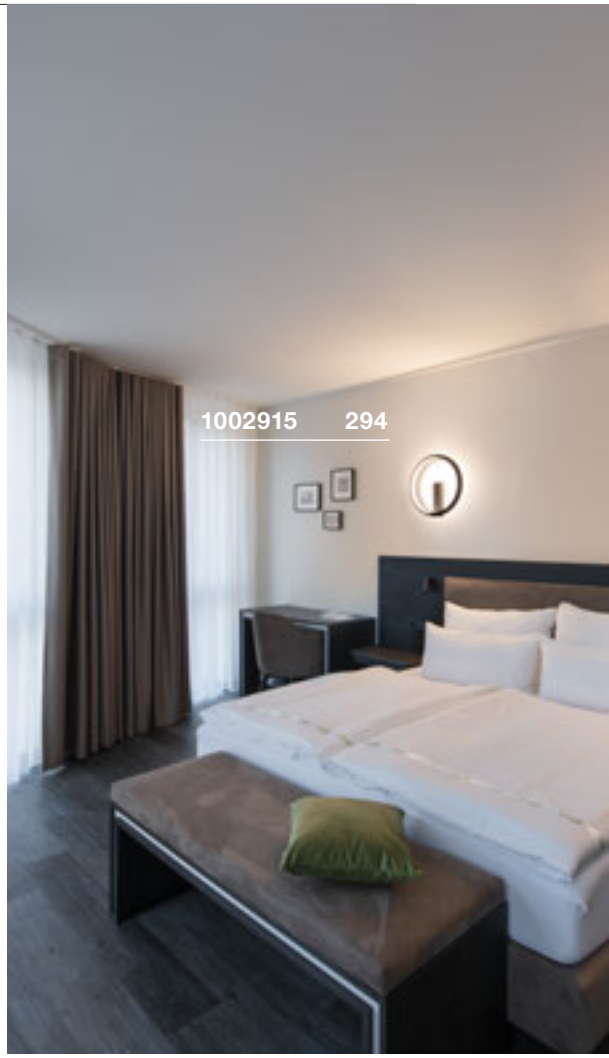




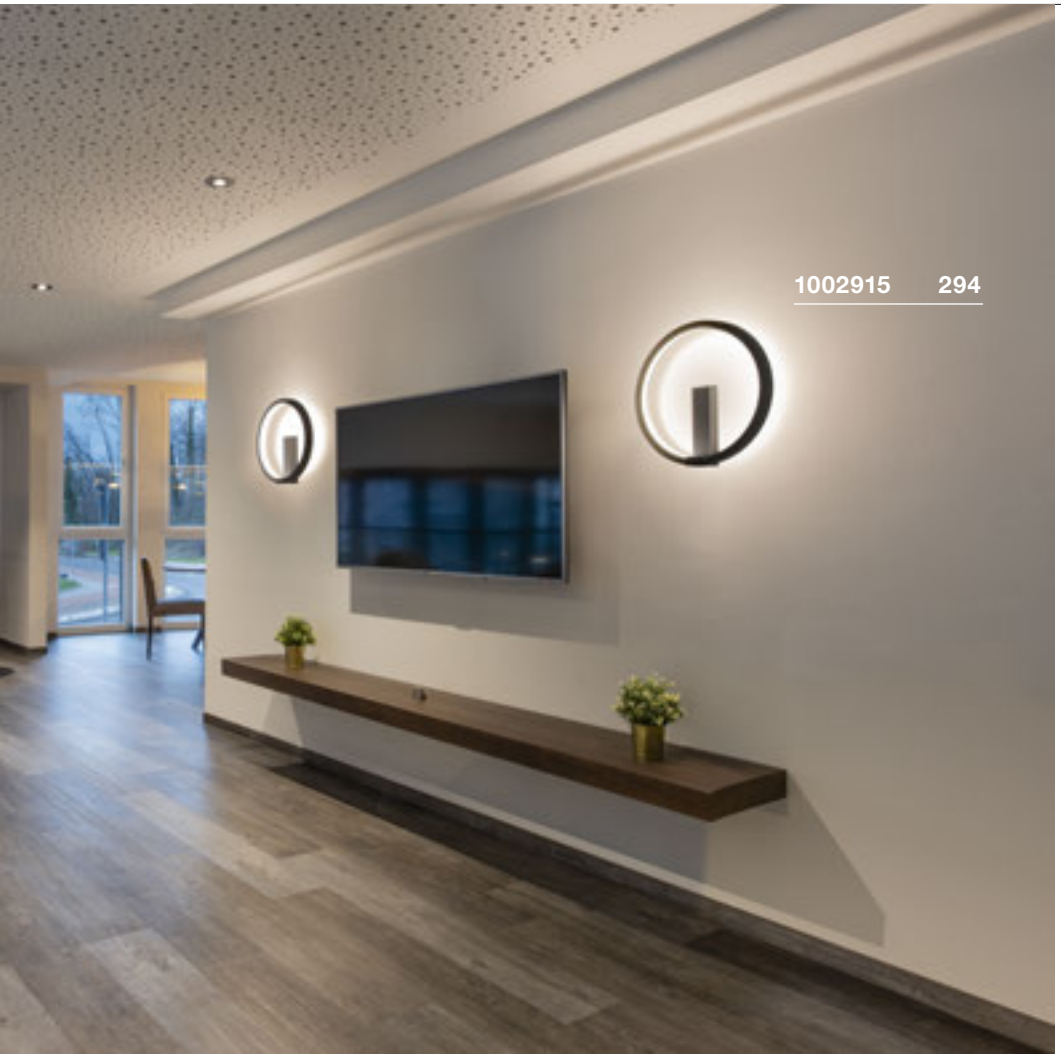






MALANG
CW











100-240V ~50/60Hz | 24V
Total wattage: 39W
Material: aluminium / polyethylene (PE)

- Can be controlled and dimmed with SLV VALETO remote control 1002994 or Gateway 1002411
- Ring light and panel can be controlled separately (Zigbee 3.0)

The energy efficiency class information for this product was not available at the time of printing. The latest product data can always be found at www.slv.com

- Suspension set 1.5m
  Prod. no. 135250
- Suspension set 1.5m
  Prod. no. 135251
- Suspension set 1.5m
  Prod. no. 135254
- Suspension set 5m
  Prod. no. 1001950
- Suspension set 5m
  Prod. no. 1001951
- Suspension set 5m
  Prod. no. 1001952
- SLV VALETO® | Remote control, CCT/RGBW
  Prod. no. 1002994

Options	Prod. no.
Ring: 350lm | RGB+W (3000K) | CRI>80 Panel: 2100-2400lm | 2700-6500K | CRI>80	
white	**1002858**

OCULUS
CW, PHASE








36lm - 780lm

INSIDE CRI 90

2000K - 3000K



IP 20 | 100° | L70B50 | 160° | 180°

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/glass

• Additional frosted lens included


1004664, 1004665	36-780lm 2000-3000K	A→G / F

Options	Prod. no.
36-780lm | 2000-3000K | CRI90	
■ black	**1004664**
36-780lm | 2000-3000K | CRI90	
□ white	**1004665**

KARPO 30
CW, single








560|680lm

INSIDE CRI 90

3000K



IP 20 | 40° | L70B50 | 350° | 90°

220-240V ~50/60Hz | 500mA
Total wattage: 9.3W
Material: aluminium/steel


152330, 152331	560lm | 680lm 3000K	A→G / E

Options	Prod. no.
560lm | 3000K | CRI90	
■ black	**152330**
680lm | 3000K | CRI90	
□ white	**152331**

KARPO 30
CW, single, PHASE








580|660lm

INSIDE CRI 90

3000K



IP 20 | 40° | L70B50 | 350° | 90°

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/steel

1001495, 1001496	580lm | 660lm 3000K	A→G / E

Options	Prod. no.
580lm | 3000K | CRI90	
■ black	**1001495**
660lm | 3000K | CRI90	
□ white	**1001496**



1004664 296



1004665 296



1001495 296


TOTHEE
CW, PHASE







1250lm
INSIDE
CRI 80
3000K



IP 20 | 50° | L70B50 | 350° | 90°

220-240V ~50/60Hz | 350mA
Total wattage: 17W
Material: aluminium/plastic

1000426, 1000427	1250lm 3000K	A→G E

Options	Prod. no.
1250lm | 3000K | CRI80	
black	**1000426**
1250lm | 3000K | CRI80	
white/black	**1000427**








HELIA
CW, single, PHASE







700|820lm
INSIDE
3000K
CRI 90



IP 20 35° L70B50 350° 90°

220-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

156500, 156501	700lm | 820lm 3000K	A→G / A G E

Options	Prod. no.
700lm | 3000K | CRI90	
■ black	**156500**
820lm | 3000K | CRI90	
□ white	**156501**


HELIA
CW, double, PHASE







1200lm
INSIDE
3000K
CRI 90




IP 20 35° L70B50 350° 90°


220-240V ~50/60Hz | 500mA
Total wattage: 17W
Material: aluminium

156510, 156511	1200lm 3000K	A→G / A G E

Options	Prod. no.
1200lm | 3000K | CRI90	
■ black	**156510**
1200lm | 3000K | CRI90	
□ white	**156511**

NOBLO
CW, PHASE

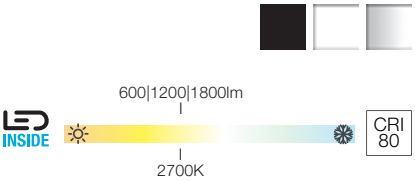






220-240V ~50/60Hz | 350mA
Material: aluminium





NOBLO
CW, single, PHASE






1002969, 1002970, 1002971	600lm 2700K	A→G

Options	Prod. no.
600lm | 2700K | CRI80	
black	**1002969**
600lm | 2700K | CRI80	
white	**1002970**
600lm | 2700K | CRI80	
silver	**1002971**

NOBLO
CW, double, PHASE






1002973, 1002974, 1002975	1200lm 2700K	A→G

Options	Prod. no.
1200lm | 2700K | CRI80	
black	**1002973**
1200lm | 2700K | CRI80	
white	**1002974**
1200lm | 2700K | CRI80	
silver	**1002975**

NOBLO
CW, triple, PHASE





1002976, 1002977, 1002978	1800lm 2700K	A→G


Options	Prod. no.
1800lm | 2700K | CRI80	
black	**1002976**
1800lm | 2700K | CRI80	
white	**1002977**
1800lm | 2700K | CRI90	
silver	**1002978**



1002974 300


1000136 303
1000130 303

KALU
CW, PHASE








220-240V ~50/60Hz | 350mA
Material: aluminium/polycarbonate (PC)

KALU
CW, single, PHASE






1000127, 1000128	1000lm 3000K	A→G / A↑G E

Options	Prod. no.
1000lm | 3000K | 60° | CRI80	
black	**1000127**
1000lm | 3000K | 60° | CRI80	
white/black	**1000128**

KALU
CW, double, PHASE






1000129, 1000130	2000lm 3000K	A→G / A↑G E

Options	Prod. no.
2000lm | 3000K | 60° | CRI80	
black	**1000129**
2000lm | 3000K | 60° | CRI80	
white/black	**1000130**



KALU
CW, triple, PHASE






1000131, 1000132	3000lm 3000K	A→G / A↑G E

Options	Prod. no.
3000lm | 3000K | 60° | CRI80	
black	**1000131**
3000lm | 3000K | 60° | CRI80	
white/black	**1000132**

KALU
CW, quad, PHASE






1000135, 1000136	4000lm 3000K	A→G / A↑G E

Options	Prod. no.
4000lm | 3000K | 60° | CRI80	
black	**1000135**
4000lm | 3000K | 60° | CRI80	
white/black	**1000136**

KALU
CW, QPAR111



SOCKET INSIDE <75 W



220-240V ~50/60Hz
Material: aluminium

GU10 <75W

QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h




Prod. no. 1005274



KALU
CW, single, QPAR111






Options	Prod. no.
1xGU10	
black	**1000702**
1xGU10	
white	**147301**
1xGU10	
aluminium	**147306**

KALU
CW, double, QPAR111






Options	Prod. no.
2xGU10	
black	**1000703**
2xGU10	
white	**147311**
2xGU10	
aluminium	**147316**

KALU
CW, triple, QPAR111






Options	Prod. no.
3xGU10	
black	**1000704**
3xGU10	
white	**147321**
3xGU10	
aluminium	**147326**

KALU
CW, quad, QPAR111






Options	Prod. no.
4xGU10	
black	**1002023**
4xGU10	
white	**1002024**
4xGU10	
aluminium	**1002025**




1002024 304



1000702 304

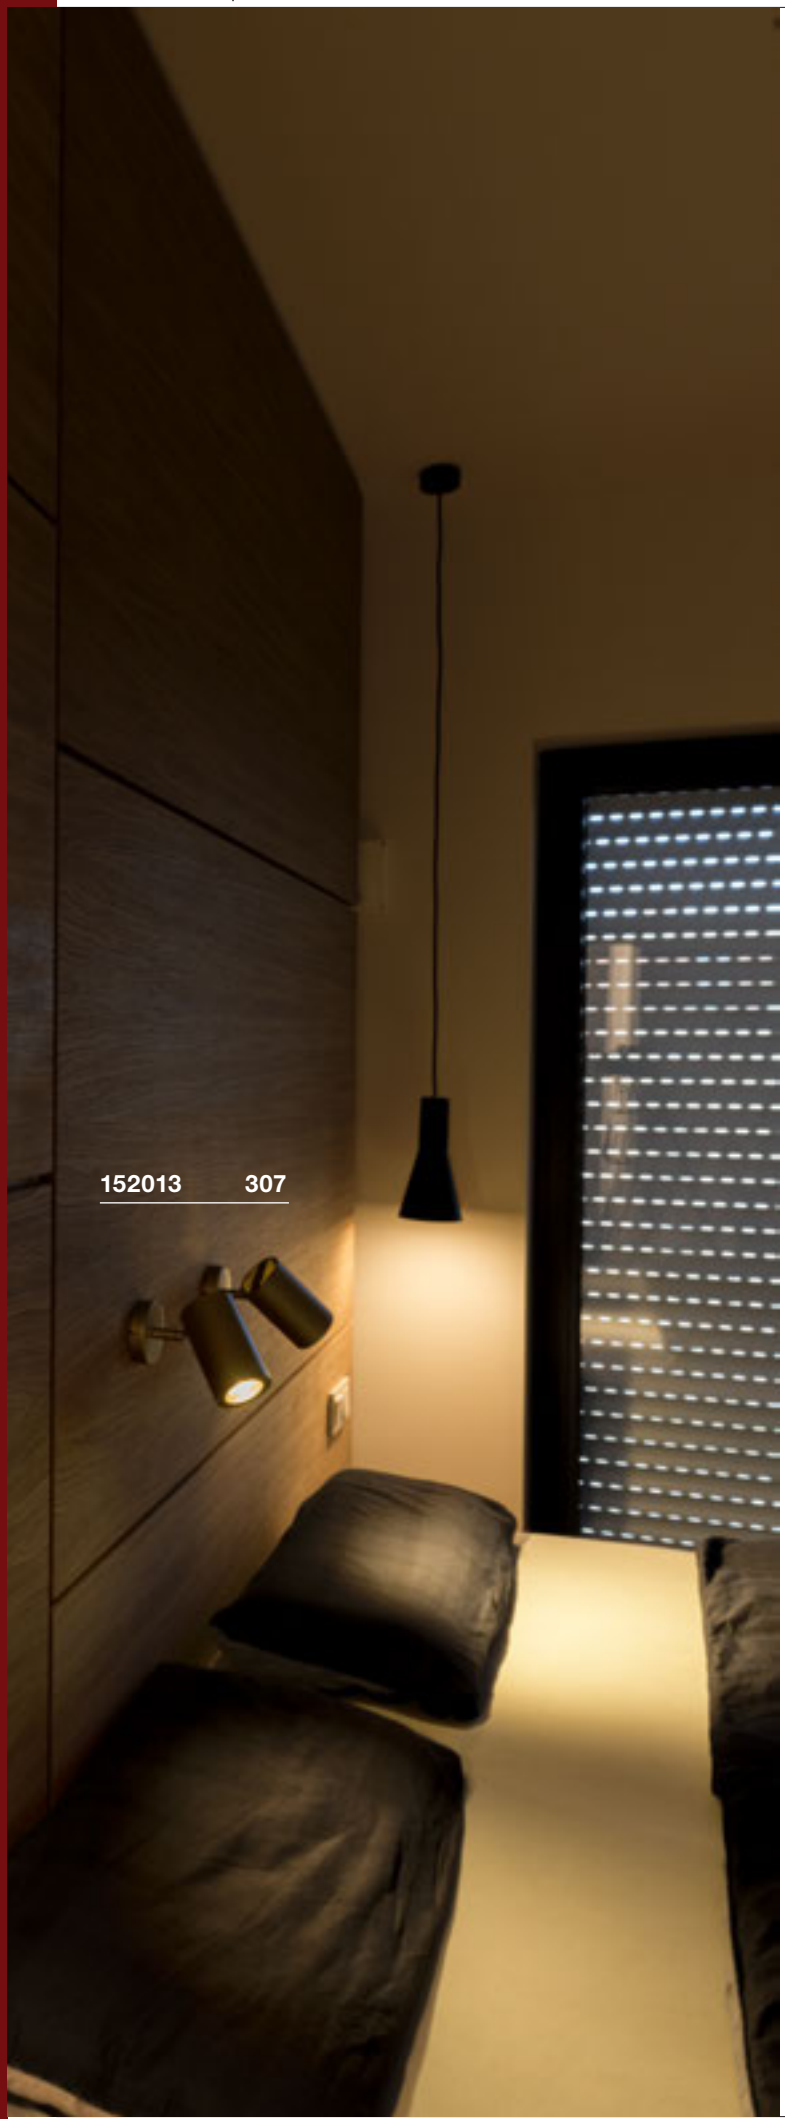


152013 307

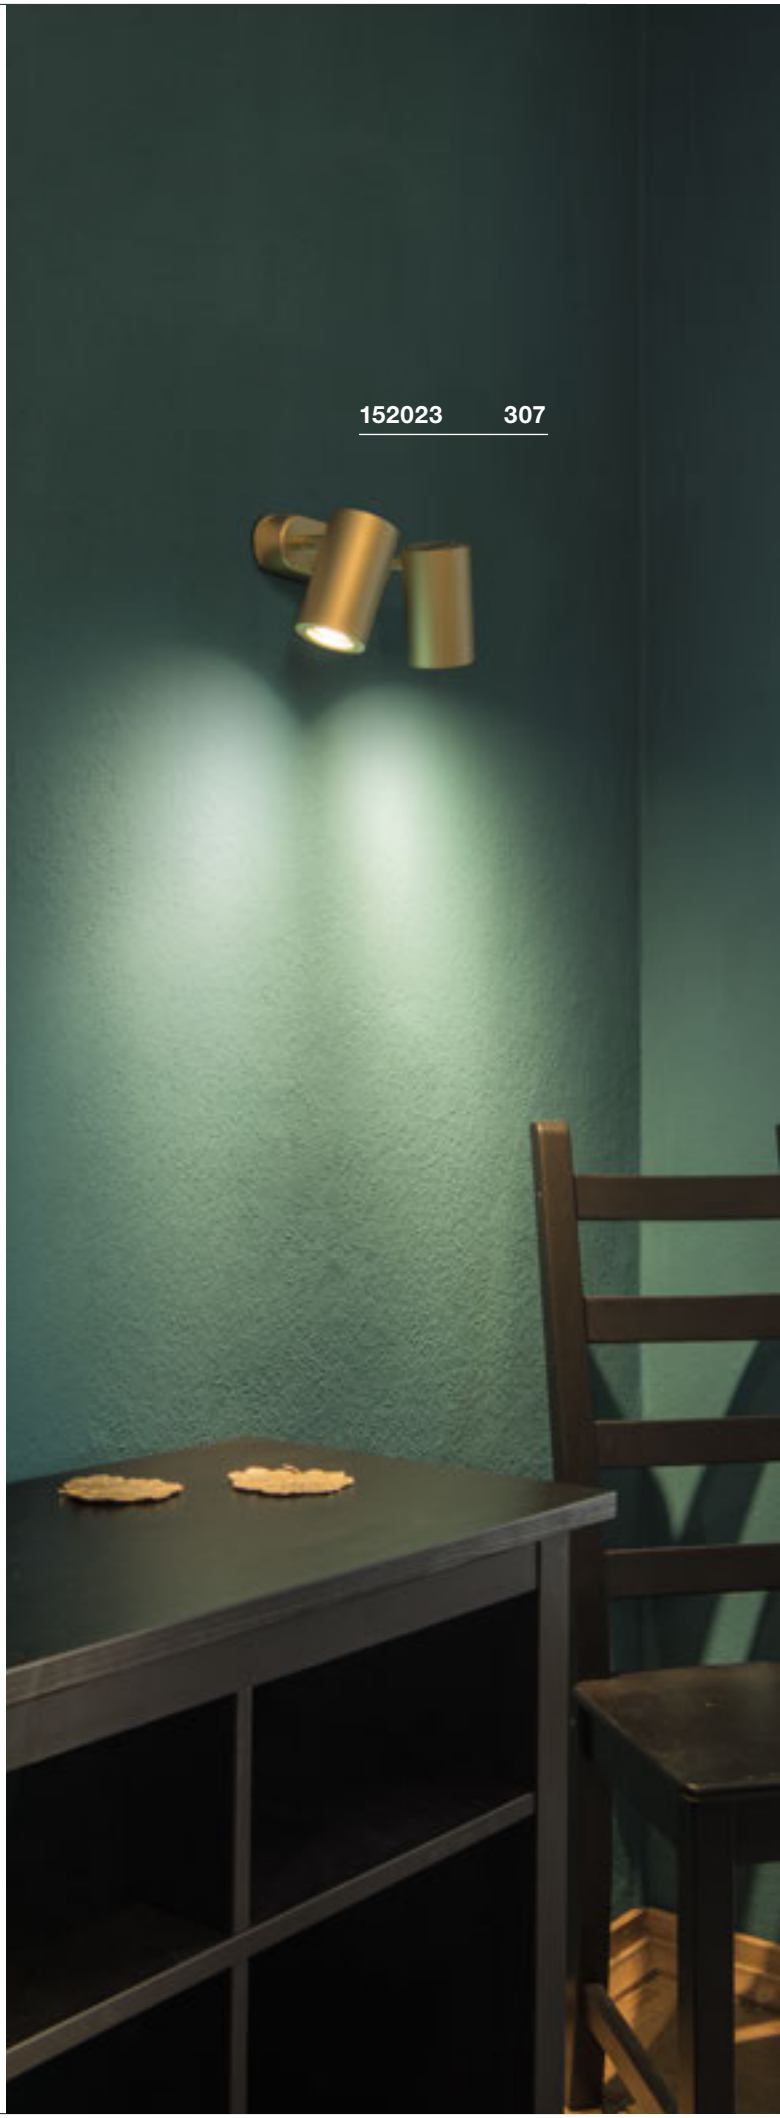

152023 307


ENOLA B
CW, single, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 100°

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring in light color included
- Optional black decorative ring available as an accessory

GU10 <50W L: 6.7 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973

■ Decorative ring, black
Prod. no. 151840

Options	Prod. no.
1xGU10	
■ black	**152010**
1xGU10	
□ white	**152011**
1xGU10	
gold	**152013**


ENOLA B
CW, double, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 100°

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring in light color included
- Optional black decorative ring available as an accessory

GU10 <50W L: 6.7 cm

LED GU10 51mm | 4W | 36°
4000K | 290lm | EEK=F
4kWh/1000h

Prod. no. 1004974

■ Decorative ring, black
Prod. no. 151840

Options	Prod. no.
2xGU10	
■ black	**152020**
2xGU10	
□ white	**152021**
2xGU10	
gold	**152023**


ENOLA B
CW, double, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium/steel

- Decorative ring in light color included
- Optional black decorative ring available as an accessory

GU10 <50W L: 8 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h

Prod. no. 1005079

■ Decorative ring, black
Prod. no. 151840

Options	Prod. no.
2xGU10	
■ black	**151830**
2xGU10	
□ white	**151831**


ALTRA DICE
CW, double, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium/steel

GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
2xGU10	
black	**1002215**
2xGU10	
white	**151531**
2xGU10	
grey/black	**151534**


SPOT 79
CW, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972

Options	Prod. no.
1xGU10	
black	**132020**
1xGU10	
white	**132021**
1xGU10	
grey	**132024**


INDA
CW, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 130°

220-240V ~50/60Hz
Material: aluminium


GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h



Prod. no. 1005078

Options	Prod. no.
1xGU10	
black	**147550**
1xGU10	
white	**147551**
1xGU10	
aluminium	**147559**

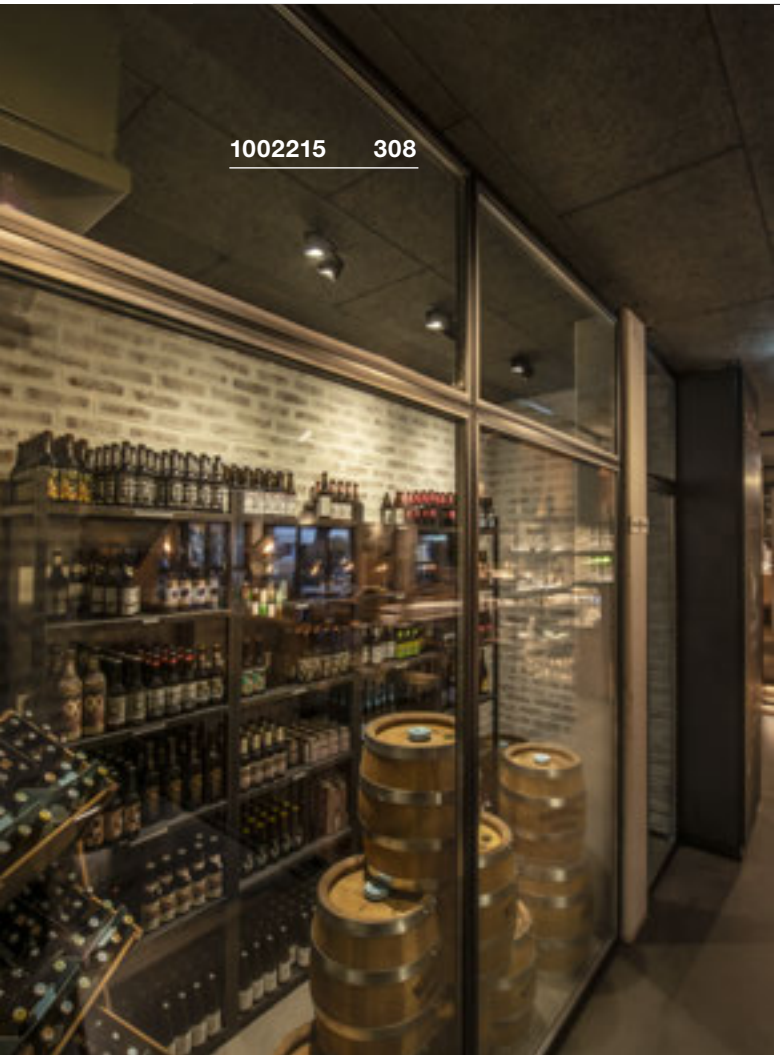
1002215 308


132020 308


147559 308


147414 311

ASTO TUBE

SOCKET INSIDE <50 W

IP 20 350° 90°

230V ~50Hz
Material: aluminium

GU10 50W
Diameter: 6.4 cm L: 8.1 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h


Prod. no. 1004973






ASTO TUBE
CW, single, QPAR51






Options	Prod. no.
1xGU10	
white	**147411** ▼

ASTO TUBE
CW, double, QPAR51






Options	Prod. no.
2xGU10	
white	**147412** ▼

ASTO TUBE
CW, triple, QPAR51





Options	Prod. no.
3xGU10	
white	**147414** ▼

PURI
CW, QPAR51

SOCKET INSIDE <50 W

IP 20 350° 85°

230V ~50Hz
Material: aluminium/steel

• Decorative ring included

GU10 <50W


LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972



PURI
CW, single, QPAR51






Options	Prod. no.
1xGU10	
■ black	**147360**
1xGU10	
□ white	**147361**

PURI
CW, double, QPAR51






Options	Prod. no.
2xGU10	
■ black	**147370**
2xGU10	
□ white	**147371**

PURI
CW, triple, QPAR51






Options	Prod. no.
3xGU10	
■ black	**147380**
3xGU10	
□ white	**147381**

PURI
CW, quad, QPAR51





Options	Prod. no.
4xGU10	
■ black	**1002029**
4xGU10	
□ white	**1002030**


1002030 312


1000892 315
TH
ROOM
114 T/M 121
101


1000887 315

AVO
CW, QPAR51

SOCKET INSIDE <50 W


IP 20 320° 90°

230V ~50Hz
Material: steel

GU10 <50W


LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

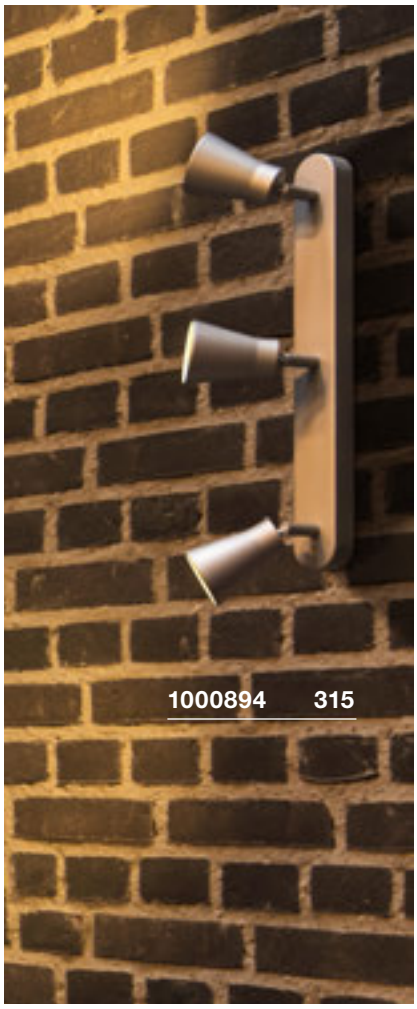

AVO
CW, single, QPAR51






Options	Prod. no.
1xGU10	
■ black	**1000886**
1xGU10	
□ white	**1000887**

AVO
CW, double, QPAR51






Options	Prod. no.
2xGU10	
■ black	**1000889**
2xGU10	
□ white	**1000890**

AVO
CW, triple, QPAR51






Options	Prod. no.
3xGU10	
■ black	**1000892**
3xGU10	
□ white	**1000893**

AVO
CW, quad, QPAR51






Options	Prod. no.
4xGU10	
■ black	**1000895**
4xGU10	
□ white	**1000896**

ASTO
CW, QPAR51







220-240V ~50/60Hz
Material: aluminium

• Decorative ring included

GU10 <75W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h




Prod. no. 1004973



ASTO
CW, single, QPAR51






Options	Prod. no.
1xGU10	
brushed aluminium	**147441**

ASTO
CW, double, QPAR51






Options	Prod. no.
2xGU10	
brushed aluminium	**147442**

ASTO
CW, triple, QPAR51






Options	Prod. no.
3xGU10	
brushed aluminium	**147443**

ASTO
CW, quad, QPAR51





Options	Prod. no.
4xGU10	
brushed aluminium	**147444**

147443 316




FITU
CW, E27







SOCKET INSIDE <60 W



IP 20 330° 120°

220-240V ~50/60Hz
Material: aluminium/steel


E27 <60W

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h


Prod. no. 1005265


Options	Prod. no.
1xE27	
■ black	**1002585**
1xE27	
□ white	**1002584** ▼



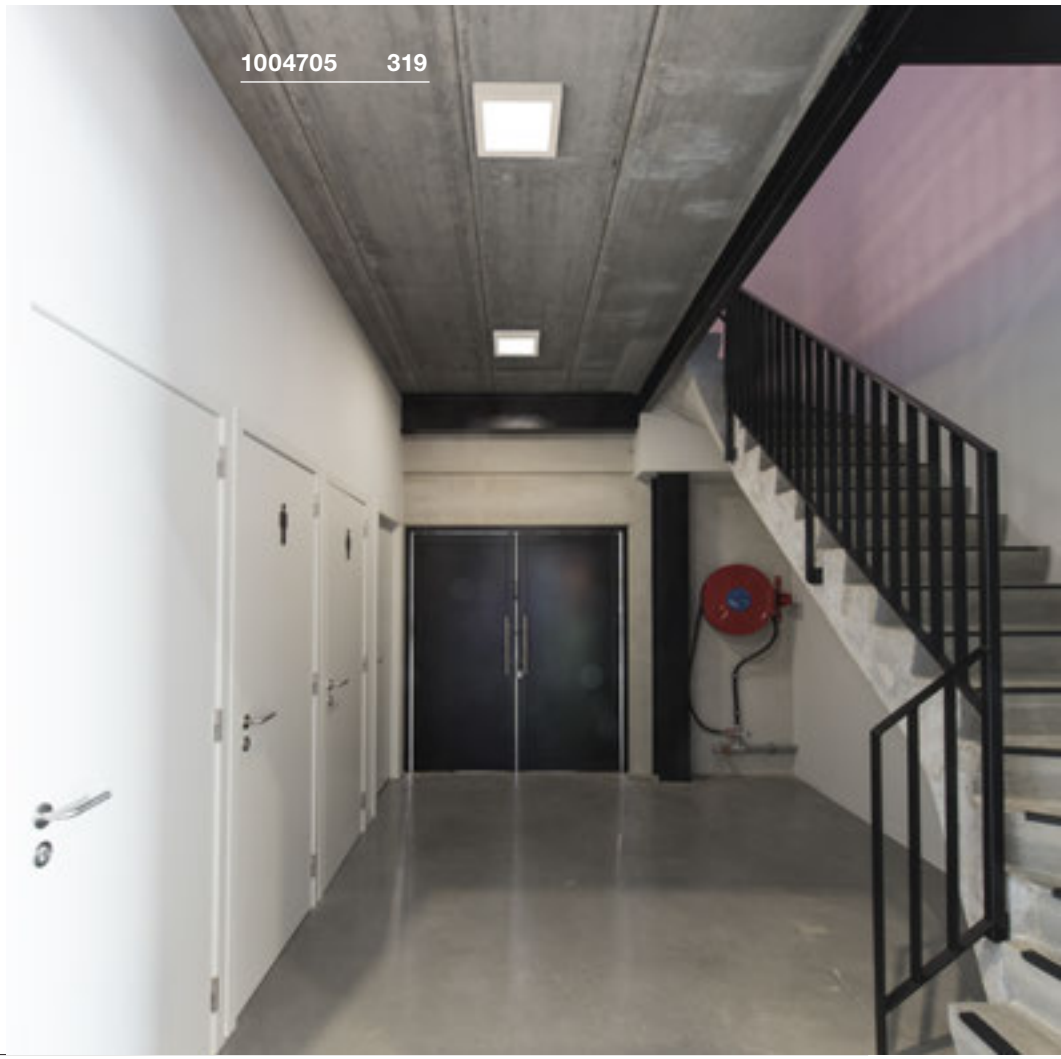

SENSER 12
CW, square, PHASE





IP 20 IK02 L70B50


220-240V ~50/60Hz | 200mA
Total wattage: 8.2W
Material: aluminium


1003017, 1004703	480lm | 440lm 3000K | 4000K	A→G D

Options	Prod. no.
480lm | 3000K | CRI80	
white	**1003017**
440lm | 4000K | CRI80	
white	**1004703**

SENSER 18
CW, square, PHASE







IP 20 IK02 L70B50


220-240V ~50/60Hz | 350mA
Total wattage: 12W
Material: aluminium


1003018, 1004704	880lm 3000K | 4000K	A→G D

Options	Prod. no.
880lm | 3000K | CRI80	
white	**1003018**
880lm | 4000K | CRI90	
white	**1004704**

SENSER 24
CW, square, PHASE








IP 20 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 15W
Material: aluminium

1003019, 1004705	1200lm | 1240lm 3000K | 4000K	A→G D

Options	Prod. no.
1200lm | 3000K | CRI90	
white	**1003019**
1240lm | 4000K | CRI90	
white	**1004705**

SENSER 12
CW, round, PHASE

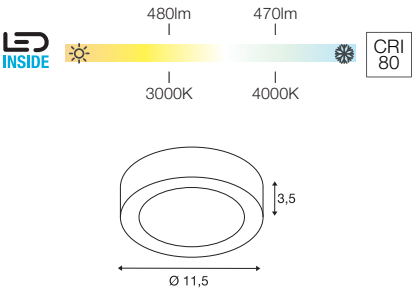

IP 20 IK02 L70B50


220-240V ~50/60Hz | 200mA
Total wattage: 8.2W
Material: aluminium

1003014, 1004700	480lm | 470lm 3000K | 4000K	A→G D

Options	Prod. no.
480lm | 3000K | CRI80	
white	**1003014**
470lm | 4000K | CRI90	
white	**1004700**

SENSER 18
CW, round, PHASE



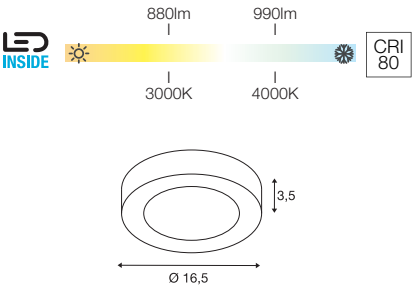

IP 20 IK02 L70B50


220-240V ~50/60Hz | 350mA
Total wattage: 12W
Material: aluminium

1003015, 1004701	880lm | 990lm 3000K | 4000K	A→G D

Options	Prod. no.
880lm | 3000K | CRI80	
white	**1003015**
990lm | 4000K | CRI90	
white	**1004701**

SENSER 24
CW, round, PHASE



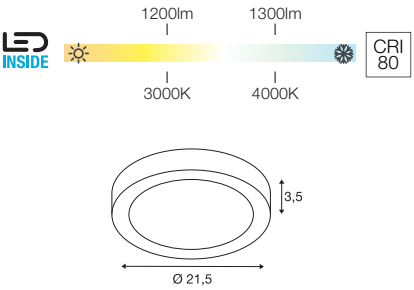

IP 20 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 15W
Material: aluminium

1003016, 1004702	1200lm | 1300lm 3000K | 4000K	A→G D


Options	Prod. no.
1200lm | 3000K | CRI80	
white	**1003016**
1300lm | 4000K | CRI90	
white	**1004702**



1004700/01/02 320

SIMA
CW, round, sensor









IP 44 120° L70B50 12

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: polycarbonate (PC)


1005086	2150lm 3000K	A→G D


Options	Prod. no.
2150lm | 3000K | CRI90	
white	**1005086**

SIMA
CW, round, PHASE











IP 44 120° L70B50 12

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: polycarbonate (PC)

1005085	2150lm 3000K	A→G D

Options	Prod. no.
2150lm | 3000K | CRI90	
white	**1005085**

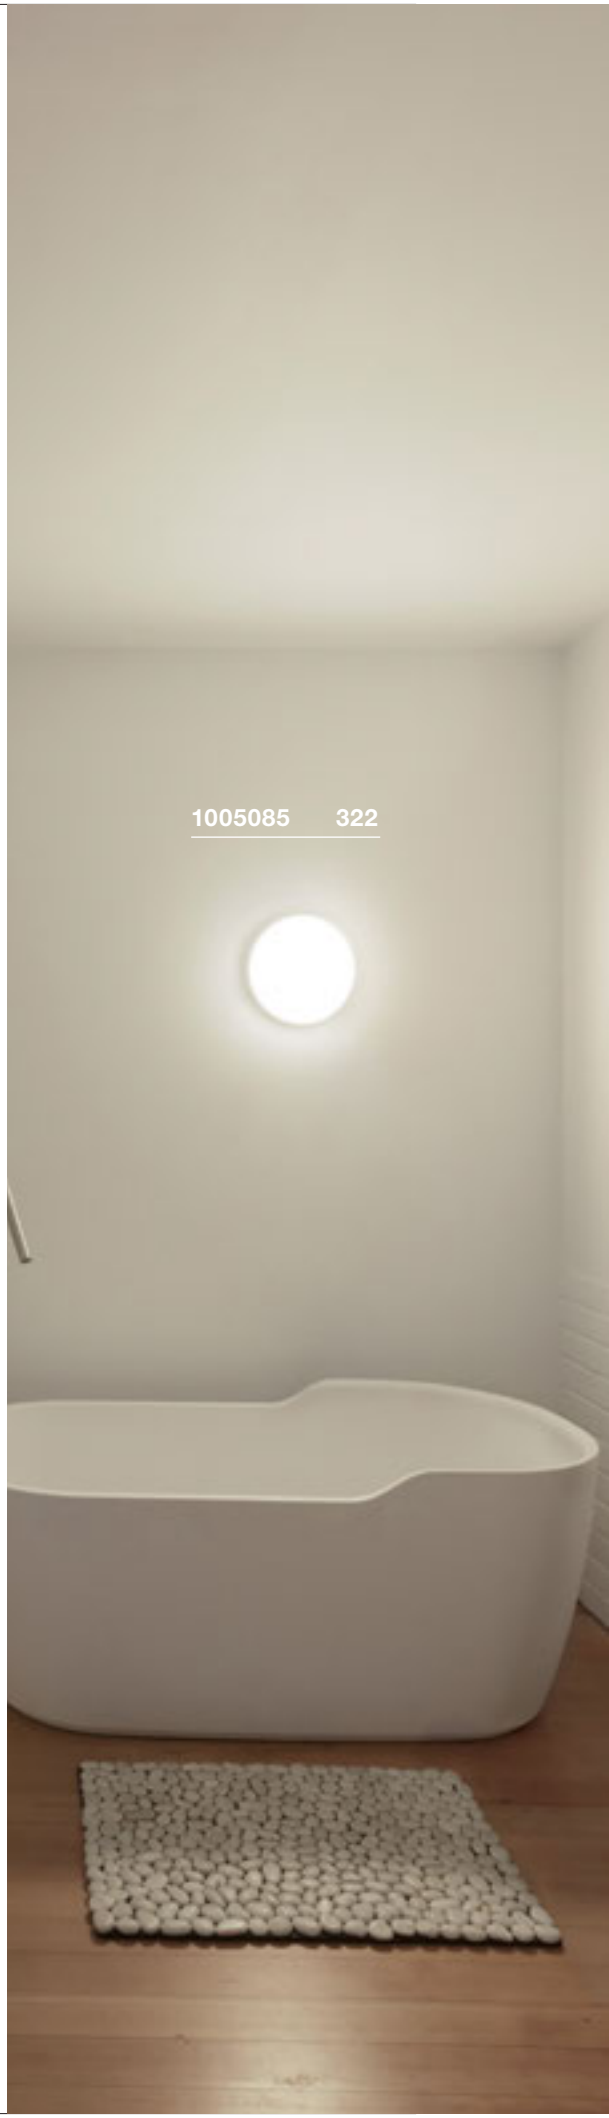

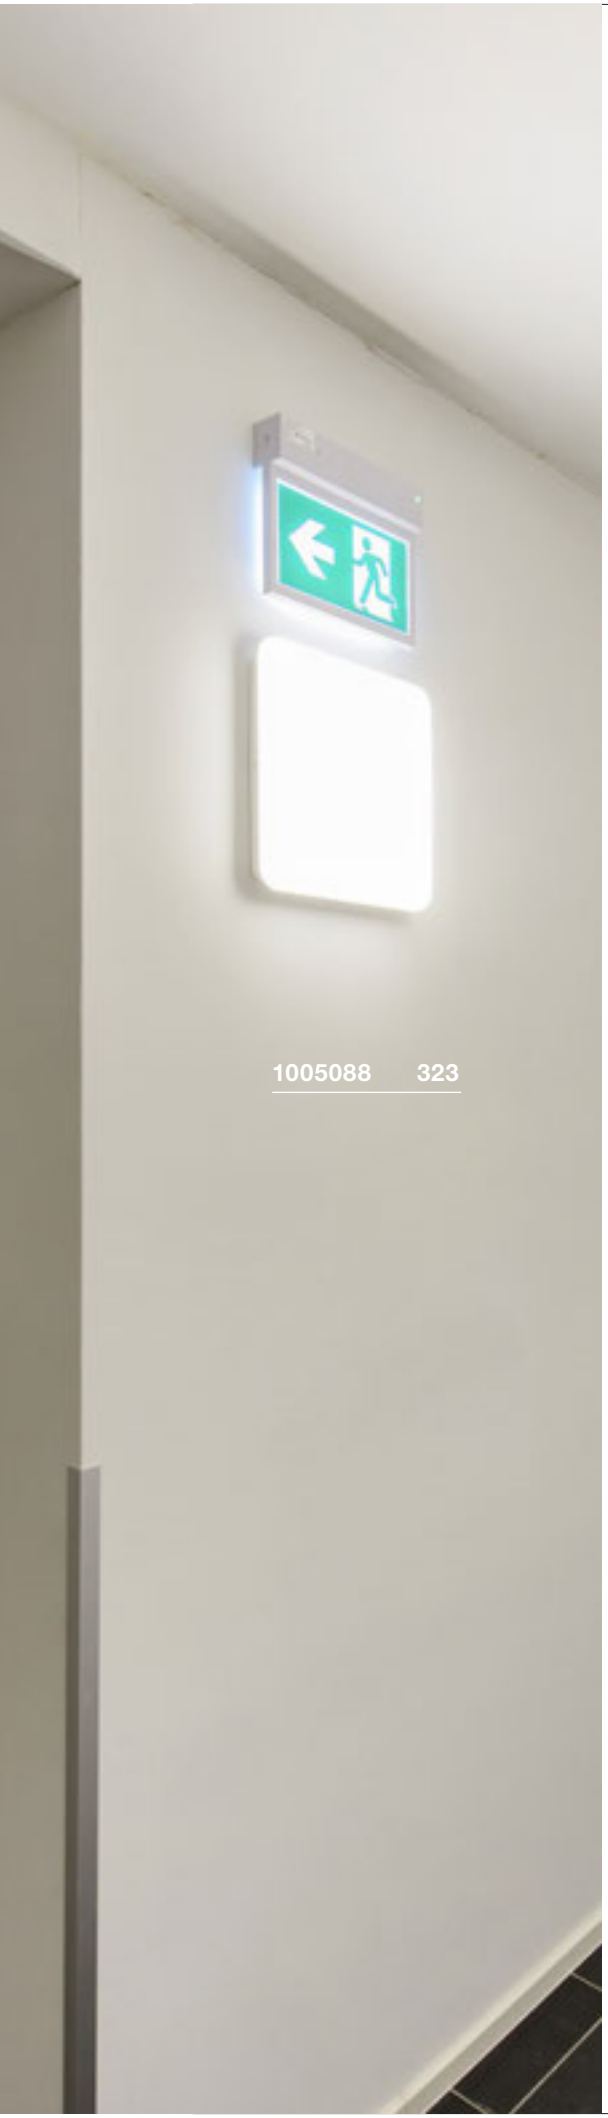


1005088 323

SIMA
CW, square, sensor

MR



2150lm
INSIDE
CRI 90
3000K



IP 44 120° L70B50 12

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: polycarbonate (PC)


		A→G
1005088	2150lm 3000K	D

Options	Prod. no.
2150lm | 3000K | CRI90	
white	1005088

SIMA
CW, square, PHASE



2150lm
INSIDE
CRI 90
3000K



IP 44 120° L70B50 12

220-240V ~50/60Hz | 350mA
Total wattage: 24W
Material: polycarbonate (PC)

		A→G
1005087	2150lm 3000K	D

Options	Prod. no.
2150lm | 3000K | CRI90	
white	1005087

LIPSY® LUMINAIRE FAMILY.
THE COLORS YOU WANT.

	LIPSY® 30 Dome	LIPSY® 40 Dome	LIPSY® 50 Dome	
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	
Sensor	–	–	–	
Size	Diameter: 30 cm	Diameter: 35 cm	Diameter: 40 cm	
Color temperature	3000K | 4000K	3000K | 4000K	3000K | 4000K	**With this LIPSY® variant** you can select/change the color temperature yourself!
Light color	1400/1600lm	1800/2000lm	2200/2400lm	
Control | dimmable	–	–	–	

	LIPSY® 40 CW, Drum, DALI	LIPSY® 50 CW, Drum, DALI	
Example			
Lamp	LED INSIDE CCT	LED INSIDE CCT	
Sensor	–	–	
Size	Diameter: 35 cm	Diameter: 40 cm	
Color temperature	3000K | 4000K	3000K | 4000K	**With this LIPSY® variant** you can select/change the color temperature yourself!
Light color	1800/2000lm	2200/2400lm	
Control | dimmable	DALI	DALI	


	LIPSY® 30 Drum	LIPSY® 40 Drum	LIPSY® 50 Drum	
Example				
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	
Sensor	–	–	–	
Size	Diameter: 30 cm	Diameter: 35 cm	Diameter: 40 cm	
Color temperature	3000K | 4000K	3000K | 4000K	3000K | 4000K	
Light color	1400/1600lm	1800/2000lm	2200/2400lm	
Control | dimmable	–	–	–	**With this LIPSY® variant** you can select/change the color temperature yourself!

LIPSY® 30
CW, Dome





1550lm / 1600lm
INSIDE
CRI 80
3000K / 4000K



IP 44 110° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 13.5W
Material: aluminium/polycarbonate (PC)

1002020	1550/1600lm 3000/4000K


Energy label: A→G, D

Options	Prod. no.
1550/1600lm | 3000/4000K | CRI80	
white	1002020

LIPSY® 40
CW, Dome



2050lm / 2200lm
INSIDE
CRI 80
3000K / 4000K



IP 44 110° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 17.5W
Material: aluminium/polycarbonate (PC)

1002021	2050/2200lm 3000/4000K


Energy label: A→G, C

Options	Prod. no.
2050/2200lm | 3000/4000K | CRI80	
white	1002021

LIPSY® 50
CW, Dome



2500lm / 2700lm
INSIDE
CRI 80
3000K / 4000K




IP 44 110° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)

1002022	2500/2700lm 3000/4000K

Energy label: A→G, C

Options	Prod. no.
2500/2700lm | 3000/4000K | CRI80	
white	1002022

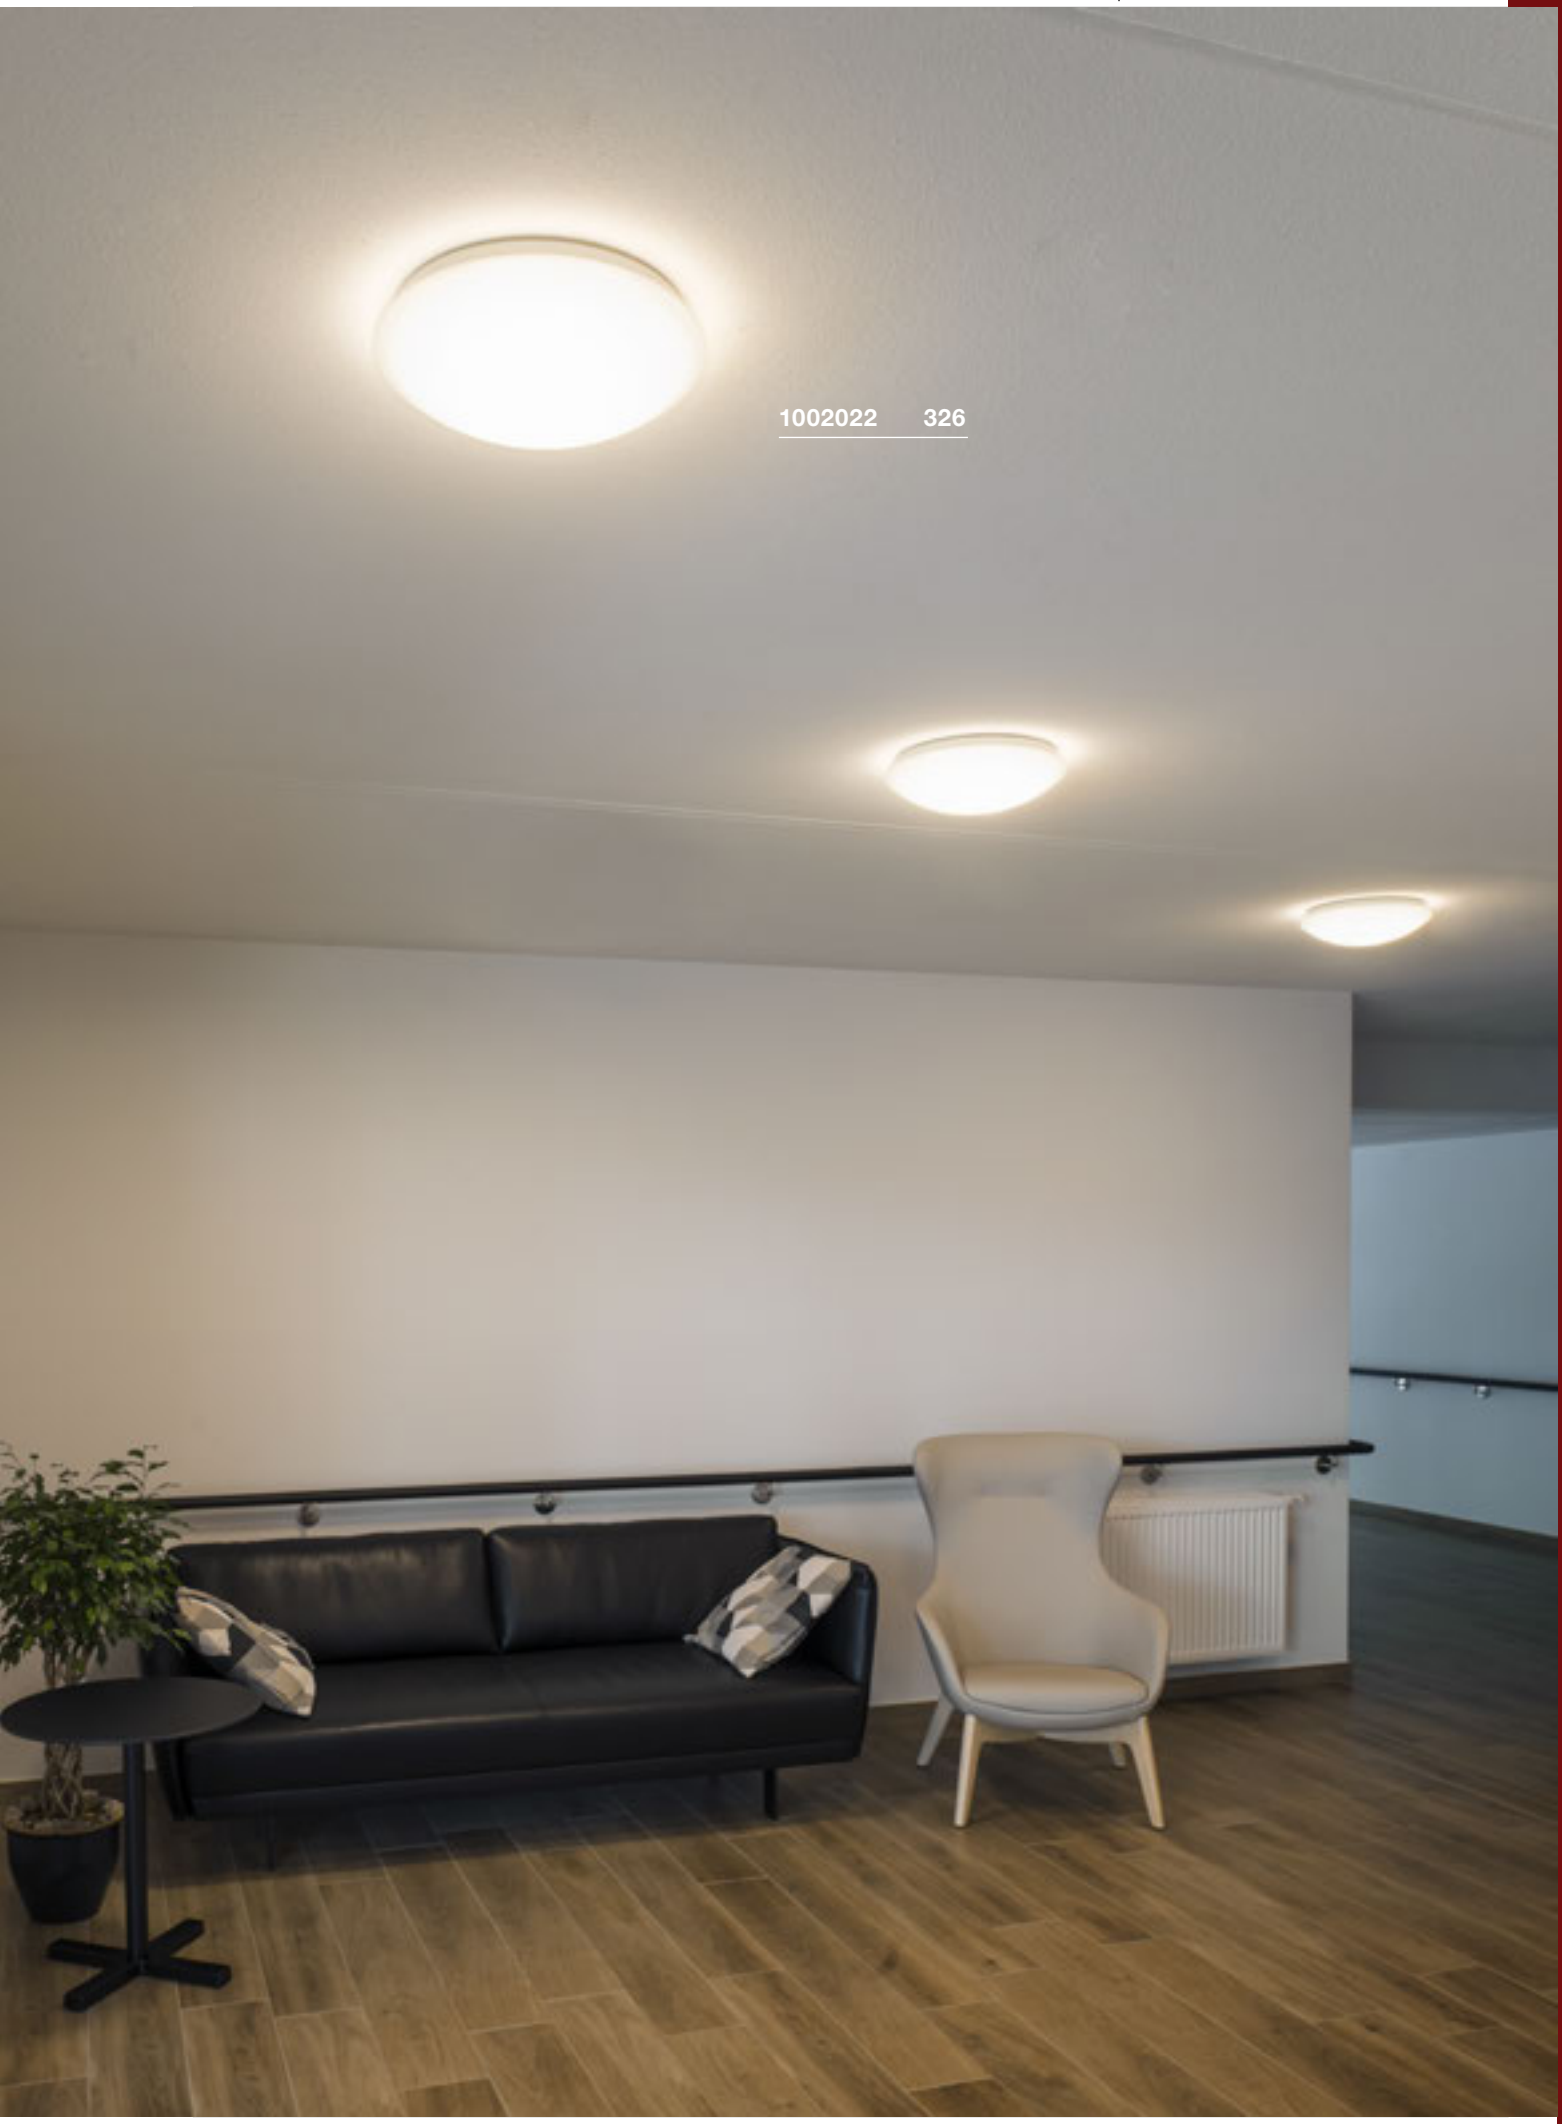

1002022 326


1002076 329

LIPSY® 30
CW, Drum



1600lm / 1650lm
INSIDE
CRI 80
3000K / 4000K



IP 44 120° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 13.5W
Material: aluminium/polycarbonate (PC)


1002075	1600/1650lm 3000/4000K	A→G D

Options	Prod. no.
1600/1650lm | 3000/4000K | CRI80	
white	1002075

LIPSY® 40
CW, Drum



2100lm / 2300lm
INSIDE
CRI 80
3000K / 4000K



IP 44 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 17.5W
Material: aluminium/polycarbonate (PC)


1002076	2100/2300lm 3000/4000K	A→G C

Options	Prod. no.
2100/2300lm | 3000/4000K | CRI80	
white	1002076

LIPSY® 50
CW, Drum



2450lm / 2600lm
INSIDE
CRI 80
3000K / 4000K



IP 44 120° L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/polycarbonate (PC)


1002077	2450/2600lm 3000/4000K	A→G C


Options	Prod. no.
2450/2600lm | 3000/4000K | CRI80	
white	1002077

LIPSY® 40
CW, Drum, DALI










220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

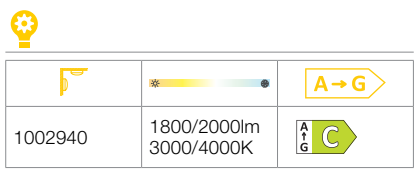



1002940	1800/2000lm 3000/4000K	A→G A↑G C


Options	Prod. no.
1800/2000lm | 3000/4000K | CRI90	
white	**1002940**

LIPSY® 50
CW, Drum, DALI












220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)

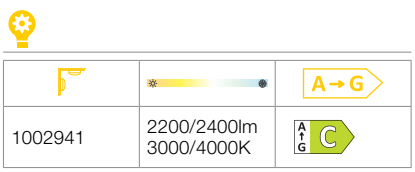

1002941	2200/2400lm 3000/4000K	A→G A↑G C

Options	Prod. no.
2200/2400lm | 3000/4000K | CRI80	
white	**1002941**

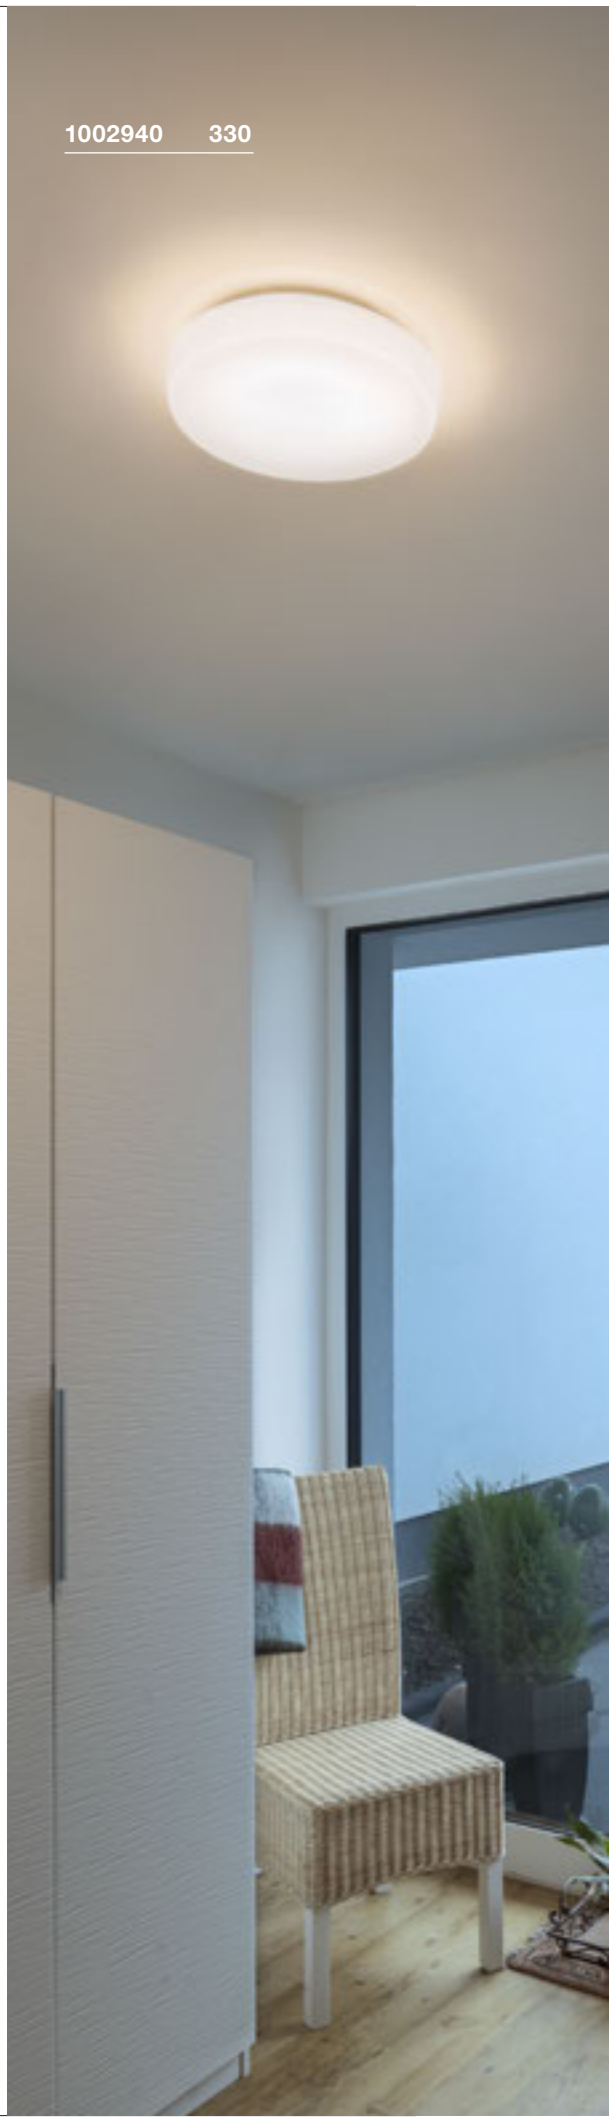

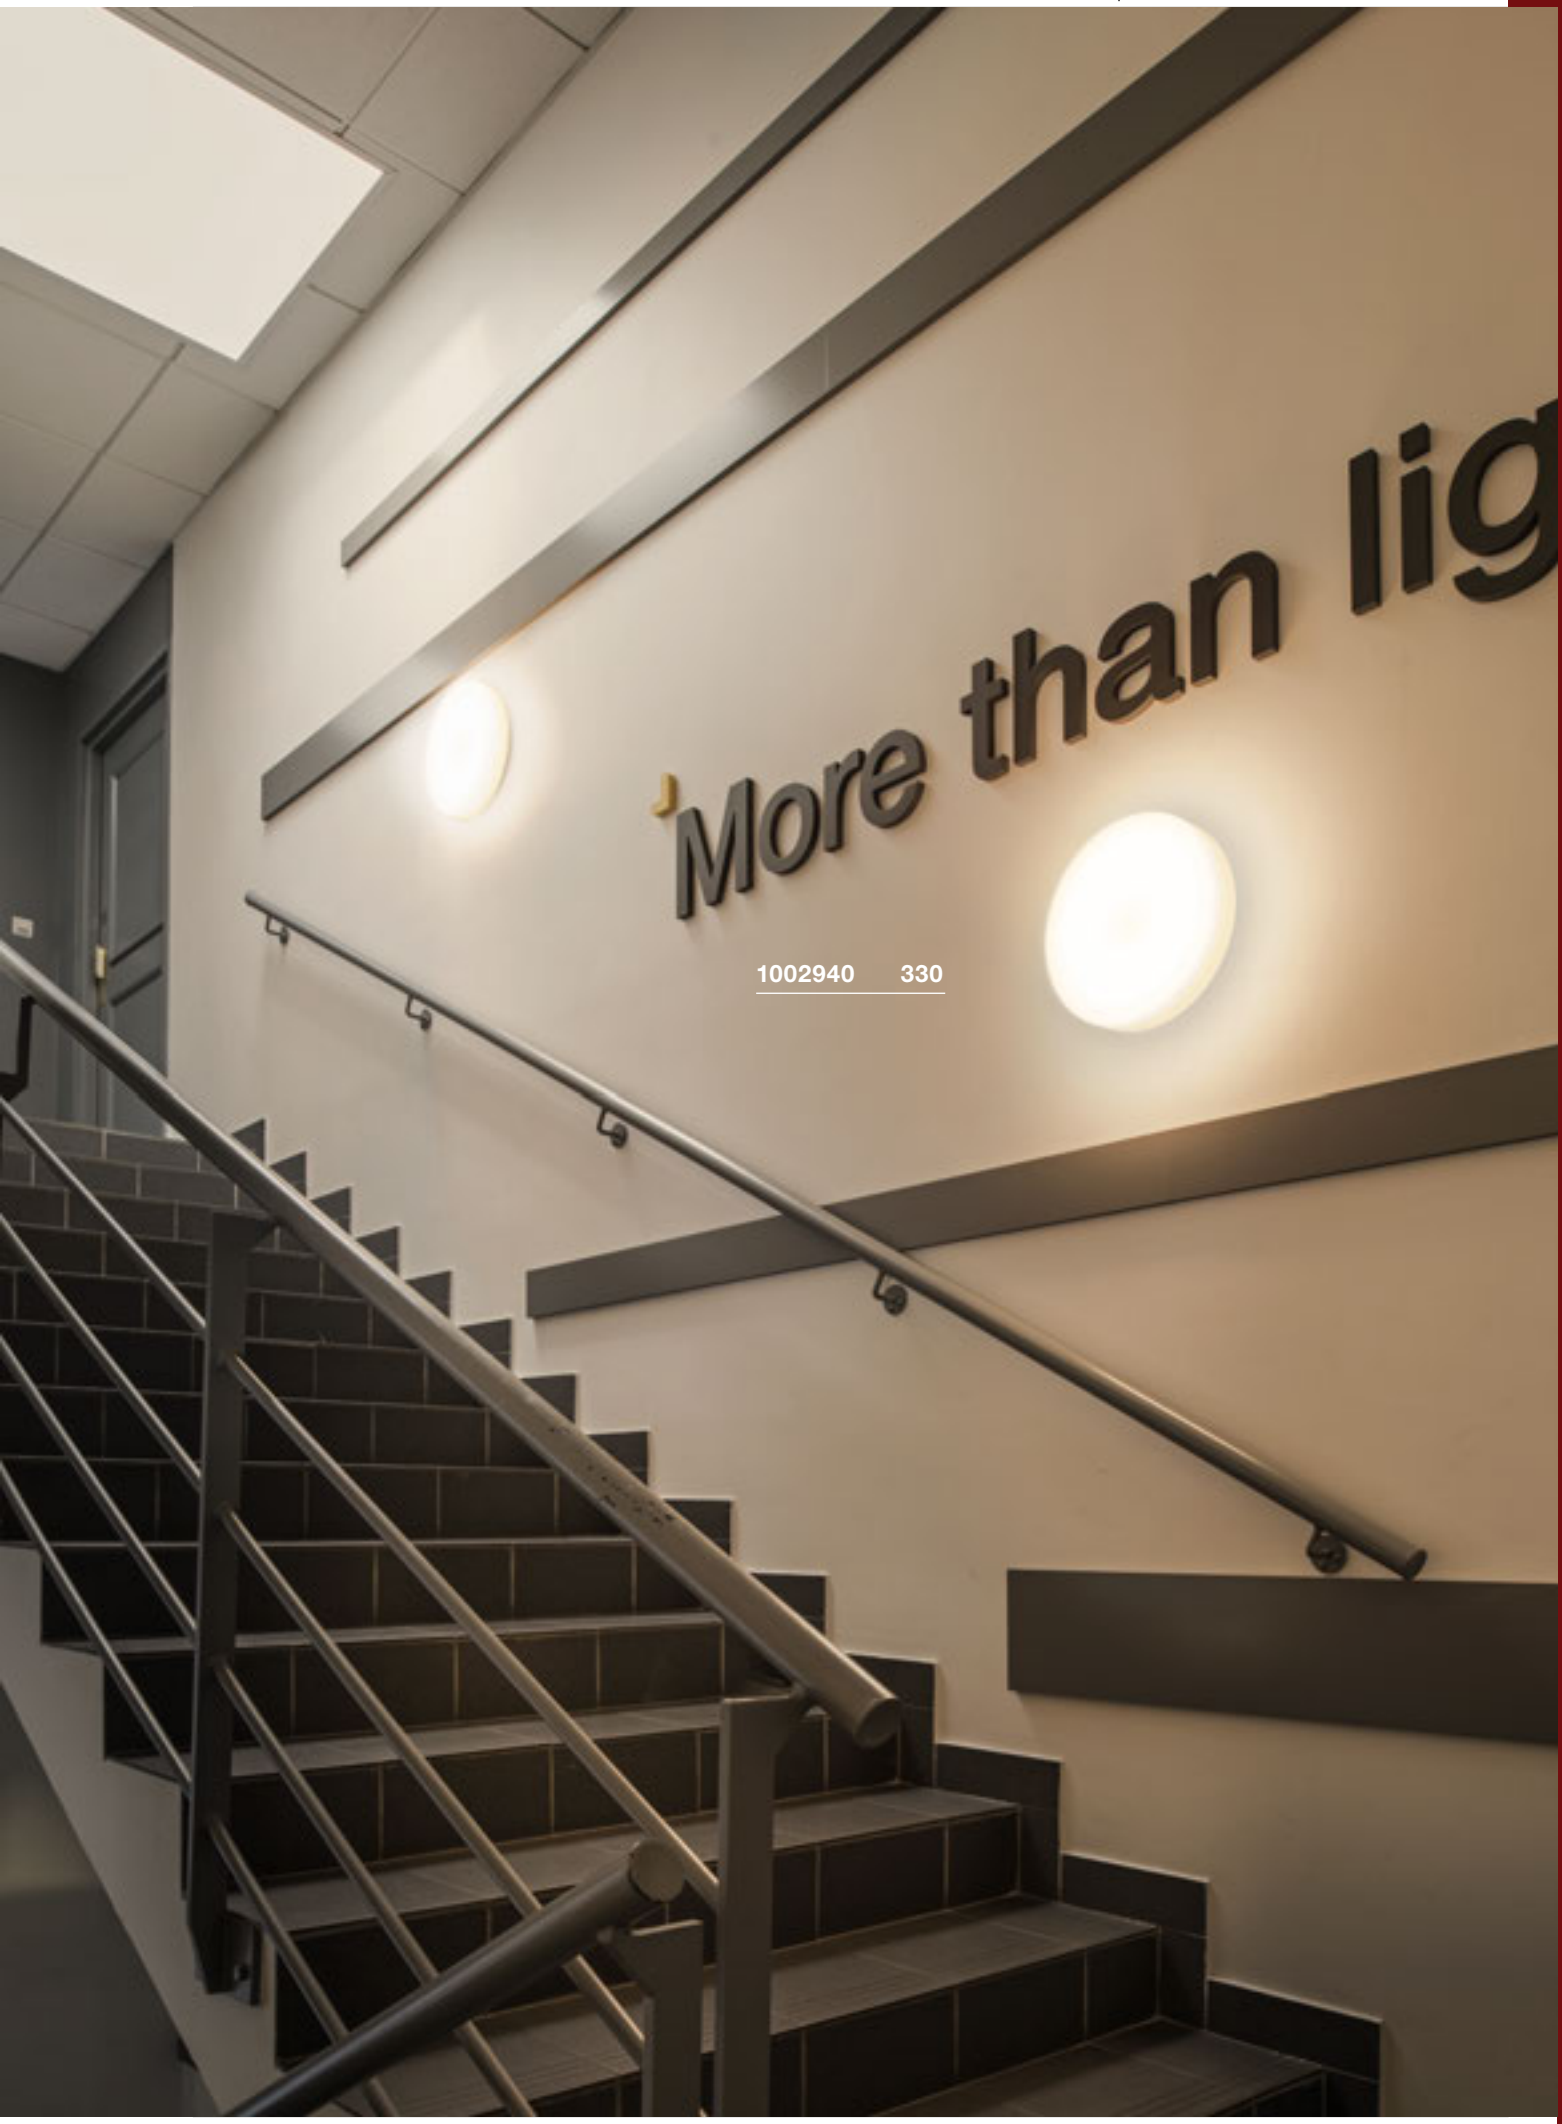


1002940 330

MELAN
CW, E27





SOCKET INSIDE  <60 W



IP 20

230V ~50Hz
Material: aluminium/glass

E27 <60W
Diameter: 7 cm L: 16 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
1xE27	
aluminium	**155236**


GLASSA
CW, square, E27







SOCKET INSIDE  <60 W



IP 20

220-240V ~50/60Hz
Material: steel/glass

E27 <60W
Diameter: 4.8 cm L: 14.8 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
2xE27	
silver	**155180**







BATO 35
CW, E27










SOCKET INSIDE  <60 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

E27 <60W

LED E27 | 7.5W | 180°
2700K | 720lm | EEK=F
8kWh/1000h


Prod. no. 1005305

Options	Prod. no.
1xE27	
black	**1000746**
1xE27	
brass	**1000748**


BATTEN 60
CW

NEW



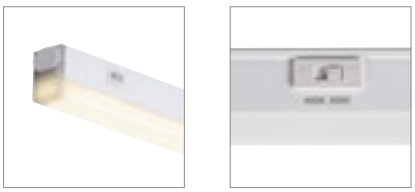

940lm 980lm
INSIDE CRI 90
3000/4000K 3000/4000K



IP 20 L70B50 10

220-240V ~50/60Hz | 110mA
Total wattage: 9W
Material: polycarbonate (PC)

1006123	940/980lm 3000/4000K	A→G

Options	Prod. no.
940/980lm | 3000/4000K | CRI90	
white	**1006123**


BATTEN 120
CW

NEW





1900lm 1960lm
INSIDE CRI 90
3000/4000K 3000/4000K



IP 20 L70B50 10

220-240V ~50/60Hz | 220mA
Total wattage: 18W
Material: polycarbonate (PC)

1006124	1900/1960lm 3000/4000K	A→G

Options	Prod. no.
1900/1960lm | 3000/4000K | CRI90	
white	**1006124**

Feed-in cable
Polyvinyl chloride (PVC)
150 cm cable length



Options	Prod. no.
white	**1006125**

Mounting clips
Polyvinyl chloride (PVC)



Options	Prod. no.
white	**1006126**

Cable connector
Polyvinyl chloride (PVC)
60 cm cable length



Options	Prod. no.
white	**1006127**

Direct connector
Polyvinyl chloride (PVC)
60 cm cable length



Options	Prod. no.
white	**1006128**



1006124 334


LONG GRILL
CW











IP 20 | 110° | L70B50 | 270°

220-240V ~50/60Hz | 700mA
Total wattage: 20W
Material: aluminium/acrylic

		A→G
1001020, 1001019	1600lm 3000K	E


Options	Prod. no.
1600lm | 3000K | CRI80	
black	**1001020**
1600lm | 3000K | CRI80	
white	**1001019**






SIGHT 60
CW



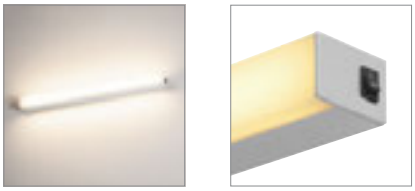

1490lm
INSIDE
CRI 80
3000K




IP 20 | 120° | 28 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 20W
Material: aluminium/acrylic


1001283, 1001284, 1001285	1490lm 3000K	A→G A E

Options	Prod. no.
1490lm | 3000K | CRI80	
black	**1001283**
1490lm | 3000K | CRI80	
white	**1001284**
1490lm | 3000K | CRI80	
grey	**1001285**

SIGHT 115
CW

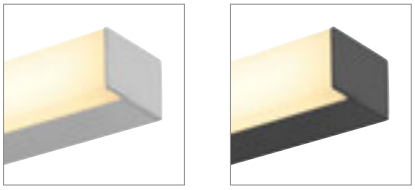

3100lm
INSIDE
CRI 80
3000K





IP 20 | 120° | 28 | L70B50


220-240V ~50/60Hz | 700mA
Total wattage: 38W
Material: aluminium/acrylic

1001286, 1001287, 1001288	3100lm 3000K	A→G A E

Options	Prod. no.
3100lm | 3000K | CRI80	
black	**1001286**
3100lm | 3000K | CRI80	
white	**1001287**
3100lm | 3000K | CRI80	
grey	**1001288**

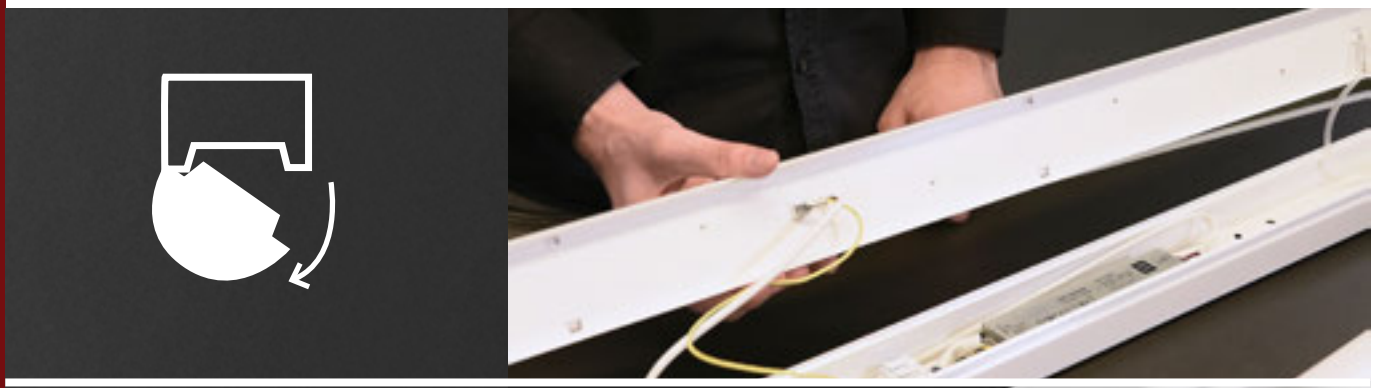


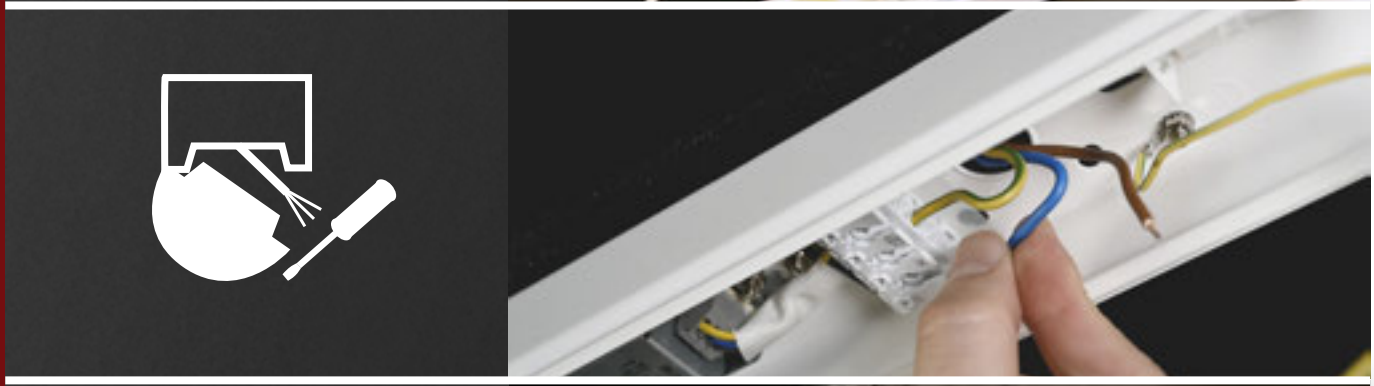

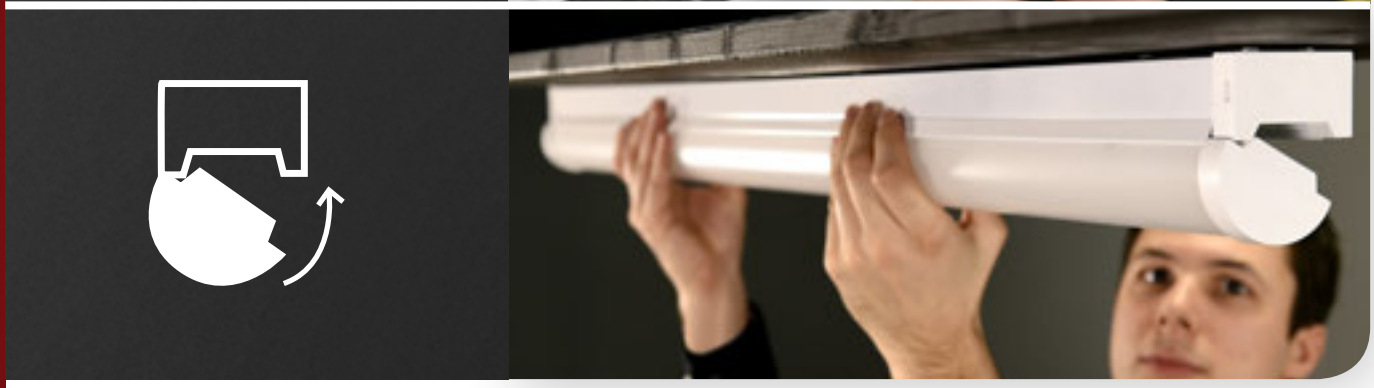


BENA Video

bit.ly/slv-bena

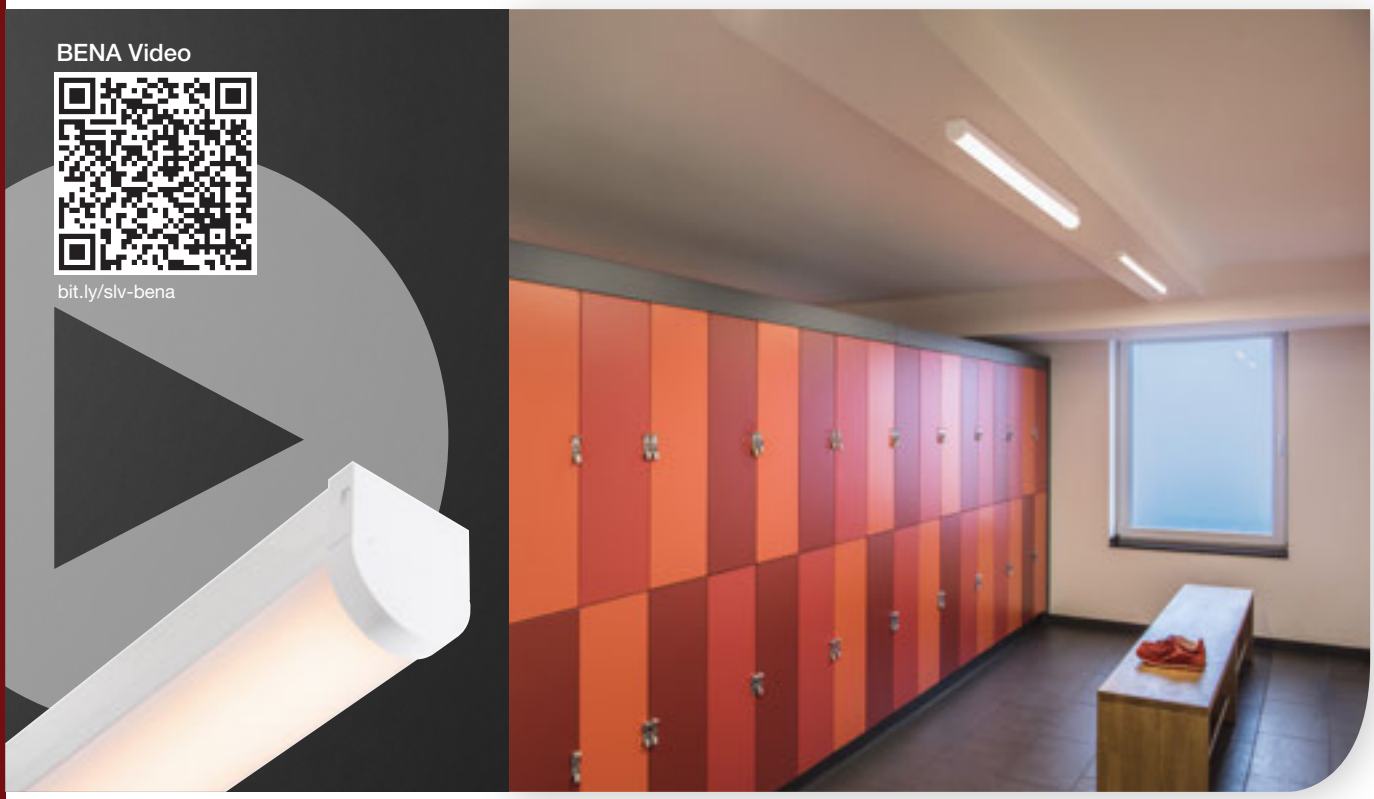



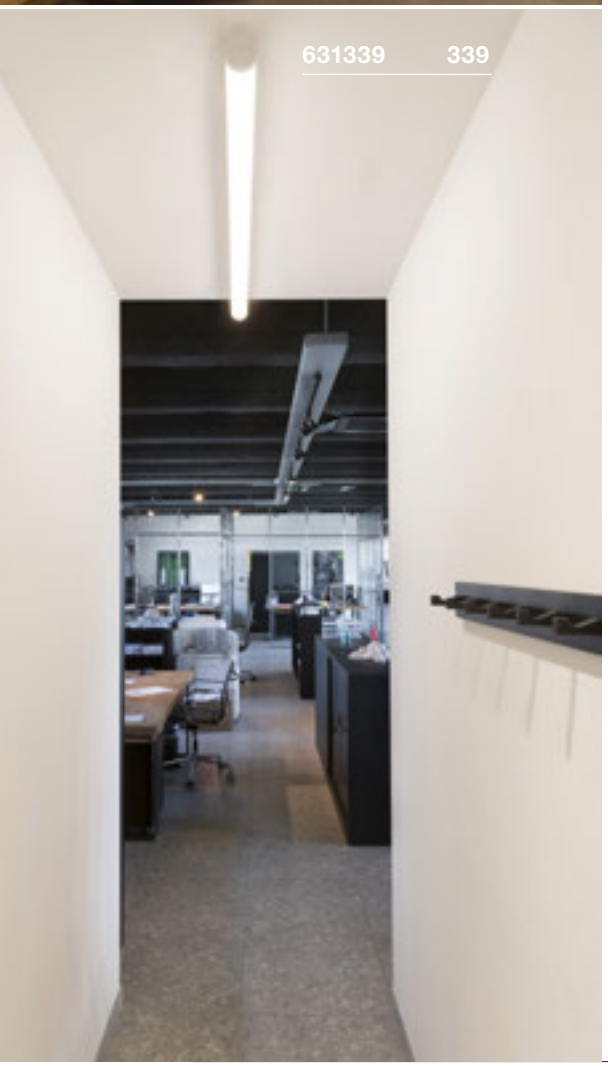


BENA 120
CW





3800lm | 4000lm
LED INSIDE
3000K | 4000K
CRI 80



IP 20 | 120° | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 28W
Material: Polymethylacrylate (PMMA)/steel

631337, 631347	3800lm | 4000lm 3000K | 4000K	A→G D


Options	Prod. no.
3800lm | 3000K | CRI80	
white	**631337**
4000lm | 4000K | CRI80	
white	**631347**

BENA 150
CW





5000lm | 5400lm
LED INSIDE
3000K | 4000K
CRI 80



IP 20 | 120° | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 36W
Material: Polymethylacrylate (PMMA)/steel

631339, 631349	5000lm | 5400lm 3000K | 4000K	A→G D


Options	Prod. no.
5000lm | 3000K | CRI80	
white	**631339**
5400lm | 4000K | CRI80	
white	**631349**

P-LIGHT
CW





32lm
INSIDE
CRI 80
6000K



IP 20 L70B50

220-240V ~50Hz
Total wattage: 3.5W
Material: ABS / polycarbonate (PC)

- Perception distance 24 m. 3 escape route signs (right/left/down) and 1 white foil included. Emergency light with built-in Ni-Mh battery. With automatic self-test. Emergency operating time 3 hrs. Luminance >15cd/ m². Operating mode: continuous operation/standby

Pictogram foil
Prod. no. 240007

Accumulator
Prod. no. 240020


Options	Prod. no.
32lm | 6000K | CRI80	
white	**240000**

P-LIGHT
CW





32lm
INSIDE
CRI 70
6000K



IP 20 L70B50


220-240V ~50/60Hz
Total wattage: 4W
Material: ABS / polycarbonate (PC)

- Perception distance 30 m. 3 escape route signs (right/left/down) and 1 white foil included. Emergency light with built-in Ni-Mh battery. With automatic self-test. Emergency operating time 3 hrs. Luminance >15cd/ m². Operating mode: continuous operation/standby

Pictogram foil
Prod. no. 240008

Accumulator
Prod. no. 240021

Options	Prod. no.
32lm | 6000K | CRI70	
white	**240002**

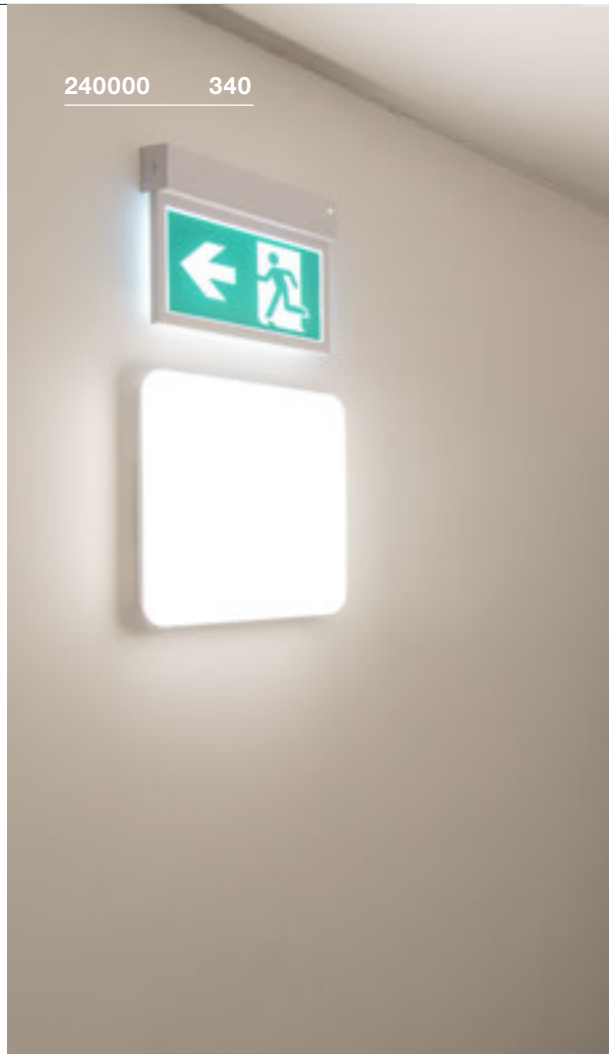







P-LIGHT
CW











220-240V ~50Hz
Total wattage: 6.5W
Material: polycarbonate (PC)

- Perception distance 30 m. For use as emergency lighting. Auto-test function. Ni-Mh battery 2x 3.6V 1.0Ah included. Emergency operation via battery 2 hrs. Escape route sign optionally available and can be used as emergency sign light.

Pictogram foil

Material: polypropylene (PP)
W: 24 cm H: 13.1 cm

4-part pictogram set for insertion



Options	Prod. no.
green	240007

Pictogram foil

Material: polypropylene (PP)
W: 35.3 cm H: 16.5 cm

3-part pictogram set for insertion (up, down, right)



Options	Prod. no.
green	240009

Pictogram foil

Material: polypropylene (PP)
W: 30 cm H: 16.1 cm

3-part pictogram set for insertion



Options	Prod. no.
green	240008

Pictogram foil

Material: polypropylene (PP)
W: 35.3 cm H: 16.5 cm

2-part pictogram set for insertion (right diagonal up/right diagonal down)



Options	Prod. no.
green	240010

Pictogram foil
Prod. no. 240009



Pictogram foil
Prod. no. 240010



Accumulator
Prod. no. 240022




Options	Prod. no.
100lm | 6000K | CRI70	
white	240004

DEEPLY ROOTED.

RECESSED LIGHTS OFFER IMPRESSIVE RADIANCE.

Be it focused or wide angle, fixed or pivoting, recessed lights are a key component in many lighting concepts and a great alternative to free-hanging lights. Why? Because they adapt to any environment, ensuring plenty of design flexibility.

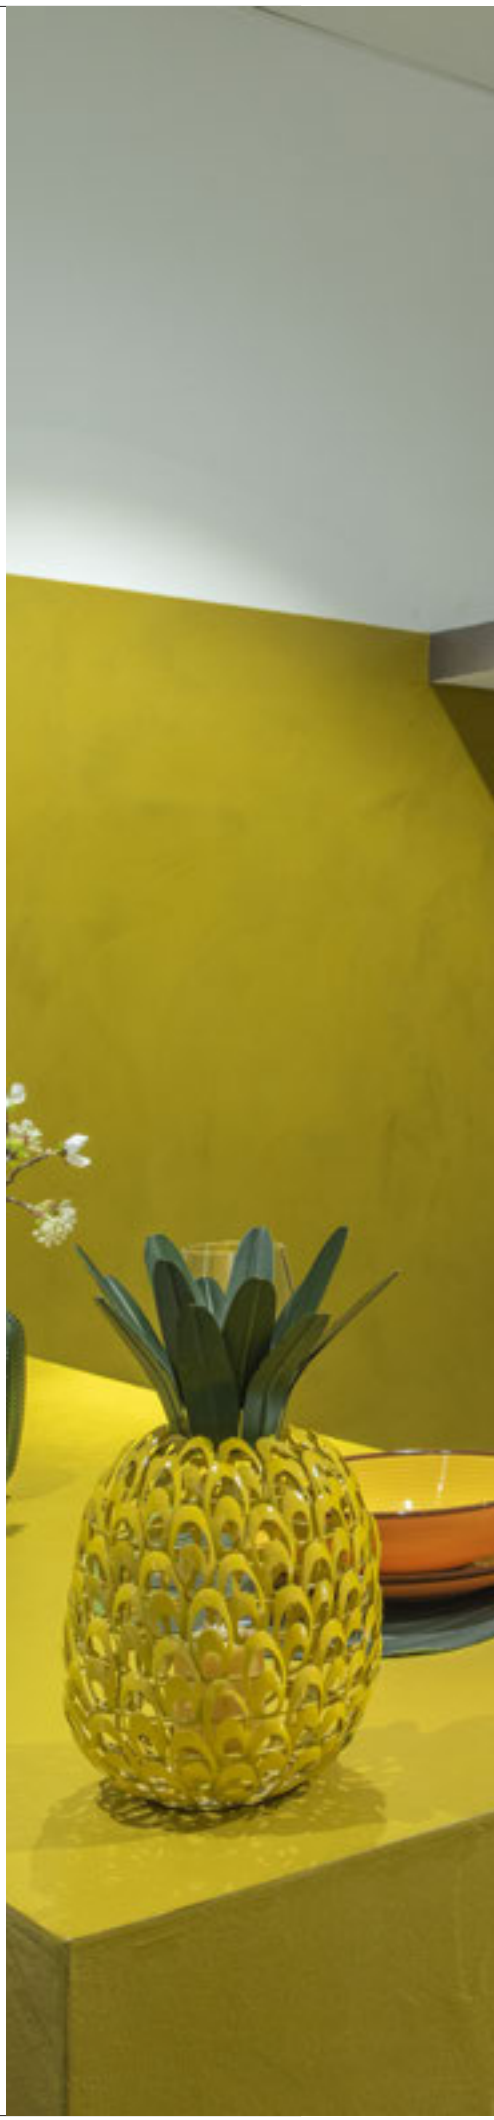


1001015 406
CUISINE

OUR QUALITY PROMISE

INNOVATION AND DEVELOPMENT

German engineering

Customer and product feedback

High innovative power

The latest trends in design and technology

MANUFACTURE

Qualified suppliers

Strict compliance with regulations

Long-term collaboration

QUALITY ASSURANCE

2

State-of-the-art laboratories

Extensive safety and performance tests

Multi-level product release standards

Would you like to find out more about the topic of quality? Watch the video now: bit.ly/slv-quality












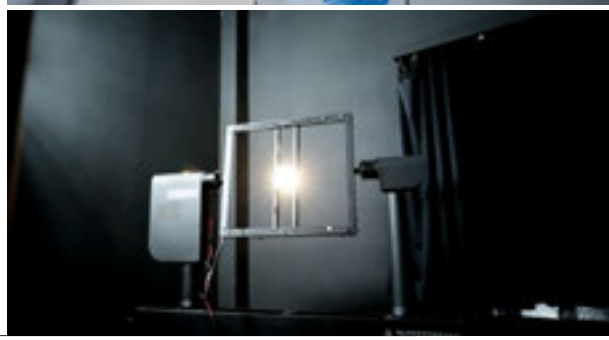

RECESSED LIGHTS

NEW NEW NEW


349


349


349


350


350


351


351


352


352


352


353


354


355


355


355


356


356


357


357


358


358


359


359


360


361


361


361


362


362


362


363


364


365


366


366


366


367


368


368


369


369


370


370


371


371


371


372

NEW VARIANT


373


374

375


376


376


376


378


378


379


379


379


380


380


382


383


384


384


384


385


386


386


387


387

389

389

389

390

390

390

393

393

393

394


394


395


395


396

397


397


398

398

Recessed lights from the NUMINOS® down and spotlight system can be found on pages 28 to 57. Or for easy online configuration, visit: **www.numinos.slv.com**

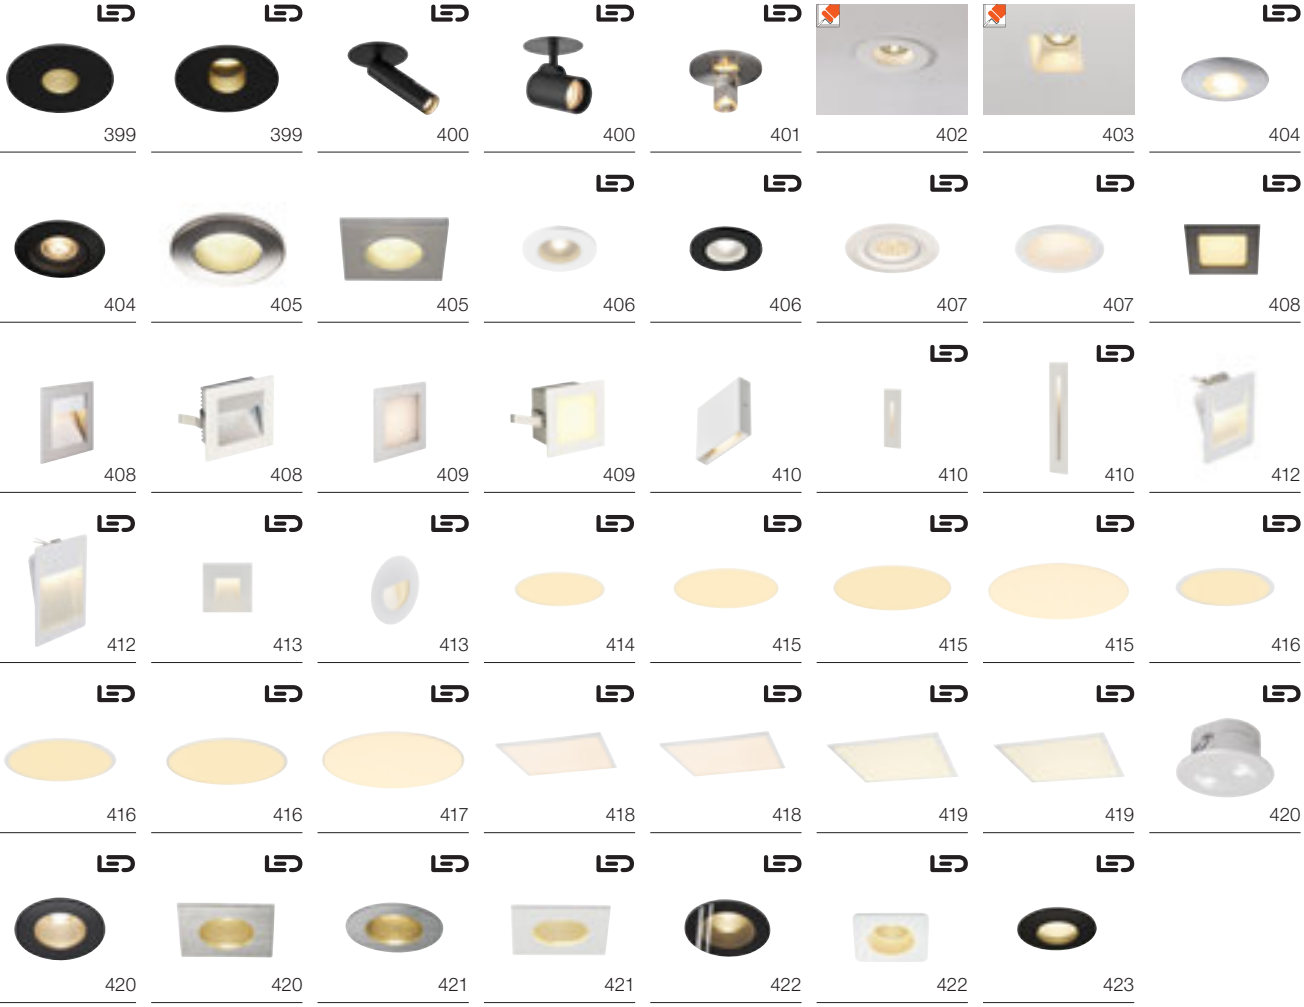


399 399 400 400 401 402 403 404
404 405 405 406 406 407 407 408
408 408 409 409 410 410 410 412
412 413 413 414 415 415 415 416
416 416 417 418 418 419 419 420
420 420 421 421 422 422 423

You can find more lights and variants at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lamps', from page 808



1005407 349

MILANDOS 4
DL


NEW





510|640lm 520|650lm

LED INSIDE — 2700K — 3000K — CRI 90



IP 20 | IK02 | 45° | L80B50

700mA
Power consumption: 8W
Material: aluminium/polycarbonate (PC)

1005407, 1005409	510lm | 640lm 2700K	A→G F
1005408, 1005410	520lm | 650lm 3000K	A→G F

- ☐ LED driver 700mA | 10.5W dimmable | incl. strain relief **Prod. no. 464142**
- ☐ LED driver 20W | 250-700mA | 1-10V/DALI dimmable | incl. strain relief **Prod. no. 1002423**

Options	Prod. no.
510lm | 2700K | CRI90 | UGR16	
■ black	**1005407**
640lm | 2700K | CRI90 | UGR23	
☐ white	**1005409**
520lm | 3000K | CRI90 | UGR16	
■ black	**1005408**
650lm | 3000K | CRI90 | UGR23	
☐ white	**1005410**

MILANDOS 6
DL


NEW





770|960lm 780|980lm

LED INSIDE — 2700K — 3000K — CRI 90

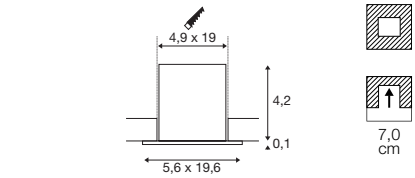

IP 20 | IK02 | 45° | L80B50

700mA
Power consumption: 12W
Material: aluminium/polycarbonate (PC)

1005415, 1005417	770lm | 960lm 2700K	A→G F
1005416, 1005418	780lm | 980lm 3000K	A→G F

- ☐ LED driver 15W | 700mA | incl. strain relief **Prod. no. 464147**
- ☐ LED driver 20W | 250-700mA | 1-10V/DALI dimmable | incl. strain relief **Prod. no. 1002423**

Options	Prod. no.
770lm | 2700K | CRI90 | UGR16	
■ black	**1005415**
960lm | 2700K | CRI90 | UGR23	
☐ white	**1005417**
780lm | 3000K | CRI90 | UGR16	
■ black	**1005416**
980lm | 3000K | CRI90 | UGR23	
☐ white	**1005418**

MILANDOS 8
DL


NEW





1030|1280lm 1040|1300lm

LED INSIDE — 2700K — 3000K — CRI 90

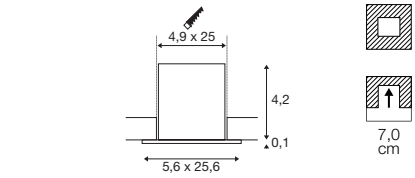

IP 20 | IK02 | 45° | L80B50

700mA
Power consumption: 16W
Material: aluminium/polycarbonate (PC)

1005423, 1005425	1030lm | 1280lm 2700K	A→G F
1005424, 1005426	1040lm | 1300lm 3000K	A→G F

- ☐ LED driver 20W | 250-700mA | 1-10V/DALI dimmable | incl. strain relief **Prod. no. 1002423**
- ☐ LED driver 20W | 700mA | dimmable | incl. strain relief **Prod. no. 1006202**

Options	Prod. no.
1030lm | 2700K | CRI90 | UGR16	
■ black	**1005423**
1280lm | 2700K | CRI90 | UGR23	
☐ white	**1005425**
1040lm | 3000K | CRI90 | UGR16	
■ black	**1005424**
1300lm | 3000K | CRI90 | UGR23	
☐ white	**1005426**


NEW TRIA 68
DL, round, QPAR51







SOCKET INSIDE <50 W



IP 20 30°

230V ~50Hz
Material: aluminium

- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced.
- Material thickness of mounting surface: 20 mm

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10 ■ black	**1001980**
1xGU10 □ white	**1001981**
1xGU10 ▨ aluminium	**1001982**


NEW TRIA 68
DL, square, QPAR51







SOCKET INSIDE <50 W



IP 20 30°

230V ~50Hz
Material: aluminium


- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced.
- Material thickness of mounting surface: 20 mm


GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973

Options	Prod. no.
1xGU10 ■ black	**1001994**
1xGU10 □ white	**1001995**
1xGU10 ▨ aluminium	**1001996**

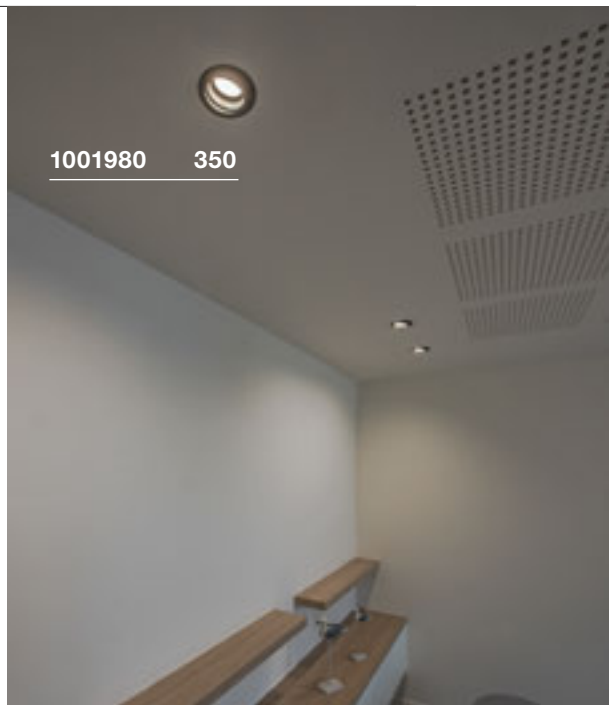

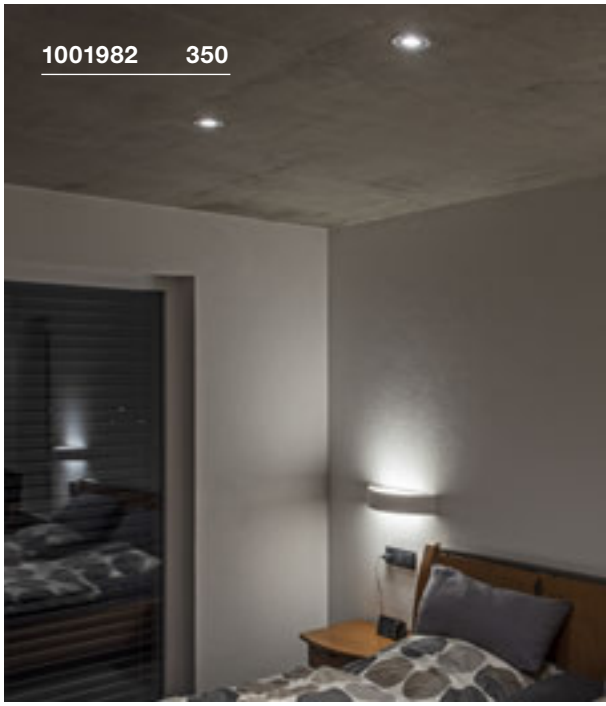








NEW TRIA 78 XL
DL, round, QPAR51







SOCKET INSIDE <50 W



IP 20 360° 30°

230V ~50Hz
Material: aluminium

- Material thickness of mounting surface: 18 mm

GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h




Prod. no. 1004973

Options	Prod. no.
1xGU10 ■ black	**113440**
1xGU10 □ white	**113441**
1xGU10 ▨ aluminium	**113446**


NEW TRIA 78 XL
DL, square, QPAR51







SOCKET INSIDE <50 W



IP 20 360° 30°

230V ~50Hz
Material: aluminium

- Material thickness of mounting surface: 18 mm

GU10 <50W

LED GU10 | 6W | 36°
2700K | 900lm | EEK=G
6kWh/1000h



Prod. no. 1005273

Options	Prod. no.
1xGU10 ■ black	**113450**
1xGU10 □ white	**113451**
1xGU10 ▨ aluminium	**113456**


NEW TRIA 78
DL, round, QPAR51







SOCKET INSIDE <50 W



IP 20 360° 30°

220-240V ~50/60Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 20mm

GU10 <50W

LED GU10 | 6W | 36°
2700K | 900lm | EEK=G
6kWh/1000h



Prod. no. 1005273

Options	Prod. no.
1xGU10 ■ black	**111710**
1xGU10 □ white	**111711**
1xGU10 ▨ aluminium	**111716**


NEW TRIA 78
DL, square, QPAR51







SOCKET INSIDE <50 W



IP 20 360° 30°

220-240V ~50/60Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 20mm

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972

Options	Prod. no.
1xGU10 ■ black	**111720**
1xGU10 □ white	**111721**
1xGU10 ▨ aluminium	**111726**

NEW TRIA 78
DL, round, QPAR51










SOCKET INSIDE <50 W



IP 20 360° 30°

220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 18mm


GU10 <50W


LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
1xGU10 ■ black	**113490**
1xGU10 □ white	**113510**
1xGU10 ▨ aluminium	**111360**

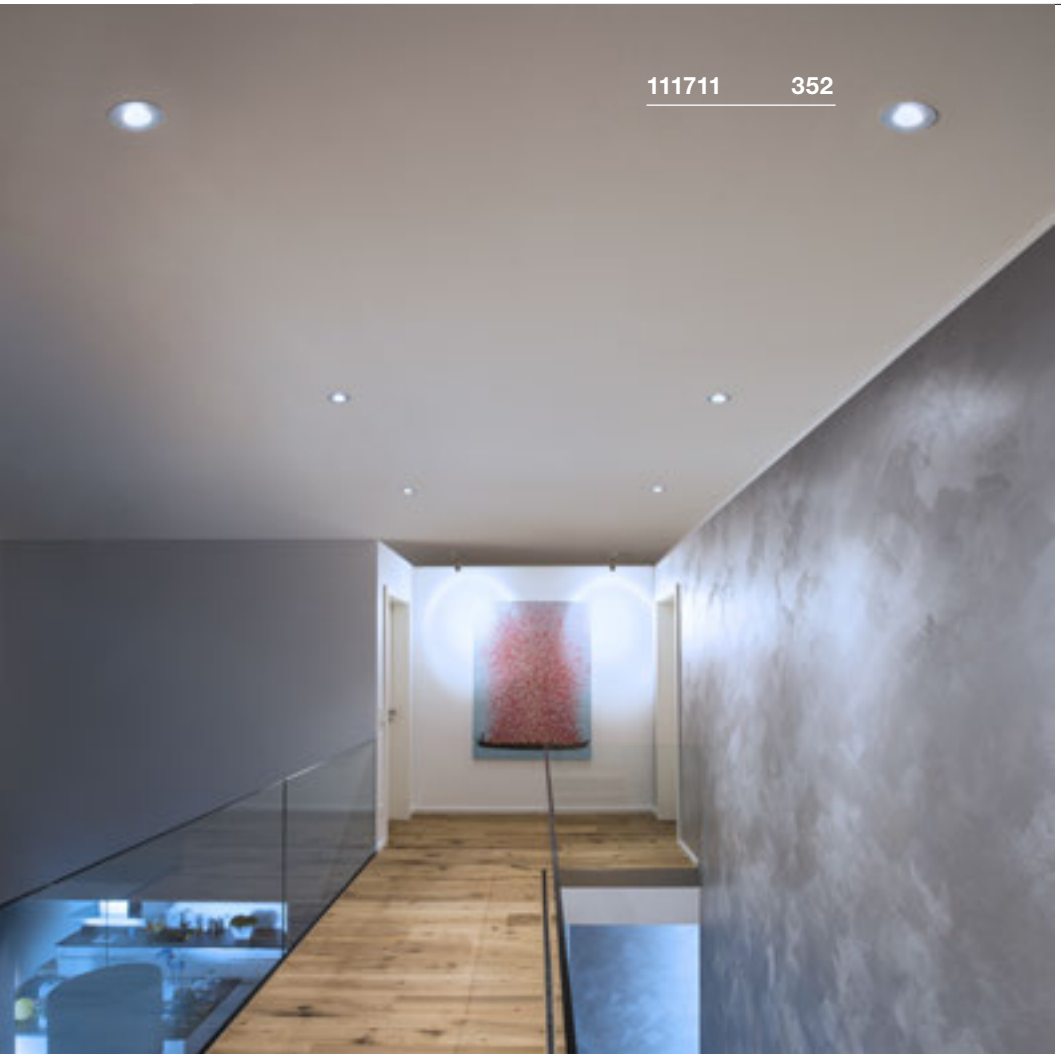

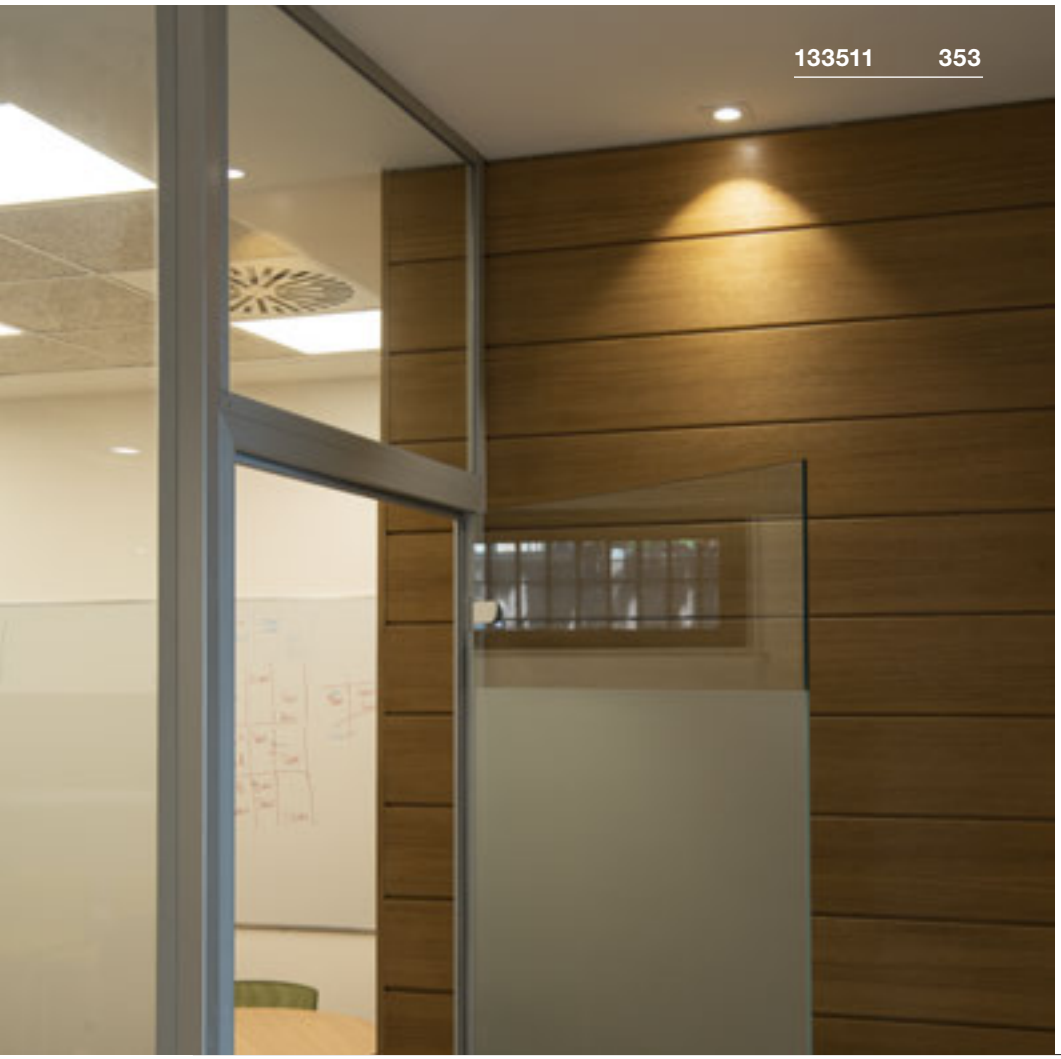


NEW TRIA 78
DL, square, QPAR51







SOCKET INSIDE <50 W



IP 20 | 360° | 30°

220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 18mm

GU10 <50W

LED GU10 | 6W | 10°
3000K | 450lm | EEK=G
6kWh/1000h

Prod. no. 1005278

Options	Prod. no.
1xGU10 ■ black	**113491**
1xGU10 □ white	**113511**
1xGU10 ▦ aluminium	**111361**


NEW TRIA 155
DL, double, QPAR51







SOCKET INSIDE <50 W



IP 20 360° 30°

220-240V ~50/60Hz
Material: aluminium


- Spring clips
- Material thickness of mounting surface: max. 30mm


GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
2xGU10 ■ black	**113492**
2xGU10 □ white	**113512**
2xGU10 ▨ aluminium	**111362**

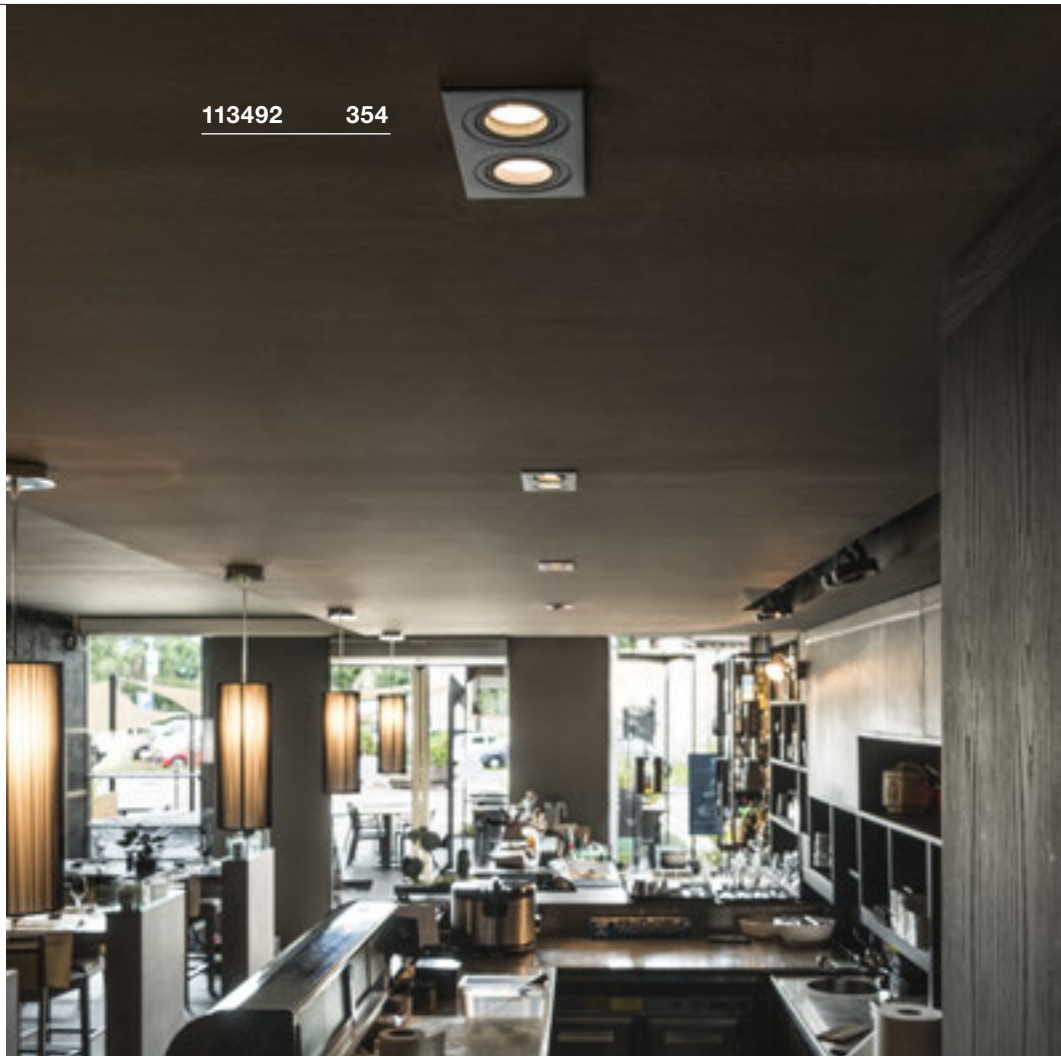

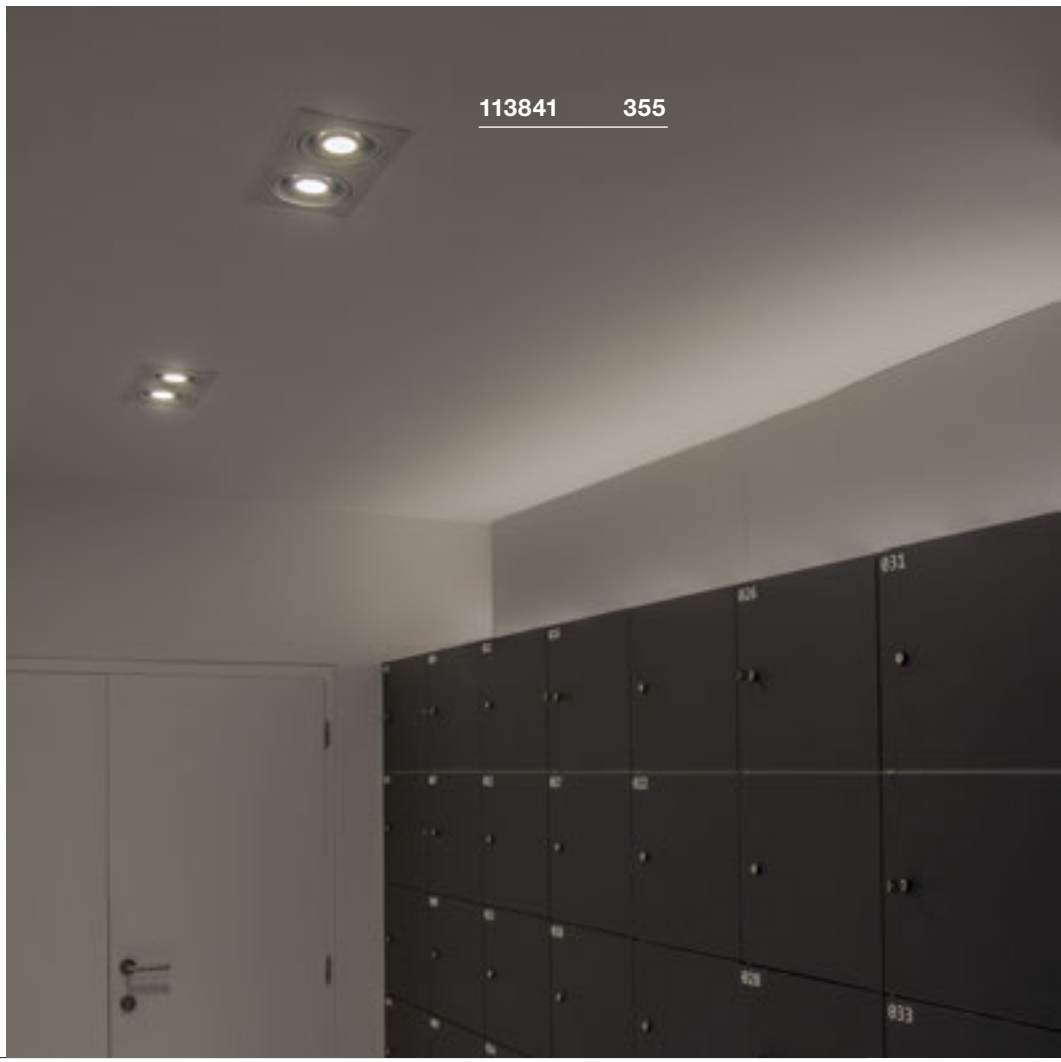


NEW TRIA 150
DL, round, QPAR111







SOCKET INSIDE <75 W



IP 20 360° 30°

230V ~50Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

GU10 <75W

QPAR111 | 12.5W | 30°
4000K | 1000lm | EEK=F
13kWh/1000h

Prod. no. 1005282

Options	Prod. no.
1xGU10	
black	**113550**
1xGU10	
white	**113540**
1xGU10	
aluminium	**111380**


NEW TRIA 150
DL, square, QPAR111







SOCKET INSIDE <75 W



IP 20 360° 30°

230V ~50Hz
Material: aluminium

- Leaf springs
- Material thickness of mounting surface: max. 30 mm

GU10 <75W

QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h


Prod. no. 1005274

Options	Prod. no.
1xGU10	
black	**113830**
1xGU10	
white	**113541**
1xGU10	
aluminium	**111381**


NEW TRIA 300
DL, double, QPAR111







SOCKET INSIDE <75 W



IP 20 360° 30°

230V ~50Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

GU10 <75W

LED E27 | 7.3W | 25°
3000K | 530lm | EEK=F
7kWh/1000h


Prod. no. 1005292

Options	Prod. no.
2xGU10	
black	**113840**
2xGU10	
white	**113841**
2xGU10	
aluminium	**111382**

NEW TRIA 45
DL, round





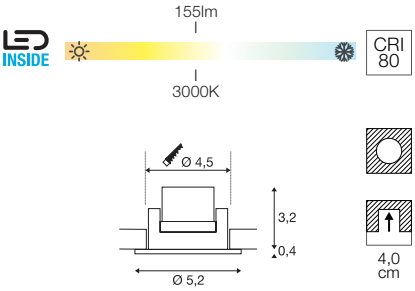

IP 20 / IP 44 | 30° | L70B50 | 30°

220-240V ~50/60Hz | 700mA
Total wattage: 4.2W
Material: aluminium


- Spring clips
- Material thickness of mounting surface: max. 20mm


113970, 113971, 113976	155lm 3000K	A→G

Options	Prod. no.
155lm | 3000K | CRI80	
black	**113970**
155lm | 3000K | CRI80	
white	**113971**
155lm | 3000K | CRI80	
aluminium	**113976**

NEW TRIA 45
Single, square, CS



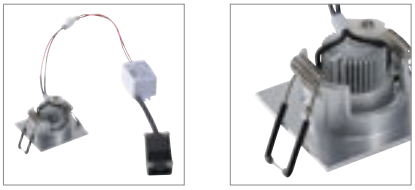

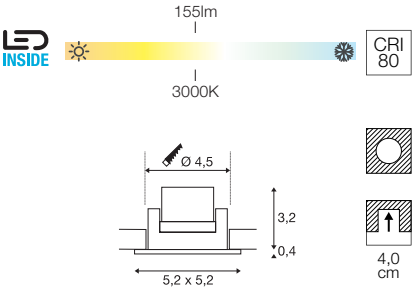


IP 20 / IP 44 | 30° | L70B50 | 30°


220-240V ~50/60Hz | 700mA
Total wattage: 4.2W
Material: aluminium


- Spring clips
- Material thickness of mounting surface: max. 20mm

114400, 114401, 114406	155lm 3000K	A→G

Options	Prod. no.
155lm | 3000K | CRI80	
black	**114400**
155lm | 3000K | CRI80	
white	**114401**
155lm | 3000K | CRI80	
aluminium	**114406**

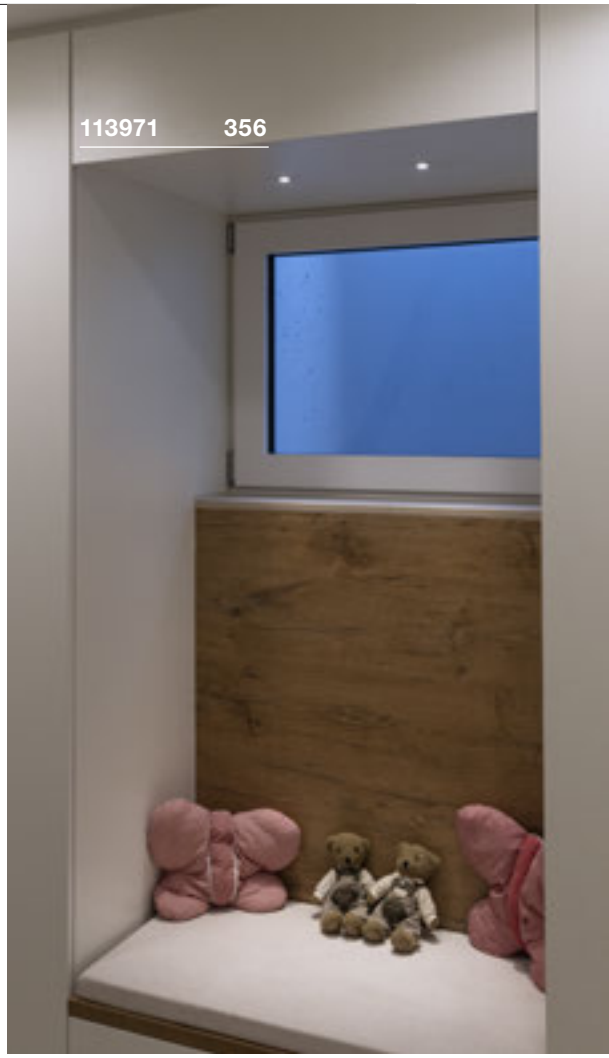

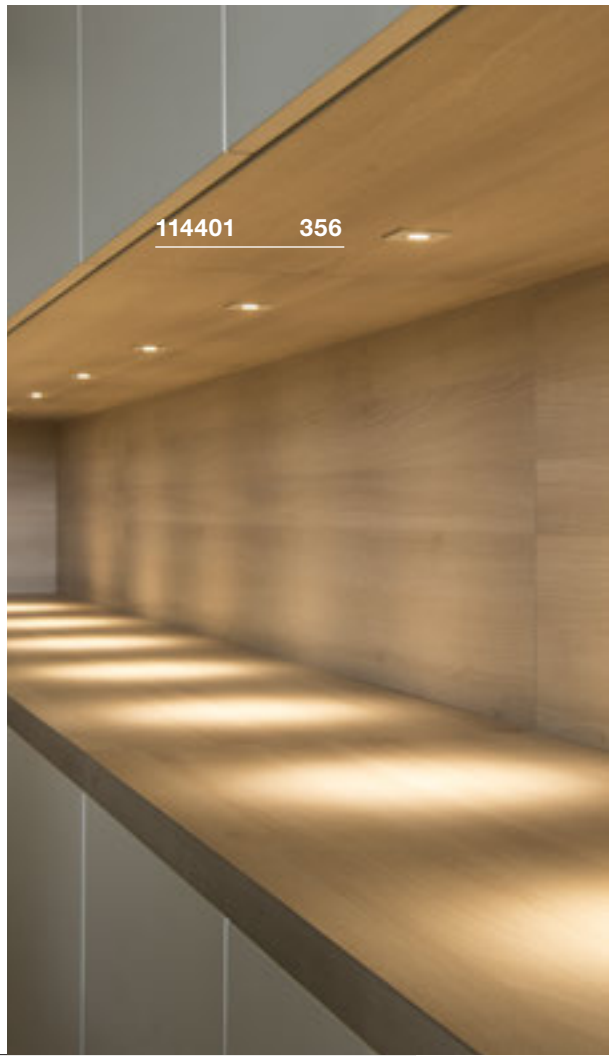

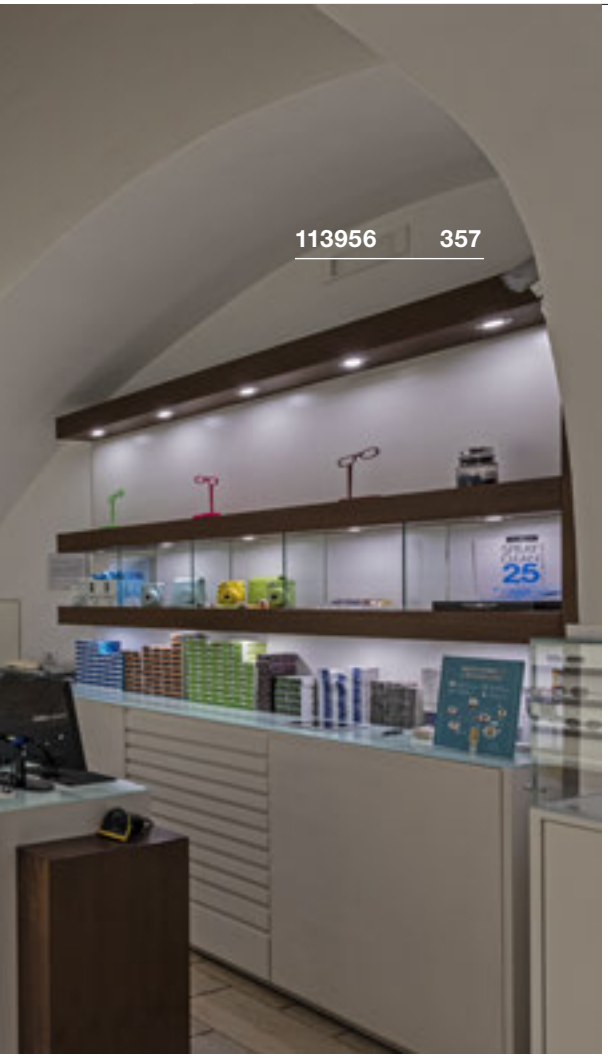




NEW TRIA 68
DL, round





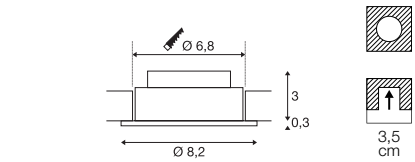

IP 20 | 38° | L70B50 | 30°

100-240V ~50/60Hz | 350mA
Total wattage: 5.3W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 20 mm


1003057, 113951, 113956	300lm 3000K	A→G / A↑ G E

Options	Prod. no.
300lm | 3000K | CRI80	
black	**1003057**
300lm | 3000K | CRI80	
white	**113951**
300lm | 3000K | CRI80	
brushed aluminium	**113956**

NEW TRIA 68
DL, square





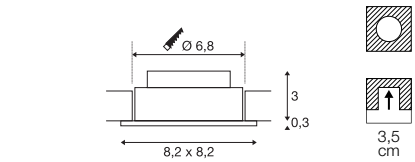

IP 20 | 38° | L70B50 | 30°

100-240V ~50/60Hz | 350mA
Total wattage: 5.3W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 20 mm


1003061, 113961, 113966	300lm 3000K	A→G / A↑ G E

Options	Prod. no.
300lm | 3000K | CRI80	
black	**1003061**
300lm | 3000K | CRI80	
white	**113961**
300lm | 3000K | CRI80	
brushed aluminium	**113966**

NEW TRIA 68
DL, round





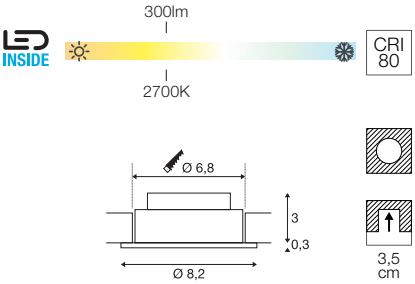

IP 20 | 38° | L70B50 | 30°

100-240V ~50/60Hz | 350mA
Total wattage: 5.3W
Material: aluminium

- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm


1003058, 1003059, 1003060	300lm 2700K	A→G E

Options	Prod. no.
300lm | 2700K | CRI80	
black	1003058
300lm | 2700K | CRI80	
white	1003059
300lm | 2700K | CRI80	
brushed aluminium	1003060

NEW TRIA 68
DL, round, PHASE





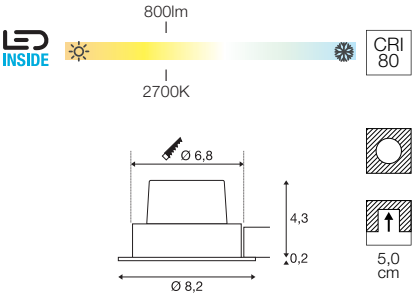

L | IP 20 | 38° | L70B50 | 20°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm


1003065, 1003066, 1003067	800lm 2700K	A→G E

Options	Prod. no.
800lm | 2700K | CRI80	
black	1003065
800lm | 2700K | CRI80	
white	1003066
800lm | 2700K | CRI80	
brushed aluminium	1003067







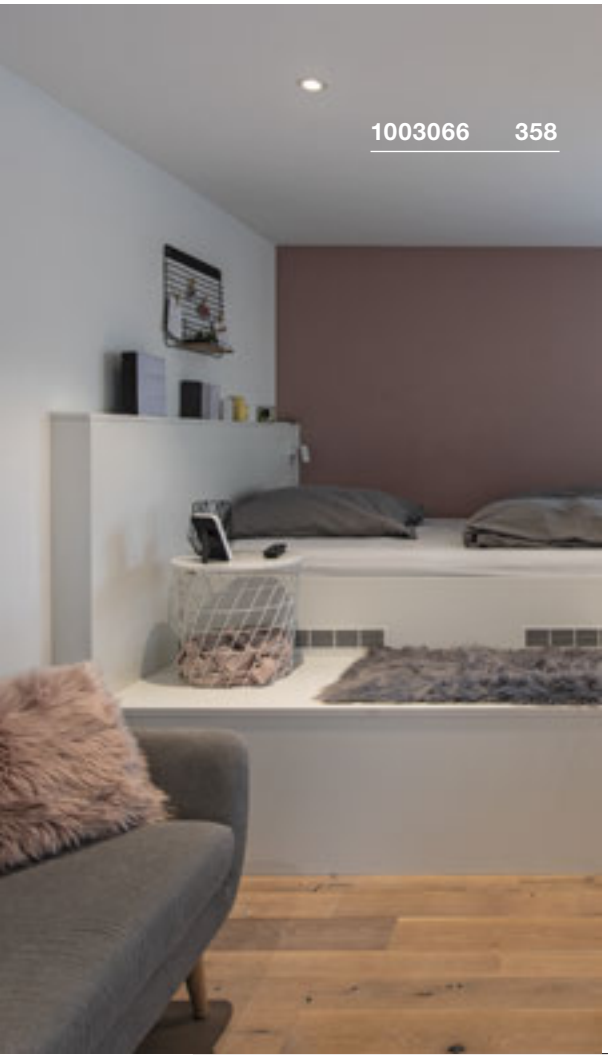


NEW TRIA 68
DL, square, PHASE







800lm
INSIDE
2700K
CRI 80



IP 20 | 38° | L70B50 | 20°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm

1003068, 1003069, 1003070	800lm 2700K	A→G / A E G

Options	Prod. no.
800lm | 2700K | CRI80	
black	**1003068**
800lm | 2700K | CRI80	
white	**1003069**
800lm | 2700K | CRI80	
brushed aluminium	**1003070**

NEW TRIA 68
DL, square










300lm
INSIDE
2700K
CRI 80




IP 20 | 38° | L70B50 | 30°


100-240V ~50/60Hz | 350mA
Total wattage: 5.3W
Material: aluminium

- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm

1003062, 1003063, 1003064	300lm 2700K	A→G / A E G

Options	Prod. no.
300lm | 2700K | CRI80	
black	**1003062**
300lm | 2700K | CRI80	
white	**1003063**
300lm | 2700K | CRI80	
brushed aluminium	**1003064**

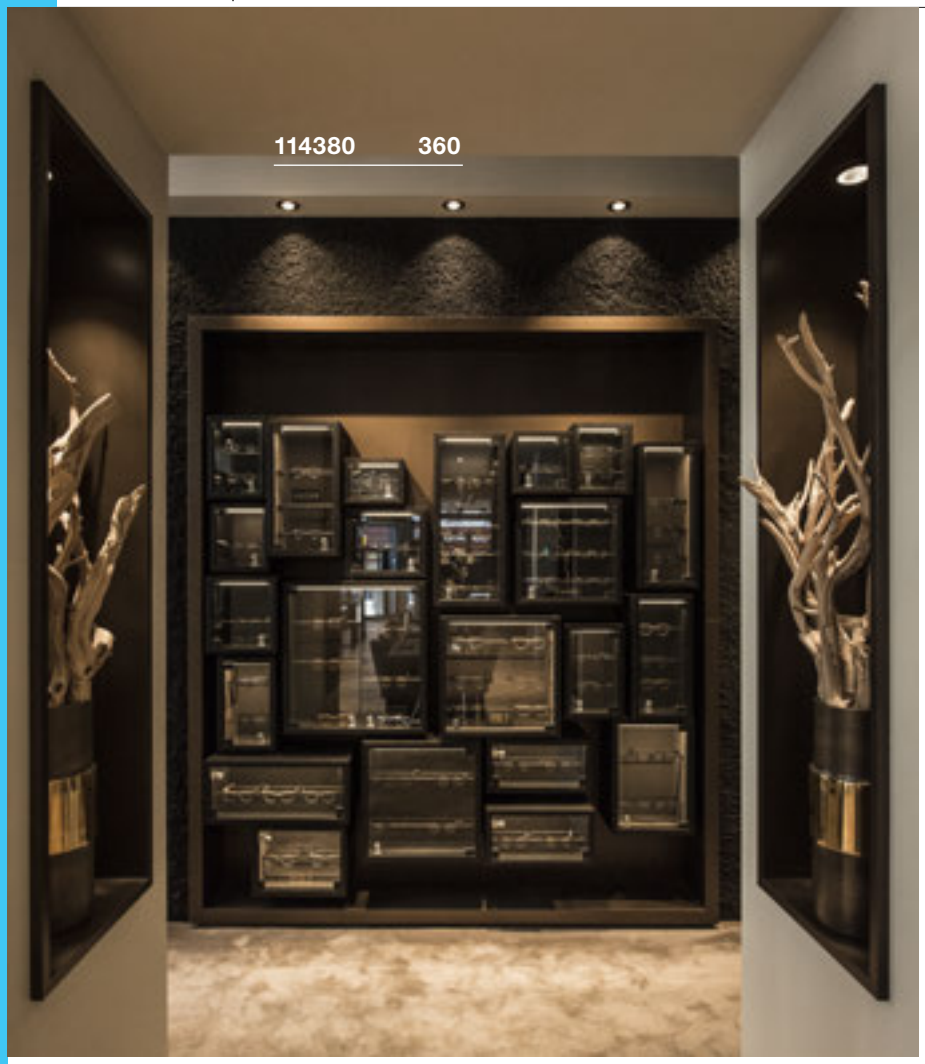

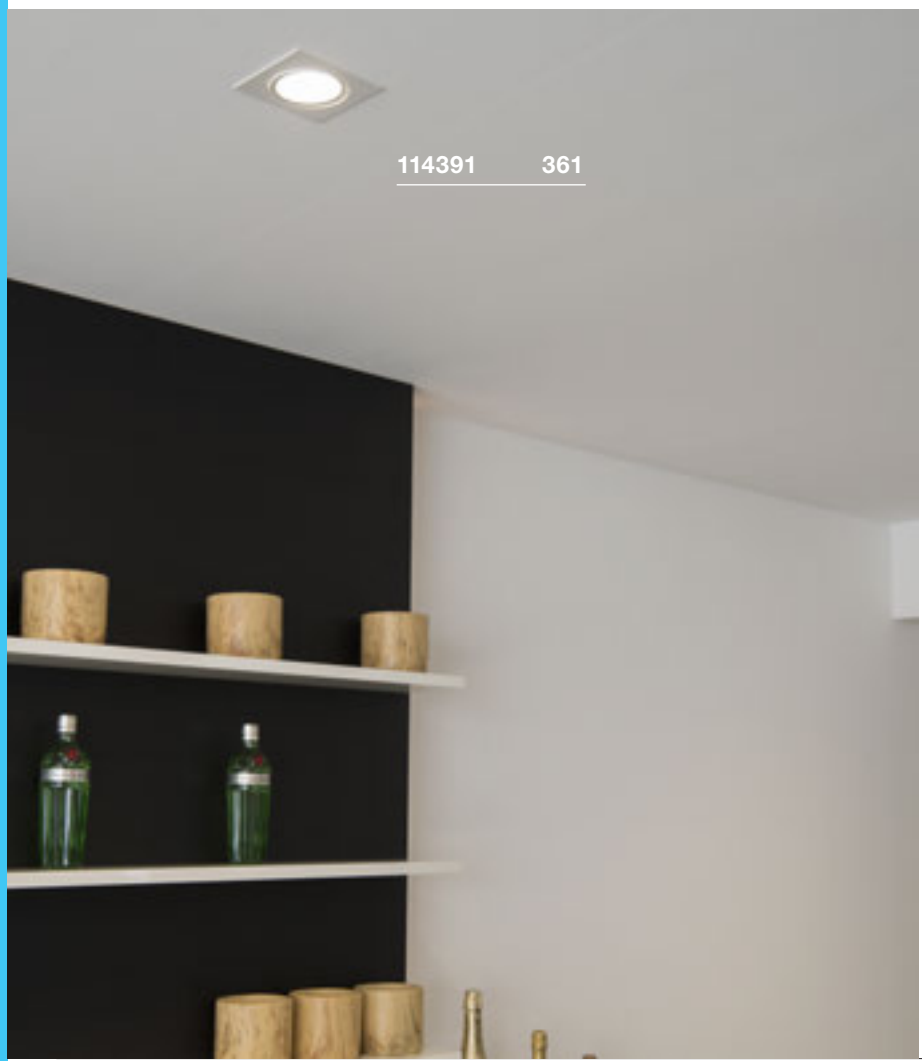



NEW TRIA 68
DL, round, PHASE














220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium


- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm


114380, 114381, 114386	890lm 3000K	A→G


Options	Prod. no.
890lm | 3000K | CRI80 ■ black	**114380**
890lm | 3000K | CRI80 □ white	**114381**
890lm | 3000K | CRI80 ▨ brushed aluminium	**114386**

NEW TRIA 68
DL, square, PHASE



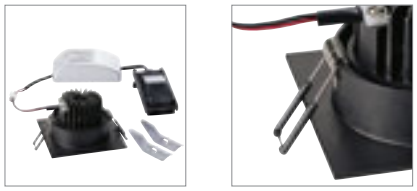

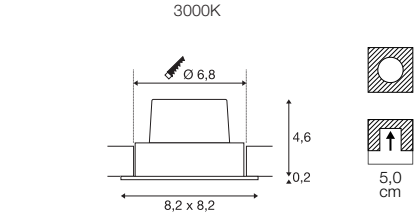

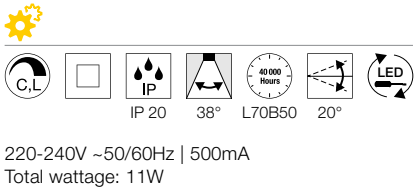

IP 20 38° L70B50 20°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm


114390, 114391, 114396	890lm 3000K	E


Options	Prod. no.
890lm | 3000K | CRI80	
black	**114390**
890lm | 3000K | CRI80	
white	**114391**
890lm | 3000K | CRI80	
brushed aluminium	**114396**

NEW TRIA 68
DL, round, PHASE





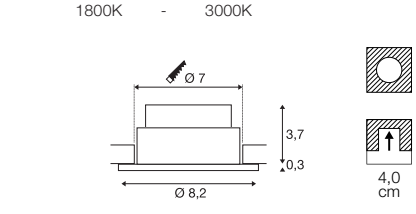

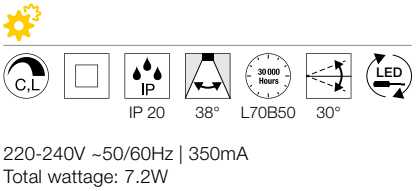

IP 20 38° L70B50 30°

220-240V ~50/60Hz | 350mA
Total wattage: 7.2W
Material: aluminium


- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm


1001978, 1001989, 1001990	430lm 1800-3000K	F


Options	Prod. no.
430lm | 1800-3000K | CRI95	
black	**1001978**
430lm | 1800-3000K | CRI95	
white	**1001989**
430lm | 1800-3000K | CRI95	
brushed aluminium	**1001990**

NEW TRIA 68
DL, square, PHASE



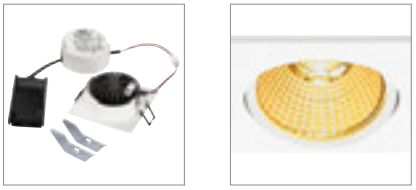

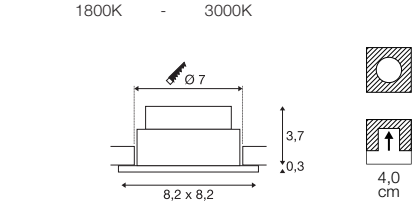

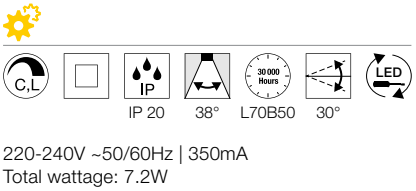

IP 20 38° L70B50 30°

220-240V ~50/60Hz | 350mA
Total wattage: 7.2W
Material: aluminium

- Spring clips and leaf springs
- Material thickness of mounting surface: 20 mm

1001991, 1001992, 1001993	430lm 1800-3000K	F

Options	Prod. no.
430lm | 1800-3000K | CRI80	
black	**1001991**
430lm | 1800-3000K | CRI80	
white	**1001992**
430lm | 1800-3000K | CRI80	
brushed aluminium	**1001993**


NEW TRIA 77
DL, round







645lm
2700K
CRI 80



IP 20 38° L70B50 30°

220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

113870, 113871, 113876	645lm 2700K	E

Options	Prod. no.
645lm | 2700K | CRI80	
black	**113870**
645lm | 2700K | CRI80	
white	**113871**
645lm | 2700K | CRI80	
aluminium	**113876**


NEW TRIA 77
DL, square







645lm
2700K
CRI 80



IP 20 38° L70B50 30°

220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

113880, 113881, 113886	645lm 2700K	E

Options	Prod. no.
645lm | 2700K | CRI80	
black	**113880**
645lm | 2700K | CRI80	
white	**113881**
645lm | 2700K | CRI80	
aluminium	**113886**


NEW TRIA 77
DL, round







700lm
3000K
CRI 90



IP 20 38° L70B50 30°

220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

113900, 113901, 113906	700lm 3000K	E


Options	Prod. no.
700lm | 3000K | CRI80	
black	**113900**
700lm | 3000K | CRI80	
white	**113901**
700lm | 3000K | CRI80	
aluminium	**113906**


NEW TRIA 77
DL, square
















220-240V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

113910, 113911, 113916	700lm 3000K	A→G E

Options	Prod. no.
700lm | 3000K | CRI80 ■ black	**113910**
700lm | 3000K | CRI80 □ white	**113911**
700lm | 3000K | CRI80 ▨ aluminium	**113916**




NEW TRIA 155
DL, double







1160lm
LED INSIDE
2700K
CRI 80



4,0 cm

IP 20 | 38° | L70B50 | 30°


220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

113890, 113891, 113896	1160lm 2700K	A→G E

Options	Prod. no.
1160lm | 2700K | CRI80	
black	**113890**
1160lm | 2700K | CRI80	
white	**113891**
1160lm | 2700K | CRI80	
aluminium	**113896**



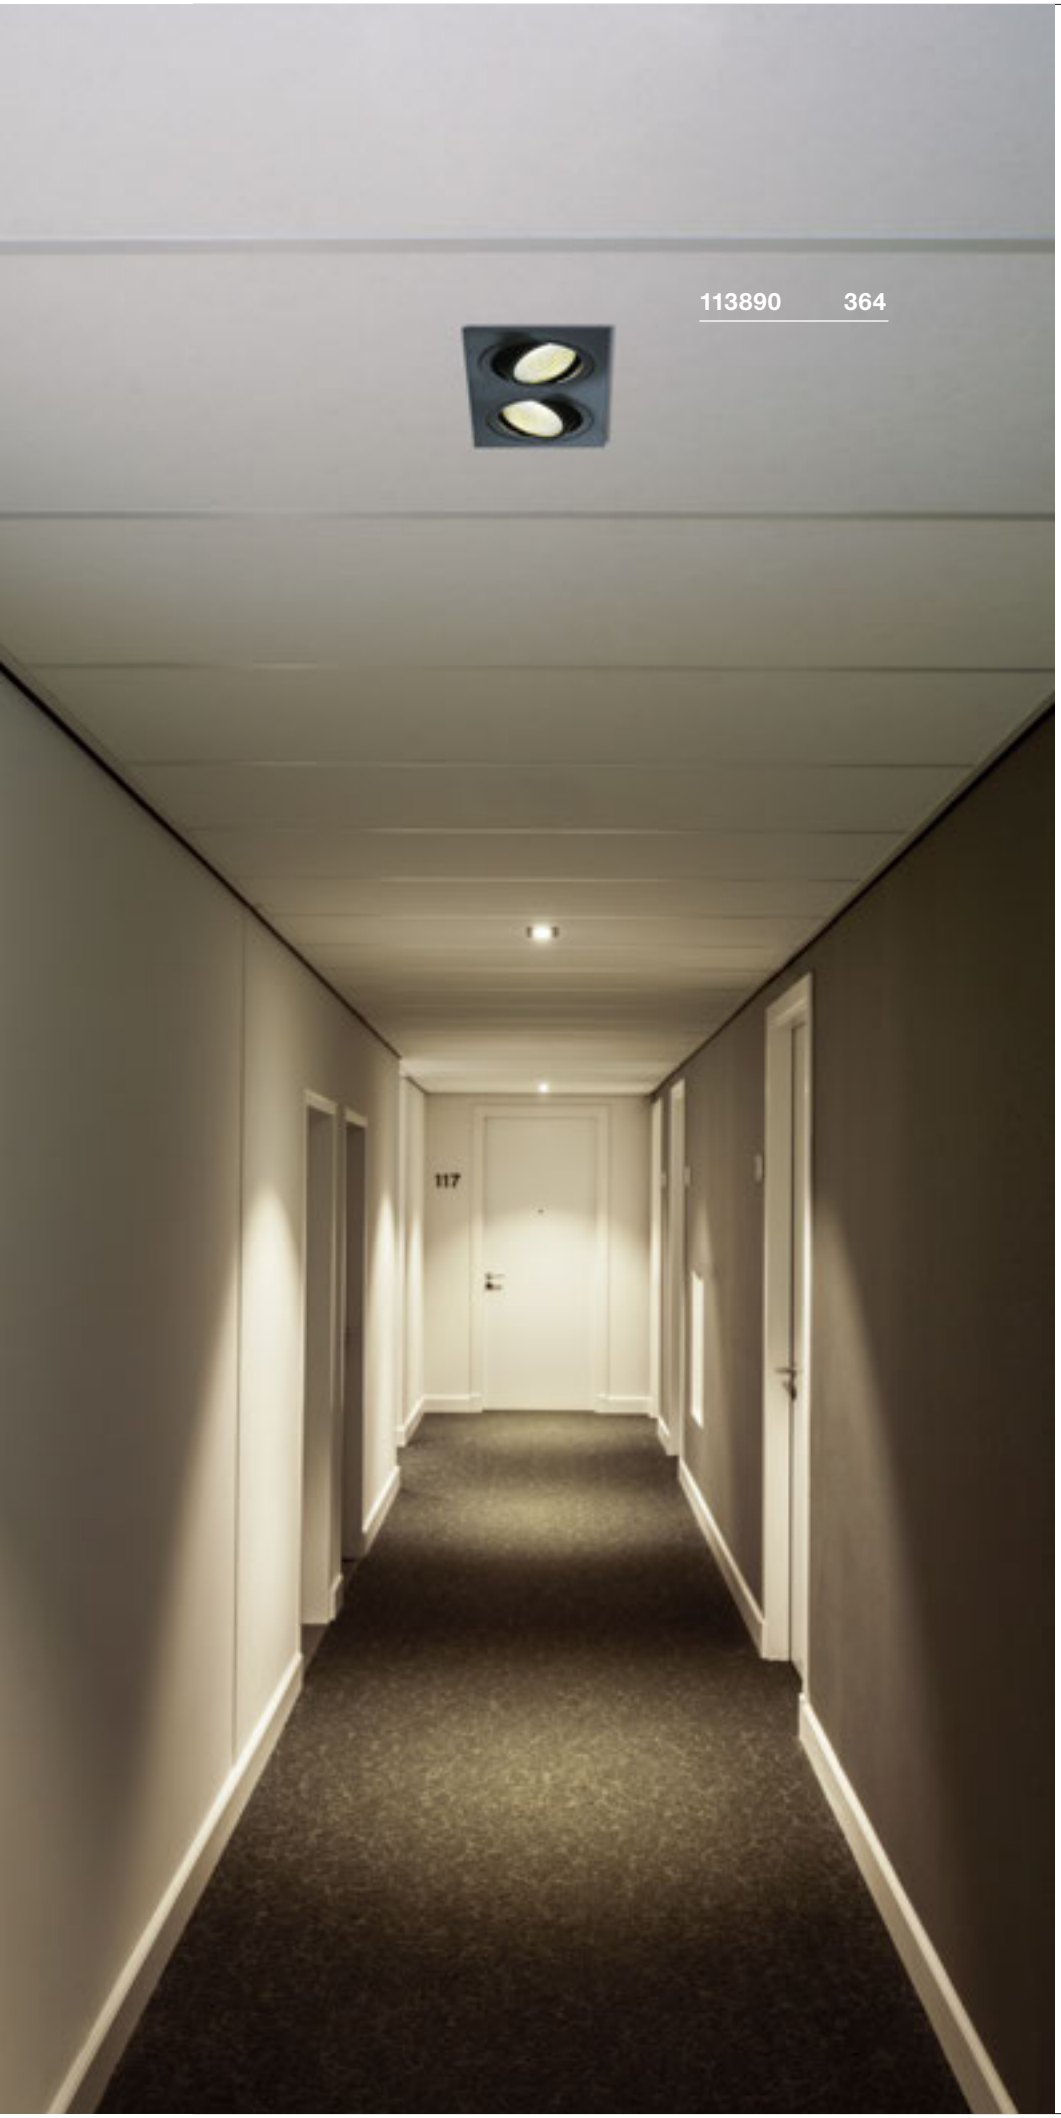



NEW TRIA 155
DL, double















220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

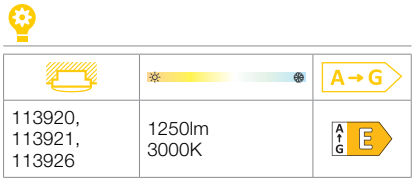


Options	Prod. no.
1250lm | 3000K | CRI80 black	**113920**
1250lm | 3000K | CRI80 white	**113921**
1250lm | 3000K | CRI80 aluminium	**113926**

NEW TRIA 110
DL, round, PHASE





1010|1030lm
2700K
CRI 80



IP 20 38° L70B50 360° 20°

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

114220, 114221	1010lm | 1030lm 2700K	A→G F


Options	Prod. no.
1010lm | 2700K | CRI80	
■ black	**114220**
1030lm | 2700K | CRI80	
□ white	**114221**

NEW TRIA 110
DL, round, PHASE





1100|1120lm
3000K
CRI 80



IP 20 38° L70B50 360° 20°

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm


114230, 114231	1100lm | 1120lm 3000K	A→G E

Options	Prod. no.
1100lm | 3000K | CRI80	
■ black	**114230**
1120lm | 3000K | CRI80	
□ white	**114231**

NEW TRIA 110
DL, square, PHASE



1010|1030lm
2700K
CRI 80



IP 20 38° L70B50 360° 20°

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

114240, 114241	1010lm | 1030lm 2700K	A→G F

Options	Prod. no.
1010lm | 2700K | CRI80	
■ black	**114240**
1030lm | 2700K | CRI80	
□ white	**114241**


NEW TRIA 110
DL, square, PHASE








1100|1120lm
LED INSIDE
CRI 80
3000K




6,0 cm

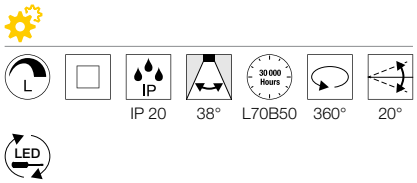

IP 20 | 38° | L70B50 | 360° | 20°


LED

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

114250, 114251	1100lm | 1120lm 3000K	A→G

Options	Prod. no.
1100lm | 3000K | CRI80	
black	**114250**
1120lm | 3000K | CRI80	
white	**114251**

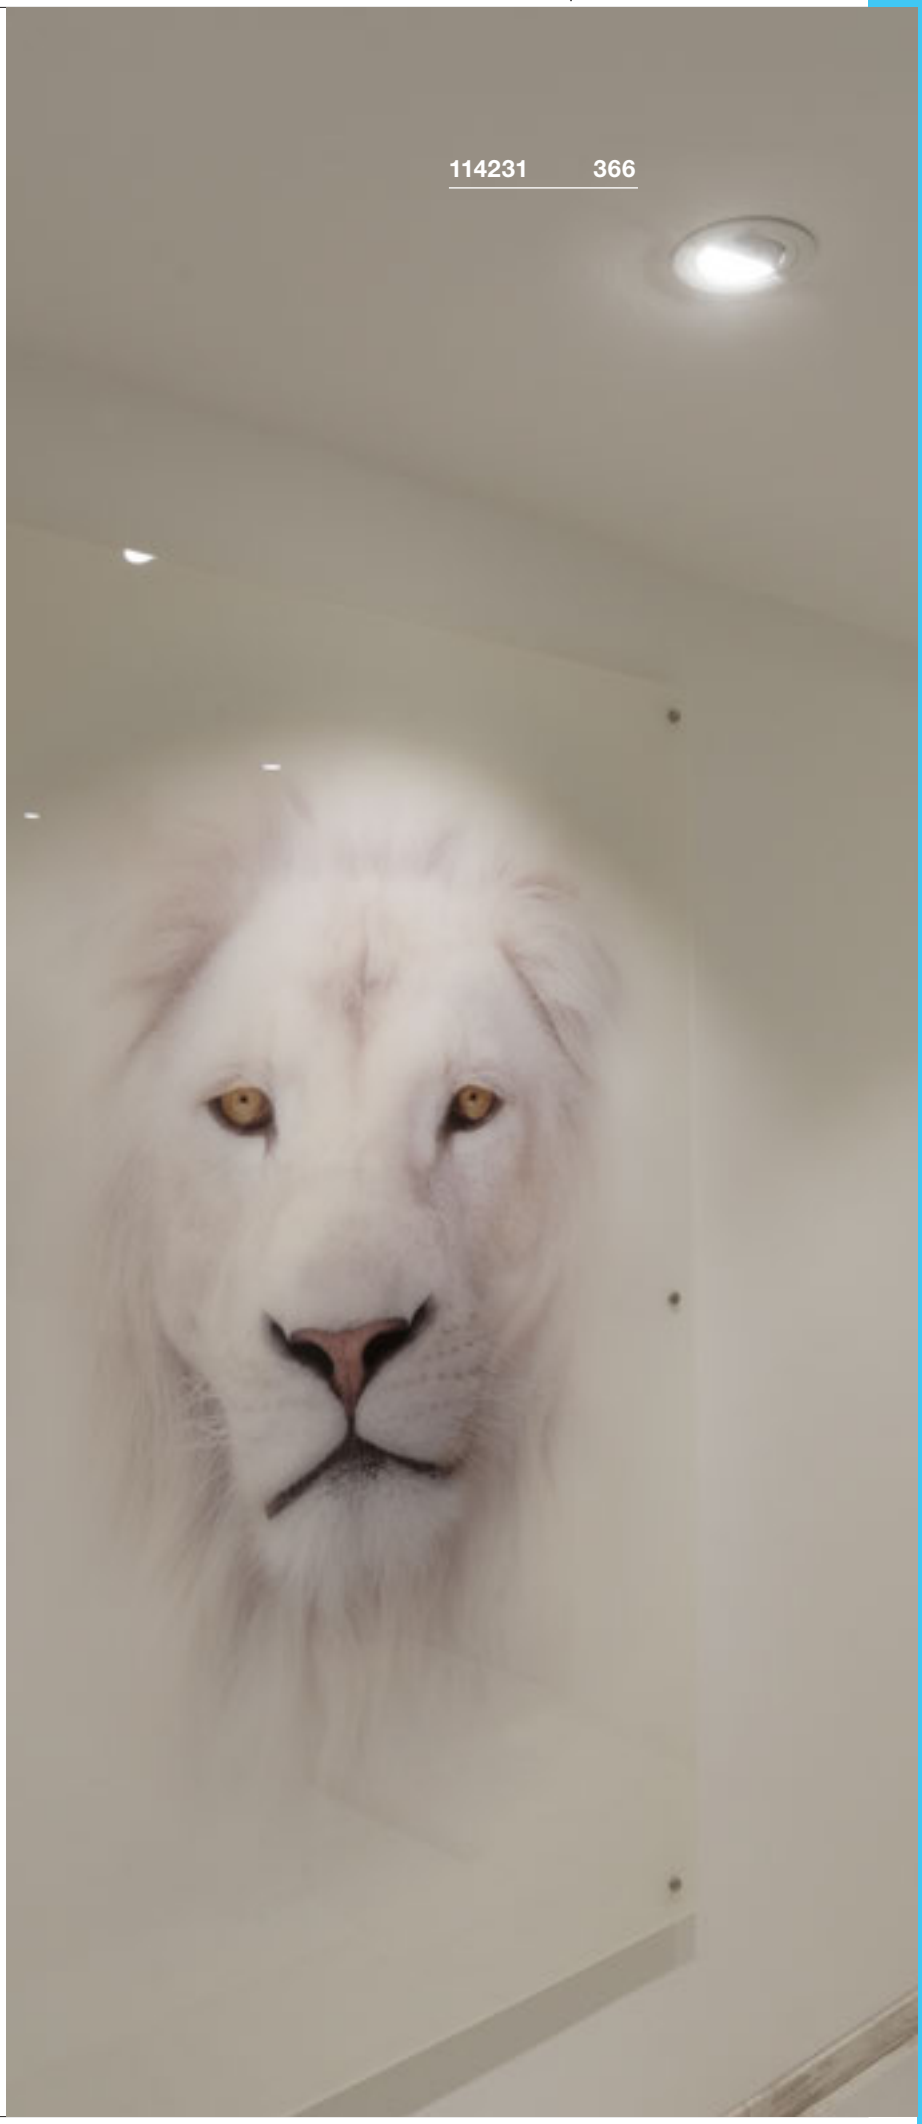


NEW TRIA 150
DL, round, 1-10V









2210|2275lm
INSIDE
2700K
CRI 80





100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

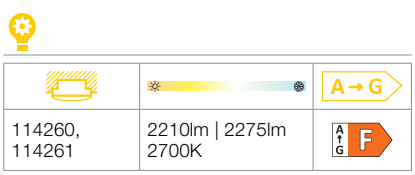

Options	Prod. no.
2210lm | 2700K | CRI80	
■ black	**114260**
2275lm | 2700K | CRI80	
□ white	**114261**

NEW TRIA 150
DL, round, 1-10V












2425|2500lm
INSIDE
3000K
CRI 80






100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

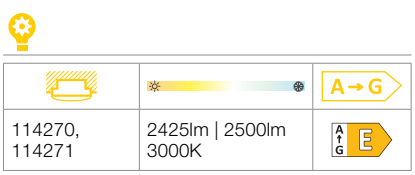

Options	Prod. no.
2425lm | 3000K | CRI80	
■ black	**114270**
2500lm | 3000K | CRI80	
□ white	**114271**

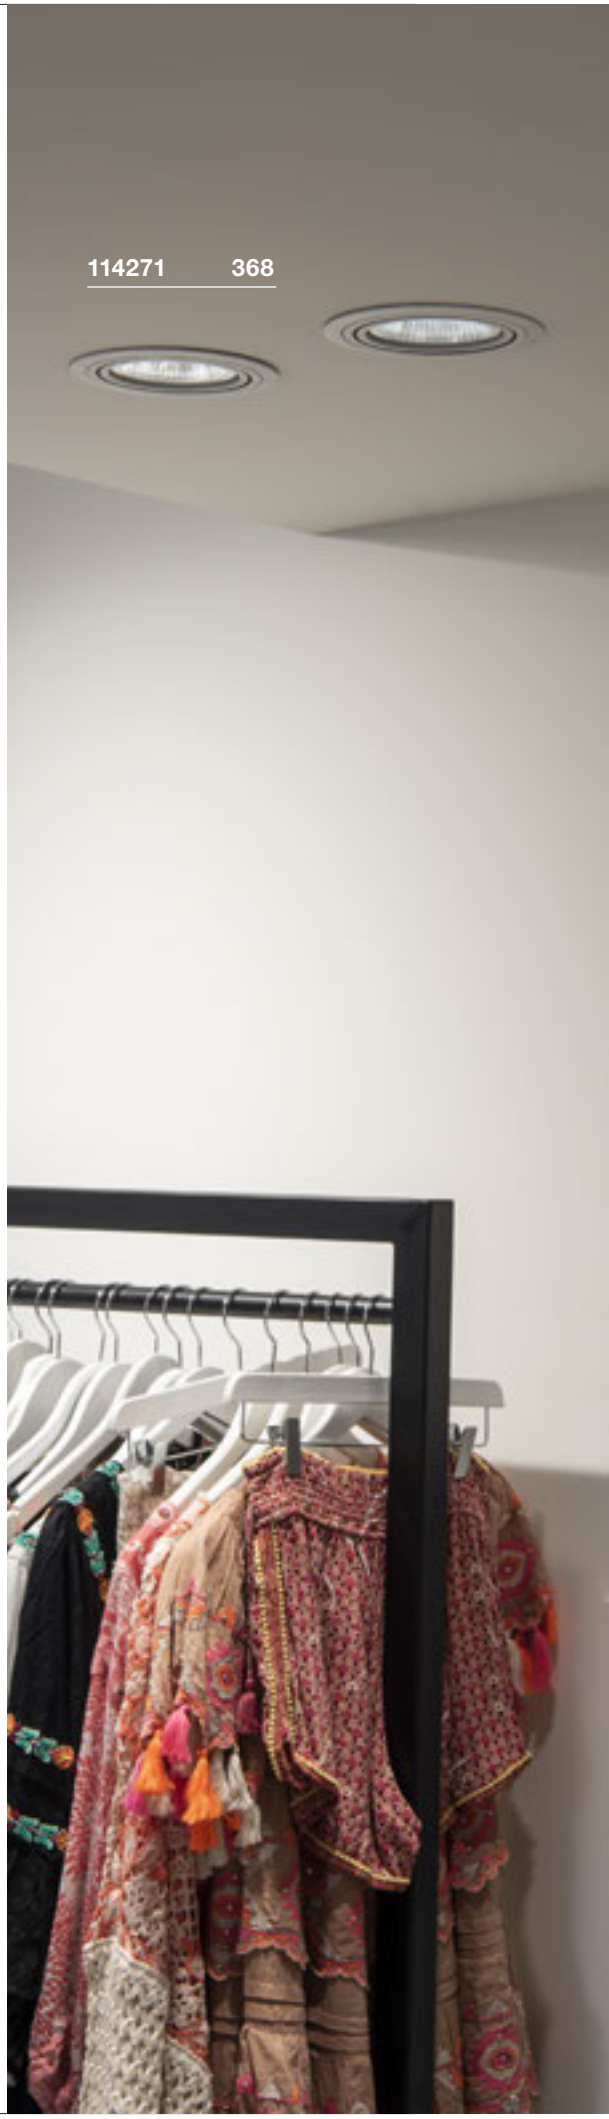



114271 369

NEW TRIA 150
DL, square, 1-10V








2210|2275lm

INSIDE

2700K

CRI 80



1-10V | IP 20 | 30° | L70B50 | 360° | 20°

LED

100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

114280, 114281	2210lm | 2275lm 2700K	A→G F

Options	Prod. no.
2210lm | 2700K | CRI80	
■ black	**114280**
2275lm | 2700K | CRI80	
□ white	**114281**

NEW TRIA 150
DL, square, 1-10V








2425|2500lm

INSIDE

3000K

CRI 80



1-10V | IP 20 | 30° | L70B50 | 360° | 20°

LED

100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 20mm

114290, 114291	2425lm | 2500lm 3000K	A→G E

Options	Prod. no.
2425lm | 3000K | CRI80	
■ black	**114290**
2500lm | 3000K | CRI80	
□ white	**114291**

HORN MINI
EL








70lm 70lm

LED INSIDE — 2900K 3000K — CRI 90



IP 20 | 12° | UGR 19 | L70B50 | 50

350mA
Power consumption: 1W
Material: aluminium/polycarbonate (PC)

- Driver not included
- AMP plug included
- Different light color with golden reflector

1000915, 1000917, 1000914	70lm 2900 3000K	A→G A↑G F

Connector strip, 3 outlets
Prod. no. 111850

LED driver 250mA | 15W incl. strain relief
Prod. no. 464031

Options	Prod. no.
70lm | 3000K | CRI90	
black	**1000915**
70lm | 2900K | CRI90	
black / gold	**1000917**
70lm | 3000K | CRI90	
white	**1000914**


HORN
DL, single, QPAR51







SOCKET INSIDE — <25 W



30°

220-240V ~50/60Hz
Material: aluminium

GU10 <25W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973

Options	Prod. no.
1xGU10	
black	**113140**
1xGU10	
white	**113141**






HORN
DL, double, QPAR51







SOCKET INSIDE <25 W



30°

220-240V ~50/60Hz
Material: aluminium

GU10 <25W

LED GU10 | 6W | 36°
2700K | 900lm | EEK=G
6kWh/1000h

Prod. no. 1005273

Options	Prod. no.
2xGU10	
■ black	**1006121**
2xGU10	
□ white	**1006122**


HORN
DL, single, asymmetric, QPAR51







SOCKET INSIDE <25 W



IP 20 / IP 44 IK02


220-240V ~50/60Hz
Material: aluminium

GU10 <25W

LED GU10 | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no. 1005077

Options	Prod. no.
1xGU10	
■ black	**113150**
1xGU10	
□ white	**113151**

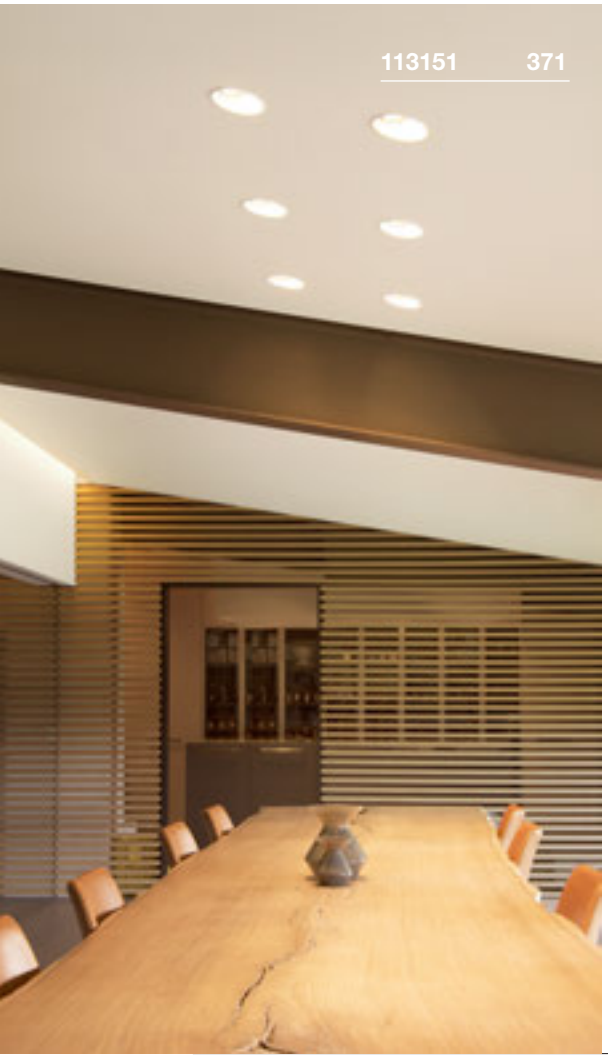


HORN
DL, single, QPAR51





SOCKET INSIDE <25 W



IP 20 / IP 44 IK02

220-240V ~50/60Hz
Material: aluminium

GU10 <25W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973


Options	Prod. no.
1xGU10	
■ black	**113160**
1xGU10	
□ white	**113161**

HORN
EL, single, QPAR51





SOCKET INSIDE <50 W



IP 20

220-240V ~50/60Hz
Material: steel

- Material thickness of mounting surface: max. 45mm

GU10 <50W


LED GU10 51mm | 4W | 36°
4000K | 290lm | EEK=F
4kWh/1000h




Prod. no. 1004974

Options	Prod. no.
1xGU10	
■ black	**112910**
1xGU10	
□ white	**112911**



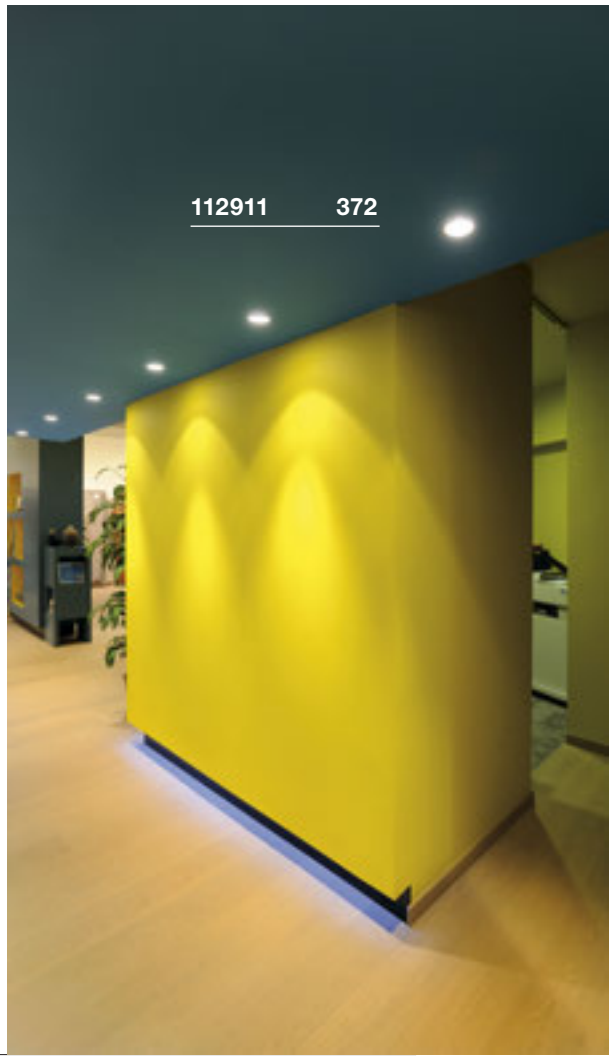



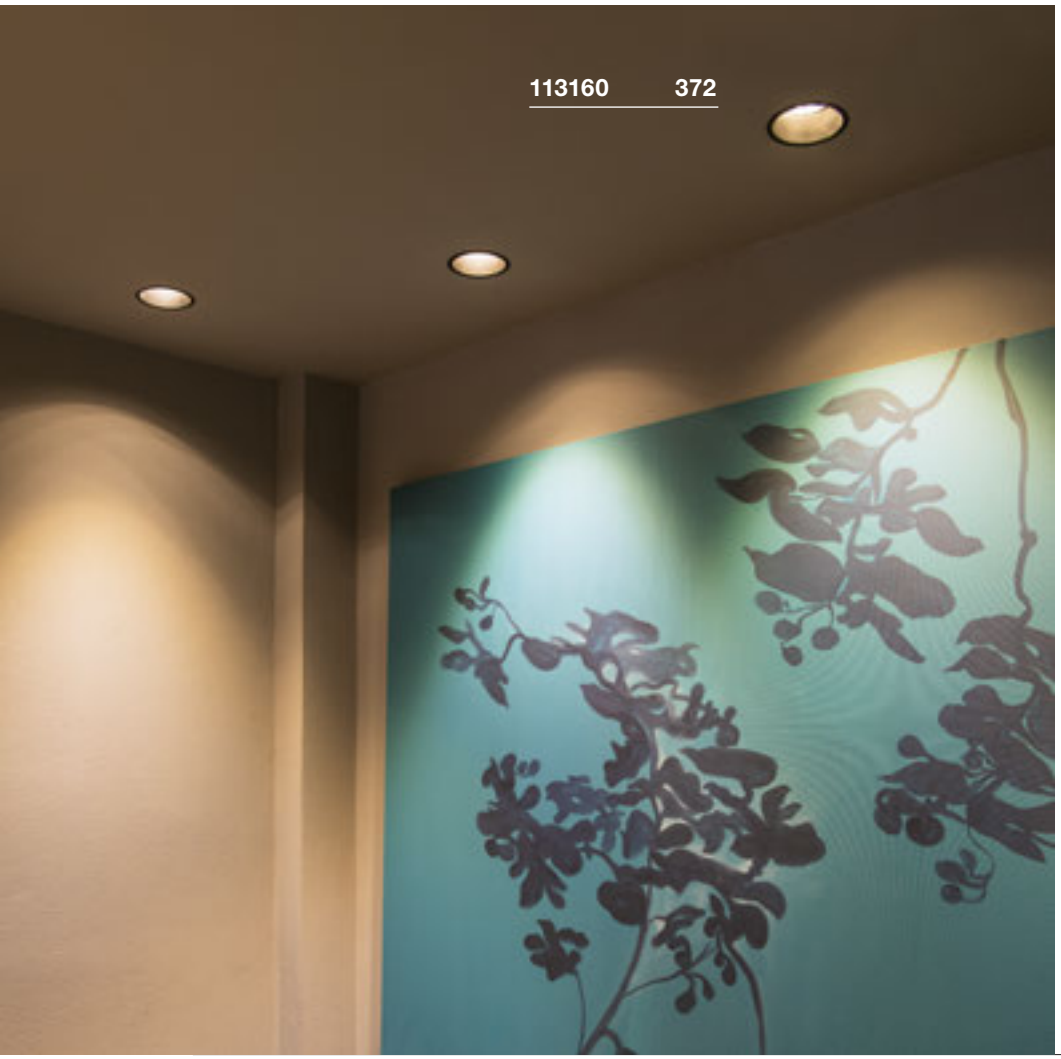

HORN

DL, GU10, blower door tested


NEW VARIANT









SOCKET INSIDE



<25 W





IP 20 / IP 44

IK02

220-240V ~50/60Hz
Material: aluminium

- The downlight meets the RT2012 standards

GU10 <25W

LED GU10| 6W | 38°
3000K | 450lm | EEK=G
6kWh/1000h



Prod. no. 1005080

Options	Prod. no.
1xGU10 ■ black	**1005435**
1xGU10 □ white	**1005436**


HORN-T
EL, QPAR111







SOCKET INSIDE <75 W



IP 20 15°

230V ~50Hz
Material: steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

GU10 <75W

QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h

Prod. no. 1005274


Options	Prod. no.
1xGU10 ■ black	**113170**
1xGU10 □ white	**113171**







HORN MAGNA

















500mA
Power consumption: 6W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Driver not included
- Different light color with golden reflector

1002592, 1002594, 1002591	440/470/550lm 2900K 3000K	A→G A G F

Honeycomb module
Prod. no. 1002596

Options	Prod. no.
445lm | 3000K | CRI80	
black	**1002592**
470lm | 2900K | CRI90	
black / gold	**1002594**
550lm | 3000K | CRI80	
white	**1002591**


KADUX
EL, single, QPAR51







SOCKET INSIDE <50 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

GU10 <50W

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no. 1005075

Options	Prod. no.
1xGU10	
■ black	**115510**
1xGU10	
□ white	**115511**


KADUX
EL, double, QPAR51







SOCKET INSIDE <50 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
2xGU10	
■ black	**115520**
2xGU10	
□ white	**115521**


KADUX
EL, triple, QPAR51







SOCKET INSIDE <50 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm


GU10 <50W

LED GU10 | 6W | 36°
2700K | 900lm | EEK=G
6kWh/1000h

Prod. no. 1005273

Options	Prod. no.
3xGU10	
■ black	**115530**
3xGU10	
□ white	**115531**


115521 376
CEMINSOL

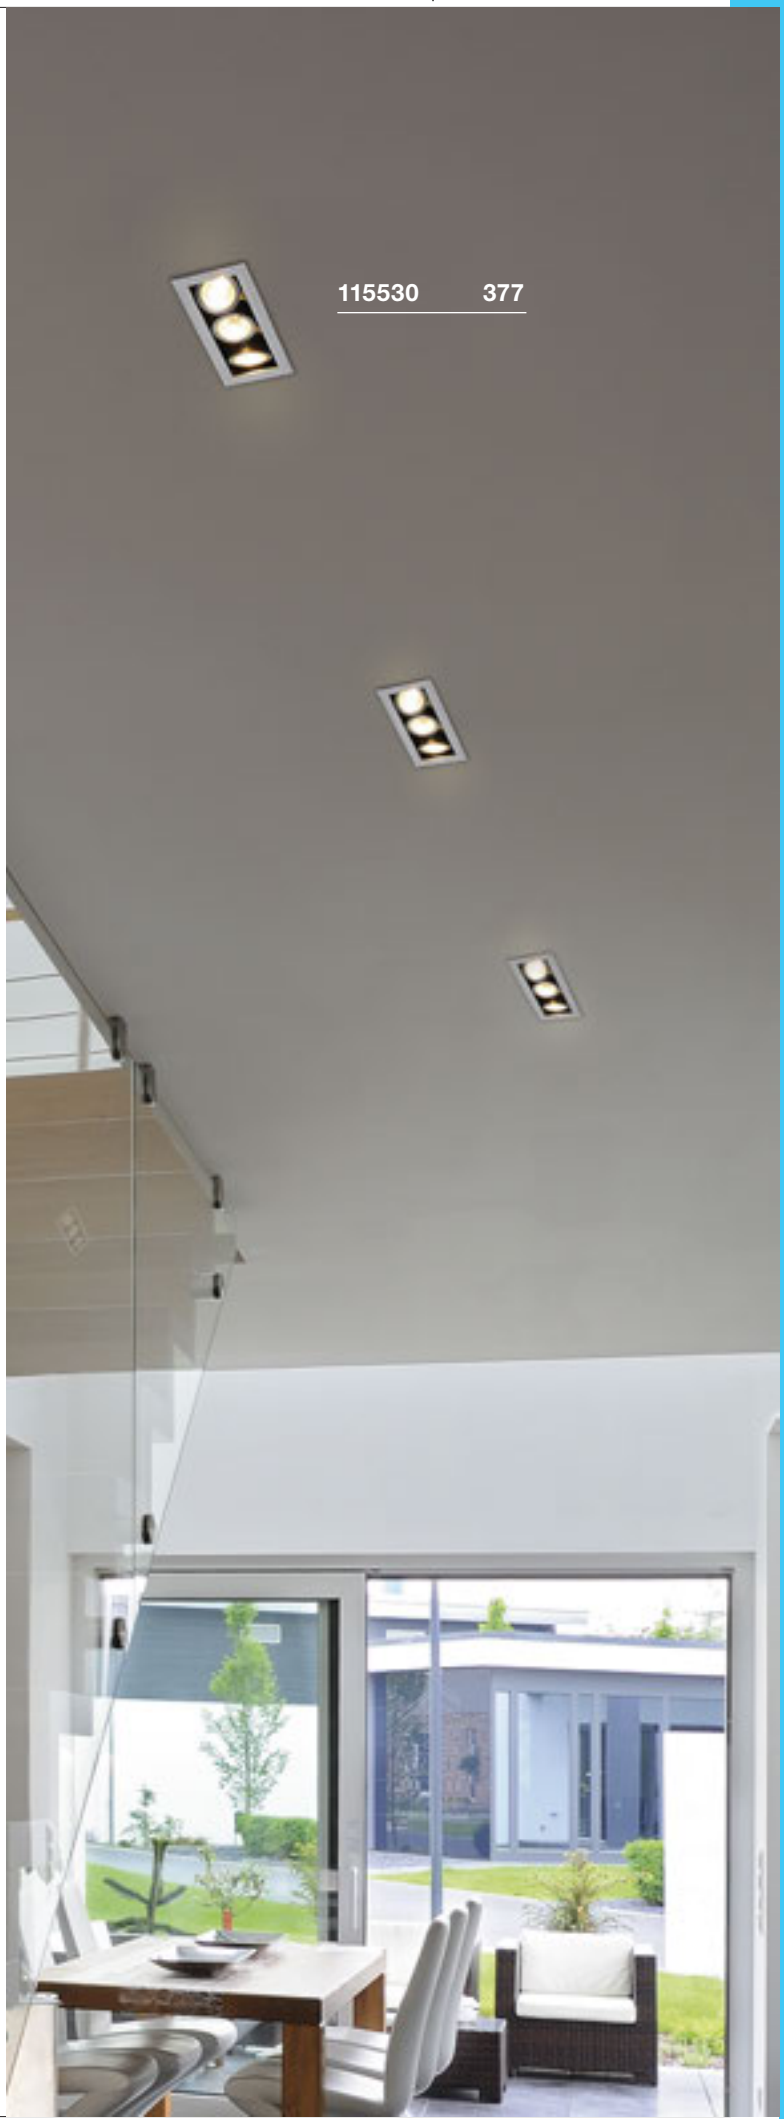

115530 377

KADUX
EL, single, QPAR111





SOCKET INSIDE <75 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25mm

GU10 <75W

QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h

Prod. no. 1005274


Options	Prod. no.
1xGU10	
■ black	**115540**
1xGU10	
□ white	**115541**

KADUX
EL, double, QPAR111





SOCKET INSIDE <75 W



IP 20

220-240V ~50/60Hz
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25mm


GU10 <75W


LED GU10 | 12.5W | 10°
2700K | 900lm | EEK=F
13kWh/1000h

Prod. no. 1005275

Options	Prod. no.
2xGU10	
■ black	**115550**
2xGU10	
□ white	**115551**



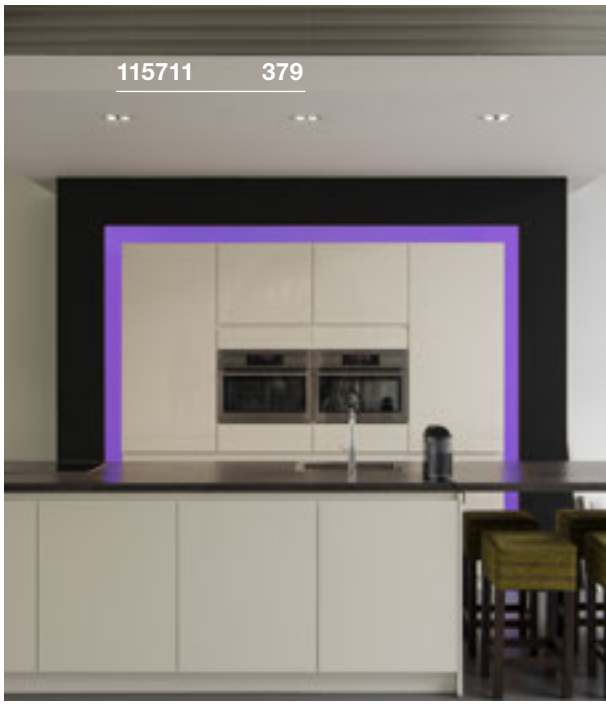

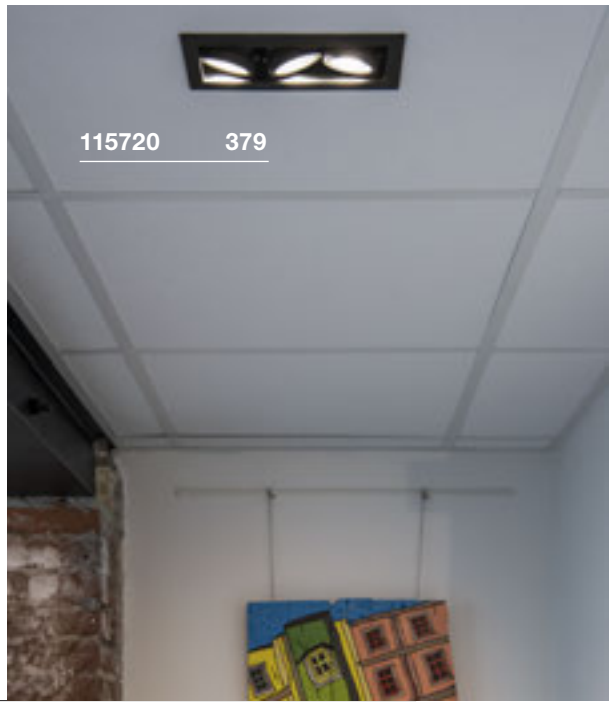


KADUX
EL, single, PHASE







650lm
3000K
CRI 80







220-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



115700, 115701	650lm 3000K	A→G E

Options	Prod. no.
650lm | 3000K | CRI80	
■ black	**115700**
650lm | 3000K | CRI80	
□ white	**115701**

KADUX
EL, double, PHASE










1290lm
3000K
CRI 80



220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm

115710, 115711	1290lm 3000K	A→G E

Options	Prod. no.
1290lm | 3000K | CRI80	
■ black	**115710**
1290lm | 3000K | CRI90	
□ white	**115711**


KADUX
EL, triple, PHASE







1920lm
3000K
CRI 80



220-240V ~50/60Hz | 350mA
Total wattage: 20W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 30 mm



115720, 115721	1920lm 3000K	A→G E


Options	Prod. no.
1920lm | 3000K | CRI80	
■ black	**115720**
1920lm | 3000K | CRI90	
□ white	**115721**

KADUX
DL, single, 1-10V





2425|2500lm
LED INSIDE
CRI 80
3000K



1-10V | IP 20 | 30° | 30 000 Hours | L70B50 | LED

100-240V ~50/60Hz | 700mA
Total wattage: 29W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25mm

115730, 115731	2425lm | 2500lm 3000K	A→G A G E

1-10V dimming
Prod. no. 470505


Options	Prod. no.
2425lm | 3000K | CRI80	
■ black	**115730**
2500lm | 3000K | CRI80	
□ white	**115731**

KADUX
EL, double, 1-10V





5200|5300lm
LED INSIDE
CRI 80
3000K



1-10V | IP 20 | 30° | 30 000 Hours | L70B50 | LED

100-240V ~50/60Hz | 1400mA
Total wattage: 54W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 25mm

115740, 115741	5200lm | 5300lm 3000K	A→G A G E

1-10V dimming
Prod. no. 470505

Options	Prod. no.
5200lm | 3000K | CRI80	
■ black	**115740**
5300lm | 3000K | CRI80	
□ white	**115741**




OLYMP


SUPROS 78
EL, PHASE







700lm
|
LED INSIDE
|
3000K
CRI 80



8,0 cm

C | IP 20 | 60° | L70B50 | 30° | LED

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25mm

116310, 116311	700lm 3000K	A→G E

Lens 20°
Prod. no. 116302

Lens 40°
Prod. no. 116304

Options	Prod. no.
700lm | 3000K | CRI80 | 60°	
■ black	**116310**
700lm | 3000K | CRI80 | 60°	
□ white	**116311**







SUPROS 78
EL, MOVE, PHASE













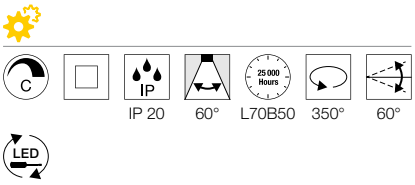

220-240V ~50/60Hz | 250mA
Total wattage: 12W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25mm

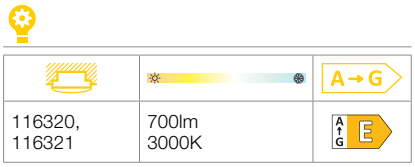



☐ Lens 20°
Prod. no. 116302



☐ Lens 40°
Prod. no. 116304




Options	Prod. no.
700lm | 3000K | CRI80 | 60°	
■ black	**116320**
700lm | 3000K | CRI80 | 60°	
☐ white	**116321**

SUPROS DL





2600lm
3000K
CRI 90



IP 20 | 60° | L70B50 | 30°

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25mm

1003299, 1003300	2600lm 3000K	A→G E

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104


Options	Prod. no.
2600lm | 3000K | CRI90 | 60°	
■ black	**1003299**
2600lm | 3000K | CRI90 | 60°	
□ white	**1003300**

SUPROS DL





3380lm
3000K
CRI 90



IP 20 | 60° | L70B50 | 30°

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25mm

1003301, 1003302	3380lm 3000K	A→G E

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104


Options	Prod. no.
3380lm | 3000K | CRI90 | 60°	
■ black	**1003301**
3380lm | 3000K | CRI90 | 60°	
□ white	**1003302**

SUPROS DL





2700lm
4000K
CRI 90



IP 20 | 60° | L70B50 | 30°

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25mm

1003303, 1003304	2700lm 4000K	A→G E

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104

Options	Prod. no.
2700lm | 4000K | CRI90 | 60°	
■ black	**1003303**
2700lm | 4000K | CRI90 | 60°	
□ white	**1003304**


SUPROS
DL







3520lm
CRI 90
4000K



10,7 cm

IP 20 | 60° | L70B50 | 30°

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 25mm

1003305, 1003306	3520lm 4000K	A→G E

Reflector 20°
Prod. no. 114102

Reflector 40°
Prod. no. 114104

Options	Prod. no.
3520lm | 4000K | CRI90 | 60°	
black	**1003305**
3520lm | 4000K | CRI90 | 60°	
white	**1003306**




SUPROS
DL, MOVE





2600lm
LED INSIDE
3000K
CRI 90



IP 20 | 60° | L70B50 | 350° | 60°

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 25 mm

1003307, 1003308	2600lm 3000K	A→G

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104


Options	Prod. no.
2600lm | 3000K | CRI90 | 60°	
black	**1003307**
2600lm | 3000K | CRI90 | 60°	
white	**1003308**

SUPROS
DL, MOVE





2700lm
LED INSIDE
4000K
CRI 90



IP 20 | 60° | L70B50 | 350° | 60°

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 25 mm

1003311, 1003312	2700lm 4000K	A→G

Reflector 20°
Prod. no. 114102
Reflector 40°
Prod. no. 114104

Options	Prod. no.
2700lm | 4000K | CRI90 | 60°	
black	**1003311**
2700lm | 4000K | CRI90 | 60°	
white	**1003312**






SUPROS
DL, MOVE





3380lm
INSIDE
CRI 90
3000K



IP 20 | 60° | L70B50 | 350° | 60°

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 25 mm

1003309, 1003310	3380lm 3000K	A→G, A–G E

Reflector 20°
Prod. no. 114102



Reflector 40°
Prod. no. 114104




Options	Prod. no.
3380lm | 3000K | CRI90 | 60°	
■ black	**1003309**
3380lm | 3000K | CRI90 | 60°	
□ white	**1003310**

SUPROS
DL, MOVE



3520lm
INSIDE
CRI 90
4000K



IP 20 | 60° | L70B50 | 350° | 60°

220-240V ~50/60Hz | 950mA
Total wattage: 36W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 25 mm

1003313, 1003314	3520lm 4000K	A→G, A–G E

Reflector 20°
Prod. no. 114102



Reflector 40°
Prod. no. 114104




Options	Prod. no.
3520lm | 4000K | CRI90 | 60°	
■ black	**1003313**
3520lm | 4000K | CRI90 | 60°	
□ white	**1003314**

1003008 389



SENSER 12
EL, round



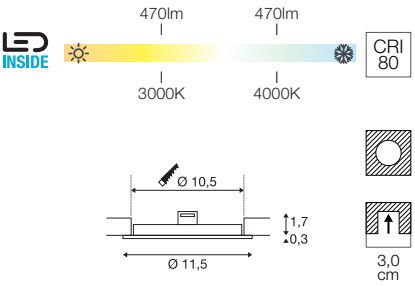

IP 20 IK02 L70B50

200mA
Power consumption: 7W
Material: aluminium

- Spring clips
- Driver not included


1003008, 1004694	470lm | 440lm 3000 4000K	A→G D

LED driver 10W | 200mA | dimmable | inl. strain relief
Prod. no. 1003254

Options	Prod. no.
470lm | 3000K | CRI80	
white	**1003008**
470lm | 4000K | CRI90	
white	**1004694**

SENSER 18
EL, round



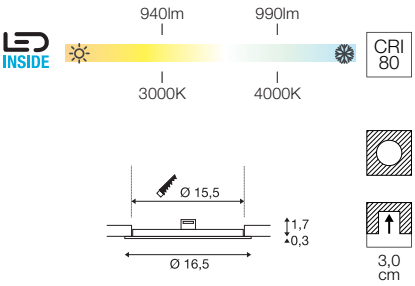

IP 20 IK02 L70B50

350mA
Power consumption: 12W
Material: aluminium

- Spring clips
- Driver not included


1003009, 1004695	940lm | 990lm 3000K 4000K	A→G D

LED driver 15W | 350mA | dimmable | incl. strain relief
Prod. no. 1002803

Options	Prod. no.
940lm | 3000K | CRI80	
white	**1003009**
990lm | 4000K | CRI90	
white	**1004695**

SENSER 24
EL, round



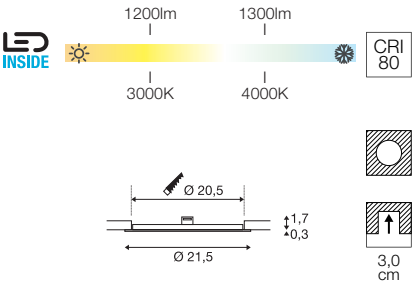

IP 20 IK02 L70B50

500mA
Power consumption: 13W
Material: aluminium

- Spring clips
- Driver not included


1003010, 1004696	1200lm | 1300lm 3000K 4000K	A→G D

LED driver 15W | 500mA | dimmable | incl. strain relief
Prod. no. 464144

Options	Prod. no.
1200lm | 3000K | CRI80	
white	**1003010**
1300lm | 4000K | CRI90	
white	**1004696**

SENSER 12
EL, round



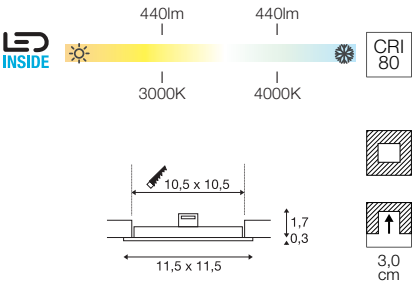

IP 20 IK02 L70B50

200mA
Power consumption: 7W
Material: aluminium

- Spring clips
- Driver not included


1003011, 1004697	440lm 3000K 4000K	A→G D

LED driver 10W | 200mA | dimmable | incl. strain relief
Prod. no. 1003254

Options	Prod. no.
440lm | 3000K | CRI80	
white	**1003011**
440lm | 4000K | CRI90	
white	**1004697**

SENSER 18
EL, round



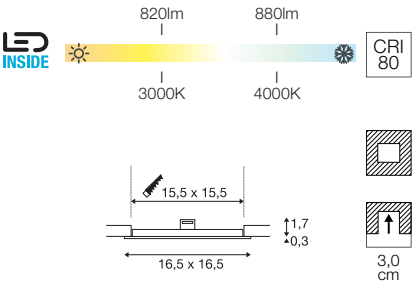

IP 20 IK02 L70B50

350mA
Power consumption: 12W
Material: aluminium

- Spring clips
- Driver not included


1003012, 1004698	820lm | 880lm 3000K 4000K	A→G D

LED driver 15W | 350mA | dimmable | incl. strain relief
Prod. no. 1002803

Options	Prod. no.
820lm | 3000K | CRI80	
white	**1003012**
880lm | 4000K | CRI90	
white	**1004698**

SENSER 24
EL, round



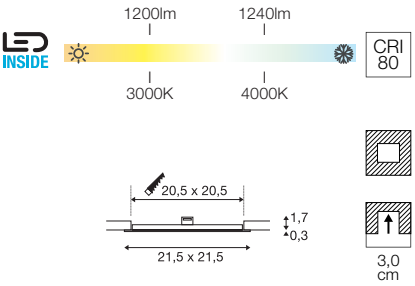

IP 20 IK02 L70B50

500mA
Power consumption: 13W
Material: aluminium

- Spring clips
- Driver not included

1003013, 1004699	1200lm | 1240lm 3000K 4000K	A→G D

LED driver 15W | 500mA | dimmable | incl. strain relief
Prod. no. 464144

Options	Prod. no.
1200lm | 3000K | CRI80	
white	**1003013**
1240lm | 4000K | CRI90	
white	**1004699**



1003011 390


112682 393



112702 393

VERLUX
EL, square, PHASE





880lm
INSIDE
CRI 80
3000K





IP 20 IK02 80° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 30 mm

112682	880lm 3000K	A→G E


Options	Prod. no.
880lm | 3000K | CRI80	
white	**112682**

VERLUX
EL, square, PHASE





1800lm
INSIDE
CRI 80
3000K





IP 20 IK02 80° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 30 mm

112692	1800lm 3000K	A→G E

Options	Prod. no.
1800lm | 3000K | CRI80	
white	**112692**


VERLUX
EL, square, PHASE







2360lm
INSIDE
CRI 80
3000K





IP 20 IK02 80° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 30 mm

112702	2360lm 3000K	A→G F


Options	Prod. no.
2360lm | 3000K | CRI80	
white	**112702**

DL 126
EL





160lm
INSIDE
CRI 80
2700K



IP 20 | 90° | L70B50 | 200

12V DC
Power consumption: 2.8W
Material: aluminium/plastic

- Mounting spring

112161, 112165, 112162	160lm 2700K	A→G A↑G F

Options	Prod. no.
160lm | 2700K | CRI80 white	**112161**
160lm | 2700K | CRI80 grey	**112165**
160lm | 2700K | CRI80 chrome	**112162**


DL 126
EL







160lm
INSIDE
CRI 80
3000K



IP 20 | 90° | L70B50 | 200


12V DC
Power consumption: 2.8W
Material: aluminium/plastic

- Mounting spring

112221, 112225, 112222	160lm 3000K	A→G A↑G F

Options	Prod. no.
160lm | 3000K | CRI80 white	**112221**
160lm | 3000K | CRI80 grey	**112225**
160lm | 3000K | CRI80 chrome	**112222**



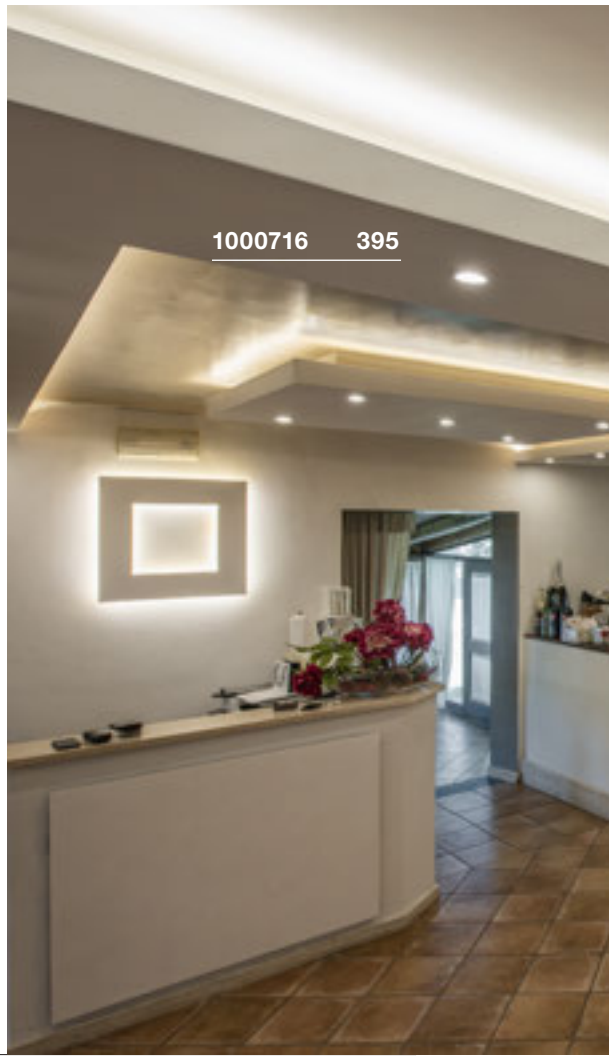





PIKA
DL, round, QPAR51, rigid










SOCKET INSIDE  <50 W







220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 13mm



GU10 <50W



LED GU10 | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h



Prod. no. 1005077

Options	Prod. no.
1xGU10 white	**1000714**
1xGU10 grey	**1000717**
1xGU10 chrome	**1000715**
1xGU10 brass	**1000716**

PIKA
DL, round, QPAR51, pivoting











SOCKET INSIDE  <50 W







220-240V ~50/60Hz
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 15mm



GU10 <50W



LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h



Prod. no. 1005075

Options	Prod. no.
1xGU10 white	**1000718**
1xGU10 grey	**1000721**
1xGU10 chrome	**1000719**
1xGU10 brass	**1000720**

OCULUS
CL, MOVE, PHASE








36lm - 780lm

LED INSIDE

2000K - 3000K

CRI 90



8,0 cm

C | IP 20 | 100° | L70B50 | 30° | LED

220-240V ~50/60Hz | 250mA
Total wattage: 11W
Material: aluminium/glass

- Mounting spring
- Material thickness of mounting surface: 7-20 mm
- Additional frosted lens included


1004668, 1004669	36-780lm 2000-3000K	A→G / A G F

Options	Prod. no.
36-780lm | 2000-3000K | CRI90	
■ black	**1004668**
36-780lm | 2000-3000K | CRI90	
□ white	**1004669**








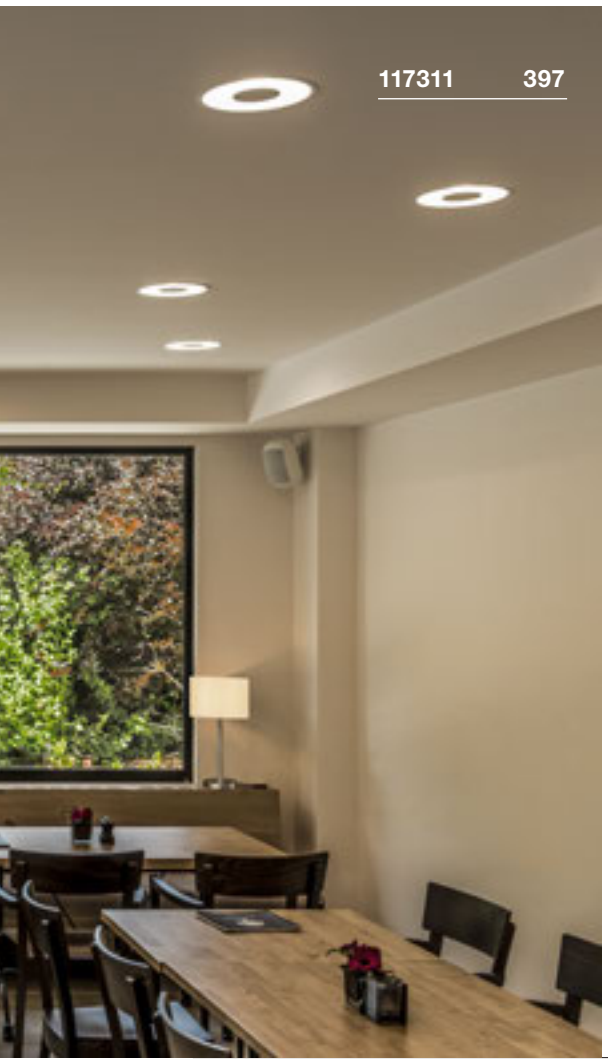

OCCULDAS 14
EL, indirect, PHASE



810lm
3000K
CRI 80



IP 20 | 120° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium/steel

- Mounting spring
- Material thickness of mounting surface: max. 10-30 mm


117331	810lm 3000K	A→G A G E

Options	Prod. no.
810lm | 3000K | CRI80	
white	**117331**

OCCULDAS 23
EL, indirect, PHASE



1500lm
3000K
CRI 80



IP 20 | 120° | L70B50

200-240V ~50/60Hz | 700mA
Total wattage: 26W
Material: aluminium/steel


- Mounting spring
- Material thickness of mounting surface: max. 10-30 mm


117311	1500lm 3000K	A→G A G E

Options	Prod. no.
1500lm | 3000K | CRI80	
white	**117311**

CONTONE®
DL, round, adjustable, PHASE



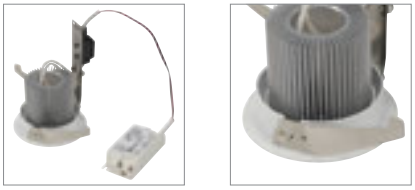

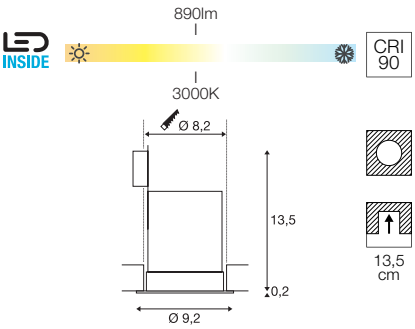

C | IP 20 | 30° | L70B50 | 18° | LED


220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium


- Material thickness of mounting surface: max. 25mm

161271	890lm 3000K	A→G / A G F

Options	Prod. no.
890lm | 3000K | CRI90	
white	**161271**

CONTONE®
DL, round, rigid, PHASE

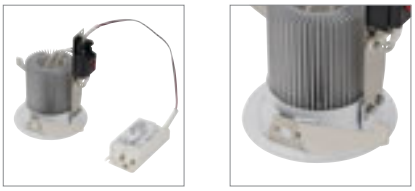

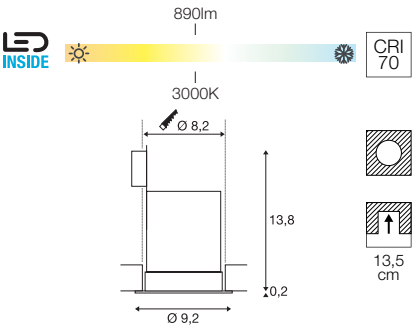

C | IP 44 | 30° | L70B50 | LED

220-240V ~50/60Hz | 350mA
Total wattage: 16W
Material: aluminium

- Material thickness of mounting surface: max. 25mm

161291	890lm 3000K	A→G / A G F

Options	Prod. no.
890lm | 3000K | CRI70	
white	**161291**










H-LIGHT
DL, round, PHASE





265lm
2700K
CRI 80



IP 20 | 20° | L70B50 | 15°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

114480, 114481	265lm 2700K	A→G


Options	Prod. no.
265lm | 2700K | CRI80	
■ black	**114480**
265lm | 2700K | CRI80	
□ white	**114481**

H-LIGHT
DL, oval, PHASE





395lm
2700K
CRI 80



IP 20 | 20° | L70B50 | 15°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 30 mm

114490, 114491	395lm 2700K	A→G

Options	Prod. no.
395lm | 2700K | CRI80	
■ black	**114490**
395lm | 2700K | CRI80	
□ white	**114491**

KARPO 30
EL








450|470lm

INSIDE

3000K

CRI 90



IP 20 | 40° | L70B50 | 350° | 90°

500mA
Power consumption: 7.5W
Material: aluminium/steel

- Spring clips
- Material thickness of mounting surface: max. 12 mm
- Driver not included

152380, 152381	450lm | 470lm 3000K	A→G / A G E

Options	Prod. no.
450lm | 3000K | CRI90	
■ black	**152380**
470lm | 3000K | CRI90	
□ white	**152381**

HELIA
EL








700|800lm

INSIDE

3000K

CRI 90




IP 20 | 35° | L70B50 | 340° | 90°


500mA
Power consumption: 9W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 15 mm
- Driver not included

156530, 156531	700lm | 800lm 3000K	A→G / A G E

Options	Prod. no.
700lm | 3000K | CRI90	
■ black	**156530**
800lm | 3000K | CRI90	
□ white	**156531**

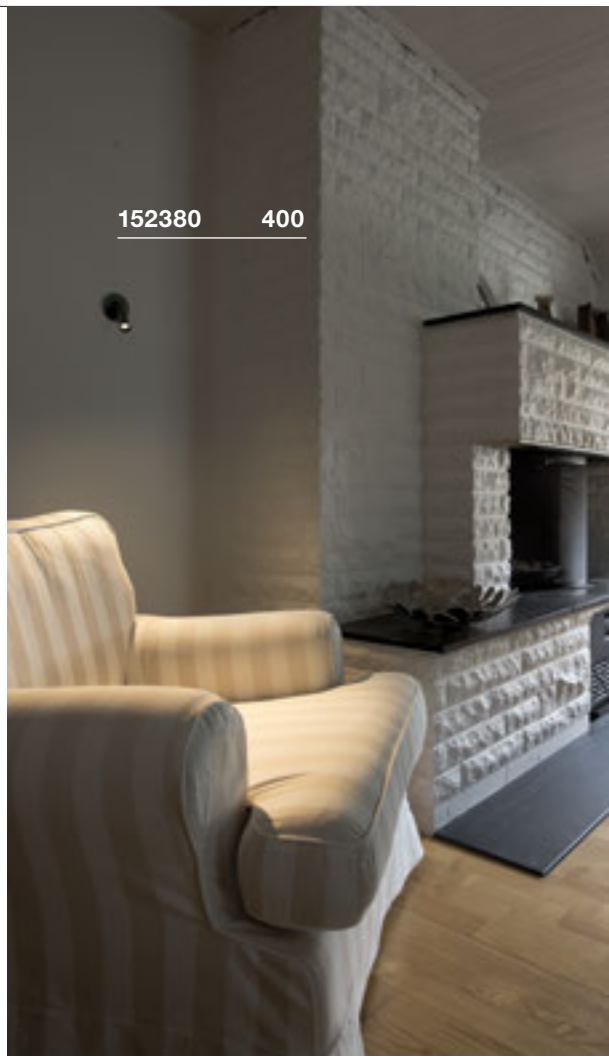

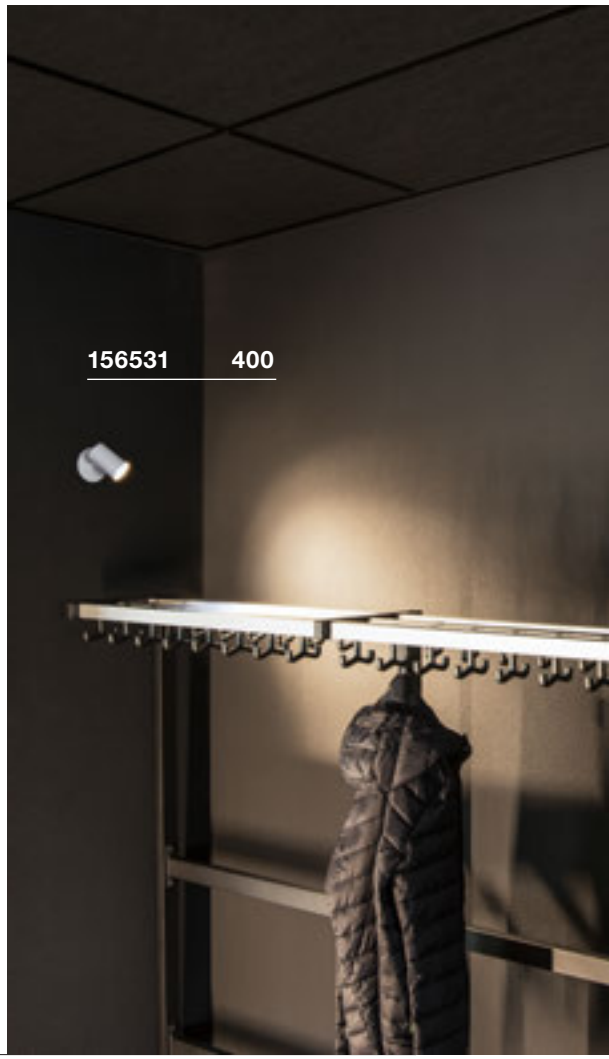




LIGHTPOINT
EL








100lm
INSIDE
CRI 80
3000K





IP 20 L70B50 50

350mA
Power consumption: 1W
Material: aluminium/polymethylacrylate (PMMA)

- Material thickness of mounting surface:
- Driver not included

1001156, 1001155	100lm 3000K	A→G F

■ Connector strip, 3 outlets
Prod. no. 111850


□ LED driver 3W | 350mA | incl. strain relief
Prod. no. 464107

Options	Prod. no.
100lm | 3000K | CRI80	
white	**1001156**
100lm | 3000K | CRI90	
chrome	**1001155**


PLASTRA
RL, round, QPAR51







SOCKET INSIDE <35 W



IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Spring clips and mounting plate
- Material thickness of mounting surface: max. 25mm

GU10 <35W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973

Options	Prod. no.
1xGU10	
white	**148070**






PLASTRA
RL, square, QPAR51








SOCKET INSIDE

<35 W



14,0 cm

IP 20

220-240V ~50/60Hz
Material: plaster/steel

- Spring clips and mounting plate
- Material thickness of mounting surface: max. 25mm

GU10 <35W


LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10	
white	**148071**


DEKLED
EL







60lm
LED INSIDE
3000K
CRI 80



IP 20 | 45° | L70B50 | 150

350mA
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: 10 mm

112242	60lm 3000K	A→G

LED driver 320mA | 3W incl. strain relief
Prod. no. 464108

Options	Prod. no.
60lm | 3000K | CRI80 aluminium	**112242**

VARU
EL, QPAR51










SOCKET INSIDE
<5 W



IP 20 / IP 65 | IK02


220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: 15 mm

GU10 <5W
Diameter: 5 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h
Prod. no. 1004972

Options	Prod. no.
1xGU10 black	**1001930**
1xGU10 white/black	**1001931**

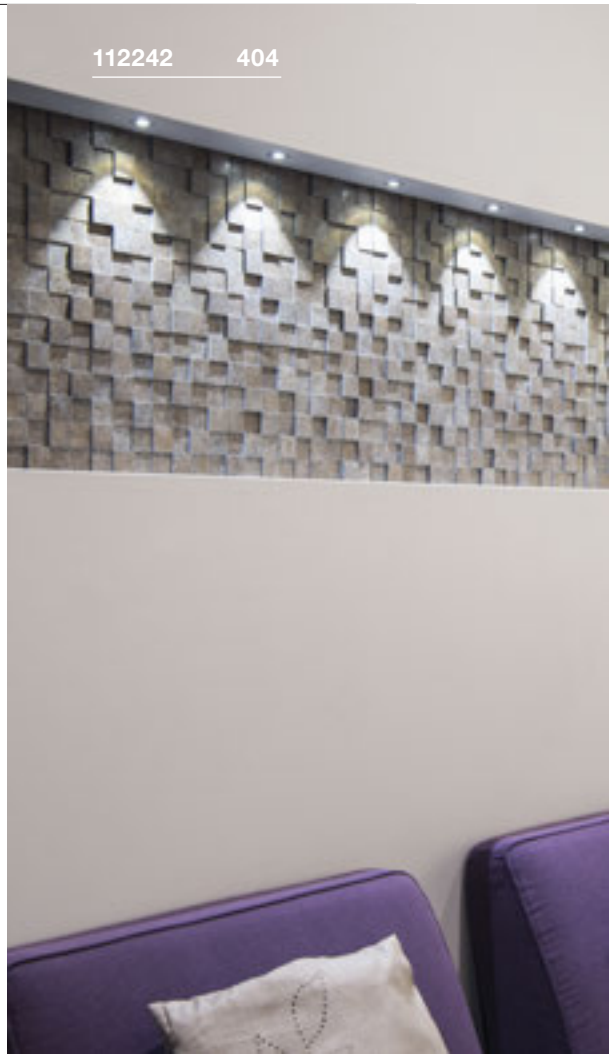







DOLIX OUT
EL, round, QPAR51










SOCKET INSIDE <50 W



IP 65 IK02

220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20mm

GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
1xGU10 white	**1001165**
1xGU10 chrome	**1001166**
1xGU10 grey	**1001167**
1xGU10 silver	**1001168**

DOLIX OUT
EL, square, QPAR51










SOCKET INSIDE <50 W



IP 65 IK02

220-240V ~50/60Hz
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 20mm

GU10 <50W

LED GU10 | 6W | 36°
2700K | 900lm | EEK=G
6kWh/1000h



Prod. no. 1005273

Options	Prod. no.
1xGU10 white	**1001169**
1xGU10 chrome	**1001170**
1xGU10 grey	**1001171**
1xGU10 silver	**1001172**


KAMUELA ECO
EL, round, PHASE







400lm
3000K
CRI 80



IP 65 IK02 38° L70B50

220-240V ~50Hz
Total wattage: 6.5W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 40mm
- Fire resistant for at least 90 minutes compliant with BS 476-21

1001015, 1001016	400lm 3000K	A→G E

Options	Prod. no.
400lm | 3000K | CRI80	
black	**1001015**
400lm | 3000K | CRI80	
white	**1001016**


KAMUELA ECO
EL, round, PHASE







400lm
4000K
CRI 80




IP 65 IK02 38° L70B50

220-240V ~50Hz
Total wattage: 6.5W
Material: aluminium/plastic

- Spring clips
- Material thickness of mounting surface: max. 40mm
- Fire resistant for at least 90 minutes compliant with BS 476-21

1001017, 1001018	400lm 4000K	A→G E

Options	Prod. no.
400lm | 4000K | CRI80	
black	**1001017**
400lm | 4000K | CRI80	
white	**1001018**

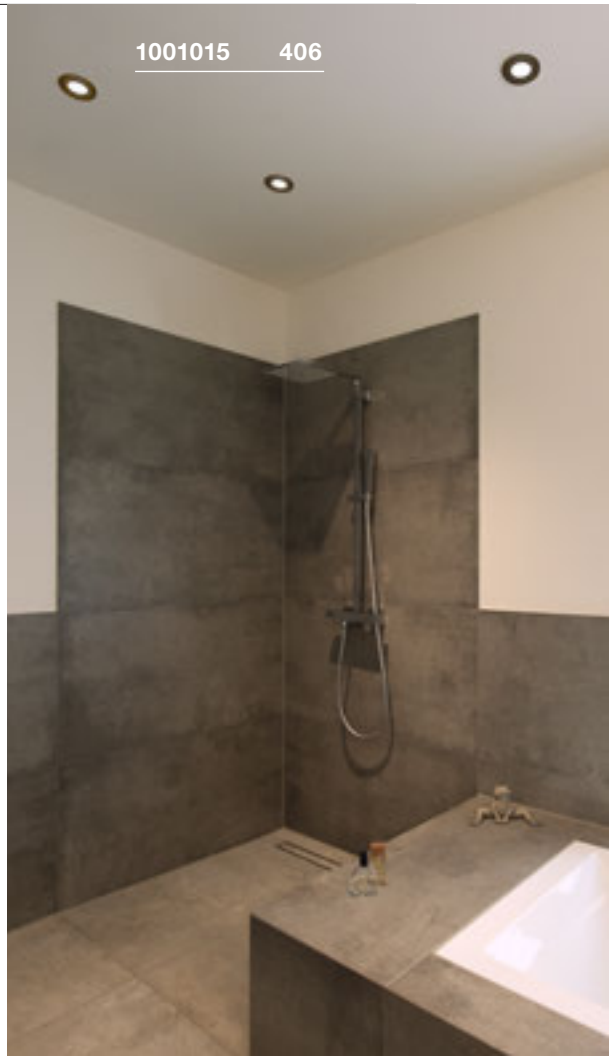





KINI
EL, PHASE









850lm

INSIDE

CRI 80

3000K





L | IP 65 | 60° | L70B50 | 30° | LED

220-240V ~50/60Hz | 260mA
Total wattage: 12W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: 5-20mm

1000833	850lm 3000K	E

Options	Prod. no.
850lm | 3000K | CRI80	
white	**1000833**

AKALO D83
EL, PHASE

CCT







800lm / 880lm / 850lm

INSIDE

CRI 80

3000K / 4200K / 5700K





C | IP 20 | IK02 | 90° | 28 | L70B50

LED

220-240V ~50/60Hz | 120mA
Total wattage: 9W
Material: aluminium/polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: 20 mm
- Kelvin value can be configured via rear switch

1001264	800/880/850lm 3000/4200/5700K	F


Options	Prod. no.
800/880/850lm | 3000/4200/5700K | CRI80	
white	**1001264**

FRAME BASIC SET
RL





600lm
INSIDE
3000K
CRI 80



IP 20 90° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 8.3W
Material: aluminium/acrylic

- Spring clips
- Material thickness of mounting surface: max. 20mm

112720, 112721	445lm 3000K	E

Options	Prod. no.
600lm | 3000K | CRI80	
black	**112720**
600lm | 3000K | CRI80	
white	**112721**


FRAME CURVE
EL, HV







100lm
INSIDE
2700K
CRI 80



IP 20 L70B50 250

100-277V ~50/60Hz | 350mA
Total wattage: 3.1W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 10-30 mm

1000574, 1000575	100lm 2700K	F

Flush frame
Prod. no. 112780


Panel connection
Prod. no. 112781

Options	Prod. no.
100lm | 2700K | CRI80	
white	**1000574**
100lm | 2700K | CRI90	
grey	**1000575**

FRAME CURVE
EL










60lm
INSIDE
3000K
CRI 90



IP 20 L70B50

350mA
Total wattage: 1W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: max. 10-30 mm
- AMP connector incl. / driver excl.

113292, 111292	60lm 3000K	F

Connector strip, 3 outlets
Prod. no. 111850


Cable extension, 1m
Prod. no. 111861


Flush frame
Prod. no. 112780

Panel connection
Prod. no. 112781

LED driver 350mA | 3W
incl. strain relief
Prod. no. 464107

Options	Prod. no.
60lm | 3000K | CRI90	
white	**113292**
60lm | 3000K | CRI90	
grey	**111292**

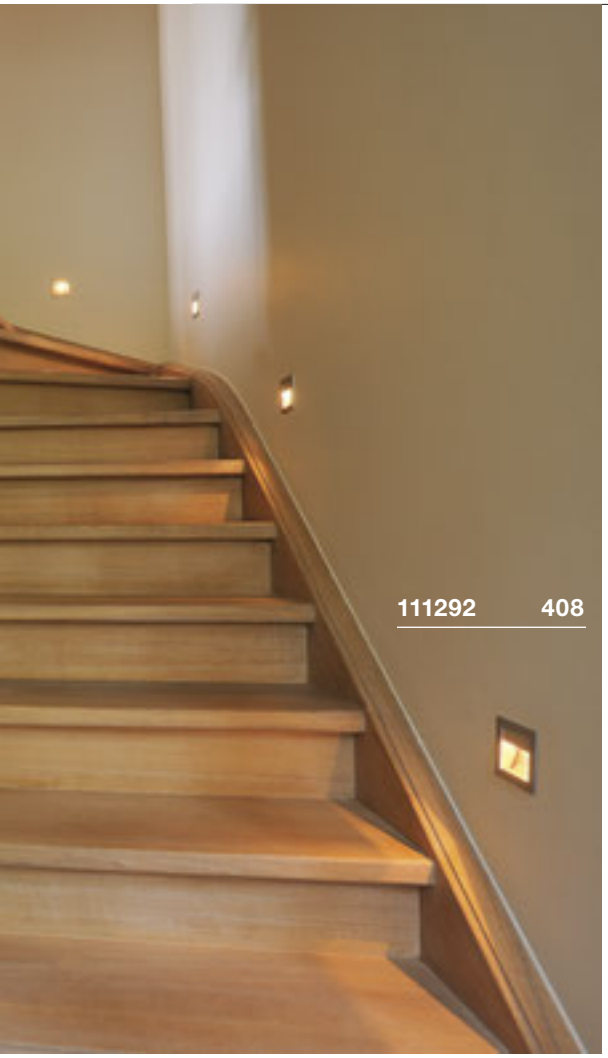

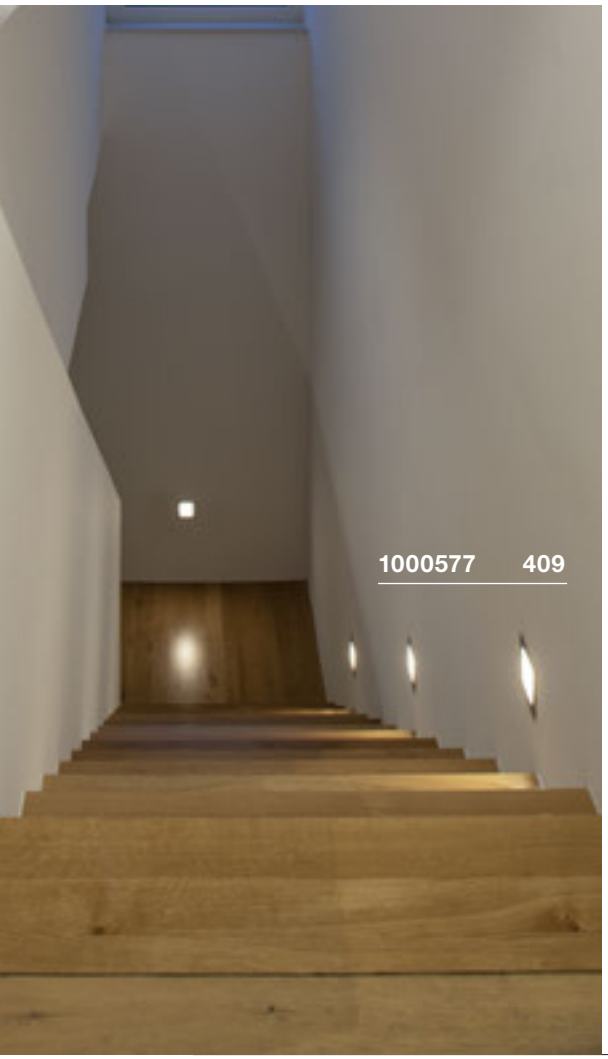

FRAME BASIC
RL, HV










140lm
INSIDE
CRI 80
2700K



IP 20 L70B50 250

100-277V ~50/60Hz | 350mA
Total wattage: 3.1W
Material: aluminium

- Spring clips
- Material thickness of mounting surface: 10-30 mm

1000576, 1000577	140lm 2700K	A→G F

Flush frame
Prod. no. 112780

Panel connection
Prod. no. 112781

Options	Prod. no.
140lm | 2700K | CRI80	
white	**1000576**
140lm | 2700K | CRI90	
grey	**1000577**

FRAME BASIC
RL










40lm
INSIDE
CRI 90
3000K



IP 20 L70B50

350mA
Total wattage: 1W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: max. 10-30 mm
- AMP connector incl. / driver excl.

113262, 111262	40lm 3000K	A→G F

Connector strip, 3 outlets
Prod. no. 111850

Cable extension, 1m
Prod. no. 111861

Flush frame
Prod. no. 112780

Panel connection
Prod. no. 112781


LED driver 350mA | 3W
incl. strain relief
Prod. no. 464107


Options	Prod. no.
40lm | 3000K | CRI90	
white	**113262**
40lm | 3000K | CRI90	
grey	**111262**

QUAD FRAME 9
WL







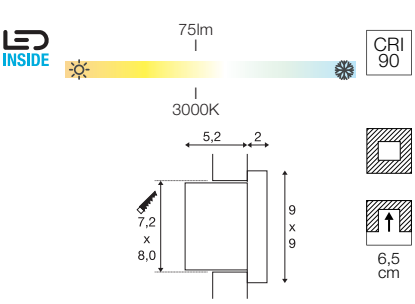

L70B50


100-240V ~50/60Hz | 350mA
Total wattage: 3W
Material: aluminium/aluminium

- Spring clips
- Material thickness of mounting surface: 10-30 mm


1003466	75lm 3000K	A→G F

Options | **Prod. no.**
75lm | 3000K | CRI90
white **1003466**

NOTAPO S
RL





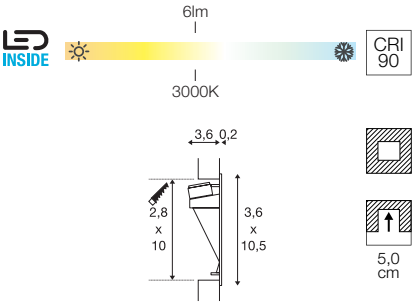

IP 20 L70B50 30

700mA
Total wattage: 2W
Material: aluminium

- Spring clips
- Open cable end


1002979	6lm 3000K	A→G F

- ☐ LED driver 700mA | 10.5W dimmable incl. strain relief **Prod. no. 464142**
- ☐ LED driver 700mA | 30W incl. strain relief **Prod. no. 464200**
- ■ NOTAPO | mounting frame **Prod. no. 1002981**


Options | **Prod. no.**
6lm | 3000K | CRI90 | H: 10.5 cm
white **1002979**

NOTAPO L
RL







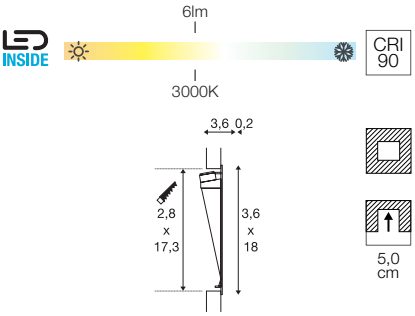

IP 20 L70B50 30

700mA
Total wattage: 2W
Material: aluminium

- Spring clips
- Open cable end

1002980	6lm 3000K	A→G F


- ☐ LED driver 700mA | 10.5W dimmable incl. strain relief **Prod. no. 464142**
- ☐ LED driver 700mA | 30W incl. strain relief **Prod. no. 464200**
- ■ NOTAPO | mounting frame **Prod. no. 1002981**

Options | **Prod. no.**
6lm | 3000K | CRI90 | H: 18 cm
white **1002980**

- ■ Flush frame **Prod. no. 112780**
- ■ Panel connection **Prod. no. 112781**



1003466 410

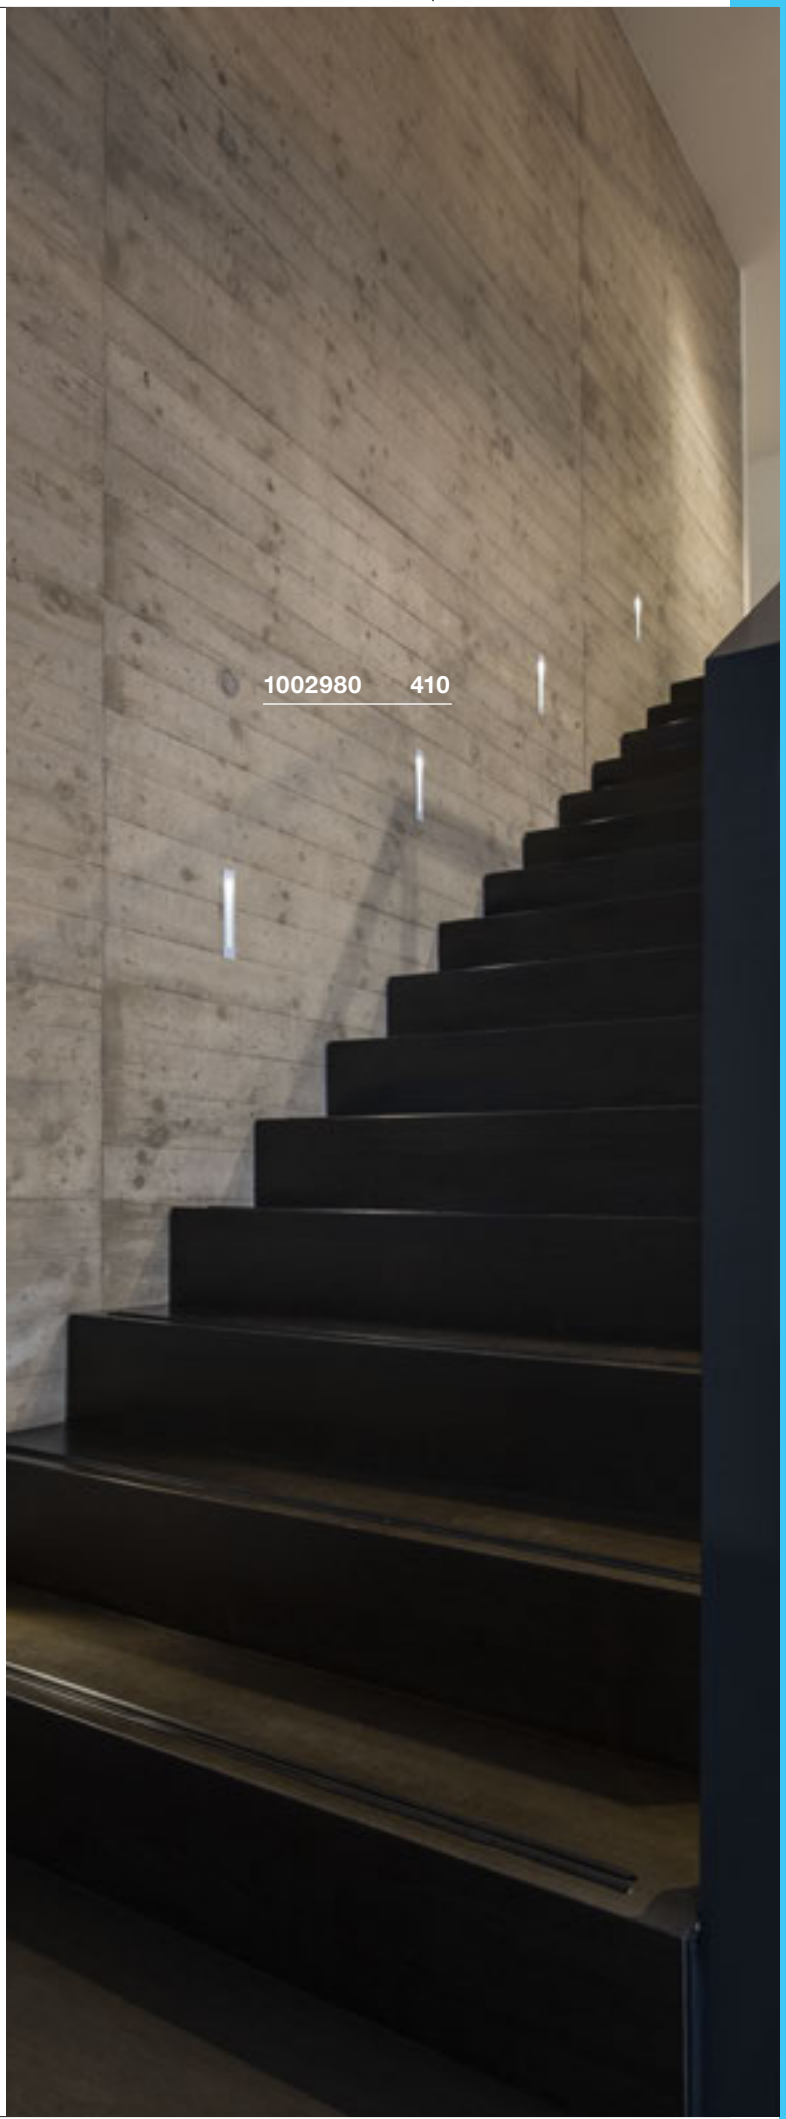


1002980 410

DOWNUNDER PUR 80
EL





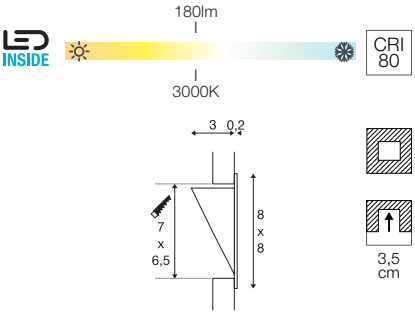

IP 20 L70B50

350mA
Total wattage: 3.6W
Material: aluminium/steel

- Mounting spring
- Material thickness of mounting surface: max. 15mm

151950	180lm 3000K	A→G E

Mounting frame
Prod. no. 151960


LED driver 320mA | 10W
Prod. no. 464140

Options	Prod. no.
180lm | 3000K | CRI80	
white	**151950**

DOWNUNDER PUR 150
EL





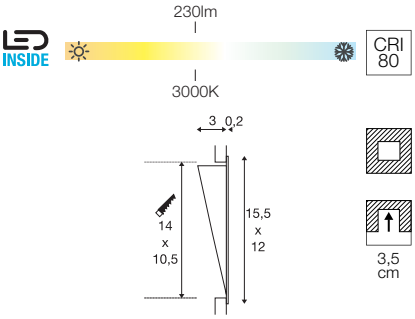

IP 20 L70B50

500mA
Total wattage: 5.2W
Material: aluminium/steel


- Mounting spring
- Material thickness of mounting surface: max. 15mm

151952	230lm 3000K	A→G E

Mounting frame
Prod. no. 151962

LED driver 500mA | 15W dimmable
Prod. no. 464144


Options	Prod. no.
230lm | 3000K | CRI80	
white	**151952**

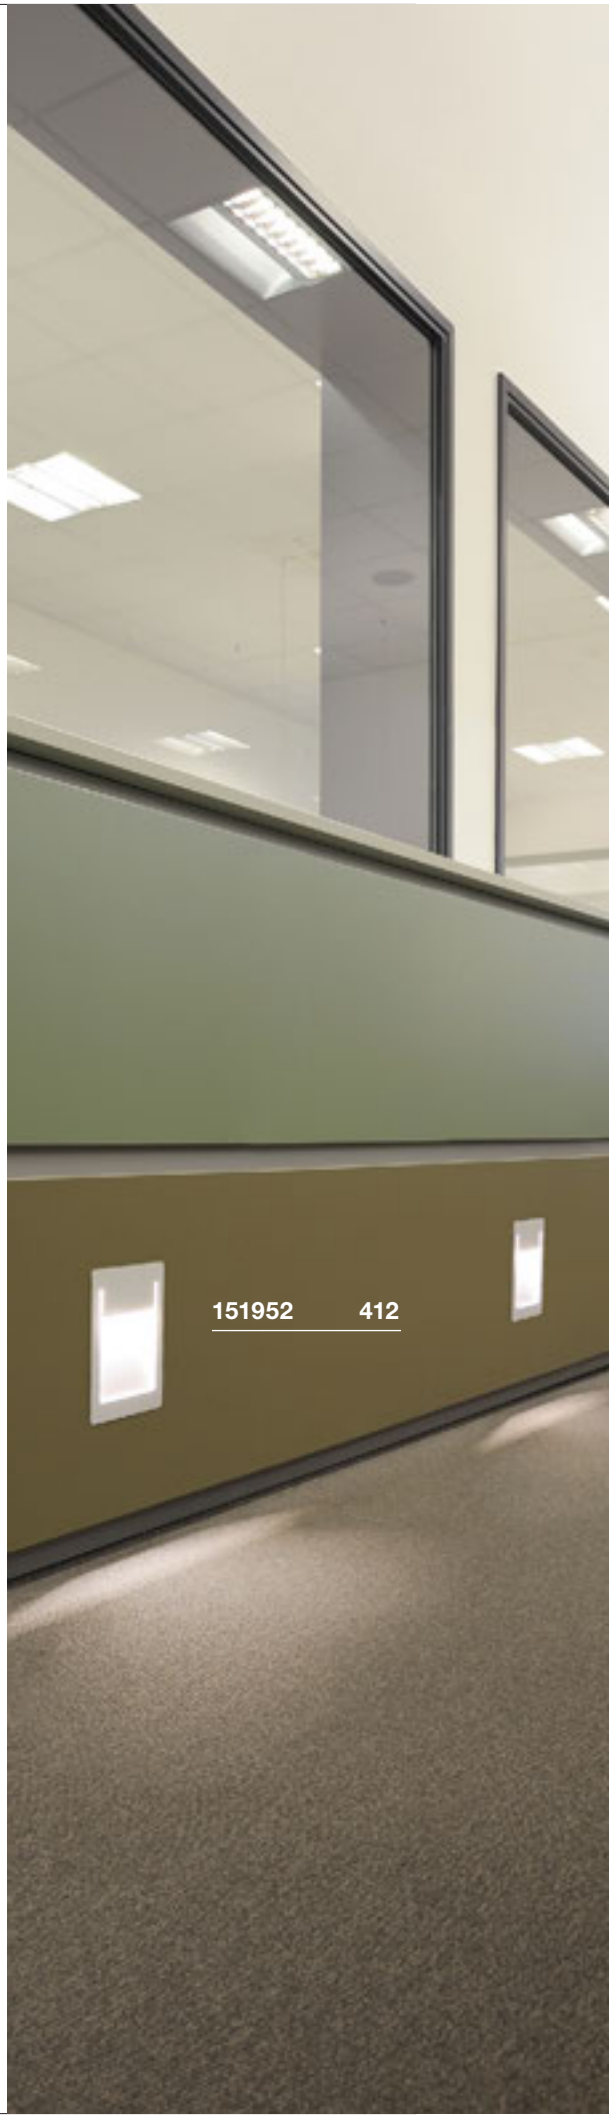




MOBALA
EL





14lm
INSIDE
3000K
CRI 80





IP 20 L70B50

100-240V ~50/60Hz | 24V
Total wattage: 1.3W
Material: aluminium

1002982	14lm 3000K	A→G A G

■ MOBALA | panel connection
Prod. no. 1002983



■ MOBALA | mounting frame
Prod. no. 1002984



Options	Prod. no.
14lm | 3000K | CRI80	
☐ white	**1002982**


WORO
EL








50lm
INSIDE
3000K
CRI 80





IP 20 L70B50 35

350mA
Total wattage: 1.2W
Material: steel

- This product is suitable for installation in cavity walls and flush-mounted sockets for switches/sockets
- Open cable end

1002922	50lm 3000K	A→G A F

☐ LED driver 320mA | 3W incl. strain relief
Prod. no. 464108



Options	Prod. no.
50lm | 3000K | CRI80	
☐ white	**1002922**

MEDO 30
EL, frameless






1500lm / 1600lm

LED INSIDE — CRI 80

3000K / 4000K



13,0 cm

IP 20 | 105° | UGR 25 | L70B50 | 150

350mA
Total wattage: 14W
Material: aluminium/polymethylacrylate (PMMA)

• Open cable end

1001901	1500/1600lm 3000/4000K	A→G, C

LED driver 20W | 350mA | 1-10V/ DALI dimmable | incl. strain relief
Prod. no. 1002423

Options	Prod. no.
1500/1600lm | 3000/4000K | CRI80	
white	**1001901**













MEDO 40
EL, frameless







IP 20 | 105° | 25 | L70B50 | 150

700mA
Total wattage: 28W
Material: aluminium/polymethylacrylate (PMMA)

- Open cable end


1001902	3100/3300lm 3000/4000K	A→G C


- LED driver 40W | 700/900/1000mA incl. strain relief **Prod. no. 1006120**
- LED driver 40W | 700mA | dimmable **Prod. no. 1005446**
- LED driver 40W | 700mA | 1-10V/ DALI dimmable | incl. strain relief **Prod. no. 1002424**

Options	Prod. no.
3100/3300lm | 3000/4000K | CRI80	
white	**1001902**

MEDO 60
EL, frameless





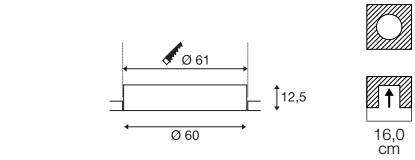

IP 20 | 105° | 25 | L70B50 | 150

1000/1050mA
Total wattage: 36W
Material: aluminium/polymethylacrylate (PMMA)


- Open cable end

1001903	4700/5000lm 3000/4000K	A→G C


- LED driver 40W | 700/900/1000mA incl. strain relief **Prod. no. 1006120**
- LED driver 40W | 700mA | dimmable **Prod. no. 1005446**
- LED driver 40W | 700mA | 1-10V/ DALI dimmable | incl. strain relief **Prod. no. 1002424**

Options	Prod. no.
4700/5000lm | 3000/4000K | CRI80	
white	**1001903**

MEDO 90
EL, frameless

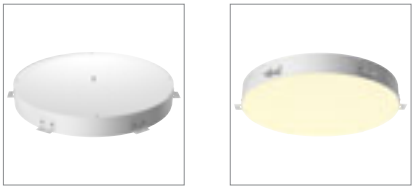



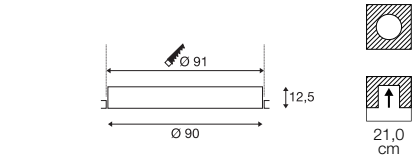

IP 20 | 105° | 22 | L70B50 | 150

1000/1050mA
Total wattage: 72W
Material: aluminium/polymethylacrylate (PMMA)

- 2 LED drivers are required.
- Open cable end

1001904	9550/10150lm 3000/4000K	A→G D


- LED driver 40W | 700/900/1000mA incl. strain relief **Prod. no. 1006120**
- LED driver 40W | 700mA | dimmable **Prod. no. 1005446**
- LED driver 40W | 700mA | 1-10V/ DALI dimmable | incl. strain relief **Prod. no. 1002424**

Options	Prod. no.
9550/10150lm | 3000/4000K | CRI90	
white	**1001904**

MEDO 30
EL, mounting frame



1500lm / 1600lm
LED INSIDE
3000K / 4000K
CRI 90



IP 20 | 105° | UGR 25 | L70B50 | 25 000 Hours | 150 | LED

350mA
Total wattage: 14W
Material: aluminium/polymethylacrylate (PMMA)

- Open cable end

1001905	1500/1600lm 3000/4000K	A→G A G C

LED driver 20W | 350mA | 1-10V/ DALI dimmable | incl. strain relief
Prod. no. 1002423




Options	Prod. no.
1500/1600lm | 3000/4000K | CRI90	
white	**1001905**

MEDO 40
EL, mounting frame



3100lm / 3300lm
LED INSIDE
3000K / 4000K
CRI 80



IP 20 | 105° | UGR 25 | L70B50 | 25 000 Hours | 150 | LED

700mA
Total wattage: 28W
Material: aluminium/polymethylacrylate (PMMA)

- Open cable end

1001906	3100/3300lm 3000/4000K	A→G A G C

LED driver 40W | 700/900/1000mA incl. strain relief
Prod. no. 1006120



LED driver 40W | 700mA | dimmable
Prod. no. 1005446



LED driver 40W | 700mA | 1-10V/ DALI dimmable | incl. strain relief
Prod. no. 1002424




Options	Prod. no.
3100/3300lm | 3000/4000K | CRI80	
white	**1001906**

MEDO 60
EL, mounting frame



4700lm / 5000lm
LED INSIDE
3000K / 4000K
CRI 90



IP 20 | 105° | UGR 25 | L70B50 | 25 000 Hours | 150 | LED

1000/1050mA
Total wattage: 36W
Material: aluminium/polymethylacrylate (PMMA)

- Open cable end

1001907	4700/5000lm 3000/4000K	A→G A G C

LED driver 40W | 700/900/1000mA incl. strain relief
Prod. no. 1006120



LED driver 40W | 700mA | dimmable
Prod. no. 1005446



LED driver 40W | 700mA | 1-10V/ DALI dimmable | incl. strain relief
Prod. no. 1002424



Options	Prod. no.
4700/5000lm | 3000/4000K | CRI90	
white	**1001907**













MEDO 90
EL, mounting frame



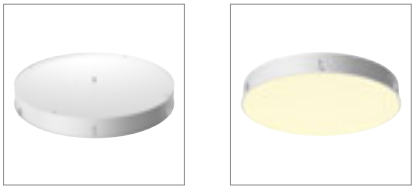



IP 20 | 105° | 22 | L70B50 | 150

1000/1050mA
Total wattage: 72W
Material: aluminium/polymethylacrylate (PMMA)

- 2 LED drivers are required
- Open cable end

		A→G
1001908	9550/10150lm 3000/4000K	D

LED driver 40W | 700/900/1000mA incl. strain relief
Prod. no. 1006120

LED driver 40W | 700mA | dimmable
Prod. no. 1005446


LED driver 40W | 700mA | 1-10V/ DALI dimmable | incl. strain relief
Prod. no. 1002424

Options	Prod. no.
9550/10150lm | 3000/4000K | CRI80	
white	**1001908**

CONNECTED LED PANEL
595x595mm, UGR<19



3200-3600lm
LED INSIDE
2700-6500K
CRI 90



IP 20 | 95° | UGR 19 | L70B50

100-240V ~50/60Hz | 1050mA
Total wattage: 43W
Material: aluminium/acrylic

- Remote control and dimming with Remote Control CCT/DIM [1002994] or Gateway [1002411]


1001250	3200-3600lm 2700-6500K	A→G

Options	Prod. no.
3200-3600lm | 2700-6500K | CRI90	
white	**1001250**

CONNECTED LED PANEL
620x620mm, UGR<19



3200-3600lm
LED INSIDE
2700-6500K
CRI 80



IP 20 | 95° | UGR 19 | L70B50

100-240V ~50/60Hz | 1050mA
Total wattage: 43W
Material: aluminium/acrylic

- Remote control and dimming with Remote Control CCT/DIM [1002994] or Gateway [1002411]

1001251	3200-3600lm 2700-6500K	A→G


Options	Prod. no.
3200-3600lm | 2700-6500K | CRI80	
white	**1001251**






LED PANEL
600x600mm







1050mA
Power consumption: 35W
Material: aluminium/polystyrene (PS)

• Open cable end

1003083, 1003084	4000lm 3000 4000K	A→G E


☐ LED driver 1050mA | 40W Triac phase-control dimmable
Prod. no. 464804


☐ LED driver 50W | 700-1400mA | 1-10V/DALI dimmable | incl. strain relief
Prod. no. 1002425

Options	Prod. no.
4000lm | 3000K | CRI90	
☐ white	**1003083**
4000lm | 4000K | CRI90	
☐ white	**1003084**

LED PANEL
620x620mm







1050mA
Power consumption: 35W
Material: aluminium/polystyrene (PS)

• Open cable end

1003073, 1003074	4000lm 3000 4000K	A→G E

☐ LED driver 1050mA | 40W Triac phase-control dimmable
Prod. no. 464804

☐ LED driver 50W | 700-1400mA | 1-10V/DALI dimmable | incl. strain relief
Prod. no. 1002425

Options	Prod. no.
4000lm | 3000K | CRI90	
☐ white	**1003073**
4000lm | 4000K | CRI90	
☐ white	**1003074**


P-LIGHT
EL







120lm
INSIDE
CRI 70
6000K



IP 20 | 90° | L70B50

220-240V ~50Hz
Total wattage: 5W
Material: ABS / Polycarbonate (PC)

- Spring clips
- Material thickness of mounting surface: max. 25mm
- Can be used as emergency lighting. Auto test function. Ni-Mh battery 2x 3.6V 1.5Ah included. Emergency operation via battery 3 hrs. Beam angle 90°

Accumulator
Prod. no. 240024



Options	Prod. no.
120lm | 6000K | CRI70	
white	**240006**


PATTA-I
EL, round, PHASE







440lm - 440lm
INSIDE
CRI 95
1800K - 3000K



IP 20 / IP 65 | IK02 | 38° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass

- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced
- Material thickness of mounting surface: 20 mm

1002098, 1002099, 1002100	440lm 1800-3000K	A→G / A↑G F

Options	Prod. no.
440lm | 1800-3000K | CRI95	
black	**1002098**
440lm | 1800-3000K | CRI95	
white	**1002099**
440lm | 1800-3000K | CRI95	
brushed aluminium	**1002100**


PATTA-I
DL, square, PHASE







440lm - 440lm
INSIDE
CRI 95
1800K - 3000K




IP 20 / IP 65 | IK02 | 38° | L70B50


220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass


- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced
- Material thickness of mounting surface: 20 mm

1002101, 1002102, 1002103	440lm 1800-3000K	A→G / A↑G F

Options	Prod. no.
440lm | 1800-3000K | CRI95	
black	**1002101**
440lm | 1800-3000K | CRI95	
white	**1002102**
440lm | 1800-3000K | CRI95	
brushed aluminium	**1002103**

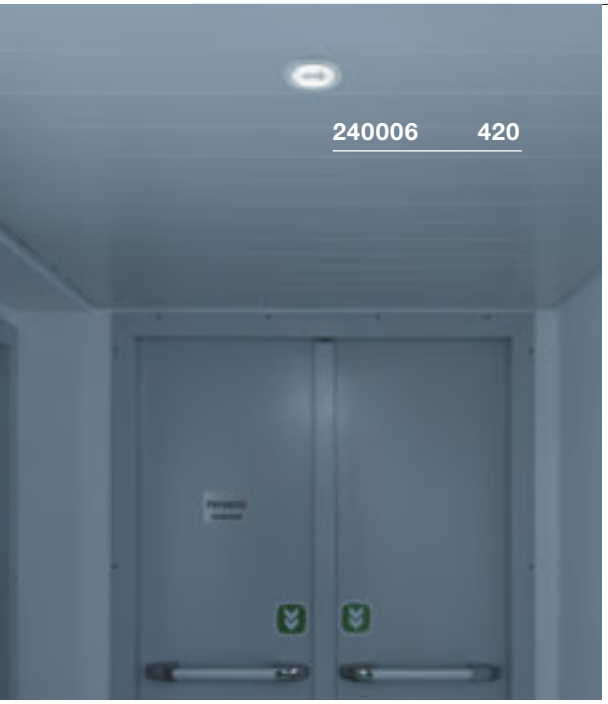

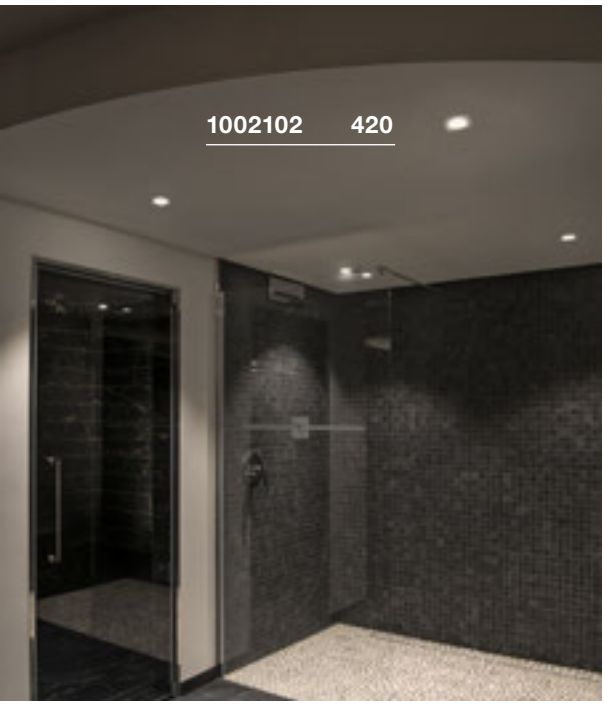

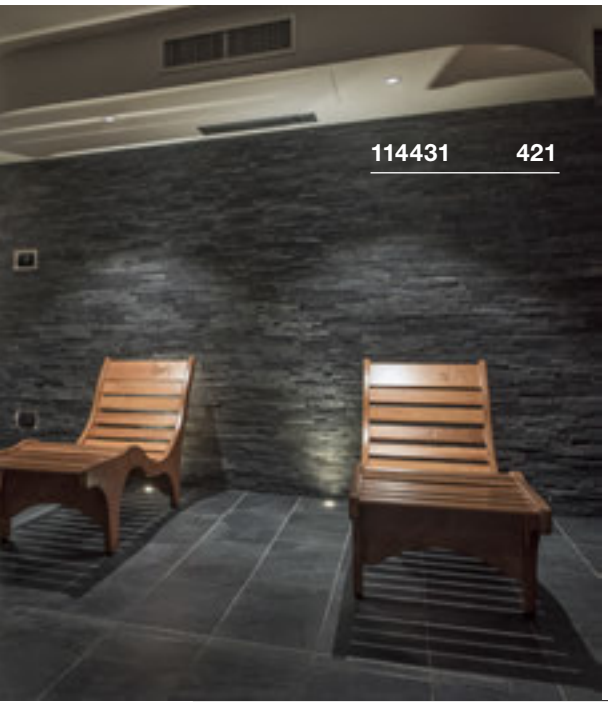


PATTA-I
EL, round, PHASE





910lm
|
LED INSIDE
|
3000K
CRI 80



C,L | IP 20 / IP 65 | 38° | 40 000 Hours L70B50 | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass


- Spring clips
- Material thickness of mounting surface: 25 mm

114420, 114421, 114426	910lm 3000K	A→G / A↑G E


Options	Prod. no.
910lm | 3000K | CRI80	
black	**114420**
910lm | 3000K | CRI80	
white	**114421**
910lm | 3000K | CRI80	
brushed aluminium	**114426**

PATTA-I
EL, square, PHASE



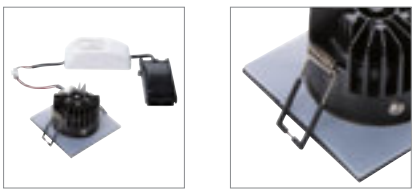

910lm
|
LED INSIDE
|
3000K
CRI 80



C,L | IP 20 / IP 65 | 38° | 40 000 Hours L70B50 | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: 25 mm

114430, 114431, 114436	910lm 3000K	A→G / A↑G E


Options	Prod. no.
910lm | 3000K | CRI80	
black	**114430**
910lm | 3000K | CRI80	
white	**114431**
910lm | 3000K | CRI80	
brushed aluminium	**114436**

PATTA-F
EL, round, PHASE





745|860lm
INSIDE
CRI 80
3000K



C,L | IP 20 / IP 65 | 38° | 40 000 Hours L70B50 | LED


220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: 20 mm

114440, 114441	745lm | 860lm 3000K	A→G


Options	Prod. no.
745lm | 3000K | CRI80	
■ black	**114440**
860lm | 3000K | CRI80	
□ white	**114441**

PATTA-F
EL, square, PHASE





745|860lm
INSIDE
CRI 80
3000K



C,L | IP 20 / IP 65 | 38° | 40 000 Hours L70B50 | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: 20 mm

114450, 114451	745lm | 860lm 3000K	A→G

Options	Prod. no.
745lm | 3000K | CRI80	
■ black	**114450**
860lm | 3000K | CRI80	
□ white	**114451**






OUT 65
EL, round, PHASE







510|640lm
|
LED INSIDE
|
3000K
CRI 80



6,0 cm

C,L | IP 20 / IP 65 | 38° | 40 000 Hours L70B50 | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Spring clips
- Material thickness of mounting surface: 20 mm


114460, 114461	510lm | 640lm 3000K	A→G A G E

Options	Prod. no.
510lm | 3000K | CRI80	
■ black	**114460**
640lm | 3000K | CRI80	
□ white	**114461**

A PROFESSIONAL SET-UP.

HIGH-VOLTAGE 3-PHASE TRACK SYSTEMS FOR NEW LIGHTING ACCENTS.


Well-designed lighting is essential, especially where there's plenty to see. High-voltage 3-phase track systems are perfect for shops and exhibition stands. They create the perfect illumination and present products and exhibits in just the right light.

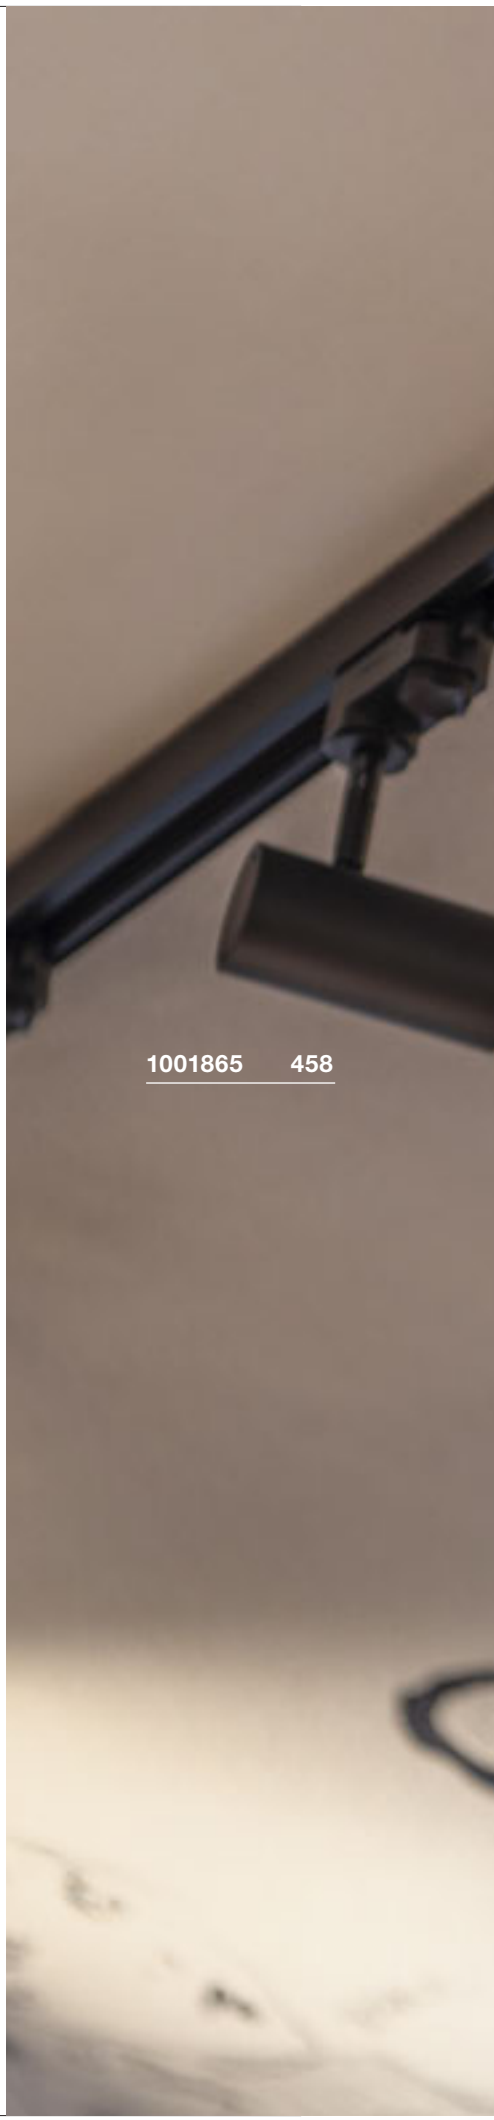


1004267 67

3-phase spots from the NUMINOS® down and spotlight system can be found on pages 62 to 71. Or for easy online configuration, visit: **www.numinos.slv.com**



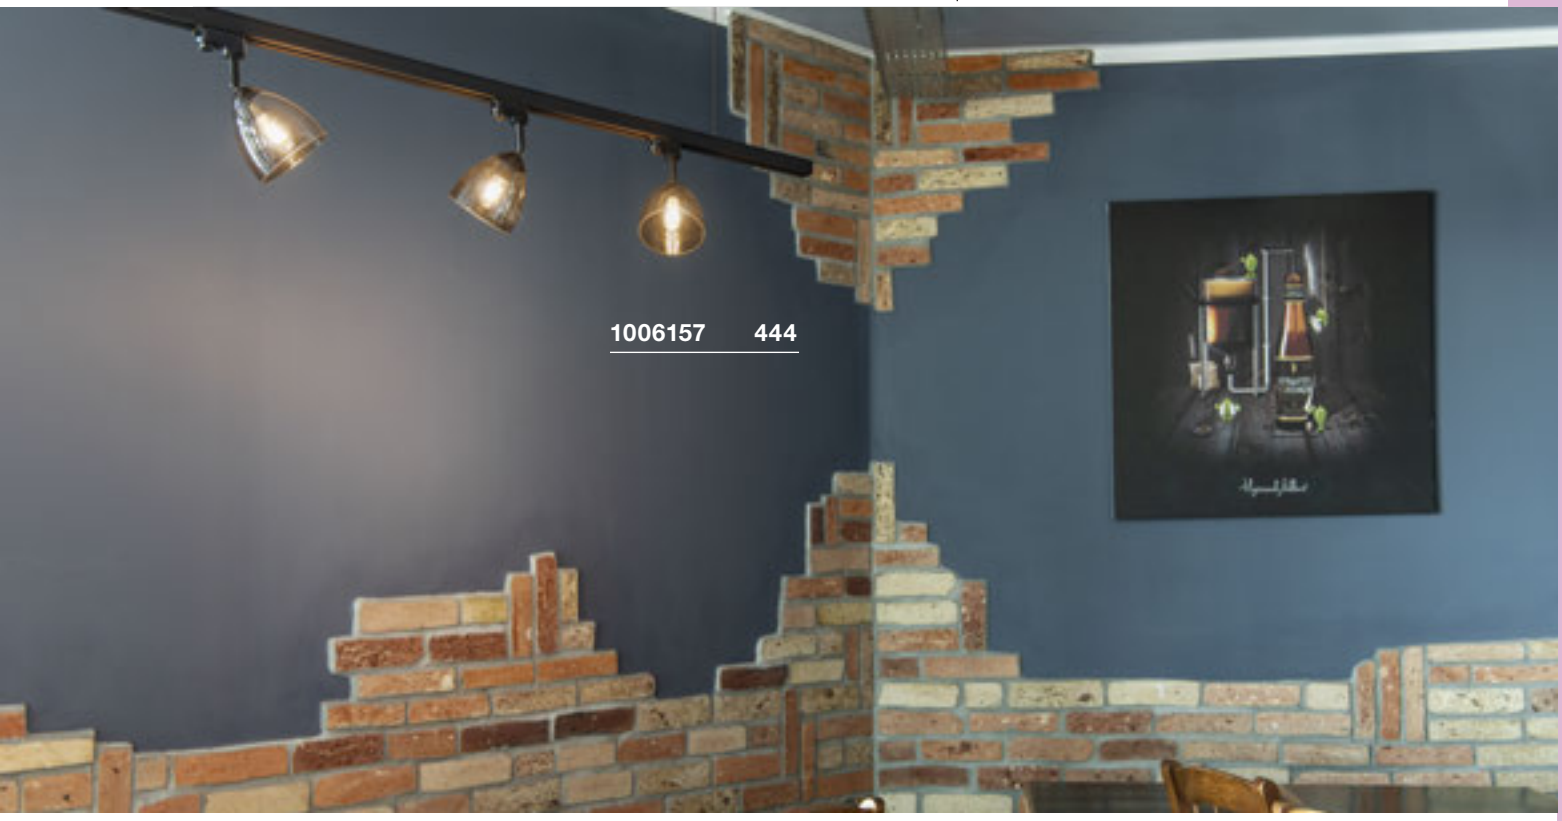

HIGH-VOLTAGE 3-PHASE TRACK SYSTEMS

NEW 440
441
441
443
443
NEW 444
NEW 444
445
445
446
446
447
448
448
NEW 450
451
451
452
452
453
453
453
454
454
454
456
456
457
457
458
459
459
459



Suitable mounting rails and accessories can be found on pages 431-439

You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808



COMPATIBILITY

3-phase track systems

Compatible with lights/adapters from:

SLV tracks and track components S-Track DALI	Use	SLV	Global/Nordic
			
	without DALI	✓	✓
	with DALI	✓	✓


Compatible with tracks and track components from:





SLV lights S-Track DALI	Use	SLV S-TRACK	Global/Nordic
			
	without DALI	✓	✓
	with DALI	✓	✓

★ Subject to prior testing using light and track samples
★★ But without DALI functionality

Details not guaranteed.
Technical data and dimensions are subject to change without notice.
During the planning phase of the project, check the project using samples to ensure functionality.
Compatibility refers only to tracks/lights.
Tracks and track components from different manufacturers should not be combined.

The SLV track systems and components are highly compatible with lights and adapters from: EUTRAC®, Zumtobel, Erco and LTS ONETrack. Subject to prior testing using lights and track samples.

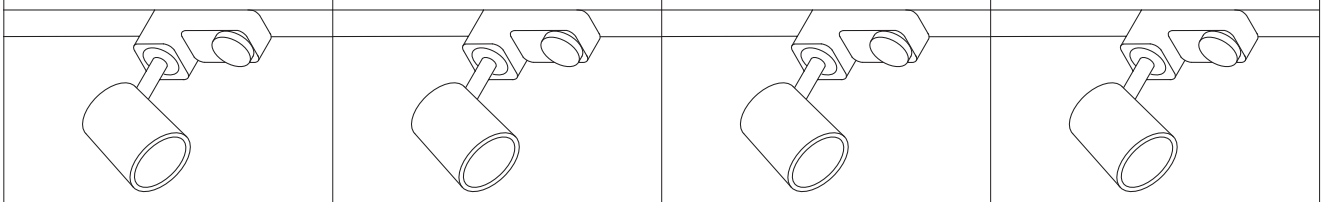
	EUTRAC®	Zumtobel	Erco	LTS ONETrack
				
	★	✓	✓	✓
	✗	✓	✓	✓

	EUTRAC®	Zumtobel	Erco	LTS ONETrack
				
	✓	✓	✓	✓
	✓★★	✓	✓	✓




S-TRACK

3-phase surface-mounted track DALI

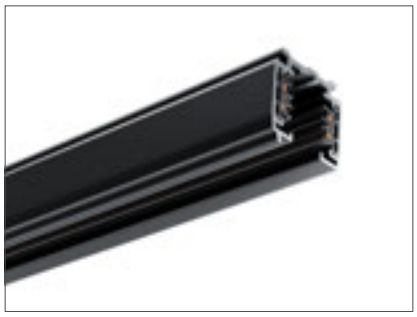



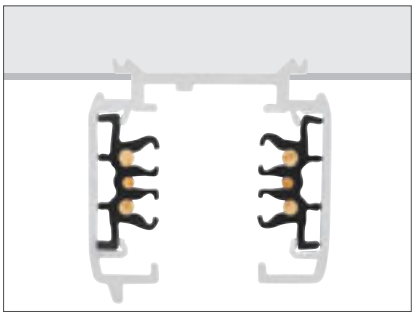


	1 m	1 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16	16
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Material	aluminium	aluminium	aluminium	aluminium
Color	■ black	□ white	■ black	□ white
L x W x H (cm)	100 x 3.6 x 3.6	100 x 3.6 x 3.6	200 x 3.6 x 3.6	200 x 3.6 x 3.6
Prod. no.	**1004937**	**1004938**	**1002631**	**1002632**


	3 m	3 m	4 m	4 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16	16
Max. mech. load	30 kg	30 kg	30 kg	30 kg
Material	aluminium	aluminium	aluminium	aluminium
Color	■ black	□ white	■ black	□ white
L x W x H (cm)	300 x 3.6 x 3.6	300 x 3.6 x 3.6	400 x 3.6 x 3.6	400 x 3.6 x 3.6
Prod. no.	**1002633**	**1002634**	**1002635**	**1002636**


S-TRACK

3-phase DALI surface-mounted track
Planning assistance and accessories at a glance

View of components from above on the installation side

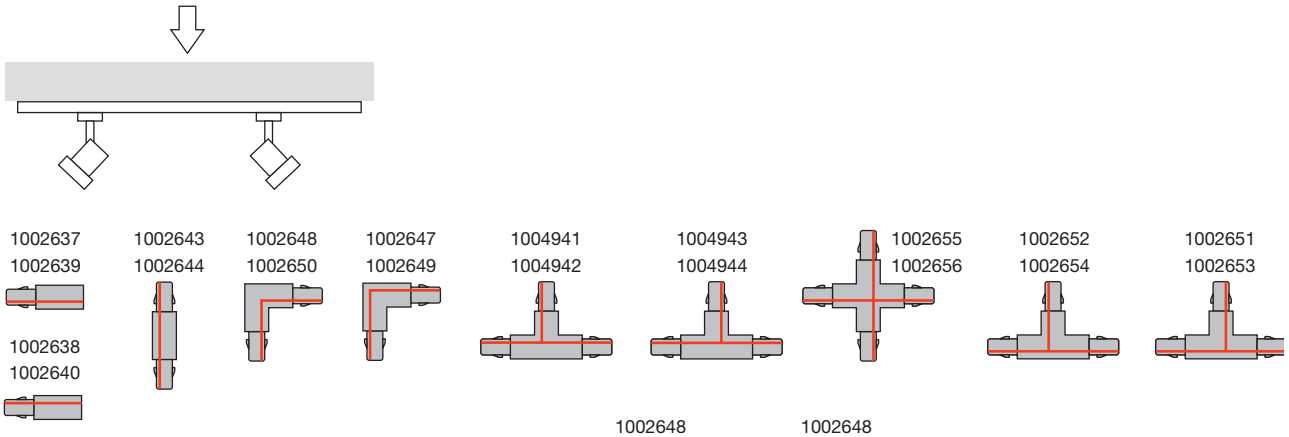

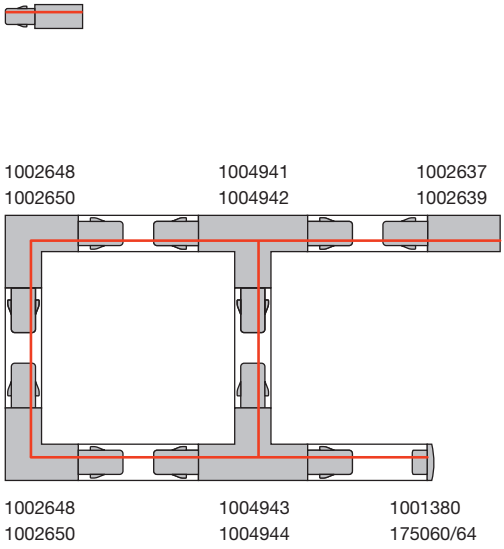

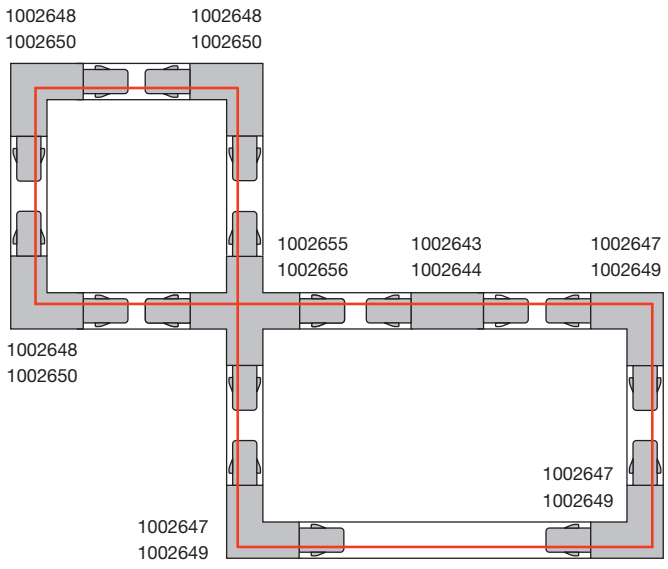




Feed-in, DALI, earth left
10 A max. | polycarbonate (PC)
L: 13.9 cm W: 3.5 cm H: 3.3 cm
■ black Prod. no.: **1002637**
□ white **1002639**




Feed-in, DALI, earth right
16 A max. | polycarbonate (PC)
L: 13.9 cm W: 3.5 cm H: 3.3 cm
■ black Prod. no.: **1002638**
□ white **1002640**




Feed-in, DALI, earth external
16 A max. | polycarbonate (PC)
L: 11.9 cm W: 11.9 cm H: 3.3 cm
■ black Prod. no.: **1002647**
□ white **1002649**




Feed-in, DALI, earth internal
16 A max. | polycarbonate (PC)
L: 11.9 cm W: 11.9 cm H: 3.3 cm
■ black Prod. no.: **1002648**
□ white **1002650**




T-connector, DALI, earth external, left*
16 A max. | polycarbonate (PC)
L: 20.3 cm W: 11.9 cm H: 3.3 cm
■ black Prod. no.: **1002652**
□ white **1002654**



T-connector, DALI, earth external, right*
16 A max. | polycarbonate (PC)
L: 20.3 cm W: 11.9 cm H: 3.3 cm
■ black Prod. no.: **1002651**
□ white **1002653**



T-connector, DALI, earth internal left*
16 A max. | polycarbonate (PC)
L: 20.3 cm W: 11.9 cm H: 3.3 cm
■ black Prod. no.: **1004941**
□ white **1004942**



T-connector, DALI, earth internal right*
16 A max. | polycarbonate (PC)
L: 20.3 cm W: 11.9 cm H: 3.3 cm
■ black Prod. no.: **1004943**
□ white **1004944**



X-connector, DALI*
16 A max. | polycarbonate (PC)
L: 20.3 cm W: 20.3 cm H: 3.3 cm
■ black Prod. no.: **1002655**
□ white **1002656**



Longitudinal connector: DALI
16 A max. | polycarbonate (PC)
L: 10.6 cm W: 2.5 cm H: 2.8 cm
■ black Prod. no.: **1002641**
□ white **1002642**



Longitudinal connector, DALI*
10 A max. | polycarbonate (PC)
L: 20.3 cm W: 3.5 cm H: 3.3 cm
■ black Prod. no.: **1002643**
□ white **1002644**



Flexible connector, DALI
16 A max. | polycarbonate (PC)
L: 28.5 cm W: 3.5 cm H: 3.3 cm
■ black Prod. no.: **1002645**
□ white **1002646**




Insulating connector
Polycarbonate (PC)
L: 6.8 cm W: 3.1 cm H: 2.6 cm
■ black Prod. no.: **175080**
□ white **1001382**




Mounting bracket
Steel
L: 4 cm W: 3.4 cm H: 1.25 cm
■ black Prod. no.: **1002657**
□ white **1002658**



3-phase adapter, DALI
10 A max. | polycarbonate (PC)
L: 11.3 cm W: 5.5 cm H: 3.3 cm
■ black Prod. no.: **1002660**
□ white **1002659**



Mech. 3-phase adapter
Aluminium / polycarbonate (PC)
L: 6.6 cm W: 6.6 cm H: 3.1 cm
■ black Prod. no.: **175210**
□ white **1001395**



Cover
Polycarbonate (PC)
L: 200 cm W: 2.2 cm H: 0.75 cm
■ black Prod. no.: **1004939**
□ white **1004940**



End cap
Polycarbonate (PC)
L: 3.5 cm W: 3.3 cm H: 3.2 cm
■ black Prod. no.: **175060**
□ white **1001380**



Pendant suspension
Aluminium / polycarbonate (PC)
L: 6 cm W: 6 cm H: 4 cm | max. 10 kg
■ black Prod. no.: **175160**
□ white **1001390**




Joint connector
Aluminium
L: 18.2 cm W: 3.3 cm H: 2.1 cm
■ black Prod. no.: **175180**
□ white **1001392**



Hook
Polycarbonate (PC) / steel
H: 5.2 cm diameter: 2.6 cm | max. 10 kg
■ black Prod. no.: **175190**
□ white **1001393**



Ceiling rose
16 A max. | polycarbonate (PC)
H: 3.56 cm diameter: 14.32 cm
■ black Prod. no.: **1004684**
□ white **1004685**




Wire rope suspension, 2-piece
Stainless steel/brass
L: 500 cm | max. 10 kg
■ nickel Prod. no.: **1002845**


* with feed-in capacity



EUTRAC®

3-phase surface-mounted track

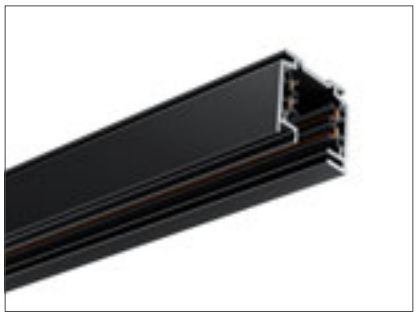

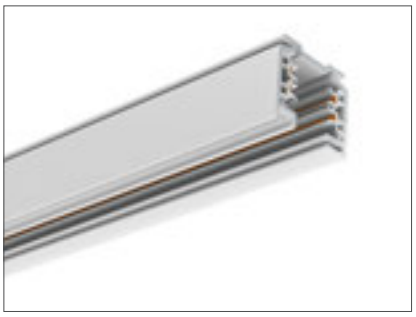




	1 m	1 m	1 m	2 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16	16	16	16
Material	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)
Color	■ black	□ white	■ grey	■ black	□ white	■ grey
L x W x H (cm)	100 x 3.6 x 3.2	100 x 3.6 x 3.2	100 x 3.6 x 3.2	200 x 3.6 x 3.2	200 x 3.6 x 3.2	200 x 3.6 x 3.2
Prod. no.	**145100**	**1001510**	**145102**	**145200**	**1001511**	**145202**

Manufacturer: EUTRAC® Stromschienen GmbH

	3 m	3 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Material	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)
Color	■ black	□ white	■ grey
L x W x H (cm)	300 x 3.6 x 3.2	300 x 3.6 x 3.2	300 x 3.6 x 3.2
Prod. no.	**145300**	**1001512**	**145302**

Manufacturer: EUTRAC® Stromschienen GmbH

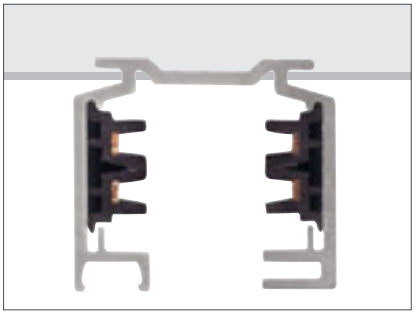



EUTRAC®

Manufacturer: EUTRAC® Stromschienen GmbH


3-phase surface-mounted track
Planning assistance and accessories at a glance


View of components from above on the installation side

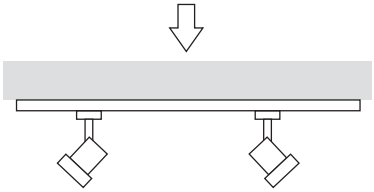


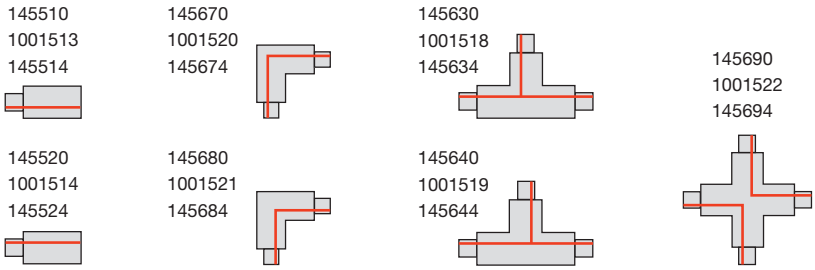

Example: earth external

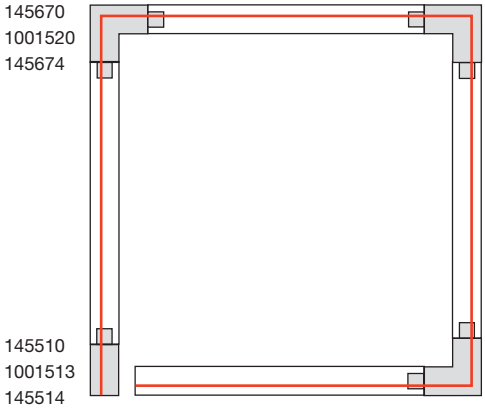

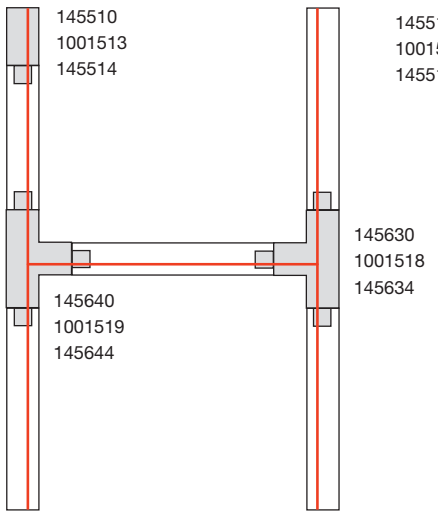

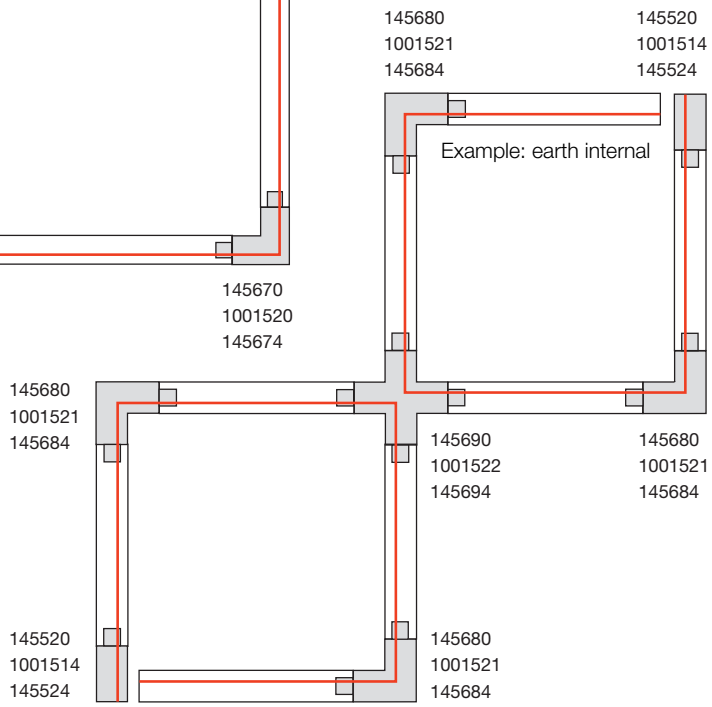



Feed-in, earth left
16 A max. | polycarbonate (PC)
L: 11.2 cm W: 3.6 cm H: 3.2 cm

black	Prod. no.:	**145510**
white		**1001513**
grey		**145514**



Feed-in, earth right
16 A max. | polycarbonate (PC)
L: 11.2 cm W: 3.6 cm H: 3.2 cm

black	Prod. no.:	**145520**
white		**1001514**
grey		**145524**



Centre feed-in
16 A max. | polycarbonate (PC)
L: 13 cm W: 3.6 cm H: 3.6 cm

black	Prod. no.:	**145530**
white		**1001515**
grey		**145534**



Longitudinal connector*
16 A max. | polycarbonate (PC)/steel
L: 26 cm W: 3.6 cm H: 3.2 cm

black	Prod. no.:	**145660**
white		**1001517**
grey		**145664**



Longitudinal connector
16 A max. | polycarbonate (PC)
L: 5.8 cm W: 1.5 cm H: 2.6 cm

black	Prod. no.:	**145560**
white		**1001516**
grey		**145564**



L-connector, earth internal*
16 A max. | polycarbonate (PC) / steel
L: 15 cm W: 15 cm H: 3.2 cm

black	Prod. no.:	**145680**
white		**1001521**
grey		**145684**



L-connector, earth external*
16 A max. | polycarbonate (PC)/steel
L: 15 cm W: 15 cm H: 3.2 cm

black	Prod. no.:	**145670**
white		**1001520**
grey		**145674**



T-connector, earth internal left*
16 A max. | polycarbonate (PC)/steel
L: 26 cm W: 18.5 cm H: 3.2 cm

black	Prod. no.:	**145630**
white		**1001518**
grey		**145634**



T-connector, earth internal right*
16 A max. | polycarbonate (PC)/steel
L: 26 cm W: 18.5 cm H: 3.2 cm

black	Prod. no.:	**145640**
white		**1001519**
grey		**145644**



X-connector*
16 A max. | polycarbonate (PC)/steel
L: 26 cm W: 26 cm H: 3.2 cm
2 separate power circuits

black	Prod. no.:	**145690**
white		**1001522**
grey		**145694**



Joint connector
Polycarbonate (PC)
L: 10 cm W: 3.6 cm H: 1.9 cm

black	Prod. no.:	**145600**
white		**1001523**
grey		**145604**



Flex connector
16 A max. | polycarbonate (PC)/steel
L: 22 cm W: 3.6 cm H: 3.2 cm

black	Prod. no.:	**145580**
white		**1001524**
grey		**145584**



Socket
6.3 A max. | polycarbonate (PC)
L: 9.6 cm W: 6.5 cm H: 9 cm

black	Prod. no.:	**145700**
white		**1001525**



3-phase light adapter
10 A max. | polycarbonate (PC)

black	Prod. no.:	**145990**
white		**1001542**
grey		**145994**



Pendant clip
Aluminium
L: 5 cm W: 3.6 cm H: 1.9 cm

black	Prod. no.:	**145730**
white		**1001530**
grey		**145734**



Point outlet
16 A max. | polycarbonate (PC)
H: 3.1 cm diameter: 11.9 cm

black	Prod. no.:	**145830**
white		**1001526**
grey		**145834**




End cap
Polycarbonate (PC)
L: 3.6 cm W: 1.7 cm H: 3.2 cm

black	Prod. no.:	**145590**
white		**1001527**
grey		**145594**



Pendant suspension
Polycarbonate (PC)/steel
L: 60 cm H: 63.5 cm diameter: 7 cm

black	Prod. no.:	**145720**
white		**1001529**
grey		**145724**



Pendant suspension
Polycarbonate (PC)/steel
L: 120 cm H: 122 cm diameter: 7 cm

black	Prod. no.:	**145710**
white		**1001528**
grey		**145714**



Wire rope suspension 2 piece
Stainless steel/brass
L: 500 cm | max. 10 kg

nickel	Prod. no.:	**1002845**


* with feed-in capacity



EUTRAC®


3-phase recessed track with matching accessories



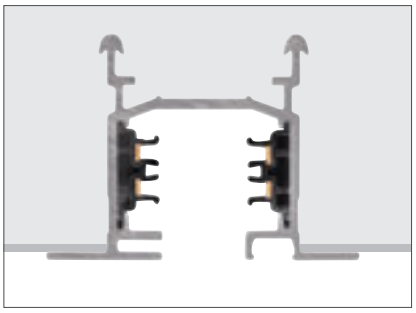


	2 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16
Material	aluminium/ polycarbonate (PC)	aluminium/ polycarbonate (PC)
Color	☐ white	☐ white
L x W x H (cm)	200 x 5.9 x 4.1	300 x 5.9 x 4.1
Recessed W (cm)	4	4
Prod. no.	**1001531**	**1001532**


Manufacturer: EUTRAC® Stromschienen GmbH




Feed-in, earth left
16 A max. | polycarbonate (PC)/steel
L: 12.2 cm W: 6 cm H: 3.4 cm
☐ white Prod. no. **1001533**




Feed, earth right
16 A max. | polycarbonate (PC)/steel
L: 12.2 cm W: 6 cm H: 3.4 cm
☐ white Prod. no. **1001534**



Recessed L-connector with feed-in
16 A max. | polycarbonate (PC)/steel
L: 16 cm W: 16 cm H: 3.2 cm
Earth external, with feed-in capability
☐ white Prod. no. **1001536**




Recessed L-connector with feed-in
16 A max. | polycarbonate (PC)/steel
L: 16 cm W: 16 cm H: 3.2 cm
Earth internal, with feed-in capability
☐ white Prod. no. **1001537**



End cap
Polycarbonate (PC)
L: 2.7 cm W: 6 cm H: 3.2 cm
☐ white Prod. no. **1001538**



Longitudinal connector with stabilizer
16 A max. | polycarbonate (PC)/steel
L: 6.2 cm W: 2.5 cm H: 2.7 cm
☐ white Prod. no. **1001539**



Spring clip
Steel
L: 2 cm W: 1 cm H: 2.5 cm
■ grey Prod. no. **145551**



3-phase light adapter
10 A max. | polycarbonate (PC)
☐ white Prod. no. **1001542**

SIGHT TRACK
3Ph., DALI

NEW

CCT


DALI







3000/3000lm
|
LED INSIDE
CRI 90
|
3000/4000K



Dali | IP 20 | 120° | 30 000 Hours L70B50 | LED

220-240V ~50/60Hz | 700mA
Total wattage: 39W
Material: aluminium/acrylic


		A→G
1005397, 1005399	3000/3000lm 3000/4000K	F

Options	Prod. no.
3000/3000lm | 3000/4000K | CRI 90	
black	**1005397**
3000/3000lm | 3000/4000K | CRI 90	
white	**1005399**







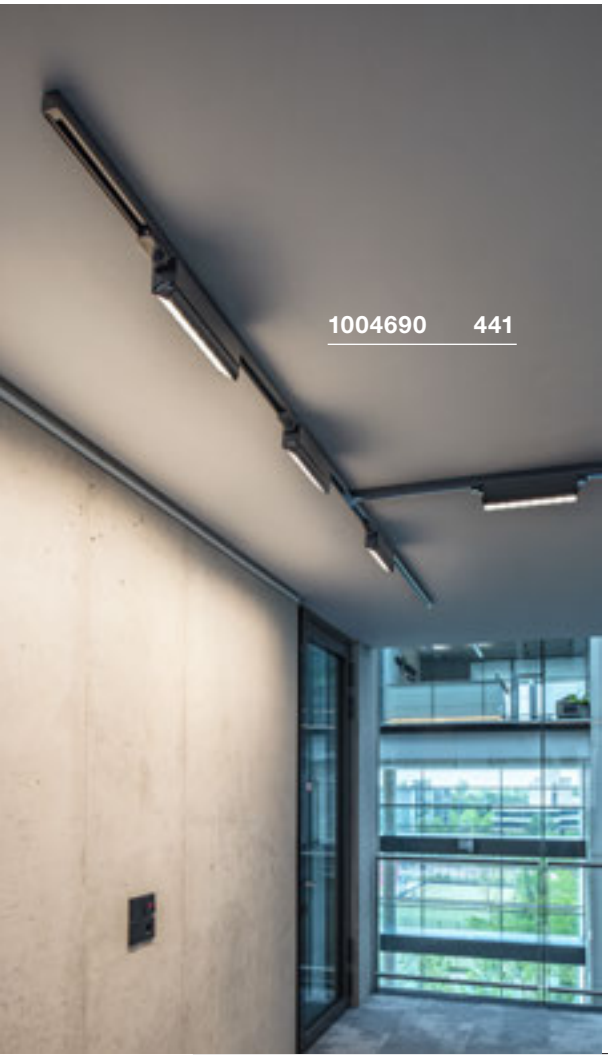


SIGHT MOVE
3Ph., DALI





2700lm
3000K
CRI 90



IP 20 | 75° | L70B50 | 120°

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/poly (methyl methacrylate) (PMMA)

hv		A→G
1004690, 1004691	2700lm 3000K	A G E


Options	Prod. no.
2700lm | 3000K | CRI90	
■ black	**1004690**
2700lm | 3000K | CRI90	
□ white	**1004691**

SIGHT MOVE
3Ph., DALI





3100lm
4000K
CRI 90



IP 20 | 75° | L70B50 | 120°


220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/poly (methyl methacrylate) (PMMA)

hv		A→G
1004692, 1004693	3100lm 4000K	A G E

Options	Prod. no.
3100lm | 4000K | CRI90	
■ black	**1004692**
3100lm | 4000K | CRI90	
□ white	**1004693**


1004769 443



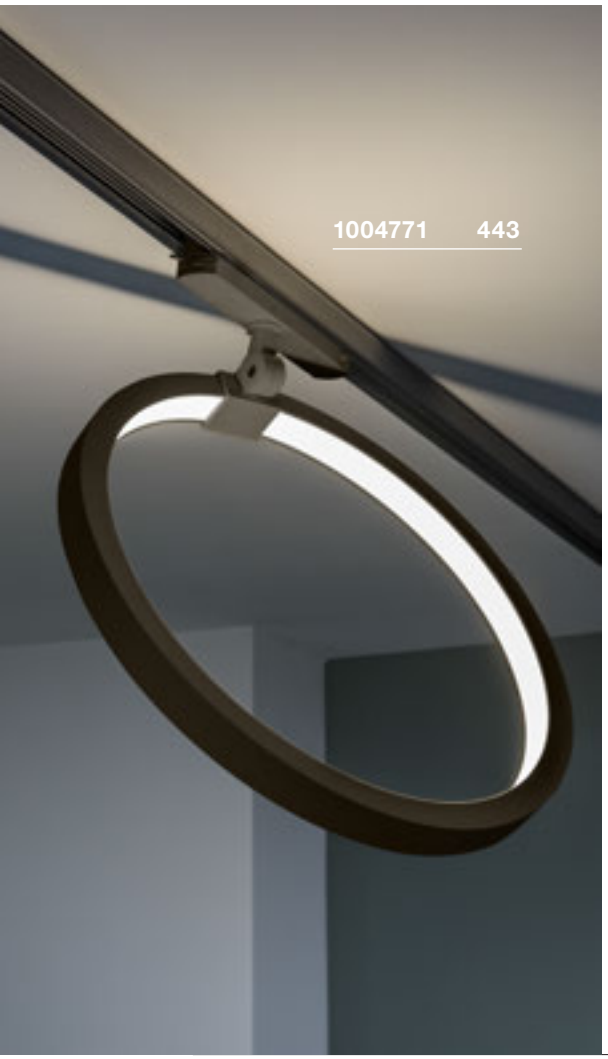


ONE 40 TRACK
3Ph., DALI







650lm
3000K
CRI 90



Dali | 170° | 340° | 100° | LED

220-240V ~50/60Hz | 350mA
Total wattage: 15.2W
Material: aluminium

1004769, 1004770	650lm 3000K	E

Options	Prod. no.
650lm | 3000K | CRI90	
black	**1004769**
650lm | 3000K | CRI90	
white	**1004770**


ONE 40 TRACK
3Ph., DALI







670lm
4000K
CRI 90



Dali | 170° | 340° | 100° | LED

220-240V ~50/60Hz | 350mA
Total wattage: 15.2W
Material: aluminium

1004771, 1004772	670lm 4000K	E

Options	Prod. no.
670lm | 4000K | CRI90	
black	**1004771**
670lm | 4000K | CRI90	
white	**1004772**

PARA CONE GL
3Ph., GU10


NEW







SOCKET INSIDE <25 W



IP 20 300° 90°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <25W

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1003101

Options	Prod. no.
1xGU10	
■ black	**1006157**
1xGU10	
□ white	**1006158**

PARA CONE GL
PD, GU10


NEW







SOCKET INSIDE <25 W



IP 20 250

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <25W

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1003101

Options	Prod. no.
1xGU10	
■ black	**1006159**
1xGU10	
□ white	**1006160**









PARA CONE 14
3Ph., QPAR111










SOCKET INSIDE <25 W





220-240V ~50/60Hz
Material: steel

GU10 <25W

LED GU10 | 6W | 36°
2700K | 900lm | EEK=G
6kWh/1000h



Prod. no. 1005273

Options	Prod. no.
1xGU10 ■ black	**1002876**
1xGU10 □ white	**1002877**
1xGU10 ■ copper	**1002878**

PARA CONE 14
3Ph., PD, QPAR51










SOCKET INSIDE <35 W





220-240V ~50/60Hz
Material: steel

- Textile cable
- Black/gold version with golden reflector
- All other versions with white reflector

GU10 <25W

LED GU10| 6W | 38°
3000K | 450lm | EEK=G
6kWh/1000h



Prod. no. 1005080

Options	Prod. no.
1xGU10 ■ black	**153140**
1xGU10 □ white	**153141**
1xGU10 ■ copper	**1002686**


LIGHT EYE® 150 TRACK
3Ph. QPAR111







SOCKET INSIDE <75 W



IP 20 350° 90°

230V ~50Hz
Material: steel

GU10 <75W

QPAR111 | 12,5W | 30°
4000K | 1000lm | EEK=F
13kWh/1000h

Prod. no. 1005282


Options	Prod. no.
1xGU10	
black/chrome	**1000707**
1xGU10	
white/chrome	**1000708**

LIGHT EYE® 150
3Ph. PD, QPAR111





SOCKET INSIDE <75 W



IP 20 150

230V ~50Hz
Material: steel


GU10 <75W

QPAR111 | 12,5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h

Prod. no. 1005276

Options	Prod. no.
1xGU10	
black/chrome	**1000709**
1xGU10	
chrome	**153112**



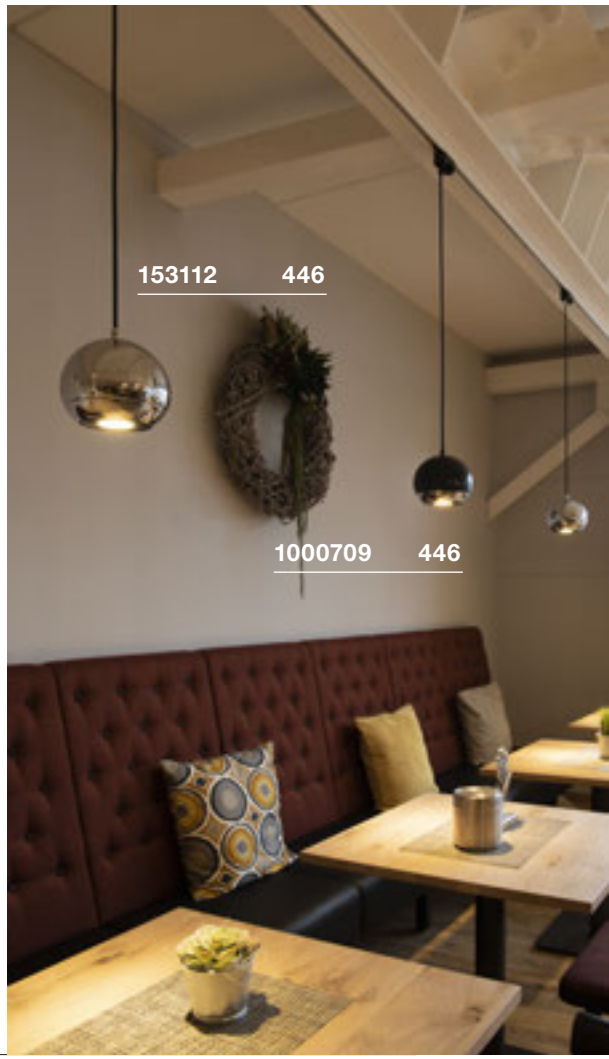




FORCHINI M 40 TRACK
3Ph., PD, E27







SOCKET INSIDE <40 W



IP 20 150

230V ~50Hz
Material: aluminium/steel

E27 <40W
Diameter: 6.8 cm L: 15.2 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265


Options	Prod. no.
1xE27	
black/gold	**153130**

SIGHT MOVE 3Ph.





2700lm
3000K
CRI 90



IP 20 | 75° | L70B50 | 120°

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/poly (methyl methacrylate) (PMMA)

hv		A→G
1004686, 1004687	2700lm 3000K	A E


Options	Prod. no.
2700lm | 3000K | CRI90	
■ black	**1004686**
2700lm | 3000K | CRI90	
□ white	**1004687**

SIGHT MOVE 3Ph.





3100lm
4000K
CRI 90




IP 20 | 75° | L70B50 | 120°

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/poly (methyl methacrylate) (PMMA)

hv		A→G
1004688, 1004689	3100lm 4000K	A E

Options	Prod. no.
3100lm | 4000K | CRI90	
■ black	**1004688**
3100lm | 4000K | CRI90	
□ white	**1004689**

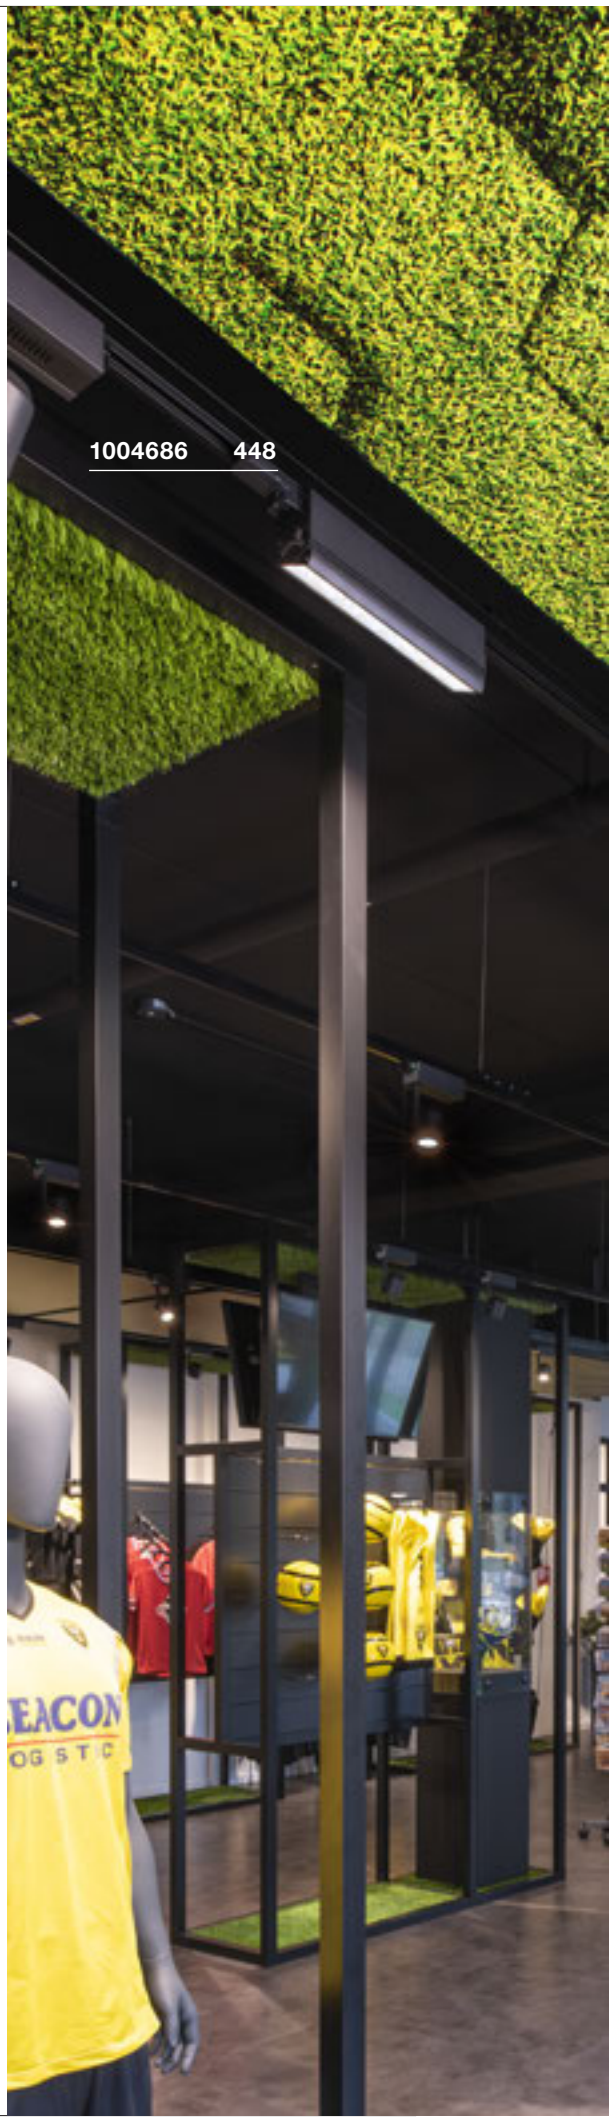


1004686 448
VVV-VENLO

SIGHT TRACK
3Ph.


NEW







3000/3000lm
I
LED INSIDE
CRI 90
I
3000/4000K



IP 20 | 120° | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 37W
Material: aluminium/acrylic

1005400, 1005401, 1005402	3000/3000lm 3000/4000K	A→G A↑ G F

Options	Prod. no.	
3000/3000lm | 3000/4000K | CRI 90		
black	1005400	
3000/3000lm | 3000/4000K | CRI 90		
white	1005401	
3000/3000lm | 3000/4000K | CRI 90		
grey	1005402	










EURO CUBE
3Ph.





2100lm
INSIDE
CRI 90
3000K



IP 20 | 60° | L70B50 | 350° | 170°

220-240V ~50/60Hz | 700mA
Total wattage: 28.5W
Material: aluminium

152750, 152751	2100lm 3000K	A→G / A G F


Options	Prod. no.
2100lm | 3000K | CRI90 | 60°	
■ black	**152750**
2100lm | 3000K | CRI90 | 60°	
□ white	**152751**

EURO CUBE
3Ph.





2150lm
INSIDE
CRI 90
4000K



IP 20 | 60° | L70B50 | 350° | 170°

220-240V ~50/60Hz | 700mA
Total wattage: 28.5W
Material: aluminium


152780, 152781	2150lm 4000K	A→G / A G F

Options	Prod. no.
2150lm | 4000K | CRI90 | 60°	
■ black	**152780**
2150lm | 4000K | CRI90 | 60°	
□ white	**152781**

EURO SPOT TRACK
3Ph., QPAR111



SOCKET INSIDE <75 W



IP 20 350° 100°

220-240V ~50Hz
Material: aluminium

GU10 <75W


QPAR111 | 12,5W | 30°
4000K | 1000lm | EEK=F
13kWh/1000h




Prod. no. 1005282

Options	Prod. no.
1xGU10	
■ black	**153420**
1xGU10	
□ white	**153421**

EURO SPOT TRACK
3Ph., QPAR51

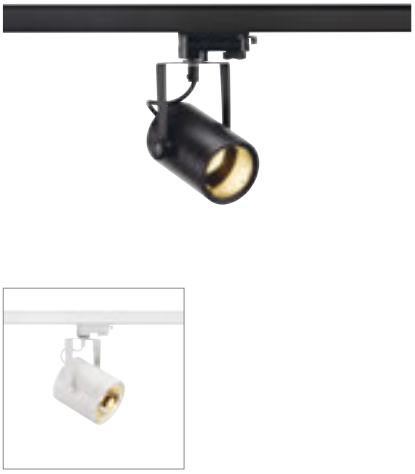

SOCKET INSIDE <25 W



IP 20 350° 90°

220-240V ~50Hz
Material: aluminium/glass


GU10 <25W


LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h




Prod. no. 1005076

Options	Prod. no.
1xGU10	
■ black	**153850**
1xGU10	
□ white	**153851**

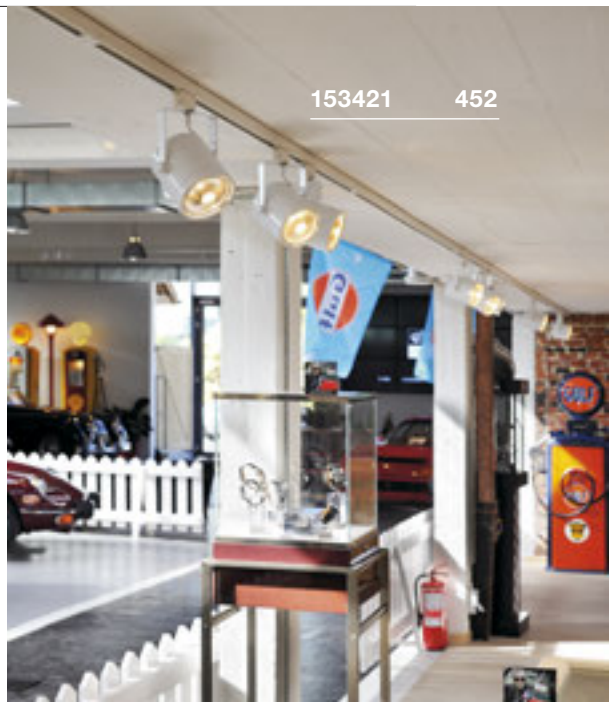

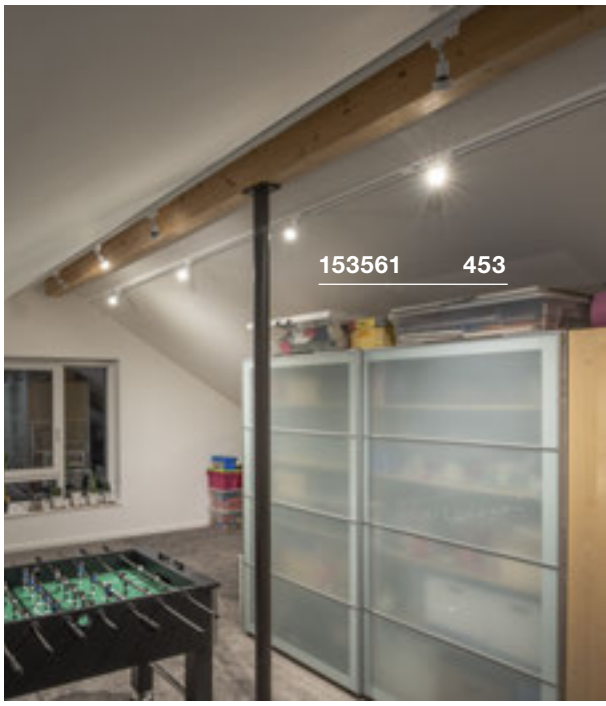

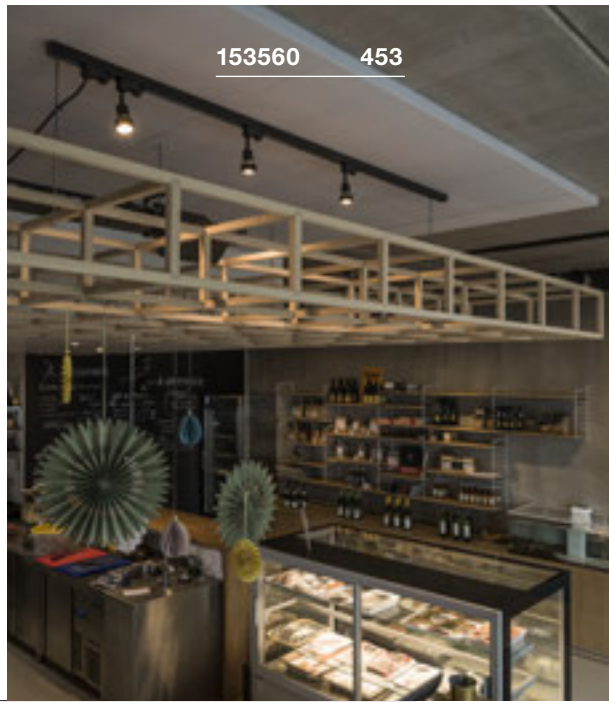


ALTRA DICE TRACK
3Ph., QPAR51







SOCKET INSIDE <50 W



IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
1xGU10	
■ black	**152320**
1xGU10	
□ white	**152321**


PURI TRACK
3Ph., QPAR51







SOCKET INSIDE <50 W



IP 20 350° 85°

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Decorative ring for QPAR51 included

GU10 <50W
Diameter: 11 cm L: 7.8 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972

Options	Prod. no.
1xGU10	
■ black	**153560**
1xGU10	
□ white	**153561**
1xGU10	
■ grey	**153564**


PURI TRACK
3Ph., QPAR51







SOCKET INSIDE <10 W



IP 20 340° 85°

220-240V ~50/60Hz
Material: aluminium/plastic

GU10 <10W

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h



Prod. no. 1005076

Options	Prod. no.
1xGU10	
■ black	**1001871**
1xGU10	
□ white	**1001872**


KALU TRACK
3Ph., PHASE







860lm
3000K
CRI 90



IP 20 | 95° | L70B50 | 350° | 90°


220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium

152600, 152601	860lm 3000K

KALU TRACK
3Ph., QPAR111







IP 20 | 350° | 90°

220-240V ~50/60Hz | 12V
Material: aluminium/plastic

GU10 <75W

QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h




Prod. no. 1005274

Options	Prod. no.
1xGU10	
black	**152610**
1xGU10	
white	**152611**

KALU TRACK
3Ph., QR111







IP 20 | 350° | 90°

220-240V ~50/60Hz | 12V
Material: aluminium/plastic

- Product cannot be used with our ceiling roses (145830/1001527/145834)

G53 <50W

LED G53 | 15W | 40°
2700K | 800lm | EEK=G
17kWh/1000h




Prod. no. 560232

Options	Prod. no.
860lm | 3000K | CRI90	
black	**152600**
860lm | 3000K | CRI80	
white	**152601**

Options	Prod. no.
1xG53	
black	**153580**
1xG53	
white	**153581**


152601 454


152610 454

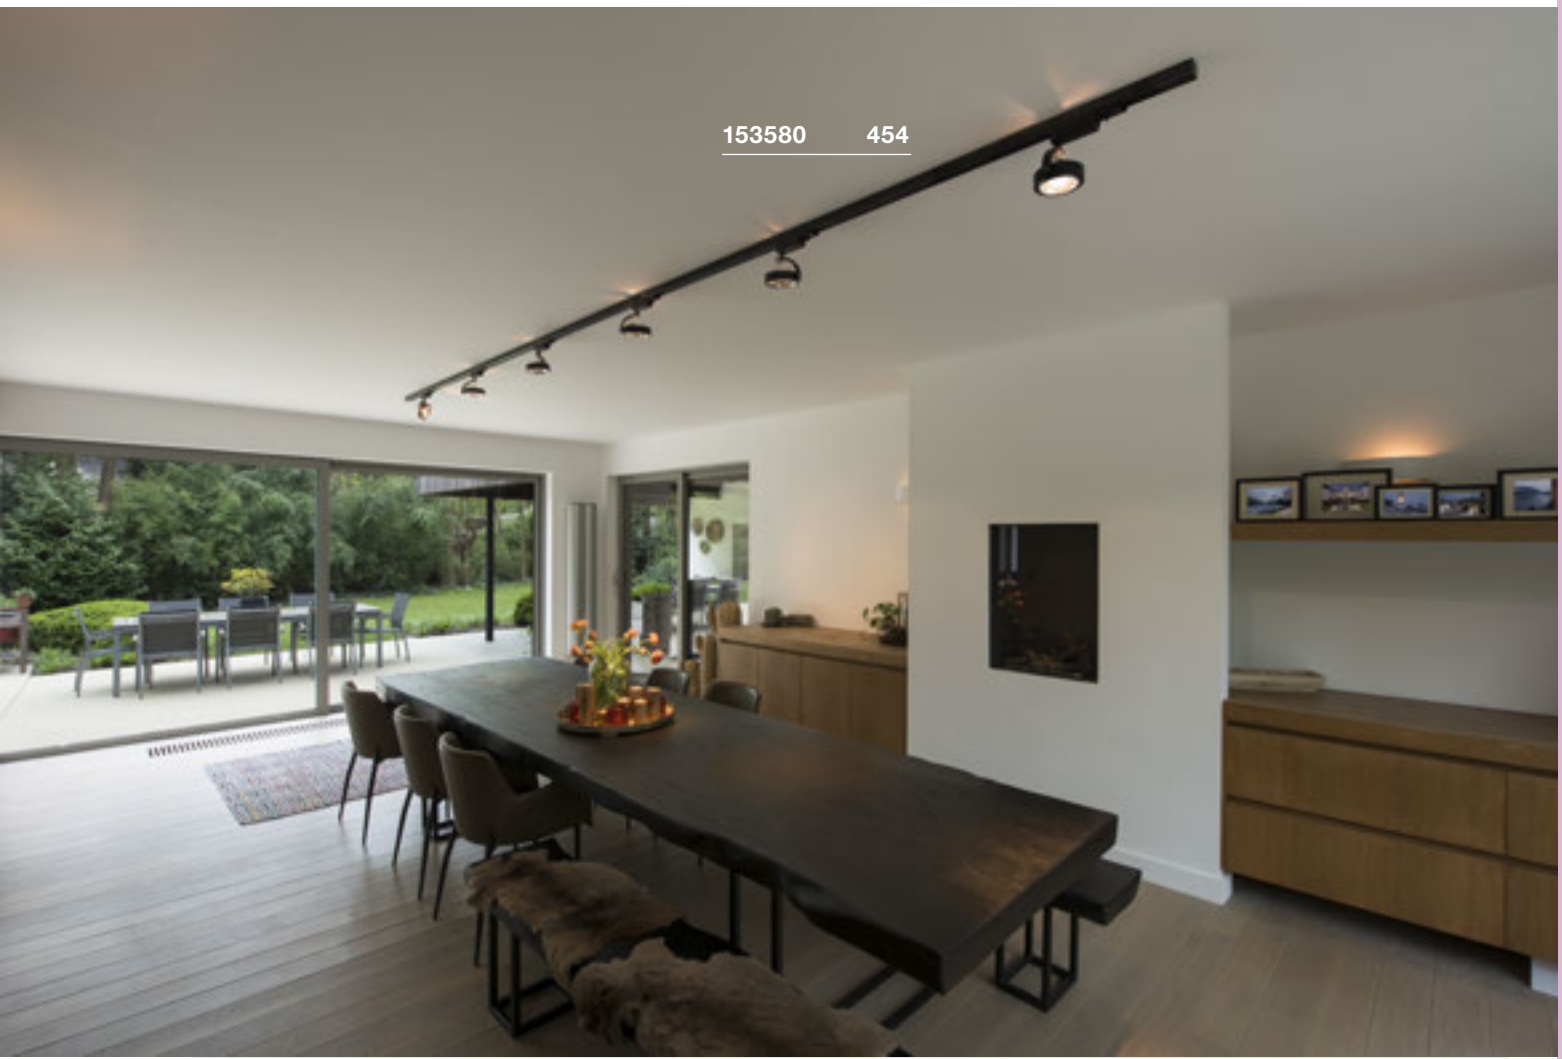

153580 454

BIMA
3Ph., single, QPAR51





SOCKET INSIDE <50 W



IP 20 350° 200°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973


Options	Prod. no.
1xGU10 black	**152240**
1xGU10 white	**152241**
1xGU10 grey	**152242**

BIMA
3Ph., double, QPAR51





SOCKET INSIDE <50 W



IP 20 350° 200°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973

Options	Prod. no.
2xGU10 black	**152230**
2xGU10 white	**152231**
2xGU10 grey	**152232**



1000657 **457**




STRUCTEC ZOOM
3 Ph,







2800lm
INSIDE CRI 90
3000K



IP 20 L70B50 350° 90°

220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: aluminium

- Beam angle can be adjusted from 25°-60° via zoom function

1000656, 1000657	2800lm 3000K	A→G A G F

Options	Prod. no.
2800lm | 3000K | CRI90	
■ black	**1000656**
2800lm | 3000K | CRI90	
□ white	**1000657**


HELIA 50 TRACK
3Ph.







810|880lm
INSIDE CRI 90
3000K



C IP 20 35° L70B50 350° 90°

LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

152960, 152961	810lm | 880lm 3000K	A→G A G E

Options	Prod. no.
810lm | 3000K | CRI90	
■ black	**152960**
880lm | 3000K | CRI90	
□ white	**152961**






NOBLO SPOT
3Ph.





620lm
INSIDE
CRI 80
2700K



C | IP 20 | 36° | L70B50 | 320° | 90°

LED

220-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium

		A→G
1001865, 1001866	620lm 2700K	A G E

Options	Prod. no.
620lm | 2700K | CRI80	
■ black	**1001865**
620lm | 2700K | CRI80	
□ white	**1001866**


ENOLA C TRACK
3Ph.







1040lm
LED INSIDE
3000K
CRI 80



IP 20 | 55° | L70B50 | 350° | 90° | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

hv		A→G
152430, 152431	1040lm 3000K	A G E


Options	Prod. no.
1040lm | 3000K | CRI80 | 55°	
■ black	**152430**
1040lm | 3000K | CRI80 | 55°	
□ white	**152431**

TEC KALU TRACK
3Ph., double, PHASE





1900lm
LED INSIDE
3000K
CRI 80



IP 20 | 60° | L70B50 | 350° | 120° | LED

220-240V ~50/60Hz | 700mA
Total wattage: 31W
Material: aluminium/polycarbonate (PC)

hv		A→G
1001419, 1001420	1900lm 3000K	A G E

Options	Prod. no.
1900lm | 3000K | CRI80 | 60°	
■ black	**1001419**
1900lm | 3000K | CRI80 | 60°	
◪ white/black	**1001420**


AVO TRACK
3Ph., QPAR51







SOCKET INSIDE <50 W



IP 20 | 350° | 90°

230V ~50/60Hz
Material: steel

GU10 <50W
Diameter: 5 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h

Prod. no. 1005078

Options	Prod. no.
1xGU10	
■ black	**152640**
1xGU10	
□ white	**152641**

STAY ON TRACK.


SIMPLY GREAT ILLUMINATION WITH HIGH-VOLTAGE SINGLE-PHASE TRACK SYSTEMS.

Thanks to the drilled holes in their cross-section, these flat aluminium tracks can be attached to your wall or ceiling quickly and easily. You can choose between a recessed version and a surface-mounted version, both of which are available in multiple colors.




1006159 472


1004935 471
143450 478

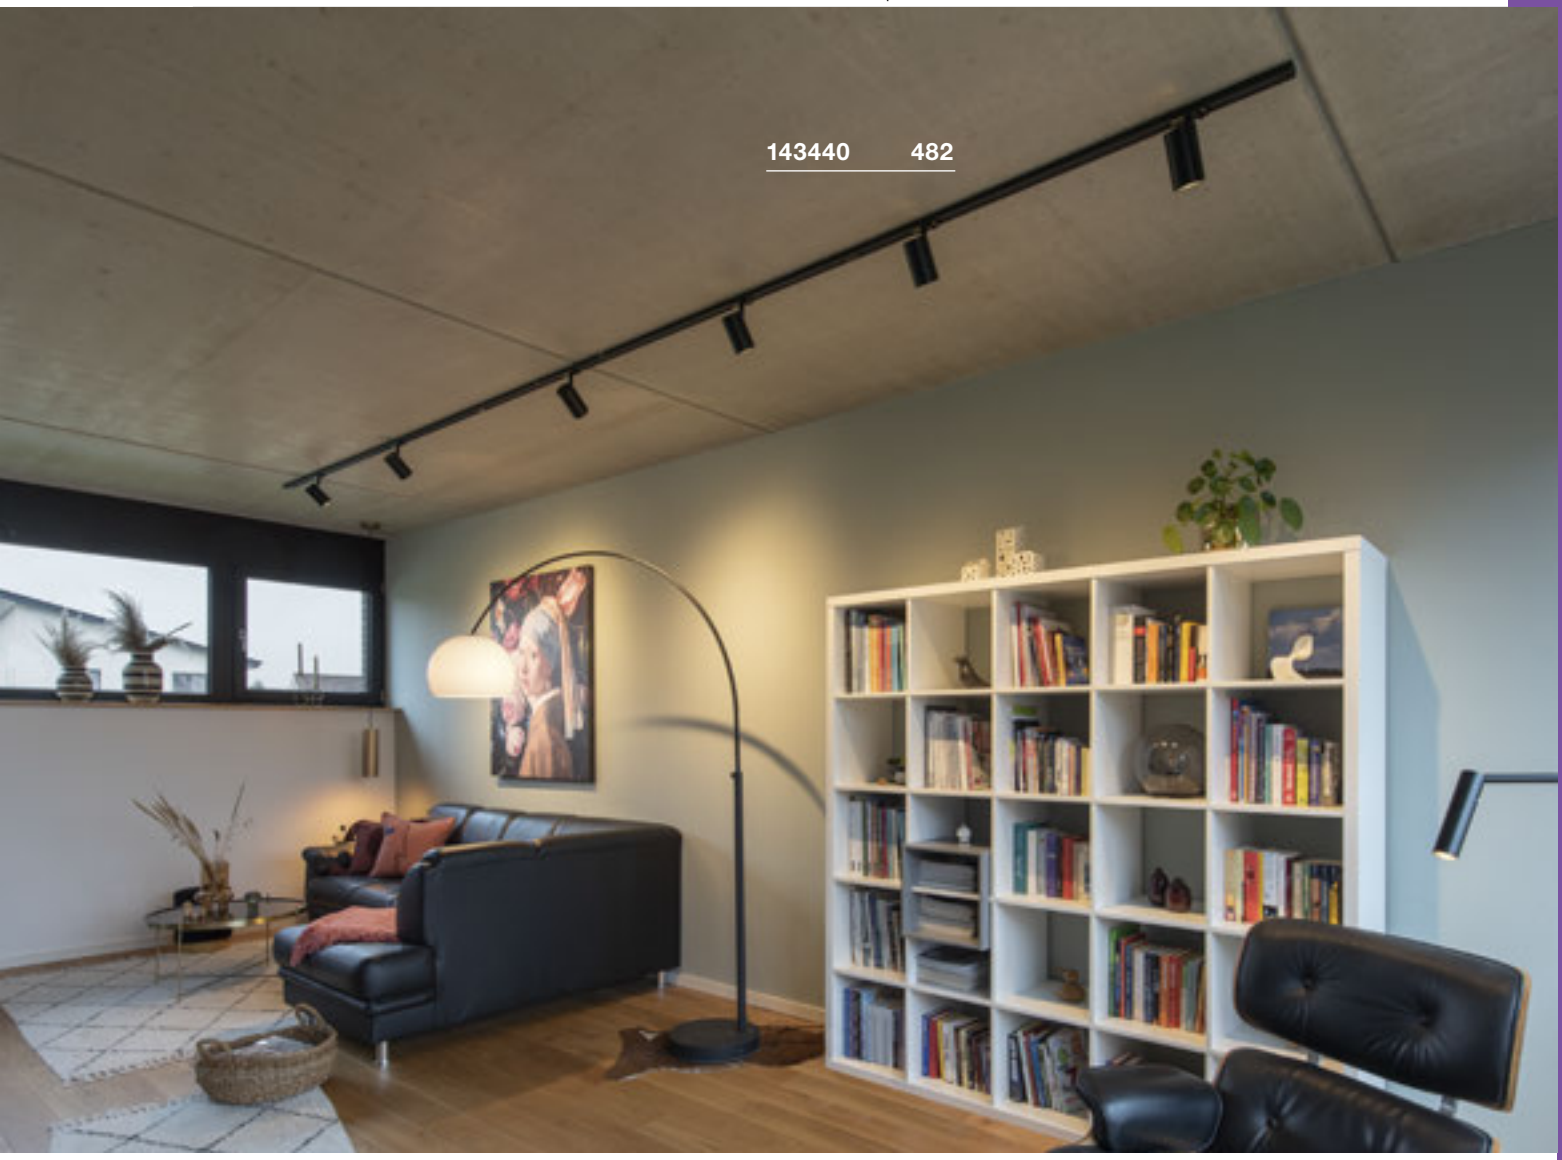

HIGH-VOLTAGE SINGLE-PHASE TRACK


470


470

471


471


472


472


471


474

475


476


476


477


478


478


478


479


480


480


480


481


482


482


483


483


484


484


485


485

You can find suitable mounting rails and accessories on pages 465-469

You can find more lights and variants at www.slv.com
You can find manufacturer's details for our recommended lamps in the chapter 'Lamps', from page 808


1000713 476

SINGLE-PHASE

MOUNTING TRACK








	1 m	1 m	1 m	2 m	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16	16	16	16
Material	aluminium	aluminium	aluminium	aluminium	aluminium	aluminium
Color	■ black	□ white	■ grey	■ black	□ white	■ grey
L x W x H (cm)	100 x 3.5 x 1.8	100 x 3.5 x 1.8	100 x 3.5 x 1.8	200 x 3.5 x 1.8	200 x 3.5 x 1.8	200 x 3.5 x 1.8
Prod. no.	**143010**	**143011**	**143012**	**143020**	**143021**	**143022**


	3 m	3 m	3 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16	16
Material	aluminium	aluminium	aluminium
Color	■ black	□ white	■ grey
L x W x H (cm)	300 x 3.5 x 1.8	300 x 3.5 x 1.8	300 x 3.5 x 1.8
Prod. no.	**1002151**	**1002152**	**1002153**

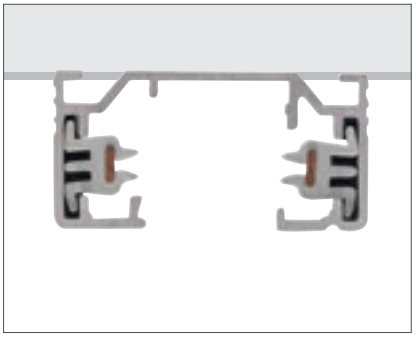



SINGLE-PHASE


Mounting track
Planning assistance and accessories at a glance

View of components from above on the installation side

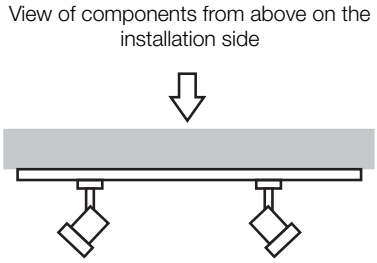

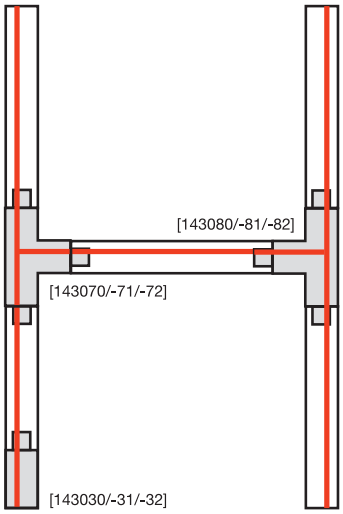

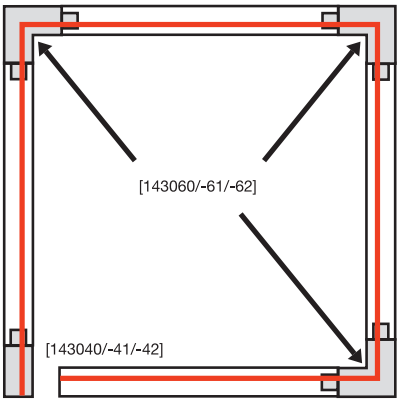

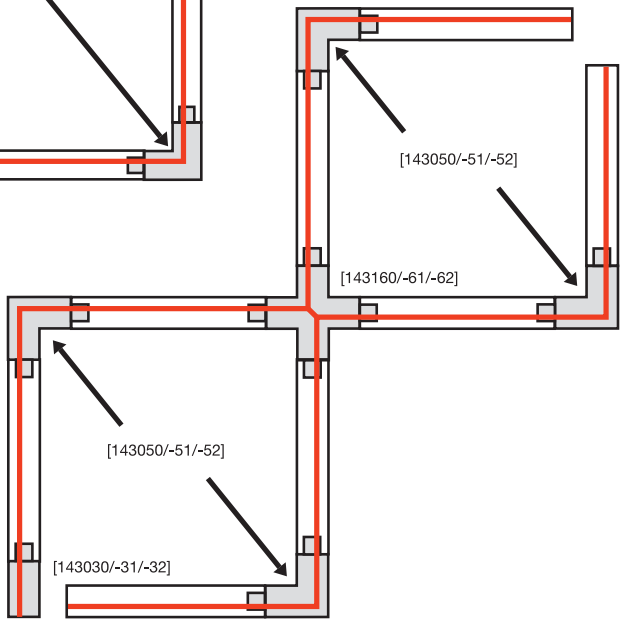



Feed-in, earth left
16 A max. | polycarbonate (PC)
L: 6.5 cm W: 3.5 cm H: 1.8 cm
black Prod. no.: **143030**
white **143031**
grey **143032**



Feed-in, earth right
16 A max. | polycarbonate (PC)
L: 10.4 cm W: 3.5 cm H: 1.8 cm
black Prod. no.: **143040**
white **143041**
grey **143042**



Longitudinal connector*
16 A max. | polycarbonate (PC)
L: 17.2 cm W: 3.5 cm H: 1.8 cm
black Prod. no.: **143100**
white **143101**
grey **143102**



Longitudinal connector
16 A max. | polycarbonate (PC)
L: 6.4 cm W: 3.5 cm H: 1.8 cm
black Prod. no.: **143090**
white **143091**
grey **143092**



Corner connector, earth inside
16 A max. | polycarbonate (PC)
L: 10.4 cm W: 10.4 cm H: 1.8 cm
black Prod. no.: **143060**
white **143061**
grey **143062**



Corner connector, earth outside
16 A max. | polycarbonate (PC)
L: 10.4 cm W: 10.4 cm H: 1.8 cm
black Prod. no.: **143050**
white **143051**
grey **143052**



T-connector, earth external, left
16 A max. | polycarbonate (PC)
L: 17.2 cm W: 10.4 cm H: 1.8 cm
black Prod. no.: **143070**
white **143071**
grey **143072**



T-connector, earth external, right
16 A max. | polycarbonate (PC)
L: 17.2 cm W: 10.4 cm H: 1.8 cm
black Prod. no.: **143080**
white **143081**
grey **143082**



X-connector
16 A max. | polycarbonate (PC)
L: 9.5 cm W: 17.2 cm H: 1.8 cm
black Prod. no.: **143160**
white **143161**
grey **143162**




Flex connector
16 A max. | polycarbonate (PC)
L: 16.4 cm W: 3.5 cm H: 1.8 cm
black Prod. no.: **143110**
white **143111**
grey **143112**



Stabilising longitudinal connector
Steel
L: 19.7 cm W: 3.2 cm H: 1.3 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)
nickel Prod. no.: **143151**



Stabilising corner connector
Steel
L: 11.5 cm W: 11.5 cm H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845)
nickel Prod. no.: **143152**



Stabilising X-connector
Steel
L: 19.7 cm W: 19.7 cm H: 0.5 cm
For reinforcement when mounting several tracks with ceiling suspension (1002845).
grey Prod. no.: **143169**




Single-phase light adapter
6 A max. | polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 4.2 cm
black Prod. no.: **143120**
white **143121**
grey **143124**



Single-phase light adapter with hooks
6 A max. | polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 7.4 cm
black Prod. no.: **143170**
white **143171**
grey **143172**




Cover
Polycarbonate (PC)
L: 200 cm W: 1.8 cm H: 0.75 cm
black Prod. no.: **1004783**
white **1004785**
grey **1004784**



End cap
Polycarbonate (PC)
L: 0.4 cm W: 3.5 cm H: 1.8 cm
black Prod. no.: **143130**
white **143131**
grey **143132**



Ceiling rose
6 A max. | polycarbonate (PC)
H: 2.5 cm Diameter: 12.1 cm
black Prod. no.: **143380**
white **143381**
grey **143382**



Wire rope suspension, 2-piece
Stainless-steel / brass
L: 500 cm | max. 10 kg
nickel Prod. no.: **1002845**


* with feed-in capacity


143580 483
1001406 143

SINGLE-PHASE

Recessed track with matching accessories



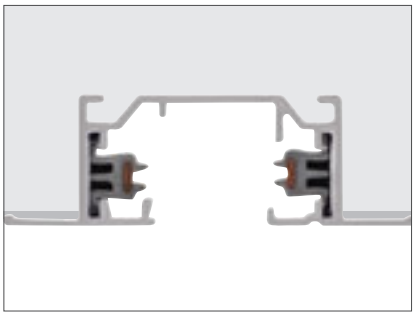

	2 m
Nominal voltage (V)	220-240V ~50/60Hz
Max. current (A)	16
Material	aluminium
Color	white
L x W x H (cm)	200 x 5.5 x 1.8
Recessed W (cm)	4
Prod. no.	**143221**



Feed-in, earth left
16 A max. | plastic
L: 10.8 cm W: 5.5 cm H: 2 cm
white Prod. no. **143231**



Feed-in, earth right
16 A max. | plastic
L: 10.8 cm W: 5.5 cm H: 2 cm
white Prod. no. **143241**




Longitudinal connector
16 A max. | plastic/steel
L: 6.5 cm W: 1.8 cm H: 1.7 cm
white Prod. no. **143271**



Corner connector, earth inside
16 A max. | plastic
L: 11.2 cm W: 11.2 cm H: 2 cm
white Prod. no. **143261**



Corner connector, earth outside
16 A max. | plastic
L: 11.2 cm W: 11.2 cm H: 2 cm
white Prod. no. **143251**



End cap
Plastic
L: 2.7 cm W: 5.5 cm H: 1.8 cm
white Prod. no. **143281**



Retainer
Steel
L: 7.5 cm W: 1.5 cm H: 4 cm
nickel Prod. no. **143230**




Single-phase adapter with hook
6 A max. | polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 7.4 cm
black Prod. no.: **143170**
white **143171**
grey **143172**



Single-phase light adapter
6 A max. | polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 4.2 cm
black Prod. no.: **143120**
white **143121**
grey **143124**

NOBLO SPOT
1Ph., triple track set



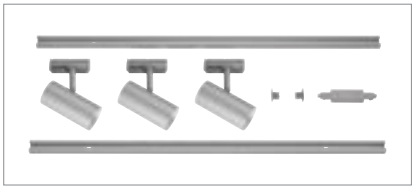

1860lm
LED INSIDE
2700K
CRI 80

IP 20 | 36° | L70B50 | 320° | 90°

220-240V ~50/60Hz | 350mA
Material: aluminium


- 2 x 1m high-voltage track
  1 x feed-in/longitudinal connector
  1 x 2 end caps
  3 x NOBLO light heads

1002610, 1002611, 1002612	1860lm 2700K	A→G, A–G, E

Options	Prod. no.
1860lm | 2700K | CRI80	
black	**1002610**
1860lm | 2700K | CRI80	
white	**1002611**
1860lm | 2700K | CRI80	
grey	**1002612**

PURI TRACK
1Ph., triple track set



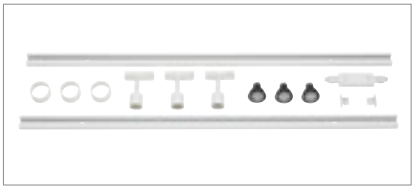

SOCKET INSIDE
<50 W

IP 20 | 340° | 85°

230V ~50Hz
Material: aluminium

- 2 x 1m high-voltage track
  1 x longitudinal connector
  1 x 2 end caps
  3 x PURI light heads
  3 x LED GU10 lamps
  3 x decorative rings for GU10

GU10

Options	Prod. no.
3xGU10	
black	**143190**
3xGU10	
white	**143191**
3xGU10	
grey	**143194**










PANEL TRACK
1Ph., square

NEW





1800lm
INSIDE
CRI 90
3000K



IP 20 L70B50 350° 180°

220-240V ~50/60Hz | 450mA
Total wattage: 18W
Material: polycarbonate (PC)/steel

hv		A→G
1004933, 1004934	1800lm 3000K	A G E

Options	Prod. no.	
1800lm | 3000K | CRI90		
■ black	**1004933**	■
1800lm | 3000K | CRI90		
□ white	**1004934**	■


PANEL TRACK
1Ph., round

NEW





1800lm
INSIDE
CRI 90
3000K



IP 20 L70B50 350° 180°

220-240V ~50/60Hz | 450mA
Total wattage: 18W
Material: polycarbonate (PC)/steel

hv		A→G
1004935, 1004936	1800lm 3000K	A G E

Options	Prod. no.	
1800lm | 3000K | CRI90		
■ black	**1004935**	■
1800lm | 3000K | CRI90		
□ white	**1004936**	■

PARA CONE GL
1Ph., GU10


NEW







SOCKET INSIDE <25 W



IP 20 300° 90°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <25W

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1003101

Options	Prod. no.
1xGU10	
■ black	**1006155**
1xGU10	
□ white	**1006156**

PARA CONE GL
PD, GU10


NEW







SOCKET INSIDE <25 W



IP 20 250

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <25W

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1003101

Options	Prod. no.
1xGU10	
■ black	**1006159**
1xGU10	
□ white	**1006160**





ACCESSORIES

Fitu single ceiling rose

16A max.
Steel
H: 3.9 cm
Diameter: 8.5 cm
Incl. strain relief



Options	Prod. no.
black	**132600**
white	**132601**
chrome	**132605**

Fitu triple ceiling rose

16A max.
Steel
H: 5.4 cm
Diameter: 22 cm
Incl. strain relief



Options	Prod. no.
black	**132610**
white	**132611**
chrome	**132615** ▼

Ceiling rose, 3-piece

16A max.
Steel
L: 60 cm W: 8.5 cm H: 5 cm
Incl. strain relief



Options	Prod. no.
black	**1001818**
white	**1001819**

Single-phase light adapter

6A max.
Polycarbonate (PC)
L: 8.2 cm W: 3.5 cm H: 4.2 cm
Max. mechanical load 2 kg



Options	Prod. no.
black	**143120**
white	**143121**
grey	**143124**

3-phase light adapter

10A max.
Plastic
Max. mechanical load 5 kg



Options	Prod. no.
black	**145990**
white	**1001542**
grey	**145994**


PARA CONE 14
1Ph., QPAR51







SOCKET INSIDE <25 W



IP 20 300° 80°

220-240V ~50/60Hz
Material: steel

GU10 <25W

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1003101

Options	Prod. no.
1xGU10	
glossy black	**1002873**
1xGU10	
glossy white	**1002874**
1xGU10	
copper	**1002875**


PARA CONE 14
1Ph., PD, QPAR51







SOCKET INSIDE <35 W



IP 20 150

230V ~50Hz
Material: steel

- Textile cable
- Black/gold version with golden reflector
- All other versions with white reflector

GU10 <35W

LED GU10 | 3.2W
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1003101

Options	Prod. no.
1xGU10	
glossy black	**143990**
1xGU10	
glossy white	**143991**
1xGU10	
copper	**1001968**










TONGA®
1Ph., PD, E14





SOCKET INSIDE <60 W



IP 20 150

220-240V ~50/60Hz
Material: aluminium/glass

E14 <60W
Diameter: 5 cm L: 13 cm

LED E14 | 4.2W | 320°
2700K | 370lm | EEK=F
4kWh/1000h

Prod. no. 1005284


Options	Prod. no.
1xE14	
grey/milky	**143594**

LIGHT EYE® 90
1Ph., QPAR51





SOCKET INSIDE <50 W



IP 20 | 350° | 90°

230V ~50/60Hz
Material: steel

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972


- Decorative lamp ring, diameter 5.7 cm **Prod. no. 151040**
- Decorative lamp ring, diameter 5.7 cm **Prod. no. 151041**
- Decorative lamp ring, diameter 5.7 cm **Prod. no. 151049**

Options	Prod. no.
1xGU10 black/chrome	**144010**
1xGU10 white/chrome	**144011**
1xGU10 copper	**144019**

LIGHT EYE® 150
1Ph., PD, QPAR111



SOCKET INSIDE <75 W



IP 20 | 150

220-240V ~50/60Hz
Material: steel


GU10 <75W


QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h



Prod. no. 1005276

Options	Prod. no.
1xGU10 black/chrome	**1000713**
1xGU10 white/chrome	**143621**
1xGU10 chrome	**143620**

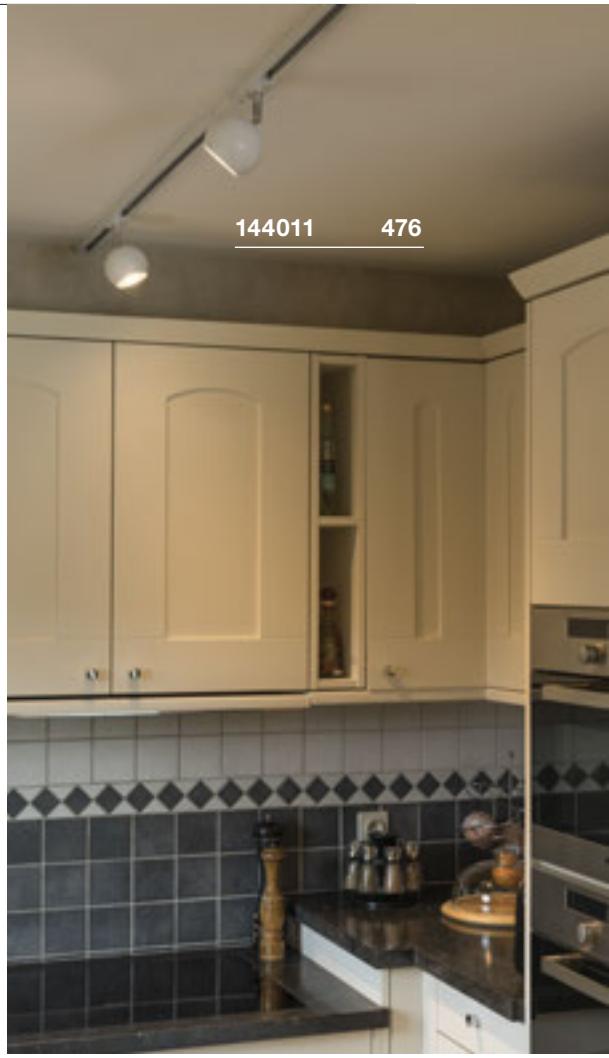

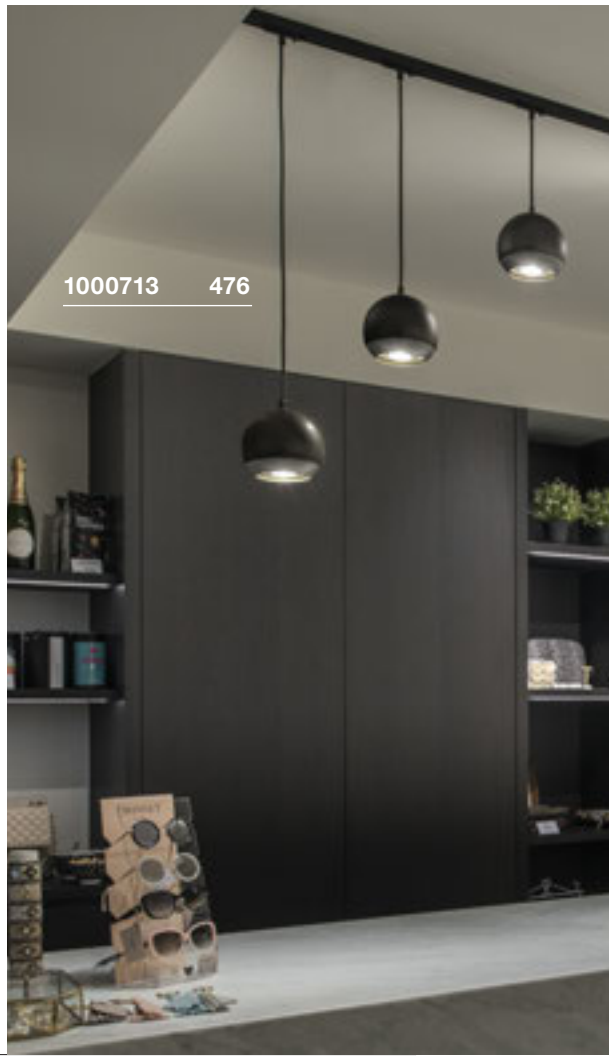





FORCHINI M 40 TRACK
1Ph., E27










SOCKET INSIDE <40 W



IP 20 150

220-240V ~50/60Hz
Material: aluminium/steel

- Pendant light adapter color silver-grey [143930] / black [143932]

E27 <40W
Diameter: 6.8 cm L: 15.2 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005303


Options	Prod. no.
1xE27 black/gold	**143930**
1xE27 black/gold	**143932**

PURI TRACK
1Ph., QPAR51





SOCKET INSIDE <10 W



IP 20 340° 85°

220-240V ~50/60Hz
Material: aluminium/plastic

GU10 <10W

LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no. 1005077


Options	Prod. no.
1xGU10	
black	**1001868**
1xGU10	
white	**1001869**
1xGU10	
grey	**1001870**

PURI TRACK
1Ph., QPAR51





SOCKET INSIDE <50 W



IP 20 350° 85°

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Decorative ring for QPAR51 included

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
1xGU10	
black	**143390**
1xGU10	
white	**143391**
1xGU10	
grey	**143392**

PURIA TRACK
1Ph., QPAR51





SOCKET INSIDE <10 W



IP 20 340° 85°


220-240V ~50/60Hz
Material: aluminium/plastic

GU10 <10W

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004973

Options	Prod. no.
1xGU10	
black	**143450**
1xGU10	
white	**143451**
1xGU10	
grey	**143454**

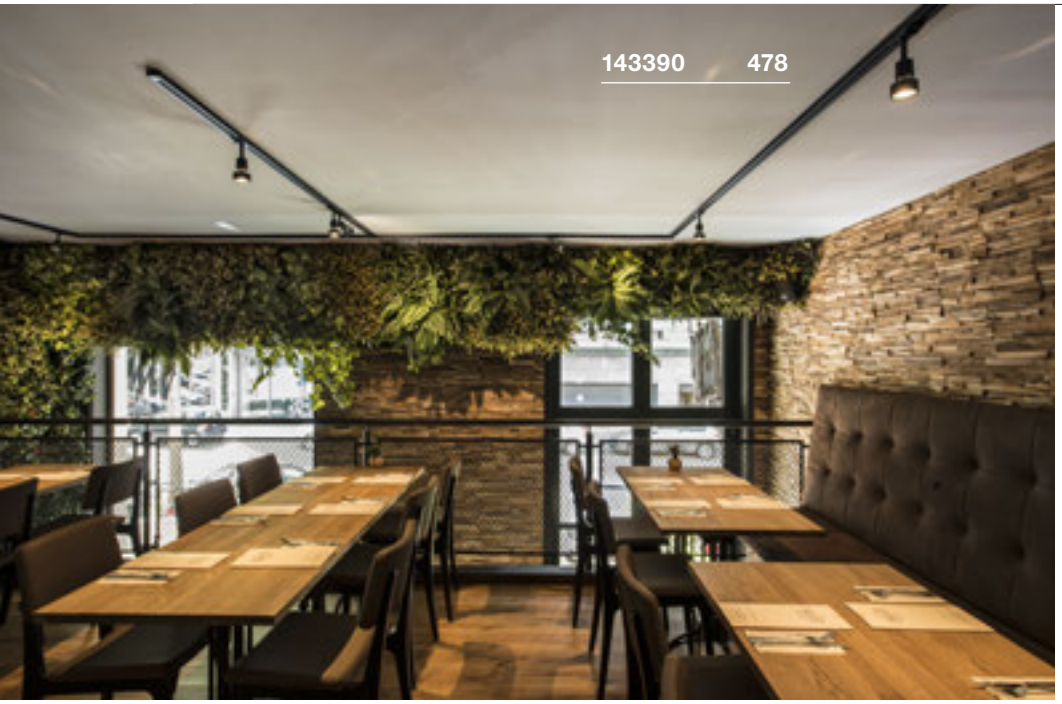




AVO TRACK
1Ph., QPAR51







SOCKET INSIDE <50 W



IP 20 | 350° | 90°

220-240V ~50/60Hz
Material: steel

GU10 <50W
Diameter: 5 cm


LED GU10 51mm | 6W | 38°
2700K | 450lm | EEK=G
6kWh/1000h

Prod. no. 1005076


Options	Prod. no.
1xGU10 black	**144200**
1xGU10 white	**144201**
1xGU10 grey	**144204**

ENOLA C TRACK
1-phase



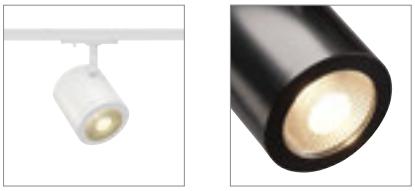

1040lm
LED INSIDE
3000K
CRI 80



IP 20 35° L70B50 350° 90°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

1000711, 143941	1040lm 3000K	A→G E


Options	Prod. no.
1040lm | 3000K | CRI80 | 35°	
black	**1000711**
1040lm | 3000K | CRI80 | 35°	
white	**143941**

ENOLA C TRACK
1-phase





1040lm
LED INSIDE
3000K
CRI 80



IP 20 55° L70B50 350° 90°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

1000712, 143951	1040lm 3000K	A→G E


Options	Prod. no.
1040lm | 3000K | CRI80 | 55°	
black	**1000712**
1040lm | 3000K | CRI80 | 55°	
white	**143951**

ENOLA B TRACK
1Ph., QPAR51





SOCKET INSIDE
<50 W



IP 20 350° 90°


220-240V ~50/60Hz
Material: aluminium/steel

GU10 <50W
Diameter: 5 cm L: 6.7 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h

Prod. no. 1005079

Options	Prod. no.
1xGU10	
black	**1002110**
1xGU10	
white	**1002111**
1xGU10	
grey	**1002113**

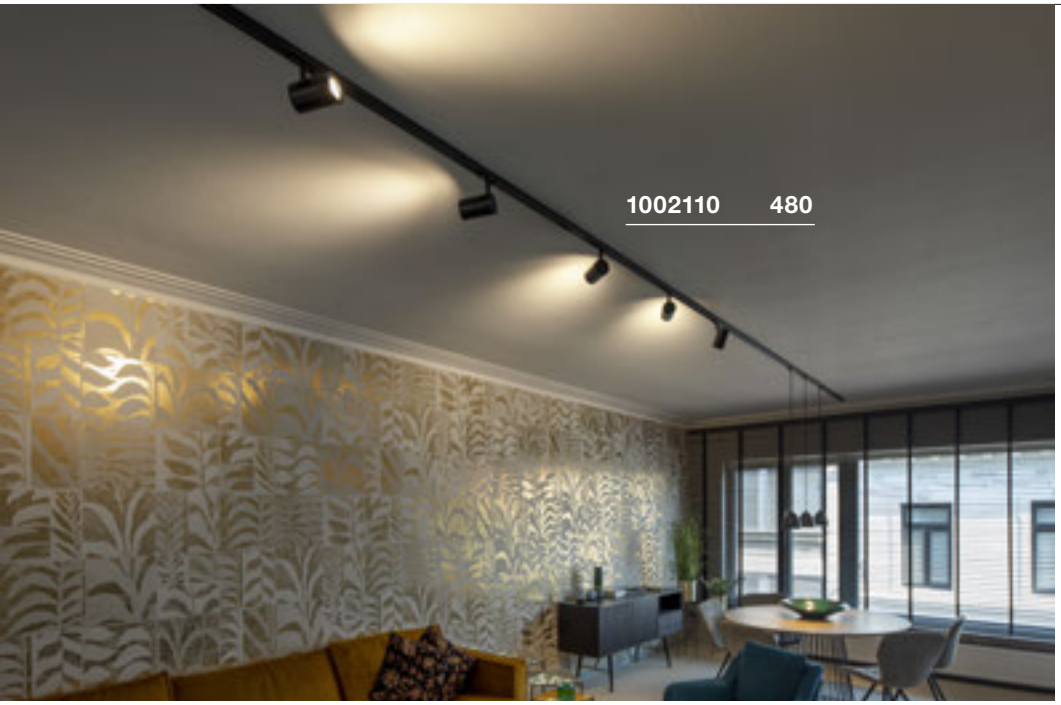




ENOLA B
PD, QPAR51







SOCKET INSIDE <50 W



IP 20 150

230V ~50Hz
Material: aluminium/steel

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
1xGU10 black	**143960**
1xGU10 white	**143961**
1xGU10 grey	**143964**

BIMA
1Ph., double, QPAR51





SOCKET INSIDE <50 W



IP 20 350° 200°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
2xGU10	
■ black	**143430**
2xGU10	
□ white	**143431**
2xGU10	
■ grey	**143432**

BIMA
1Ph., single, QPAR51





SOCKET INSIDE <50 W



IP 20 350° 200°


220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5 cm L: 5.7 cm


LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h


Prod. no. 1005080

Options	Prod. no.
1xGU10	
■ black	**143440**
1xGU10	
□ white	**143441**
1xGU10	
■ grey	**143442**

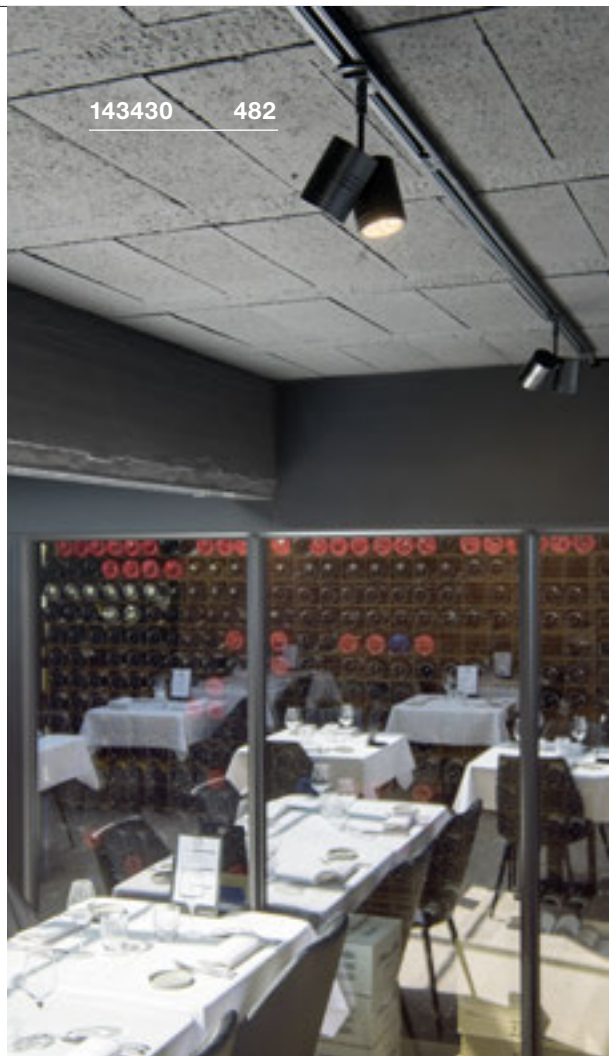



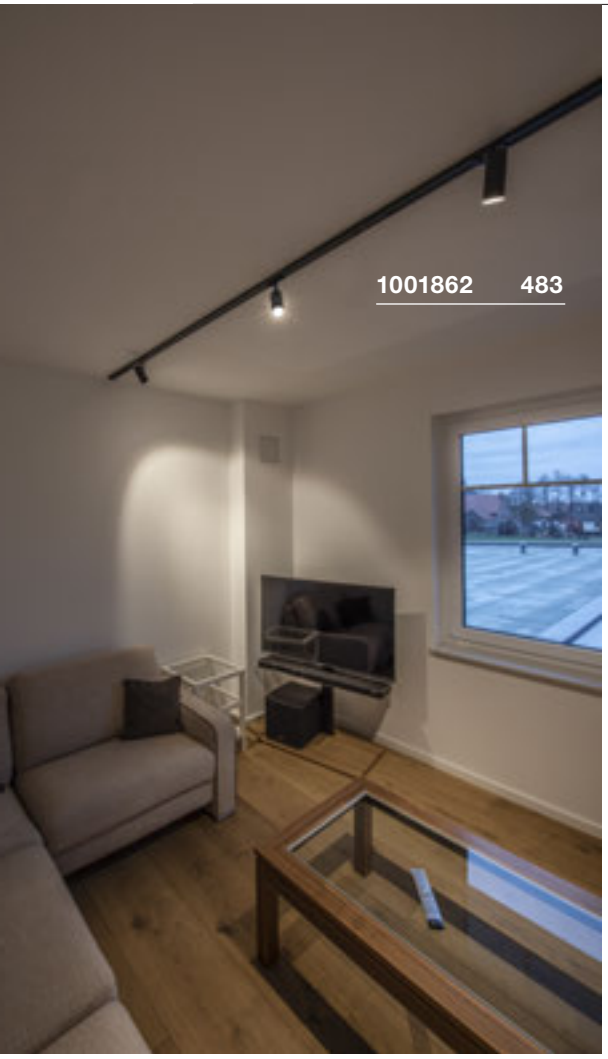

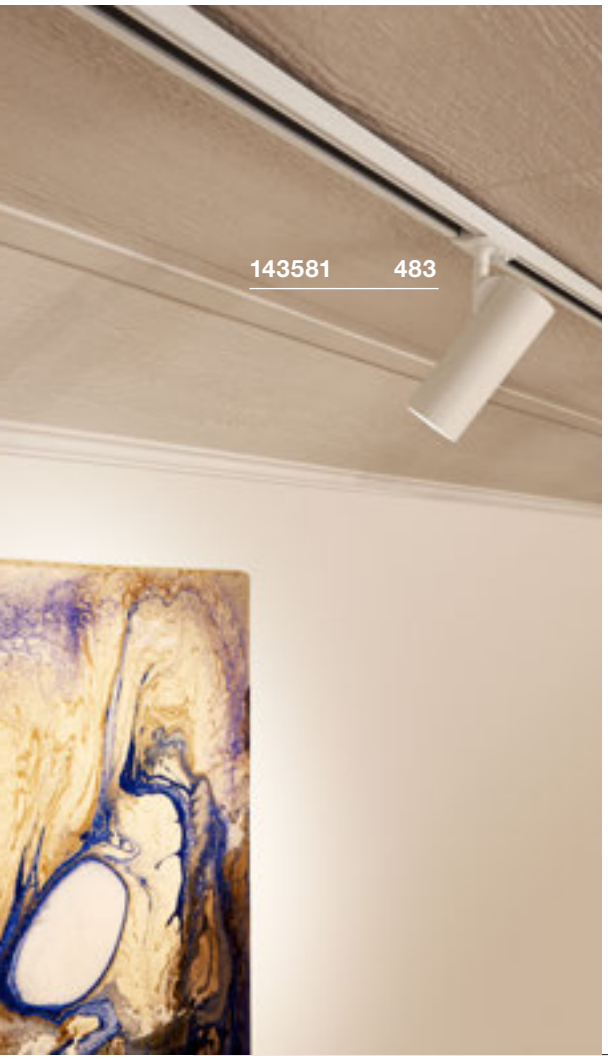


NOBLO SPOT
Single-phase







620lm
2700K
CRI 80



IP 20 | 36° | L70B50 | 320° | 90°


220-240V ~50/60Hz | 350mA
Total wattage: 7.5W
Material: aluminium

hv		A→G
1001862, 1001863, 1001864	620lm 2700K	A→G E


Options	Prod. no.
620lm | 2700K | CRI80	
black	**1001862**
620lm | 2700K | CRI90	
white	**1001863**
620lm | 2700K | CRI90	
grey	**1001864**

HELIA 50 TRACK
Single-phase



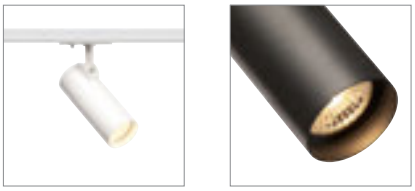

810|880lm
3000K
CRI 90



IP 20 | 35° | L70B50 | 350° | 90°

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium

hv		A→G
143580, 143581	810lm | 880lm 3000K	A→G E


Options	Prod. no.
810lm | 3000K | CRI90	
black	**143580**
880lm | 3000K | CRI90	
white	**143581**

KALU TRACK
1Ph., PHASE





860lm
3000K
CRI 80



IP 20 95° L70B50 350° 90°

220-240V ~50/60Hz
Total wattage: 13W
Material: aluminium


1002854, 143731	860lm 3000K

Options	Prod. no.
860lm | 3000K | CRI80	
black	**1002854**
860lm | 3000K | CRI80	
white	**143731**

KALU TRACK
1Ph., QPAR111







IP 20 350° 90°

220-240V ~50/60Hz
Material: aluminium/plastic

GU10 <75W

QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h

Prod. no. 1005276

Options	Prod. no.
1xGU10	
black	**143540**
1xGU10	
white	**143541**
1xGU10	
grey	**143544**







EURO SPOT TRACK
1Ph., QPAR51











SOCKET INSIDE  <25 W







220-240V ~50/60Hz
Material: aluminium/glass



GU10 <25W



LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h



Prod. no. 1005079

Options	Prod. no.
1xGU10	
■ black	**1001861**
1xGU10	
□ white	**143811**

ALTRA DICE TRACK
1Ph., QPAR51













SOCKET INSIDE  <50 W







220-240V ~50/60Hz
Material: aluminium



GU10 <50W



LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972


Options	Prod. no.
1xGU10	
■ black	**143350**
1xGU10	
□ white	**143351**
1xGU10	
■ grey	**143354**

SNAPPY AND CHIC.

THE DECORATIVE HIGH-VOLTAGE EASYTEC® II TRACK SYSTEM.

With this decorative track system, you can create your own lighting mood in just a few steps. The aluminium support rails are available in different colors, allowing perfect coordination with any environment.

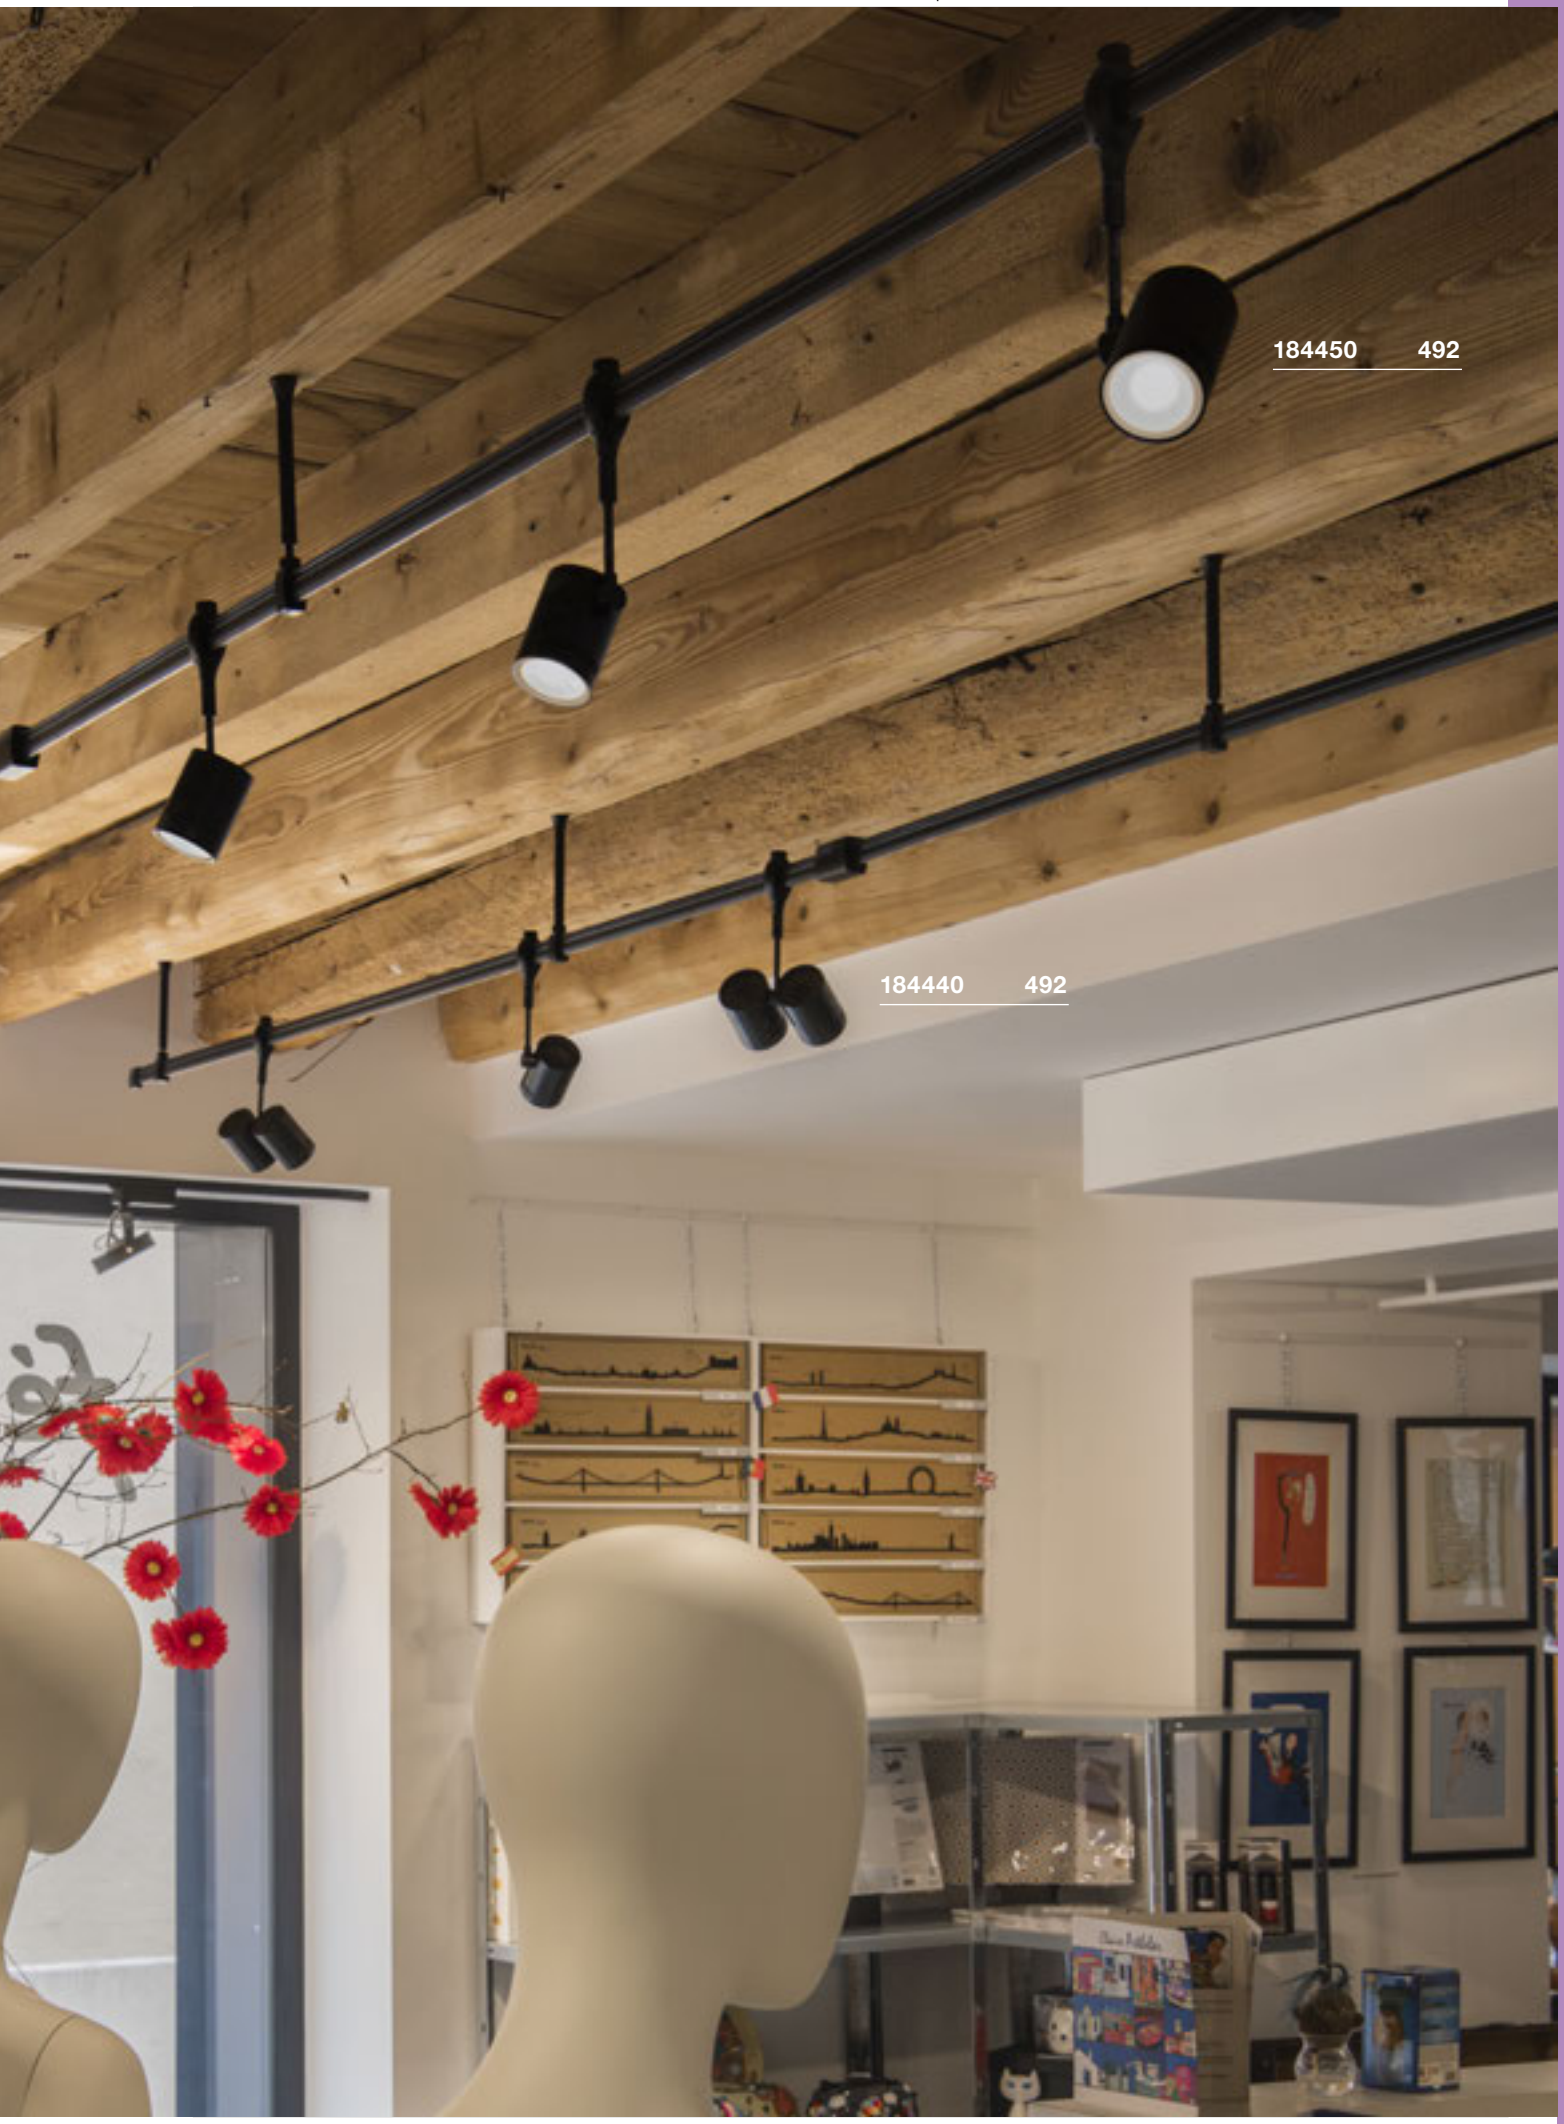


184450 492
184440 492


184440 492



HIGH-VOLTAGE EASYTEC® II TRACK SYSTEM


492


492


492


494

494


495


495


Matching tracks and accessories can be found on page 491


You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808


185590 495

EASYTEC® II

Track with matching accessories

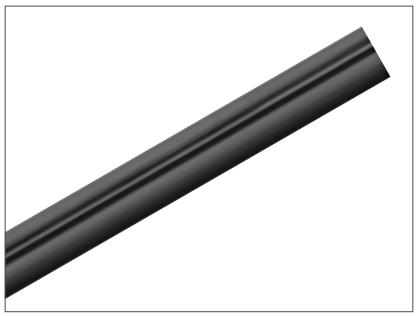

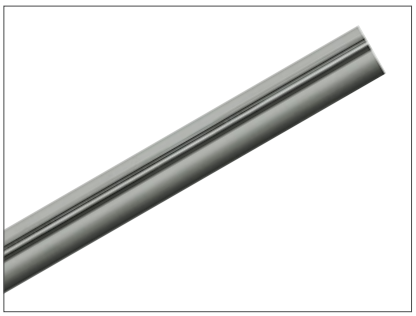




	2 m	2 m
Nominal voltage (V)	220-240V ~50/60Hz	220-240V ~50/60Hz
Max. current (A)	16	16
Material	aluminium	aluminium
Color	■ black	■ grey
L x W x H (cm)	200 x 1 x 3	200 x 1 x 3
Prod. no.	**184020**	**184022**



Flexible feed-in
16A max. | aluminium
L: 7.5 cm W: 7.5 cm H: 6 cm
Cable length 40 cm
■ black Prod. no.: **184004**
■ grey **184002**




Ceiling suspension, adjustable
Aluminium
Adjustable from 18-26 cm
■ black Prod. no.: **184060**
■ grey **184062**



Shortbox feed-in
16A max. | aluminium/steel
W: 22 cm H: 10.5 cm
■ black Prod. no.: **184010**
■ grey **184012**




Flex connector
16 A max. | plastic
L: 21.5 cm W: 3 cm H: 4cm
■ black Prod. no.: **184300**
■ grey **184302**



Longitudinal connector electrical
16A max. | aluminium
■ black Prod. no.: **184030**
■ grey **184032**



End caps
Plastic
■ black Prod. no.: **184140**
■ grey **184142**



Insulating connector
Aluminium
■ black Prod. no.: **184170**
■ grey **184172**



Easytec® II Pendant light adapter
3A max. | aluminium/plastic
L: 13 cm
Max. mechanical load 2 kg
■ black Prod. no.: **184290**
■ grey **184292**



Flexible ceiling suspension, adjustable
Aluminium
Adjustable from 23-31 cm
■ black Prod. no.: **184330**
■ grey **184332**



Bending tool for radi > 25cm
Steel/plastic
■ grey Prod. no.: **184000**


BIMA
EASYTEC® II, single, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 5W | 38°
2700-6500K | 380lm | EEK=F
5kWh/1000h

Prod. no. 1005311


Options	Prod. no.
1xGU10	
black	**184450**
1xGU10	
grey	**184452**

BIMA
EASYTEC® II, double, QPAR51





SOCKET INSIDE <50 W



IP 20 350° 180°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h




Prod. no. 1004973


Options	Prod. no.
2xGU10	
black	**184440**

KANO
EASYTEC® II, QPAR51





SOCKET INSIDE <50 W



IP 20 350° 90°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <50W
Diameter: 5.1 cm L: 5.7 cm


LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h



Prod. no. 1005079

Options	Prod. no.
1xGU10	
grey	**184071**


184450 492

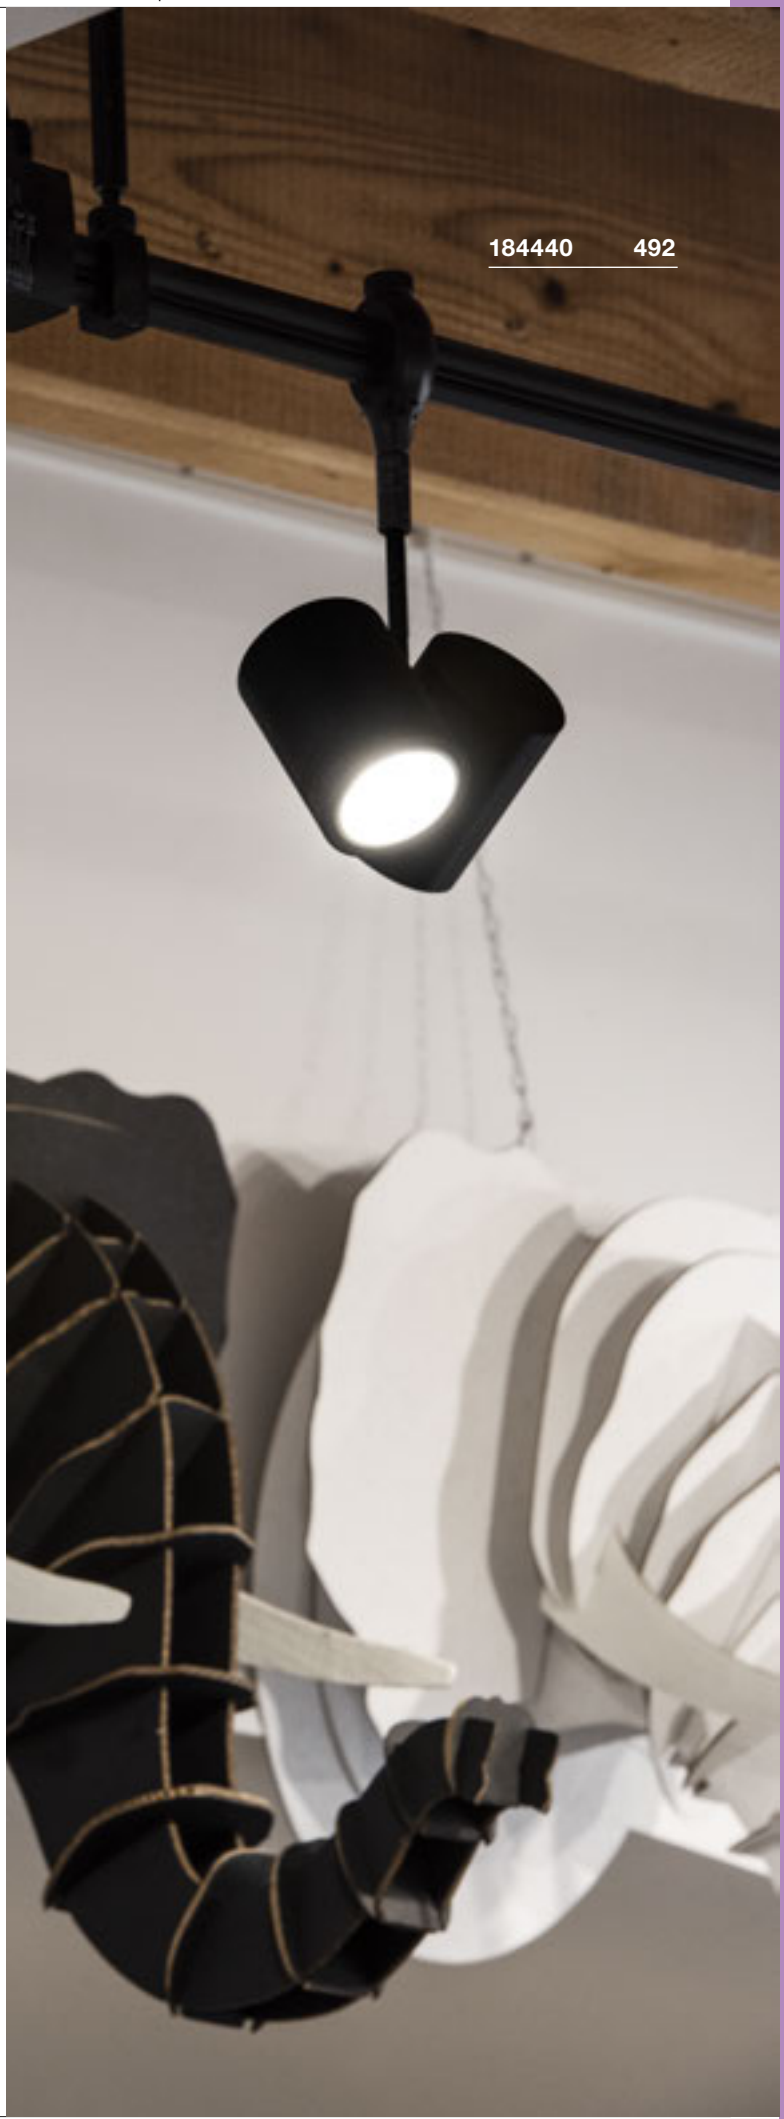
184440 492


ANILA
EASYTEC® II, QPAR51







SOCKET INSIDE <50 W



IP 20 350° 120°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <50W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10	
■ black	**184630**
1xGU10	
■ grey	**184634**


TONGA®
EASYTEC® II, PD, E14







SOCKET INSIDE <60 W



IP 20 150


220-240V ~50/60Hz
Material: aluminium/glass

E14 <60W
Diameter: 5 cm L: 13 cm

C35 | 4.2W | 320°
2700K | 380lm | EEK=F
5kWh/1000h

Prod. no. 1005284

Options	Prod. no.
1xE14	
■ black	**184530**
1xE14	
■ grey	**184534**

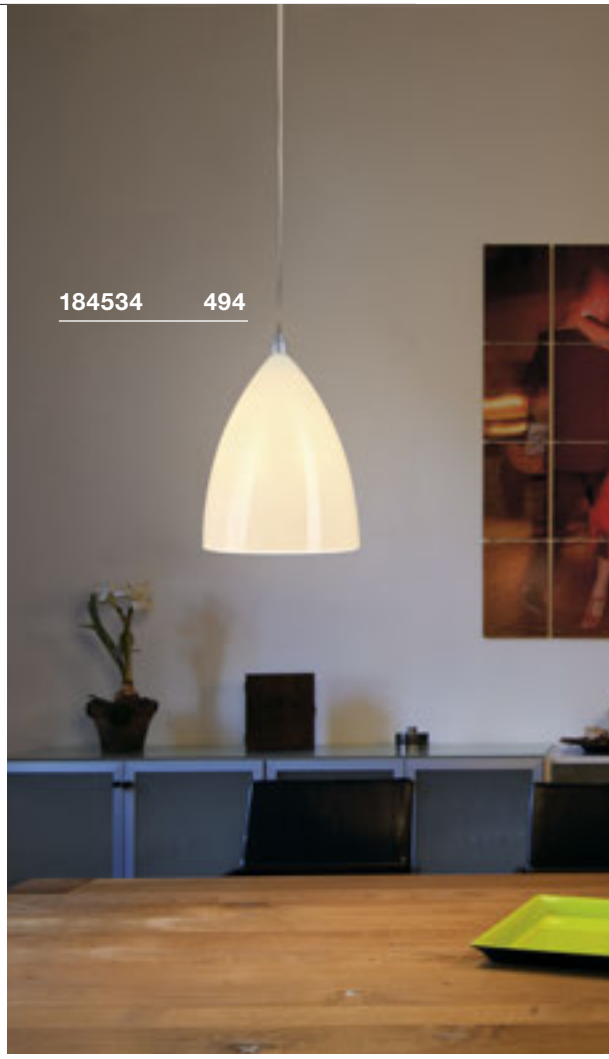







LIGHT EYE® 150
EASYTEC® II, PD, QPAR111










SOCKET INSIDE  <75 W







220-240V ~50/60Hz
Material: steel



GU10 <75W



QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h



Prod. no. 1005276

Options	Prod. no.
1xGU10	
■ black	**184590**
1xGU10	
◧ black/chrome	**185590**


LIGHT EYE® 150 TRACK
EASYTEC® II, QPAR111







SOCKET INSIDE  <75 W







220-240V ~50/60Hz
Material: steel



GU10 <75W



QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h



Prod. no. 1005276

Options	Prod. no.
1xGU10	
◧ black/chrome	**185580**

A PASSION FOR DETAIL.


ACCENT LIGHTING WITH A LOW-VOLTAGE CABLE SYSTEM.

Light helps to give your rooms their own special atmosphere. Wherever you want to create a cosy yet professional look, low-voltage cable systems are the perfect solution, offering scope for individual lighting concepts and creating a sense of comfort.




1002862 504


139112 504

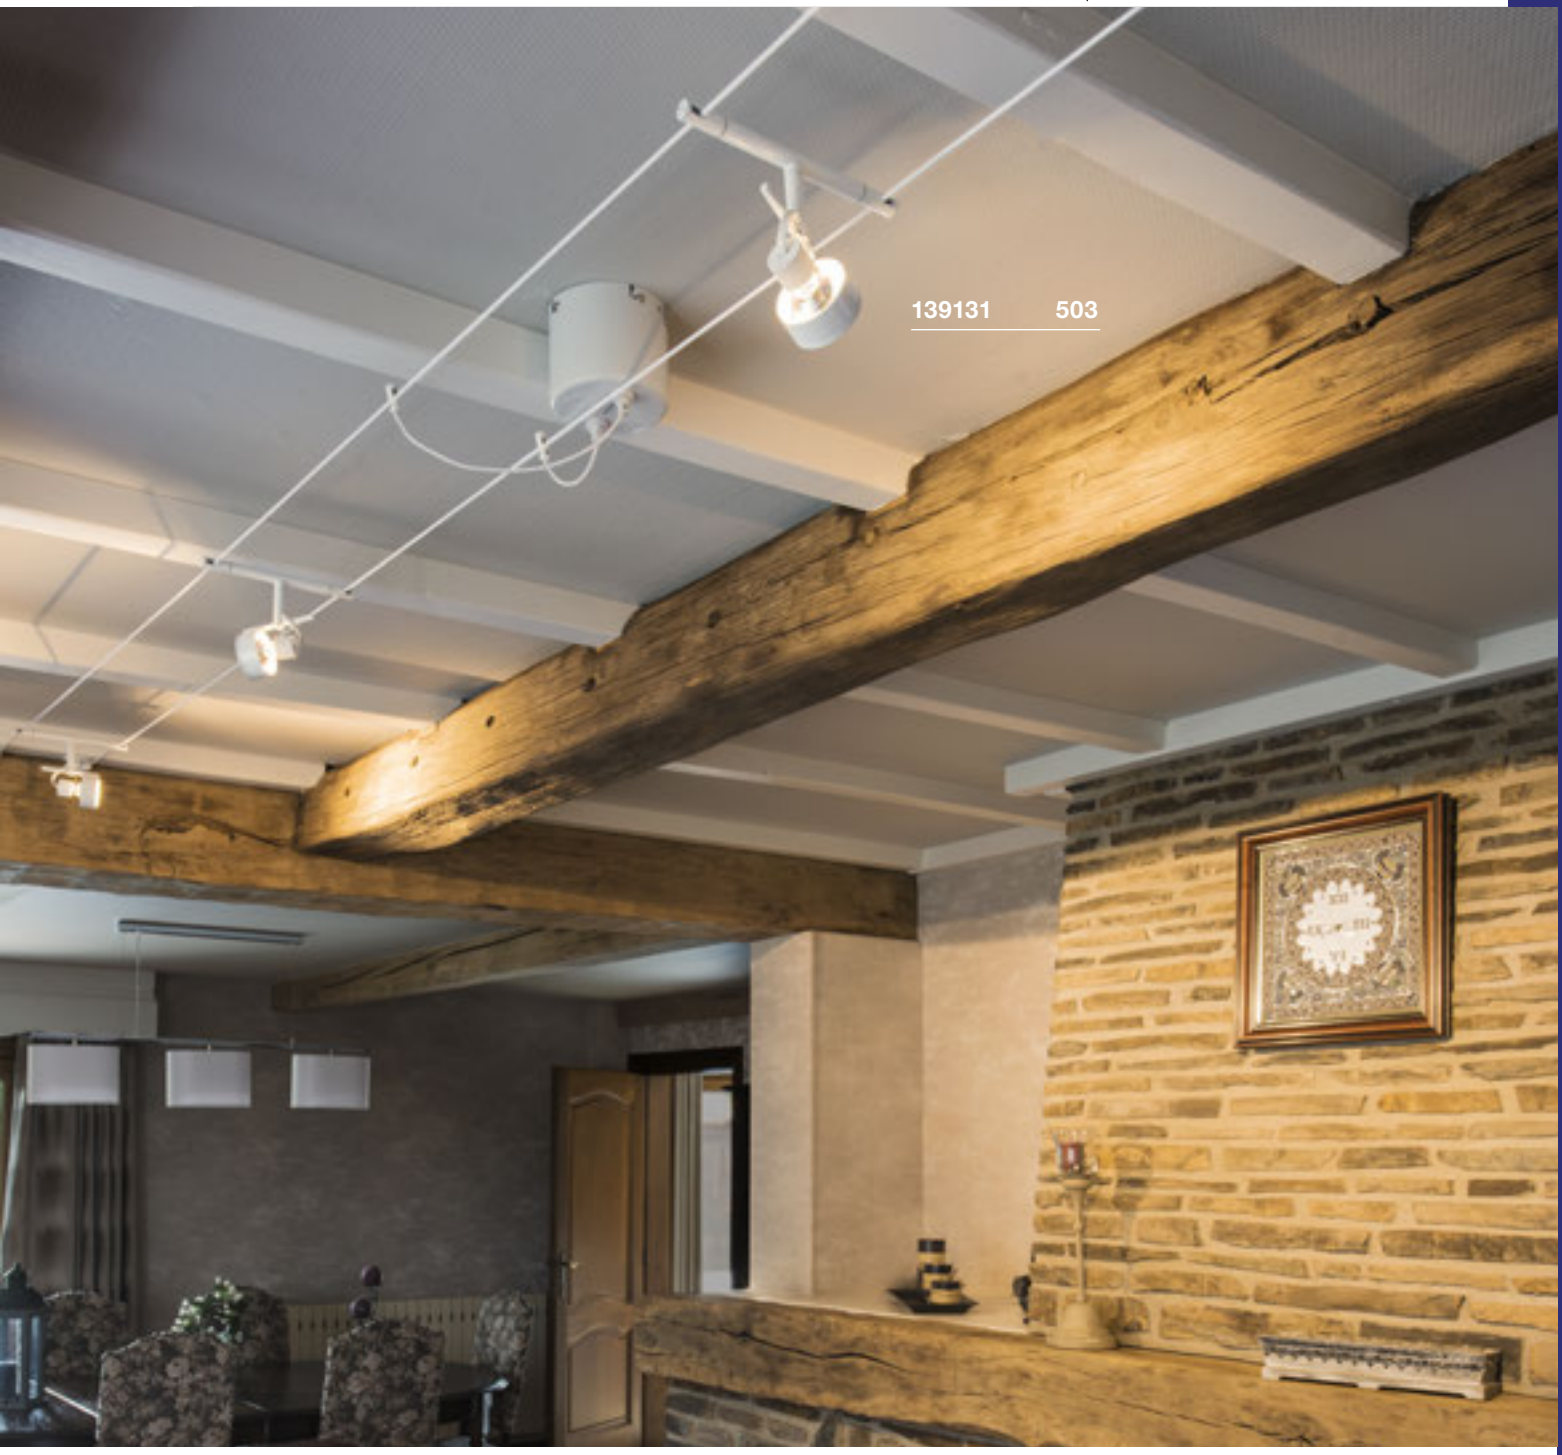

LOW-VOLTAGE CABLE SYSTEM


502

502


503


503


503


504


504


505


506


506


506

Matching accessories can be found on pages 500-501

You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808

TENSEO

Low-voltage cable system with matching accessories








TENSEO 4 mm²	10 m	10 m	10 m	20 m	20 m	20 m
Max. voltage	48V	48V	48V	48V	48V	48V
Max. current load	25A	25A	25A	25A	25A	25A
Material	copper/ plastic	copper/ plastic	copper/ plastic	copper/ plastic	copper/ plastic	copper/ plastic
Color	■ black	□ white	□ transparent	■ black	□ white	□ transparent
Diameter (cm)	0,4	0,4	0,4	0,4	0,4	0,4
Length (cm)	1000	1000	1000	2000	2000	2000
Prod. no.	**1002602**	**1002603**	**1002604**	**139030**	**139031**	**139024**

TENSEO 4 mm²	100 m	100 m	10 m
Max. voltage	48V	48V	48V
Max. current load	25A	25A	25A
Material	copper/ plastic	copper/ plastic	copper/ plastic
Color	■ black	□ white	□ transparent
Diameter (cm)	0,4	0,4	0,4
Length (cm)	10000	10000	10000
Prod. no.	**139040**	**139041**	**139004**

TENSEO 6 mm²	20 m	20 m	20 m	100 m	100 m	100 m
Max. voltage	48V	48V	48V	48V	48V	48V
Max. current load	25A	25A	25A	25A	25A	25A
Material	copper/ plastic	copper/ plastic	copper/ plastic	copper/ plastic	copper/ plastic	copper/ plastic
Color	■ black	□ white	□ transparent	■ black	□ white	□ transparent
Diameter (cm)	0,6	0,6	0,6	0,6	0,6	0,6
Length (cm)	2000	2000	2000	10000	10000	10000
Prod. no.	**139050**	**139051**	**139026**	**139060**	**139061**	**139006**

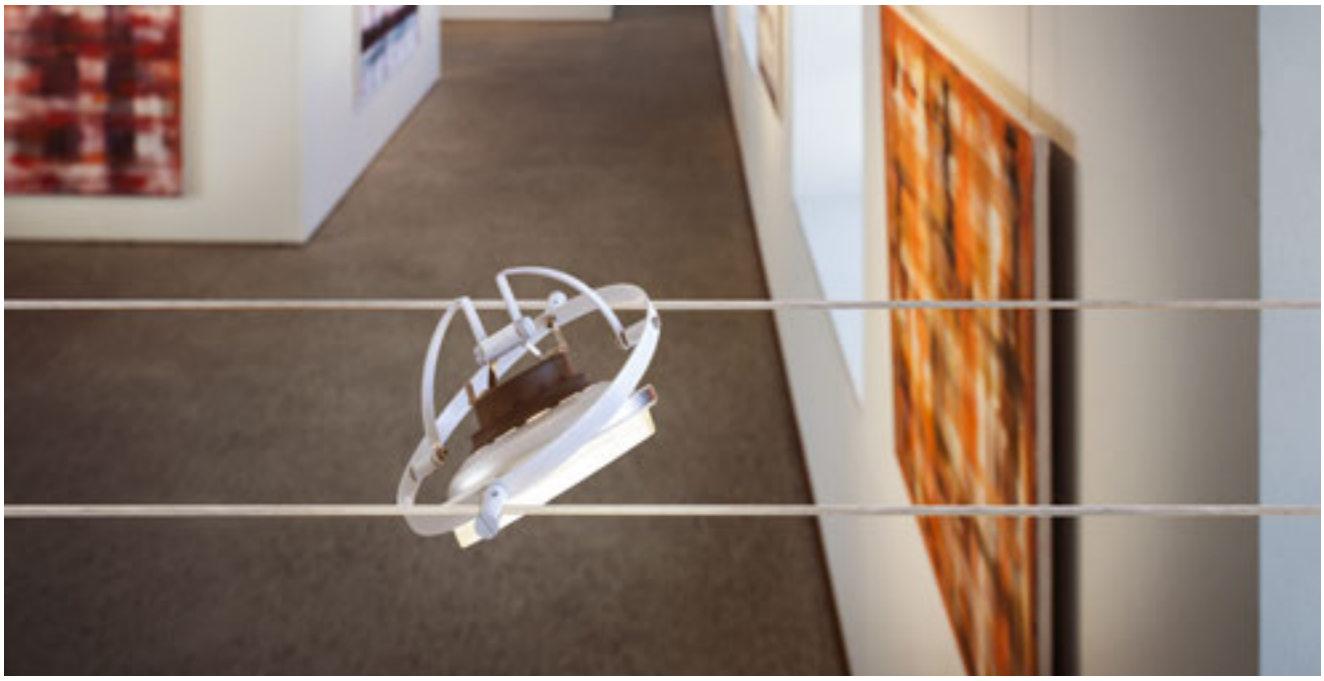




TENSEO Transformer | 12V AC
50VA conventional | steel/brass
H: 11 cm diameter: 11.1 cm

	Prod. no.
black	**1002691**
white	**1002692**
chrome	**1002693**



TENSEO Transformer | 12V AC
105VA conventional | steel/brass
H: 11 cm diameter: 11.1 cm

	Prod. no.
white	**138981**
chrome	**138982**




TENSEO Transformer | 12V AC
210VA conventional | steel/brass
H: 11 cm diameter: 11.1 cm

	Prod. no.
white	**138991**
chrome	**138992**



Cord tightener
25A max. | brass
H: 11 cm diameter: 1 cm

	Prod. no.
black	**181530**
white	**181531**
chrome	**181532**



Wall bracket
Steel/brass
L: 3 cm diameter: 5 cm

	Prod. no.
black	**186300**
white	**186301**
chrome	**186302**




Ceiling bracket
Steel/brass
H: 6 cm diameter: 5 cm

	Prod. no.
black	**186330**
white	**186331**
chrome	**186332**



Ceiling bracket
Steel/brass
H: 16 cm diameter: 5 cm

	Prod. no.
black	**186340**
white	**186341**
chrome	**186342**



Wall/ceiling bracket, flexible
Steel/brass
H: 11.5 cm diameter: 5 cm

	Prod. no.
black	**186310**
white	**186311**
chrome	**186312**



Redirector
Steel/brass
H: 16 cm diameter: 5 cm

	Prod. no.
black	**186640**
white	**186641**
chrome	**186642**



Feed-in
25A max. | brass
H: 1.8 cm diameter: 1 cm

	Prod. no.
black	**186350**
white	**186351**
chrome	**186352**



Insulating connector
25A max. | aluminium/plastic
L: 6.4 cm diameter: 1 cm

	Prod. no.
black	**186360**
white	**186361**
chrome	**186362**




Spacer TENSEO
Aluminium
H: 9 cm diameter: 1.25 cm

	Prod. no.
black	**1002700**
white	**1002701**
chrome	**1002702**



Electrical spacer
25A max. | brass
H: 9 cm diameter: 1.25 cm

	Prod. no.
black	**1002703**
white	**1002704**
chrome	**1002705**




Cable suspension set
Steel/aluminium
W: 18.6 cm diameter: 1.25 cm L: 2000 cm

	Prod. no.
black	**1002697**
white	**1002698**
chrome	**1002699**


ASMARA
LV, QR-C51







SOCKET INSIDE <35 W



IP 20 90°

12V ~50Hz
Material: stainless steel

GX5.3 <35W

LED GU5.3 | 5.5W | 36°
2700K | 450lm | EEK=G
7kWh/1000h



Prod. no. 1001574


Options	Prod. no.
1xGX5,3 black	**139070**
1xGX5,3 white	**139071**
1xGX5,3 chrome	**139072**

TELESKOP
LV, QR-C51





SOCKET INSIDE <20 W



IP 20 90°

12V ~50Hz
Material: steel/brass

- Telescopic fitting adjustable from 21-51cm


GX5.3 <20W


LED GU5.3 | 5.5W | 36°
3000K | 450lm | EEK=G
7kWh/1000h




Prod. no. 1001575

Options	Prod. no.
1xGX5,3 black	**139080**
1xGX5,3 white	**139081**
1xGX5,3 chrome	**139082**

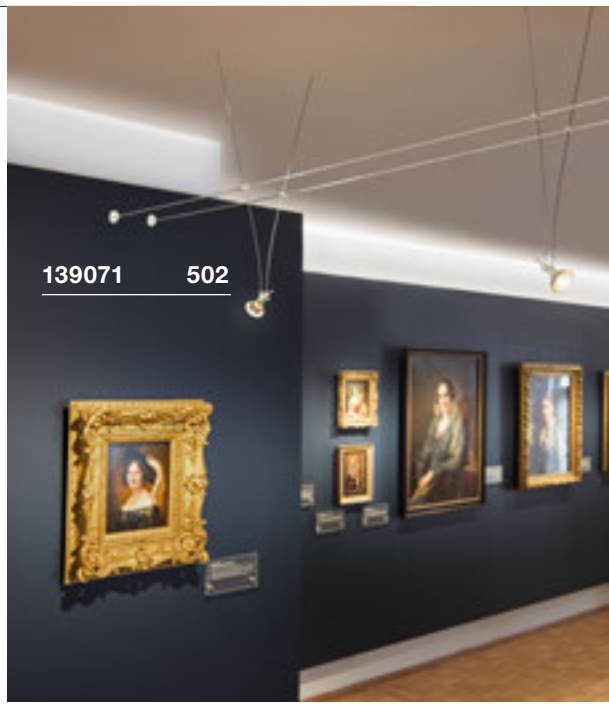

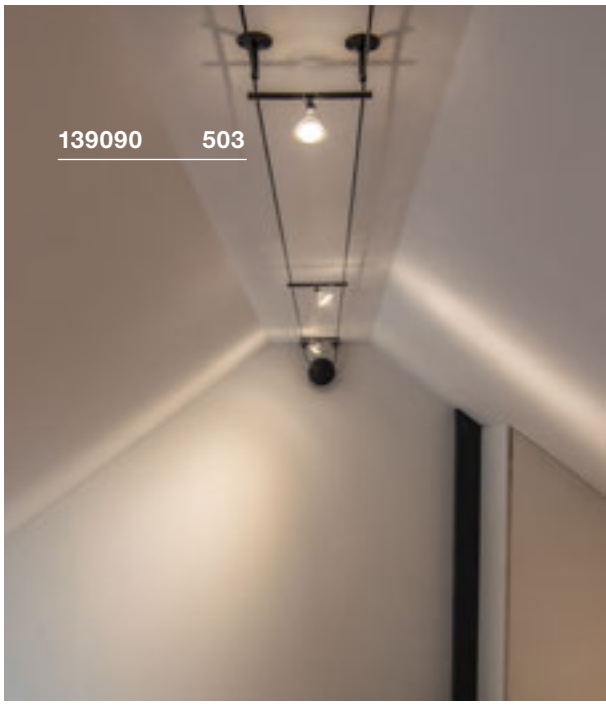


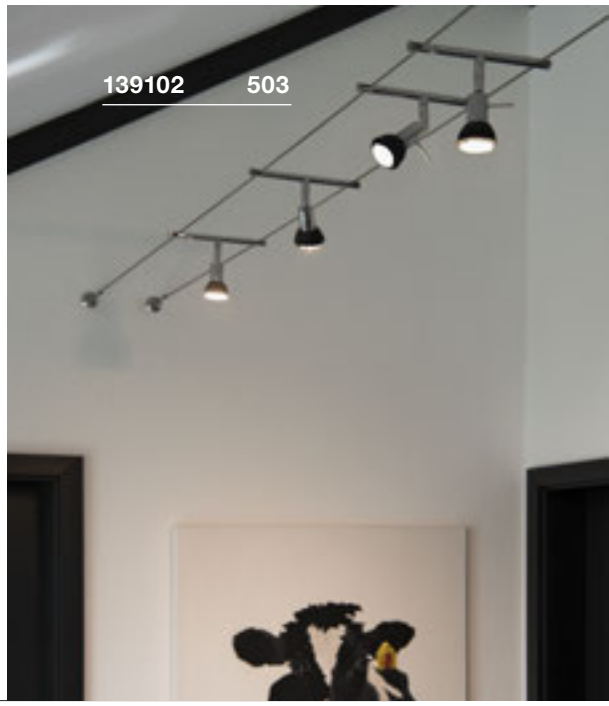

COSMIC
LV, QR-C51



SOCKET INSIDE <35 W



IP 20 90°

12V ~50Hz
Material: steel/brass

• Lightbulb not included

GX5.3 <35W

LED GU5.3 | 5.5W | 36°
2700K | 450lm | EEK=G
7kWh/1000h



Prod. no. 1001574

Options	Prod. no.
1xGX5,3 black	**139090**
1xGX5,3 white	**139091**
1xGX5,3 chrome	**139092**


SYROS
LV, QR-C51







SOCKET INSIDE <50 W



IP 20 350° 90°

12V ~50Hz
Material: steel/brass

GX5.3 <35W

LED GU5.3 | 5.5W | 36°
3000K | 450lm | EEK=G
7kWh/1000h



Prod. no. 1001575

Options	Prod. no.
1xGX5,3 black	**139100**
1xGX5,3 white	**139101**
1xGX5,3 chrome	**139102**


SALUNA
LV, QR-C51







SOCKET INSIDE <35 W



IP 20 350° 90°

12V ~50Hz
Material: steel/brass

GX5.3 <35W

LED GU5.3 | 5.5W | 36°
2700K | 450lm | EEK=G
7kWh/1000h



Prod. no. 1001574

Options	Prod. no.
1xGX5,3 black	**139130**
1xGX5,3 white	**139131**
1xGX5,3 chrome	**139132**


ORBIT
LV, QR111







SOCKET INSIDE <50 W



IP 20

12V ~50Hz
Material: steel

G53 <50W

LED G53 | 15W | 40°
2700K | 800lm | EEK=G
17kWh/1000h



Prod. no. 560232

Options	Prod. no.
1xG53	
black	**139110**
1xG53	
white	**139111**
1xG53	
chrome	**139112**


DURNO







360lm
LED INSIDE
2700K
CRI 80



120° L70B50 40°

12V ~50Hz
Total wattage: 6W
Material: aluminium/stainless steel

1002861, 1002862, 1002863	360lm 2700K	A→G



Options	Prod. no.
360lm | 2700K | CRI80	
black	**1002861**
360lm | 2700K | CRI80	
white	**1002862**
360lm | 2700K | CRI80	
polished chrome/ polished stainless steel	**1002863**








PLYTTA











750lm
|
LED INSIDE
|
2700K
CRI 80





120° L70B50

12V ~50Hz
Total wattage: 9.8W
Material: plastic/aluminium

		A→G
1002864, 1002865, 1002866	750lm 2700K	D

Options	Prod. no.
750lm | 2700K | CRI80	
black	**1002864**
750lm | 2700K | CRI90	
white	**1002865**
750lm | 2700K | CRI90	
chrome	**1002866**


NOBLO SPOT
LV, Rope Track







420|450lm
LED INSIDE
2700K
CRI 80



IP 20 | 36° | L70B50 | 340° | 90° | LED

12V ~50Hz
Total wattage: 8.5W
Material: aluminium/poly (methyl methacrylate) (PMMA)

1002694, 1002695, 1002696	420lm | 450lm 2700K	A→G F

Options	Prod. no.
420lm | 2700K | CRI80	
black	**1002694**
450lm | 2700K | CRI80	
white	**1002695**
450lm | 2700K | CRI80	
chrome	**1002696**

COMET LED
LV










410lm
LED INSIDE
2700K
CRI 80



IP 20 | 120° | L70B50 | LED

12V ~50Hz
Total wattage: 6.6W
Material: aluminium/glass

1002688, 1002689, 1002690	410lm 2700K	A→G F

Options	Prod. no.
410lm | 2700K | CRI80	
black/frosted	**1002688**
410lm | 2700K | CRI80	
white/frosted	**1002689**
410lm | 2700K | CRI80	
chrome/frosted	**1002690**

COMET
LV, QR-C51










SOCKET INSIDE <50 W



IP 20

12V ~50Hz
Material: brass/brass


GU5.3 <50W

LED GU5.3 | 5.5W | 36°
2700K | 450lm | EEK=G
7kWh/1000h



Prod. no. 1001574


Options	Prod. no.
1xGU5,3	
black	**139120**
1xGU5,3	
white	**139121**
1xGU5,3	
chrome	**139122**

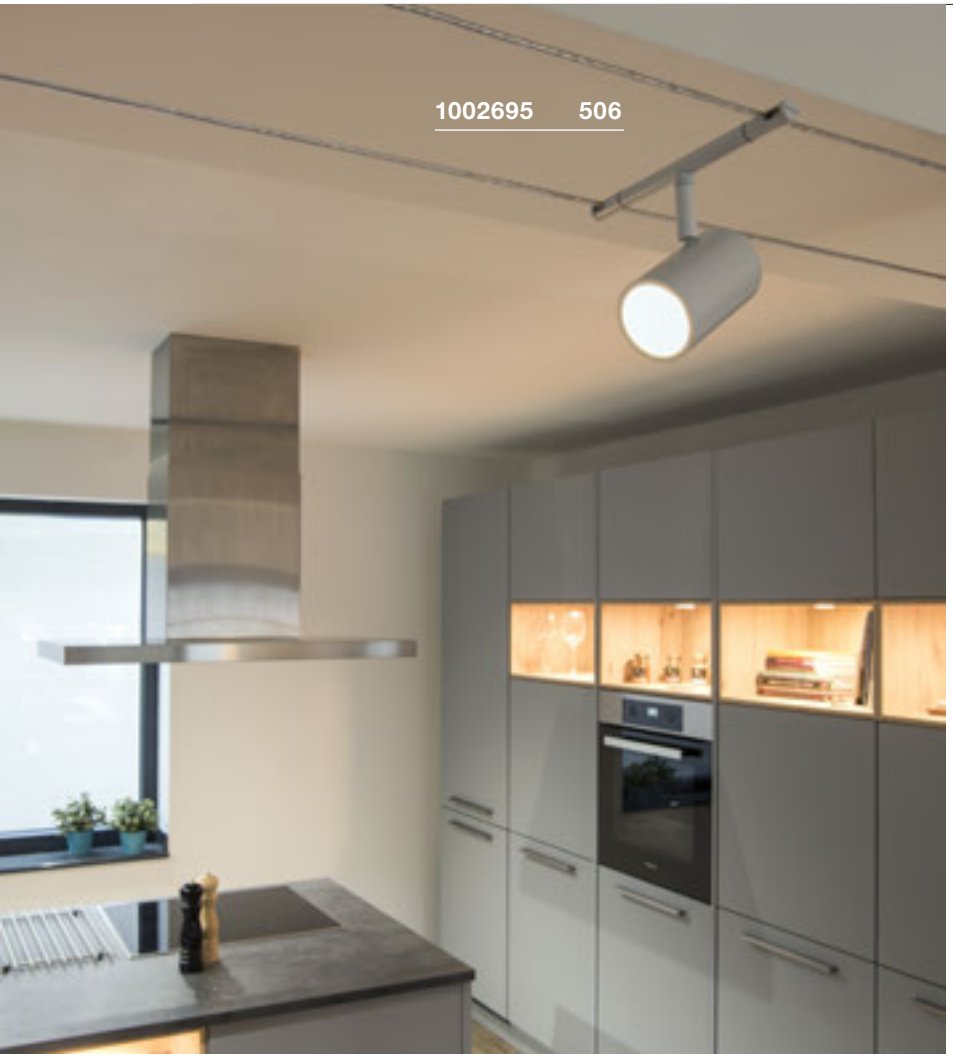

1002695 506



1002690 506

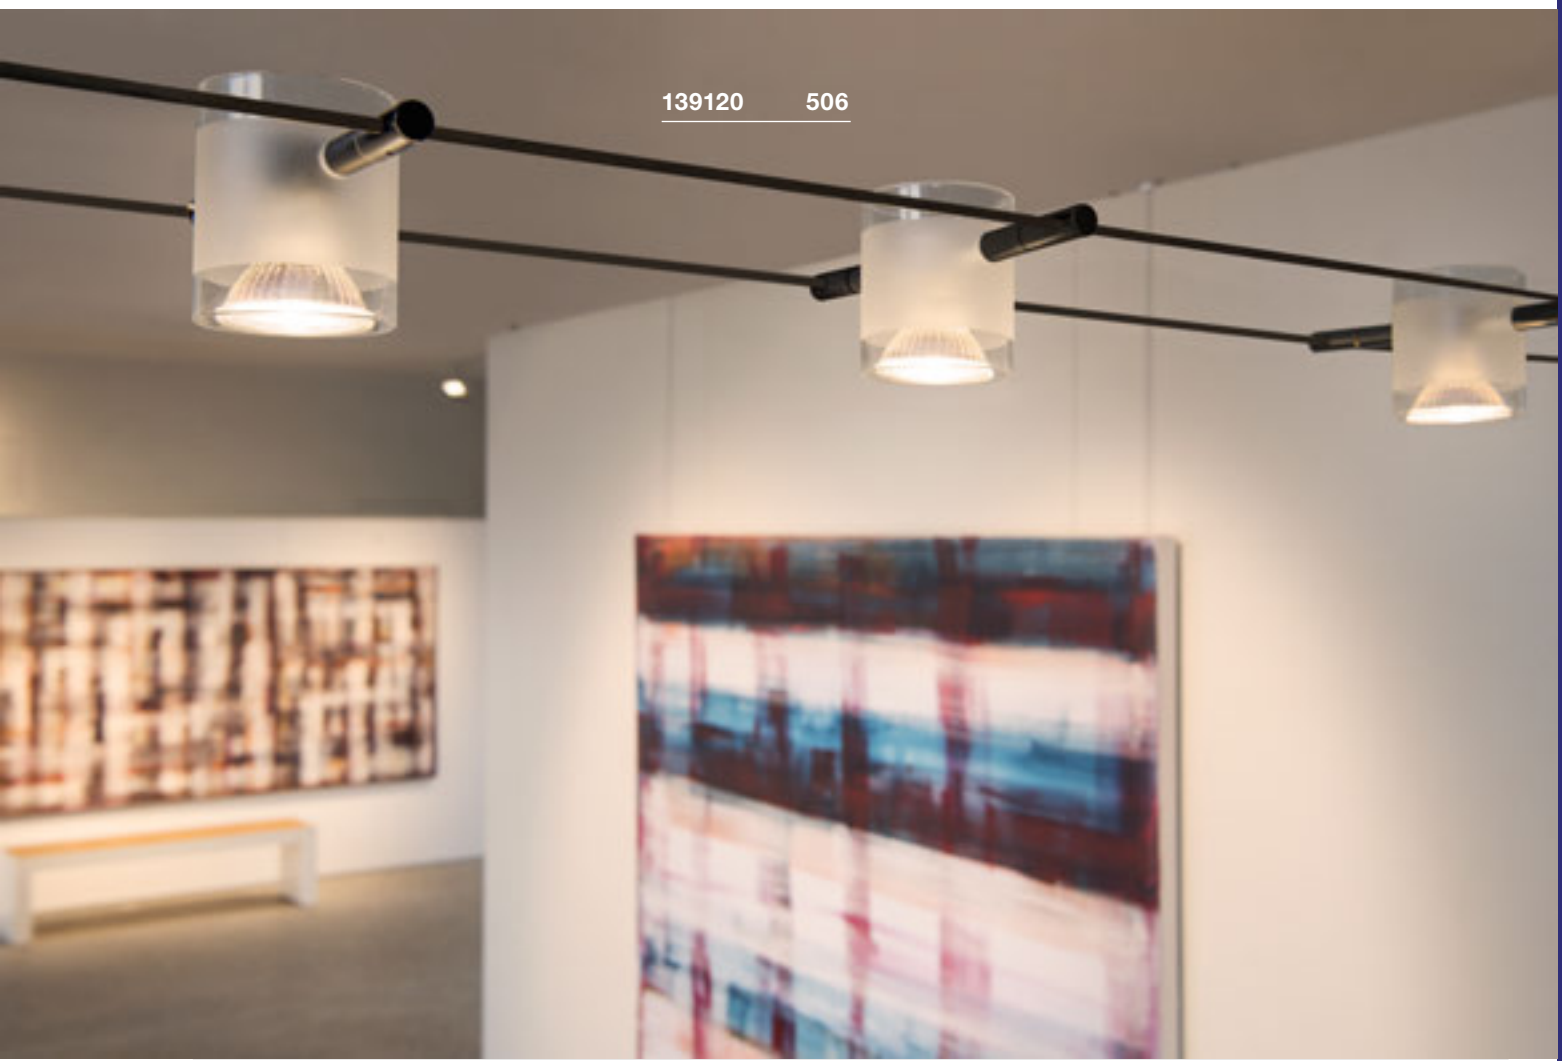


139120 506

SHOW THE WAY.

MOBILE LIGHTS AND FLOOR LIGHTS.

Fumbling around in the dark is now a thing of the past: mobile lights and floor lights are a popular design feature for outdoor areas, showing people the way and keeping them safe. Our outdoor lights owe their unique appearance to their high-quality materials, modern shapes and innovative technologies.

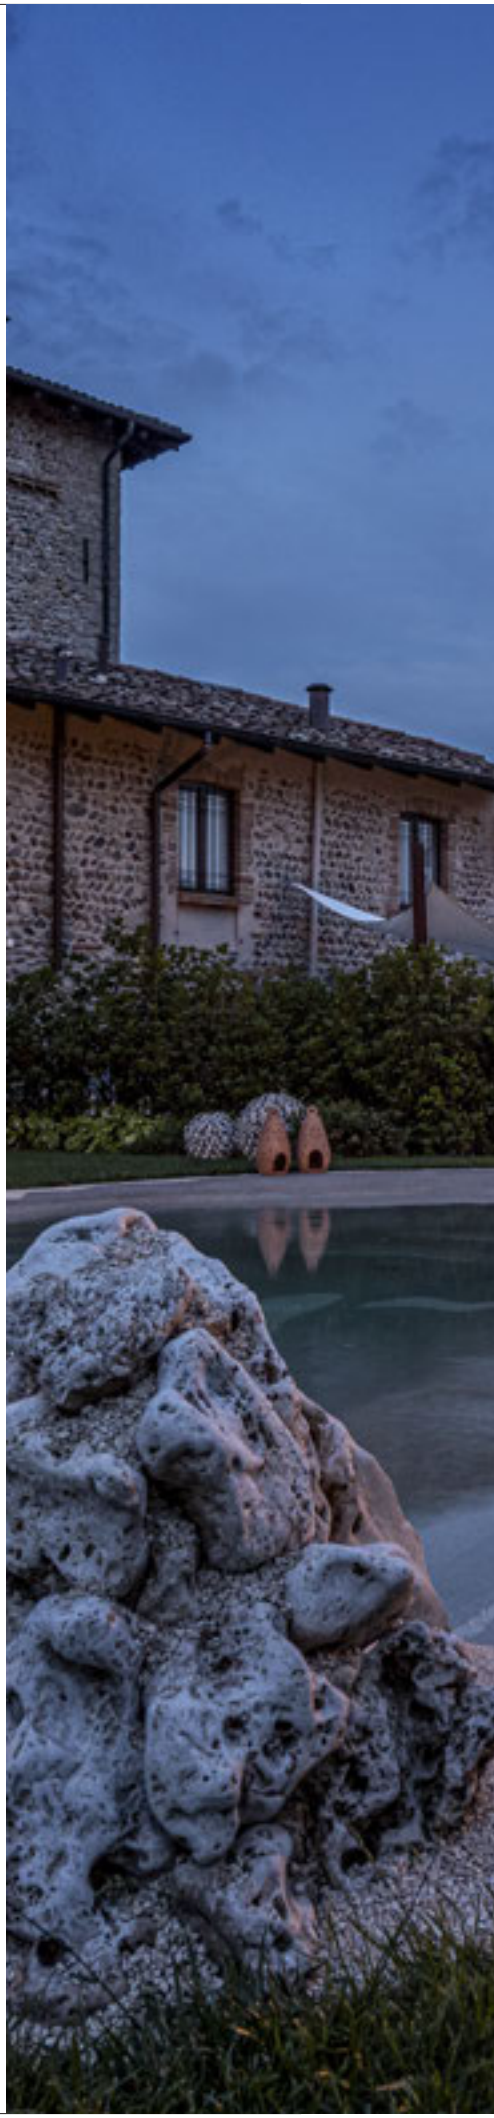


1006184 521



1001823 527

MOBILE LIGHTS AND FLOOR LIGHTS



You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the 'Lamps' chapter, starting on page 808

ESKINA FRAME 45
Pole, single








1100lm / 1200lm

INSIDE CRI 80

3000K / 4000K



IP 65 | 95° | L70B50 | 320°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

Spot	1100/1200lm 3000/4000K	A→G D

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1100/1200lm | 3000/4000K | CRI80	
anthracite	**1004749**

ESKINA FRAME 75
Pole, single








1100lm / 1200lm

INSIDE CRI 80

3000K / 4000K



IP 65 | 95° | L70B50 | 320°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium

Spot	1100/1200lm 3000/4000K	A→G D

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1100/1200lm | 3000/4000K | CRI80	
anthracite	**1004750**

ESKINA FRAME 75
Pole, double








2200lm / 2400lm

INSIDE CRI 80

3000K / 4000K



IP 65 | 95° | 95° | L70B50 | 320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

Spot 1/Spot 2	1100/1200lm 3000/4000K	A→G D

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
Spot 1: 1100/1200lm | 3000/4000K | CRI80	
Spot 2: 1100/1200lm | 3000/4000K | CRI80	
anthracite	**1004751**


1004751 512

ESKINA FRAME 125
Pole, double


NEW


CCT















220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

Spot 1/Spot 2	1100/1200lm 3000/4000K	A→G A↑G D

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
Spot 1: 1100/1200lm | 3000/4000K | CRI80 Spot 2: 1100/1200lm | 3000/4000K | CRI80	
anthracite	**1005439**

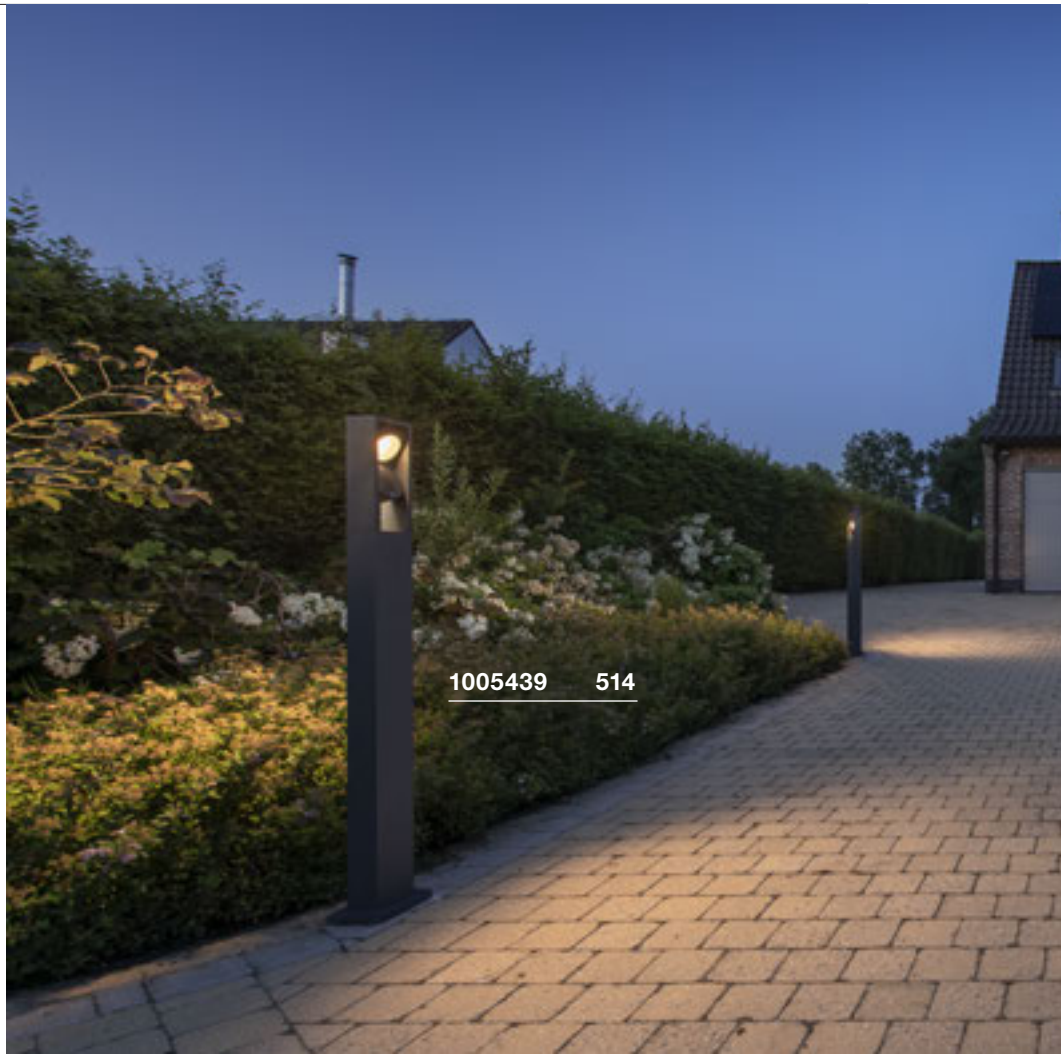








ESKINA FRAME 175

Pole, double

NEW

CCT








2200lm / 2400lm

LED INSIDE

CRI 80

3000K / 4000K



IP 65 | 95° | 95° | L70B50 | 320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium

		A→G
Spot 1/Spot 2	1100/1200lm 3000/4000K	D

■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
Spot 1: 1100/1200lm | 3000/4000K | CRI80 Spot 2: 1100/1200lm | 3000/4000K | CRI80	
■ anthracite	**1005440**

ESKINA 30
Pole








1000lm / 1000lm

INSIDE CRI 80

3000K / 4000K



IP 65 | IK04 | 95° | L70B50 | 340° | 105° | 150 | LED

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

• IP44 safety plug

1002906	1000lm 3000/4000K	A→G E

Ground spike
Prod. no. 230060

Options	Prod. no.
1000lm | 3000/4000K | CRI80	
anthracite	**1002906**

ESKINA 80
Pole








1000lm / 1000lm

INSIDE CRI 80

3000K / 4000K



IP 65 | IK02 | 95° | L70B50 | 340° | 105° | LED


220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium


1002907	1000lm 3000/4000K	A→G E


Ground spike
Prod. no. 230060

Options	Prod. no.
1000lm | 3000/4000K | CRI80	
anthracite	**1002907**



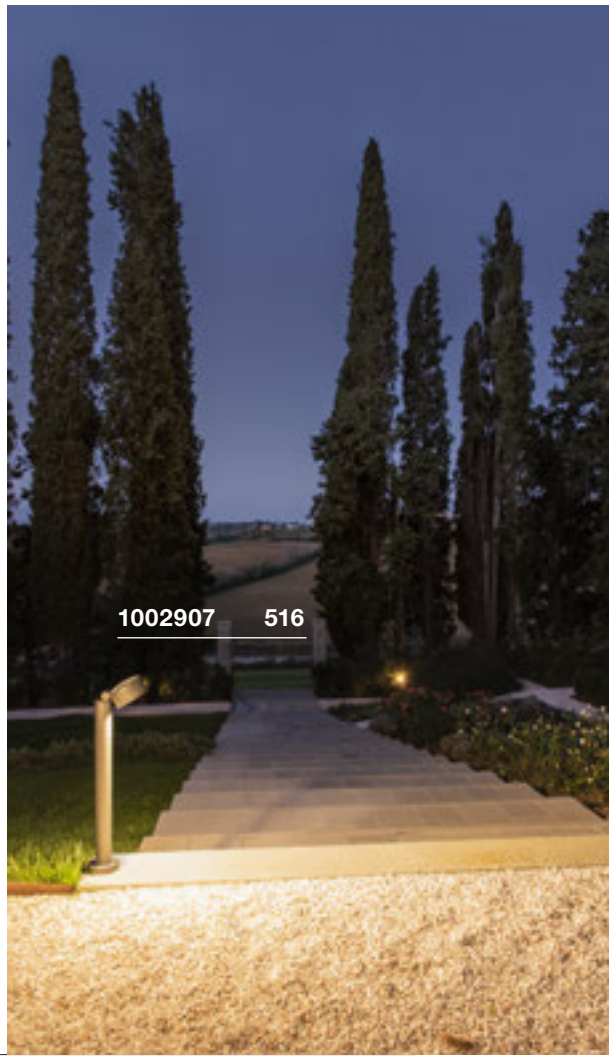

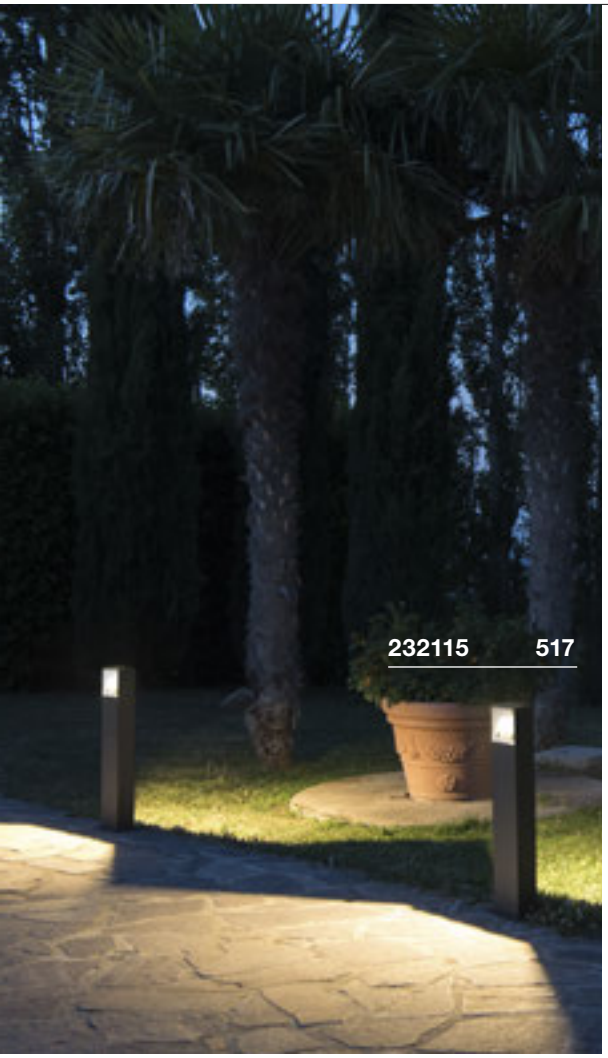

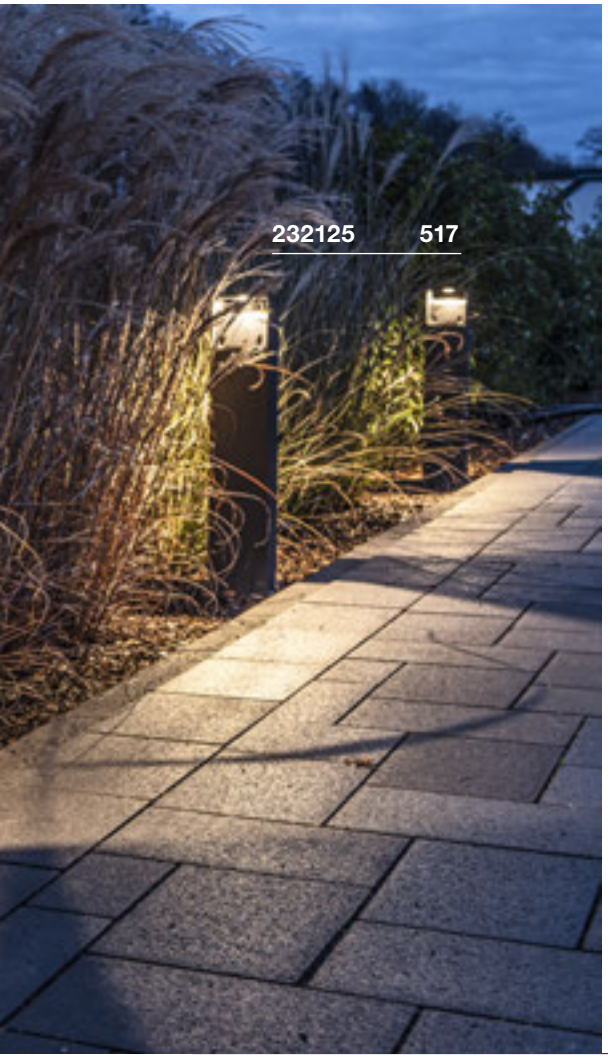


LOGS 40
Pole





570lm
INSIDE
CRI 80
3000K



IP 44 L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium


232115	570lm 3000K	A→G A G D

Connection box IP68, 3-pole
Prod. no. 228730
Screw set
Prod. no. 228754
Ground spike
Prod. no. 231230
Concrete anchor
Prod. no. 232119


Options	Prod. no.
570lm | 3000K | CRI80	
anthracite	**232115**

LOGS 70
Pole





570lm
INSIDE
CRI 80
3000K



IP 44 L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 10W
Material: aluminium

232125	570lm 3000K	A→G A G D

Connection box IP68, 3-pole
Prod. no. 228730
Screw set
Prod. no. 228754
Ground spike
Prod. no. 231230
Concrete anchor
Prod. no. 232119


Options	Prod. no.
570lm | 3000K | CRI80	
anthracite	**232125**

GRAFIT 30
Pole, round, E27

NEW



SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 7.5W | 320°
2700K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005304

■ Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
1xE27	
■ anthracite	**1006180**

GRAFIT 60
Pole, round, E27

NEW



SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005303

■ Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
1xE27	
■ anthracite	**1006181**

GRAFIT 90
Pole, round, E27

NEW



SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1xE27	
■ anthracite	**1006182**


1006180 518



1006181 518


231225 521

GRAFIT 30
Pole, E27



SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/plastic

• Open cable end

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290


- Connection box IP68, 3-pole **Prod. no. 228730**
- Screw set **Prod. no. 228754**
- Ground spike **Prod. no. 231230**

Options	Prod. no.
1xE27	
anthracite	**231215**

GRAFIT 60
Pole, E27



SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/plastic

• Open cable end

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

- Connection box IP68, 3-pole **Prod. no. 228730**
- Screw set **Prod. no. 228754**
- Ground spike **Prod. no. 231230**


Options	Prod. no.
1xE27	
anthracite	**231225**

GRAFIT 90
Pole, E27

NEW



SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

• Open cable end

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

- Connection box IP68, 3-pole **Prod. no. 228730**
- Screw set **Prod. no. 228754**
- Ground spike **Prod. no. 231230**

Options	Prod. no.
1xE27	
anthracite	**1006184**

QUADRULO
FL


NEW







340lm
|
INSIDE — CRI 80
|
3000K



IP 55 | IK04 | L70B50 | 10

100-277V ~50/60Hz | 480mA
Total wattage: 7W
Material: aluminium/acrylic

- IP connection box


1005442	340lm 3000K	A→G A↑G E

Options	Prod. no.	
340lm | 3000K | CRI80		
anthracite/white	1005442	






1005442 522

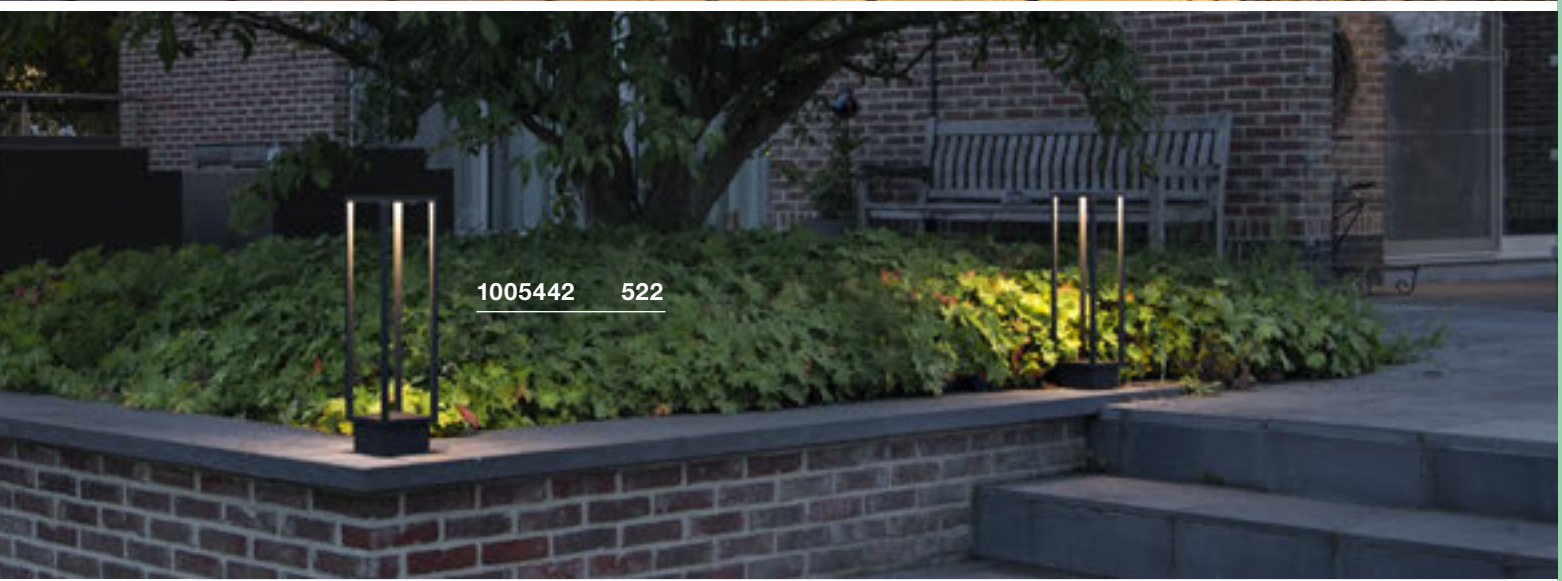

1005442 522

RUSTY® SLOT 50
Pole





30lm
LED INSIDE
CRI 80
3000K



IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonte (PC)

• Open cable end

233447	30lm 3000K	A→G E

■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 231230


Options	Prod. no.
30lm | 3000K | CRI80	
■ rust	**233447**

RUSTY® SLOT 80
Pole





30lm
LED INSIDE
CRI 80
3000K



IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonte (PC)

• Open cable end

233457	30lm 3000K	A→G E

■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 231230


Options	Prod. no.
30lm | 3000K | CRI80	
■ rust	**233457**

RUSTY® SLOT 50
Pole, E27





SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

• Open cable end

E27 <11W
Diameter: 4.8 cm L: 13.9 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 231230


Options	Prod. no.
1xE27	
■ rust	**229410**

RUSTY® SLOT 80
Pole, E27





SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

- Open cable end

E27 <11W
Diameter: 4.8 cm L: 13.9 cm


LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289


■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 231230

Options	Prod. no.
1xE27	
■ rust	**229411**

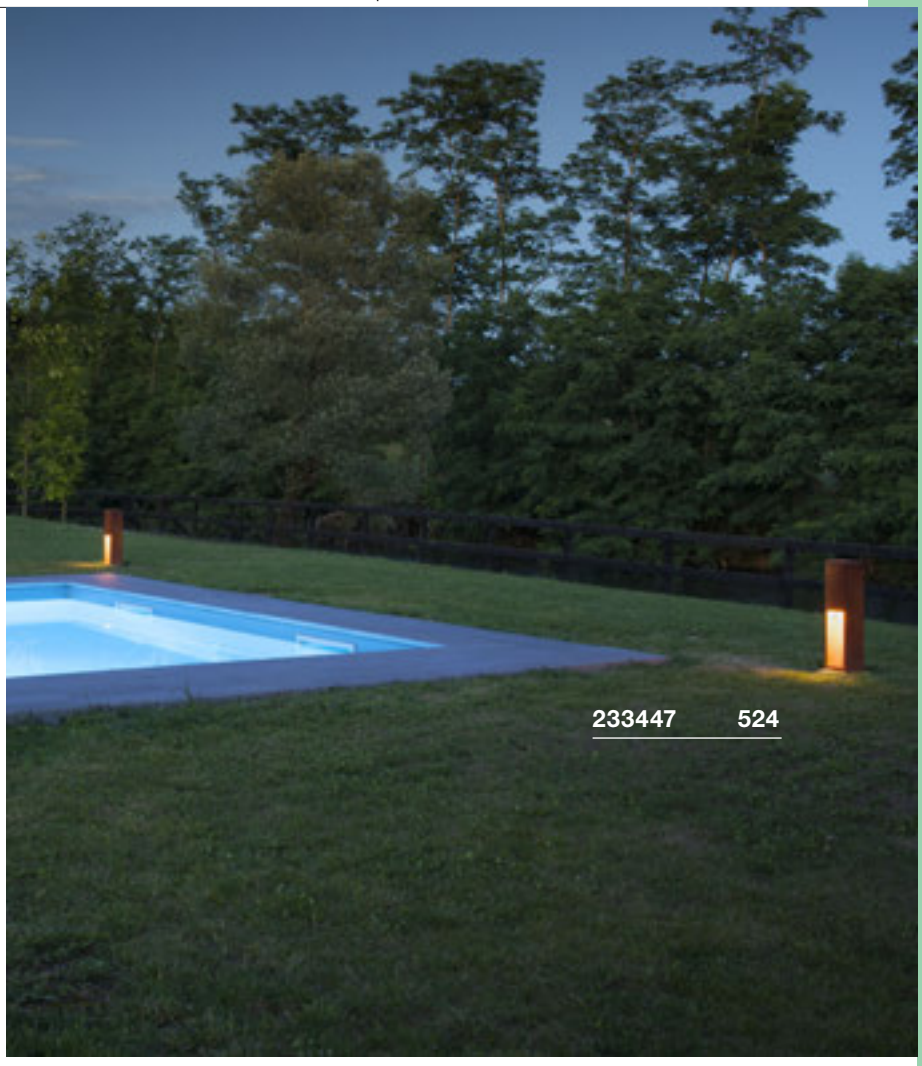



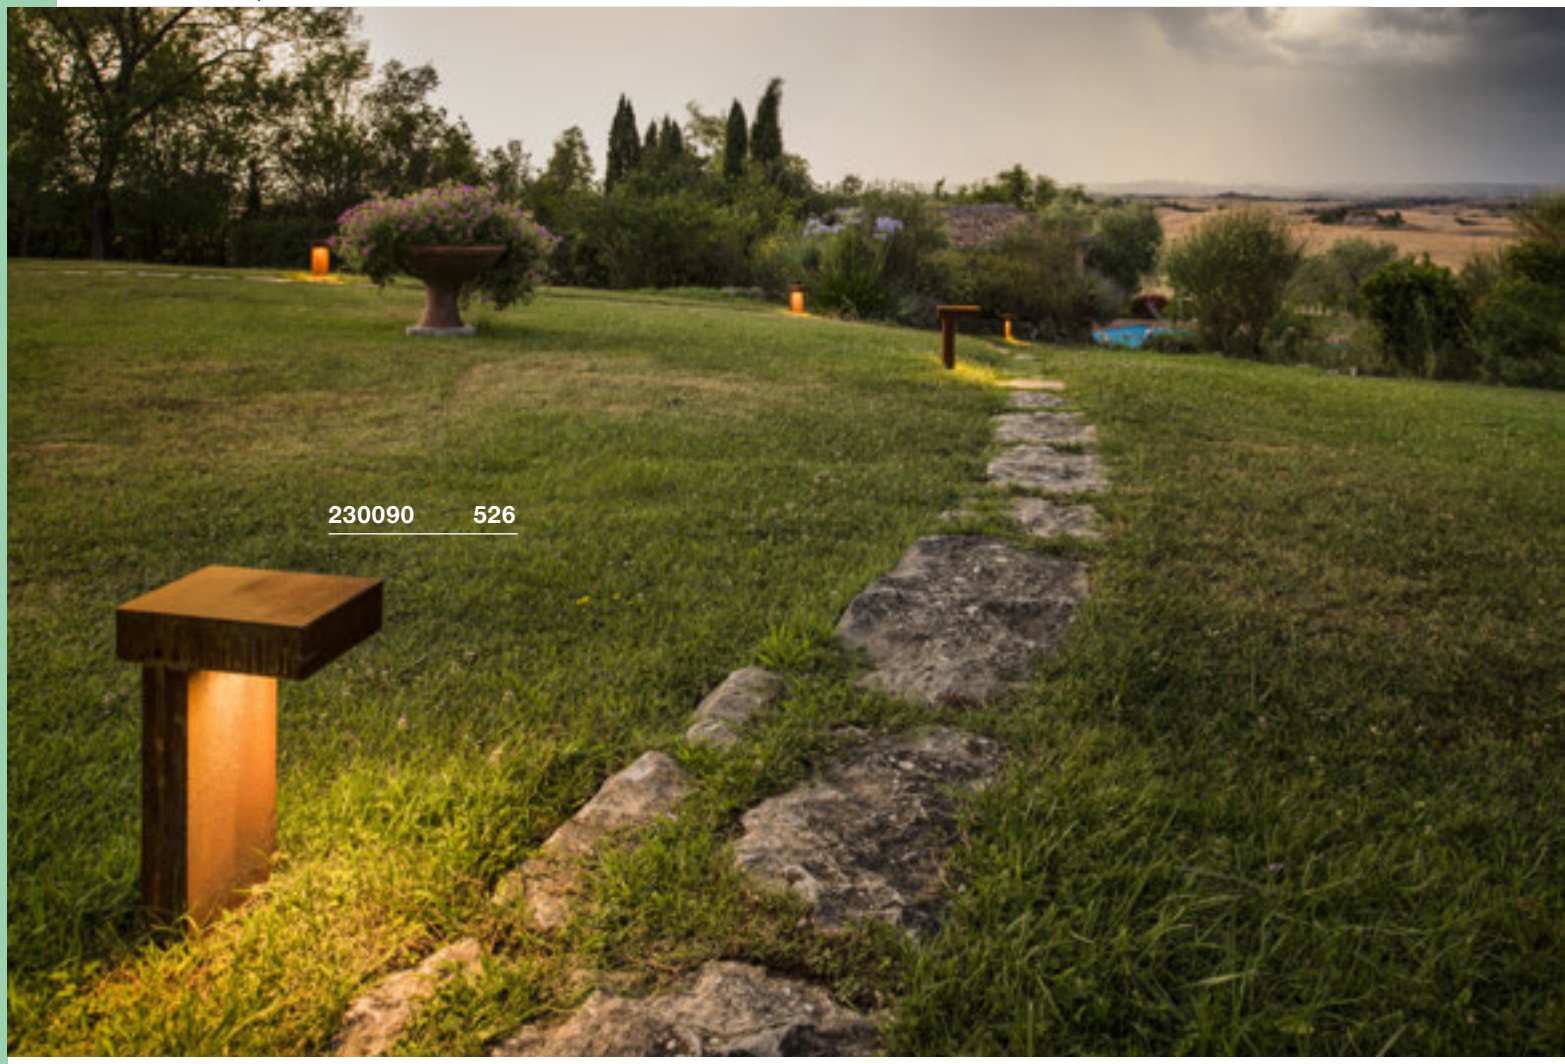

230090 526



1001823 527


RUSTY® PATHLIGHT 40
Pole







400lm
3000K
CRI 80



IP 55 IK06 90° L70B50 20

220-240V ~50/60Hz
Total wattage: 8.9W
Material: FeCSi steel/polycarbonte (PC)

• Open cable end

1001823	400lm 3000K	A→G A↑G F

Connection box IP68, 3-pole
Prod. no. 228730
Ground spike
Prod. no. 229422

Options	Prod. no.
400lm | 3000K | CRI80	
rust	**1001823**


RUSTY® PATHLIGHT 70
Pole







400lm
3000K
CRI 80



IP 55 IK06 90° L70B50 20

220-240V ~50/60Hz
Total wattage: 8.9W
Material: FeCSi steel/polycarbonte (PC)

• Open cable end

1001824	400lm 3000K	A→G A↑G F

Connection box IP68, 3-pole
Prod. no. 228730
Ground spike
Prod. no. 229422

Options	Prod. no.
400lm | 3000K | CRI80	
rust	**1001824**


RUSTY® PATHLIGHT
Pole, TCR-TSE







SOCKET INSIDE <9 W



IP 44

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

• Open cable end

GX53 <9W
Diameter: 7.5 cm L: 2.7 cm

LED GX53 | 6W | 120°
4000K | 550lm | EEK=F
6kWh/1000h

Prod. no. 1005269

Connection box IP68, 3-pole
Prod. no. 228730
Ground spike
Prod. no. 229422


Options	Prod. no.
1xGX53	
rust	**230090**

RUSTY® 40
Pole





90lm
INSIDE CRI 80
3000K



IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonte (PC)

• Open cable end

233427	90lm 3000K	A→G E

■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 229422


Options	Prod. no.
90lm | 3000K | CRI80	
■ rust	**233427**

RUSTY® 70
Pole





90lm
INSIDE CRI 80
3000K



IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonte (PC)


• Open cable end

233437	90lm 3000K	A→G E


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 229422

Options	Prod. no.
90lm | 3000K | CRI80	
■ rust	**233437**



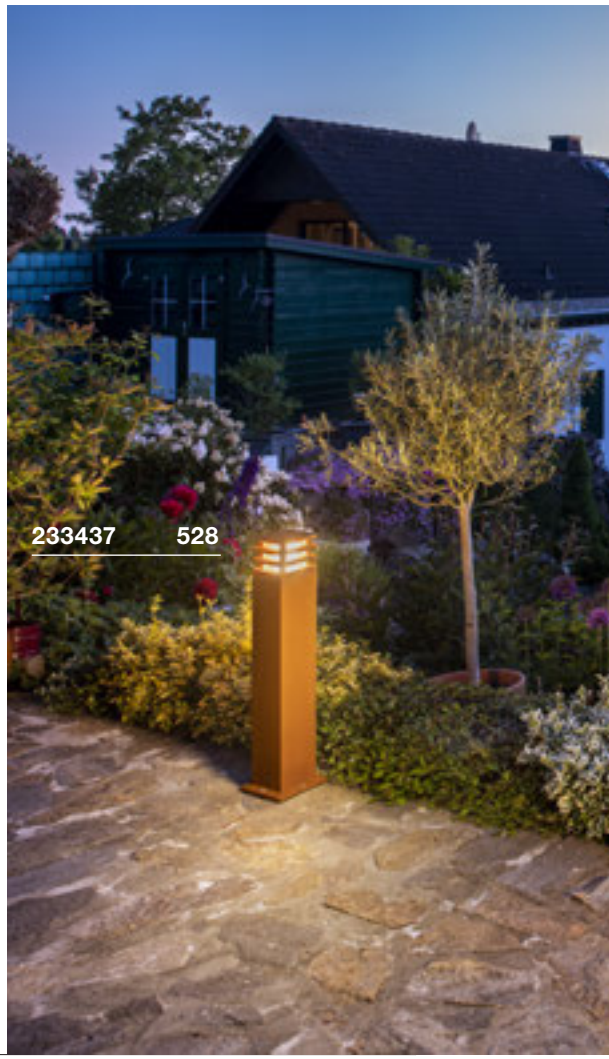



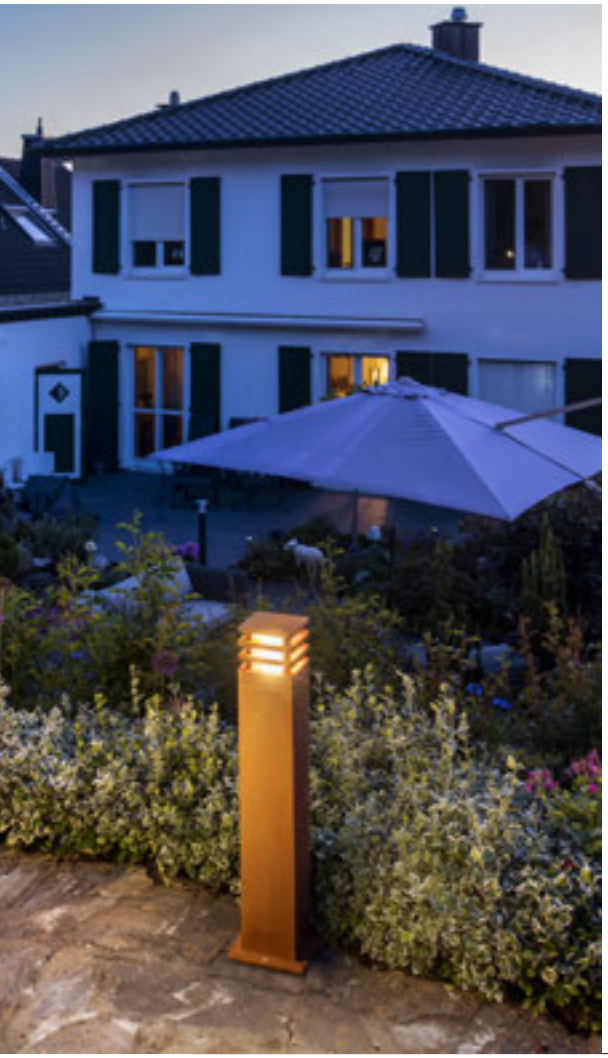


RUSTY® 40
Pole, E27





SOCKET INSIDE <11 W



IP 55

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

- Open cable end

E27 <11W
Diameter: 4.8 cm L: 13.9 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 229422


Options	Prod. no.
1xE27	
■ rust	**229420**

RUSTY® 70
Pole, E27





SOCKET INSIDE <11 W



IP 55

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

- Open cable end

E27 <11W
Diameter: 4.8 cm L: 13.9 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290

■ Connection box IP68, 3-pole
Prod. no. 228730


■ Ground spike
Prod. no. 229422

Options	Prod. no.
1xE27	
■ rust	**229421**

RUSTY® CONE 24
FL, E14



SOCKET INSIDE <40 W



IP 54

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

E14 <40W
Diameter: 4.8 cm L: 13.9 cm

LED E14 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h


Prod. no. 1005285

Options	Prod. no.
1xE14	
rust	**229430**

RUSTY® CONE 40
Pole, E27



SOCKET INSIDE <11 W



IP 54

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

E27 <11W
Diameter: 4.8 cm L: 13.9 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Connection box IP68, 3-pole
Prod. no. 228730


Ground spike
Prod. no. 229423

Options	Prod. no.
1xE27	
rust	**229431**

RUSTY® CONE 70
Pole, E27



SOCKET INSIDE <11 W



IP 54

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

E27 <11W
Diameter: 4.8 cm L: 13.9 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290

Connection box IP68, 3-pole
Prod. no. 228730

Ground spike
Prod. no. 229423


Options	Prod. no.
1xE27	
rust	**229432**


229431 530
229432 530
229430 530

RUSTY® 40
Pole





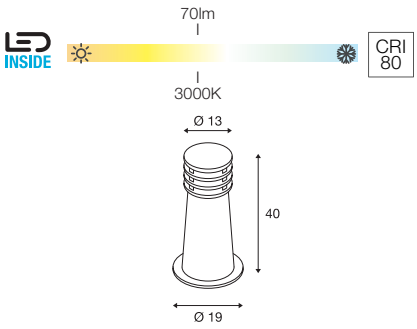

IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonte (PC)

- Open cable end
- Every light is a unique one-off piece

233407	70lm 3000K	A→G E


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 229022

Options	Prod. no.
70lm | 3000K | CRI80	
■ rust	**233407**

RUSTY® 70
Pole





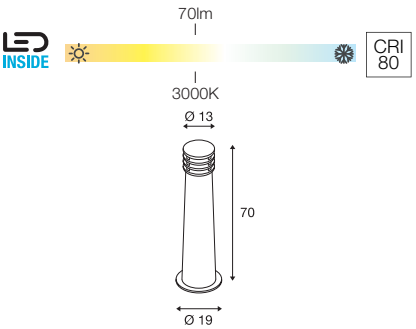

IP 55 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: FeCSi steel/polycarbonte (PC)

- Open cable end
- Every light is a unique one-off piece


233417	70lm 3000K	A→G E

■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 229022

Options	Prod. no.
70lm | 3000K | CRI80	
■ rust	**233417**





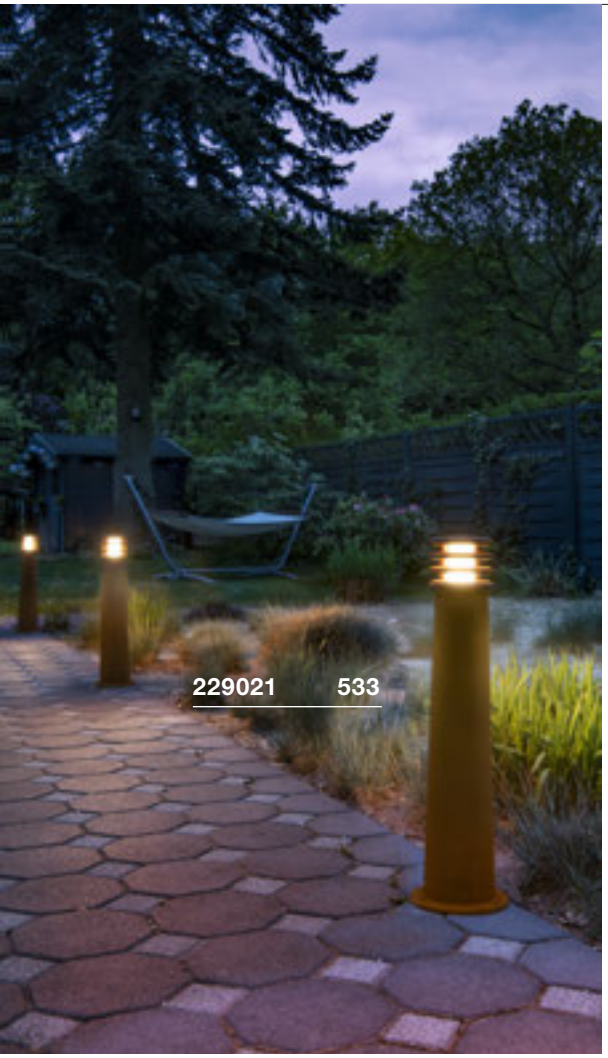




RUSTY® 40
Pole, E27



SOCKET INSIDE <11 W



IP 55

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

- Open cable end
- Every light is a unique one-off piece

E27 <11W
Diameter: 4.8 cm L: 13.9 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 229022

Options	Prod. no.
1xE27	
■ rust	**229020**

RUSTY® 70
Pole, E27



SOCKET INSIDE <11 W



IP 55

220-240V ~50/60Hz
Material: FeCSi steel/polycarbonte (PC)

- Open cable end
- Every light is a unique one-off piece

E27 <11W
Diameter: 4.8 cm L: 13.9 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290

■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 229022


Options	Prod. no.
1xE27	
■ rust	**229021**

ARROCK GRANITE 40
Pole, square, E27





SOCKET INSIDE <15 W



IP 44

220-240V ~50/60Hz
Material: granite/304 stainless steel

E27 <15W
Diameter: 5.2 cm L: 11.5 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 229422


Options	Prod. no.
1xE27	
grey	**231410**

ARROCK GRANITE 70
Pole, square, E27





SOCKET INSIDE <15 W



IP 44

220-240V ~50/60Hz
Material: granite/304 stainless steel

E27 <15W
Diameter: 5.2 cm L: 11.5 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290

■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 229422

Options	Prod. no.
1xE27	
grey	**231411**











ARROCK ARC
Pole, QPAR51





SOCKET INSIDE <35 W



IP 44

220-240V ~50/60Hz
Material: granite/304 stainless steel

GU10 <35W
Diameter: 5 cm L: 7.6 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Ground spike
Prod. no. 231233


Options	Prod. no.
1xGU10	
grey	**231420**

ARROCK STONE 50
Pole





330lm
|
INSIDE  CRI 80
|
3000K



IP 55 L70B50

100-240V ~50/60Hz | 700mA
Total wattage: 9W
Material: basalt/304 stainless steel

231370	330lm 3000K	A→G A G F


Ground spike
Prod. no. 231235


Options	Prod. no.
330lm | 3000K | CRI80 grey	**231370**

ARROCK STONE 75
Pole





330lm
|
INSIDE  CRI 80
|
3000K




IP 55 L70B50


100-240V ~50/60Hz | 700mA
Total wattage: 9W
Material: basalt/304 stainless steel

231371	330lm 3000K	A→G A G F

Ground spike
Prod. no. 231235

Options	Prod. no.
330lm | 3000K | CRI80 grey	**231371**

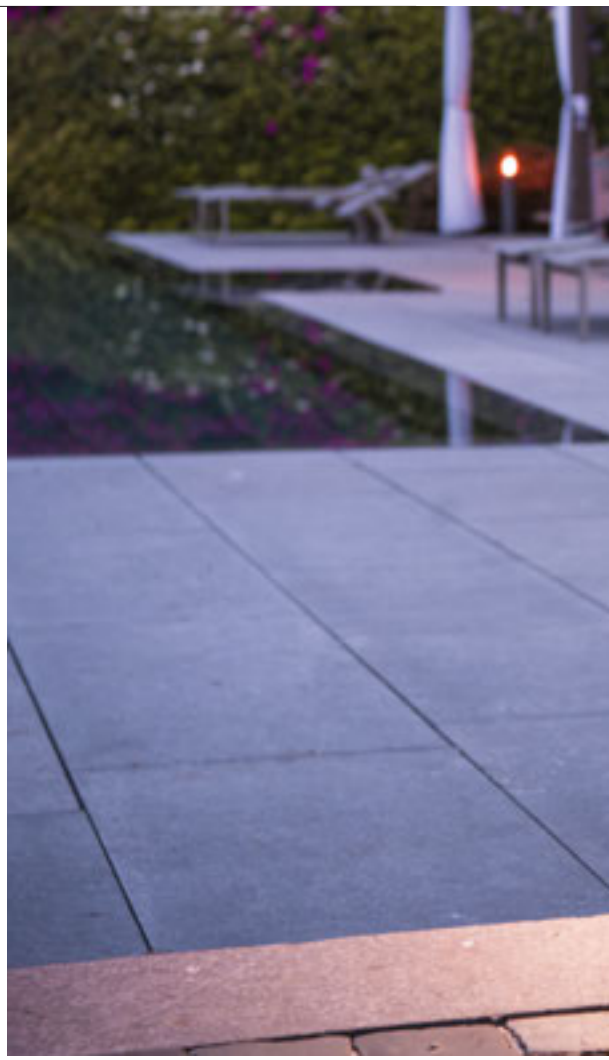

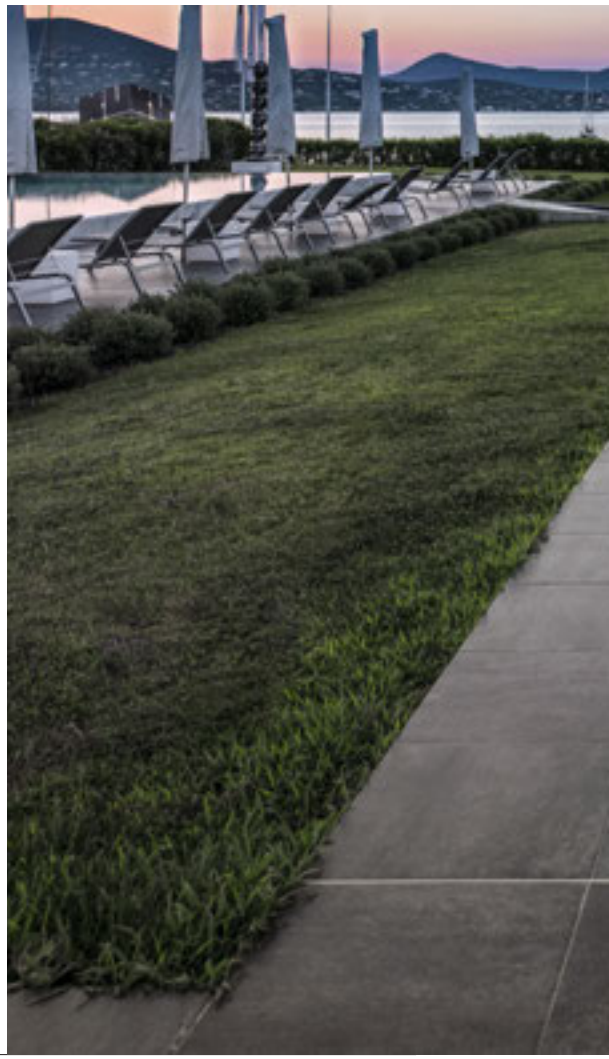







ARROCK SLOT







SOCKET INSIDE <4 W



IP 44

220-240V ~50/60Hz
Material: granite/304 stainless steel

- Open cable end

GU10 <4W

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004973


■ Connection box IP68, 3-pole
Prod. no. 228730

■ Ground spike
Prod. no. 231235


Options	Prod. no.
1xGU10	
grey	**231440**

L-LINE OUT 30
FL, vertical



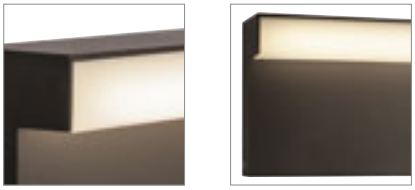

800lm / 810lm
INSIDE
CRI 80
3000K / 4000K



IP 65 IK02 L70B50 20

220-240V ~50/60Hz | 500mA
Total wattage: 11.5W
Material: aluminium/polycarbonate (PC)

- Open cable end
- The light color must be set prior to installation


1003536	800/810lm 3000/4000K	A→G D

Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
800/810lm | 3000/4000K | CRI>80	
anthracite	**1003536**

L-LINE OUT 50
Pole, horizontal



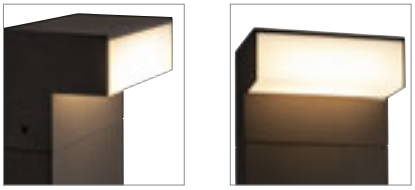

490lm / 530lm
INSIDE
CRI 80
3000K / 4000K



IP 65 IK02 L70B50 20

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

- Open cable end
- The light color must be set prior to installation

1003537	490/530lm 3000/4000K	A→G C

Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
490/530lm | 3000/4000K | CRI>80	
anthracite	**1003537**

L-LINE OUT 60
FL, vertical





780lm / 800lm
INSIDE
CRI 80
3000K / 4000K



IP 65 IK02 L70B50 20

220-240V ~50/60Hz | 500mA
Total wattage: 11.5W
Material: aluminium/polycarbonate (PC)

- Open cable end
- The light color must be set prior to installation

1003535	780/800lm 3000/4000K	A→G D

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
780/800lm | 3000/4000K | CRI80	
anthracite	**1003535**

L-LINE OUT 80
Pole, horizontal








490lm / 530lm

INSIDE

CRI 80

3000K / 4000K



IP 65 IK02 L70B50 20

220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)


- Open cable end
- The light color must be set prior to installation

		A→G
1003538	490/530lm 3000/4000K	A C G

■ Connection box IP68, 3-pole
Prod. no. 228730



Options	Prod. no.
490/530lm | 3000/4000K | CRI>80	
■ anthracite	**1003538**

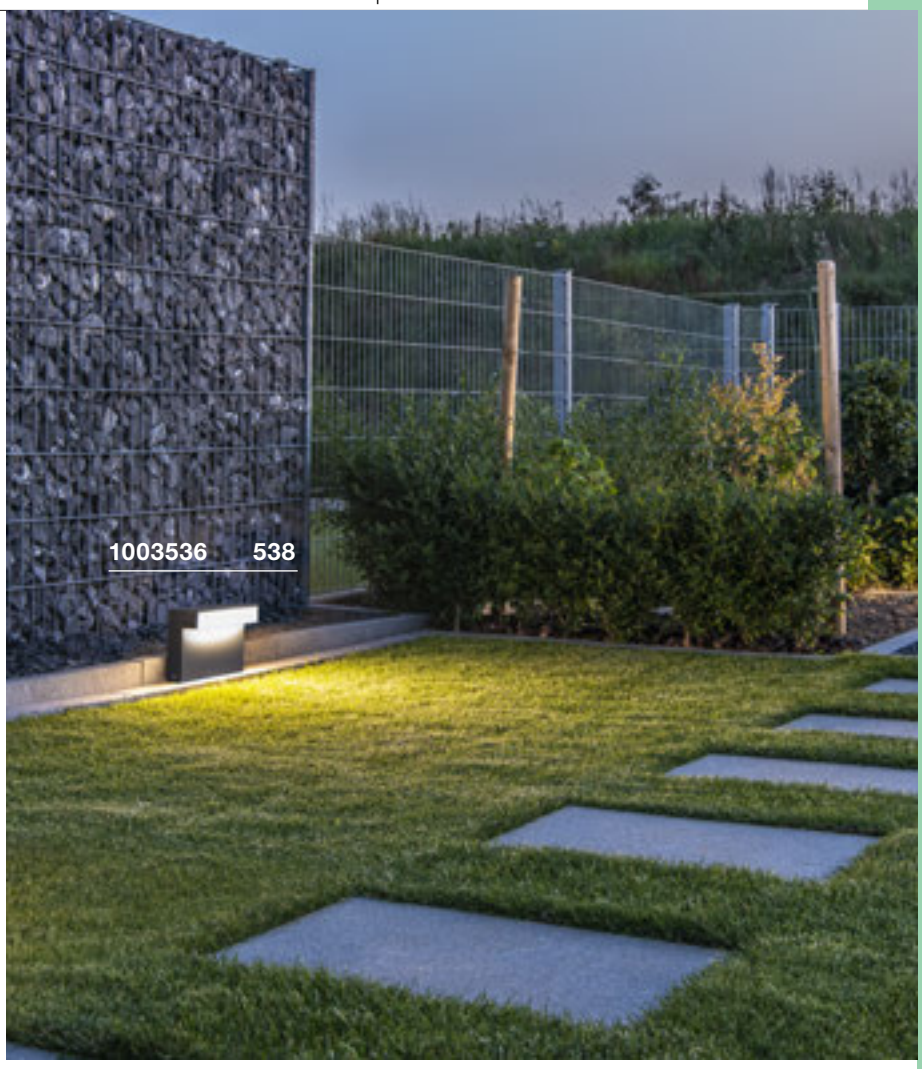




THEO PATHLIGHT
Pole, single







SOCKET INSIDE <7 W



IP 44 IK02 90°

220-240V ~50/60Hz
Material: aluminium

GU10 <7W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004972

■ Connection box IP68, 3-pole
Prod. no. 228730



Options	Prod. no.
1xGU10	
■ anthracite	**1002870**


THEO PATHLIGHT
Pole, double







SOCKET INSIDE <7 W



IP 44 IK02 90°

220-240V ~50/60Hz
Material: aluminium

GU10 <7W

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004973

■ Connection box IP68, 3-pole
Prod. no. 228730




Options	Prod. no.
2xGU10	
■ anthracite	**1002871**







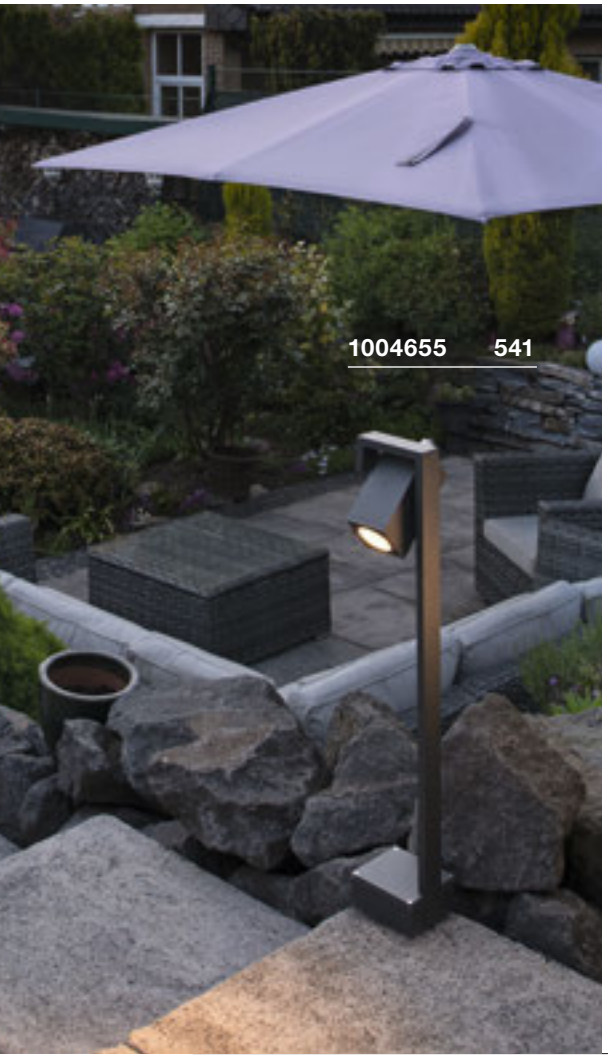


THEO BRACKET 50
Pole







SOCKET INSIDE <7 W



IP 65 70°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <7W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10 anthracite	**1004654**


THEO BRACKET 70
Pole







SOCKET INSIDE <7 W



IP 65 70°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <7W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004973


Options	Prod. no.
1xGU10 anthracite	**1004655**

OVALISK 75
Pole





560lm / 600lm
INSIDE
CRI 80
3000K / 4000K



IP 65 IK02

100-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

1004680	580/630lm 3000/4000K	A→G D

Concrete anchor
Prod. no. 228712
Ground spike
Prod. no. 228722
Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
560/600lm | 3000/4000K | CRI80	
anthracite	**1004680**

OVALISK 100
Pole





560lm / 600lm
INSIDE
CRI 80
3000K / 4000K




IP 65 IK02

100-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

1004681	580/630lm 3000/4000K	A→G D

Concrete anchor
Prod. no. 228712
Ground spike
Prod. no. 228722
Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
560/600lm | 3000/4000K | CRI80	
anthracite	**1004681**

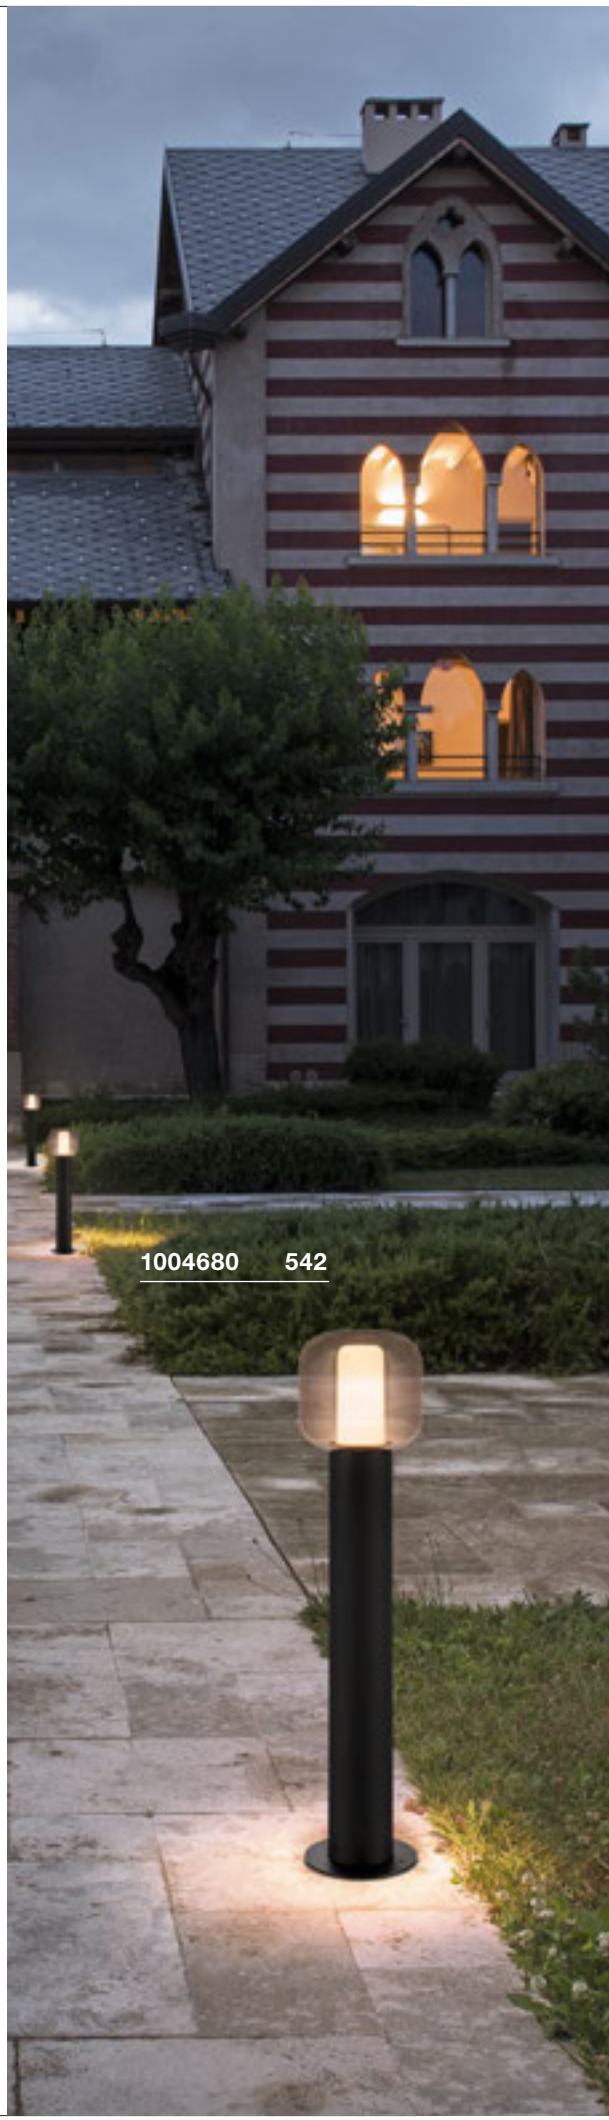



1004681 542


1001999 545

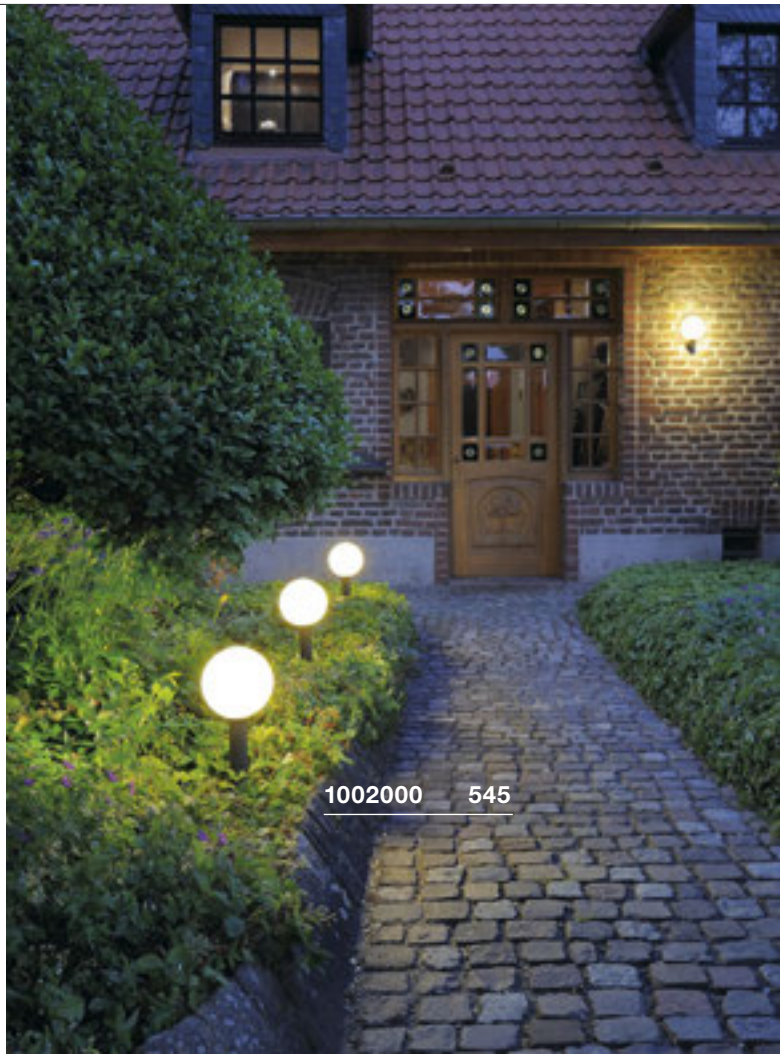

1002000 545


1002001 545

GLOO PURE 27
Pole, E27



SOCKET INSIDE <23 W



IP 44 IK02 30

220-240V ~50/60Hz
Material: aluminium/glass

• Open cable end

E27 <23W
Diameter: 4.8 cm L: 18 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 231234

Options	Prod. no.
1xE27	
◧ anthracite	**1001999**

GLOO PURE 44
Pole, E27



SOCKET INSIDE <23 W



IP 44 IK02 20

220-240V ~50/60Hz
Material: aluminium/glass

• Open cable end

E27 <23W
Diameter: 4.8 cm L: 18 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 231234

Options	Prod. no.
1xE27	
◧ anthracite	**1002000**

GLOO PURE 70
Pole, E27



SOCKET INSIDE <23 W



IP 44 IK02 20

220-240V ~50/60Hz
Material: aluminium/glass

• Open cable end

E27 <23W
Diameter: 4.8 cm L: 18 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Ground spike
Prod. no. 231234

Options	Prod. no.
1xE27	
◧ anthracite	**1002001**

ROTOBALL 25
FL, E27



SOCKET INSIDE <24 W



IP 44 IK04 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

• IP44 contour plug

E27 <24W

LED E27 | 7.5W | 320°
2700K | 700lm | EEK=F
8kWh/1000h


Prod. no. 1005304

Options	Prod. no.
1xE27	
white	**227219**

ROTOBALL 40
FL, E27



SOCKET INSIDE <24 W



IP 44 IK04 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

• IP44 safety plug

E27 <24W
Diameter: 9.5 cm


LED E27 | 9W | 220°
2700K | 770lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
white	**227220**

ROTOBALL 50
FL, E27

SOCKET INSIDE <24 W



IP 44 IK04 200

220-240V ~50/60Hz
Material: steel/polyethylene (PE)

• IP44 safety plug

E27 <24W
Diameter: 9.5 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
1xE27	
white	**227221**


227221 546
227219 546


PHOTONIA
PD, E27







SOCKET INSIDE <60 W



IP 44 IK04 500 250

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug
- Suspension chain included

E27 <60W
Diameter: 9 cm L: 15 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005268

Ceiling rose
Prod. no. 1000398

Options	Prod. no.
1xE27	
anthracite	**232065**


PHOTONIA
TL, E27







SOCKET INSIDE <60 W



IP 44 IK04 500

220-240V ~50/60Hz
Material: aluminium/glass


- IP44 safety plug

E27 <60W
Diameter: 9 cm L: 15 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005268

Options	Prod. no.
1xE27	
anthracite	**232095**

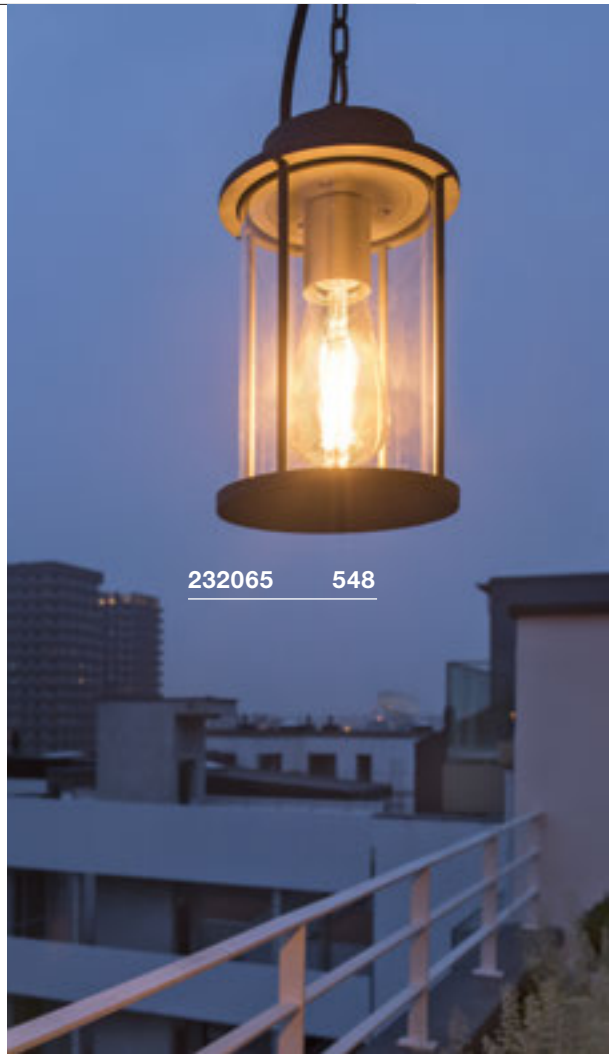








PHOTONIA
Pole, E27





SOCKET INSIDE <60 W



IP 55 IK03 20

220-240V ~50/60Hz
Material: aluminium/glass

- Open cable end

E27 <60W
Diameter: 9 cm L: 15 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265



Connection box IP68, 3-pole
Prod. no. 228730



Concrete anchor
Prod. no. 232085


Options	Prod. no.
1xE27	
anthracite	**232075**

OTOS GLAS
Pole, E27





SOCKET INSIDE <15 W



IP 43

220-240V ~50/60Hz
Material: aluminium/glass

• Concrete anchor included

E27 <15W
Diameter: 6.5 cm L: 14.5 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302


■ Connection box IP68, 3-pole
Prod. no. 228730

■ Screw set
Prod. no. 228753

Options	Prod. no.
1xE27	
■ anthracite	**230465**





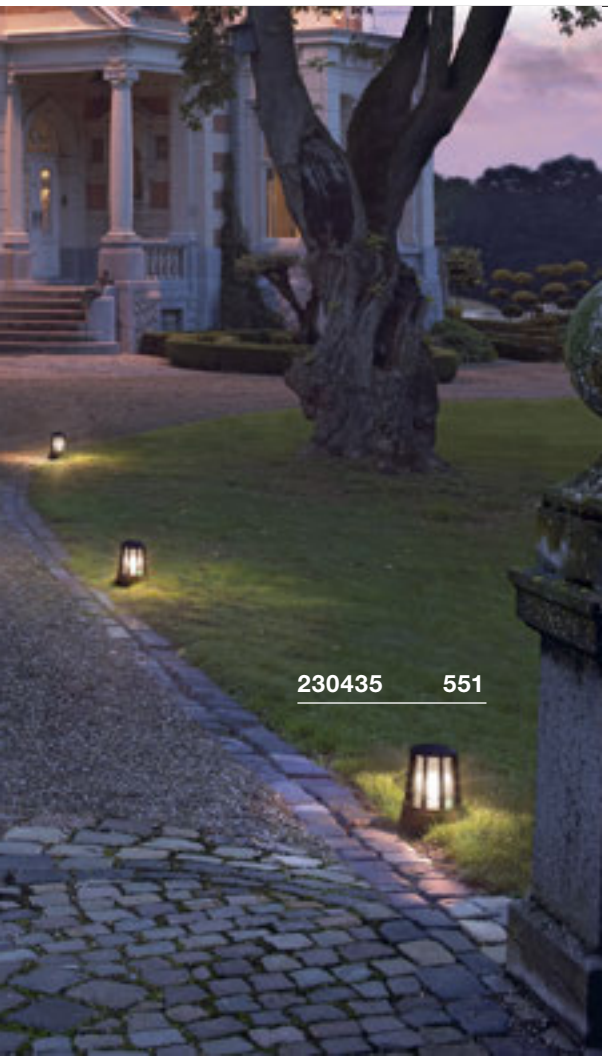




CUBIX
FL, QPAR51



SOCKET INSIDE <25 W



IP 44 IK04 100° 150

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

GU10 <25W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
1xGU10	
anthracite	**132835**

CONE
FL, E27





SOCKET INSIDE <100 W



IP 54 IK05

220-240V ~50/60Hz
Material: aluminium/glass

E27 <100W
L: 15 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
1xE27	
anthracite	**230435**


MOLAT
PD, E27







SOCKET INSIDE 60 W



IP 44 IK04 500 250

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug
- Suspension chain included

E27 60W
Diameter: 6.5 cm L: 14.5 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h



Prod. no. 1005265

Ceiling rose
Prod. no. 1000398




Options	Prod. no.
1xE27	
anthracite	**1000821**

MOLAT
Pole, E27





SOCKET INSIDE 60 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

E27 60W
Diameter: 6.5 cm L: 14.5 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h




Prod. no. 1005265


Ground spike
Prod. no. 230060




Options	Prod. no.
1xE27	
anthracite	**1000822**

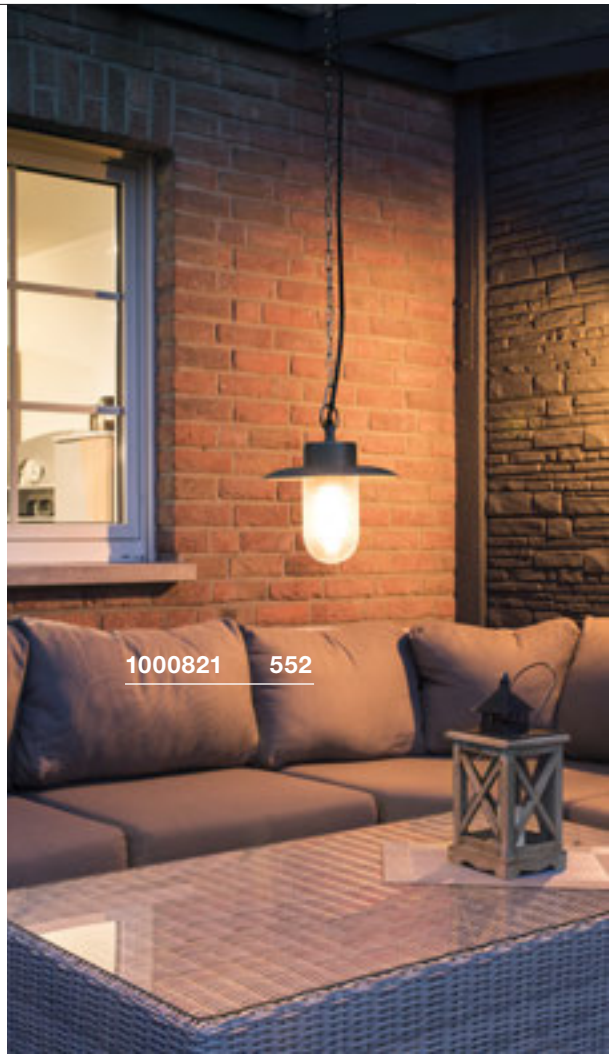



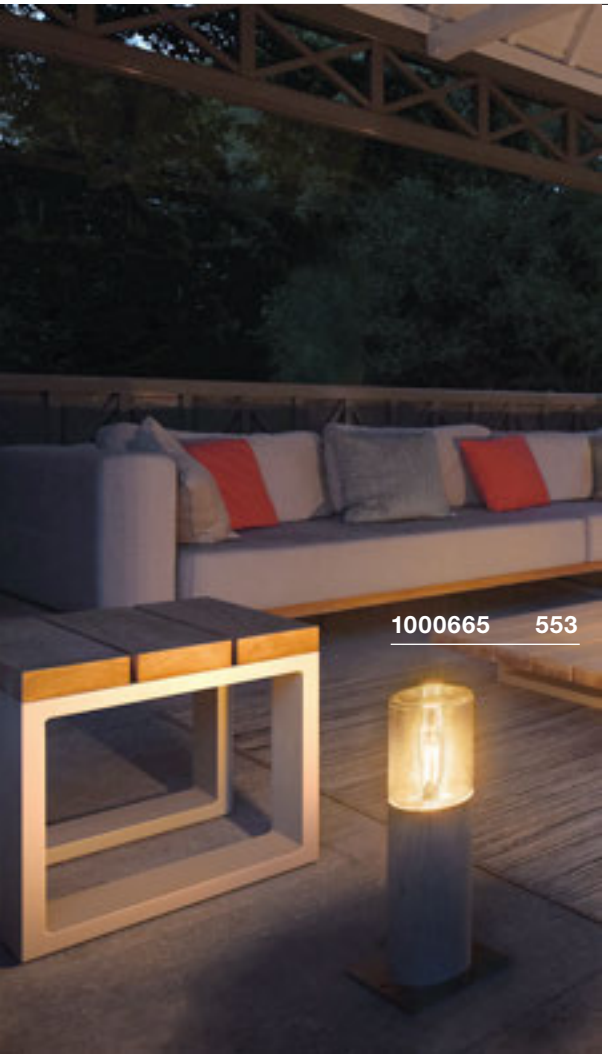

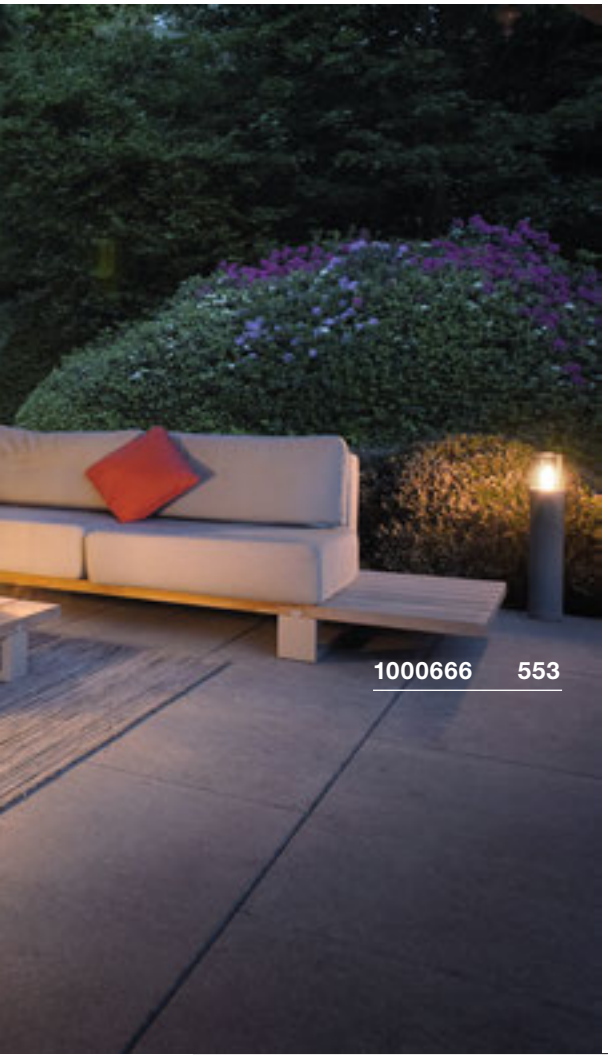


LISENNE 40
Pole, E27







SOCKET INSIDE <23 W



IP 54

220-240V ~50/60Hz
Material: basalt/glass

E27 <23W
Diameter: 5.9 cm L: 15 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005268

Ground spike
Prod. no. 229422

Options	Prod. no.
1xE27 grey/brown	**1000665**


LISENNE 70
Pole, E27







SOCKET INSIDE <23 W



IP 54

220-240V ~50/60Hz
Material: basalt/glass

E27 <23W
Diameter: 5.9 cm L: 15 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h


Prod. no. 1005268

Ground spike
Prod. no. 229422

Options	Prod. no.
1xE27 grey/brown	**1000666**


ADEGAN MANILA
FL, E27







SOCKET INSIDE <15 W



IP 44 IK04 250

220-240V ~50/60Hz
Material: granite/stainless steel

• IP44 safety plug

E27 <15W
Diameter: 4.8 cm L: 18 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
1xE27	
black/stainless steel	**1002494**






ADEGAN
FL, E27





SOCKET INSIDE <15 W



IP 44 IK04 250

220-240V ~50/60Hz
Material: granite/stainless steel

- IP44 safety plug

E27 <15W
Diameter: 4.8 cm L: 18 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
1xE27	
anthracite/milky	**228965**



228925 557


228935 557

ALPA MUSHROOM 45
Pole, E27



SOCKET INSIDE <24 W



IP 55

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

E27 <24W
Diameter: 5.2 cm L: 16 cm

LED E27 | 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h

Prod. no. 1005307

Concrete anchor
Prod. no. 228712

Ground spike
Prod. no. 228722


Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1xE27	
anthracite	**228935**

ALPA MUSHROOM 75
Pole, E27



SOCKET INSIDE <24 W



IP 55

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

E27 <24W
Diameter: 5.2 cm L: 16 cm

LED E27 | 13.5W | 240°
4000K | 1520lm | EEK=E
14kWh/1000h

Prod. no. 1005308

Concrete anchor
Prod. no. 228712

Ground spike
Prod. no. 228722


Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1xE27	
anthracite	**228945**

ALPA CONE 100
Pole, E27



SOCKET INSIDE <24 W



IP 55

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

• Open cable end

E27 <24W
5Ø: 5.2 cm L: 17.3 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Concrete anchor
Prod. no. 228712


Ground spike
Prod. no. 228722

Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
1xE27	
anthracite	**228925**

APONI 90
Pole, PHASE





440lm
INSIDE
3000K
CRI 80



IP 65 L70B50

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium

• Open cable end

1000682	520lm 3000K	A→G E

■ Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
440lm | 3000K | CRI80	
■ anthracite	**1000682**

APONI 120
Pole, PHASE





440lm
INSIDE
3000K
CRI 80



IP 65 L70B50

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium


• Open cable end

1000683	520lm 3000K	A→G E

■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
440lm | 3000K | CRI80	
■ anthracite	**1000683**



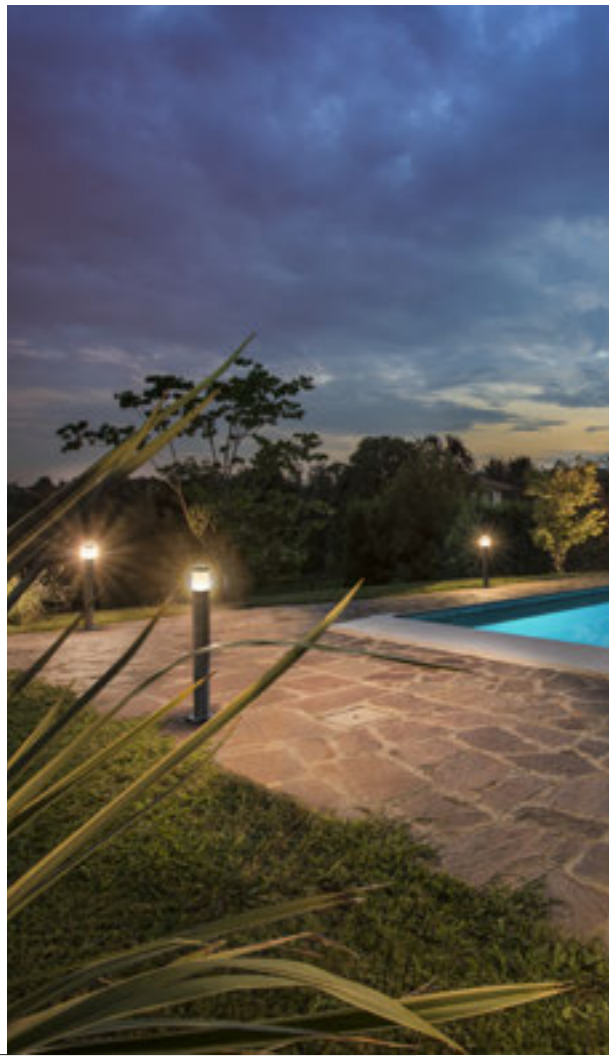





TRUST 30
Pole



IP 55 IK07 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: stainless steel 316

228100	400lm 3000K	A→G

- Ground spike **Prod. no. 227922**
- Ring-shaped grid **Prod. no. 228130**
- Connection box IP68, 3-pole **Prod. no. 228730**

Options	Prod. no.
400lm | 3000K | CRI80	
stainless steel	**228100**

TRUST 60
Pole



IP 55 IK07 L70B50

220-240V ~50/60Hz
Total wattage: 9W
Material: stainless steel 316

228110	400lm 3000K	A→G

- Ground spike **Prod. no. 227922**
- Ring-shaped grid **Prod. no. 228130**
- Connection box IP68, 3-pole **Prod. no. 228730**


Options	Prod. no.
400lm | 3000K | CRI80	
stainless steel	**228110**

BIG NAILS 50
POLE, E27





SOCKET INSIDE <15 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel/polycarbonate (PC)

E27 <15W
Diameter: 4.5 cm L: 17 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Ground spike
Prod. no. 227922


Options	Prod. no.
1xE27	
stainless steel	**229162**

BIG NAILS 80
POLE, E27





SOCKET INSIDE <15 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel/polycarbonate (PC)


E27 <15W
Diameter: 4.5 cm L: 17 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Ground spike
Prod. no. 227922

Options	Prod. no.
1xE27	
stainless steel	**229172**

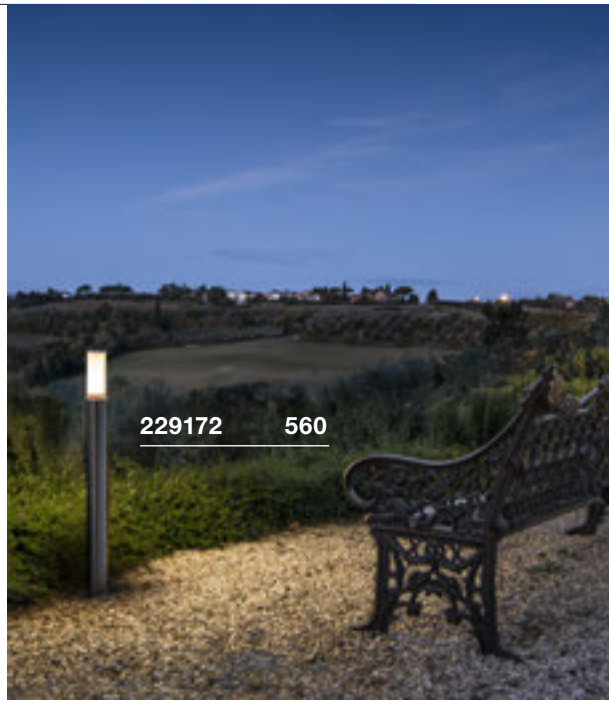






ROX ACRYL 30



SOCKET INSIDE <20 W



IP 44 IK02

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 6 cm L: 15 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

- T-connector box **Prod. no. 228726**
- Ground spike **Prod. no. 231234**
- Concrete anchor **Prod. no. 1001494**


Options	Prod. no.
1xE27 stainless steel	**1001488**

ROX ACRYL 60





SOCKET INSIDE <20 W



IP 44 IK02

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 6 cm L: 15 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

- T-connector box **Prod. no. 228726**
- Ground spike **Prod. no. 231234**
- Concrete anchor **Prod. no. 1001494**


Options	Prod. no.
1xE27 stainless steel	**1001489**

ROX ACRYL 90





SOCKET INSIDE <20 W



IP 44 IK02

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 6 cm L: 15 cm

LED E27 | 7.5W | 320°
2700K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005304


- T-connector box **Prod. no. 228726**
- Ground spike **Prod. no. 231234**
- Concrete anchor **Prod. no. 1001494**

Options	Prod. no.
1xE27 stainless steel	**1001490**

VAP 40



SOCKET INSIDE <23 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <23W
Diameter: 5.2 cm L: 12.1 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Concrete anchor
Prod. no. 229059

Options	Prod. no.
1xE27	
■ stainless steel	**229054**

VAP 70



SOCKET INSIDE <23 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <23W
Diameter: 5.2 cm L: 12.1 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289


■ Connection box IP68, 3-pole
Prod. no. 228730
■ Concrete anchor
Prod. no. 229059

Options	Prod. no.
1xE27	
■ stainless steel	**229057**

VAP 100



SOCKET INSIDE <23 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <23W
Diameter: 5.2 cm L: 12.1 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290

■ Connection box IP68, 3-pole
Prod. no. 228730
■ Concrete anchor
Prod. no. 229059

Options	Prod. no.
1xE27	
■ stainless steel	**229050**


229054 562



229050 562
229057 562


230066 565

VAP SLIM 30
Pole, E27



SOCKET INSIDE <20 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 5 cm L: 12.6 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Ground spike
Prod. no. 230060


Concrete anchor
Prod. no. 230061

Options	Prod. no.
1xE27	
stainless steel	**230063**

VAP SLIM 60
Pole, E27



SOCKET INSIDE <20 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 5 cm L: 12.6 cm

LED E27 | 8W | 240°
4000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005290

Ground spike
Prod. no. 230060


Concrete anchor
Prod. no. 230061

Options	Prod. no.
1xE27	
stainless steel	**230066**

VAP SLIM 90
Pole, E27



SOCKET INSIDE <20 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 5 cm L: 12.6 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Ground spike
Prod. no. 230060

Concrete anchor
Prod. no. 230061


Options	Prod. no.
1xE27	
stainless steel	**230069**

C-POL
POLE, E27





SOCKET INSIDE <24 W



IP 54 IK03

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

E27 <24W
Diameter: 5.2 cm L: 17.3 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289

■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1xE27	
■ anthracite	**231475**










F-POL
POLE, E27





SOCKET INSIDE <20 W



IP 54 IK05

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

E27 <20W
Diameter: 5 cm L: 14.8 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h


C,L

Prod. no. 1005289


■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1xE27	
■ anthracite	**231595**

SQUARE POLE 30
Pole, E27

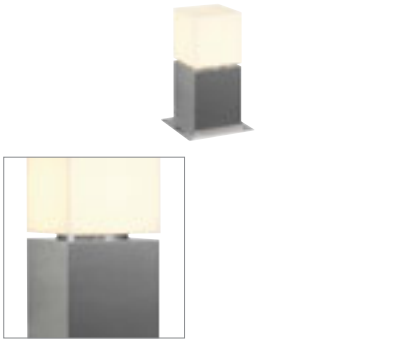

SOCKET INSIDE <20 W



IP 44 IK02

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 6 cm L: 15 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h



Prod. no. 1005301


- Connection box IP68, 3-pole
  Prod. no. 228730
- Ground spike
  Prod. no. 231234
- Concrete anchor
  Prod. no. 1000343

Options	Prod. no.
1xE27	
stainless steel	**1000344**

SQUARE POLE 60
Pole, E27



SOCKET INSIDE <20 W



IP 44 IK02

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 6 cm L: 15 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h



Prod. no. 1005301

- Connection box IP68, 3-pole
  Prod. no. 228730
- Ground spike
  Prod. no. 231234
- Concrete anchor
  Prod. no. 1000343


Options	Prod. no.
1xE27	
stainless steel	**1000345**

SQUARE POLE 90
Pole, E27





SOCKET INSIDE <20 W



IP 44 IK02

220-240V ~50/60Hz
Material: 304 stainless steel

E27 <20W
Diameter: 6 cm L: 15 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h



Prod. no. 1005301

- Connection box IP68, 3-pole
  Prod. no. 228730
- Ground spike
  Prod. no. 231234
- Concrete anchor
  Prod. no. 1000343


Options	Prod. no.
1xE27	
stainless steel	**1000346**


1000344 569


1000346 569


SLOTS 45
Pole







200lm
INSIDE
CRI 80
3000K



IP 44 | 68° | L70B50

220-240V ~50/60Hz
Total wattage: 6.3W
Material: aluminium

- Concrete anchor included

231815, 231817	200lm 3000K	A→G

■ Connection box IP68, 3-pole
Prod. no. 228730

■ Screw set
Prod. no. 228753


Options	Prod. no.
200lm | 3000K | CRI80 ■ anthracite	**231815**
200lm | 3000K | CRI80 ■ rust	**231817**







SLOTS 65
Pole














IP 44 68° L70B50

220-240V ~50/60Hz
Total wattage: 6.3W
Material: aluminium

- Concrete anchor included

		A→G
231455, 231457	200lm 3000K	E


Connection box IP68, 3-pole
Prod. no. 228730

Screw set
Prod. no. 228753

Options	Prod. no.
200lm | 3000K | CRI80 anthracite	**231455**
200lm | 3000K | CRI80 rust	**231457**

H-POL 30
Pole



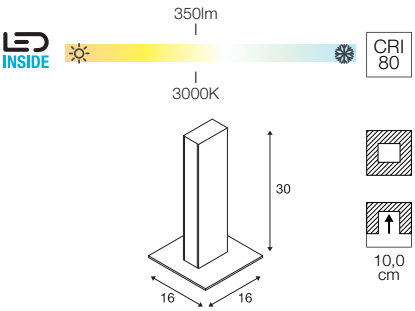

IP 55 L70B50 36

100-277V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/plastic

- This product is intended for in-floor installation
- Recessed fixing kit included
- A larger recessed fixing kit is available for optional installation in the ground. Installation dimensions of the optional recessed fixing kit: L: 14 cm W: 14 cm D:16 cm


Direct	350lm 3000K	A→G E

■ Recessed fixing kit, 14x14 cm
Prod. no. 232195

Options	Prod. no.
Direct: 350lm | 3000K | CRI180	
■ anthracite	**232155**

H-POL 60
Pole



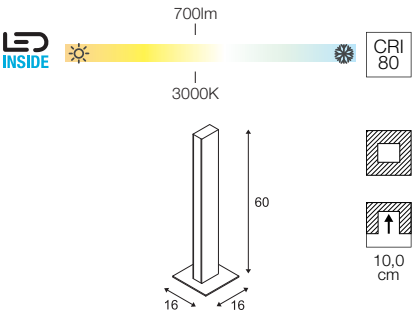

IP 55 L70B50 18


100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/plastic


- This product is intended for in-floor installation
- Recessed fixing kit included
- A larger recessed fixing kit is available for optional installation in the ground. Installation dimensions of the optional recessed fixing kit: L: 14 cm W: 14 cm D:16 cm

Direct	700lm 3000K	A→G E

■ Recessed fixing kit, 14x14 cm
Prod. no. 232195

Options	Prod. no.
Direct: 700lm | 3000K | CRI80	
■ anthracite	**232165**

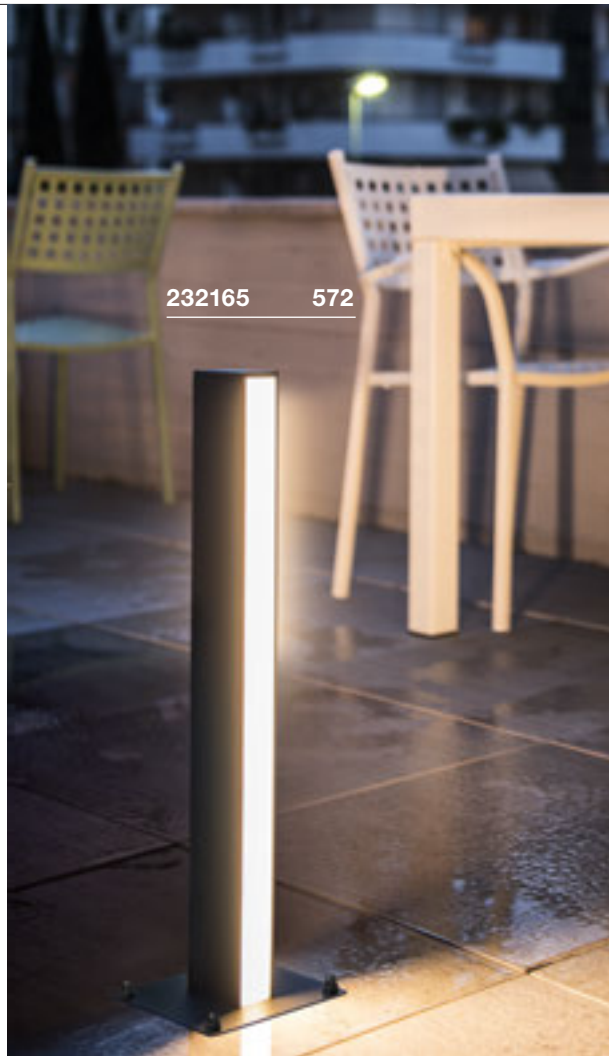

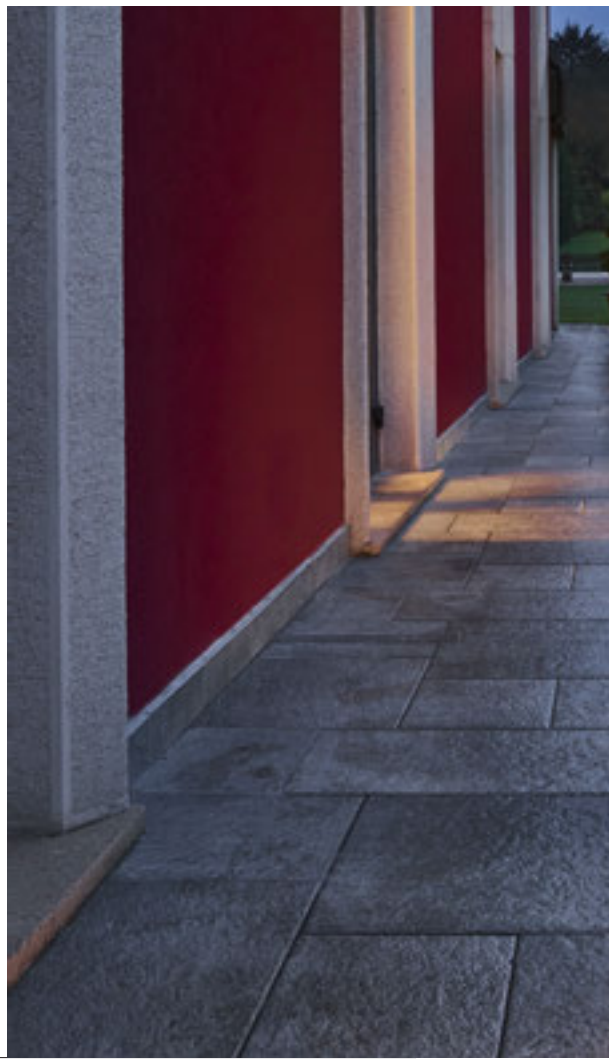







H-POL TWIN 30
Pole



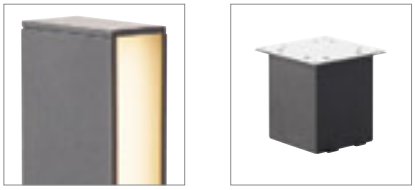

700lm
INSIDE CRI 80
3000K



IP 55 L70B50 18

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/plastic


- This product is intended for in-floor installation
- Recessed fixing kit included
- A larger recessed fixing kit is available for optional installation in the soil. Installation dimensions of the optional recessed fixing kit: L: 14 cm W: 14 cm D:16 cm

Direct	350lm 3000K	A→G A G E

■ Recessed fixing kit, 14x14 cm
Prod. no. 232195


Options	Prod. no.
Direct: 350lm | 3000K | CRI180 Direct: 350lm | 3000K | CRI180	
■ anthracite	**232175**

H-POL TWIN 60
Pole

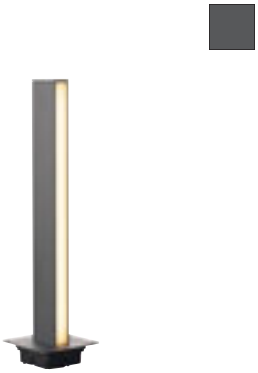



1400lm
INSIDE CRI 80
3000K



IP 55 L70B50 9

220-240V ~50/60Hz | 1000mA
Total wattage: 35W
Material: aluminium/plastic

- This product is intended for in-floor installation
- Recessed fixing kit included
- A larger recessed fixing kit is available for optional installation in the soil. Installation dimensions of the optional recessed fixing kit: L: 14 cm W: 14 cm D:16 cm

Direct	700lm 3000K	A→G A G E

■ Recessed fixing kit, 14x14 cm
Prod. no. 232195

Options	Prod. no.
Direct: 700lm | 3000K | CRI80 Direct: 700lm | 3000K | CRI80	
■ anthracite	**232185**

SLOTBOX 40
Pole



IP 44 IK04 L70B50

100-240V ~50/60Hz | 700mA
Total wattage: 8W
Material: aluminium

- Open cable end

232135	160lm 3000K	A→G / A↑G F

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
160lm | 3000K | CRI80 anthracite	**232135**

SLOTBOX 70
Pole



IP 44 IK04 L70B50

100-240V ~50/60Hz | 700mA
Total wattage: 8.7W
Material: aluminium

- Open cable end

232145	160lm 3000K	A→G / A↑G F


Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
160lm | 3000K | CRI80 anthracite	**232145**








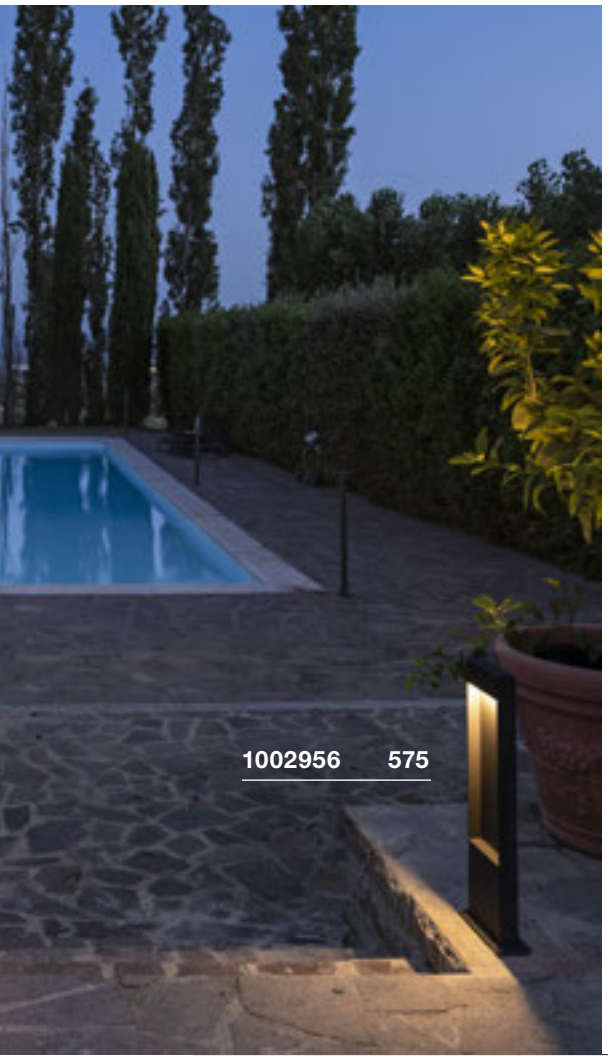


FLATT 65
POLE









IP 65 IK03 L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 9.7W
Material: aluminium

- Light color can be selected using the switch inside the housing prior to installation

1002956, 1002957	400lm 3000/4000K	A→G A G E


■ Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
400lm | 3000/4000K | CRI80	
■ anthracite/anthracite	**1002956**
400lm | 3000/4000K | CRI80	
■ anthracite/brown	**1002957**

FLATT 100
POLE









IP 65 IK03 L70B50

100-240V ~50/60Hz | 350mA
Total wattage: 9.7W
Material: aluminium

- Light color can be selected using the switch inside the housing prior to installation

1002958, 1002959	400lm 3000/4000K	A→G A G E

■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
400lm | 3000/4000K | CRI80	
■ anthracite/anthracite	**1002958**
400lm | 3000/4000K | CRI80	
■ anthracite/brown	**1002959**

ABRIDOR 60
Pole






750lm / 750lm

INSIDE CRI 80

3000K / 4000K



IP 55 IK03 L70B50 45°

100-277V ~50/60Hz | 300mA
Total wattage: 14W
Material: aluminium


1002991	750lm 3000/4000K	A→G E

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
750lm | 3000/4000K | CRI80	
anthracite	**1002991**

ABRIDOR 100
Pole




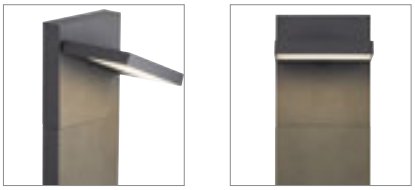

750lm / 750lm

INSIDE CRI 80

3000K / 4000K



IP 55 IK03 L70B50 45°


100-277V ~50/60Hz | 300mA
Total wattage: 14W
Material: aluminium


1002992	750lm 3000/4000K	A→G E

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
750lm | 3000/4000K | CRI80	
anthracite	**1002992**



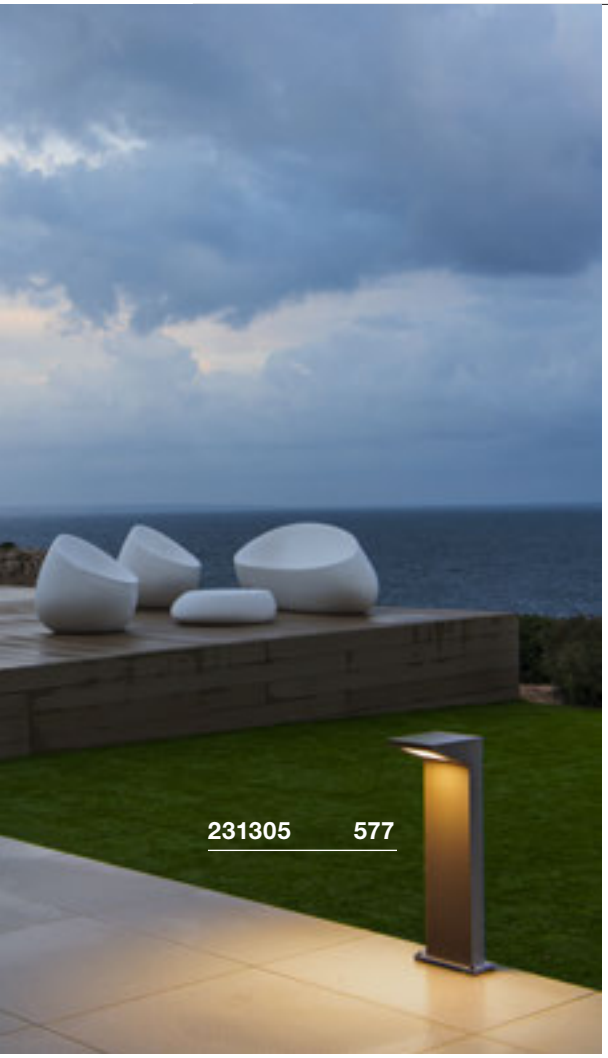

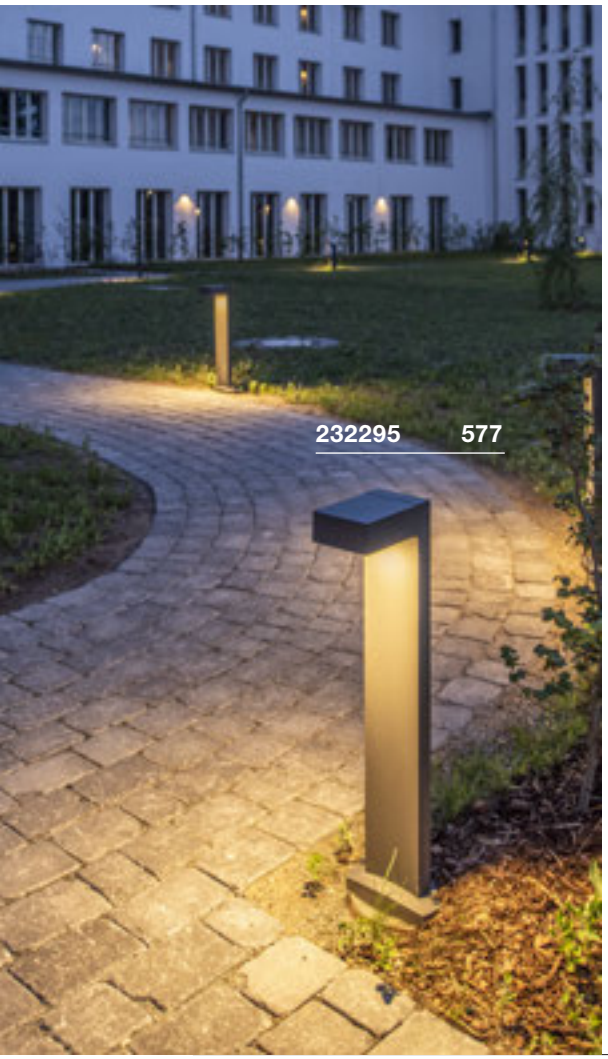


IPERI 50
Pole







320lm
LED INSIDE
CRI 90
4000K



IP 44 L70B50

230V ~50Hz
Total wattage: 5W
Material: aluminium/plastic

		A→G
231305	400lm 4000K	D

Ground spike
Prod. no. 231231

Options	Prod. no.
320lm | 4000K | CRI90	
anthracite	**231305**

QUADRASYL 75
Pole, TCR-TSE










SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium


- Concrete anchor included
- Open cable end

GX53 <11W
Diameter: 7.5 cm L: 2.7 cm

LED GX53 | 6.1W | 120°
4000K | 520lm | EEK=F
6kWh/1000h
Prod. no. 1005269

T-connector box
Prod. no. 228726

Options	Prod. no.
1xGX53	
anthracite	**232295**
1xGX53	
grey	**232294**

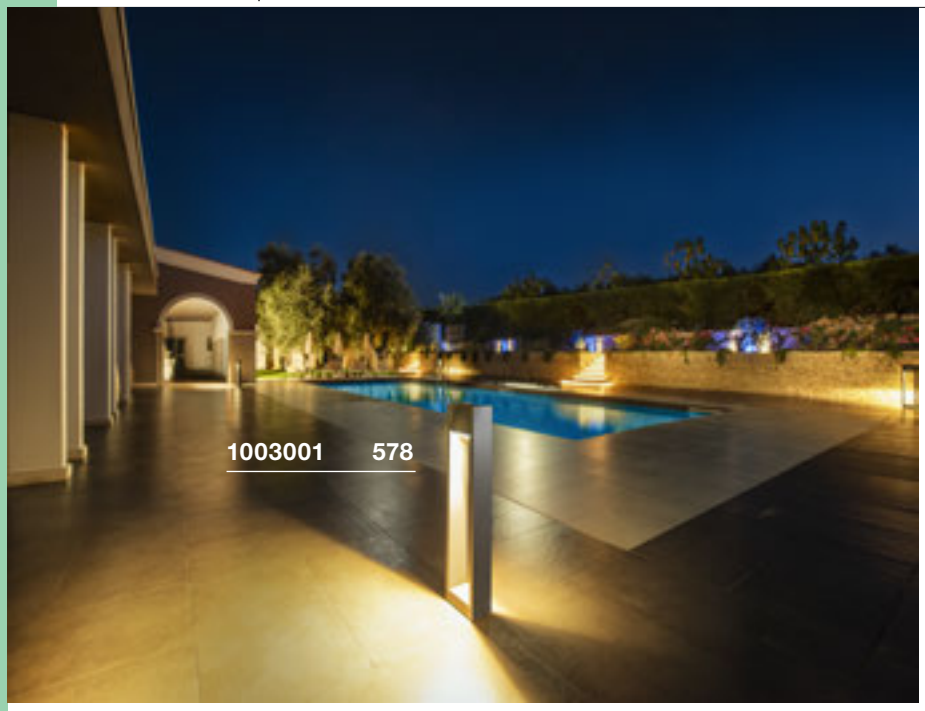






QUAD POLE







1550lm
LED INSIDE
CRI 90
3000K



IP 65 | IK02 | 100° | L70B50 | 180°

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass

- Open cable end

1003001	1550lm 3000K	A→G A G E


■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
1550lm | 3000K | CRI90	
■ anthracite	**1003001**

BOOKAT
Pole, PHASE



1240/1300lm
INSIDE
3000/4000K
CRI 80



IP 65 IK05 L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 15W
Material: aluminium

• IP connection box included


1005441	1240/1300lm 3000/4000K	A→G E

Options	Prod. no.
1240/1300lm | 3000/4000K | CRI 80	
anthracite	**1005441**

RASCALI 45
Pole



360lm
INSIDE
3000K
CRI 90



IP 65 IK02 L70B50

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium


1000799	360lm 3000K	A→G E

Options	Prod. no.
360lm | 3000K | CRI90	
anthracite	**1000799**

RASCALI 65
Pole



360lm
INSIDE
3000K
CRI 90



IP 65 IK02 L70B50

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium

1000801	360lm 3000K	A→G E


Options	Prod. no.
360lm | 3000K | CRI90	
anthracite	**1000801**

ENOLA C
POLE






800lm
INSIDE
CRI 80
3000K



IP 55 | 35° | L70B50 | 45°


100-240V ~50/60Hz | 500mA
Total wattage: 12W
Material: aluminium/glass

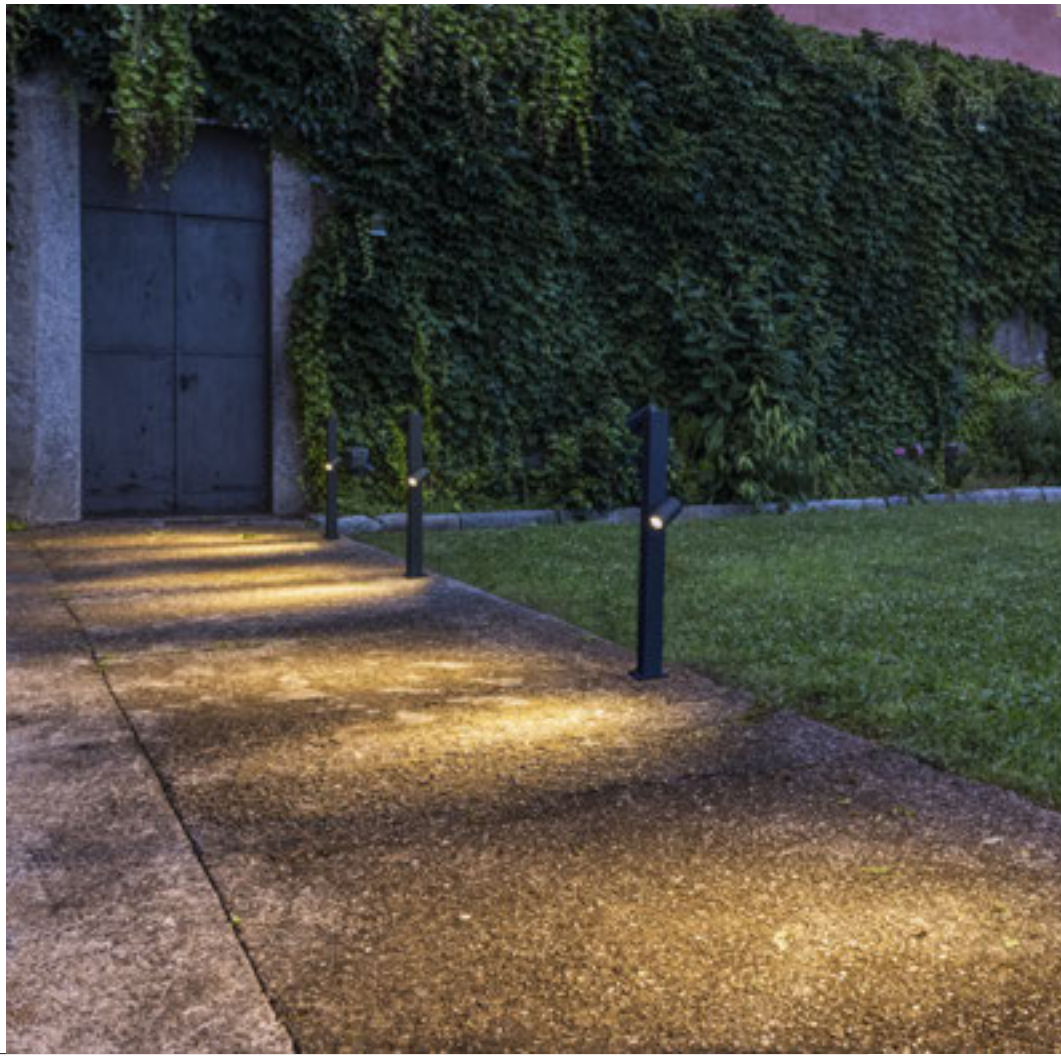

		A→G
228545	1060lm 3000K	A E G

■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
800lm | 3000K | CRI80	
■ anthracite	**228545**

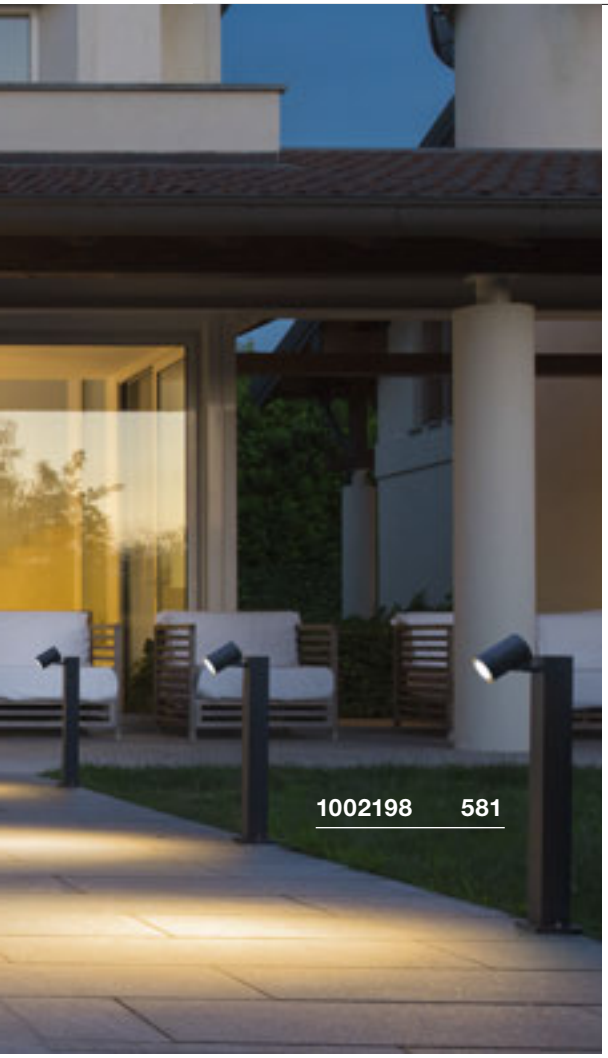




HELIA
Pole, single, PHASE







450lm
INSIDE
CRI 80
3000K



IP 55 | 35° | L70B50 | 320° | 90° | 20

LED

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium/glass

- Open cable end

1002198	440lm 3000K	A→G A G E

Connection box IP68, 3-pole
Prod. no. 228730
Ground spike
Prod. no. 1000736

Options	Prod. no.
450lm | 3000K | CRI80	
anthracite	**1002198**


HELIA
Pole, double, PHASE







900lm
INSIDE
CRI 80
3000K



IP 55 | 35° | L70B50 | 320° | 90° | 20

LED

220-240V ~50/60Hz
Total wattage: 16W
Material: aluminium/glass

- Open cable end

1002200	880lm 3000K	A→G A G E

Connection box IP68, 3-pole
Prod. no. 228730
Ground spike
Prod. no. 1000736

Options	Prod. no.
900lm | 3000K | CRI80	
anthracite	**1002200**


HELIA
Pole, single, PHASE







450lm
INSIDE
CRI 80
3000K



IP 55 | 38° | L70B50 | 350° | 90° | 300

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium

- The height of the light can be increased by a maximum of 2 extension rods
- Open cable end

233275	440lm 3000K	A→G E

- Concrete anchor **Prod. no. 228712**
- Screw set **Prod. no. 228752**
- Pedestal **Prod. no. 233145**
- Extension rod, 30 cm **Prod. no. 233165**


Options	Prod. no.
450lm | 3000K | CRI80	
anthracite	233275

HELIA
Pole, double, PHASE





900lm
INSIDE
CRI 80
3000K



IP 55 | 38° | L70B50 | 350° | 90° | 300

220-240V ~50/60Hz
Total wattage: 16W
Material: aluminium


- The height of the light can be increased by a maximum of 2 extension rods
- Open cable end

233285	880lm 3000K	A→G E

- Concrete anchor **Prod. no. 228712**
- Screw set **Prod. no. 228752**
- Pedestal **Prod. no. 233145**
- Extension rod 30, cm **Prod. no. 233165**

Options	Prod. no.
900lm | 3000K | CRI80	
anthracite	233285



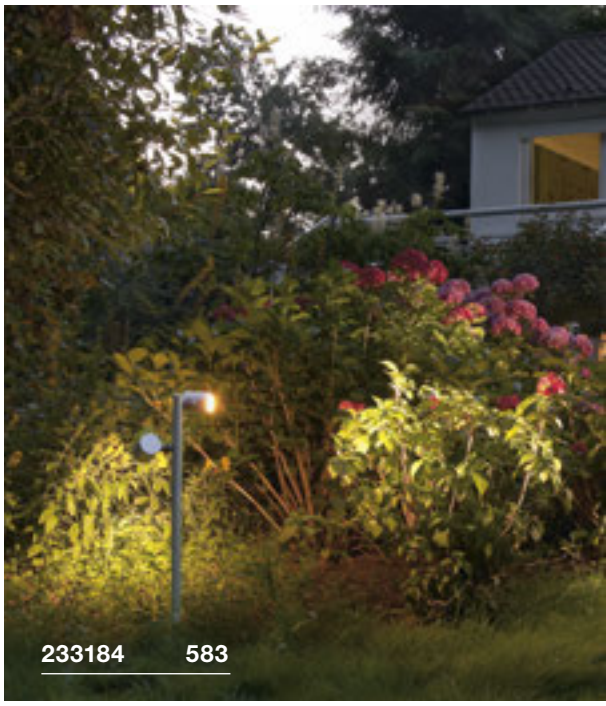




MYRA SPOT
Double, GU10





SOCKET INSIDE <4.5 W



IP 44 340° 45° 300

220-240V ~50/60Hz
Material: aluminium

- The height of the light can be increased by a maximum of 2 extension rods
- Open cable end

GU10 <4.5W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Concrete anchor
Prod. no. 228712

Screw set
Prod. no. 228752

Pedestal
Prod. no. 233144

Extension rod
Prod. no. 233164


Options	Prod. no.
2xGU10	
grey	**233184**

MYRA SPOT
Double, GU10





SOCKET INSIDE <4.5 W



IP 44 340° 45° 300

220-240V ~50/60Hz
Material: aluminium

- The height of the light can be increased by a maximum of 2 extension rods
- Open cable end

GU10 <4.5W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004973

Concrete anchor
Prod. no. 228712

Screw set
Prod. no. 228752

Pedestal
Prod. no. 233145

Extension rod 30cm
Prod. no. 233165


Options	Prod. no.
2xGU10	
anthracite	**233185**

SITRA 360
Pole, TCR-TSE





SOCKET INSIDE <9 W



IP 44 90° 90°

220-240V ~50/60Hz
Material: aluminium/glass

GX53 <9W
Diameter: 7.5 cm L: 3.5 cm

LED GX53 | 6W | 120°
4000K | 550lm | EEK=F
6kWh/1000h

Prod. no. 1005269

Ground spike
Prod. no. 230060


Options	Prod. no.
2xGX53	
anthracite	**231505**

THE SUN IS RISING.

SPOTLIGHTS CREATE DYNAMIC LIGHTING EFFECTS.


Do you want to effectively illuminate an outdoor area?
Then check out our wide range of spotlights enabling fully customized lighting now. Use them to illuminate buildings, seating, paths, other garden highlights and more.

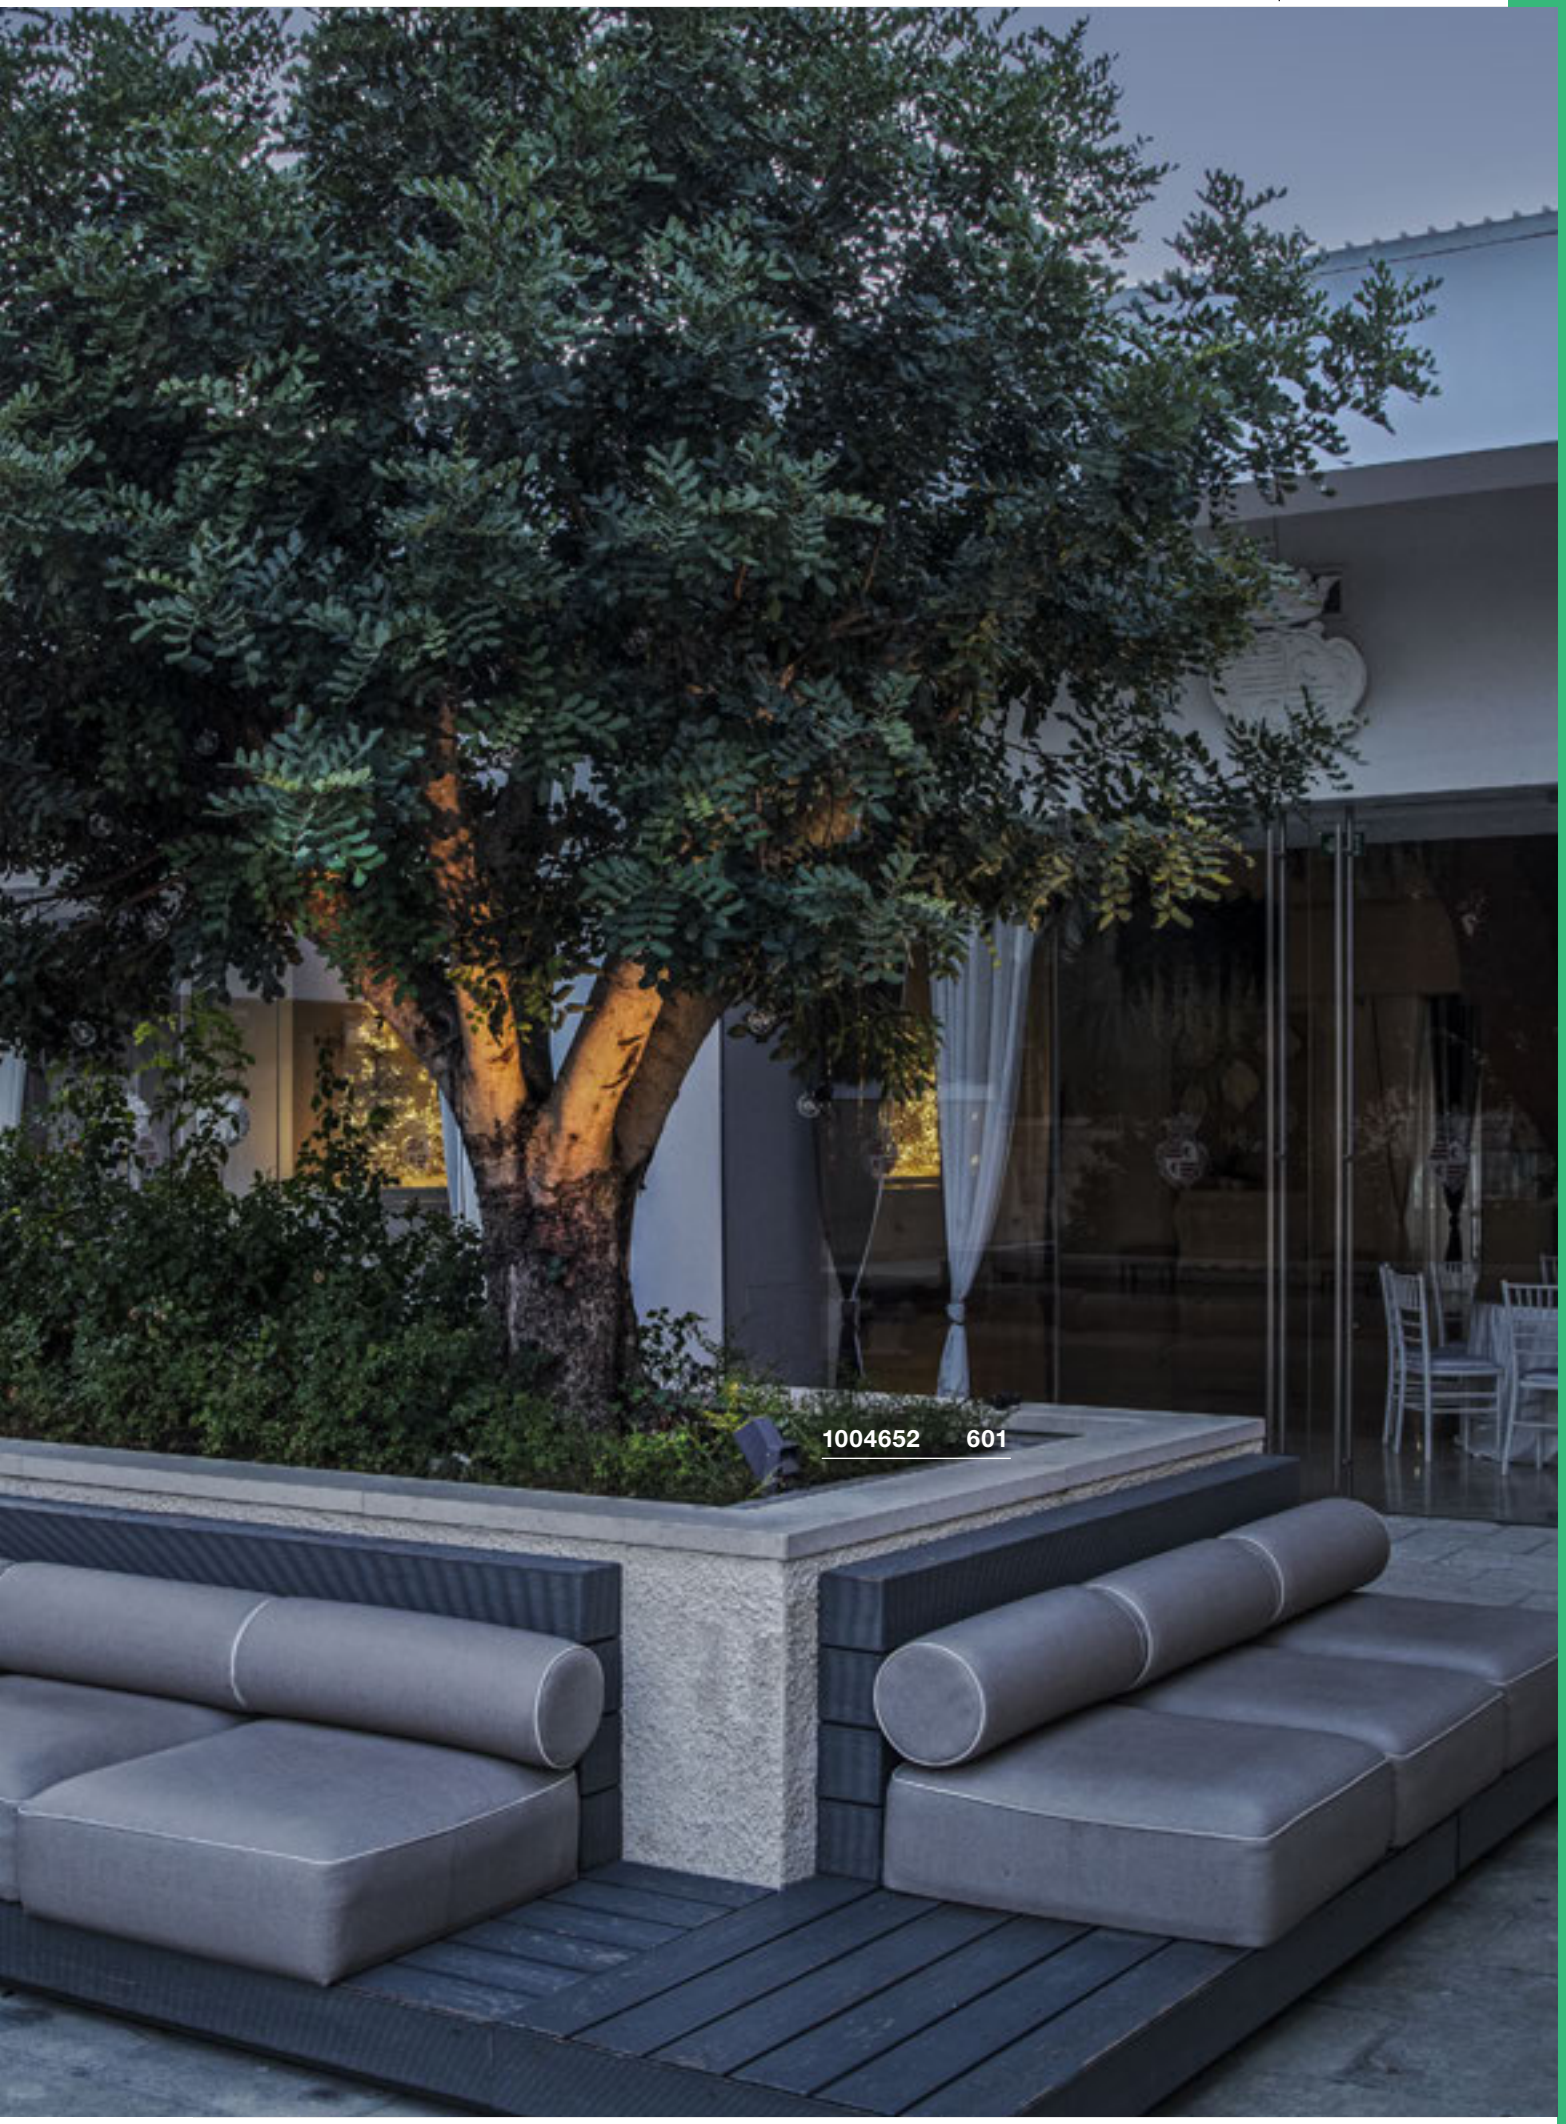


1004652 601



1004757 592

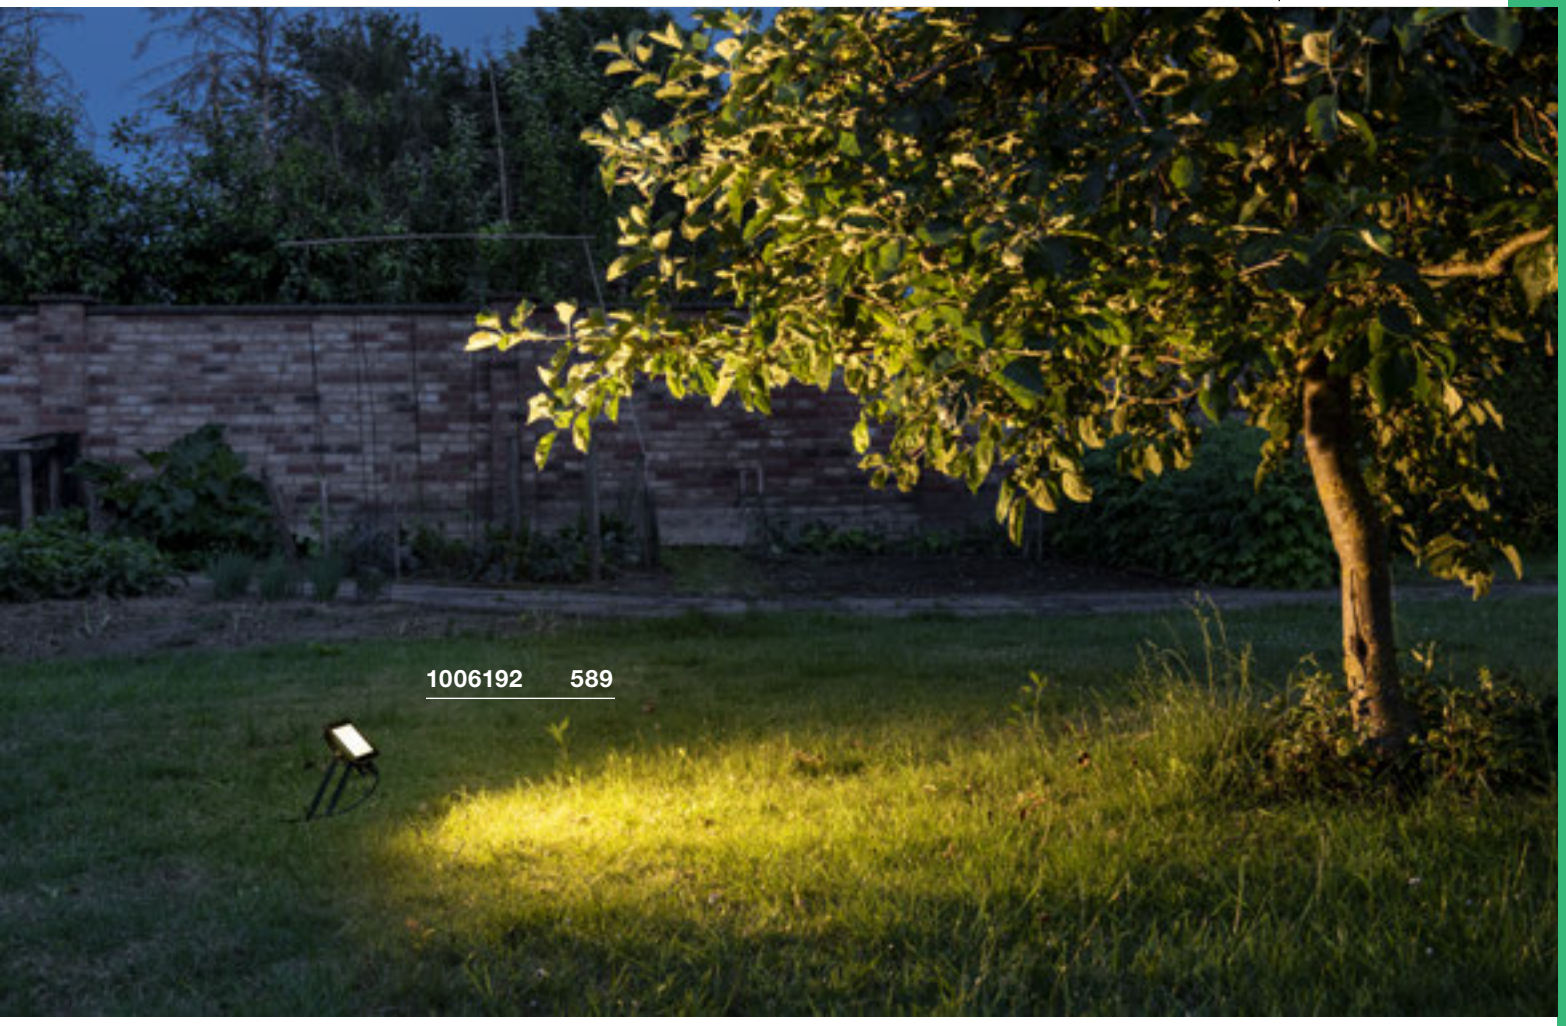

SPOTLIGHTS

NEW 589
NEW 589
NEW 589
591
591
591
592
593
593
594
595
595
595
597
598
598
599
599
601
601
601
603

You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the 'Lamps' chapter, starting on page 808


1006193 589


FLOODI S
SP

NEW





1040lm
INSIDE
CRI 80
3000K



IP 65 IK06 100° L70B50 180°

220-240V ~50/60Hz
Total wattage: 9.3W
Material: aluminium/glass


FLOODI M
SP

NEW





2980lm
INSIDE
CRI 80
3000K



IP 65 IK06 100° L70B50 180°

220-240V ~50/60Hz
Total wattage: 30W
Material: aluminium/glass


FLOODI L
SP

NEW





5150lm
INSIDE
CRI 80
3000K



IP 65 IK06 100° L70B50 180°

220-240V ~50/60Hz
Total wattage: 48W
Material: aluminium/glass

1006191	1040lm 3000K	A→G A G E

Options	Prod. no.
1040lm | 3000K | CRI80	
anthracite	**1006191**

1006192	2980lm 3000K	A→G A G E

Options	Prod. no.
2980lm | 3000K | CRI80	
anthracite	**1006192**

1006193	5150lm 3000K	A→G A G E

Options	Prod. no.
5150lm | 3000K | CRI80	
anthracite	**1006193**



1003448 591

GALEN 60
SP








1570lm / 1570lm

INSIDE CRI 80

3000K / 4000K



IP 65 IK03 L70B50 180° 11 12

220-240V ~50/60Hz | 450mA
Total wattage: 18W
Material: aluminium/glass

1003447	1570/1570lm 3000/4000K	A→G E

Options	Prod. no.
1570/1570lm | 3000/4000K | CRI80	
anthracite	1003447

GALEN 120
SP








3000lm / 3100lm

INSIDE CRI 80

3000K / 4000K



IP 65 IK03 L70B50 180° 11 10

220-240V ~50/60Hz | 900mA
Total wattage: 34W
Material: aluminium/glass

1003448	3000/3100lm 3000/4000K	A→G E

Options	Prod. no.
3000/3100lm | 3000/4000K | CRI80	
anthracite	1003448

FLAC BEAM®
SP








1800lm

INSIDE CRI 90

3000K



IP 65 IK04 60° L70B50 120° 170°

200

220-240V ~50/60Hz
Total wattage: 27W
Material: aluminium

- IP44 safety plug

The energy efficiency class information for this product was not available at the time of printing. The latest product data can always be found at www.slv.com

Options	Prod. no.
1800lm | 3000K | CRI90	
grey	231072


SAMRINA
SP, single, GU10







SOCKET INSIDE 7 W



IP 65 IK04 280° 150

220-240V ~50/60Hz
Material: plastic/glass


- Contains recycled material
- IP44 safety plug

GU10 7W
Diameter: 6 cm L: 6 cm


LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h


Prod. no. 1004972

Options	Prod. no.
GU10	
■ black	**1004757**

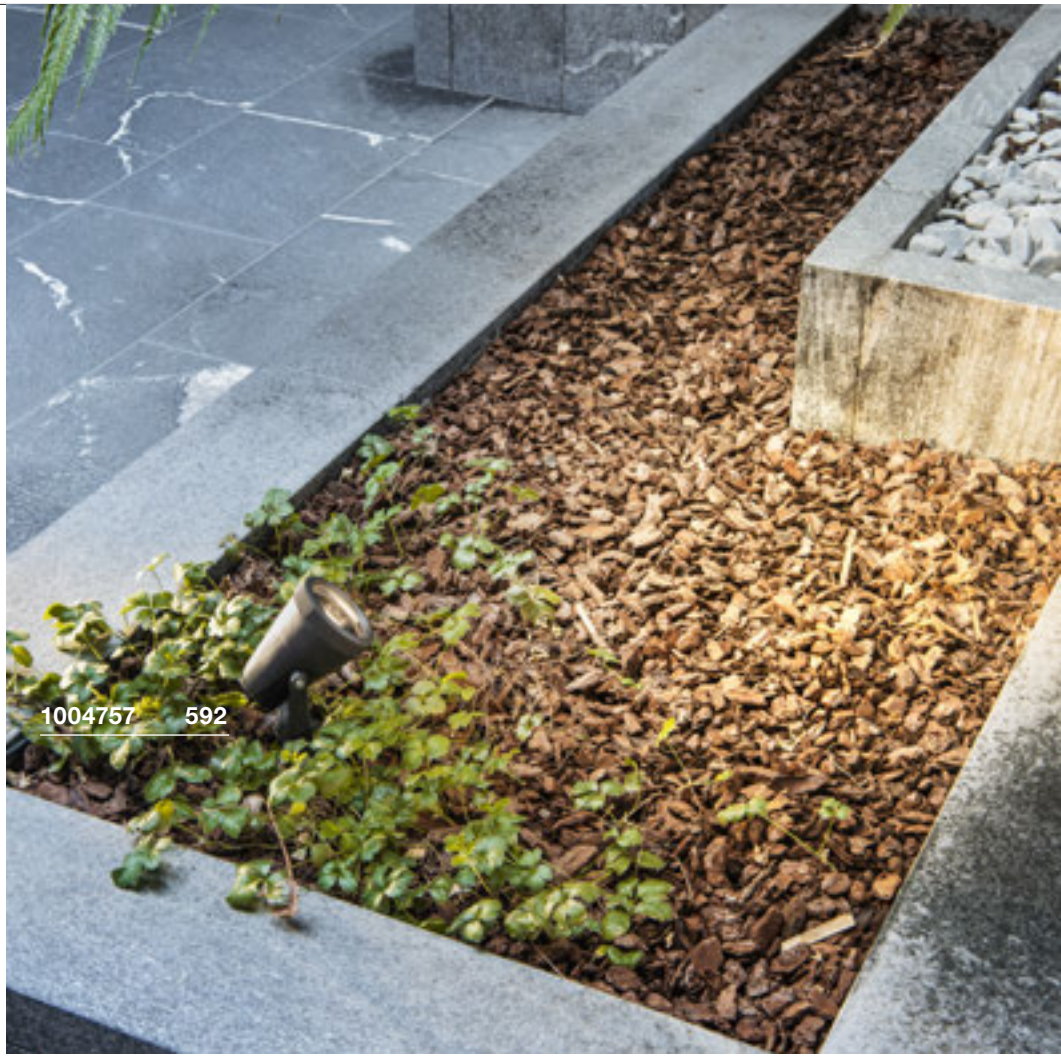



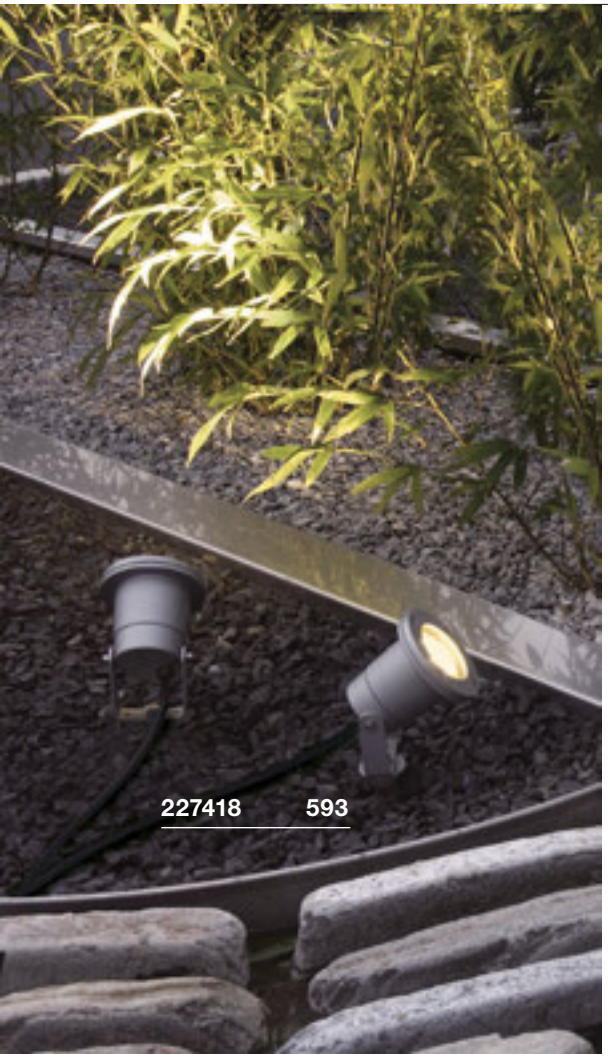

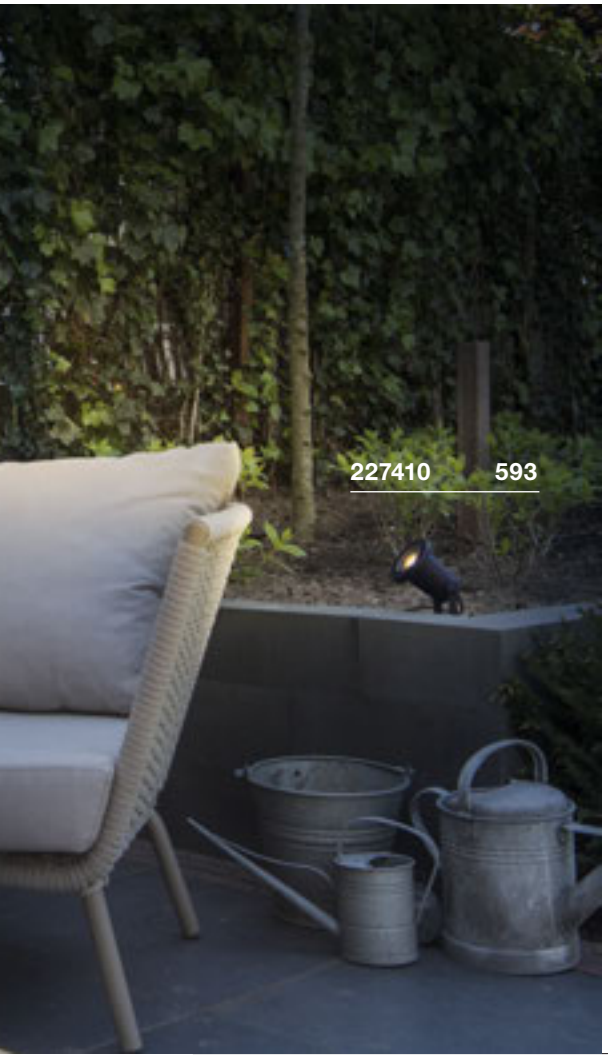


NAUTILUS 10
SP, round, QPAR51







SOCKET INSIDE <35 W



IP 65 | IK04 | 180° | 150

220-240V ~50/60Hz
Material: aluminium

- IP44 safety plug

GU10 <35W
L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
1xGU10	
grey	**227418**


BIG NAUTILUS
SP, round, QPAR51







SOCKET INSIDE <11 W



IP 65 | IK06 | 180° | 150

230V ~50Hz
Material: aluminium

- IP44 safety plug

GU10 <11W
Diameter: 5 cm L: 8.3 cm

LED GU10 51mm | 4W | 36°
4000K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004974

Options	Prod. no.
1xGU10	
black	**227410**
GU10	
rust	**1001964**
GU10	
green	**1001965**


NAUTILUS 10
SP, round, QPAR51







SOCKET INSIDE <25 W



IP 55 IK04 180° 150

220-240V ~50/60Hz
Material: 316 stainless steel

- IP44 safety plug

GU10 <25W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10	
stainless steel	**229740**






NAUTILUS
SP, QR-C51







SOCKET INSIDE <35 W



IP 67 IK03 180° 150

12V ~50Hz
Material: 304 stainless steel/glass

• Open cable end

GX5.3 <35W

LED GU5.3 | 5.5W | 36°
2700K | 450lm | EEK=G
7kWh/1000h



Prod. no. 1001574

Transformer 12V AC | 60VA IP44
Prod. no. 227160



Options	Prod. no.
1xGX5,3	
stainless steel	**229090**


NAUTILUS 10 SPOT
SP, QPAR51







SOCKET INSIDE <25 W



IP 55 IK03 360° 180° 150

220-240V ~50/60Hz
Material: 316 stainless steel

• Open cable end

GU10 <25W
Diameter: 5 cm L: 6 cm

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004973

Connection box IP68, 3-pole
Prod. no. 228730



Options	Prod. no.
1xGU10	
stainless steel	**229741**


NAUTILUS 10 SPOT LED
SP







520lm
3000K
LED INSIDE CRI 80



IP 55 IK04 60° L80B50 180° 150

LED

220-240V ~50/60Hz
Total wattage: 9W
Material: 316 stainless steel

• IP44 safety plug

		A→G
1001962	520lm 3000K	A E

Ground spike
Prod. no. 900011



Mounting plate
Prod. no. 1001963



Options	Prod. no.
520lm | 3000K | CRI80	
stainless steel	**1001962**



231035 597




NAUTILUS 10
SP, square







660lm
LED INSIDE
CRI 80
3000K



IP 65 | IK04 | 45° | L70B50 | 90° | 200

LED

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.5W
Material: aluminium/glass

- IP44 safety plug

231035, 1001937	660lm 3000K	A→G F

Options	Prod. no.
660lm | 3000K | CRI80 anthracite	**231035**
660lm | 3000K | CRI80 rust	**1001937**


DASAR® PROJECTOR
SP, 12/24V







520lm
3000K
CRI 80



IP 68 | 40° | L70B50 | 90° | 250

12-24V
Total wattage: 6.5W
Material: 316 stainless steel/glass

- Open cable end

233570	520lm 3000K	A→G F

- Ground spike, 316 stainless steel **Prod. no. 233580**
- Mounting plate, 316 stainless steel **Prod. no. 233582**
- Plastic ground spike **Prod. no. 900011**

Options	Prod. no.
520lm | 3000K | CRI80	
stainless steel	**233570**


DASAR® PROJECTOR
SP, 230V







300lm
3000K
CRI 80



IP 67 | IK04 | 40° | L70B50 | 90° | 200


220-240V ~50/60Hz | 400mA
Total wattage: 4.6W
Material: 316 stainless steel/glass

- IP44 safety plug

233571	300lm 3000K	A→G F


- Ground spike, 316 stainless steel **Prod. no. 233580**
- Mounting plate, 316 stainless steel **Prod. no. 233582**
- Plastic ground spike **Prod. no. 900011**

Options	Prod. no.
300lm | 3000K | CRI80	
stainless steel	**233571**

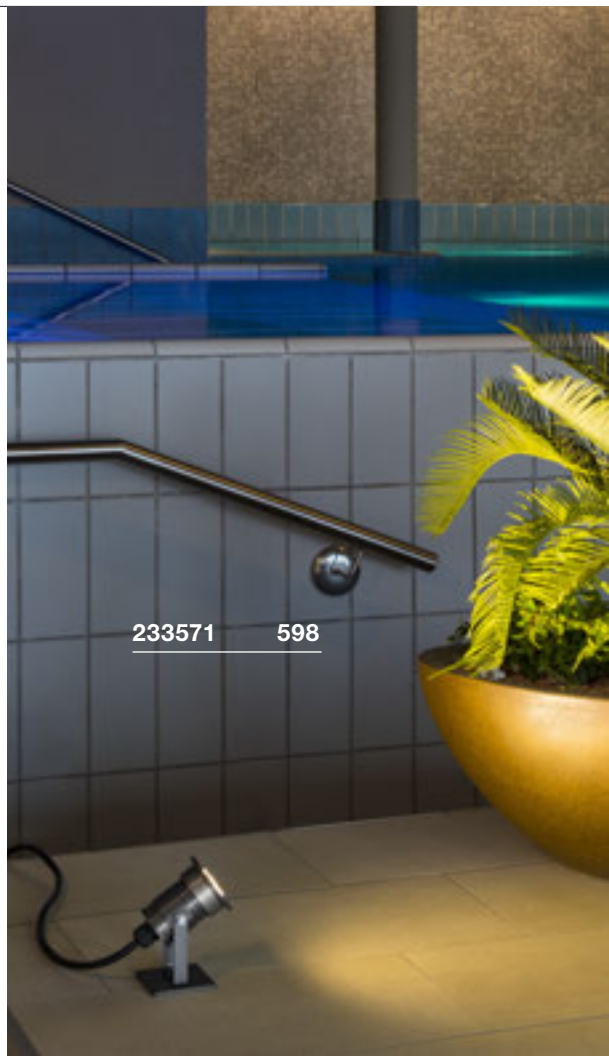






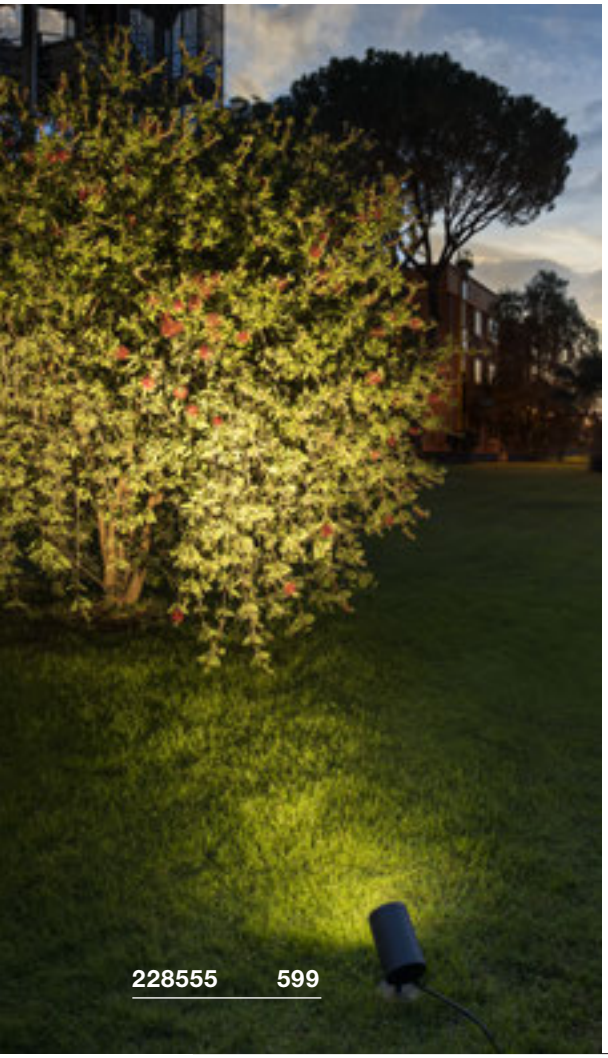



HELIA SPOT S
SP, single, PHASE












220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium

- IP44 safety plug

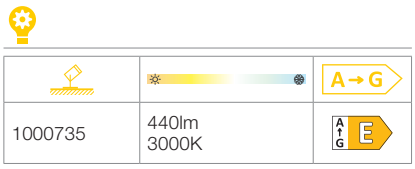


Ground spike
Prod. no. 1000736


Options	Prod. no.
440lm | 3000K | CRI80	
anthracite	**1000735**


HELIA SPOT L
SP, single, PHASE












220-240V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium

- IP44 safety plug

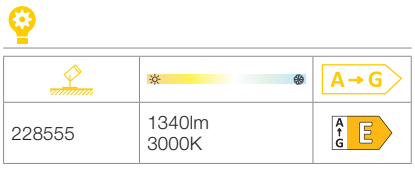

Ground spike
Prod. no. 1000736

Options	Prod. no.
1340lm | 3000K | CRI80	
anthracite	**228555**


1004652 601


1002201 601


227504 601


THEO BRACKET
SP







SOCKET INSIDE <7 W



IP 65 | 70° | 150

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

GU10 <7W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h




Prod. no. 1004972

Options	Prod. no.
1xGU10	
anthracite	**1004652**


SYNA
SP







470lm
LED INSIDE
3000K
CRI 80



IP 55 | IK04 | 50° | L70B50 | 180° | 150

LED

220-240V ~50/60Hz
Total wattage: 9W
Material: aluminium/glass

- IP44 safety plug


227505, 227504, 227507	470lm 3000K	A→G A G E

LED SPIKE
SP





400lm
LED INSIDE
3000K
CRI 80



IP 55 | IK06 | 40° | L70B50 | 360° | 150

LED

100-240V ~50/60Hz | 240mA
Total wattage: 6W
Material: aluminium/glass

- IP44 safety plug

1002201, 1002203	400lm 3000K	A→G A G F

Options	Prod. no.
470lm | 3000K | CRI80	
anthracite	**227505**
470lm | 3000K | CRI80	
grey	**227504**
470lm | 3000K | CRI80	
rust	**227507**


Options	Prod. no.
400lm | 3000K | CRI80	
anthracite	**1002201**
400lm | 3000K | CRI80	
rust	**1002203**

SITRA 360 SPIKE
SP, single, TCR-TSE





SOCKET INSIDE <9 W



IP 44 IK04 90° 150

220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

GX53 <9W
Diameter: 7.5 cm L: 3.5 cm


LED GX53 | 6.1W | 120°
2700K | 490lm | EEK=G
6kWh/1000h

Prod. no. 1005272

Options	Prod. no.
1xGX53	
anthracite	**231525**





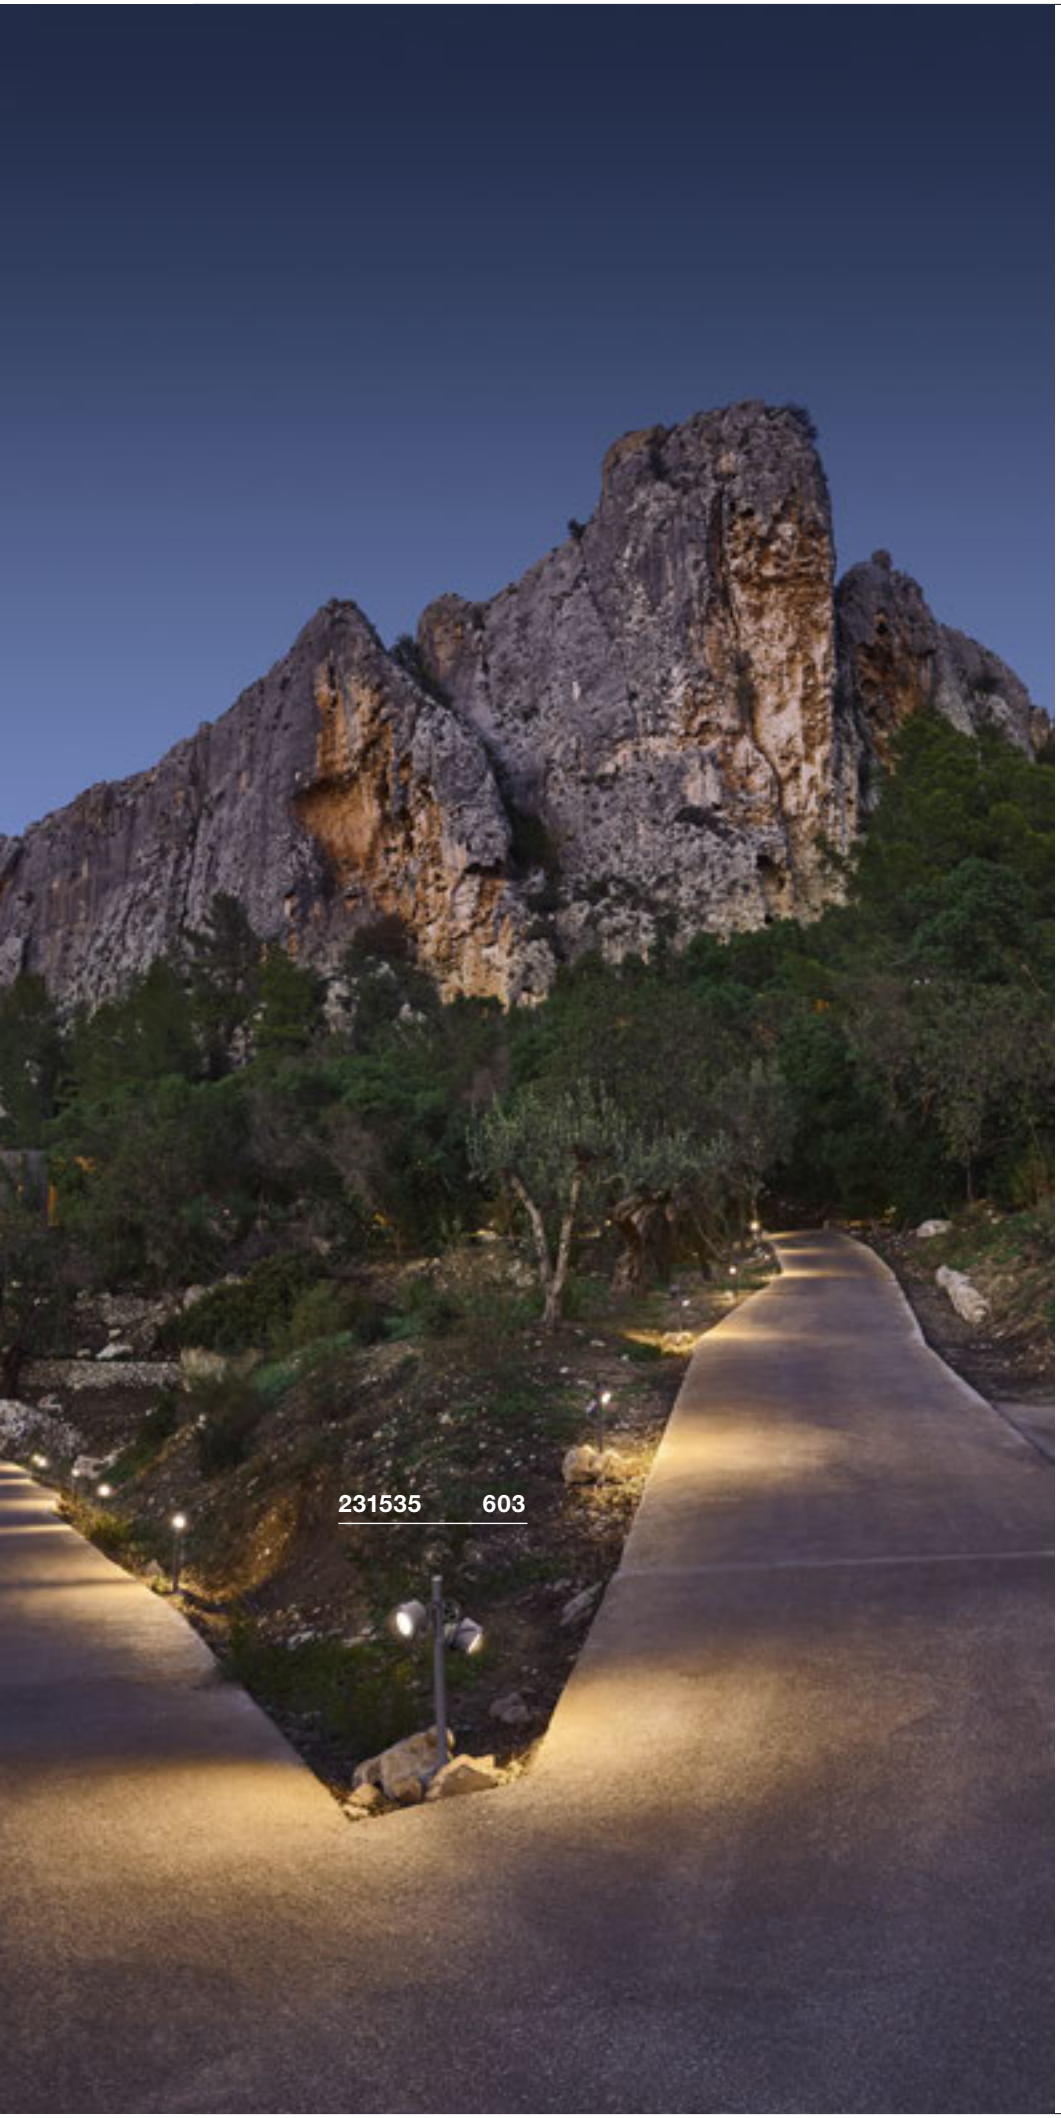



SITRA 360 SPIKE
SP, double, TCR-TSE





SOCKET INSIDE <9 W





220-240V ~50/60Hz
Material: aluminium/glass

- IP44 safety plug

GX53 <9W
Diameter: 7.5 cm L: 3.5 cm

LED GX53 | 6.1W | 120°
3000K | 490lm | EEK=G
6kWh/1000h


Prod. no. 1005271

Options	Prod. no.
2xGX53	
anthracite	**231535**

BRING LIGHT INTO THE DARKNESS.

PRACTICAL WALL AND CEILING LIGHTS.

As lighting solutions that shine through even the worst of weather conditions, our wall and ceiling lights are robust, energy efficient and powerful. In addition to various features, you can also choose from wide range of designs. Looking for something a bit more modern? Traditional? Round? Or maybe square? You're sure to find it here!

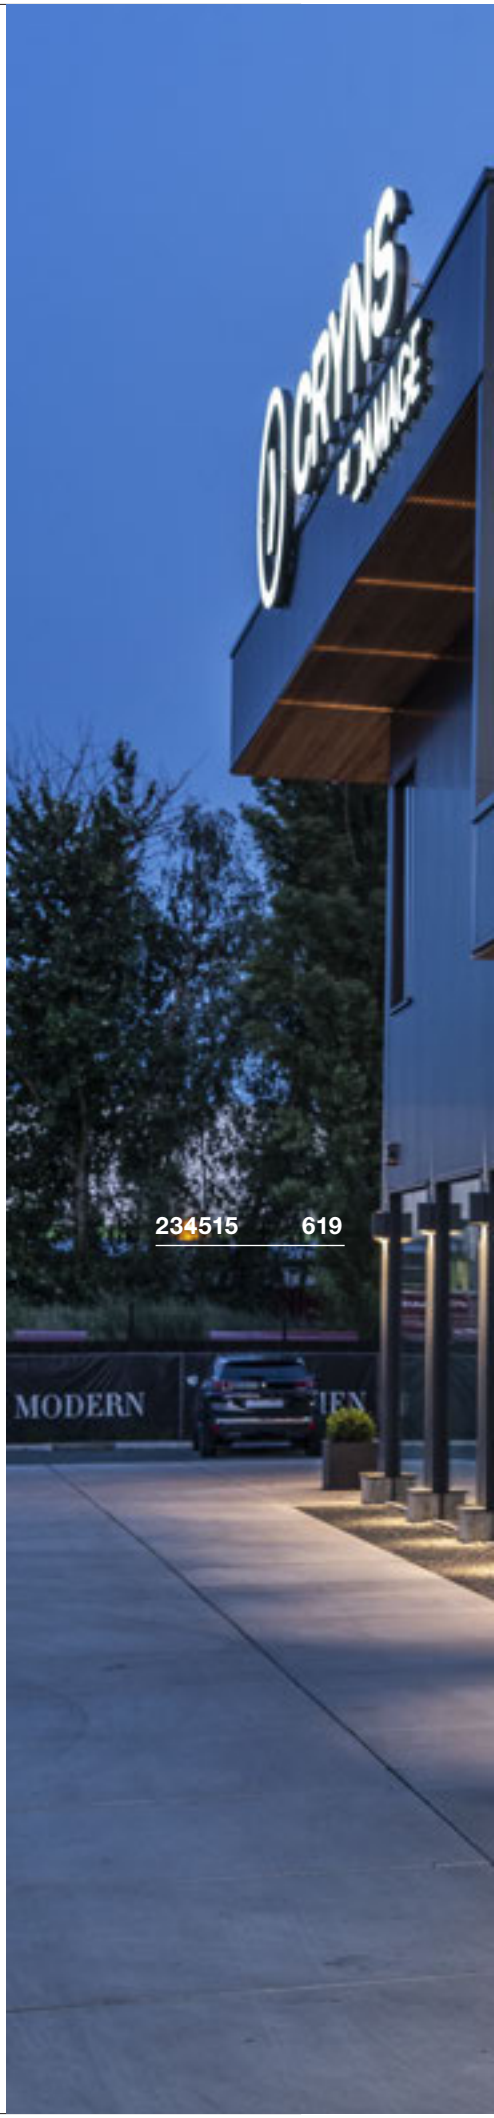




234525 620



WALL AND CEILING LIGHTS

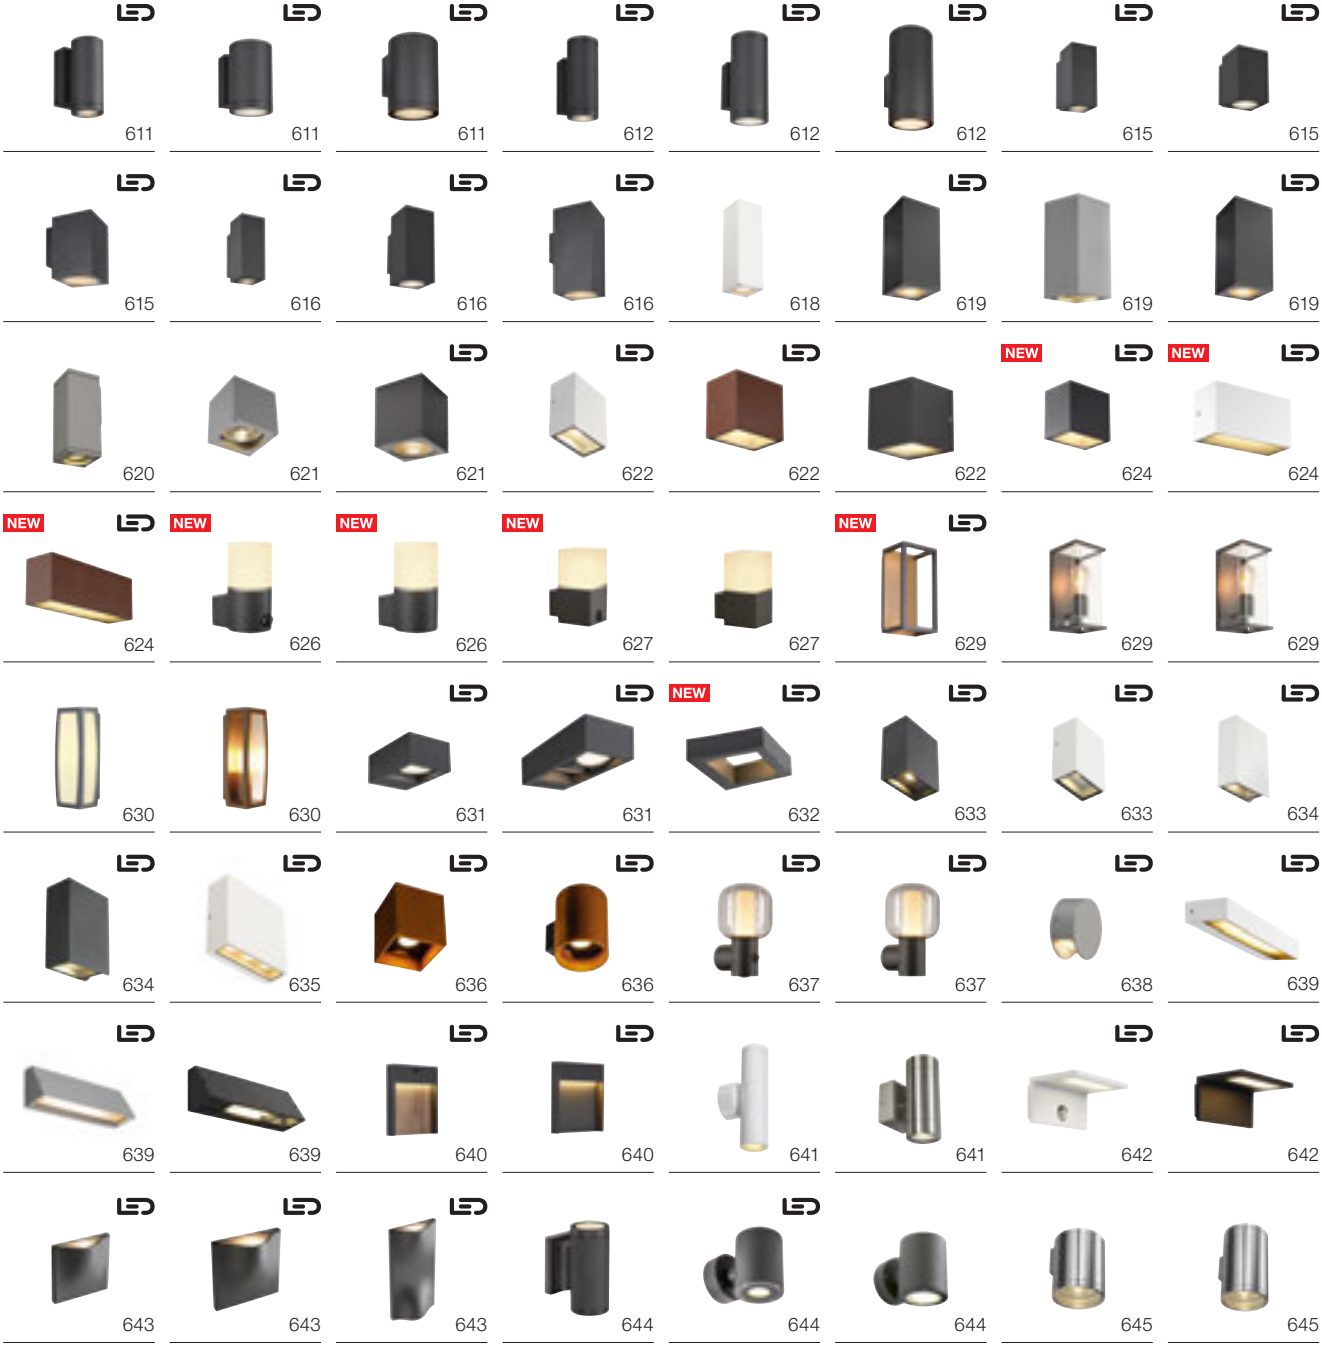



You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808

WALL LIGHTS




CRYNS
BY DAMAGE
234515 619
234525 620


1003423 + 1005206 611 + 617
1003423 + 1005207 611 + 617







ENOLA ROUND S
WL, single








450lm / 500lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 30° L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/glass

1003422	450/500lm 3000/4000K	A→G A E

Spacers
Prod. no. 1002853

Reflector, 60°
Prod. no. 1005262

Options	Prod. no.
450/500lm | 3000/4000K | CRI90	
anthracite	**1003422**

ENOLA ROUND M
WL, single








860lm / 980lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

1003423	860/980lm 3000/4000K	A→G A E

Spacers
Prod. no. 1002853

Lens, 19°
Prod. no. 1005205

Asymmetrical lens
Prod. no. 1005206

Reflector, 60°
Prod. no. 1005207

Options	Prod. no.
860/980lm | 3000/4000K | CRI90	
anthracite	**1003423**

ENOLA ROUND L
WL, single








3300lm / 3700lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

1003440	3300/3700lm 3000/4000K	A→G A E

Spacers
Prod. no. 1002853

Reflector, 60°
Prod. no. 1005263

Options	Prod. no.
3300/3700lm | 3000/4000K | CRI90	
anthracite	**1003440**

ENOLA ROUND S UP/DOWN WL








620lm / 700lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 30° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 7.8W
Material: aluminium/glass

Up/Down	310/350lm 3000/4000K

Spacers
Prod. no. 1002853

Reflector, 60°
Prod. no. 1005262

Options	Prod. no.
Up: 310/350lm | 3000/4000K | CRI90 Down: 310/350lm | 3000/4000K | CRI90	
anthracite	**1003424**

ENOLA ROUND M UP/DOWN WL








1660lm / 1900lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/glass

Up/Down	830/950lm 3000/4000K

Spacers
Prod. no. 1002853

Lens, 19°
Prod. no. 1005205

Asymmetrical lens
Prod. no. 1005206

Reflector, 60°
Prod. no. 1005207

Options	Prod. no.
Up: 830/950lm | 3000/4000K | CRI90 Down: 830/950lm | 3000/4000K | CRI90	
anthracite	**1003425**

ENOLA ROUND L UP/DOWN WL








5400lm / 6000lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 55W
Material: aluminium/glass

Up/Down	2700/3000lm 3000/4000K


Spacers
Prod. no. 1002853

Reflector, 60°
Prod. no. 1005263


Options	Prod. no.
Up: 2700/3000lm | 3000/4000K | CRI90 Down: 2700/3000lm | 3000/4000K | CRI90	
anthracite	**1003441**


1003424 612


1003441 612

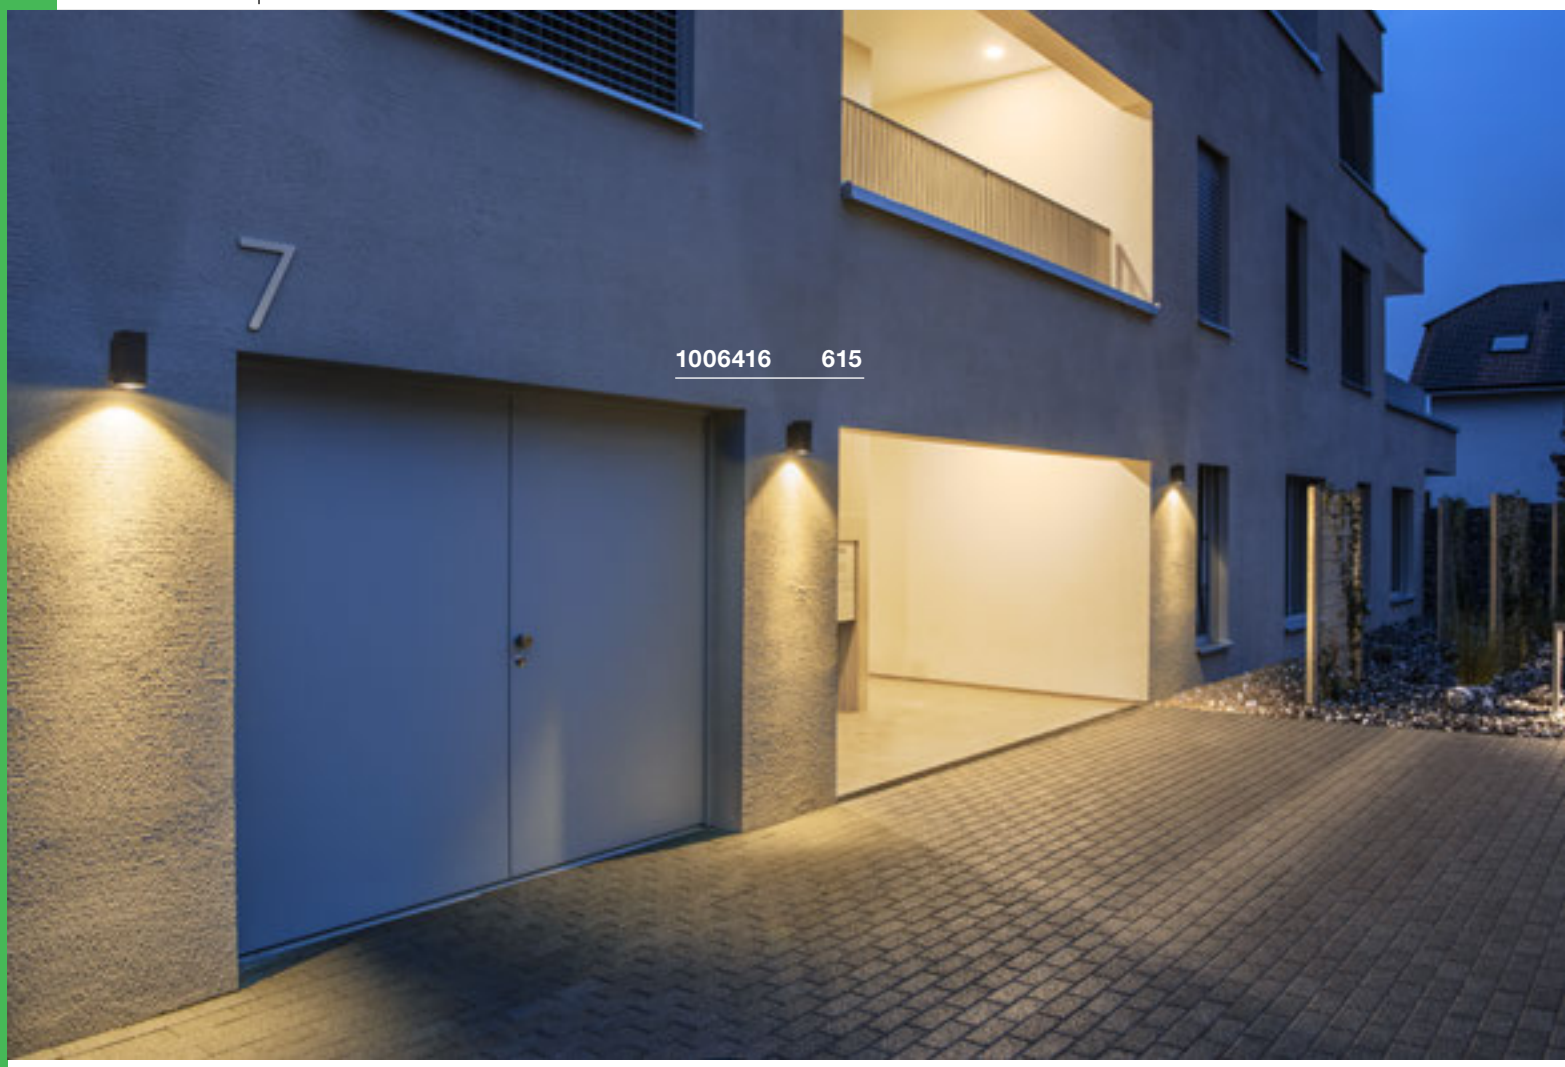

1006416 615

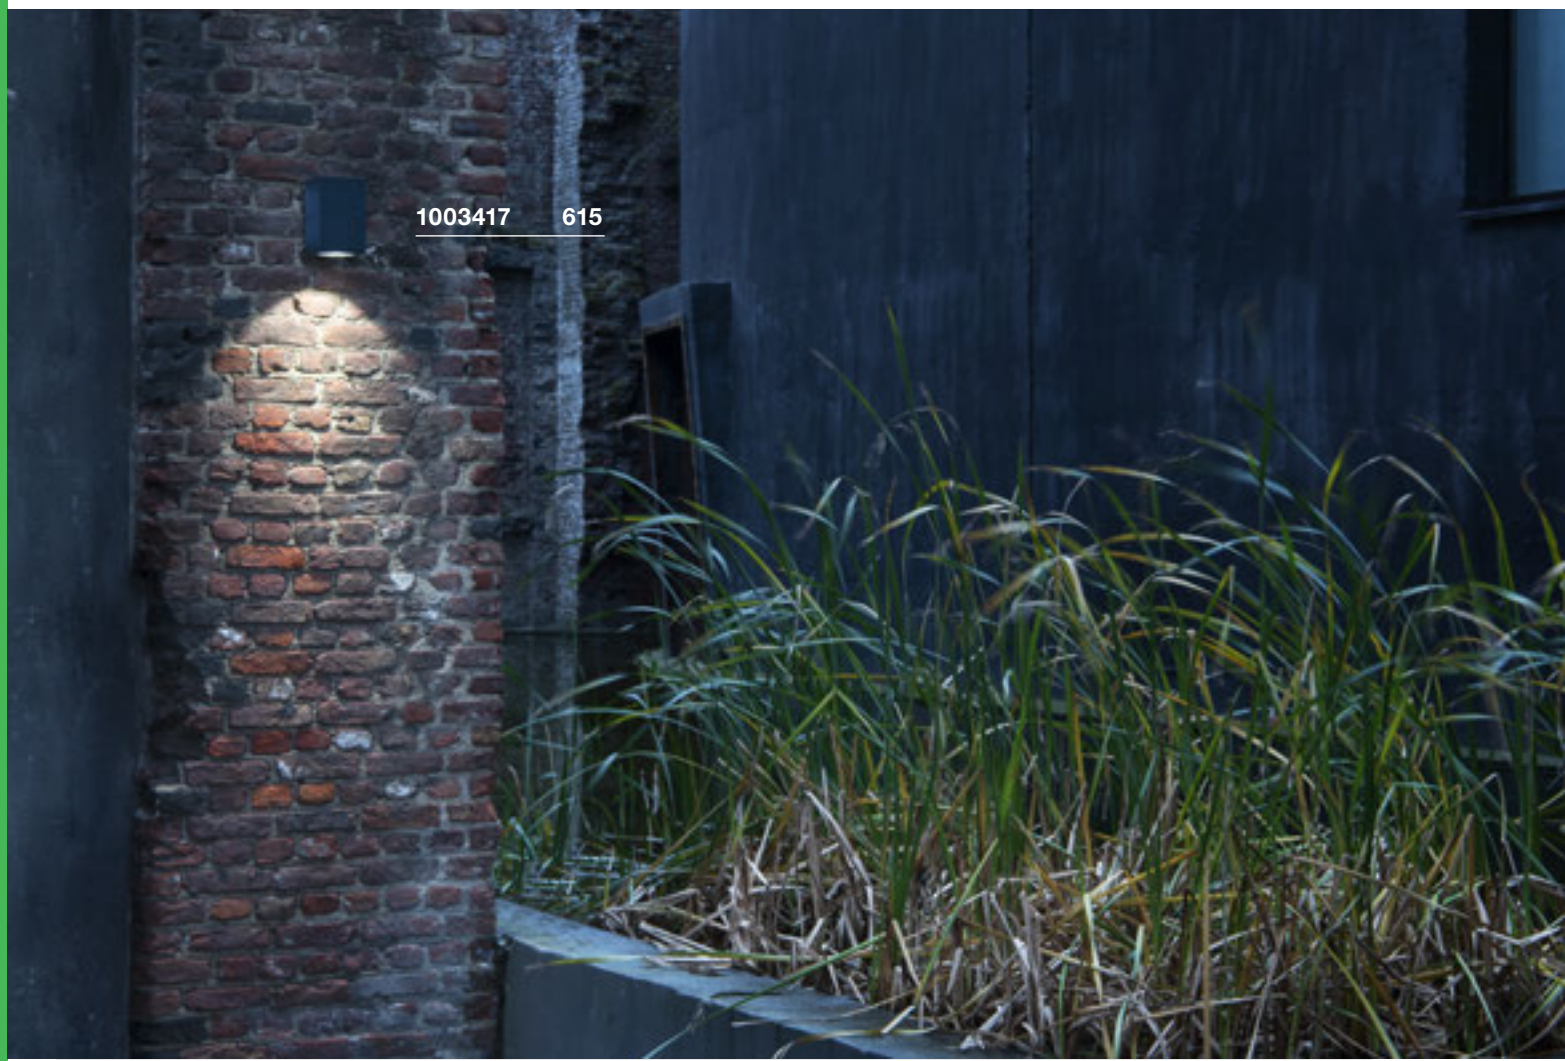

1003417 615


ENOLA SQUARE S
WL, single







450lm / 500lm
INSIDE
CRI 90
3000K / 4000K



IP 65 IK06 30° L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 6W
Material: aluminium/glass

1003416	450/500lm 3000/4000K	A→G

Spacers
Prod. no. 1002853
Reflector, 60°
Prod. no. 1005262

Options	Prod. no.
450/500lm | 3000/4000K | CRI90	
anthracite	**1003416**


ENOLA SQUARE M
WL, single







860lm / 980lm
INSIDE
CRI 90
3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

1003417	860/980lm 3000/4000K	A→G

Spacers
Prod. no. 1002853
Lens, 19°
Prod. no. 1005205
Asymmetrical lens
Prod. no. 1005206
Reflector, 60°
Prod. no. 1005207

Options	Prod. no.
860/980lm | 3000/4000K | CRI90	
anthracite	**1003417**


ENOLA SQUARE L
WL, single







3300lm / 3700lm
INSIDE
CRI 90
3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

1003437	3300/3700lm 3000/4000K	A→G

Spacers
Prod. no. 1002853
Reflector, 60°
Prod. no. 1005263

Options	Prod. no.
3300/3700lm | 3000/4000K | CRI90	
anthracite	**1003437**

ENOLA SQUARE S UP/DOWN WL








620lm / 700lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 30° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 7.8W
Material: aluminium/glass

Up/Down	310/350lm 3000/4000K

Spacers
Prod. no. 1002853

Reflector, 60°
Prod. no. 1005262

Options	Prod. no.
Up: 310/350lm | 3000/4000K | CRI90 Down: 310/350lm | CRI90	
anthracite	**1003418**

ENOLA SQUARE M UP/DOWN WL








1660lm / 1900lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 20W
Material: aluminium/glass

Up/Down	830/950lm 3000/4000K

Spacers
Prod. no. 1002853

Lens, 19°
Prod. no. 1005205

Asymmetrical lens
Prod. no. 1005206

Reflector, 60°
Prod. no. 1005207

Options	Prod. no.
Up: 830/950lm | 3000/4000K | CRI90 Down: 830/950lm | 3000/4000K |CRI90	
anthracite	**1003419**

ENOLA SQUARE L UP/DOWN WL








5400lm / 6000lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 55W
Material: aluminium/glass

Up/Down	2700/3000lm 3000/4000K

Spacers
Prod. no. 1002853

Reflector, 60°
Prod. no. 1005263

Options	Prod. no.
Up: 2700/3000lm | 3000/4000K | CRI90 Down: 2700/3000lm | CRI90	
anthracite	**1003438**



ENOLA S, M, L
Reflector, 56°

NEW



H: 1.85 cm Diameter: 4.5 cm | S
H: 4 cm Diameter: 7.5 cm | M
H: 6.96 cm Diameter: 11 cm | L
Material: polycarbonate (PC)



Options	Prod. no.
chrome | S	1005262
chrome | M	1005207
chrome | L	1005263

ENOLA M
Lens, 19°

NEW



H: 3.8 cm
Diameter: 7.5 cm
Material: steel/polycarbonate (PC)



Options	Prod. no.
black/chrome	1005205

ENOLA M
Asymmetrical lens

NEW



H: 3 cm
Diameter: 7.5 cm
Material: steel/polycarbonate (PC)



Options	Prod. no.
black/chrome	1005206






THEO UP/DOWN
WL, QPAR51







SOCKET INSIDE <35 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <35W


LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
2xGU10 anthracite	**229535**
2xGU10 white	**229531**
2xGU10 grey	**229532**
2xGU10 aluminium	**1000331**

BIG THEO BEAM UP/ FLOOD DOWN
WL



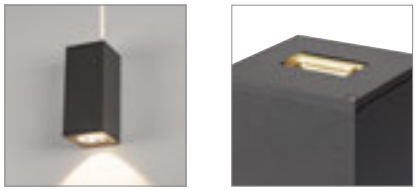

2130lm
3000K
CRI 80



IP 44 IK02 24° 2° L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 29W
Material: aluminium/glass

		A→G
Down	2000lm 3000K	E
Beam	130lm 3000K	F


Options	Prod. no.
Down: 2000lm | 3000K | CRI80 Beam: 130lm | 3000K | CRI80	
anthracite	**234515**

BIG THEO UP/DOWN
WL, QPAR111



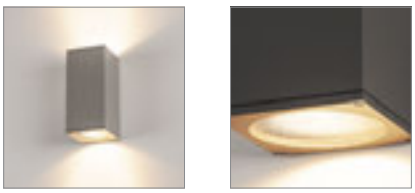

SOCKET INSIDE <75 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <75W

QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h




Prod. no. 1005276


Options	Prod. no.
2xGU10 anthracite	**229575**
2xGU10 grey	**229574**

BIG THEO FLOOD UP/DOWN
WL



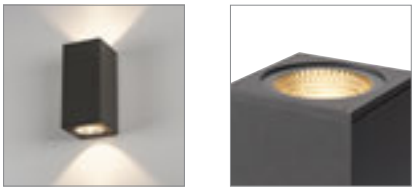

4000lm
3000K
CRI 80



IP 44 IK02 24° 24° L70B50

220-240V ~50/60Hz | 1000mA
Total wattage: 42W
Material: aluminium/glass


		A→G
Up/Down	2000lm 3000K	E

Options	Prod. no.
Up: 2000lm | 3000K | CRI80 Down: 2000lm | 3000K | CRI80	
anthracite	**234505**


THEO
WL, QPAR51







SOCKET INSIDE <35 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <35W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h

Prod. no. 1004973


Options	Prod. no.
1xGU10	
anthracite	**229525**
1xGU10	
grey	**229524**








BIG THEO
WL, QPAR111







SOCKET INSIDE <75 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <75W

QPAR111 | 12.5W | 60°
2700K | 1040lm | EEK=F
13kWh/1000h




Prod. no. 1005277

Options	Prod. no.
1xGU10	
anthracite	**229565**
1xGU10	
grey	**229564**


BIG THEO
WL







2000lm
3000K
LED INSIDE CRI 80



IP 44 IK02 24° L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass


234525	2000lm 3000K	A→G A↑G E

Options	Prod. no.
2000lm | 3000K | CRI80	
anthracite	**234525**


BIG QUAD
WL







290lm
3000K
CRI 80



IP 44 IK05 110° L70B50

100-277V ~50/60Hz | 350mA
Total wattage: 4.5W
Material: aluminium/glass

232431	290lm 3000K

A→G
F

Options	Prod. no.
290lm | 3000K | CRI80	
white	**232431**

SITRA CUBE
WL


CCT







1100lm / 1270lm
3000K / 4000K
CRI 80



IP 44 IK05 105° 105° L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Light color can be selected using the switch inside the housing

Up/Down	550/635lm 3000/4000K

A→G
D

Options	Prod. no.
Up: 550/635lm | 3000/4000K | CRI80 Down: 550/635lm | 3000/4000K | CRI80	
anthracite	**1002032**
Up: 550/635lm | 3000/4000K | CRI80 Down: 550/635lm | 3000/4000K | CRI80	
white	**1002033**
Up: 550/635lm | 3000/4000K | CRI80 Down: 550/635lm | 3000/4000K | CRI80	
rust	**1002034**


SITRA CUBE
WL, TCR-TSE







SOCKET INSIDE
<9 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GX53 <9W
Diameter: 7.5 cm L: 2.7 cm


LED GX53 | 6W | 120°
4000K | 550lm | EEK=F
6kWh/1000h

C,L

Prod. no. 1005269

Options	Prod. no.
2xGX53	
anthracite	**232535**
2xGX53	
white	**232531**
2xGX53	
rust	**232537**


232537 623

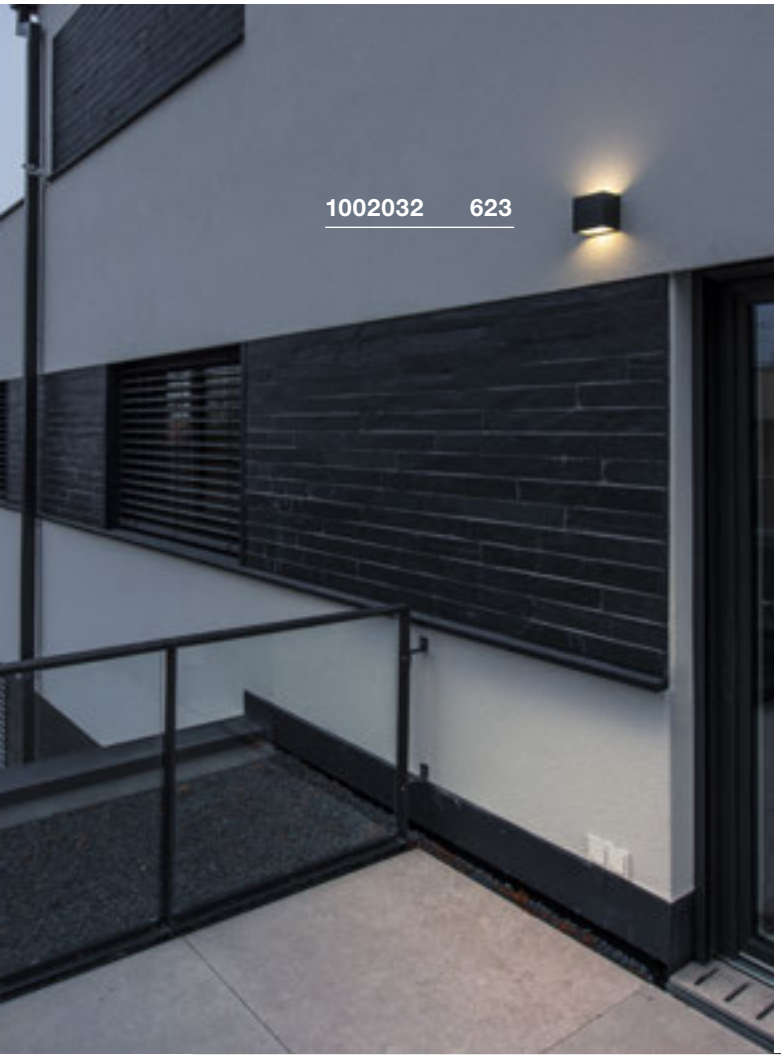
1002032 623


1002034 623

SITRA S
WL, single, square

NEW

CCT








580lm / 620lm

INSIDE CRI 80

3000K / 4000K



IP 44 IK05 105° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 6.2W
Material: aluminium/glass

1005148, 1005149, 1005150	580/620lm 3000/4000K	A→G D

Options	Prod. no.
580/620 lm | 3000/4000 K | CRI80	
anthracite	**1005148**
580/620 lm | 3000/4000 K | CRI80	
white	**1005149**
580/620 lm | 3000/4000 K | CRI80	
rust	**1005150**


SITRA M
WL, up/down, square

NEW

CCT








1600lm / 1700lm

INSIDE CRI 80

3000K / 4000K



IP 44 IK05 95° 95° L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/glass

Up/Down	800/850lm 3000/4000K	A→G D

Options	Prod. no.
Up: 800/850lm | 3000/4000K | CRI80 Down: 800/850lm | 3000/4000K | CRI80	
anthracite	**1005151**
Up: 800/850lm | 3000/4000K | CRI80 Down: 800/850lm | 3000/4000K | CRI80	
white	**1005153**
Up: 800/850lm | 3000/4000K | CRI80 Down: 800/850lm | 3000/4000K | CRI80	
rust	**1005154**

SITRA L
WL, up/down, square

NEW

CCT








2700lm / 2800lm

INSIDE CRI 80

3000K / 4000K




IP 44 IK05 105° 105° L70B50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 24W
Material: aluminium/glass

Up/Down	1350/1400lm 3000/4000K	A→G D

Options	Prod. no.
Up: 1350/1400lm | 3000/4000K | CRI80 Down: 1350/1400lm | 3000/4000K | CRI80	
anthracite	**1005155**
Up: 1350/1400lm | 3000/4000K | CRI80 Down: 1350/1400lm | 3000/4000K | CRI80	
white	**1005156**
Up: 1350/1400lm | 3000/4000K | CRI80 Down: 1350/1400lm | 3000/4000K | CRI80	
rust	**1005157**

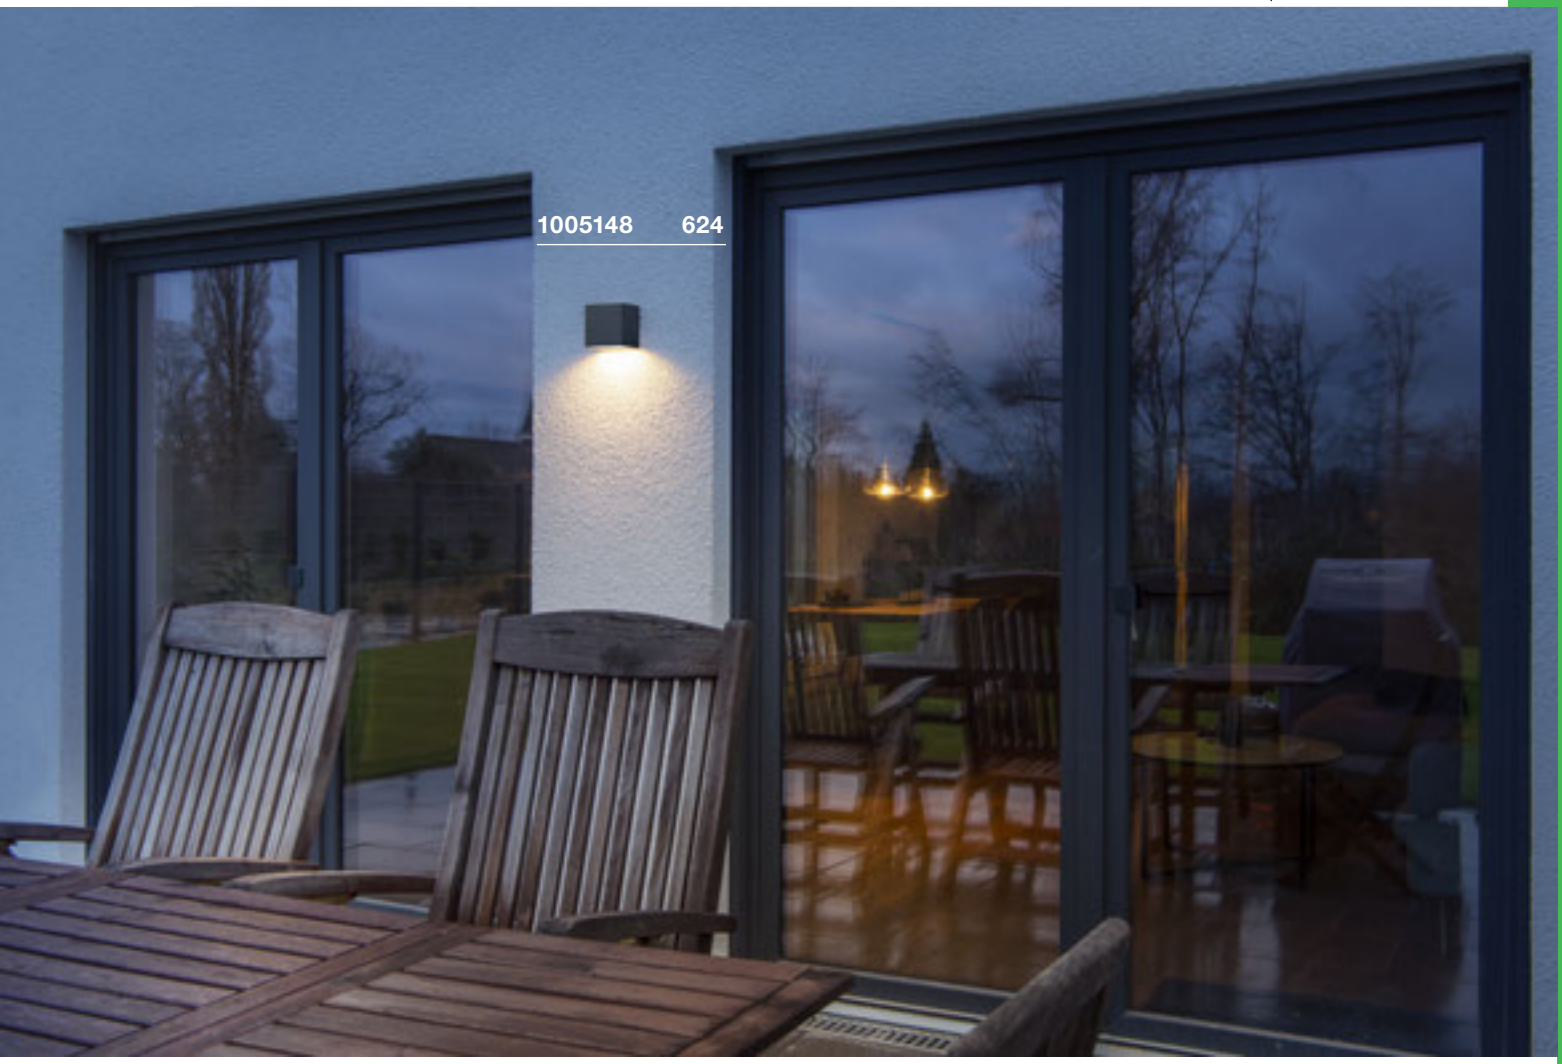
1005148 624



1005151 624

GRAFIT SENSOR
WL, round, E27

NEW


IR







SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 9W | 220°
2700K | 800lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
anthracite	**1006179**

GRAFIT
WL, round, E27


NEW







SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic


E27 <11W
Diameter: 6 cm L: 11.5 cm


LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005303

Options	Prod. no.
1xE27	
anthracite	**1006178**



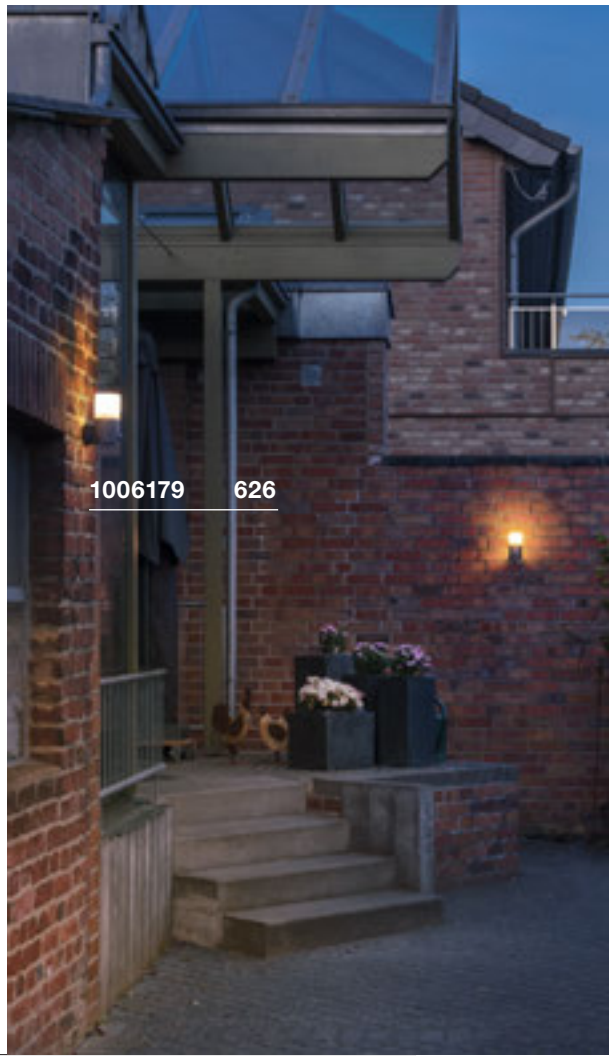

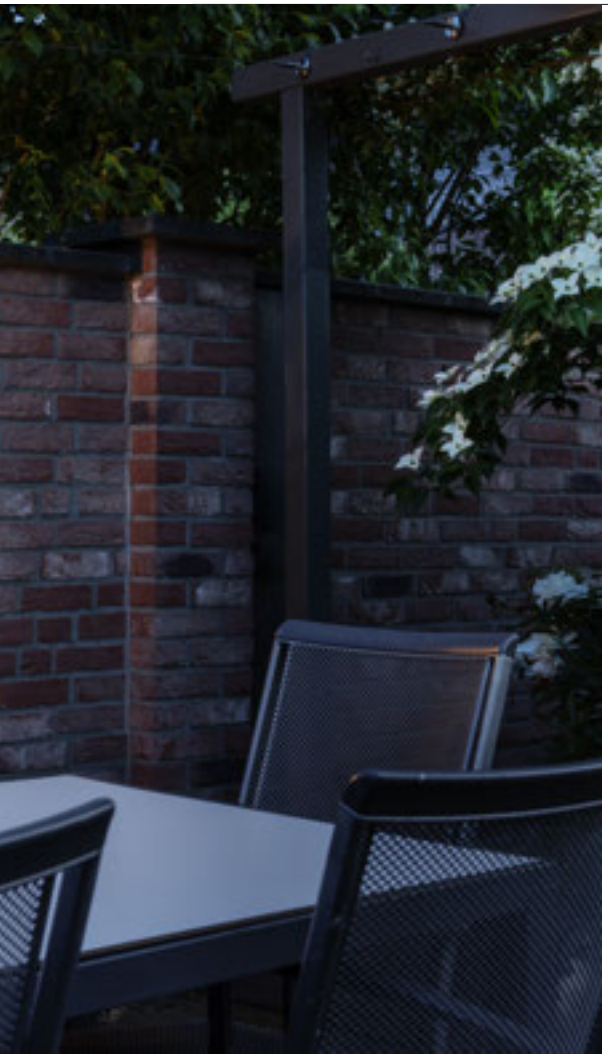




GRAFIT SENSOR
WL, square, E27

NEW


IR







SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/acrylic

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 13.2W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

C,L

Prod. no. 1005302

Options	Prod. no.
1xE27	
anthracite	**1006183**


GRAFIT
WL, square, E27







SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/plastic

E27 <11W
Diameter: 6 cm L: 11.5 cm

LED E27 | 9W | 220°
2700K | 770lm | EEK=F
9kWh/1000h

C,L

Prod. no. 1005301

Options	Prod. no.
1xE27	
anthracite	**231205**



1002402 629




1002403 629

QUADRULO
WL


NEW







270lm
LED INSIDE
3000K
CRI 80



IP 55 IK04 L70B50 20

100-277V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium/acrylic

		A→G
1005201	270lm 3000K	E

Options	Prod. no.
270 lm | 3000 K | CRI80	
anthracite	**1005201**

QUADRULO SENSOR
WL, E27


IR







SOCKET INSIDE <15 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

E27 <15W
Diameter: 8 cm L: 18 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h



Prod. no. 1005265

Options	Prod. no.
1xE27	
anthracite	**1002402**


QUADRULO
WL, E27







SOCKET INSIDE <15 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

E27 <15W
Diameter: 8 cm L: 18 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h



Prod. no. 1005265

Options	Prod. no.
1xE27	
anthracite	**1002403**

MERIDIAN BOX SENSOR
WL, E27


IR







SOCKET INSIDE <25 W



IP 54

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

- The ambient brightness and operating time can be adjusted

E27 <25W
Diameter: 7 cm L: 17.5 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

C,L

Prod. no. 1005289

Options	Prod. no.
1xE27	
anthracite	**230085**
1xE27	
grey	**230084**


MERIDIAN BOX
WL, E27







SOCKET INSIDE <25 W



IP 54

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

E27 <25W
Diameter: 7 cm L: 17.5 cm


LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h


C,L

Prod. no. 1005265

Options	Prod. no.
1xE27	
anthracite	**230655**
1xE27	
rust	**230657**



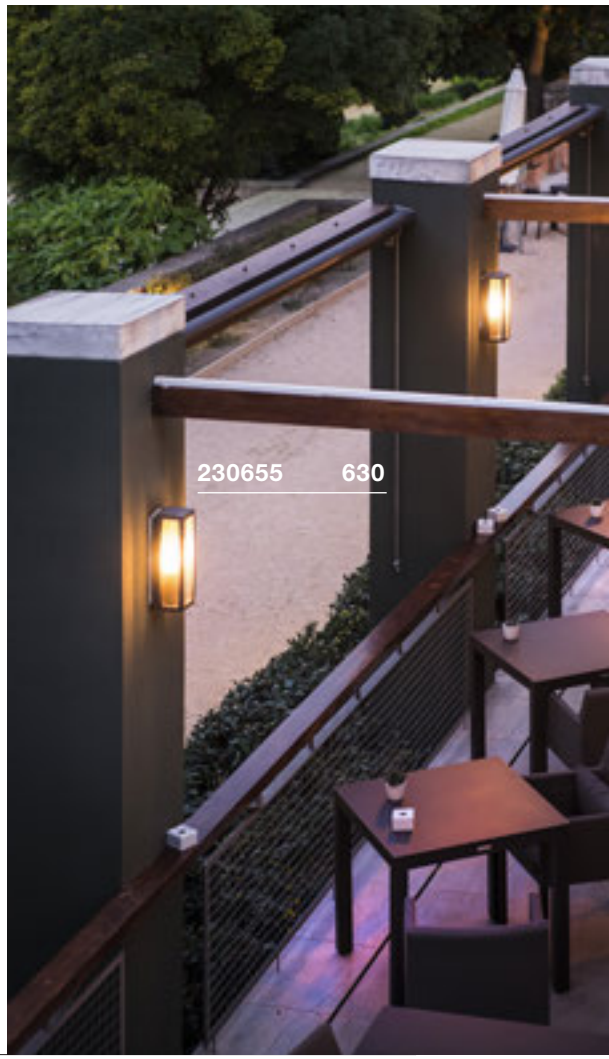


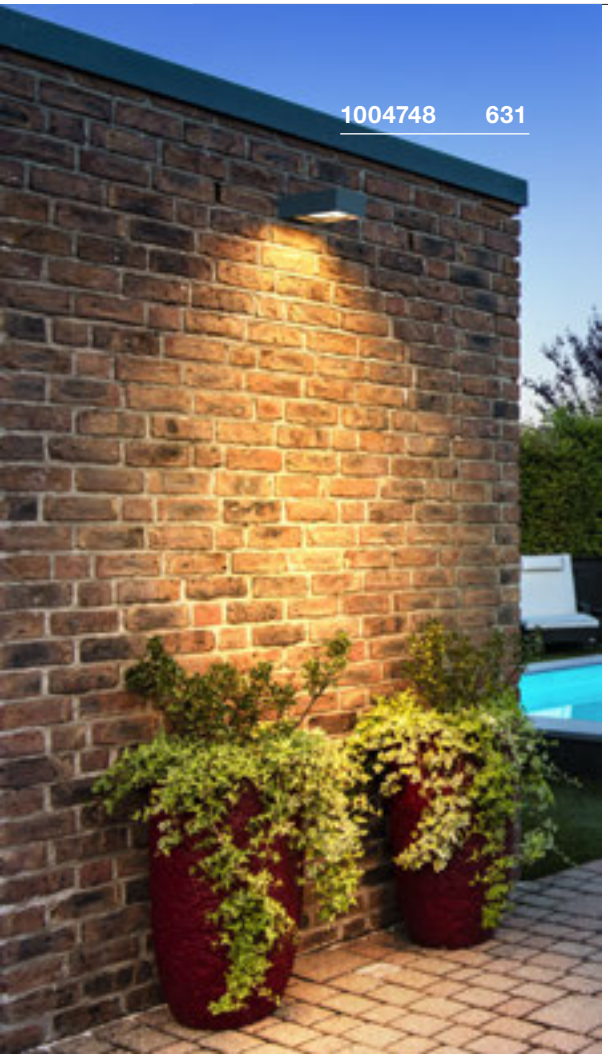



ESKINA FRAME
WL

CCT






1100lm / 1200lm

INSIDE

CRI 80

3000K / 4000K



IP 65 | IK02 | 95° | L70B50 | 320°

220-240V ~50/60Hz | 350mA
Total wattage: 15W
Material: aluminium


1004747	1100/1200lm 3000/4000K	A→G / A↑G D

Options	Prod. no.
1100/1200lm | 3000/4000K | CRI80	
anthracite	**1004747**

ESKINA FRAME
WL, double

CCT



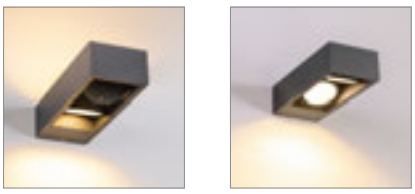


2200lm / 2400lm

INSIDE

CRI 80

3000K / 4000K



IP 65 | 95° | 95° | L70B50 | 320° / 320°

220-240V ~50/60Hz | 700mA
Total wattage: 27W
Material: aluminium


Spot1/Spot2	1100/1200lm 3000/4000K	A→G / A↑G D


Options	Prod. no.
Spot 1: 1100/1200lm | 3000/4000K | CRI80 Spot 2: 1100/1200lm | 3000/4000K | CRI80	
anthracite	**1004748**

BOOKAT
WL

NEW

CCT








920lm / 990lm

LED INSIDE

CRI 80

3000K / 4000K



IP 65 | IK05 | L70B50 | 20


100-277V ~50/60Hz | 700mA
Total wattage: 15W
Material: aluminium

		A→G
1005443	920/990lm 3000/4000K	A→G D

Options	Prod. no.
920/990lm | 3000/4000K | CRI80	
anthracite	1005443






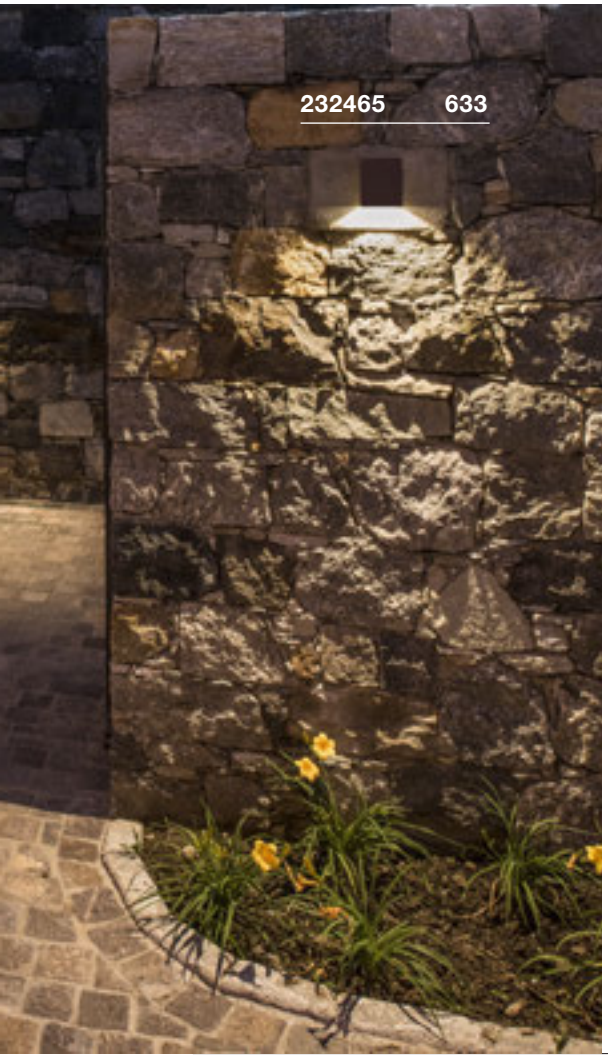


BIG QUAD
WL



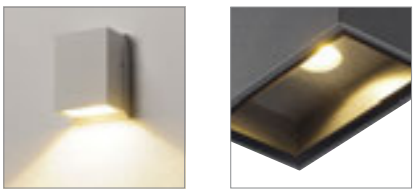

260lm
3000K
CRI 96




IP 44 IK05 110° L70B50

100-277V ~50/60Hz | 350mA
Total wattage: 4.5W
Material: aluminium/glass

232435	260lm 3000K	A→G F


Options	Prod. no.
260lm | 3000K | CRI96	
anthracite	**232435**

QUAD
WL





80|100lm
3000K
CRI 80



IP 44 90° L70B50


200-240V ~50/60Hz | 700mA
Total wattage: 4.6W
Material: aluminium/glass

232465, 232461	80lm | 100lm 3000K	A→G G


Options	Prod. no.
80lm | 3000K | CRI80	
anthracite	**232465**
100lm | 3000K | CRI80	
white	**232461**

QUAD UP/DOWN 12
WL



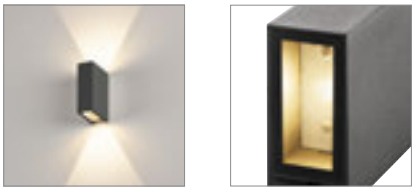

250lm
|
3000K

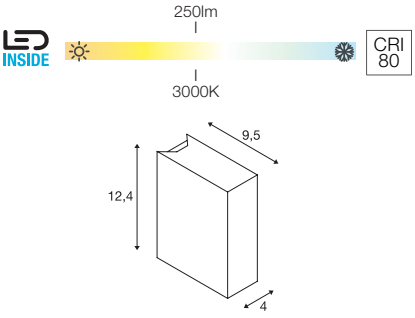

IP 44 60° 60° L70B50


100-277V ~50/60Hz | 700mA
Total wattage: 6.4W
Material: aluminium/glass

QUAD UP/DOWN 15
WL





520|580lm
|
3000K

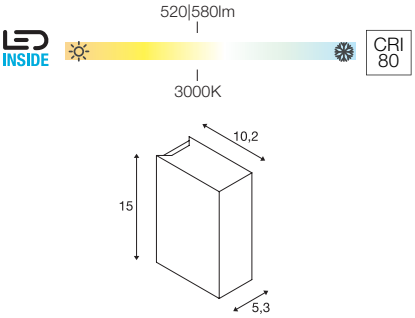

IP 44 110° 110° L70B50

100-277V ~50/60Hz | 350mA
Total wattage: 8W
Material: aluminium/glass


Up/Down	125lm 3000K	A→G A G

Up/Down	260lm | 290lm 3000K	A→G A G

Options	Prod. no.
Up: 125lm | 3000K | CRI80 Down: 125lm | 3000K | CRI80	
anthracite	**232475**
Up: 125lm | 3000K | CRI80 Down: 125lm | 3000K | CRI80	
white	**232471**

Options	Prod. no.
Up: 260lm | 3000K | CRI80 Down: 260lm | CRI80	
anthracite	**232445**
Up: 290lm | 3000K | CRI80 Down: 290lm | 3000K | CRI80	
white	**232441**



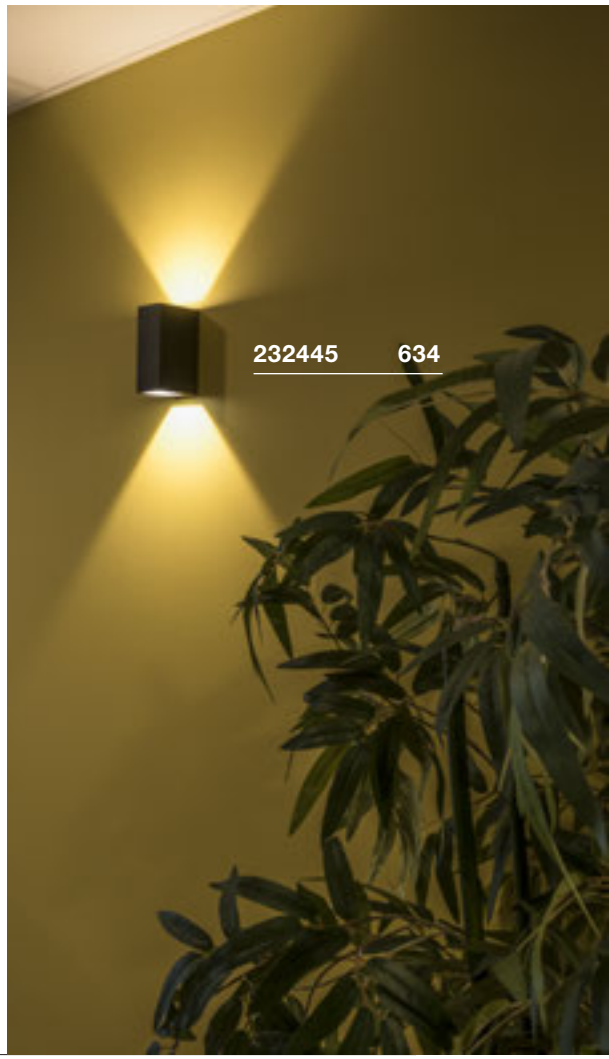



BIG QUAD UP/DOWN
WL











640lm







200-240V ~50/60Hz | 350mA
Total wattage: 8.2W
Material: aluminium/glass

		A→G
Up/Down	320lm 3000K	E

Options	Prod. no.
Up: 320lm | 3000K | CRI80 Down: 320lm | 3000K | CRI80 anthracite	**1005126**
Up: 320lm | 3000K | CRI80 Down: 320lm | 3000K | CRI80 white	**1005125**

RUSTY® UP/DOWN
WL, square








544lm / 548lm

INSIDE CRI 80

3000K / 4000K



IP 65 | IK02 | 65° | 65° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium

		A→G
Up	259/260lm 3000/4000K	E
Down	285/288lm 3000/4000K	E

Options	Prod. no.
Up: 259/260lm | 3000/4000K | CRI80 Down: 285/288lm | 3000/4000K | CRI80	
rust	**1004650**

RUSTY® UP/DOWN
WL, round








516lm / 525lm

INSIDE CRI 80

3000K / 4000K





IP 65 | IK02 | 65° | 65° | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: FeCSi stainless steel/aluminium

		A→G
Up	249/254lm 3000/4000K	E
Down	267/271lm 3000/4000K	E

Options	Prod. no.
Up: 249/254lm | 3000/4000K | CRI80 Down: 267/271lm | 3000/4000K | CRI80	
rust	**1004651**

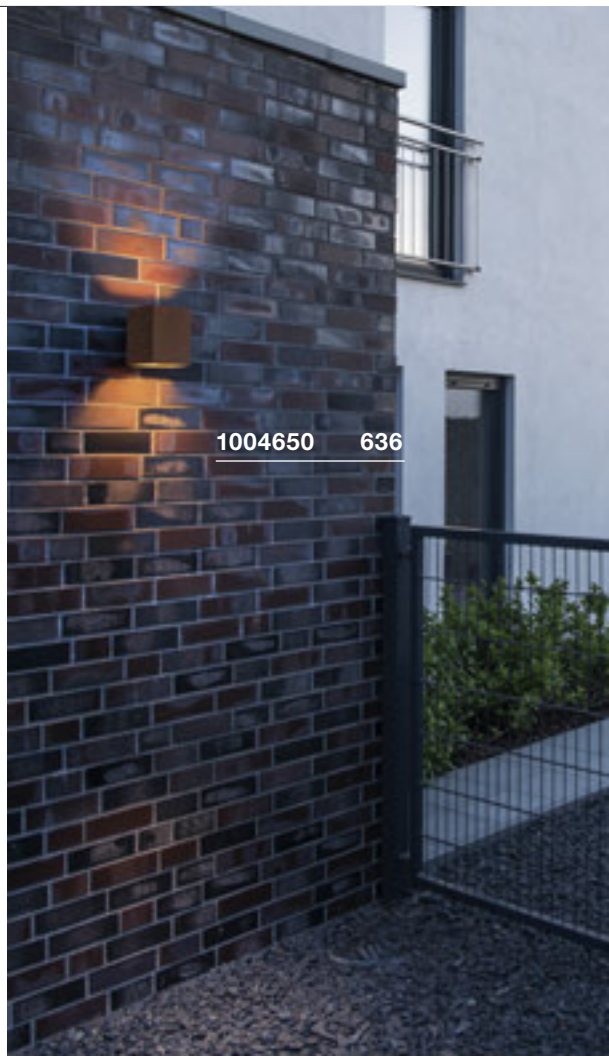

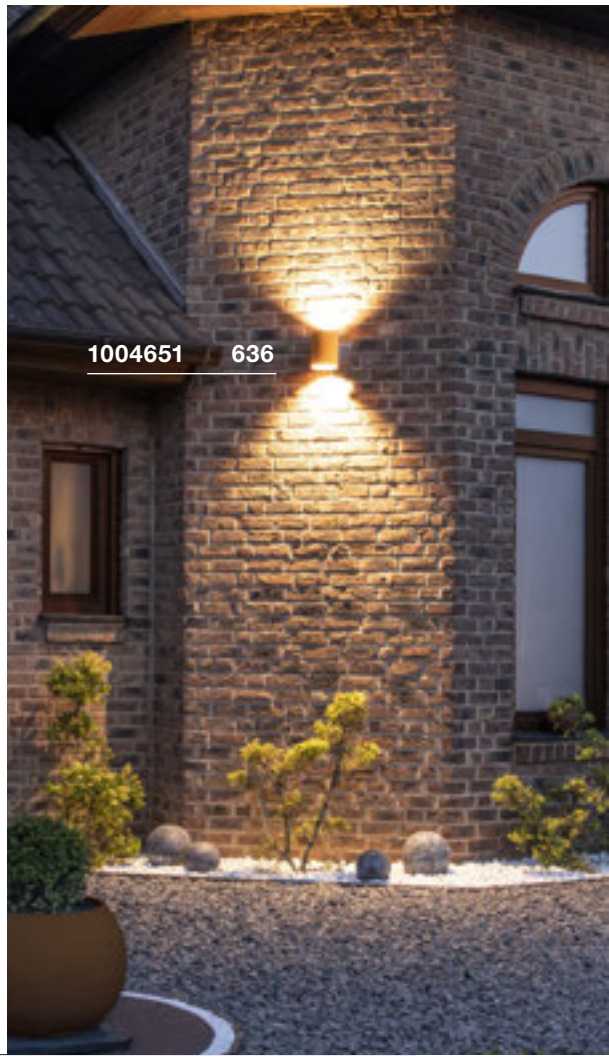



1004679 637

OVALISK SENSOR
WL

CCT

IR








580lm / 630lm

INSIDE

CRI 80

3000K / 4000K



IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.6W
Material: aluminium/glass

		A→G
1004679	580/630lm 3000/4000K	D

Options	Prod. no.
580/630lm | 3000/4000K | CRI80	
anthracite	**1004679**

OVALISK
WL

CCT








580lm / 630lm

INSIDE

CRI 80

3000K / 4000K



IP 65 IK02 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9.2W
Material: aluminium/glass


		A→G
1004678	580/630lm 3000/4000K	D

Options	Prod. no.
580/630lm | 3000/4000K | CRI80	
anthracite	**1004678**


PEMA®
WL







170lm
I
INSIDE
I
3000K
CRI 80



IP 44 L70B50


220-240V ~50/60Hz
Total wattage: 3.8W
Material: aluminium/glass

- IP44 protection rating only when mounted with light emission downwards.


		A→G
231015, 231010, 231012	170lm 3000K	A↑ G F


Options	Prod. no.
170lm | 3000K | CRI80 anthracite	**231015**
170lm | 3000K | CRI80 white	**231010**
170lm | 3000K | CRI80 grey	**231012**



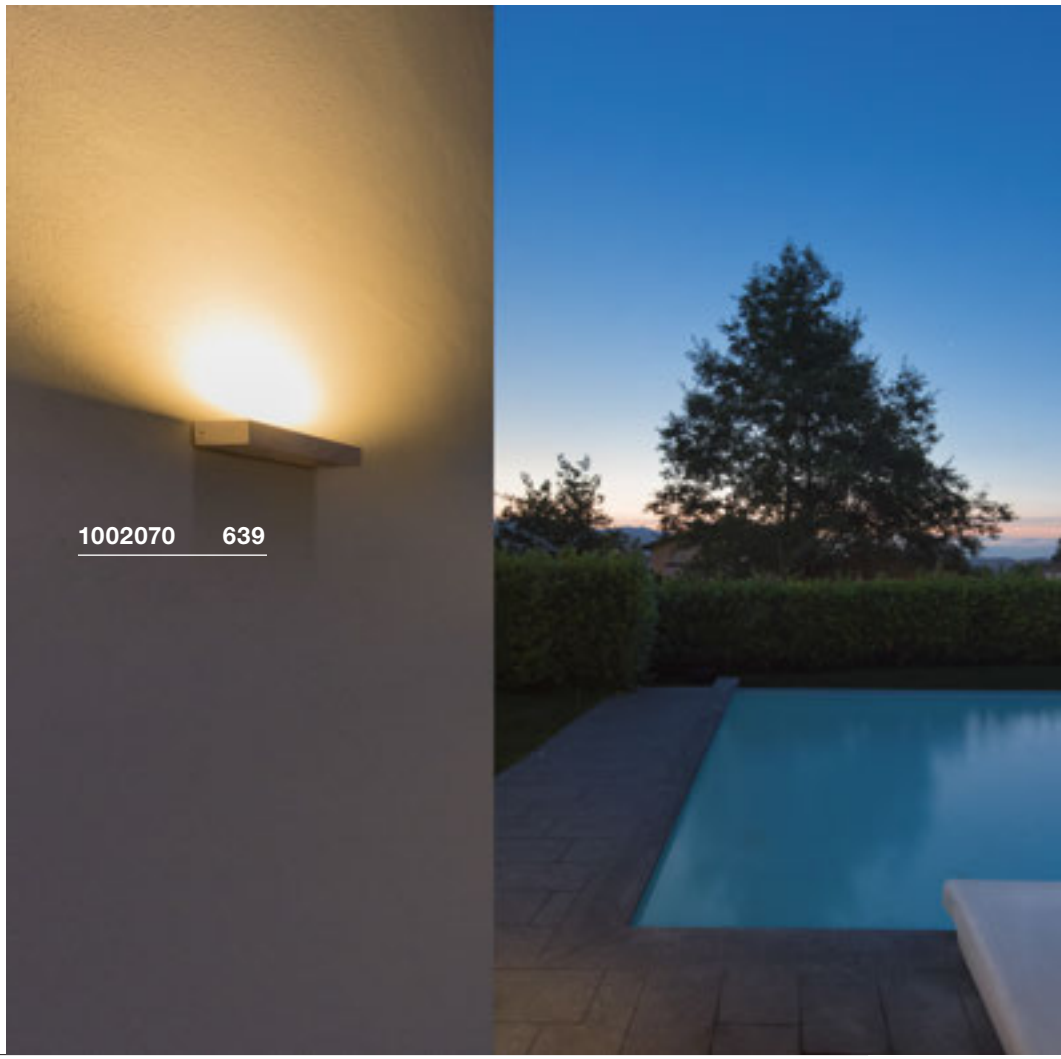


PEMA®
WL



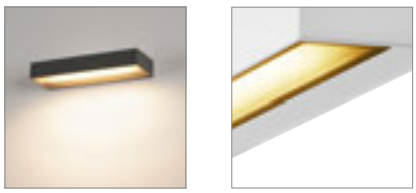

640lm
3000K
CRI 80



IP 54 IK05 110° L70B50

220-240V ~50/60Hz
Total wattage: 7.7W
Material: aluminium/glass

- Protection rating IP54 only when mounted with light emission downwards.

1002069, 1002070	640lm 3000K	E


Options	Prod. no.
640lm | 3000K | CRI80	
anthracite	**1002069**
640lm | 3000K | CRI80	
white	**1002070**

PEMA®
WL





1340lm / 1420lm
3000K / 4000K
CRI 80



IP 65 IK02 L70B50


100-277V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/glass

1003453, 1003454	1340/1420lm 3000/4000K	D


Options	Prod. no.
1340/1420lm | 3000/4000K | CRI80	
black	**1003453**
1340/1420lm | 3000/4000K | CRI80	
grey	**1003454**

PEMA®
WL, E27



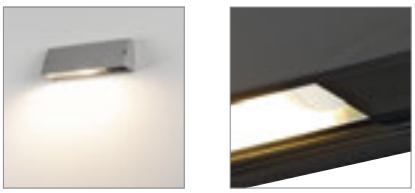

SOCKET INSIDE <15 W



IP 65 20

220-240V ~50/60Hz
Material: aluminium/glass

E27 <15W
Diameter: 4.5 cm L: 21 cm

LED E27| 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
1xE27	
black	**230030**
1xE27	
grey	**230034**

FLATT SENSOR
WL










600lm / 600lm

INSIDE CRI 80

3000K / 4000K



IP 54 IK03 L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 16W
Material: aluminium

1002954, 1002955	600lm 3000/4000K	A→G E

Options	Prod. no.
600lm | 3000/4000K | CRI80	
anthracite	**1002954**
600lm | 3000/4000K | CRI80	
anthracite/brown	**1002955**

FLATT
WL










460|500lm / 460|500lm

INSIDE CRI 80

3000K / 4000K




IP 65 IK03 L70B50


100-277V ~50/60Hz | 300mA
Total wattage: 14W
Material: aluminium


1002952, 1002953	460lm | 500lm 3000/4000K	A→G E

Options	Prod. no.
460lm | 3000/4000K | CRI80	
anthracite	**1002952**
500lm | 3000/4000K | CRI80	
anthracite/brown	**1002953**



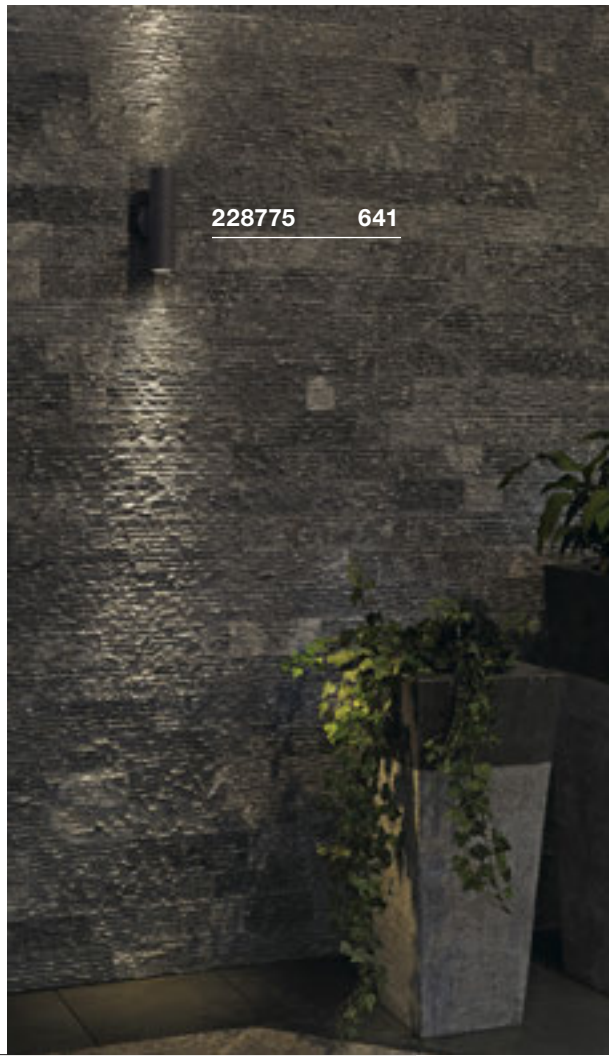

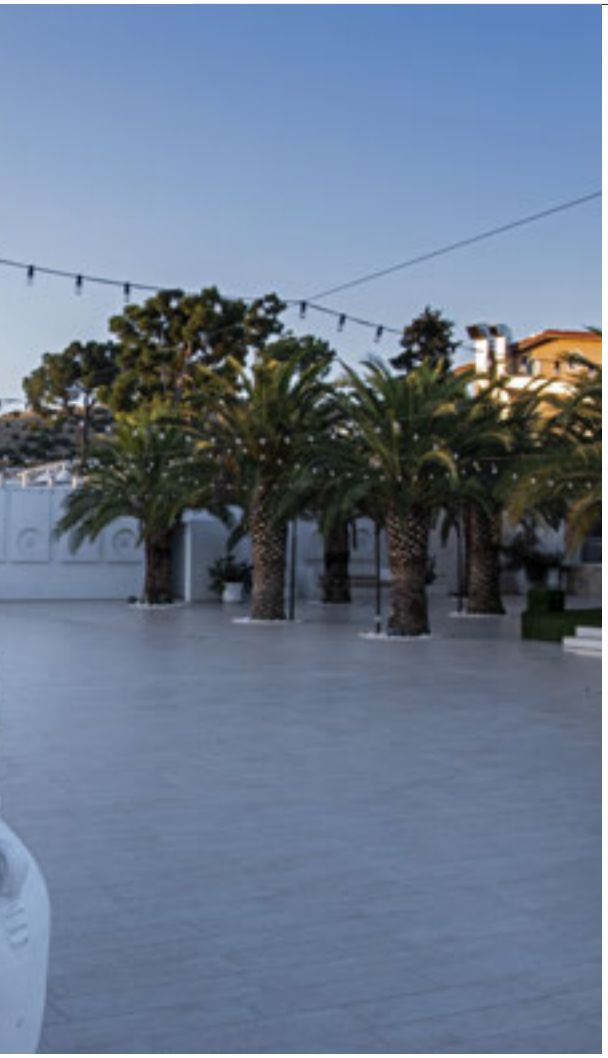

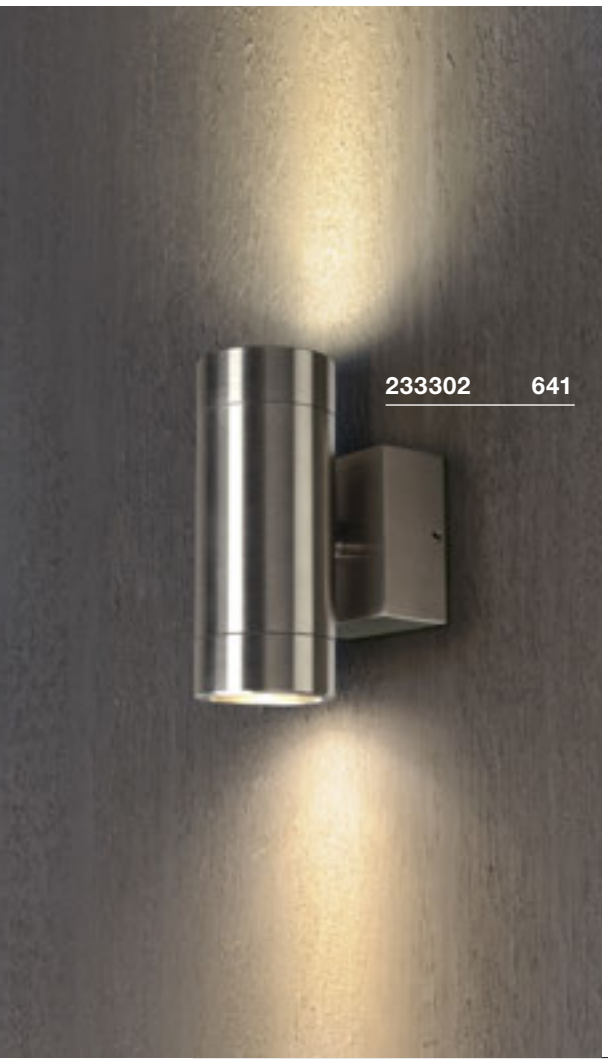


233302 641

ASTINA
WL, QPAR51










SOCKET INSIDE <11 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <11W
L: 9 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
2xGU10 anthracite	**228775**
2xGU10 white	**228771**
2xGU10 aluminium	**228776**

ASTINA STEEL
WL, QPAR51










SOCKET INSIDE <35 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel

GU10 <35W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004973


Options	Prod. no.
2xGU10 stainless steel	**233302**

ANGOLUX SENSOR
WL





750lm
|
LED INSIDE — CRI 80
|
3000K



IP 44 | IK02 | 100° | L80B50

100-240V ~50/60Hz | 240mA
Total wattage: 9.8W
Material: aluminium/plastic

- Angle of coverage 120°. Max. coverage distance 9m. Adjustable response sentivity and operating time
- IP44 protection rating only when mounted with light emission downwards

1001969, 1001970	750lm 3000K	A→G / A↑G D


Options	Prod. no.
750lm | 3000K | CRI80	
anthracite	**1001969**
750lm | 3000K | CRI80	
white	**1001970**

ANGOLUX
WL





550lm
|
LED INSIDE — CRI 80
|
3000K




IP 44 | IK02 | 120° | L70B50

220-240V ~50/60Hz | 80mA
Total wattage: 6.8W
Material: aluminium/plastic


- IP44 protection rating only when mounted with light emission downwards

231355, 231351	550lm 3000K	A→G / A↑G D

Options	Prod. no.
550lm | 3000K | CRI80	
anthracite	**231355**
550lm | 3000K | CRI80	
white	**231351**

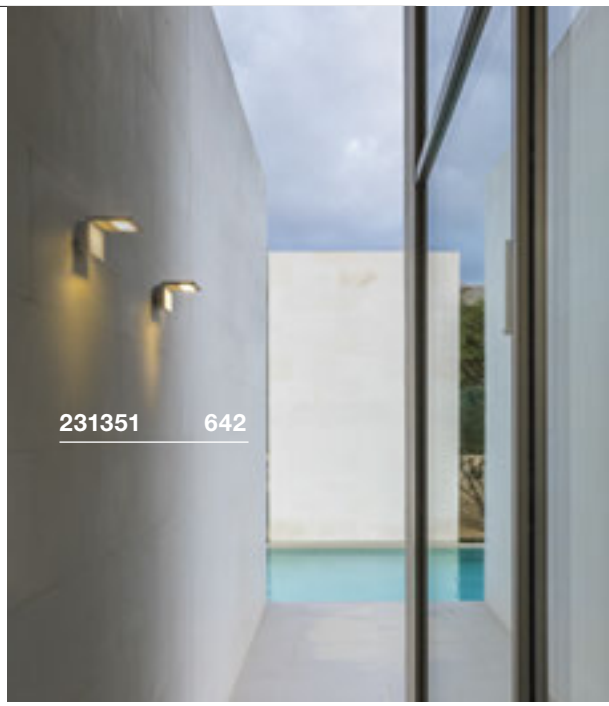




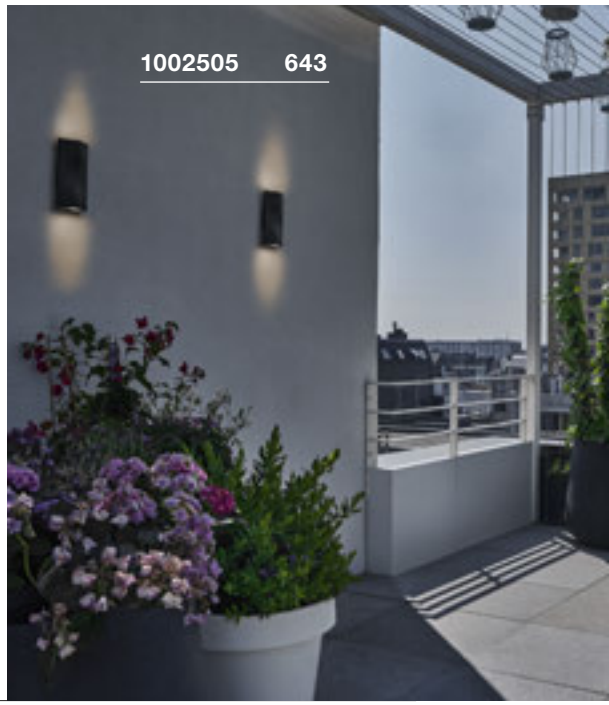


VILUA S
WL



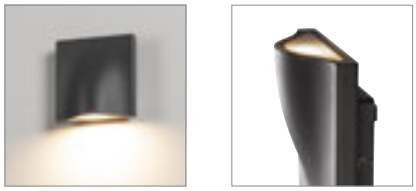

405lm
INSIDE
CRI 80
3000K



IP 54 IK02 100° L70B50


100-277V ~50/60Hz | 700mA
Total wattage: 9W
Material: aluminium/glass

1002503	405lm 3000K	A→G F


Options	Prod. no.
405lm | 3000K | CRI80	
anthracite	**1002503**

VILUA L
WL



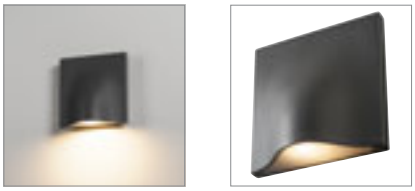

940lm
INSIDE
CRI 80
3000K



IP 54 IK02 100° L70B50

100-277V ~50/60Hz | 350mA
Total wattage: 17W
Material: aluminium/glass

1002504	940lm 3000K	A→G E


Options	Prod. no.
940lm | 3000K | CRI80	
anthracite	**1002504**

VILUA
UP/DOWN, WL





800lm
INSIDE
CRI 80
3000K



IP 54 IK02 100° 100° L70B50

100-277V ~50/60Hz | 700mA
Total wattage: 16W
Material: aluminium/glass

Up/Down	400lm 3000K	A→G F

Options	Prod. no.
Up: 400lm | 3000K | CRI80 Down: 400lm | 3000K | CRI80	
anthracite	**1002505**


MYRA UP/DOWN
WL, QPAR51







SOCKET INSIDE <35 W



IP 55 IK02

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <35W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Surface mounting frames
Prod. no. 233215

Options	Prod. no.
2xGU10	
anthracite	**233115**
2xGU10	
grey	**233114**


SITRA UP/DOWN
WL







LED INSIDE 976lm | 3000K CRI 80



IP 44 55° L70B50

220-240V ~50/60Hz
Total wattage: 18W
Material: aluminium/glass

Up/Down	488lm 3000K	A→G A E

Options	Prod. no.
Up: 488lm | 3000K | CRI80 Down: 488lm | 3000K | CRI80	
anthracite	**1002018**


SITRA UP/DOWN
WL, TCR-TSE







SOCKET INSIDE <9 W



IP 44


220-240V ~50/60Hz
Material: aluminium/glass

GX53 <9W
Diameter: 7.5 cm L: 3.5 cm

LED GX53 | 6W | 120°
4000K | 550lm | EEK=F
6kWh/1000h

Prod. no. 1005269

Options	Prod. no.
2xGX53	
anthracite	**230365**

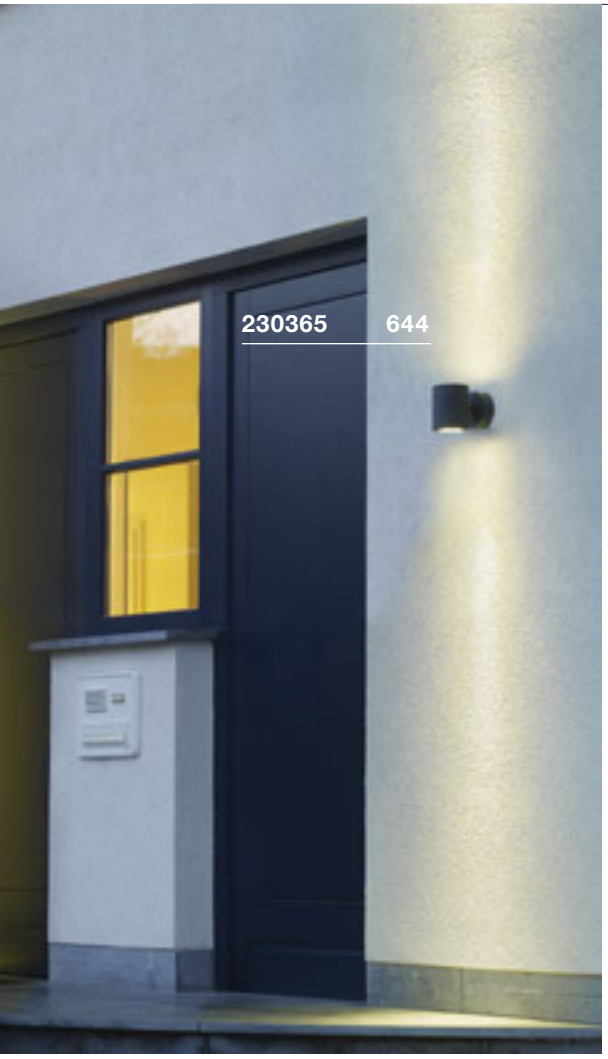




ROX
WL, QPAR111







SOCKET INSIDE <50 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <50W

QPAR111 | 12.5W | 10°
2700K | 920lm | EEK=F
13kWh/1000h




Prod. no. 1005275

Options	Prod. no.
1xGU10 aluminium	**1000333**


ROX UP/DOWN
WL, QPAR111







SOCKET INSIDE <50 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <50W


QPAR111 | 12.5W | 30°
2700K | 950lm | EEK=F
13kWh/1000h




Prod. no. 1005276

Options	Prod. no.
2xGU10 aluminium	**1000334**


1000340 647

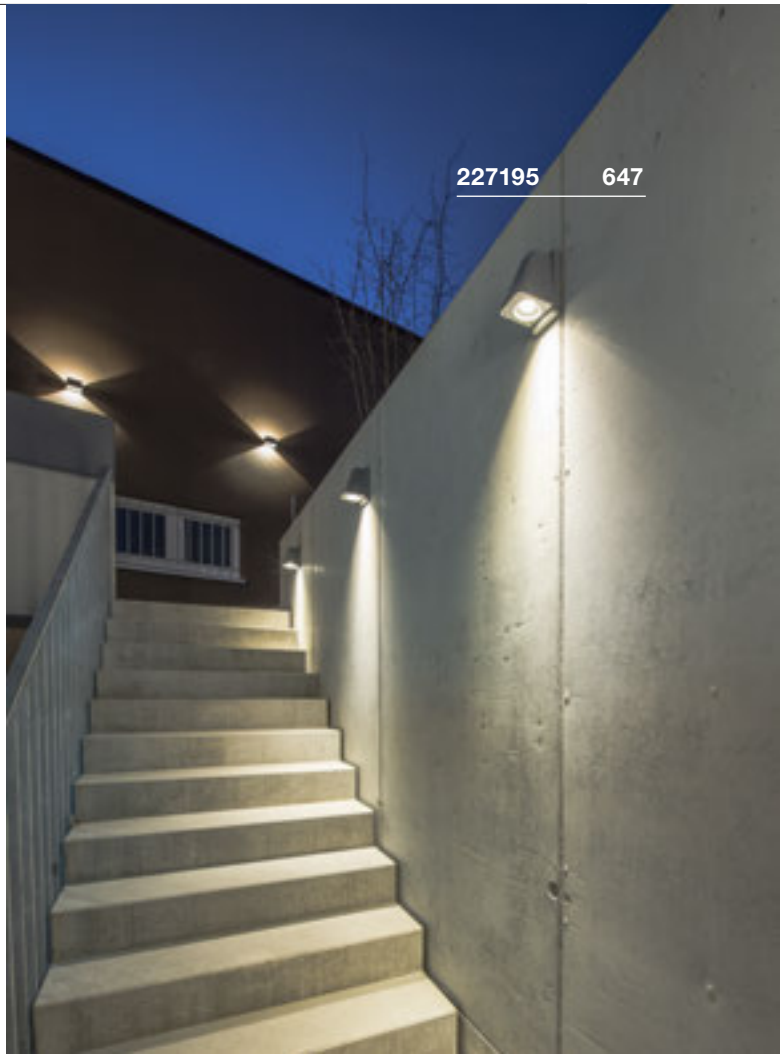

227195 647

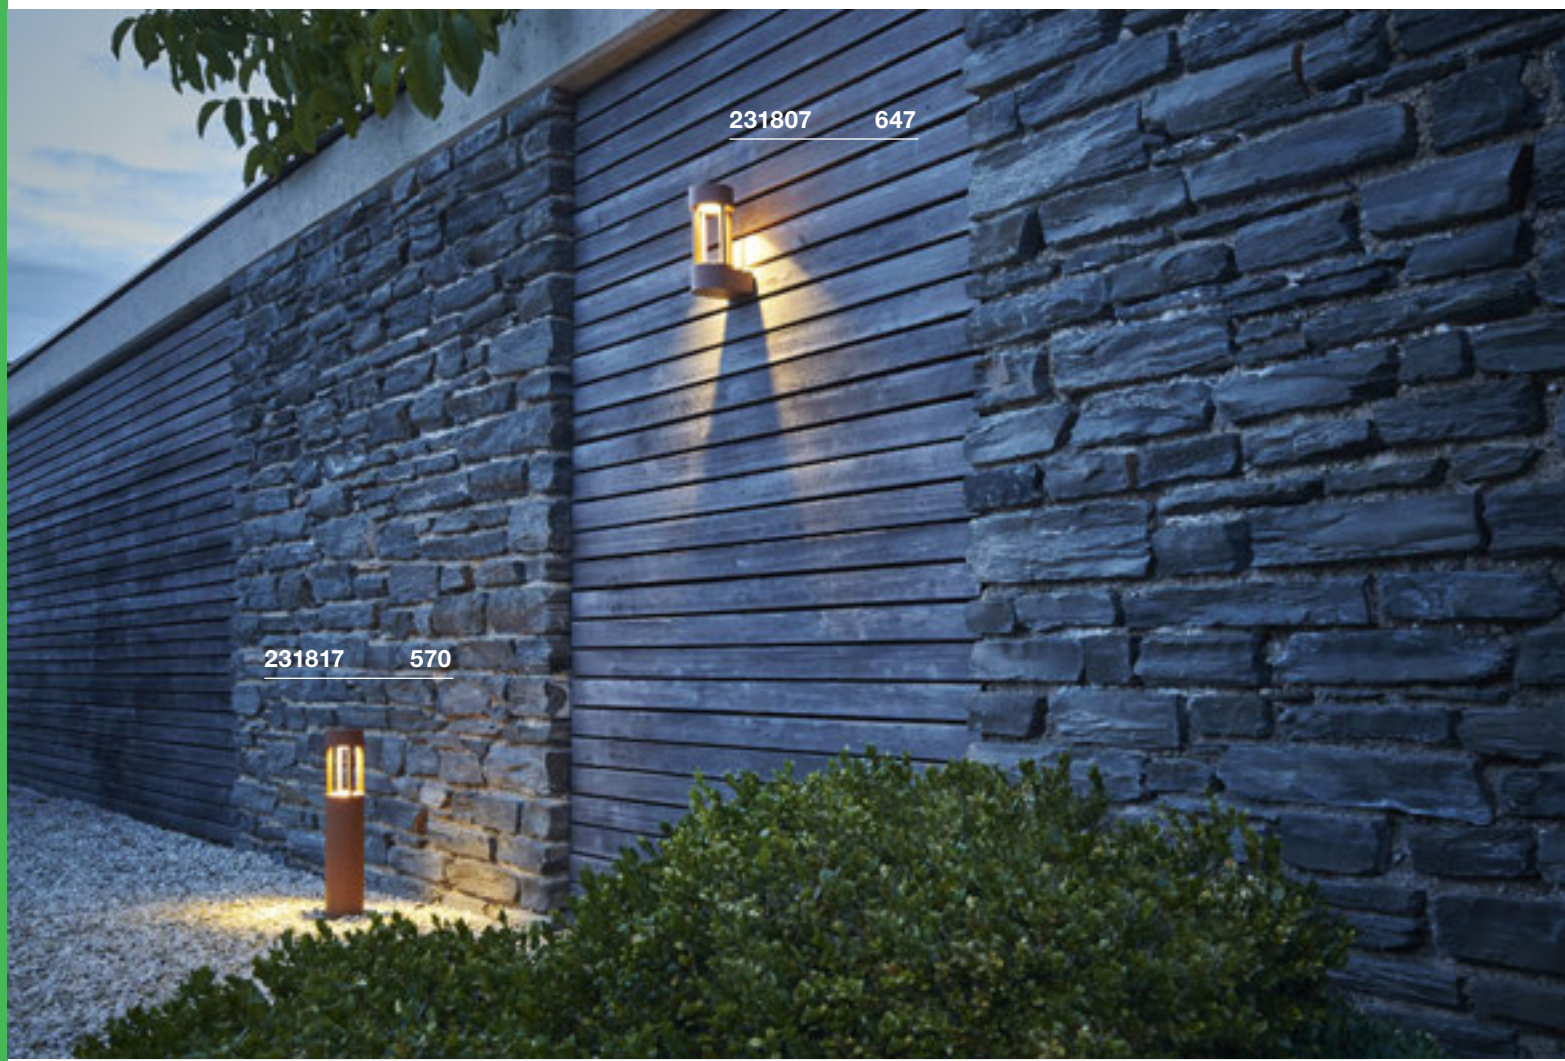
231807 647
231817 570


DELWA
WL







840lm
3000K
CRI 80



IP 44 IK02 100° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 10W
Material: aluminium/glass

1000342, 1000340	840lm 3000K	A→G E

Options	Prod. no.
840lm | 3000K | CRI80	
anthracite	**1000342**
840lm | 3000K | CRI80	
white	**1000340**


SLOTS
WL







140lm
3000K
CRI 80



IP 44 L70B50

220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium/glass

231805, 231807	140lm 3000K	A→G E

Options	Prod. no.
140lm | 3000K | CRI80	
anthracite	**231805**
140lm | 3000K | CRI80	
rust	**231807**


WALLYX
WL, QPAR51







SOCKET INSIDE <50 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <50W L: 7.6 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972


Options	Prod. no.
1xGU10	
anthracite	**227195**
1xGU10	
grey	**227194**

DOWNUNDER OUT
WL, round





150lm / 160lm
INSIDE CRI 80
3000K / 4000K



IP 65 L70B50


100-240V ~50/60Hz | 500mA
Total wattage: 4.3W
Material: aluminium

1002868	150/160lm 3000/4000K	A→G E


Options	Prod. no.
150/160lm | 3000/4000K | CRI80	
anthracite	**1002868**

DOWNUNDER OUT
WL, square



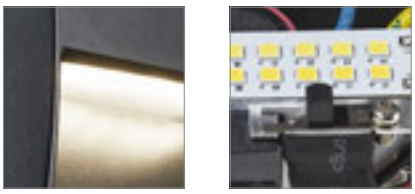

150lm / 160lm
INSIDE CRI 80
3000K / 4000K




IP 65 L70B50

100-240V ~50/60Hz | 500mA
Total wattage: 4.3W
Material: aluminium

1002869	150/160lm 3000/4000K	A→G E

Options	Prod. no.
150/160lm | 3000/4000K | CRI80	
anthracite	**1002869**

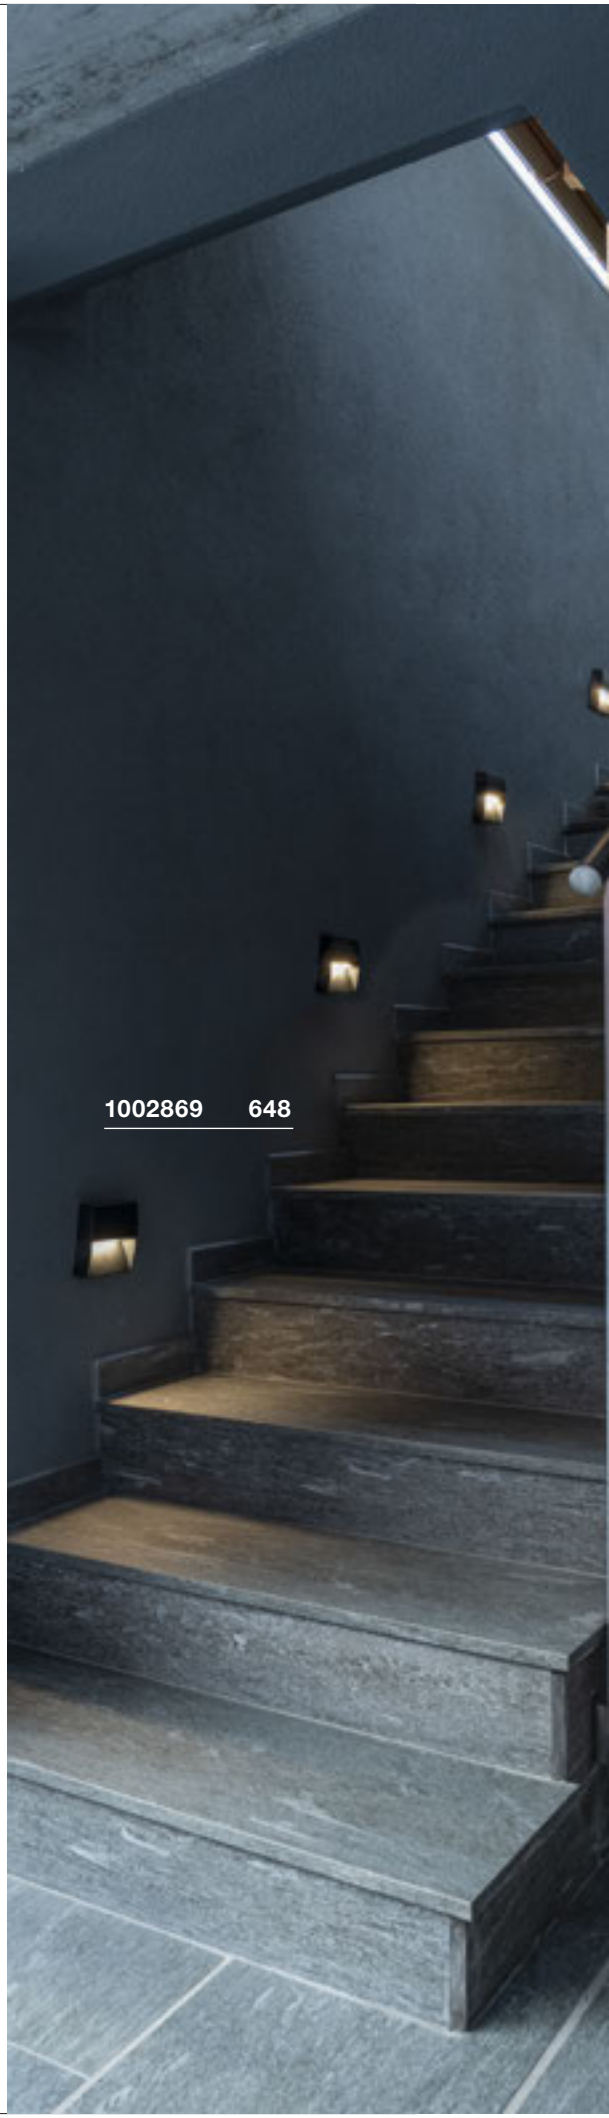

1002869 648


1002868 648

ABRIDOR SENSOR
WL








750lm / 750lm

INSIDE CRI 80

3000K / 4000K



IP 54 IK03 L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 14W
Material: aluminium


1002990, 1002989	750lm 3000/4000K	A→G D

Options	Prod. no.
750lm | 3000/4000K | CRI80	
anthracite	**1002990**

ABRIDOR
WL








750lm / 750lm

INSIDE CRI 80

3000K / 4000K




IP 54 IK03 L70B50


100-277V ~50/60Hz | 500mA
Total wattage: 14W
Material: aluminium


1002990, 1002989	750lm 3000/4000K	A→G D

Options	Prod. no.
750lm | 3000/4000K | CRI90	
anthracite	**1002989**

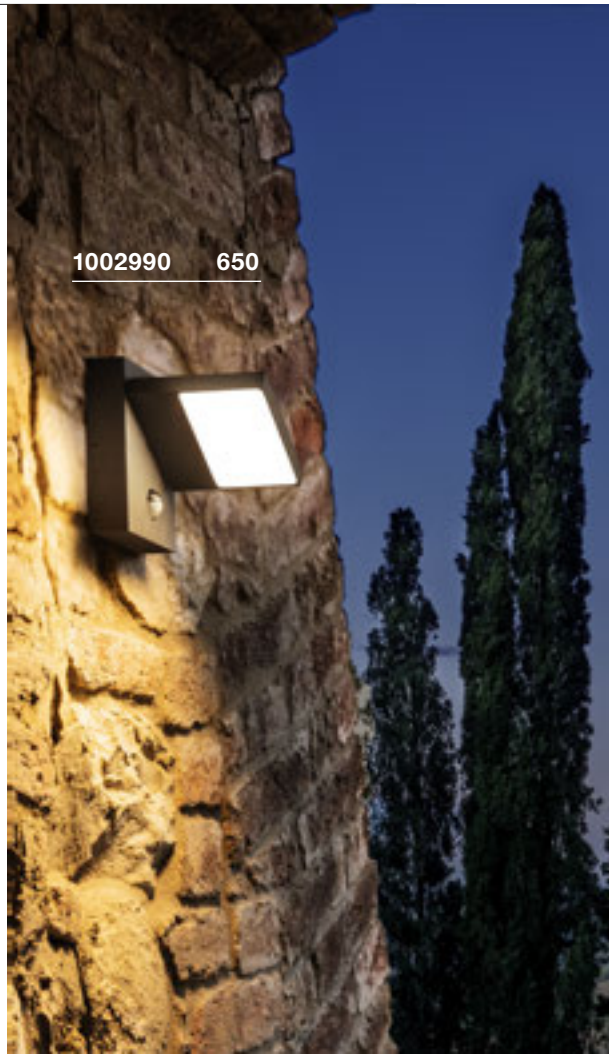



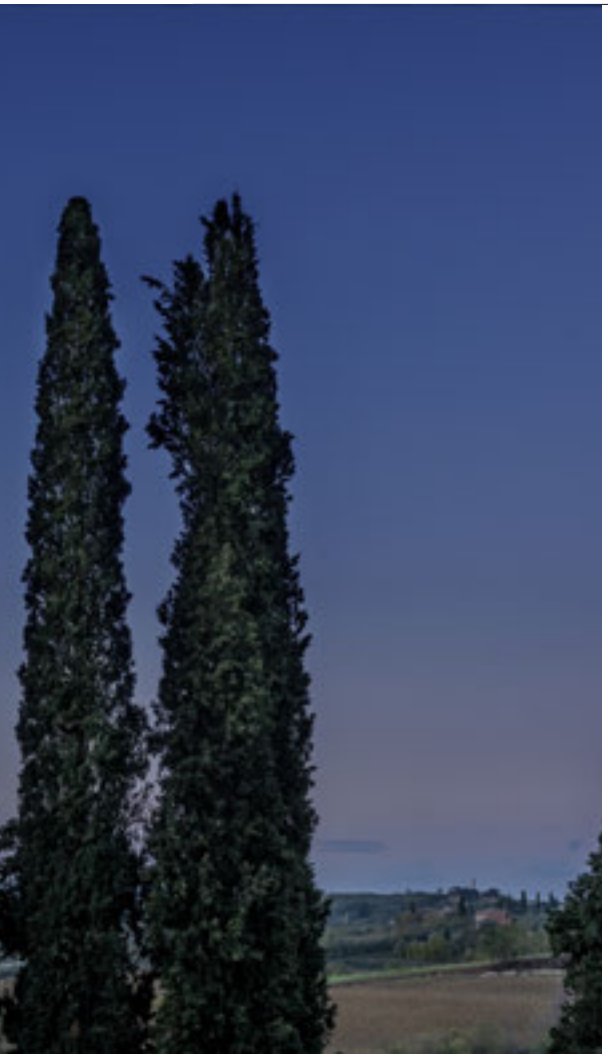

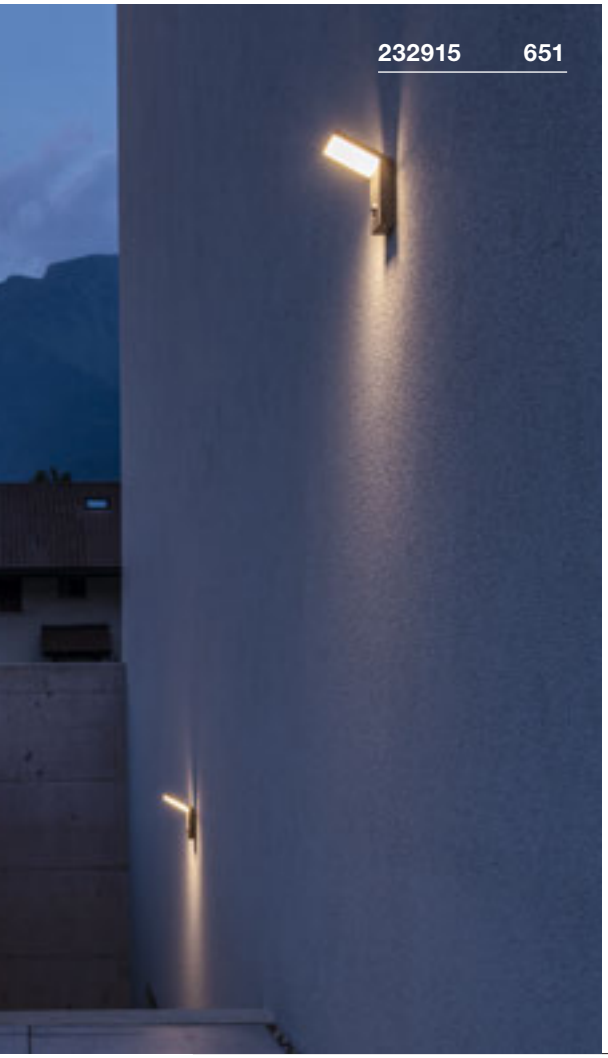


ORDI SENSOR
WL





740lm
3000K
CRI 80



IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 110mA
Total wattage: 9W
Material: aluminium

232915, 232905	740lm 3000K	A→G D


Options	Prod. no.
740lm | 3000K | CRI80	
anthracite	232915

ORDI
WL





740lm
3000K
CRI 80



IP 44 IK02 120° L70B50


220-240V ~50/60Hz | 110mA
Total wattage: 9W
Material: aluminium

232915, 232905	740lm 3000K	A→G D


Options	Prod. no.
740lm | 3000K | CRI80	
anthracite	232905

BOX-L
WL, E27



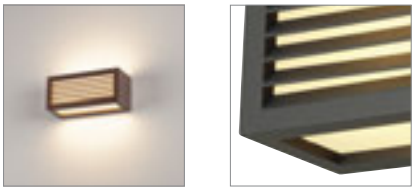

SOCKET INSIDE <18 W



IP 54

220-240V ~50/60Hz
Material: aluminium/acrylic


E27 <18W
Diameter: 6 cm L: 17.5 cm


LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289


Options	Prod. no.
1xE27	
anthracite	**232495**
1xE27	
white	**232491**
1xE27	
rust	**232497**

BOX UP/DOWN
WL, QT-DE12



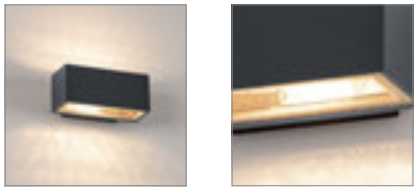

SOCKET INSIDE <80 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass


R7s 78mm <80W


LED R7s | 9W | 330°
3000K | 980lm | EEK=E
9kWh/1000h

Prod. no. 1005287


Options	Prod. no.
1xR7s 78mm	
anthracite	**232485**

LOGS
WL



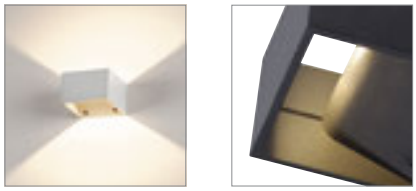

520|570|800lm
LED INSIDE CRI 80
3000K





IP 65 L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 9.5W
Material: aluminium

		A→G
232105, 232101, 232104	520lm | 800lm | 570lm 3000K	A G D

Options	Prod. no.
520lm | 3000K | CRI80	
anthracite	**232105**
800lm | 3000K | CRI80	
white	**232101**
570lm | 3000K | CRI80	
silver	**232104**

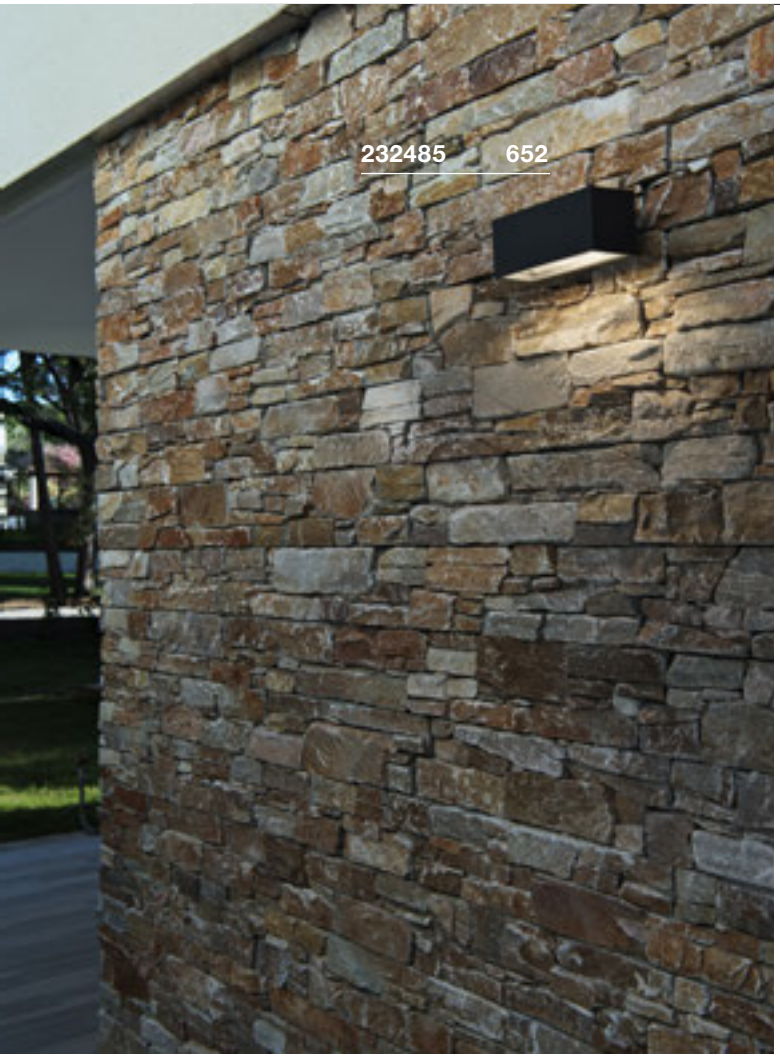

232485 652

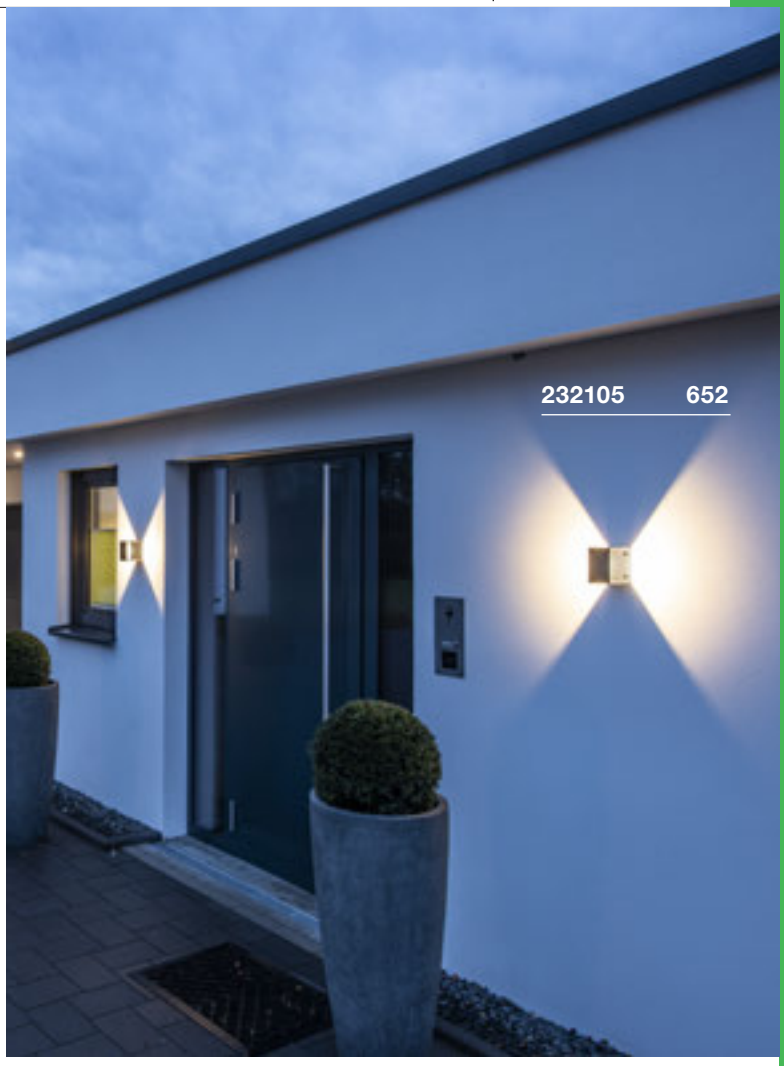
232105 652

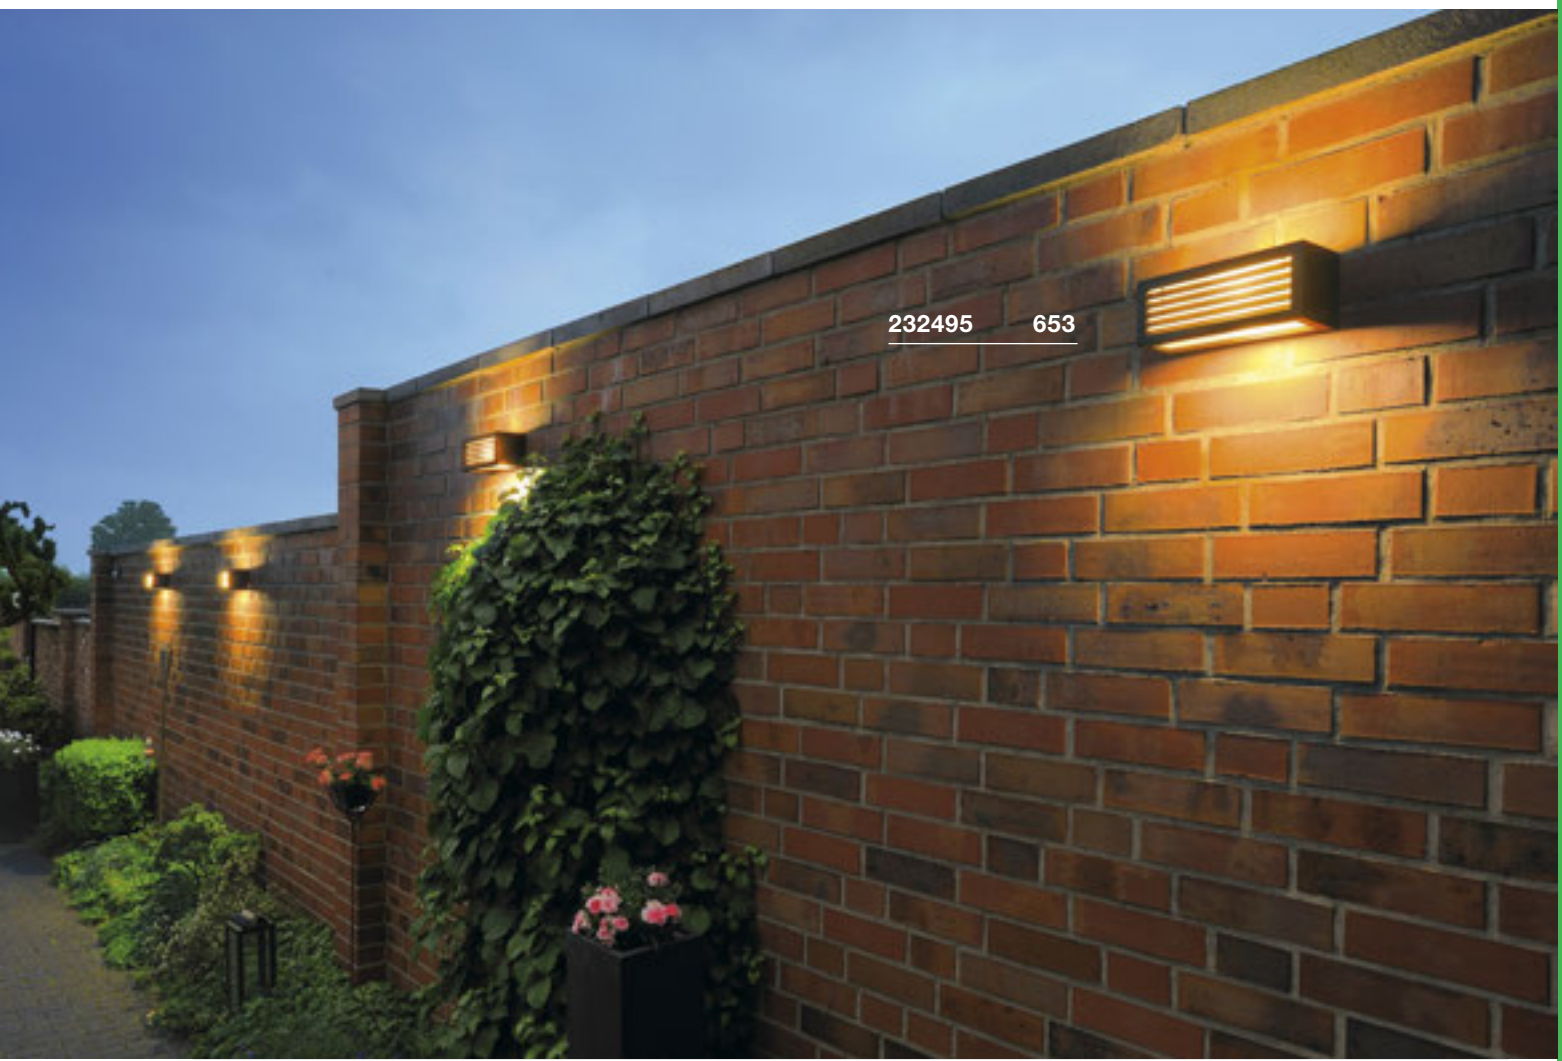
232495 653


1002902 655


229664 655

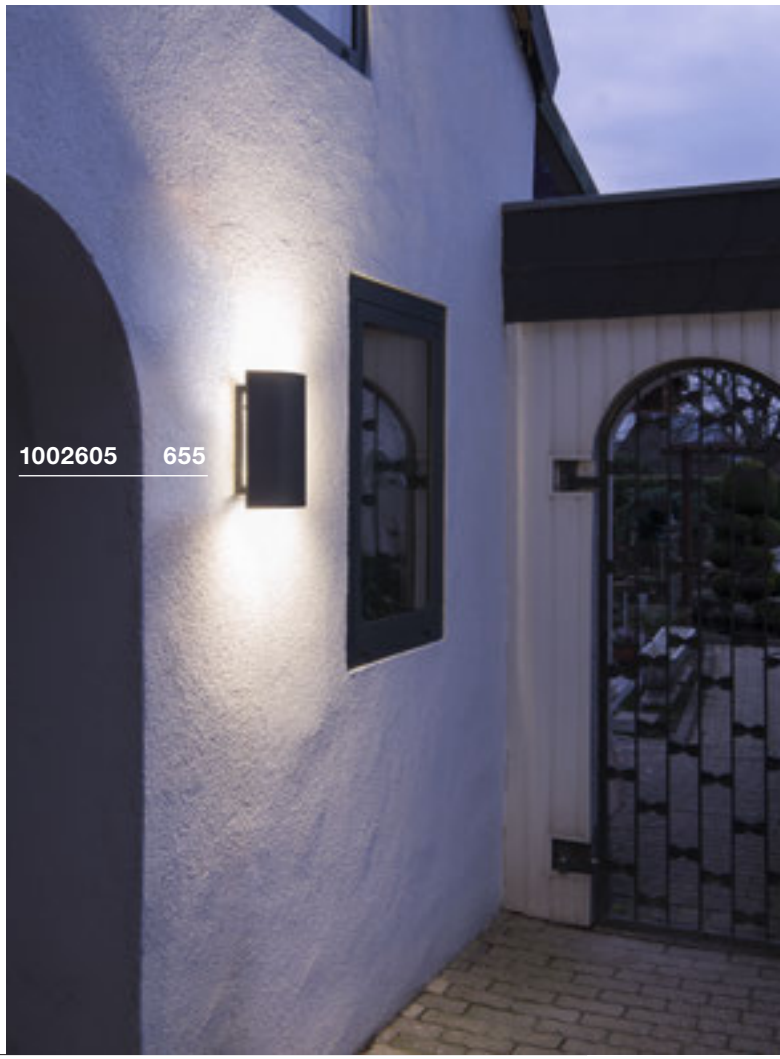
1002605 655


OUT-BEAM UP/ FLOOD DOWN
WL







740lm
INSIDE | CRI 80
3000K



IP 44 | 80° | 2° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/glass

		A→G
Down	690lm 3000K	F
Beam	50lm 3000K	F

Options	Prod. no.
Down: 690lm | 3000K | CRI80 Beam: 50lm | 3000K | CRI80	
anthracite	229665
Down: 690lm | 3000K | CRI80 Beam: 50lm | 3000K | CRI80	
grey	229664


MANA OUT
WL, PHASE







650lm
INSIDE | CRI 80
3000K



IP 65 | IK02 | 60° | 60° | L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/aluminium


		A→G
Up/Down	325lm 3000K	E

Options	Prod. no.
Up: 325lm | 3000K | CRI80 Down: 325lm | 3000K | CRI80	
anthracite	1002900
Up: 325lm | 3000K | CRI80 Down: 325lm | 3000K | CRI80	
rust	1002902


SAIL
WL







400|590lm
INSIDE | CRI 80
3000K



IP 54 | IK06 | 70°

200-240V ~50Hz
Total wattage: 18W
Material: aluminium

		A→G
1002605, 1002606	400lm | 590lm 3000K	F

Options	Prod. no.
400lm | 3000K | CRI80	
anthracite	1002605
590lm | 3000K | CRI80	
white	1002606

L-LINE OUT
WL








500lm / 570lm

INSIDE CRI 80

3000K / 4000K




IP 65 IK02 L70B50 10


220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: aluminium/polycarbonate (PC)

		A→G
1003539	500/570lm 3000/4000K	A→G C

Options	Prod. no.
500/570lm | 3000/4000K | CRI80	
anthracite	**1003539**

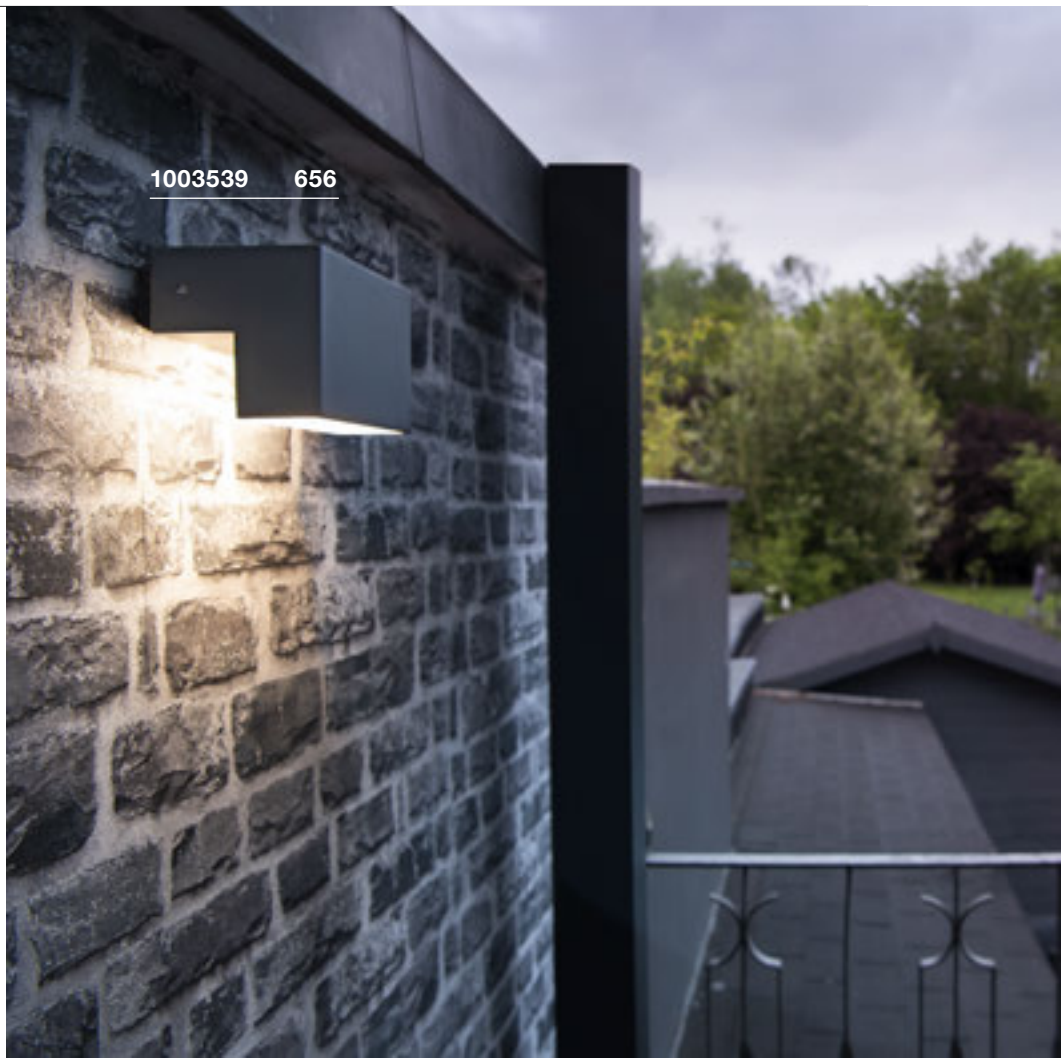




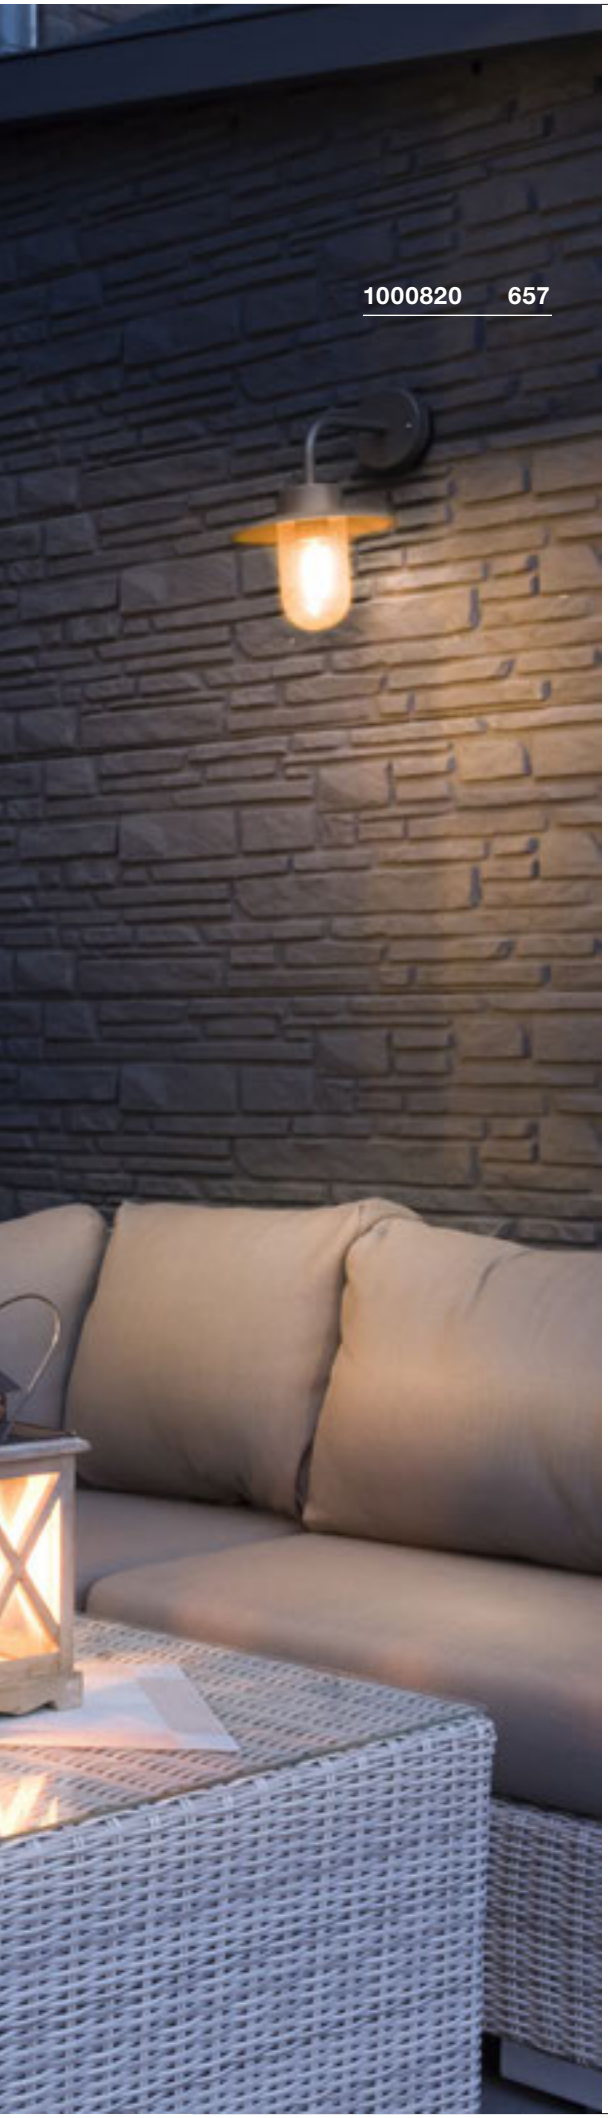


PHOTONIA
WL, E27







SOCKET INSIDE <60 W



IP 55 IK03

220-240V ~50/60Hz
Material: aluminium/glass

E27 <60W
Diameter: 9 cm L: 15 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265

Spacers
Prod. no. 1002853

Options	Prod. no.
1xE27	
anthracite	**232045**


MOLAT
WL, E27







SOCKET INSIDE 60 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

E27 60W
Diameter: 6.5 cm L: 14.5 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005268

Options	Prod. no.
1xE27	
anthracite	**1000820**


GLOO PURE
WL, E27







SOCKET INSIDE <23 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

E27 <23W
Diameter: 4.8 cm L: 18 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
1xE27	
anthracite	**1002002**


APONI
WL, PHASE







520lm
LED INSIDE CRI 80
3000K




C IP 65 30 000 Hours L70B50 LED

220-240V ~50/60Hz | 500mA
Total wattage: 6.3W
Material: aluminium

1000681	520lm 3000K	A→G A↑G E

Spacers
Prod. no. 1002853

Options	Prod. no.
520lm | 3000K | CRI80	
anthracite	**1000681**

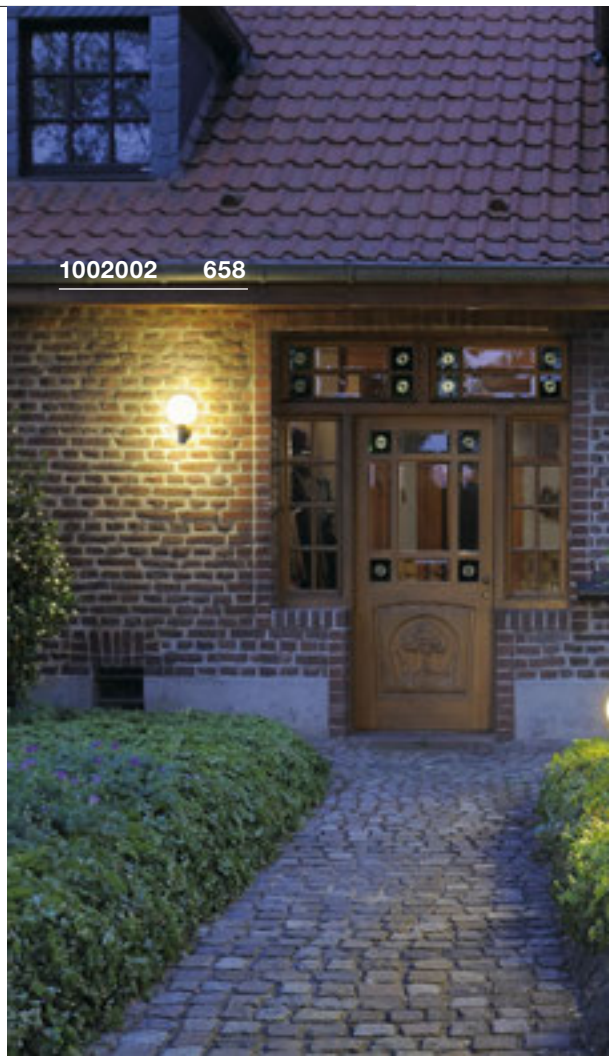








C-POL
WL, E27







SOCKET INSIDE <24 W



IP 54

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

E27 <24W
Diameter: 5.2 cm L: 17.3 cm

LED E27 | 13.5W | 240°
3000K | 1520lm | EEK=E
14kWh/1000h

Prod. no. 1005307

Options	Prod. no.
1xE27	
anthracite	**231465**


F-POL
WL, E27







SOCKET INSIDE <20 W



IP 54

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

E27 <20W
Diameter: 5 cm L: 14 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
1xE27	
anthracite	**231585**


BIG NAILS
WL, E27







SOCKET INSIDE <15 W



IP 44

220-240V ~50/60Hz
Material: 304 stainless steel/polycarbonate (PC)

E27 <15W
Diameter: 4.5 cm L: 17 cm

LED E27 | 8W | 240°
3000K | 880lm | EEK=E
8kWh/1000h

Prod. no. 1005289

Options	Prod. no.
1xE27	
stainless steel	**229182**


SQUARE
WL, E27







SOCKET INSIDE <20 W



IP 44 IK02

220-240V ~50/60Hz
Material: 304 stainless steel


E27 <20W
Diameter: 7 cm L: 13 cm

LED E27 | 9W | 220°
2700K | 770lm | EEK=F
9kWh/1000h

Prod. no. 1005301

Options	Prod. no.
1xE27	
stainless steel	**1000336**



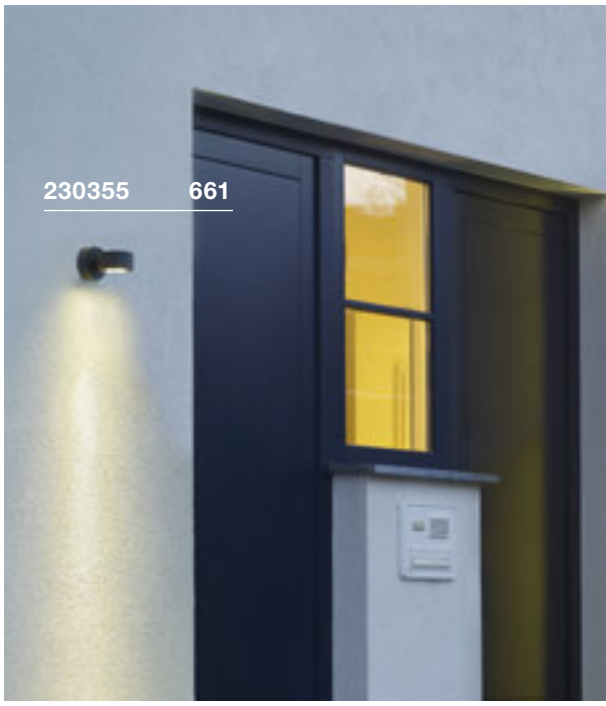





KERAS ELT
WL, E27







SOCKET INSIDE <25 W



IP 54

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

E27 <25W
Diameter: 7 cm L: 17.5 cm

LED E27 | 13.5W | 220°
2700K | 1300lm | EEK=F
13kWh/1000h

Prod. no. 1005302

Options	Prod. no.
1xE27	
anthracite	**227176**


SITRA
WL, TCR-TSE







SOCKET INSIDE <9 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GX53 <9W
Diameter: 7.5 cm L: 3.5 cm

LED GX53 | 6W | 120°
3000K | 500lm | EEK=G
6kWh/1000h

Prod. no. 1005271

Options	Prod. no.
1xGX53	
anthracite	**230355**


RASCALI
WL







330lm
3000K
LED INSIDE CRI 80



IP 54 IK02 L70B50

220-240V ~50/60Hz
Total wattage: 8W
Material: aluminium

		A→G
1000797	330lm 3000K	E

Options	Prod. no.
330lm | 3000K | CRI80	
anthracite	**1000797**


IPERI
WL







400lm
4000K
CRI 80



IP 44 L70B50

220-240V ~50/60Hz
Total wattage: 4.5W
Material: aluminium/plastic

- IP44 protection rating only when mounted with light emission downwards.


		A→G
231315	400lm 4000K	D


Options	Prod. no.
400lm | 4000K | CRI80	
anthracite	**231315**

QUADRASYL
WL, TCR-TSE









IP 44

220-240V ~50/60Hz
Material: aluminium/glass


GX53 <11W
Diameter: 7.5 cm L: 2.7 cm

LED GX53 | 6W | 120°
4000K | 550lm | EEK=F
6kWh/1000h

Prod. no. 1005269


Options	Prod. no.
1xGX53	
anthracite	**232285**

SQUARE TURN
WL, G9









IP 44

220-240V ~50/60Hz
Material: aluminium/glass

G9 <42W
Diameter: 3.5 cm L: 8 cm

LED G9 | 3.7W | 300°
3000K | 430lm | EEK=E
4kWh/1000h


Prod. no. 1005286

Options	Prod. no.
1xG9	
grey	**1000335**


1000335 662


232285 662


231315 662

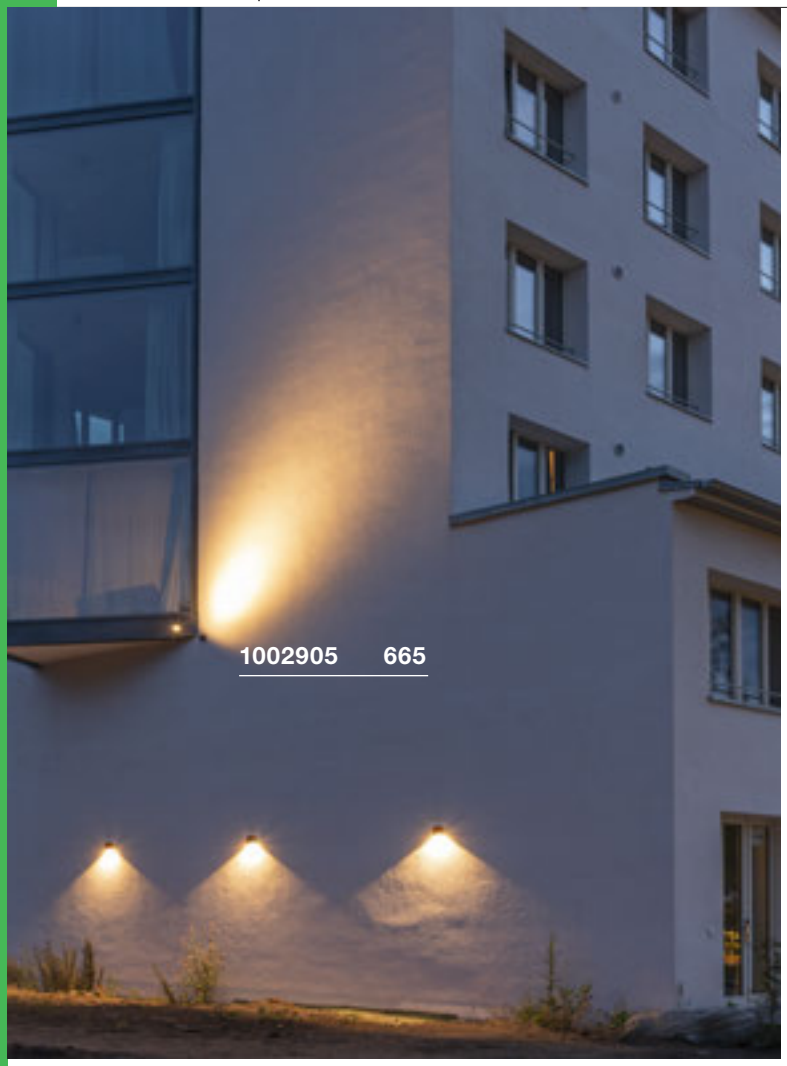
1002905 665


1000880 665
4



1002905 665
Villa Glanzstoff

TODAY PRO
Display





2800lm
4000K
CRI 70



IP 65 IK02 140° L70B50 90°


220-240V ~50/60Hz | 640mA
Total wattage: 29W
Material: aluminium

1000880, 1000881	2800lm 4000K


Options	Prod. no.
2800lm | 4000K | CRI70	
black	**1000880**
2800lm | 4000K | CRI70	
white	**1000881**

ESKINA D
Display, PHASE



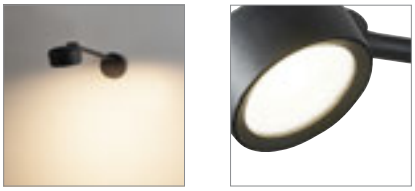

1000lm / 1000lm
3000K / 4000K
CRI 80



IP 65 IK02 95° L70B50 340°
105° 20


220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

1002905	1000lm 3000/4000K


Options	Prod. no.
1000lm | 3000/4000K | CRI80	
anthracite	**1002905**

MYRA DISPLAY
WL, curved, QPAR51



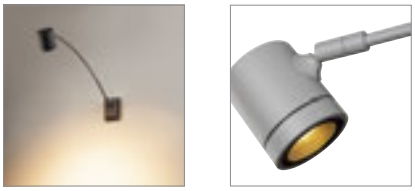

SOCKET INSIDE <50 W



IP 55 340° 45°

220-240V ~50/60Hz
Material: aluminium

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Surface mounting frames
Prod. no. 233215

Options	Prod. no.
1xGU10	
anthracite	**233135**
1xGU10	
grey	**233134**


LED SPOT
SP







LED INSIDE — 400lm / 3000K — CRI 80



IP 55 | IK06 | 40° | L80B50 | 330° | 180°

100-240V ~50/60Hz | 240mA
Total wattage: 6W
Material: aluminium/glass

		A→G
1004649, 1004957	400lm 3000K	F


NAUTILUS
WL QPAR51







SOCKET INSIDE — <11 W



IP 54 | IK02 | 330° | 180°

220-240V ~50/60Hz
Material: aluminium

GU10 <11W
Diameter: 5 cm L: 8.3 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

■ NAUTILUS | mounting plate
Prod. no. 1002884

Options	Prod. no.
1xGU10	
■ black	**1002867**


MYRA
CW, single, QPAR51







SOCKET INSIDE — <50 W



IP 55 | 340° | 45°

220-240V ~50/60Hz
Material: aluminium/glass

• Adapter frame for surface mounting available

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h


Prod. no. 1004973


■ Surface mounting frames
Prod. no. 233215

Options	Prod. no.
400lm | 3000K | CRI80	
■ anthracite	**1004649**
400lm | 3000K | CRI80	
■ rust	**1004957**

Options	Prod. no.
1xGU10	
■ anthracite	**233105**
1xGU10	
■ grey	**233104**


1002867 666

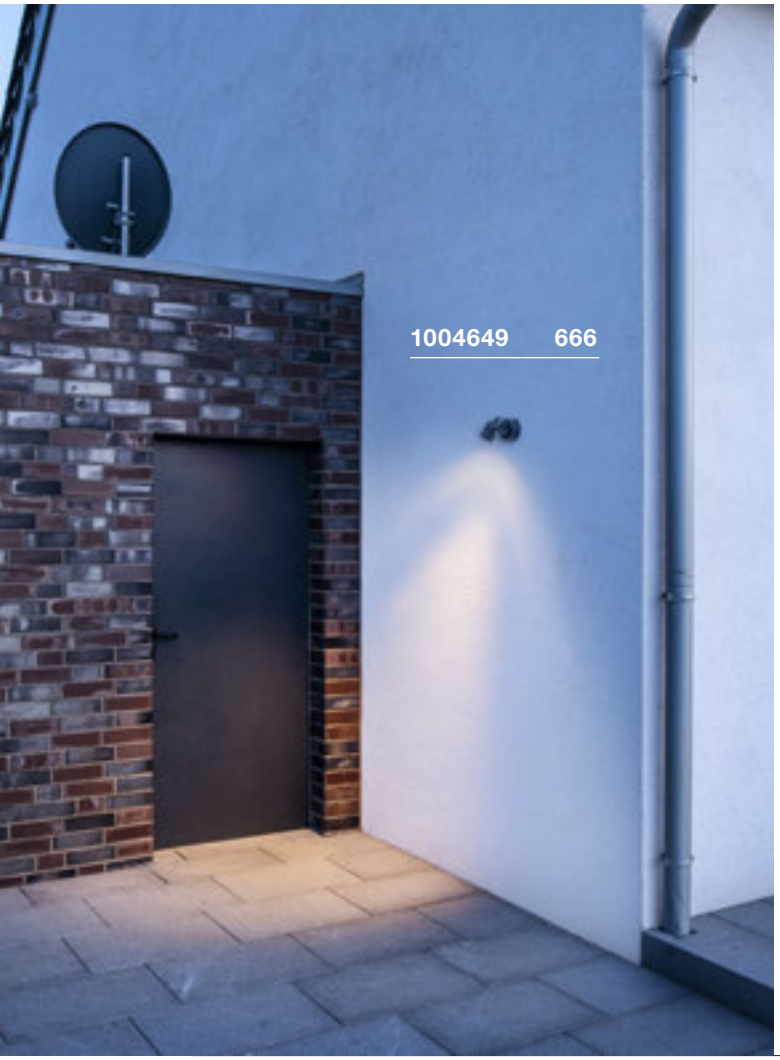
1004649 666

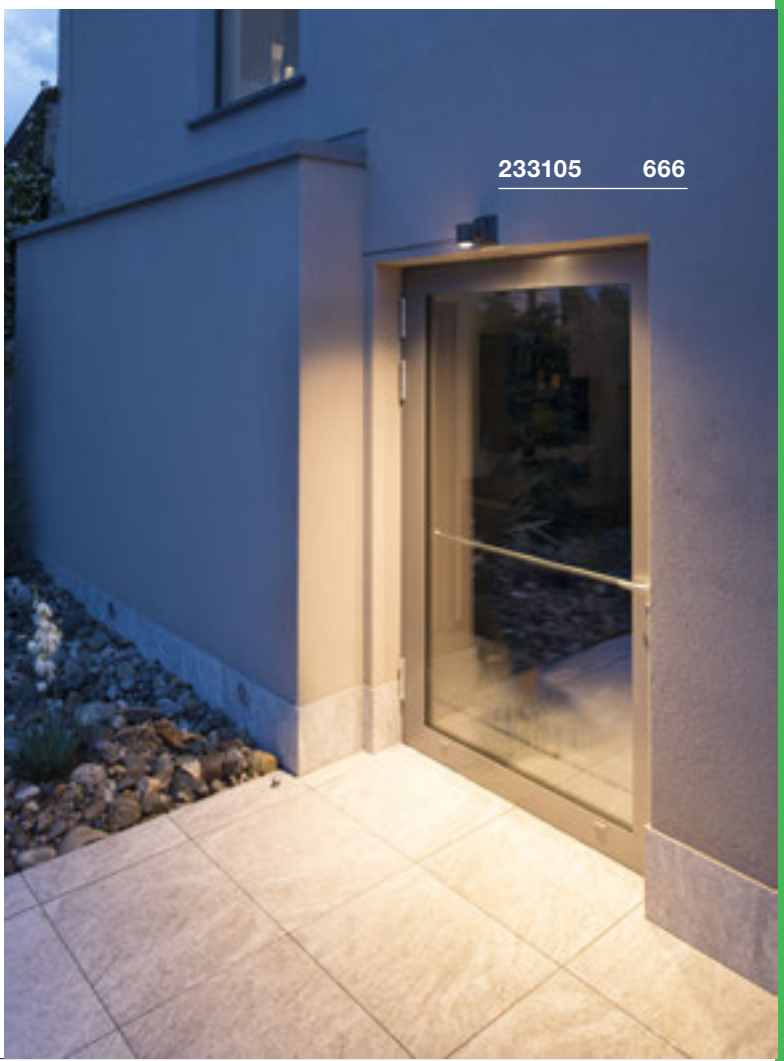
233105 666

CEILING LIGHTS




1003421 672
2


1003427 + 1005207 671 + 617
99

ENOLA ROUND S
CL








540lm / 610lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

1003426	540/610lm 3000/4000K	A→G

- Spacer **Prod. no. 1003479**
- Reflector, 60° **Prod. no. 1005262**

Options	Prod. no.
540/610lm | 3000/4000K | CRI90	
anthracite	**1003426**

ENOLA ROUND M
CL








840lm / 960lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

1003427	840/960lm 3000/4000K	A→G

- Spacer **Prod. no. 1003479**
- Lens, 19° **Prod. no. 1005205**
- Asymmetrical lens **Prod. no. 1005206**
- Reflector, 60° **Prod. no. 1005207**

Options	Prod. no.
840/960lm | 3000/4000K | CRI90	
anthracite	**1003427**

ENOLA ROUND L
CL








3200lm / 3500lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

1003442	3200/3500lm 3000/4000K	A→G

- Spacer **Prod. no. 1003479**
- Reflector, 60° **Prod. no. 1005263**

Options	Prod. no.
3200/3500lm | 3000/4000K | CRI90	
anthracite	**1003442**

ENOLA SQUARE S
CL








540lm / 610lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 9W
Material: aluminium/glass

1003420	540/610lm 3000/4000K	A→G E

Prod. no. 1003479 Spacer

Prod. no. 1005262 Reflector, 60°

Options	Prod. no.
540/610lm | 3000/4000K | CRI90	
anthracite	**1003420**

ENOLA SQUARE M
CL








840lm / 960lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

1003421	840/960lm 3000/4000K	A→G E

Prod. no. 1003479 Spacer

Prod. no. 1005205 Lens, 19°

Prod. no. 1005206 Asymmetrical lens

Prod. no. 1005207 Reflector, 60°

Options	Prod. no.
840/960lm | 3000/4000K | CRI90	
anthracite	**1003421**

ENOLA SQUARE L
CL








3200lm / 3500lm

INSIDE CRI 90

3000K / 4000K



IP 65 IK06 38° L70B50

220-240V ~50/60Hz | 900mA
Total wattage: 36W
Material: aluminium/glass

1003439	3200/3500lm 3000/4000K	A→G E

Prod. no. 1003479 Spacer

Prod. no. 1005263 Reflector, 60°

Options	Prod. no.
3200/3500lm | 3000/4000K | CRI90	
anthracite	**1003439**



1003421 + 1005207 672 + 617
2

BIG THEO
CL





2000lm
LED INSIDE
3000K
CRI 80



IP 44 IK02 24° L70B50


100-277V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/glass


		A→G
234535	2000lm 3000K	E

Options	Prod. no.
2000lm | 3000K | CRI80	
anthracite	**234535**


BIG THEO
CL, QPAR111







SOCKET INSIDE
<75 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <75W

LED QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h

DIM TO WARM

Prod. no. 1005274


Options	Prod. no.
1xGU10	
anthracite	**229555**
1xGU10	
white	**229551**
1xGU10	
grey	**229554**





QUADRULO
CL


NEW







230lm
LED INSIDE
CRI 80
3000K



IP 55 | IK04 | L70B50 | 20

100-277V ~50/60Hz | 480mA
Total wattage: 7.5W
Material: aluminium/acrylic

1005202	230lm 3000K	A→G A G E

Options	Prod. no.
230 lm | 3000 K | CRI80	
anthracite	1005202

OVALISK
CL








540lm / 570lm

INSIDE

CRI 80

3000K / 4000K



IP 65 IK02 L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 7.9W
Material: aluminium/glass

		A→G
1004677	540/570lm 3000/4000K	D

Options	Prod. no.
540/570lm | 3000/4000K | CRI80	
anthracite	1004677






PHOTONIA
CL, E27







SOCKET INSIDE <60 W



IP 44 IK03

220-240V ~50/60Hz
Material: aluminium/glass

E27 <60W
Diameter: 9 cm L: 15 cm

LED E27 | 7.5W | 320°
2500K | 700lm | EEK=F
8kWh/1000h

Prod. no. 1005265

Spacers
Prod. no. 1002853


Options	Prod. no.
1xE27	
anthracite	**232055**

MOLAT
CL, E27





SOCKET INSIDE <60 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

E27 <60W
Diameter: 6.5 cm L: 14.5 cm

LED E27 | 7.5W | 320°
2700K | 800lm | EEK=F
8kWh/1000h

Prod. no. 1005268

Options	Prod. no.
1xE27	
anthracite	**1000823**


231545 679
232104 652


1000332 679


SITRA
CL, TCR-TSE







SOCKET INSIDE <9 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

GX53 <9W
Diameter: 7.5 cm L: 3.5 cm

LED GX53 | 6.1W | 120°
4000K | 490lm | EEK=G
6kWh/1000h

Prod. no. 1005271

Options	Prod. no.
1xGX53	
anthracite	**231545**
1xGX53	
white	**231541**


ROX
CL, QPAR111







SOCKET INSIDE <50 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <50W

LED QPAR111 | 8W | 38°
2700K | 680lm | EEK=F
8kWh/1000h

Prod. no. 1005274

Options	Prod. no.
1xGU10	
aluminium	**1000332**


ROX
CL, GX53







SOCKET INSIDE <11 W



IP 44 IK02

220-240V ~50/60Hz
Material: aluminium/glass

GX53 <11W
Diameter: 7.5 cm L: 3.5 cm

LED GX53 | 6W | 120°
4000K | 550lm | EEK=F
6kWh/1000h

Prod. no. 1005269

Options	Prod. no.
1xGX53	
aluminium	**1000339**

WALL AND CEILING LIGHTS





ESKINA SPOT SENSOR
CW, PHASE








1000lm / 1000lm

INSIDE

CRI 80

3000K / 4000K



IP 54 IK02 95° L70B50 340°

105° 20

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

1002904	1000lm 3000/4000K	A→G E

Options	Prod. no.
1000lm | 3000/4000K | CRI80	
anthracite	**1002904**







ESKINA SPOT
CW, PHASE












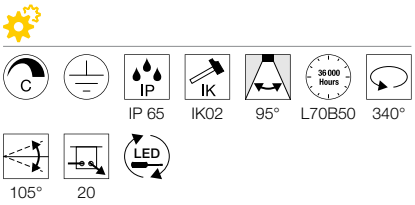

220-240V ~50/60Hz | 350mA
Total wattage: 14.5W
Material: aluminium

		A→G
1002903	1000lm 3000/4000K	E

Options	Prod. no.
1000lm | 3000/4000K | CRI80	
anthracite	**1002903**


SITRA 360
CW, TCR-TSE







SOCKET INSIDE <9 W



IP 44 90° 90°

220-240V ~50/60Hz
Material: aluminium/glass

GX53 <9W
Diameter: 7.5 cm L: 3.5 cm

LED GX53 | 6.1W | 120°
4000K | 490lm | EEK=G
6kWh/1000h

Prod. no. 1005271

Options	Prod. no.
1xGX53	
anthracite	**231515**


THEO BRACKET
CW







SOCKET INSIDE <7 W



IP 65 340° 70°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <7W
Diameter: 5.1 cm L: 5.7 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10	
anthracite	**1004653**







233245 685




1004653 684

HELIA
CW, single, PHASE





440lm
3000K
CRI 80



IP 65 IK04 35° L70B50 350° 90°

220-240V ~50/60Hz | 500mA
Total wattage: 6.5W
Material: aluminium/glass

233245	440lm 3000K	A→G

Spacers
Prod. no. 1002853


Options	Prod. no.
440lm | 3000K | CRI80	
anthracite	**233245**

HELIA
CW, double, PHASE





880lm
3000K
CRI 80



IP 65 IK04 35° L70B50 350° 90°

220-240V ~50/60Hz | 500mA
Total wattage: 13W
Material: aluminium/glass

233255	880lm 3000K	A→G

Spacers
Prod. no. 1002853

Options	Prod. no.
880lm | 3000K | CRI80	
anthracite	**233255**


MYRA
WL, double, QPAR51







SOCKET INSIDE <50 W



IP 55 340° 45°

220-240V ~50/60Hz
Material: aluminium/glass

GU10 <50W
Diameter: 5 cm L: 5.7 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h

Prod. no. 1005079

Spacers
Prod. no. 1002853


Options	Prod. no.
2xGU10	
anthracite	**233095**
2xGU10	
grey	**233094**

OUT-BEAM FRAME
SP





60lm
LED INSIDE — CRI 80
3000K



IP 55 IK03 L70B50 10

100-277V ~50/60Hz | 700mA
Total wattage: 3.5W
Material: aluminium/acrylic

		A→G
1003518, 1003519	60lm 3000K	A G


Options	Prod. no.
60lm | 3000K | CRI80	
anthracite	**1003518**
60lm | 3000K | CRI80	
white	**1003519**

BOX-L
WL





600lm
LED INSIDE — CRI 90
3000K




IP 54 IK05 L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 19 W
Material: aluminium/acrylic

		A→G
1002035	600lm 3000K	A G E

Options	Prod. no.
600lm | 3000K | CRI90	
anthracite	**1002035**



1002035 686

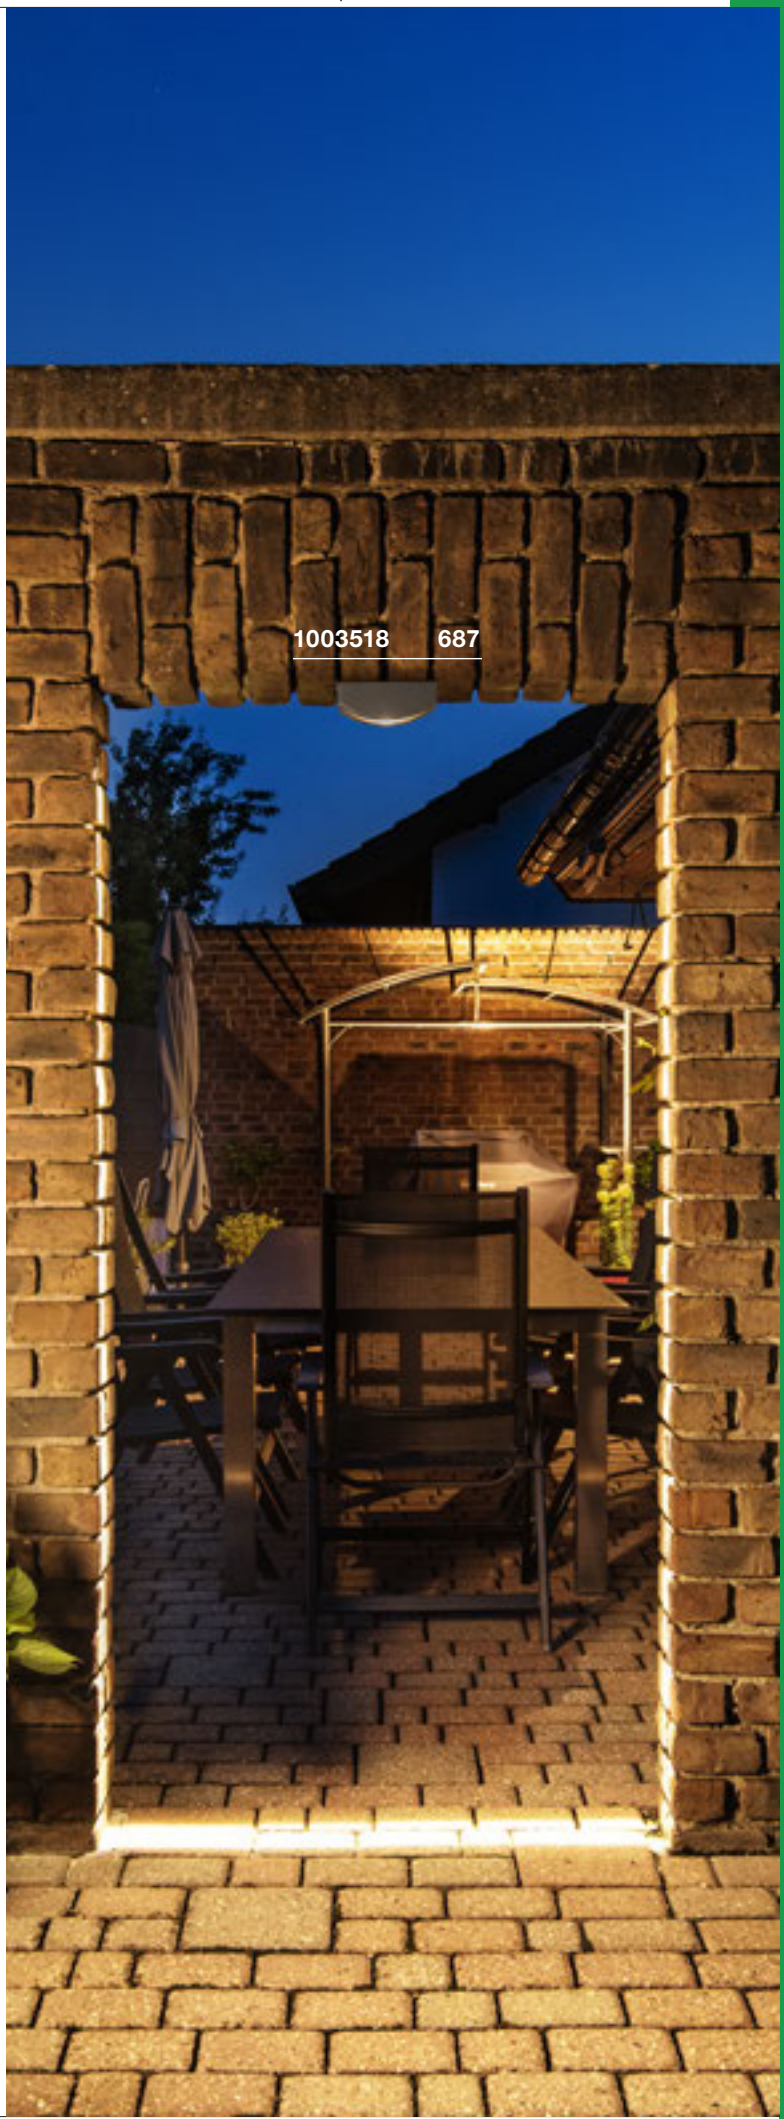
1003518 687

AINOS
CW



1430lm
3000K
CRI 80



IP 44 IK02 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)


229965, 229961	1430lm 3000K

Options	Prod. no.
1430lm | 3000K | CRI80	
anthracite	229965
1430lm | 3000K | CRI80	
white	229961


AINOS
CW SENSOR

IR



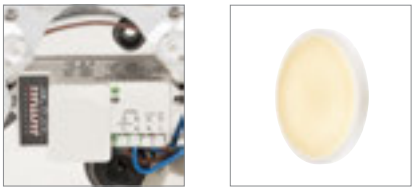

1430lm
3000K
CRI 80



IP 44 IK02 120° L70B50


220-240V ~50/60Hz | 500mA
Total wattage: 22W
Material: aluminium/polycarbonate (PC)

229975, 229971	1430lm 3000K

Options	Prod. no.
1430lm | 3000K | CRI80	
anthracite	229975
1430lm | 3000K | CRI80	
white	229971





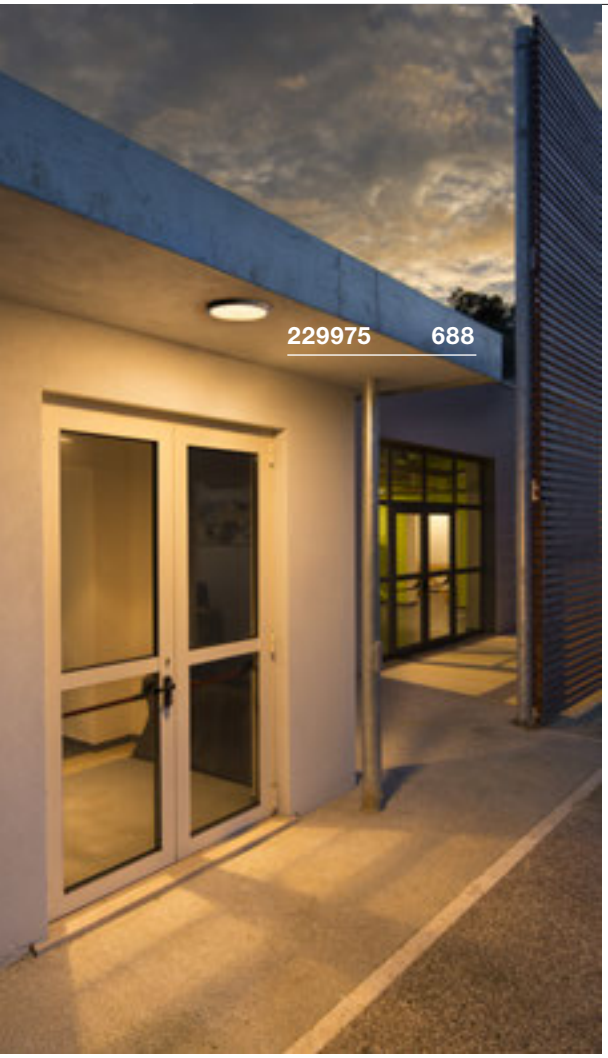



AINOS
CW, square

CCT






1300lm / 1300lm

LED INSIDE

CRI 80

3000K / 4000K



IP 65 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 17W
Material: aluminium/polycarbonate (PC)


1003450, 1003449	1300lm 3000/4000K	A→G / A G D

Options	Prod. no.
1300lm | 3000/4000K | CRI80	
anthracite	**1003450**
1300lm | 3000/4000K | CRI80	
white	**1003449**

AINOS
CW SENSOR, square

CCT

IR








1300lm / 1300lm

LED INSIDE

CRI 80

3000K / 4000K



IP 65 L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

1003452, 1003451	1300lm 3000/4000K	A→G / A G D

Options	Prod. no.
1300lm | 3000/4000K | CRI80	
anthracite	**1003452**
1300lm | 3000/4000K | CRI80	
white	**1003451**

LIPA
CW, PHASE






1500|1600lm / 1500|1600lm

INSIDE

3000K / 4000K

CRI 80



IP 54 IK05 120° L70B50

220-240V ~50/60Hz | 500mA
Total wattage: 21W
Material: aluminium/polycarbonate (PC)

1001856, 1001855	1500lm | 1600lm 3000/4000K

RUBA 27/42
CW






960|2000lm / 1100|2300lm

INSIDE

3000K / 4000K

CRI 90



IP 65 IK08 120° L70B50 10

220-240V ~50/60Hz | 300mA
Total wattage: 12W
Material: polycarbonate (PC)

The energy efficiency class information for this product is not available at the time of printing. The latest product data can always be found at www.slv.com


Options	Prod. no.
1500lm | 3000/4000K | CRI80	
anthracite	**1001856**
1600lm | 3000/4000K | CRI80	
white	**1001855**

Options	Prod. no.
960/1100lm | 3000/4000K | CRI90 | Diameter: 27 cm	
white	**1005089**
2000/2300lm | 3000/4000K | CRI90 | Diameter: 42 cm	
white	**1005090**








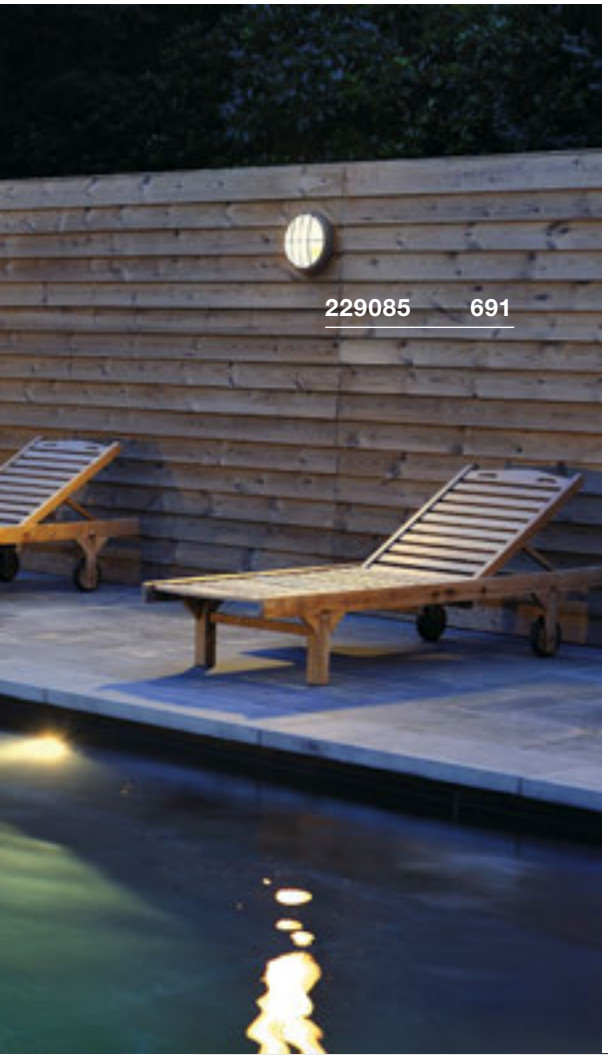


BULAN
CW, E14







SOCKET INSIDE <60 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

E14 <60W
Diameter: 4.8 cm L: 13 cm

LED E14 | 4.2W | 320°
2700K | 350lm | EEK=G
5kWh/1000h

Prod. no. 1005285

Options	Prod. no.
1xE14	
anthracite	**229075**
1xE14	
white	**229071**
1xE14	
grey	**229072**


BULAN GRID
CW, E27







SOCKET INSIDE <25 W



IP 44

220-240V ~50/60Hz
Material: aluminium/polycarbonate (PC)

E27 <25W
Diameter: 5.2 cm L: 17.3 cm


LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h

Prod. no. 1005289


Options	Prod. no.
2xE27	
anthracite	**229085**
2xE27	
white	**229081**

TERANG 200
CW



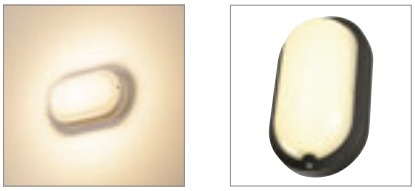

830lm
3000K
CRI 80



IP 44 | IK03 | 120° | L70B50

220-240V ~50/60Hz
Total wattage: 11W
Material: aluminium/polycarbonate (PC)

229935, 229931	830lm 3000K


Options	Prod. no.
830lm | 3000K | CRI80	
anthracite	**229935**
830lm | 3000K | CRI80	
white	**229931**

IMPERVA 120
CW





4600lm | 5095lm
3000K | 4000K
CRI 80



IP 66 | IK08 | 120° | UGR 23 | L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 40W
Material: polycarbonate (PC)

1001314, 1001315	4600lm | 5095lm 3000K | 4000K


Options	Prod. no.
4600lm | 3000K | CRI80	
grey	**1001314**
5095lm | 4000K | CRI80	
grey	**1001315**

IMPERVA 150
CW





7600lm
4000K
CRI 80




IP 66 | IK08 | 120° | UGR 25 | L70B50

220-240V ~50/60Hz | 1050mA
Total wattage: 55W
Material: polycarbonate (PC)

1001317	7600lm 4000K

Options	Prod. no.
7600lm | 4000K | CRI80	
grey	**1001317**


229935 692

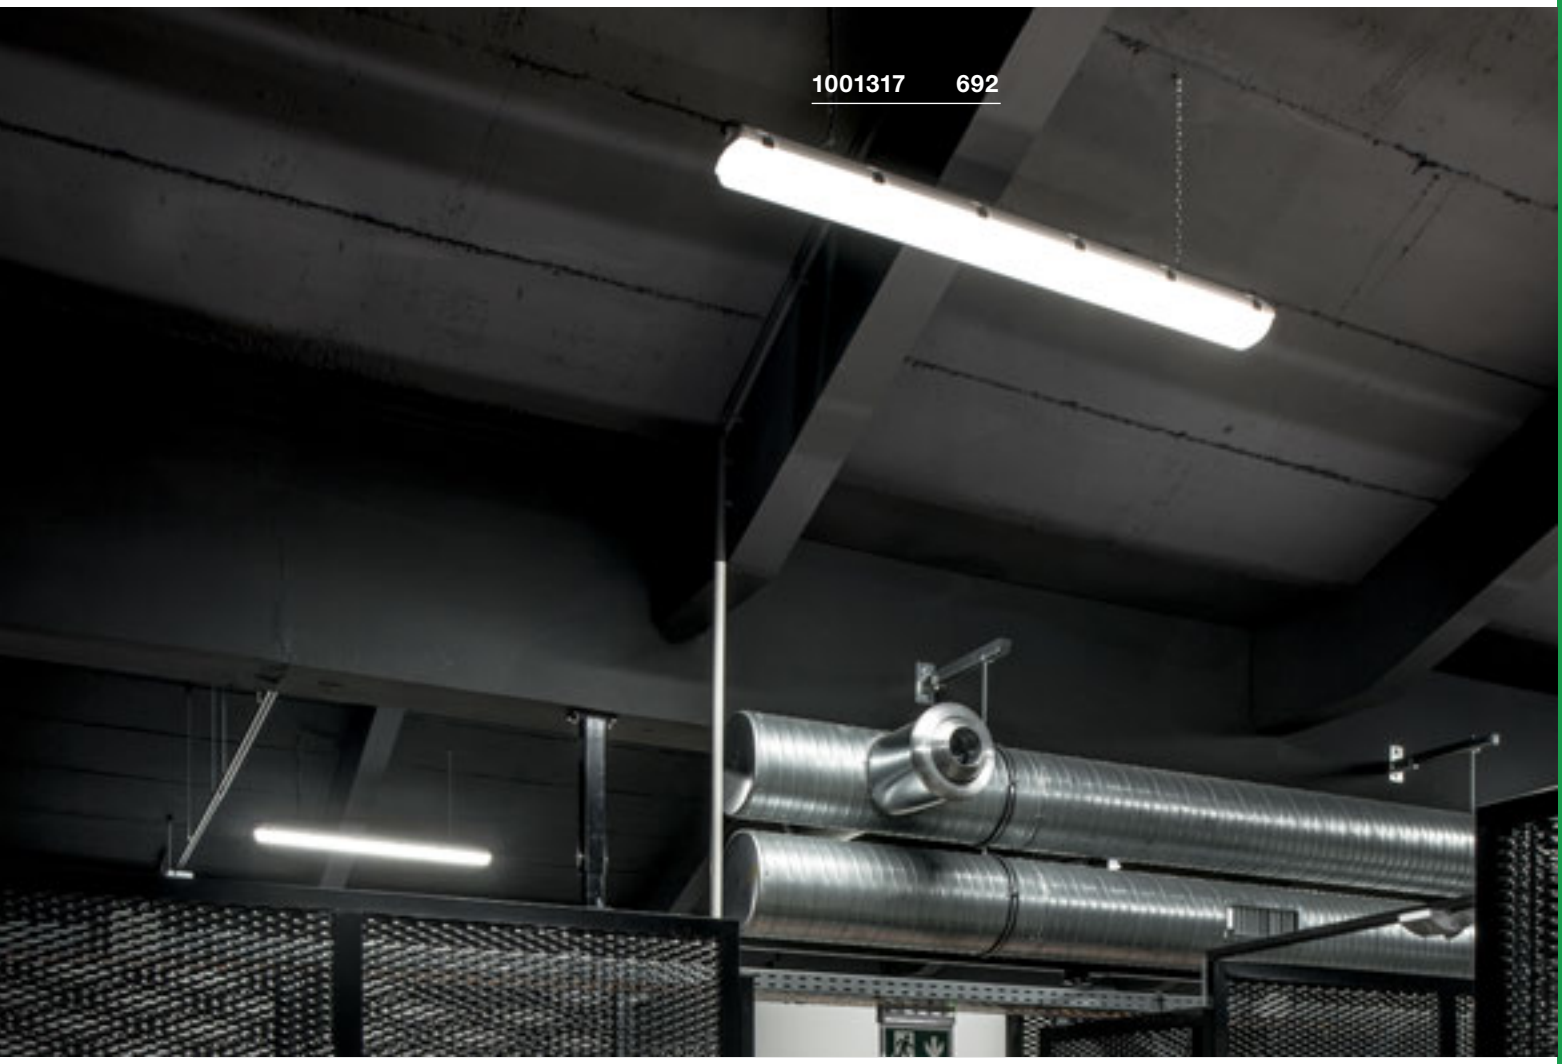
1001317 692

TOUGH ENOUGH FOR ANYTHING.

RECESSED LIGHTS OFFER LIGHT AND SECURITY.

Here you will find the right product to suit every application thanks to high-quality design, carefully selected materials and various IP protection ratings and technologies.





1006106 717



1002898 719


RECESSED LIGHTS


700


701


701


701


702


702


702


703


703


706


706


707


707


708

708


708


709


710

710


711


713


713


716

NEW


717


718


718


719


719


721


721


721


722


722


722


723


724


724


724

NEW


727

NEW


727

NEW


727

NEW


727


728


728


728


728


730


730

NEW


730


731

You can find more lights and variants at www.slv.com
Manufacturer's details for our recommended lamps are given in the chapter 'Lamps', from page 808

RECESSED WALL LIGHTS




233605 701


ADI
EL







940lm
|
INSIDE
|
3000K
CRI 80



IP 55 IK02 L70B50

100-277V ~50/60Hz | 500mA
Total wattage: 18W
Material: aluminium/polycarbonate (PC)

- Only mount the light with the light beam pointing downwards

233635	940lm 3000K	A→G A G E

Recessed fixing kit
Prod. no. 233639


Options	Prod. no.
940lm | 3000K | CRI80	
anthracite	**233635**






DOWNUNDER OUT S
EL



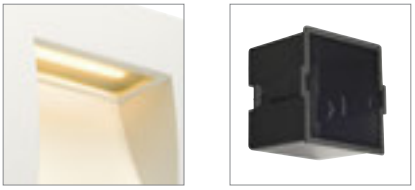

25|65lm
INSIDE
CRI 80
3000K



IP 55 L70B50

220-240V ~50/60Hz | 300mA
Total wattage: 1.7W
Material: aluminium/plastic


- Only mount the light with the light beam pointing downwards

233605, 233601	25lm | 65lm 3000K	A→G D


Options	Prod. no.
125 lm | 3000 K | CRI80	
anthracite/black	**233605**
65lm | 3000K | CRI80	
white/black	**233601**

DOWNUNDER OUT M
EL



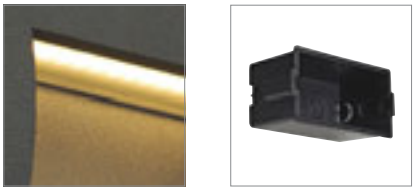

85|155lm
INSIDE
CRI 80
3000K



IP 55 L70B50

220-240V ~50/60Hz | 300mA
Total wattage: 4W
Material: aluminium/plastic


- Only mount the light with the light beam pointing downwards

233625, 233621	85lm | 155lm 3000K	A→G E


Options	Prod. no.
85lm | 3000K | CRI80	
anthracite/black	**233625**
155lm | 3000K | CRI80	
white/black	**233621**

DOWNUNDER OUT L
EL



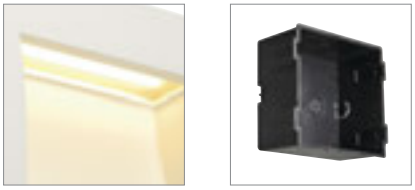

85|155lm
INSIDE
CRI 80
3000K



IP 55 L70B50


220-240V ~50/60Hz | 300mA
Total wattage: 4W
Material: aluminium/plastic

- Only mount the light with the light beam pointing downwards

233615, 233611	85lm | 155lm 3000K	A→G E


Options	Prod. no.
85lm | 3000K | CRI80	
anthracite/black	**233615**
155lm | 3000K | CRI80	
white/black	**233611**

BRICK MESH
EL, E14





52lm
INSIDE
3000K
CRI 80



IP 54 L70B50

100-240V ~50/60Hz | 24V
Total wattage: 3.3W
Material: 316 stainless steel/glass

- Recessed fixing kit included

229110	52lm 3000K	A→G F

Options	Prod. no.
52lm | 3000K | CRI80	
stainless steel	**229110**


BRICK
EL, symmetrical







950lm
INSIDE
3000K
CRI 80



IP 65 IK02 40° L70B50

220-240V ~50/60Hz | 700mA
Total wattage: 11W
Material: aluminium/316 stainless steel

- Recessed fixing kit included

233650	950lm 3000K	A→G D


Options	Prod. no.
950lm | 3000K | CRI80	
stainless steel	**233650**

BRICK
EL, asymmetrical





850lm
INSIDE
3000K
CRI 80



IP 65 IK02 L70B50


220-240V ~50/60Hz | 700mA
Total wattage: 11W
Material: aluminium/316 stainless steel

- Recessed fixing kit included

233660	850lm 3000K	A→G D

Options	Prod. no.
850lm | 3000K | CRI80	
stainless steel	**233660**



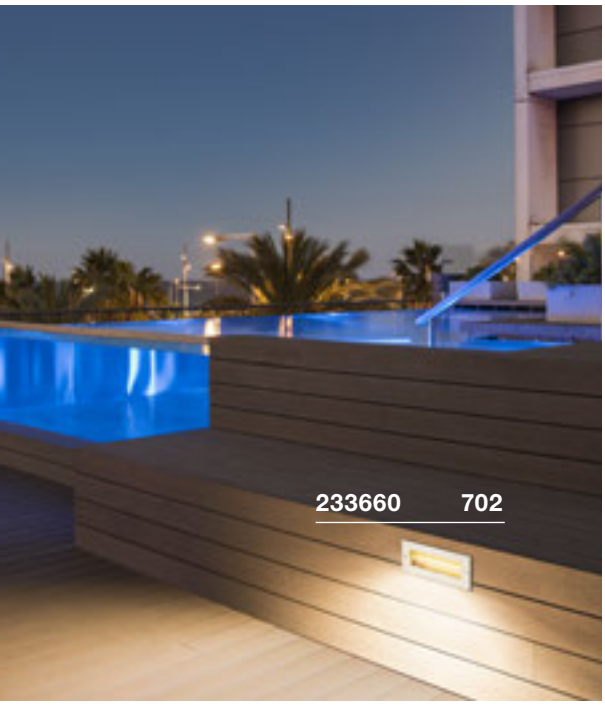




BRICK DOWNUNDER
EL, E14



SOCKET INSIDE <40 W



IP 44

220-240V ~50/60Hz
Material: aluminium/glass

- No recessed fixing kit required

E14 <40W
Diameter: 4.3 cm L: 12 cm

LED E14 | 4.2W | 320°
2700K | 370lm | EEK=F
5kWh/1000h

Prod. no. 1005284

Options	Prod. no.
1xE14	
grey	**229062**


BRICK DOWNUNDER
EL







LED INSIDE 30lm | 3000K | CRI 80



IP 54 L70B50

220-240V ~50/60Hz
Total wattage: 4W
Material: aluminium/glass

- Recessed fixing kit included

		A→G
229702	30lm 3000K	F

Options	Prod. no.
30lm | 3000K | CRI80	
grey	**229702**

RECESSED CEILING LIGHTS






PATTA-I
EL, round, PHASE





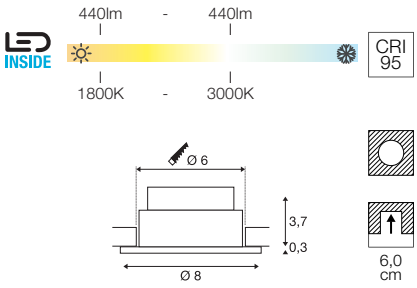

C,L | IP 20 / IP 65 | IK02 | 38° | 30 000 Hours | L70B50 | LED

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass

- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced
- Material thickness: max. 20mm


1002098, 1002099, 1002100	440lm 1800-3000K	A→G / A↑G F

Options	Prod. no.
440lm | 1800-3000K | CRI95	
■ black	**1002098**
440lm | 1800-3000K | CRI95	
□ white	**1002099**
440lm | 1800-3000K | CRI95	
▨ brushed aluminium	**1002100**

PATTA-I
DL, square, PHASE





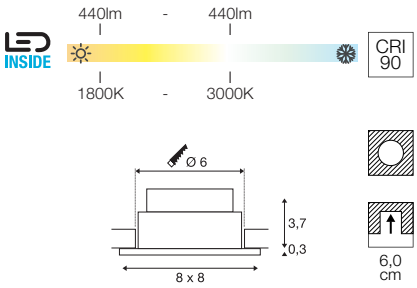

C,L | IP 20 / IP 65 | IK02 | 38° | 30 000 Hours | L70B50 | LED

220-240V ~50/60Hz | 350mA
Total wattage: 7.3W
Material: aluminium/glass

- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced
- Material thickness: max. 20mm

1002101, 1002102, 1002103	440lm 1800-3000K	A→G / A↑G F

Options	Prod. no.
440lm | 1800-3000K | CRI90	
■ black	**1002101**
440lm | 1800-3000K | CRI95	
□ white	**1002102**
440lm | 1800-3000K | CRI95	
▨ brushed aluminium	**1002103**









PATTA-I
EL, round, PHASE












910lm
3000K
CRI 90





220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Material thickness: max. 20mm

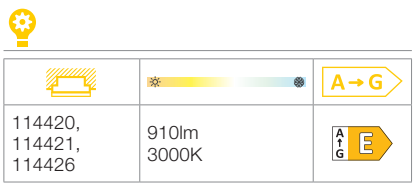

Options	Prod. no.
910lm | 3000K | CRI90	
black	**114420**
910lm | 3000K | CRI80	
white	**114421**
910lm | 3000K | CRI80	
brushed aluminium	**114426**

PATTA-I
EL, square, PHASE











910lm
3000K
CRI 80



220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Material thickness: max. 20mm

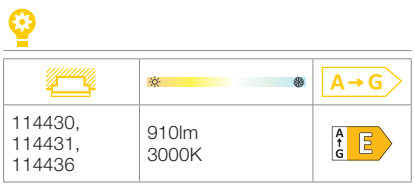


Options	Prod. no.
910lm | 3000K | CRI80	
black	**114430**
910lm | 3000K | CRI80	
white	**114431**
910lm | 3000K | CRI80	
brushed aluminium	**114436**

PATTA-F
EL, round, PHASE





745|860lm
INSIDE CRI 95
3000K



C,L | IP 20 / IP 65 | IK02 | 38° | 40 000 Hours | L70B50 | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass


- Material thickness: max. 20mm

PATTA-F
EL, square, PHASE





745|860lm
INSIDE CRI 80
3000K



C,L | IP 20 / IP 65 | IK02 | 38° | 40 000 Hours | L70B50 | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass


- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced
- Material thickness: max. 20mm

OUT 65
EL, round, PHASE





510|640lm
INSIDE CRI 80
3000K



C,L | IP 20 / IP 65 | IK02 | 38° | 40 000 Hours | L70B50 | LED

220-240V ~50/60Hz | 500mA
Total wattage: 11W
Material: aluminium/glass

- Products are delivered with spring clips. Leaf springs are included with the product and can be replaced
- Material thickness: max. 20mm

		A→G
114440, 114441	745lm | 860lm 3000K	A G E

Options	Prod. no.
745lm | 3000K | CRI95	
■ black	**114440**
860lm | 3000K | CRI80	
□ white	**114441**

		A→G
114450, 114451	745lm | 860lm 3000K	A G E

Options	Prod. no.
745lm | 3000K | CRI80	
■ black	**114450**
860lm | 3000K | CRI80	
□ white	**114451**

		A→G
114460, 114461	510lm | 640lm 3000K	A G E

Options	Prod. no.
510lm | 3000K | CRI80	
■ black/matte	**114460**
640lm | 3000K | CRI80	
□ white/matte	**114461**


KINI
EL, PHASE







850lm
3000K
CRI 80



8,5 cm

C,L | IP 65 | IK02 | 60° | L70B50 | 30°


LED


220-240V ~50/60Hz | 260mA
Total wattage: 12W
Material: aluminium/polycarbonate (PC)


- Material thickness of mounting surface: 5-20mm

1000833	850lm 3000K	A→G E

Options	Prod. no.
850lm | 3000K | CRI80	
white	**1000833**

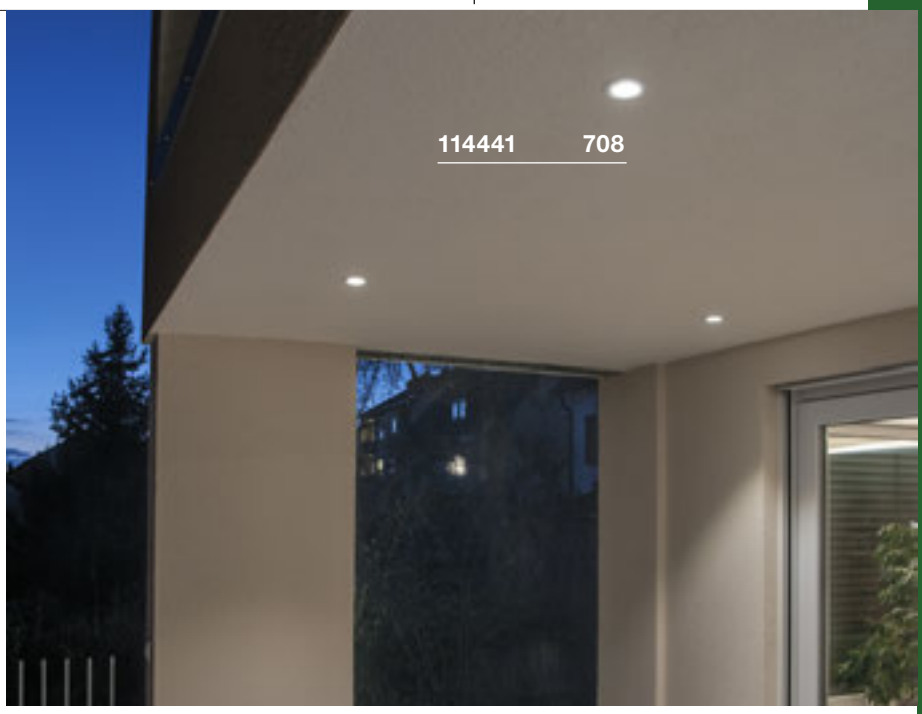

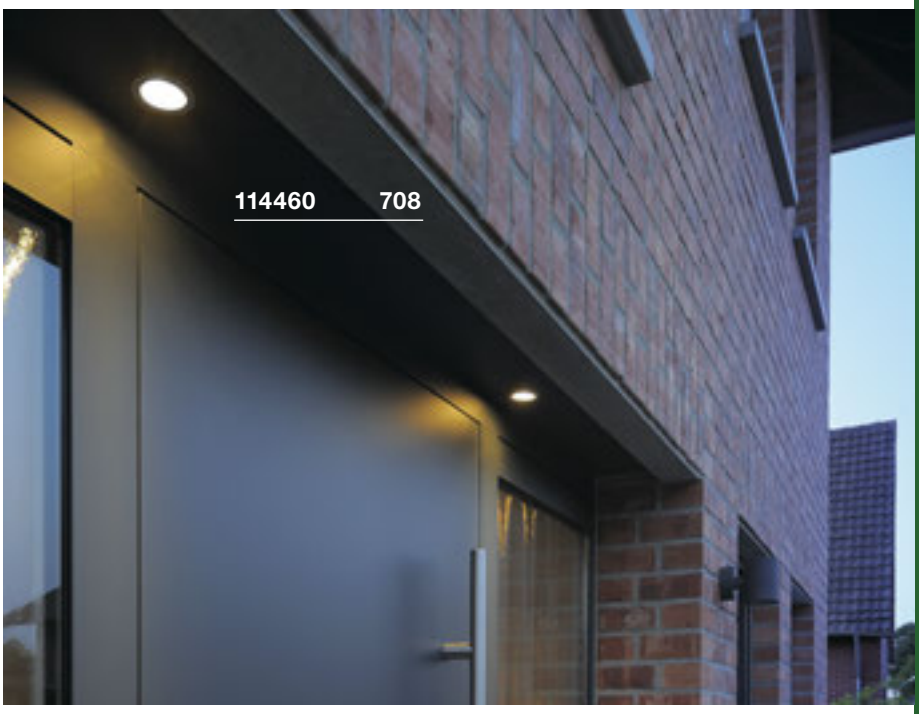


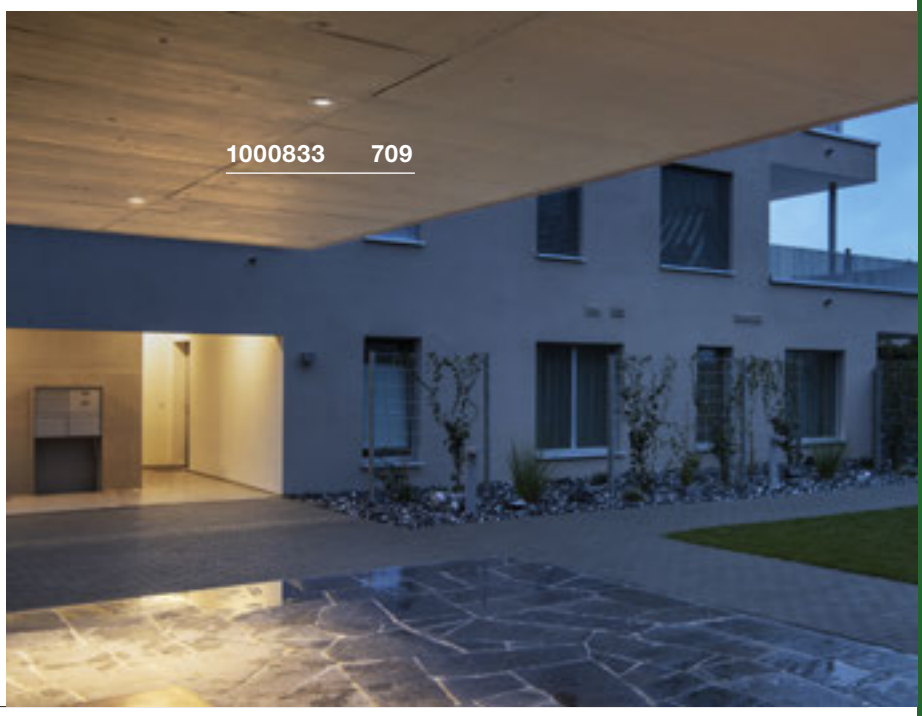

KAMUELA ECO
EL, round, PHASE





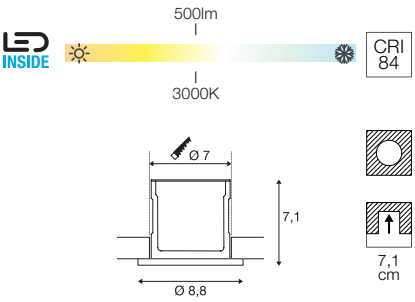

C,L | IP 65 | IK02 | 38° | 25 000 Hours | L70B50

220-240V ~50Hz
Total wattage: 6W
Material: aluminium/plastic


- Material thickness of mounting surface: max. 40mm

1001015, 1001016	500lm 3000K	A→G E

Options	Prod. no.
500lm | 3000K | CRI84	
■ black	**1001015**
500lm | 3000K | CRI84	
□ white	**1001016**

KAMUELA ECO
EL, round, PHASE



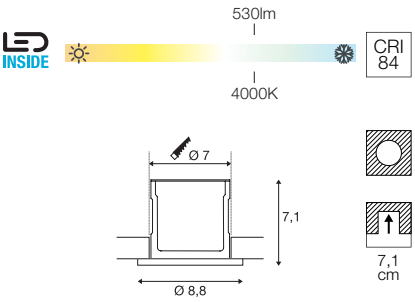

C,L | IP 65 | IK02 | 38° | 25 000 Hours | L70B50


220-240V ~50Hz
Total wattage: 6W
Material: aluminium/plastic

- Material thickness of mounting surface: max. 40mm


1001017, 1001018	530lm 4000K	A→G E

Options	Prod. no.
530lm | 4000K | CRI84	
■ black	**1001017**
530lm | 4000K | CRI84	
□ white	**1001018**



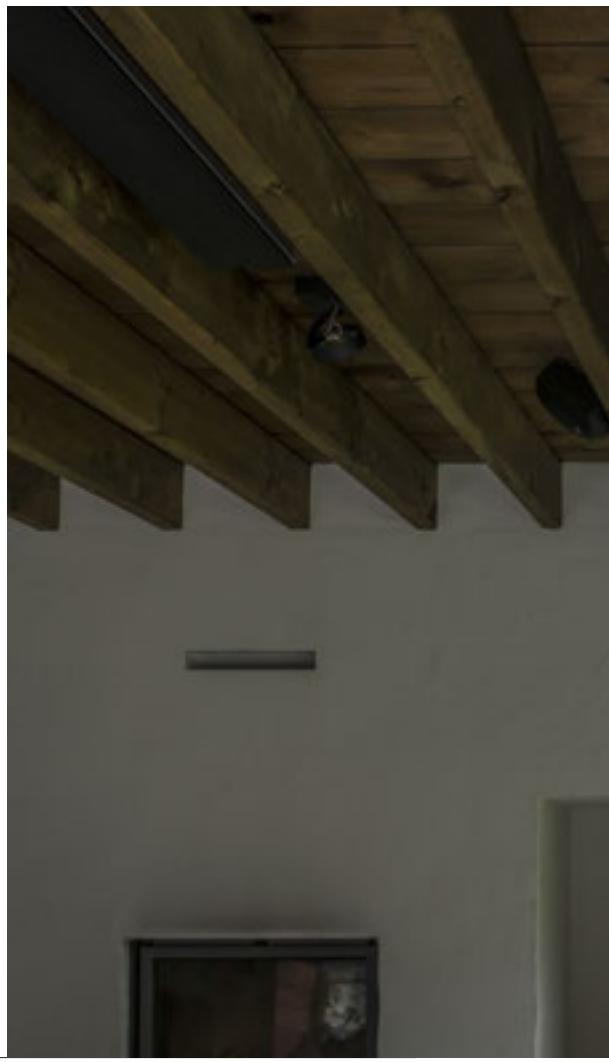




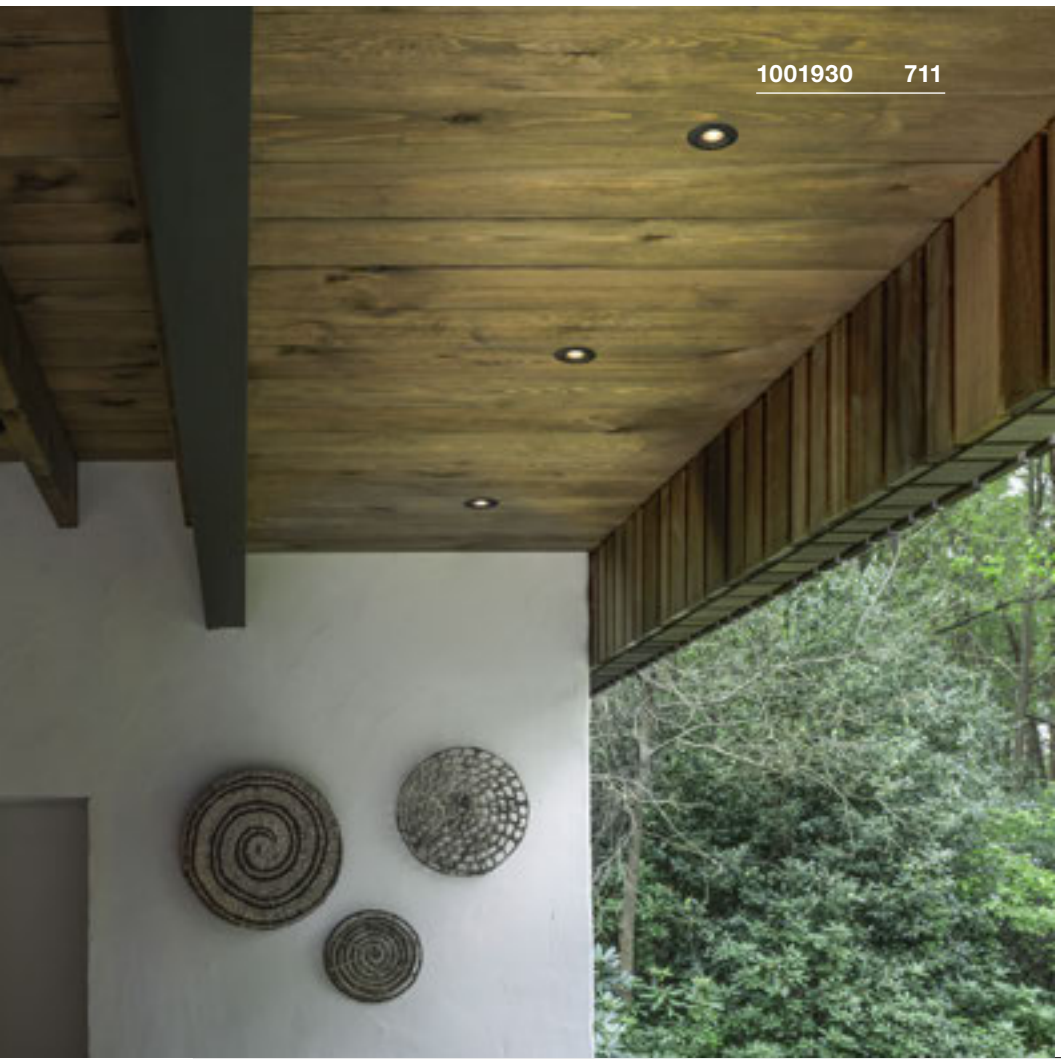


VARU
EL, QPAR51







SOCKET INSIDE <5 W



8,0 cm

IP 20 / IP 65 IK02

220-240V ~50/60Hz
Material: aluminium/glass


- Material thickness: max. 20mm

GU10 <5W
Diameter: 5 cm


LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h

Prod. no. 1004972

Options	Prod. no.
1xGU10 ■ black	**1001930**
1xGU10 □ white	**1001931**

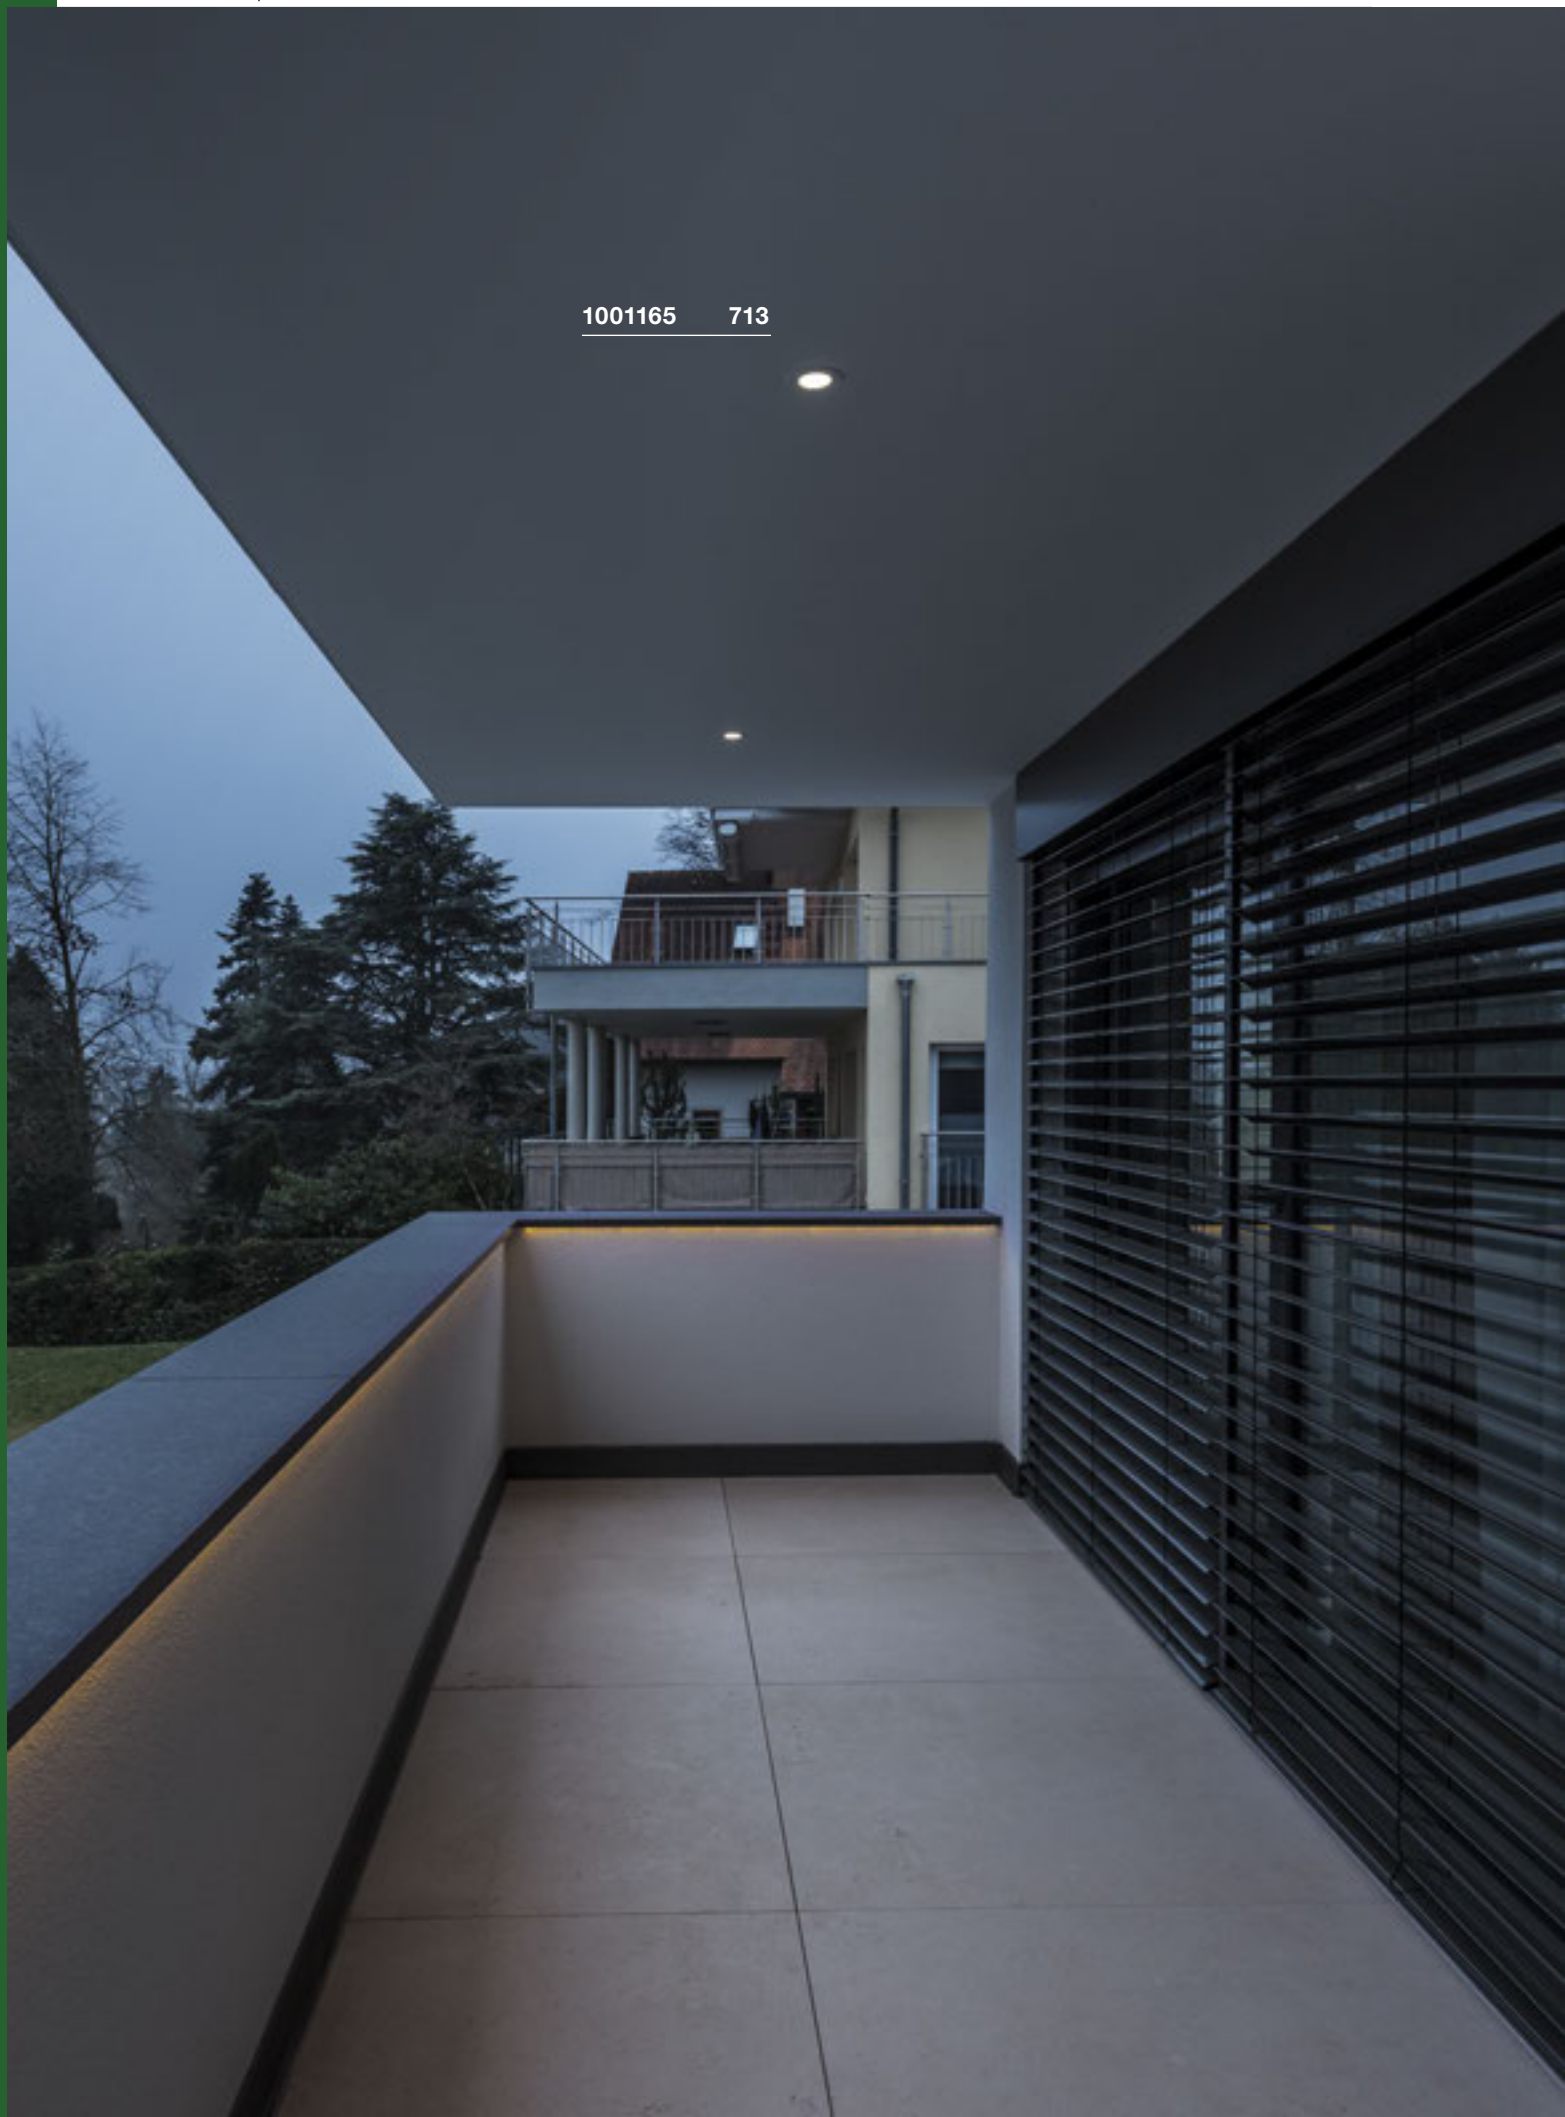

1001165 713

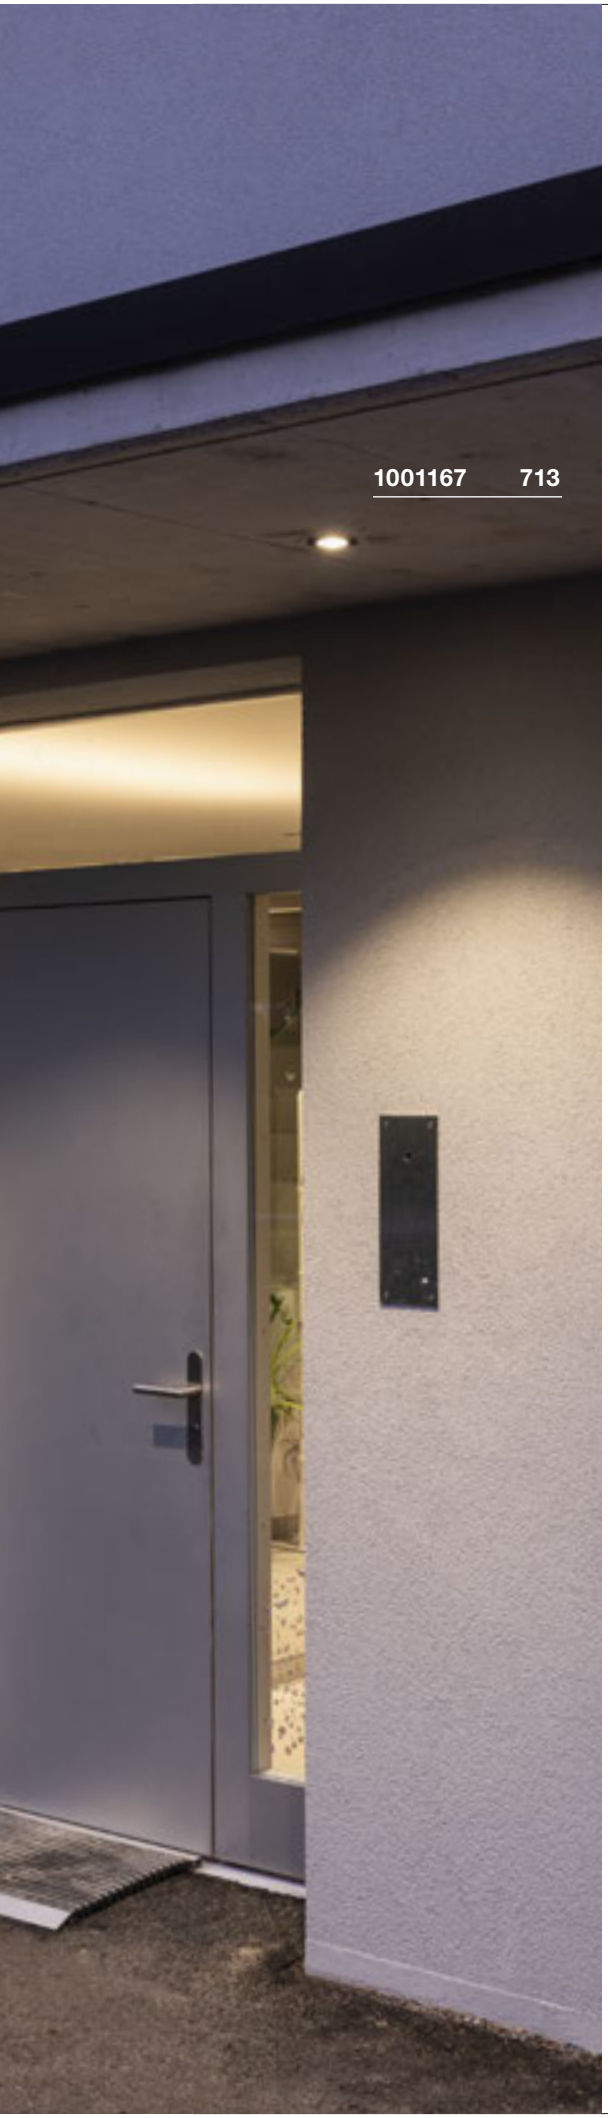

DOLIX OUT
EL, round, QPAR51










SOCKET INSIDE  <50 W



IP 65 IK02

220-240V ~50/60Hz
Material: aluminium/glass

• Material thickness: max. 20mm

GU10 <50W

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h




Prod. no. 1004972

Options	Prod. no.
1xGU10 white	**1001165**
1xGU10 chrome	**1001166**
1xGU10 grey	**1001167**
1xGU10 silver	**1001168**

DOLIX OUT
EL, square, QPAR51










SOCKET INSIDE  <50 W



IP 65 IK02

220-240V ~50/60Hz
Material: aluminium/glass

• Material thickness: max. 20mm

GU10 <50W

LED GU10 51mm | 4W | 36°
3000K | 270lm | EEK=G
4kWh/1000h



Prod. no. 1004973

Options	Prod. no.
1xGU10 white	**1001169**
1xGU10 chrome	**1001170**
1xGU10 grey	**1001171**
1xGU10 silver	**1001172**

RECESSED FLOOR LIGHTS





1006105 730

DASAR® FLAT 80
EL





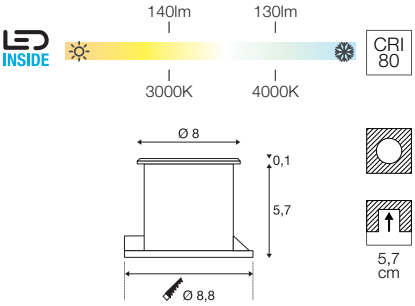

IP 65 / IP 67 | IK08 | 125° | L70B50 | 150 | 0.5 t


220-240V ~50/60Hz
Total wattage: 3.5W
Material: 304 stainless steel/glass

- Recessed fixing kit included
- Suitable for installation in wood
- Open cable end

228412, 1002188	140lm | 130lm 3000K | 4000K	A→G F

■ Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
140lm | 3000K | CRI80	
stainless steel	**228412**
130lm | 4000K | CRI80	
stainless steel	**1002188**

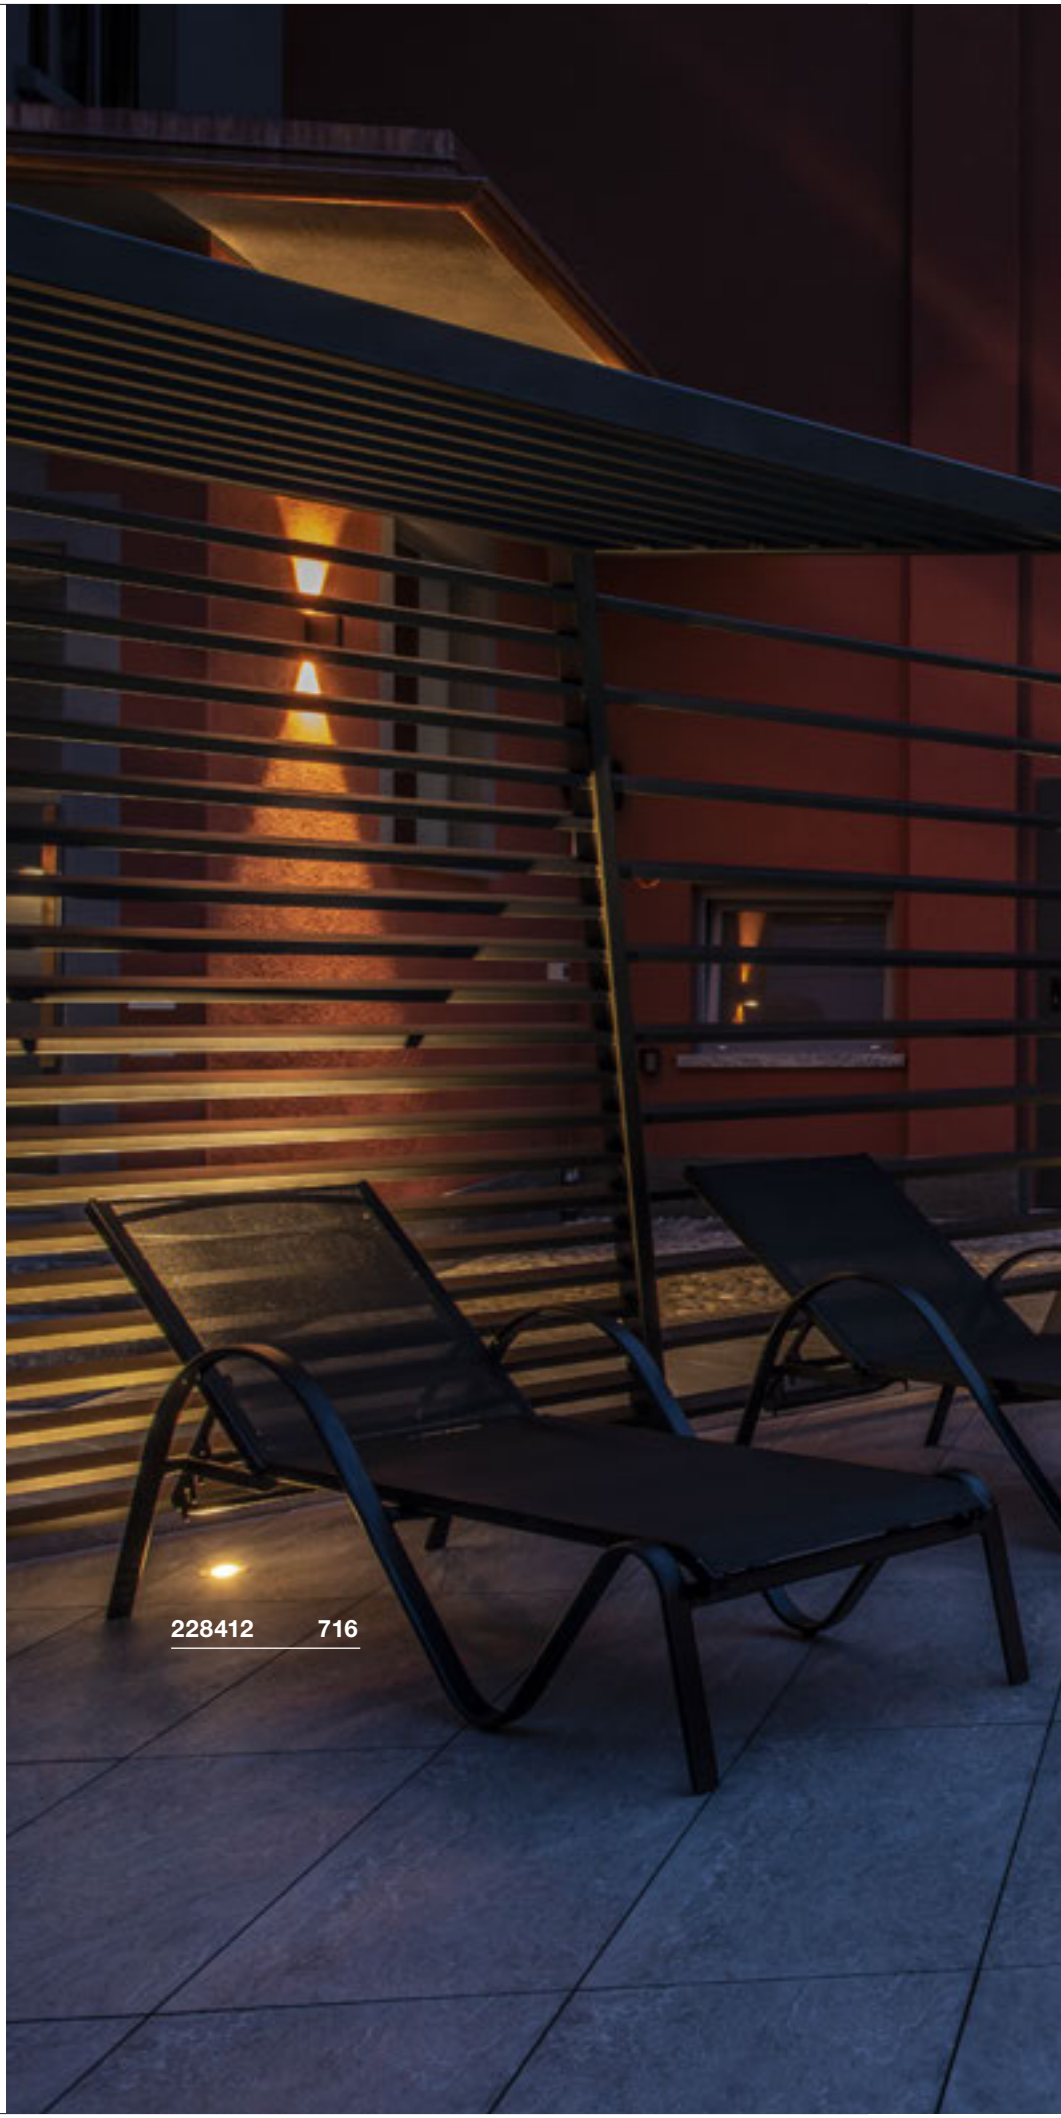








DASAR® FLAT 120
EL


NEW














220-240V ~50/60Hz | 350mA
Total wattage: 7W
Material: 304 stainless steel

- Open cable end

1006106, 1006107	520lm 3000K | 4000K	A→G D


Options	Prod. no.	
520lm | 3000K | CRI80 stainless steel	1006106	
520lm | 4000K | CRI80 stainless steel	1006107	

DASAR® 255
EL





1660lm | 1720lm
INSIDE
3000K | 4000K
CRI 90



IP 65 / IP 67 | IK08 | L70B50 | 2 t | LED

220-240V ~50/60Hz | 750mA
Total wattage: 31W
Material: 316 stainless steel/glass


- Recessed fixing kit included

229383, 229381	1660lm | 1720lm 3000K | 4000K	A→G E


Options	Prod. no.
1660lm | 3000K | CRI90	
stainless steel	**229383**
1720lm | 4000K | CRI90	
stainless steel	**229381**

DASAR® 920
EL





300|520lm
INSIDE
3000K
CRI 80




IP 67 | IK08 | 40° | L70B50 | 150 | 1 t | LED

12-24 V
Total wattage: 6.5W
Material: 316 stainless steel/glass


- Recessed fixing kit included
- Open cable end

233500	520lm 3000K	A→G F

Options	Prod. no.
520lm | 3000K | CRI80	
stainless steel	**233500**

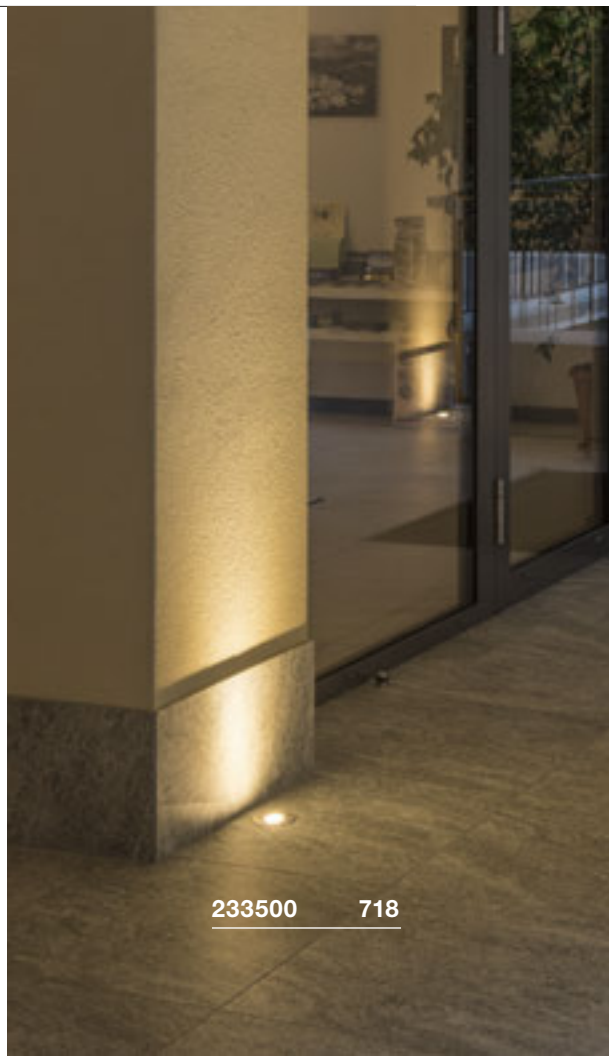



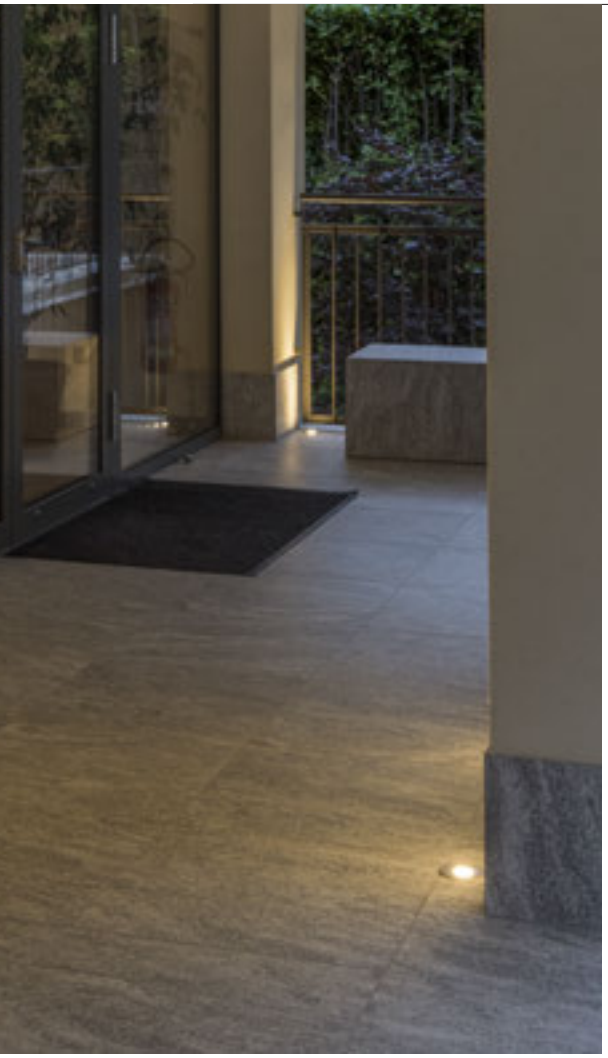




1002893 719

DASAR® 270
EL, asymmetrical



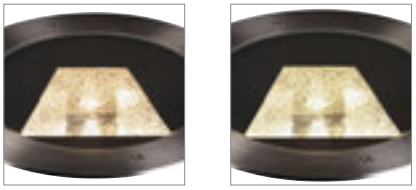


2000lm | 2100lm

INSIDE

3000K | 4000K

CRI 80



IP 65 / IP 67 | IK08 | L70B50 | 60 | 2 t | LED

220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/316 stainless steel

1002893, 1002895	2000lm | 2100lm 3000K | 4000K	A→G A G E

Options	Prod. no.
2000lm | 3000K | CRI80	
stainless steel	**1002893**
2100lm | 4000K | CRI80	
stainless steel	**1002895**

DASAR® 270
EL, symmetrical






2500lm | 2600lm

INSIDE

3000K | 4000K

CRI 80



IP 65 / IP 67 | IK08 | 38° | L70B50 | 30° | 60 | 2 t | LED


220-240V ~50/60Hz | 700mA
Total wattage: 30W
Material: aluminium/316 stainless steel


1002897, 1002898	2500lm | 2600lm 3000K | 4000K	A→G A G E

DASAR® 270 | Honeycomb cover
Prod. no. 1002899

Options	Prod. no.
2500lm | 3000K | CRI80	
stainless steel	**1002897**
2600lm | 4000K | CRI80	
stainless steel	**1002898**


229320 721

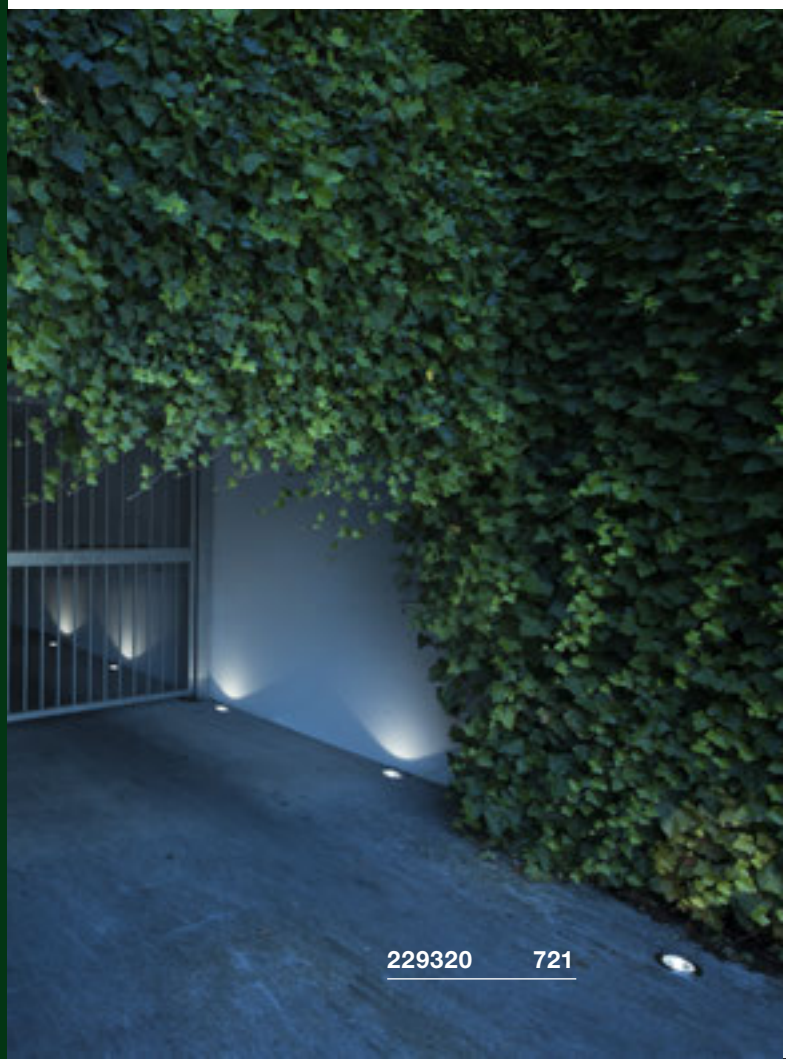

229320 721

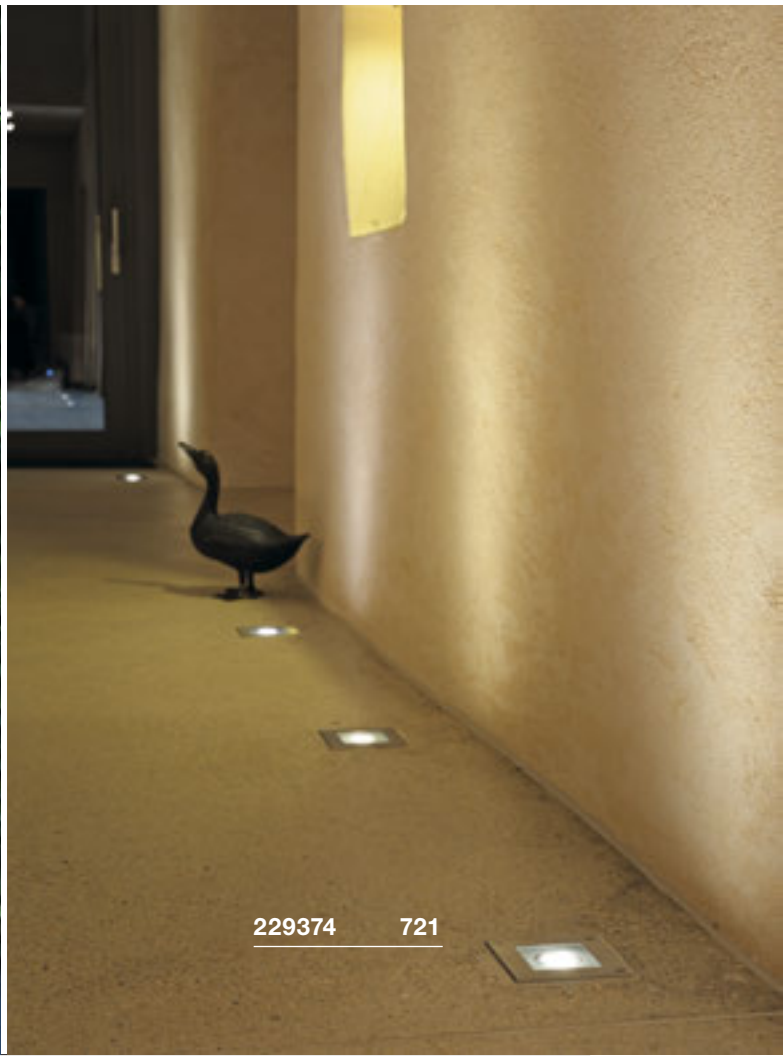
229374 721

DASAR® 80
EL, round/square, QPAR51



SOCKET INSIDE <35 W

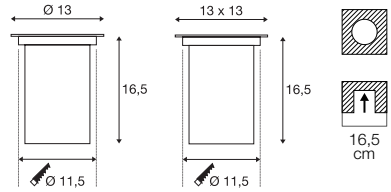

IP 67 IK08 90° 30° 2 t

220-240V ~50/60Hz
Material: 316 stainless steel/glass

- Recessed fixing kit included

GU10 <35W
Diameter: 5 cm L: 6 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h


Prod. no. 1004972

Options	Prod. no.
1xGU10	
stainless steel	**229320**
1xGU10	
stainless steel	**229324**

DASAR® 70
EL, square, QPAR51



SOCKET INSIDE <35 W

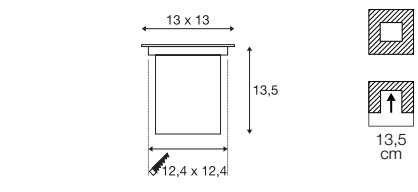

IP 67 IK08 90° 30° 2 t

220-240V ~50/60Hz
Material: 316 stainless steel/glass

- Recessed fixing kit included

GU10 <35W
Diameter: 5 cm L: 6 cm

LED GU10 51mm | 4W | 36°
2700K | 270lm | EEK=G
4kWh/1000h


Prod. no. 1004972

Options	Prod. no.
1xGU10	
stainless steel	**229374**

DASAR® EXACT 116
EL, round/square, QPAR51



SOCKET INSIDE <35 W

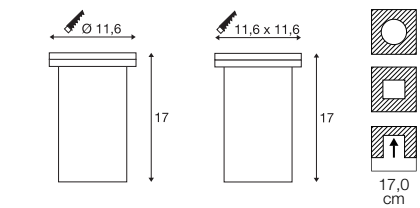

IP 67 IK08 90° 30° 2 t

220-240V - 50/60Hz
Material: 316 stainless steel/glass

- Recessed fixing kit included

GU10 <35W
Diameter: 5 cm L: 6 cm

LED GU10 51mm | 6W | 38°
3000K | 470lm | EEK=F
6kWh/1000h


Prod. no. 1005079

Options	Prod. no.
1xGU10	
stainless steel	**228430**
1xGU10	
stainless steel	**228434**

DASAR® 215
EL, round/square, QPAR111



SOCKET INSIDE <75 W

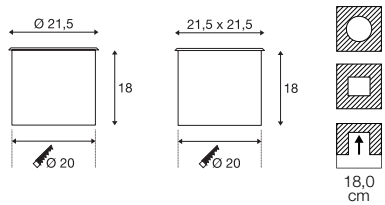

IP 67 IK08 2 t

220-240V - 50/60Hz
Material: 316 stainless steel/glass

- Recessed fixing kit included

GU10 <75W

LED QPAR111 | 12.5W | 30°
4000K | 290lm | EEK=F
13kWh/1000h


Prod. no. 1005282

Options	Prod. no.
1xGU10	
stainless steel	**229230**
1xGU10	
stainless steel	**229234**

DASAR® 215
EL, round, E27



SOCKET INSIDE <11 W



IP 67 IK08 2 t

220-240V - 50/60Hz
Material: 316 stainless steel/glass

- Surface temperature:
  Energysaver = 48°C/
  PAR 30 = 119°C/
  PAR 38 = 108°C
- Recessed fixing kit included

E27 <11W
Diameter: 4.5 cm L: 13.4 cm

LED E27 | 8W | 240°
3000K | 870lm | EEK=E
8kWh/1000h


Prod. no. 1005289

Options	Prod. no.
1xE27	
stainless steel	**229200**

DASAR® 218
EL, QR111



SOCKET INSIDE <50 W



IP 67 IK06 160° 180° 0,5 t

220-240V - 50/60Hz / 12V
Material: 316 stainless steel/glass

- Recessed fixing kit included


G53 <50W

LED G53 | 15W | 24°
2700K | 760lm | EEK=G
17kWh/1000h

Prod. no. 560231


Options	Prod. no.
1xG53	
stainless steel	**228370**



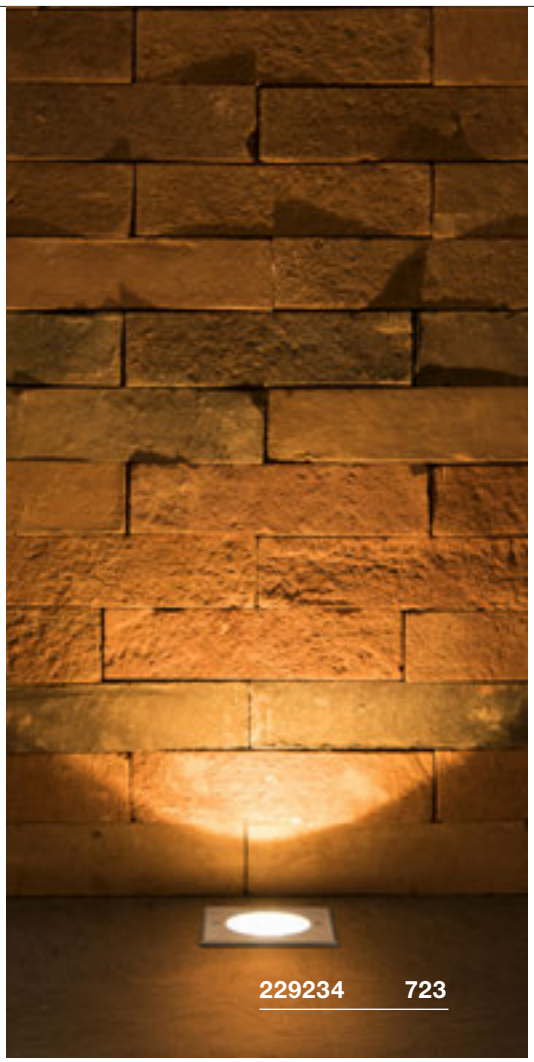






DASAR® 370
EL, round

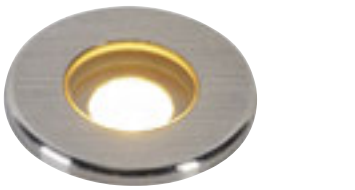












12-24 V
Power consumption: 2W
Material: 316 stainless steel/glass

- Suitable for installation in wood
- Open cable end

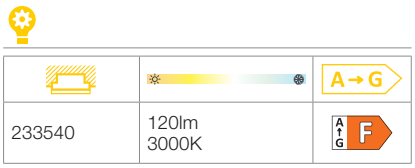

Options	Prod. no.
120lm | 3000K | CRI80	
stainless steel	**233540**


TRAIL-LITE® 60
EL








10lm
INSIDE
3000K
CRI 80





IP 65 IK08 L70B50

12V ~50/60Hz
Power consumption: 0.3W
Material: 316 stainless steel/glass

- Only operate with a conventional transformer
- Recessed fixing kit included
- Suitable for installation in wood

Options

Options	Prod. no.
10lm | 3000K | CRI80	
stainless steel	**227462**


Transformer, 12V AC | 105VA IP44
Prod. no. 227140




POWER TRAIL-LITE®
EL, round/square



45lm
INSIDE
3000K
CRI 90





IP 67 IK08 60° L70B50 200

350mA
Total wattage: 1W
Material: 316 stainless steel/glass

- Only opeate with 350mA driver. Only wire together multiple PowerLEDs in series!
- Installation sleeve included
- Suitable for installation in wood
- Open cable end

228332, 228342	45lm 3000K	F

Options

Options	Prod. no.
45lm | 3000K | CRI90	
stainless steel	**228332**
45lm | 3000K | CRI90	
stainless steel	**228342**

LED driver 320mA | 3W
incl. strain relief
Prod. no. 464108




GIMBLE OUT
EL








1000lm
INSIDE
3000K
CRI 80





IP 65 / IP 67 IK08 36° L70B50 350° 90° 50

220-240 V ~50/60 Hz | 600 mA
Total wattage: 13W
Material: 316 stainless steel/glass

- Open cable end

1000384	1000lm 3000K	E

Options

Options	Prod. no.
1000lm | 3000K | CRI80	
stainless steel	**1000384**

Connection box IP68, 3-pole
Prod. no. 228730




Installation pipe DN160
Prod. no. 233792



Floor-recessed fixing kit
Prod. no. 1000655

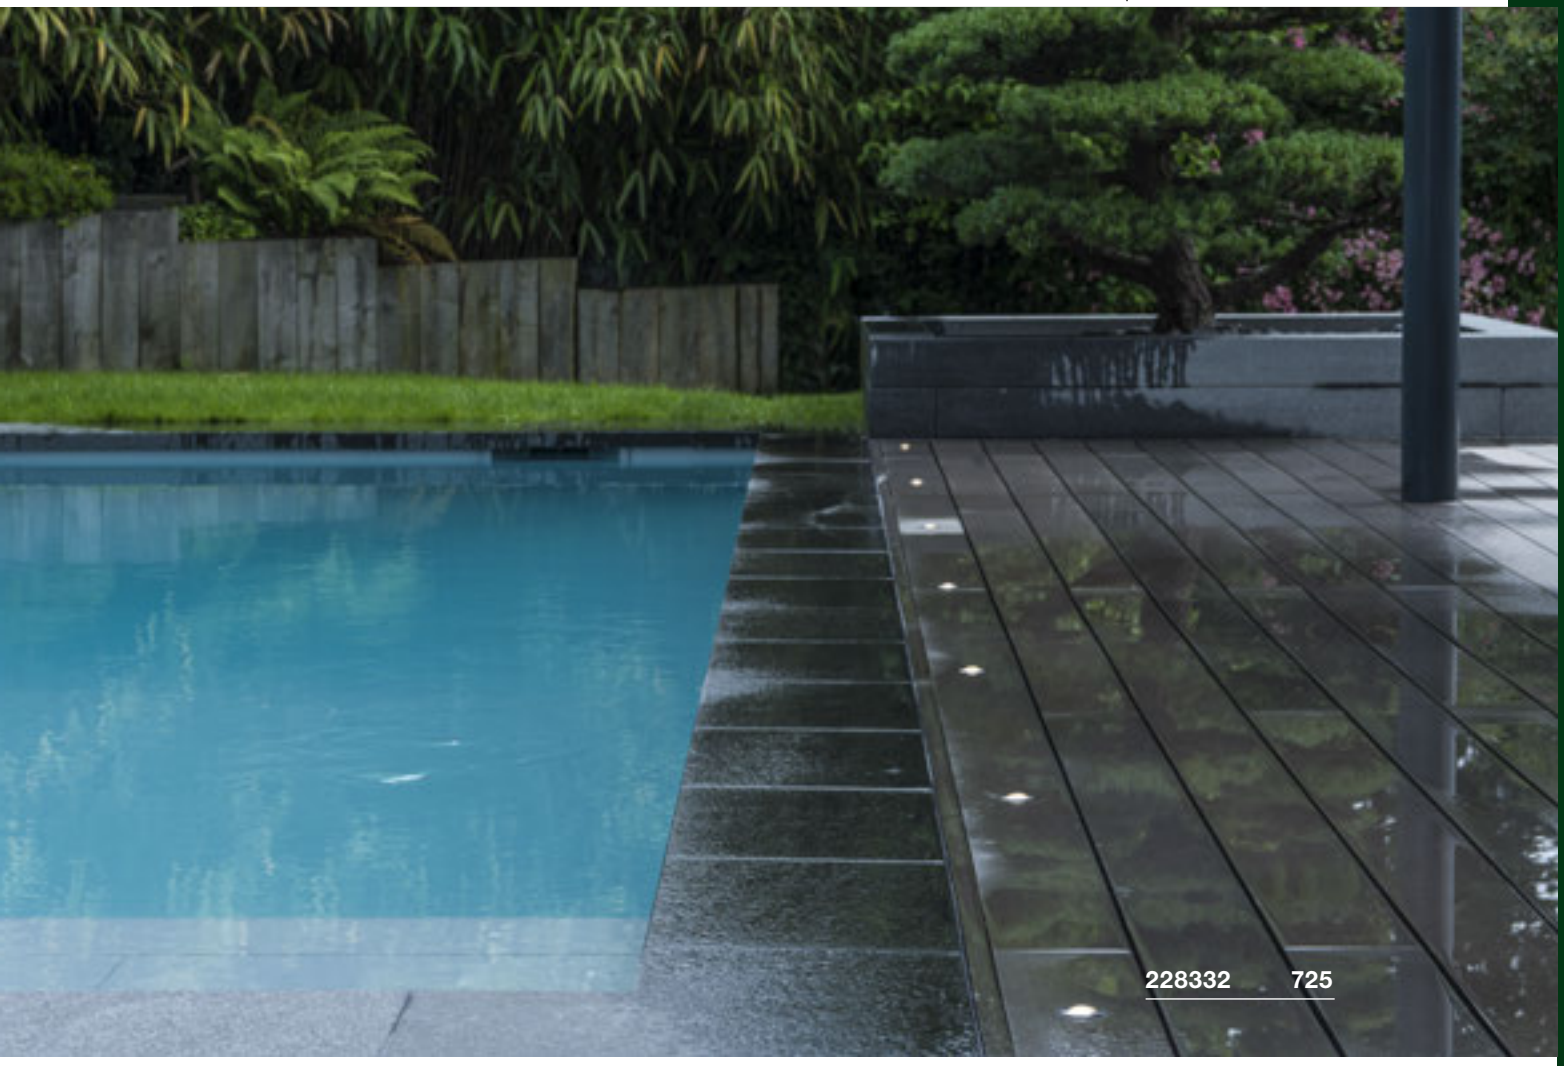


228332 725


1000384 725




1006171 + 1006173 727

SMALL PLOT
Cover, 2-pack

NEW



Material 1006173: 316 stainless steel
Material 1006174: aluminium



Options	Prod. no.
stainless steel	**1006173**
anthracite	**1006174**


SMALL PLOT
Modules

NEW





240lm
INSIDE
CRI 80
3000K



IP 67 | 180° | L70B50 | 50

24V DC
Power consumption: 3W
Material: aluminium/polymethylmethacrylate (PMMA)

- Open cable end

1006172	240lm 3000K	A→G A F G

Options	Prod. no.
240lm | 3000K | CRI80	
aluminium	**1006172**


SMALL PLOT
Modules

NEW





240lm
INSIDE
CRI 80
3000K



IP 67 | 180° | L70B50 | 50

24V DC
Power consumption: 3W
Material: polymethylmethacrylate (PMMA)

- Open cable end

1006171	240lm 3000K	A→G A F G


Options	Prod. no.
240lm | 3000K | CRI80	
stainless steel	**1006171**

SMALL PLOT
Cover, 4-pack

NEW



Material 1006175: 316 stainless steel
Material 1006176: aluminium




Options	Prod. no.
stainless steel	**1006175**
anthracite	**1006176**

BIG PLOT
Modules





460lm
INSIDE
3000K
CRI 80



IP 67 IK06 180° -

220-240V ~50/60Hz | 16mA
Total wattage: 5.5W
Material: aluminium/polymethylmethacrylate (PMMA)

- Open cable end
- This product is delivered without a cover. You can find suitable covers on page 728

The energy efficiency class information for this product was not available at the time of printing. The latest product data can always be found at www.slv.com

Connection box IP68, 3-pole
Prod. no. 228730


Options	Prod. no.
460lm | 3000K | CRI80	
aluminium	**1001256**

BIG PLOT
Modules





460lm
INSIDE
3000K
CRI 80



IP 67 IK06 180° -

220-240V ~50/60Hz | 16mA
Total wattage: 5.5W
Material: polymethylmethacrylate (PMMA)

- Open cable end
- This product is delivered without a cover. You can find suitable covers on page 728

The energy efficiency class information for this product was not available at the time of printing. The latest product data can always be found at www.slv.com

Connection box IP68, 3-pole
Prod. no. 228730

Options	Prod. no.
460lm | 3000K | CRI80	
stainless steel	**1001359**


BIG PLOT
Cover, 2-pack





Material: 1001254/316 stainless steel
Material 1001252/1001262: aluminium

1001254 loadable up to 0.8t
1001252 loadable up to 0.5t
1001262 loadable up to 0.5t



Options	Prod. no.
stainless steel	**1001254**
grey	**1001252**
anthracite	**1001262**


BIG PLOT
Cover, 4-pack






Material: 1001255: 316 stainless steel
Material: 1001253/1001263: aluminium

1001255 loadable up to 0.8t
1001253 loadable up to 0.5t
1001263 loadable up to 0.5t



Options	Prod. no.
stainless steel	**1001255**
grey	**1001253**
anthracite	**1001263**

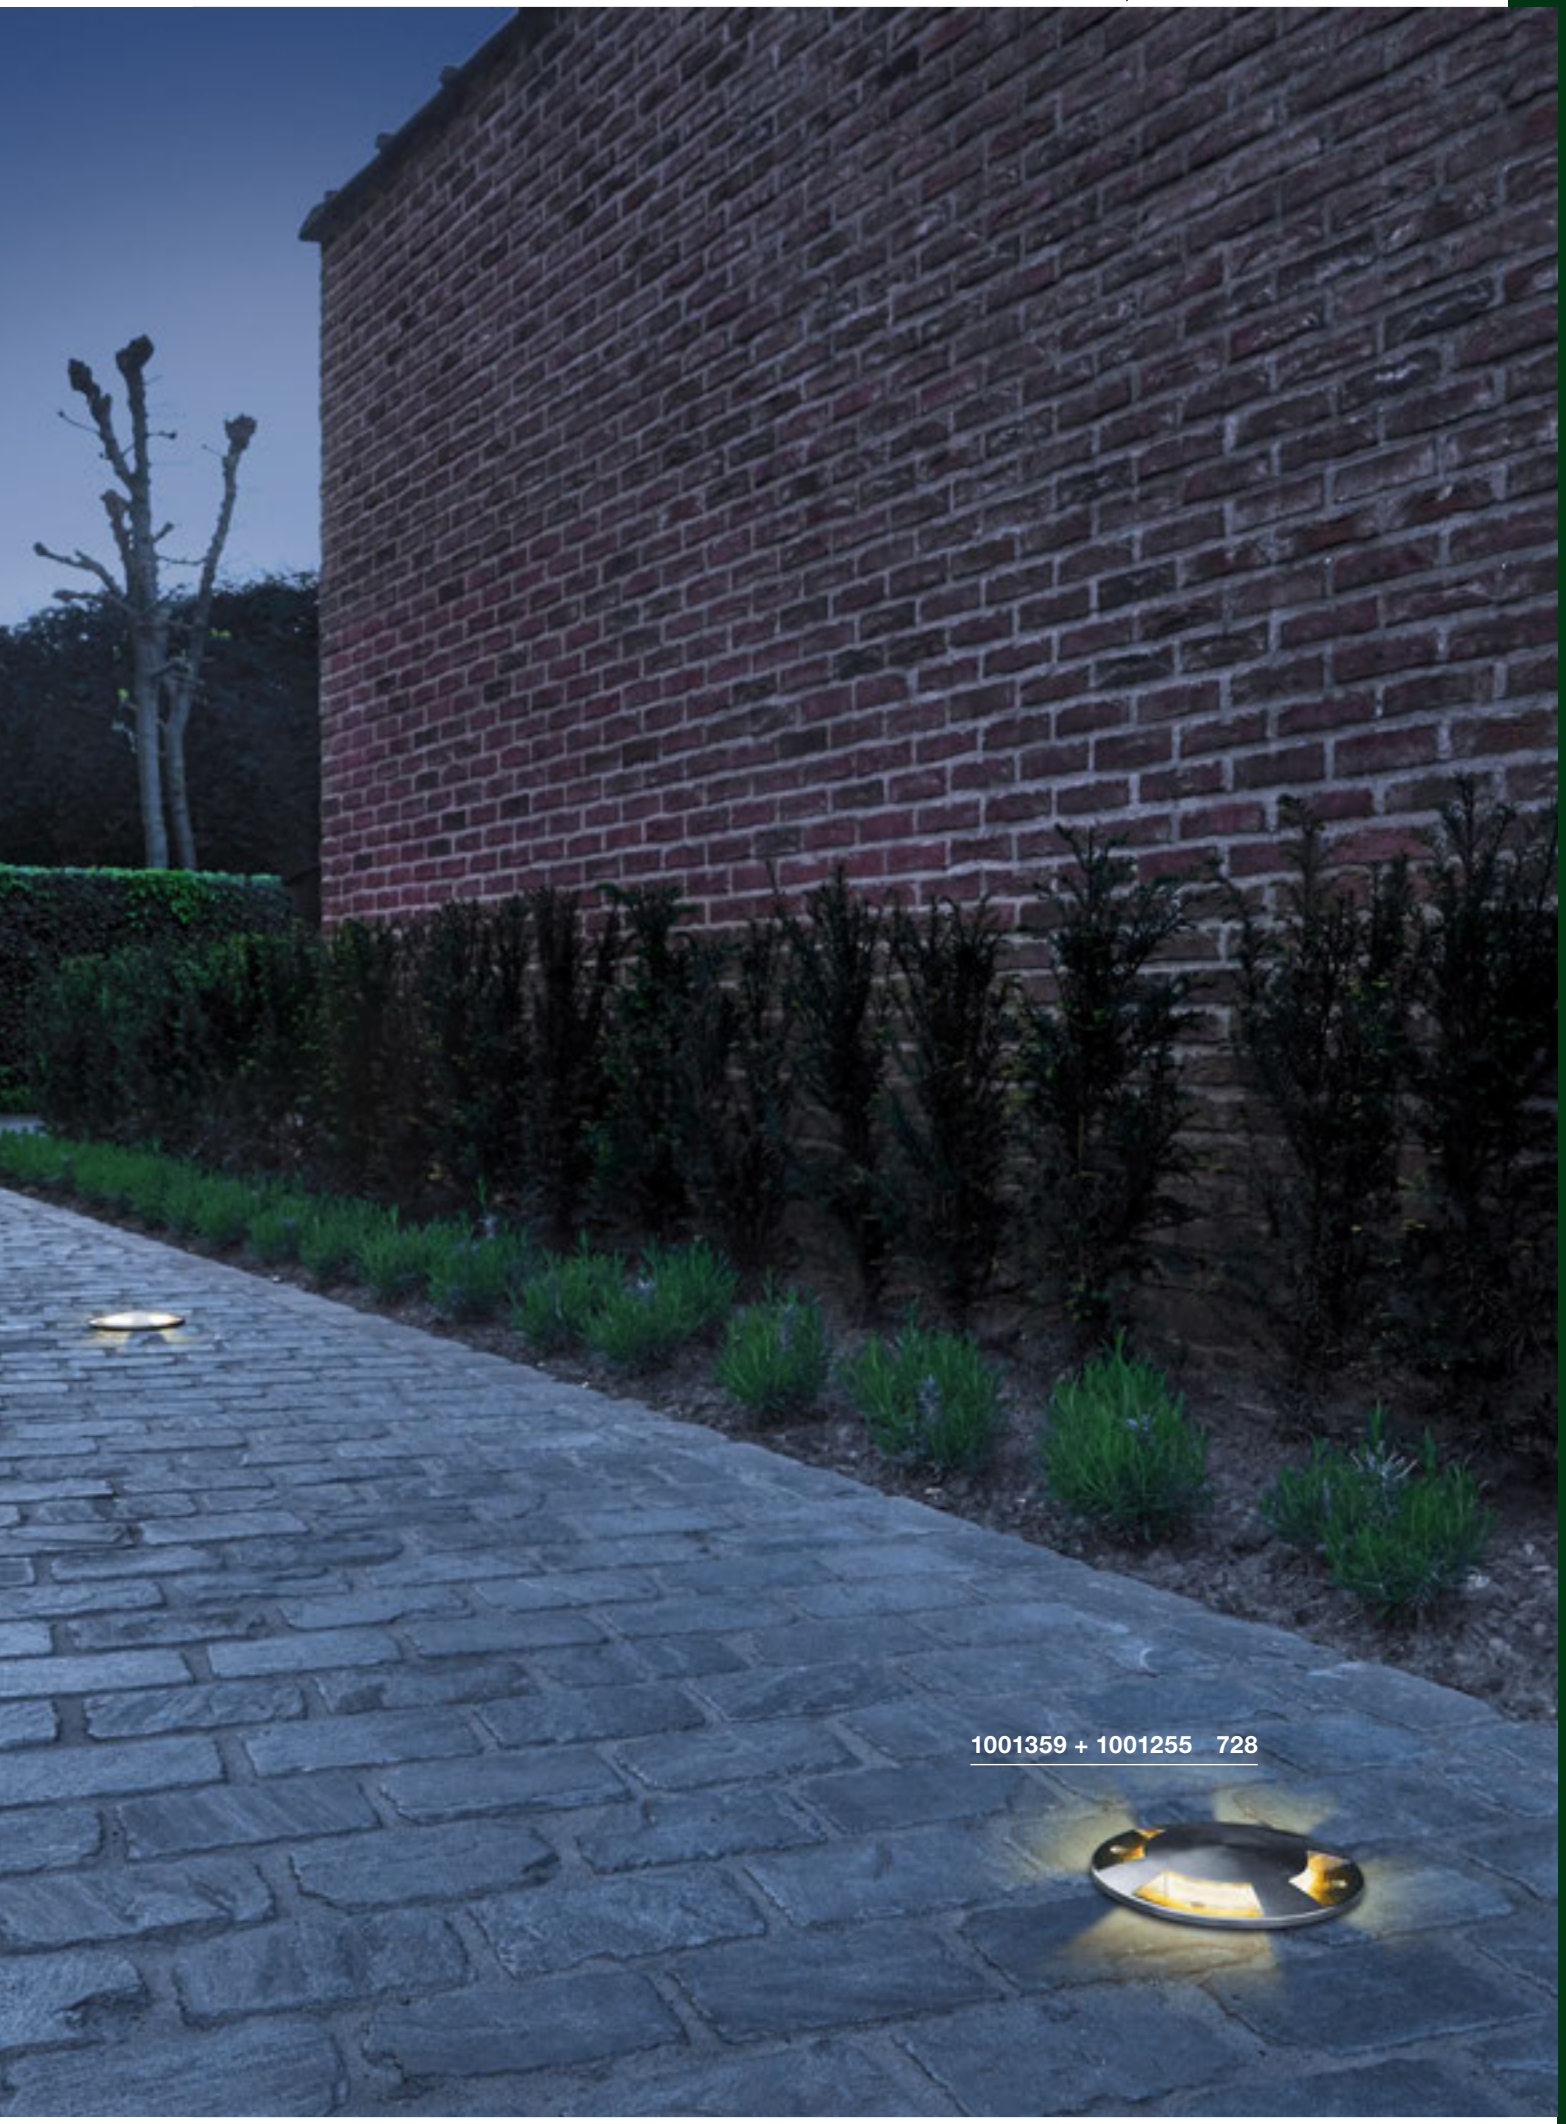


1001359 + 1001255 728

ROCCI
EL, round





580lm
3000K
CRI 80



IP 67 IK08 120° L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6W
Material: 316 stainless steel/glass

• Recessed fixing kit included

227600	580lm 3000K	F


Options	Prod. no.
580lm | 3000K | CRI80	
stainless steel	**227600**

ROCCI
EL, square





580lm
3000K
CRI 80



IP 67 IK08 120° L70B50

100-277 V ~50/60 Hz | 700 mA
Total wattage: 8.6W
Material: 316 stainless steel/glass

• Recessed fixing kit included

227604	580lm 3000K	F

Options	Prod. no.
580lm | 3000K | CRI80	
stainless steel	**227604**


ROCCI 200
EL, round/square

NEW





1530lm
3000K
CRI 80

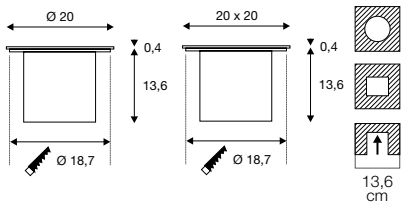

IP 65 / IP 67 IK08 120° L70B50 10 0,5 t

100-277V ~50/60Hz | 350mA
Total wattage: 16W
Material: steel

• Recessed fixing kit included

1006104 1006105	1530lm 3000K	E

Options	Prod. no.
1530lm | 3000K | CRI80	
stainless steel	**1006104**
1530lm | 3000K | CRI80	
stainless steel	**1006105**



227600 730



227604 730




1006105 731

SOLASTO
EL, round



SOCKET INSIDE <6 W

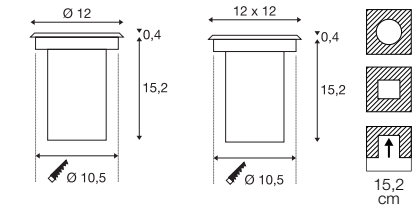

IP 67 IK08 0,6 t

220-240V - 50/60Hz
Material: 304 stainless steel/glass

- Recessed fixing kit included

GU10 <6W

LED GU10 51mm | 4W | 36°
3000K | 280lm | EEK=F
4kWh/1000h






















Prod. no. 1004973

Options	Prod. no.
1xGU10 stainless steel	**227680**
1xGU10 stainless steel	**227684**

LED PROFILES

OVERVIEW



LED profile			Installation type			Cross-section	Beam angle	Page
			Surface-mounted	Recessed	Pendant			
GRAZIA 10	Standard		✓	–	–			735
	Flat		✓	–	–			735
	Recessed		–	✓	–			735
GRAZIA 10 EDGE	Surface-mounted		✓	–	–			738
GRAZIA 20	Standard		✓	–	✓			741
	Flat		✓	–	✓			741
	Recessed		–	✓	–			742
GRAZIA 60	Surface-mounted		✓	–	–			747
	Recessed		–	✓	–			747

You can find suitable strips and components from page 750 and suitable accessories (mains adapters, drivers, etc.) from page 795

GRAZIA 10


SURFACE-MOUNTED AND RECESSED PROFILE





SURFACE-MOUNTED PROFILE, FLAT







Surface-mounted, flat, aluminium, white, black

Length	Color	Material	Prod. no.
200 cm	aluminium	aluminium	1000460
	white		1000461
	black		1000462

Width/height: 1.75/1.1 cm, max. width LED strip: 1.0 cm, cover not included

SURFACE-MOUNTED PROFILE, STANDARD

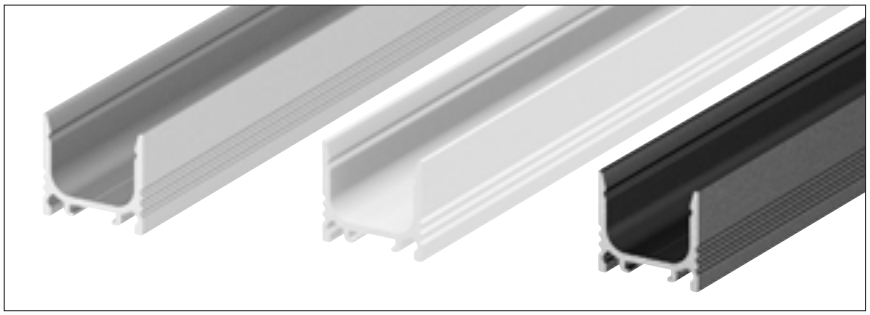





Surface-mounted, standard, aluminium, white, black

Length	Color	Material	Prod. no.
200 cm	aluminium	aluminium	1000463
	white		1000464
	black		1000465

Width/height: 1.75/1.62 cm, max. width LED strip: 1.0 cm, cover not included

RECESSED PROFILE

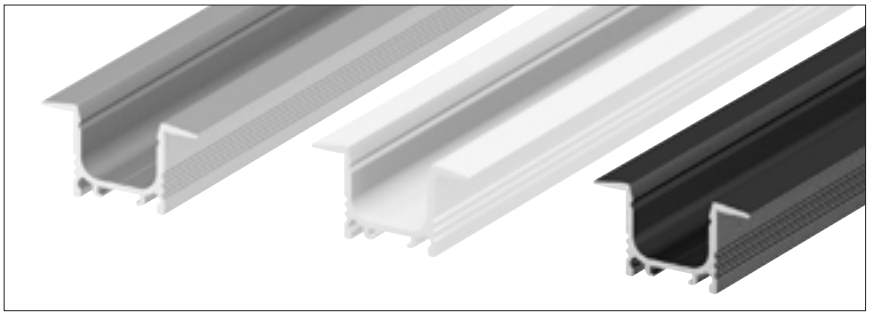




Recessed profile, anodized aluminium, white, black


Length	Color	Material	Prod. no.
200 cm	aluminium	aluminium	1000457
	white		1000458
	black		1000459


Width/height: 3.0/1.62 cm, max. width LED strip: 1.0 cm, cover not included


GRAZIA 10
ACCESSORIES


COVERS

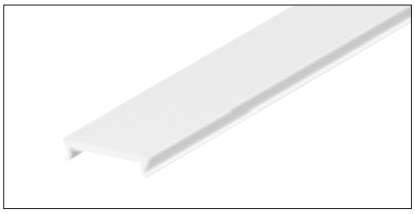
Flat, frosted

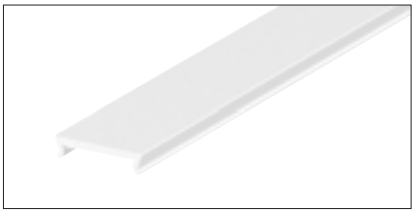
Flat, milky

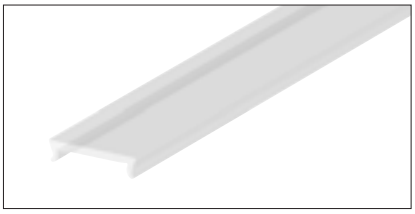
Flat, transparent

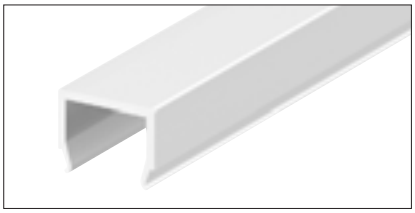
High, milky (only suitable for surface-mounted profiles)

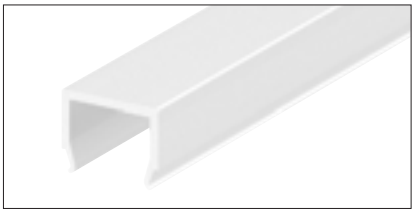

High, frosted (only suitable for surface-mounted profiles)


Length	Color	Material	Prod. no.
200 cm	☐ flat, frosted	plastic PC	**1000466**
	☐ flat, milky	plastic PMMA	**1000468**
	☐ flat, transparent	plastic PC	**1000467**
	☐ flat, frosted	plastic PMMA	**1000469**
	☐ high, milky*	plastic PC	**1000470**
	☐ high, frosted*	plastic PMMA	**1000471**

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

* The high covers are only suitable for GRAZIA 10 surface-mounted profiles, not for recessed profiles.

MOUNTING CLIPS

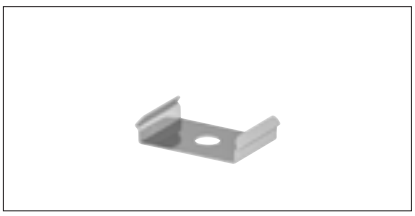

Mounting clip, not visible

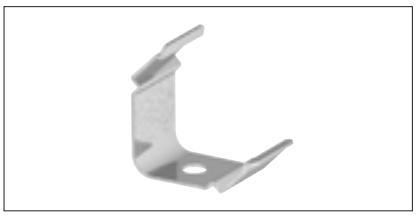

Mounting clip, 45°


Description	Dimensions	Prod. no.
Mounting clip, not visible	W/H/D: 1.53/0.3/1 cm	**1000487**
Mounting clip, 45°	W/H/D: 1.62/1.62/1 cm	**1000489**


Material: stainless steel, packaging contents: 2 pieces


END CAPS FOR SURFACE-MOUNTED PROFILES

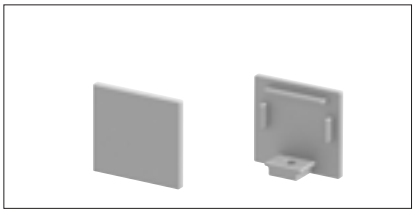

For standard profile, flat cover

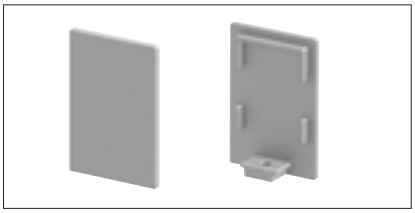
For standard profile, high cover

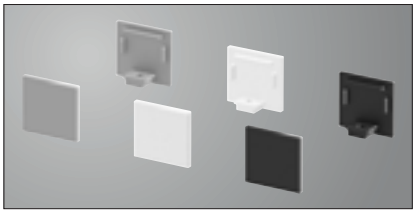
Available color variants

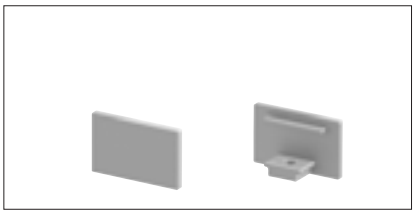
For flat profile, flat cover

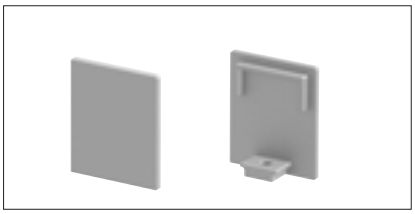

For flat profile, high cover

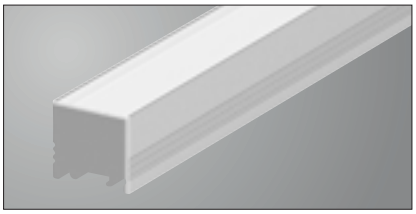

Profile with mounted end caps


Description	Color	Visible depth	Prod. no.
End caps for flat profile, flat cover	aluminium	0.2 cm	**1000475**
	white		**1000476**
	black		**1000477**
End cap for flat profile, high cover	aluminium	0.2 cm	**1000481**
	white		**1000482**
	black		**1000483**
End caps for standard profile, flat cover	aluminium	0.2 cm	**1000478**
	white		**1000479**
	black		**1000480**
End caps for standard profile, high cover	aluminium	0.2 cm	**1000484**
	white		**1000485**
	black		**1000486**

Material: aluminium, packaging contents: 2 pieces

END CAPS FOR RECESSED PROFILES

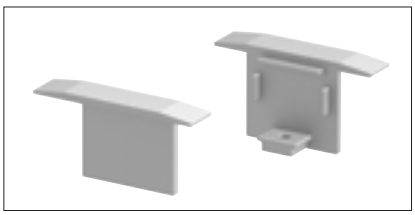
For recessed profile

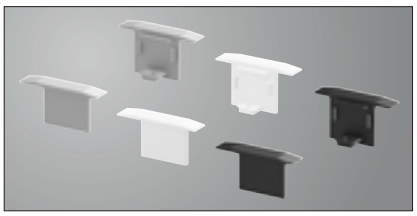
Available color variants

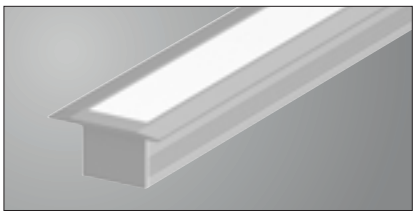
Profile with mounted end caps

Description	Color	Visible depth	Prod. no.
End cap for recessed profile	aluminium	0.7 cm	**1000472**
	white		**1000473**
	black		**1000474**

Material: aluminium, packaging contents: 2 pieces


Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
Visible depth of end caps + profile length = total length

GRAZIA 10 EDGE


SURFACE-MOUNTED PROFILE



SURFACE-MOUNTED PROFILE

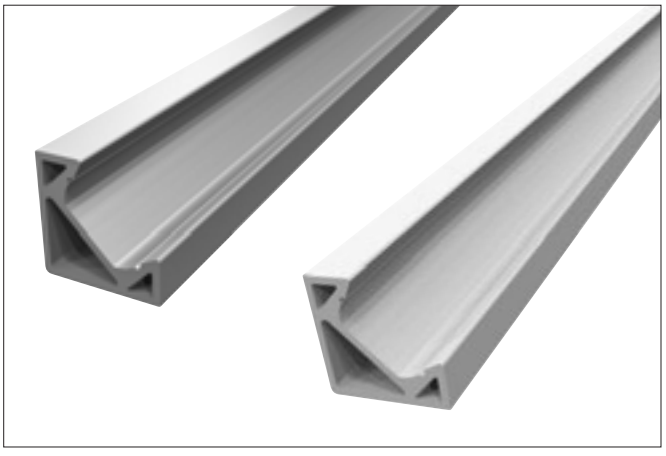

Surface-mounted, aluminium, white




Length	Color	Material	Prod. no.	
200 cm	aluminium white	aluminium	1004889 1004890	

Aluminium, width/height: 1.95/1.95 cm, max. width LED strip: 1.0 cm


GRAZIA 10 EDGE

ACCESSORIES


COVERS

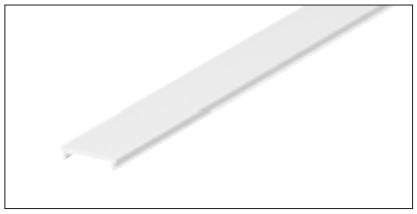

Frosted, plastic PC

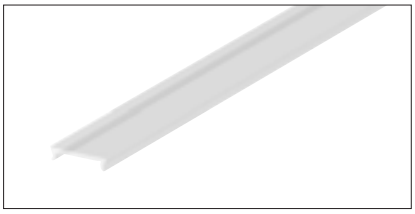

Transparent, plastic PC

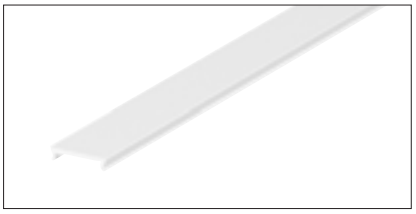



Milky, plastic PC

Length	Color	Material	Prod. no.	
200 cm	frosted	plastic PC	**1000466**	
	transparent	plastic PC	**1000467**	
	milky	plastic PMMA	**1000468**	
	frosted	plastic PMMA	**1000469**	

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

END CAPS

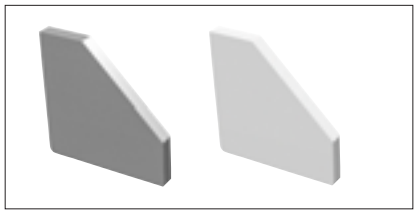

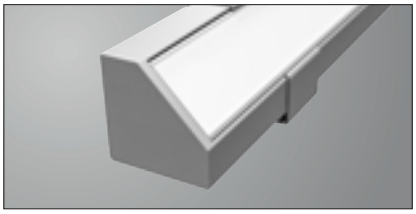


Description	Color	Visible depth	Prod. no.	
End caps	aluminium	2 mm	**1004893**	
	white	2 mm	**1004894**	

Material: aluminium, packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
Visible depth of end caps + profile length = total length

MOUNTING CLIPS

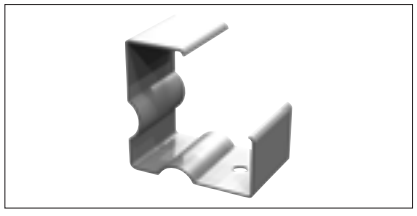

Description	Color	Dimensions	Prod. no.	
Mounting clips	stainless steel	L/B/H: 2.25/15/3.25 cm	**1004895**	

Material: steel, packaging contents: 4 pieces


GRAZIA 20

SURFACE-MOUNTED PROFILE






Can also be used as a pendant light (pendant suspension p. 745)

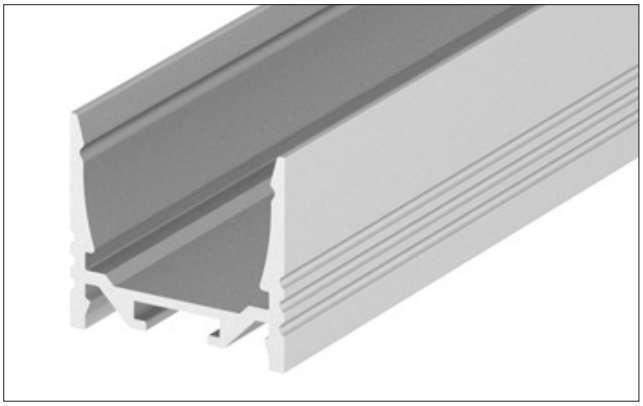

High-quality powder-coated aluminium surface

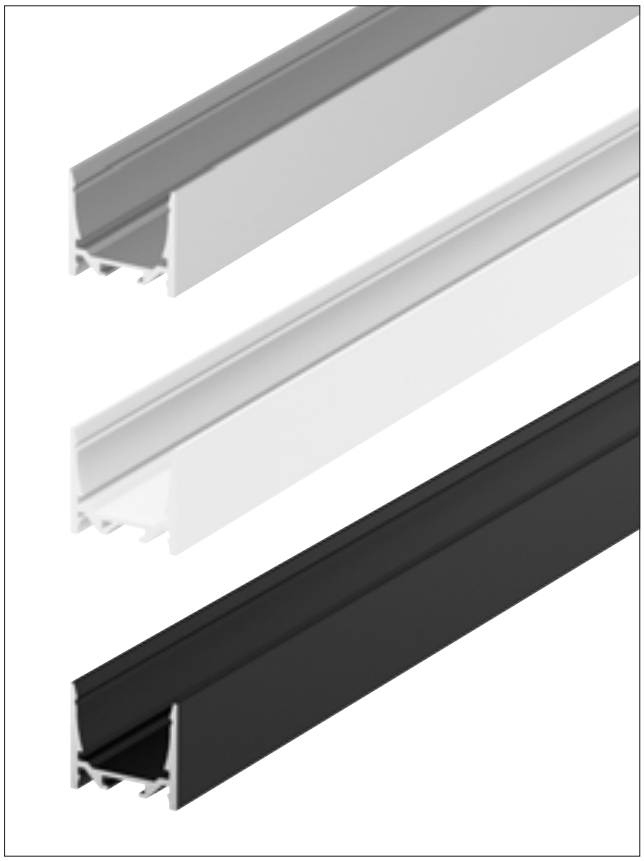


Available color variants: aluminium, white, black


GRAZIA 20

SURFACE-MOUNTED PROFILES


STANDARD

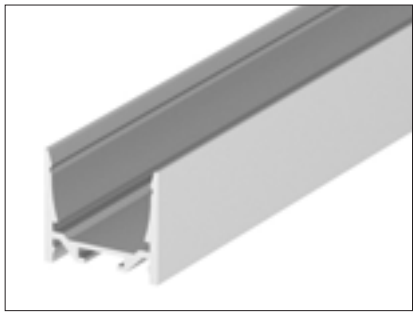

Smooth

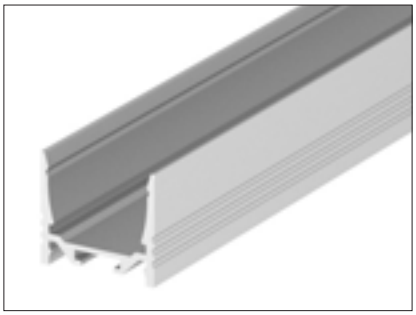


Grooved




Description	Length	Color	Material	Prod. no.
Standard smooth	150 cm	aluminium	aluminium	**1004918**
		white		**1004919**
		black		**1004920**
	300 cm	aluminium		**1000523**
		white		**1000524**
		black		**1000525**
Standard grooved	300 cm	aluminium		**1000514**
		white		**1000515**
		black		**1000516**

Width/height: 3.5/3.2 cm, max. width LED strip: 2.0 cm, cover not included


FLAT

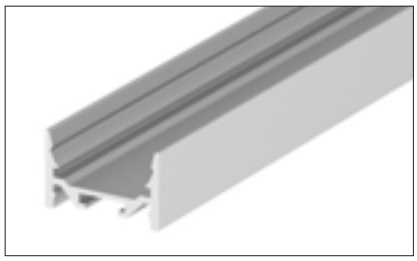

Smooth

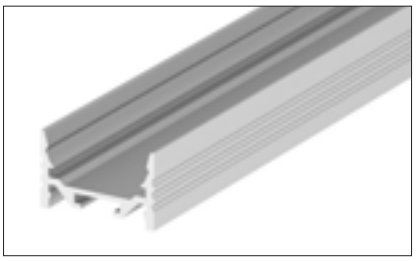

Grooved



Description	Length	Color	Material	Prod. no.
Flat smooth	150 cm	aluminium	aluminium	**1004921**
		white		**1004922**
		black		**1004923**
	300 cm	aluminium		**1000532**
		white		**1000533**
		black		**1000534**
Flat grooved	300 cm	aluminium		**1000505**
		white		**1000506**
		black		**1000507**


Width/height: 3.5/2.2 cm, max. width LED strip: 2.0 cm, cover not included

GRAZIA 20


RECESSED PROFILE



RECESSED PROFILE

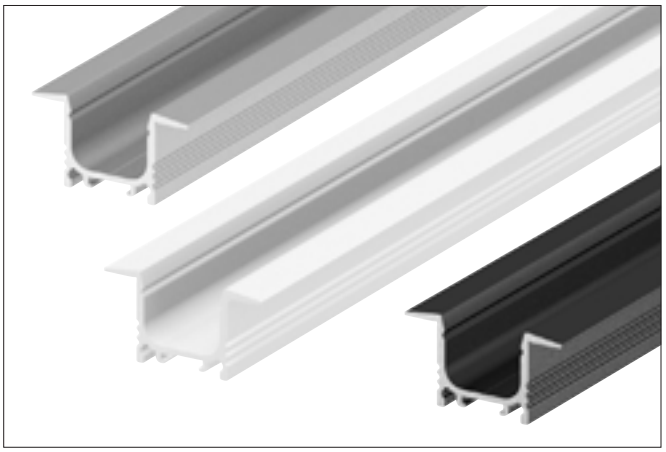

Recessed, aluminium, white, black





Length	Color	Material	Prod. no.
150 cm	aluminium	aluminium	1004924
	white		1004925
	black		1004926
300 cm	aluminium		1000496
	white		1000497
	black		1000498


Width/height: 5.2/3.2 cm, max. width LED strip: 2.0 cm, cover not included


GRAZIA 20
ACCESSORIES


COVERS

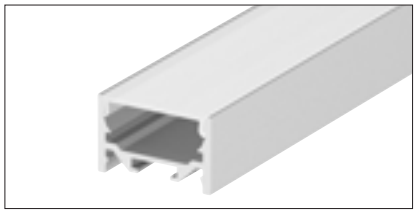
Flat, transparent

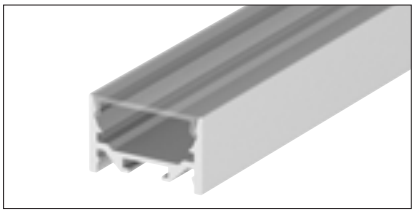
Flat, transparent

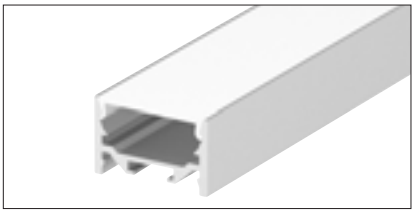
Flat, milky

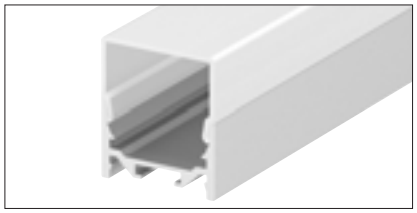
High, transparent

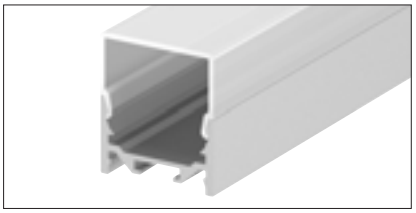

High, milky

Length	Color	Material	Prod. no.	
150 cm	flat, frosted	plastic PC	**1004927**	
	flat, frosted	plastic PMMA	**1004928**	
	flat, milky	plastic PMMA	**1004929**	
	high, frosted*	plastic PC	**1004930**	
	high, frosted*	plastic PMMA	**1004931**	
300 cm	flat, frosted	plastic PC	**1000540**	
	flat, frosted	plastic PMMA	**1000546**	
	flat, milky	plastic PMMA	**1000549**	
	high, frosted*	plastic PMMA	**1000555**	
	high, frosted*	plastic PC	**1000552**	

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

* The high covers are only suitable for GRAZIA 20 surface-mounted profiles, not for recessed profiles.

LONGITUDINAL CONNECTOR

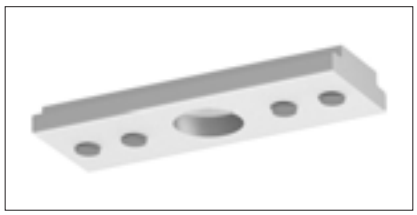



Description	Color	Dimensions	Prod. no.	
Longitudinal connector	aluminium	L/W/H: 3.8/1.4/0.4 cm	**1000571**	


Material: aluminium, packaging contents: 2 pieces


GRAZIA 20
ACCESSORIES


END CAPS FOR SURFACE-MOUNTED PROFILE

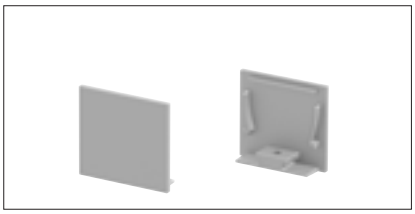

For standard profile, flat cover

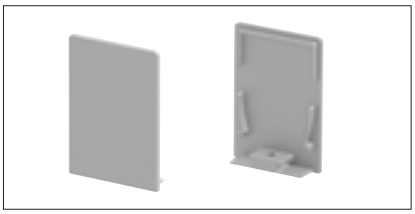
For standard profile, high cover

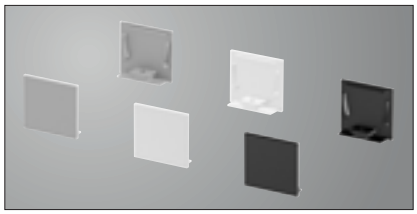
Available color variants

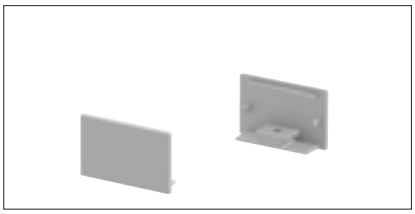
For flat profile, flat cover

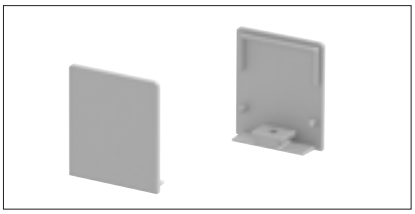
For flat profile, high cover

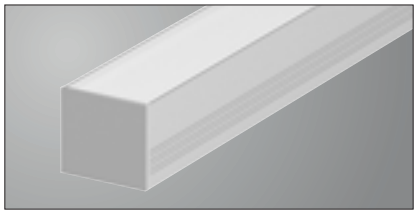

Profile with mounted end caps


Description	Color	Visible depth	Prod. no.
End caps for standard profile, flat cover	aluminium	0.25 cm	**1000565**
	white		**1000566**
	black		**1000567**
End caps for standard profile, high cover	aluminium	0.25 cm	**1000568**
	white		**1000569**
	black		**1000570**
End caps for flat profile, flat cover	aluminium	0.25 cm	**1000559**
	white		**1000560**
	black		**1000561**
End cap for flat profile, high cover	aluminium	0.25 cm	**1000562**
	white		**1000563**
	black		**1000564**


Material: aluminium, packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
Visible depth of end caps + profile length = total length

END CAPS FOR RECESSED PROFILE

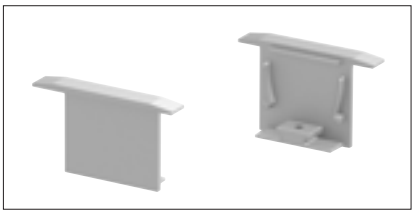
For recessed profile

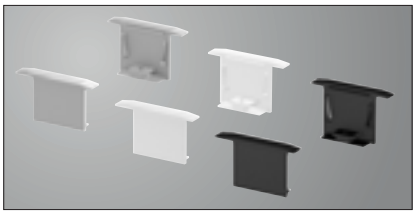
Available color variants

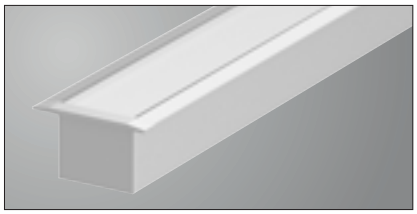
Profile with mounted end caps

Description	Color	V isible depth	Prod. no.
End cap for recessed profile	aluminium	0.085 cm	**1000556**
	white	0.085 cm	**1000557**
	black	0.085 cm	**1000558**

Material: aluminium, packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
Visible depth of end caps + profile length = total length

PENDANT SUSPENSION



Pendant suspension (only for surface-mounted profile)


Description	Dimensions	Prod. no.	
Pendant suspension*	Pendant L: 200 cm	**1000535**	

Material: stainless steel, packaging contents: 2 pieces


* The pendant suspension is only suitable for the surface-mounted profile.

MOUNTING CLIPS


NEW VARIANT

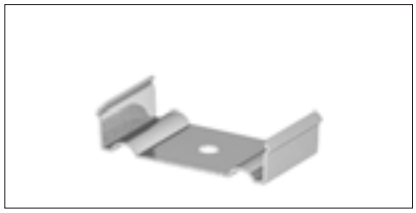

Mounting clip, not visible

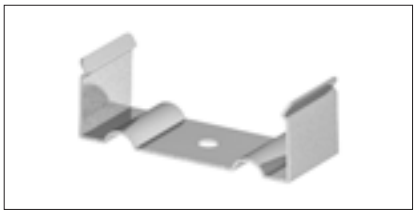

Mounting clip, visible (only for grooved surface-mounted profiles)

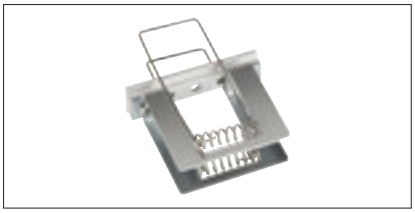

Mounting clip for drywall ceilings

Description	Dimensions	Prod. no.	
Mounting clip, not visible	L/W/H: 2.82/1.2/1.4 cm	**1000536**	
Mounting clip, visible*	L/W/H: 3.65/6.2/1.5 cm	**1000537**	
Mounting clip	L/W/H: 5.5/1.1/2.3 cm	**1004932**	

Material: stainless steel, packaging contents: 2 pieces

The visible mounting clip is only suitable for the **GRAZIA 20 Standard, grooved profile and the **GRAZIA 20 Flat, grooved** profile.




GRAZIA 60


SURFACE-MOUNTED AND RECESSED PROFILE



SURFACE-MOUNTED PROFILE

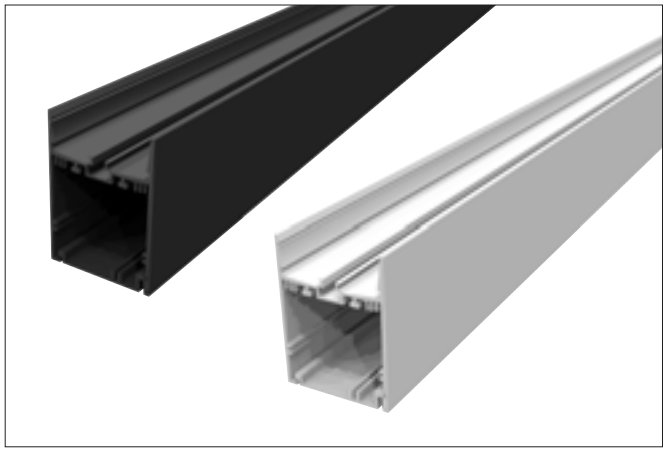


Surface-mounted profile, black, white




Length	Color	Material	Prod. no.
150 cm	black	aluminium	1004896
	white		1004897
300 cm	black		1004898
	white		1004899

Width/height: 7/9.5 cm, max. width LED strip: 2.0 cm, cover not included

RECESSED PROFILE

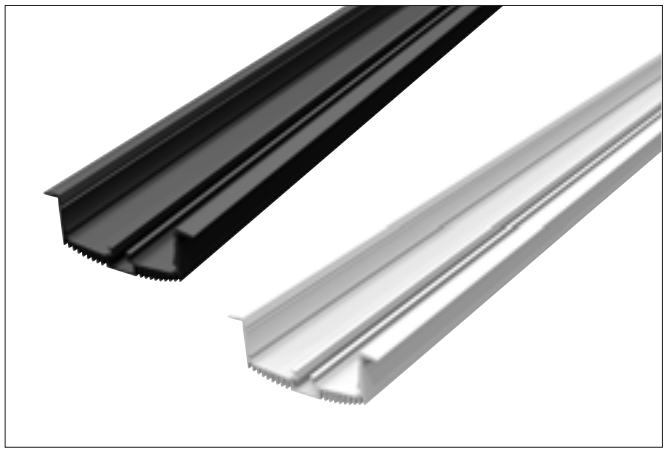

Recessed profile, black, white




Length	Color	Material	Prod. no.
150 cm	black	aluminium	1004905
	white		1004906
300 cm	black		1004907
	white		1004908

Width/height: 8.5/3.3 cm, max. width LED strip: 2.0 cm, cover not included

GRAZIA 60

ACCESSORIES

COVERS

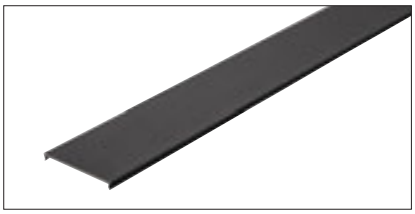
Black, aluminium, 150 cm


White, aluminium, 150 cm


Frosted, plastic PC, 150 cm


Frosted, plastic PMMA, 150 cm



Frosted, plastic PC, 300 cm



Frosted, plastic PC, 300 cm

Length	Color	Material	Prod. no.
150 cm	■ black	aluminium	**1004912**
	□ white	aluminium	**1004913**
	□ frosted	plastic PC	**1004914**
	□ frosted	plastic PMMA	**1004916**
300 cm	□ frosted	plastic PC	**1004915**
	□ frosted	plastic PMMA	**1004917**

Plastic PMMA/PC:
Profile covers made of PMMA are especially uniform.
Profile covers made of PC are break-proof and especially suitable for use in contexts requiring high resilience.

END CAPS

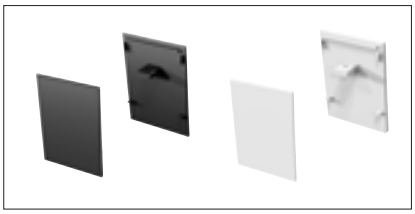
For surface-mounted profile

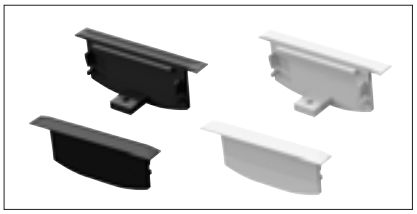
For recessed profile

Description	Color	Visible depth	Prod. no.
End cap for surface-mounted profile	■ black	0.085 cm	**1004900**
	□ white	0.085 cm	**1004901**
End cap for recessed profile	■ black	0.085 cm	**1004909**
	□ white	0.085 cm	**1004910**

Material: aluminium, packaging contents: 2 pieces

Please note that when using end caps, the visible depth must be subtracted from the profile length to obtain the desired overall length.
Visible depth of end caps + profile length = total length

GRAZIA 60
ACCESSORIES


CEILING MOUNTING PROFILE FOR SURFACE MOUNTED PROFILE



Description	Color	Dimensions	Prod. no.	
Mounting accessories	black	L/W/H: 150/7/9.5 cm	**1004902**	

Material: aluminium, packaging contents: 1 piece


LONGITUDINAL CONNECTOR

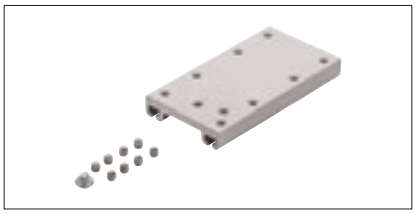

Description	Color	Dimensions	Prod. no.	
Longitudinal connector	aluminium	L/W/H: 8/4.2/1 cm	**1004903**	

Material: aluminium, packaging contents: 2 pieces


FEED-IN

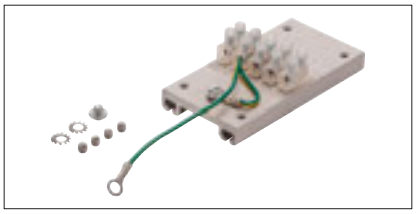

Description	Color	Dimensions	Prod. no.	
Feed-in	aluminium	L/W/H: 8/4.2/2.4 cm	**1004904**	

Material: aluminium, packaging contents: 1 piece

MOUNTING CLIP FOR RECESSED PROFILE

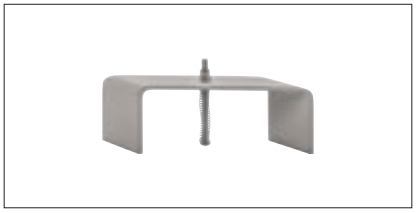

Description	Color	Dimensions	Prod. no.	
Mounting clip	chrome	L/W/H: 13/17/4 cm	**1004911**	

Material: steel, packaging contents: 2 pieces

LINING UP TO IMPRESS.

LED STRIPS FOR A SPECIAL ATMOSPHERE.


Would you like to add a touch of variation? LED strips are modern and unusual design features that give rooms a special atmosphere. The long lights in various color variants also really look the part when used as guidance lighting.




1004709 754

WHICH LED STRIP DO I NEED?

LED strips and profiles for your project.
Everything at a glance.

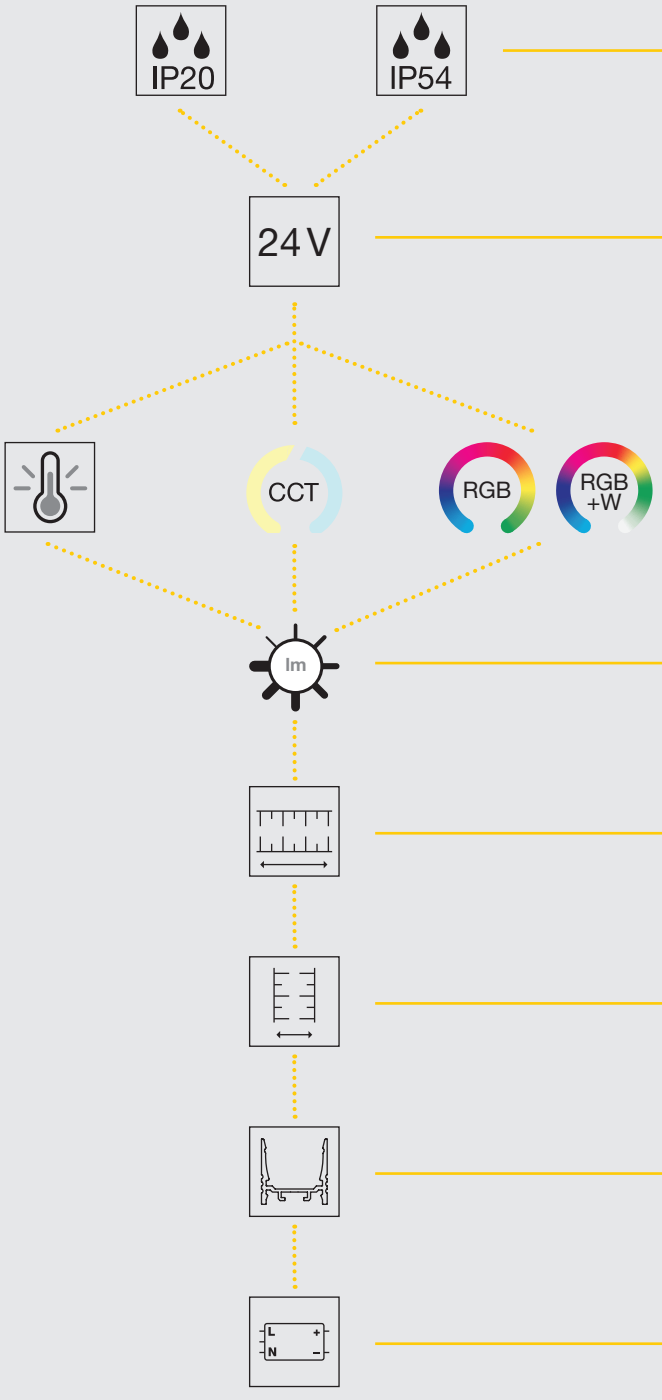

For indoors, outdoors or for wet rooms.
Equipped for all applications with IP20 and IP54.

When you need extra length.
Create long lengths with fewer feed-in points thanks to 24V technology.

Add a touch of color.
LED strips available in white, as CCT (Tunable White) or as an RGBW version

Create accent lighting or illuminate entire rooms.
Up to 7000lm across 5m possible.

Stay flexible.
With lengths of 5-80m.

That fits.
LED strip widths for almost every profile.


The perfect combination.
You can find suitable profiles on p. 735-742

Tailored to your project.
You can find suitable drivers on p. 797-802

IP	24V		CCT	RGB / RGB +W	lm			LED strips	Profiles
20	✓	2700-4000K	–	–	3500-3750lm	5 m	1 cm	GRAZIA FLEXSTRIP LED, 24V P. 754	GRAZIA 10 P. 735 GRAZIA 10 EDGE From P. 738
20	✓	2700-4000K	–	–	6500-7000lm	5 m	1 cm	GRAZIA PRO FLEXSTRIP, 24V P. 755	GRAZIA 10 P. 735 GRAZIA 10 EDGE From P. 738
20	✓	2700-6500K	–	–	8500-9100K	5 m	1 cm	GRAZIA PRO FLEXSTRIP, 24V P. 756	GRAZIA 10 P. 735 GRAZIA 10 EDGE From P. 738
20	✓	3000-4000K	–	–	12500-13000lm	5 m	2 cm	GRAZIA PRO MAX FLEXSTRIP, 24V P. 757	GRAZIA 20 Surface-mounted P. 741 GRAZIA 20 Recessed P. 742
20	✓	3000-4000K	–	–	20000-21400lm	5 m	2 cm	GRAZIA PRO MAX FLEXSTRIP, 24V P. 758	GRAZIA 20 Surface-mounted P. 741 GRAZIA 20 Recessed P. 742
20	✓	2700-6500K	✓	–	3400-3700lm	5 m	1 cm	GRAZIA PRO FLEXSTRIP, Tunable white, 24V P. 759	GRAZIA 10 P. 735 GRAZIA 10 EDGE From P. 738
20	✓	3000 K	–	✓	2050-2500lm	5 m	2 cm	GRAZIA PRO FLEXSTRIP, RGBW, 24V P. 760	GRAZIA 20 Surface-mounted P. 741 GRAZIA 20 Recessed P. 742
54	✓	2700-4000K	–	–	3350-3600lm	5 m	2 cm	GRAZIA IP FLEXSTRIP, 24V P. 761	GRAZIA 20 surface-mounted P. 741 GRAZIA 20 Recessed P. 742
54	✓	2700-6500K	–	–	3210-3500lm	5 m	2 cm	GRAZIA IP FLEXSTRIP, Tunable white, 24V P. 762	GRAZIA 20 Surface-mounted P. 741 GRAZIA 20 Recessed P. 742
54	✓	3000 K	–	✓	1940-2350lm	5 m	2 cm	GRAZIA IP FLEXSTRIP, RGBW, 24V P. 763	GRAZIA 20 Surface-mounted P. 741 GRAZIA 20 Recessed P. 742

GRAZIA FLEXSTRIP LED

24V

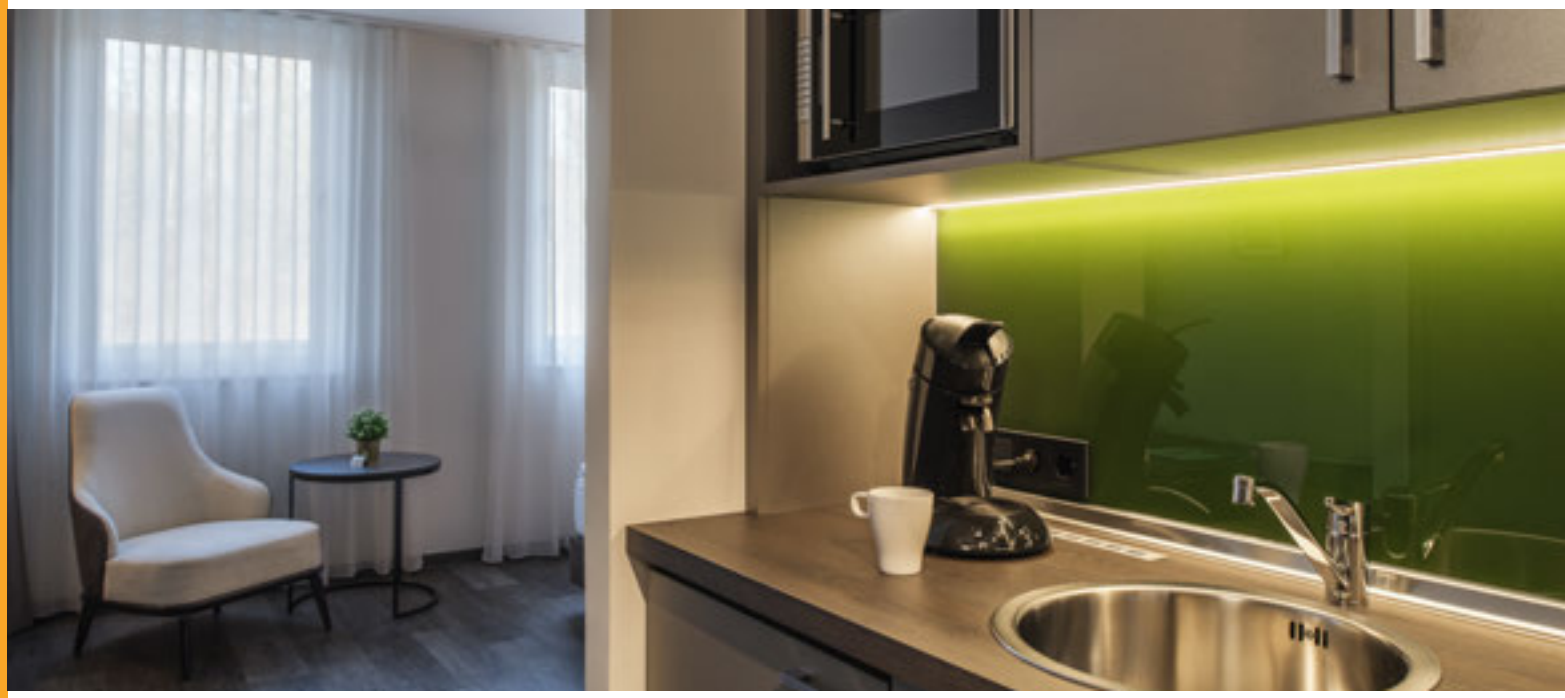

GRAZIA FLEXSTRIP LED, 24V



LEDs per meter: 70
Width: 1 cm
Height: 0.12 cm
LED gap: 1.4 cm
Can be separated every: 10 cm
IP code: IP 20
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
2700	3500	44W	90	3	500	**1004708**
3000	3500					**1004709**
4000	3750					**1004710**

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.



Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
☐ LED power supply	60W	polycarbonate (PC)	18	4,5	2,7	**1005383**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA PRO FLEXSTRIP

24V



GRAZIA PRO FLEXSTRIP, 24V



LEDs per meter: 126
Width: 1 cm
Height: 0.12 cm
LED gap: 0.8 cm
Can be separated every 5.6 cm
IP code: IP 20
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
2700	6500	73W	90	3	500	**1004712**
3000	6500					**1004713**
4000	7000					**1004714**

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.







Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
■ LED power supply	100W	polycarbonate (PC)	18,2	8,8	3,5	**470500**
◢ LED power supply | PHASE	100W	polycarbonate (PC)	21	6,7	3,4	**1003105**
□ LED power supply | DALI	100W	polycarbonate (PC)	34,7	4	2,2	**1004776**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA PRO FLEXSTRIP

24V



GRAZIA PRO FLEXSTRIP, 24V



LEDs per meter: 168
Width: 1 cm
Height: 0.12 cm
LED gap: 0.6 cm
Can be separated every 4.2 cm
IP code: IP 20
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
2700	8500	91W	90	3	500	**1004716**
3000	8500					**1004717**
4000	9100					**1004718**
6500	9100					**1004719**

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.








Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
LED power supply	100W	polycarbonate (PC)	18,2	8,8	3,5	**470500**
LED power supply | PHASE	100W	polycarbonate (PC)	21	6,7	3,4	**1003105**
LED power supply | DALI	100W	polycarbonate (PC)	34,7	4	2,2	**1004776**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA PRO MAX FLEXSTRIP

24V

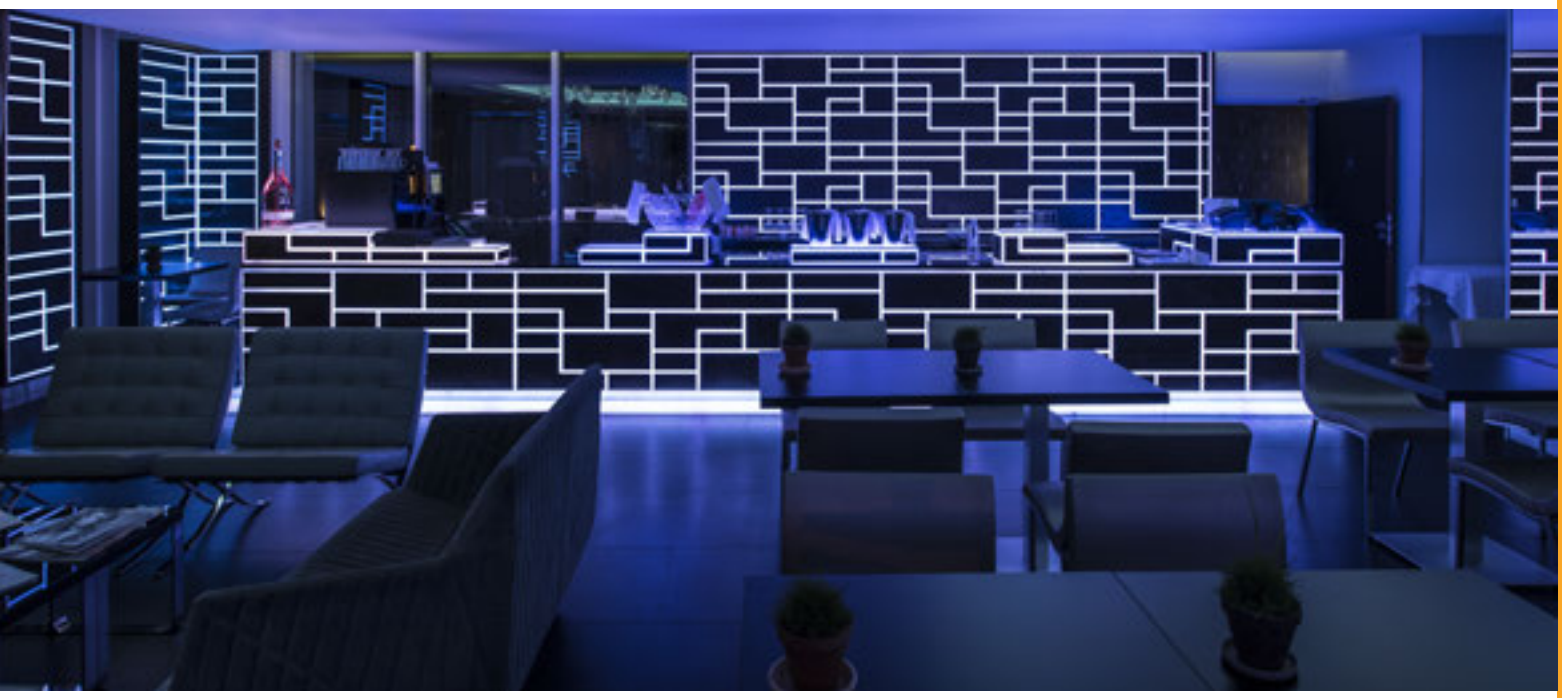

GRAZIA PRO MAX FLEXSTRIP, 24V



LEDs per meter: 196
Width: 2 cm
Height: 0.15 cm
LED gap: 0.5 cm
Can be separated every 3.6 cm
IP code: IP 20
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
3000	12500	126W	90	3	500	**1004720**
4000	13000					**1004721**

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.







Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
■ LED power supply	150W	polycarbonate (PC)	20,7	11	4,5	**470549**
□ DALI controller	120W	polycarbonate (PC)	11,6	4,2	1,8	**1003106**
□ LED power supply | DALI	200W	polycarbonate (PC)	42,5	4,8	2,5	**1004777**


To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA PRO MAX FLEXSTRIP

24V



GRAZIA PRO MAX FLEXSTRIP, 24V

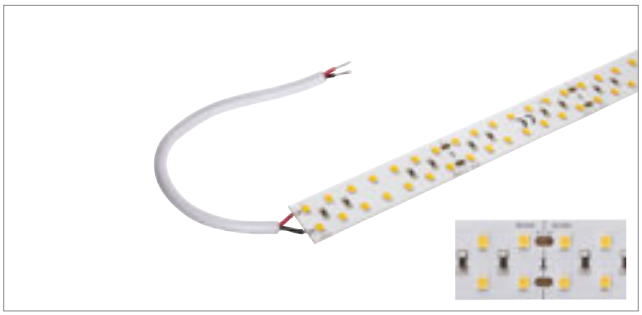

LEDs per meter: 196
Width: 2 cm
Height: 0.15 cm
LED gap: 1 cm
Can be separated every 7.1 cm
IP code: IP 20
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
3000	20000	193W	90	3	500	**1004722**
4000	21400					**1004723**

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.







Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
■ LED power supply	150W	polycarbonate (PC)	20,7	11	4,5	**470549**
□ DALI Controller	120W	polycarbonate (PC)	11,6	4,2	1,8	**1003106**
□ LED power supply | DALI	200W	polycarbonate (PC)	42,5	4,8	2,5	**1004777**


To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA PRO FLEXSTRIP

TUNABLE WHITE, 24V



GRAZIA PRO FLEXSTRIP, TUNABLE WHITE, 24V

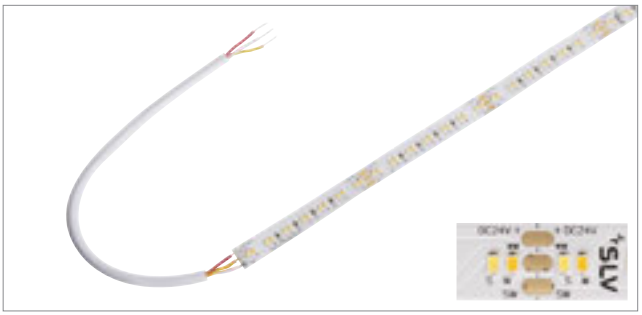

LEDs per meter: 224
Width: 1 cm
Height: 0.12 cm
LED gap: 0.9 cm
Can be separated every 6.3 cm
IP code: IP 20
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
2700-6500	3400-3700	80W	90	6	500	**1004725**

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.





Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
☐ LED power supply | DALI, 24V, 2-channel	60W	polycarbonate (PC)	20,2	5,8	3	**1006133**
☐ LED power supply | DALI, 24V, 2-channel	100W	polycarbonate (PC)	34,7	4	2,2	**1006134**


To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA PRO FLEXSTRIP

RGBW, 24V



GRAZIA PRO FLEXSTRIP, RGBW, 24V

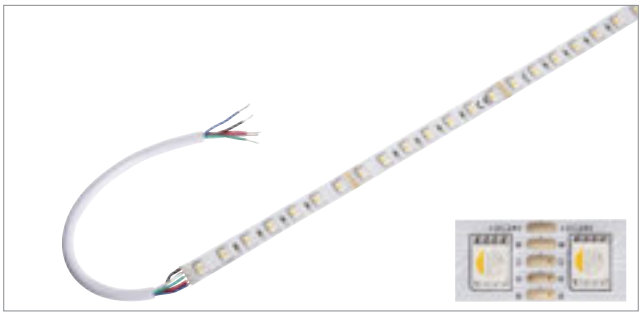

LEDs per meter: 70
Width: 1.2 cm
Height: 0.22 cm
LED gap: 1.4 cm
Can be separated every: 10 cm
IP code: IP 20
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
RGB	2500	60			500	**1004727**
W | 3000	2050	27	>90	6SDCM		

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.



Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
■ LED power supply	150W	polycarbonate (PC)	20.7	11	4.5	**470549**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA IP FLEXSTRIP

24V



GRAZIA IP FLEXSTRIP, 24V



LEDs per meter: 70
Width: 1.2 cm
Height: 0.4 cm
LED gap: 1.4 cm
Can be separated every: 10 cm
IP code: IP 54
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
2700	3350	44W	90	4	502	**1004734**
3000	3350					**1004735**
4000	3600					**1004736**

Incl. 2 end caps and fittings

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.






Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
■ LED power supply	150W	polycarbonate (PC)	23.4	11.4	4.9	**470548**
□ LED power supply	200W	polycarbonate (PC)	34.7	4	2.2	**1004776**


To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA IP FLEXSTRIP

TUNABLE WHITE, 24V

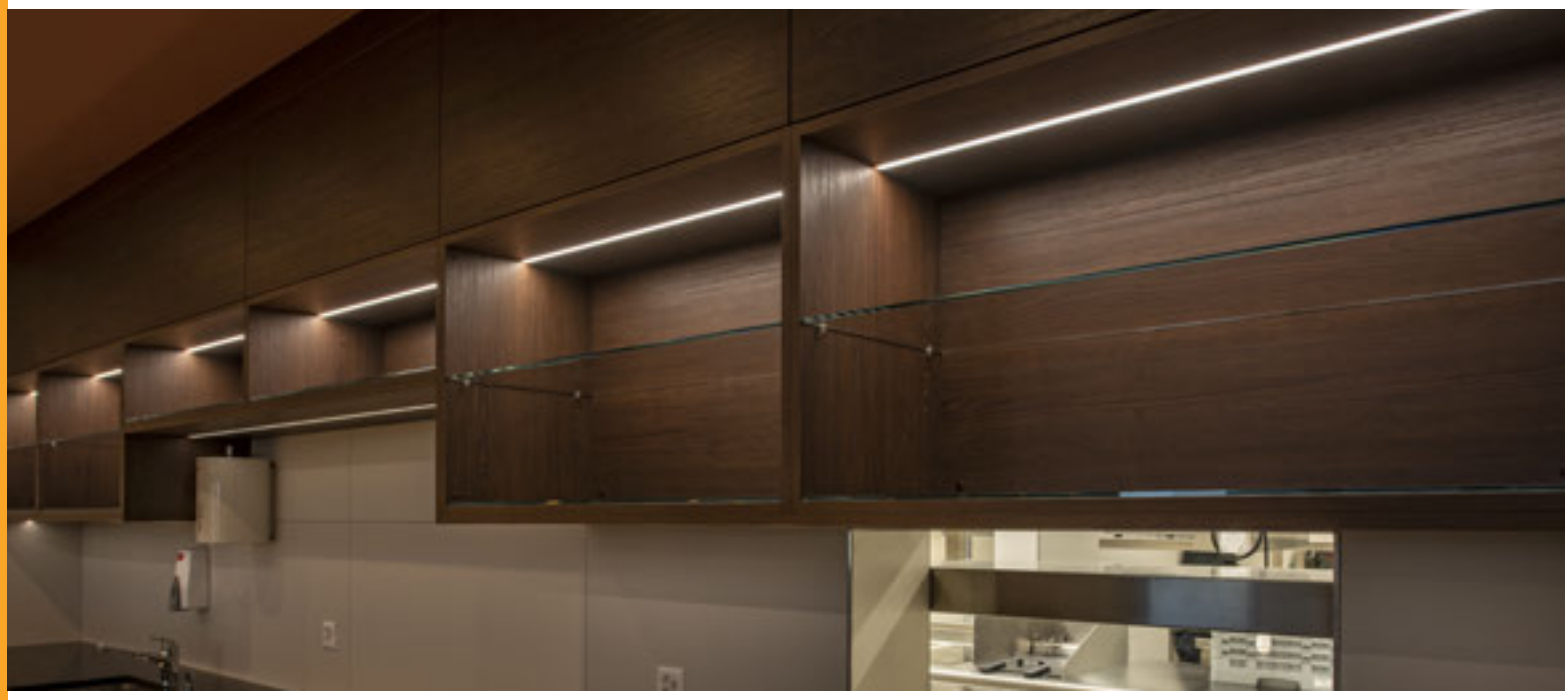

GRAZIA IP FLEXSTRIP, TUNABLE WHITE, 24V

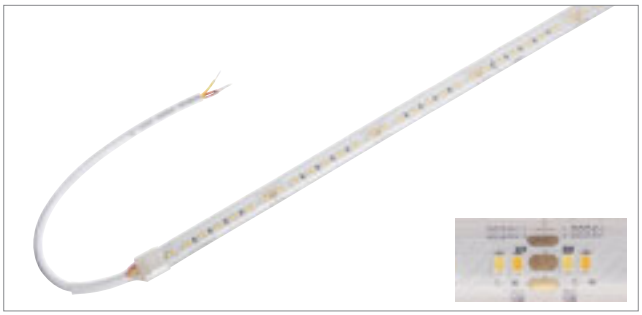

LEDs per meter: 224
Width: 1.2 cm
Height: 0.4 cm
LED gap: 0.9 cm
Can be separated every 6.3 cm
IP code: IP 54
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.
2700-6500	3210-3500	80W	90	4	502	**1004726**

Incl. 2 end caps and fittings

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.







Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.
■ LED power supply	150W	polycarbonate (PC)	23,4	11,4	4,9	**470548**
□ LED power supply | DALI, 24V, 2-channel	60W	polycarbonate (PC)	20,2	5,8	3	**1006133**
□ LED power supply | DALI, 24V, 2-channel	100W	polycarbonate (PC)	34,7	4	2,2	**1006134**

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.

GRAZIA IP FLEXSTRIP

RGBW, 24V



GRAZIA IP FLEXSTRIP, RGBW, 24V



LEDs per meter: 70
Width: 1.4 cm
Height: 0.46 cm
LED gap: 1.4 cm
Can be separated every: 10 cm
IP code: IP 54
Feed-in cable on both sides

Color temperature (K)	Luminous flux (lm)	Wattage	Color rendering index (CRI)	Color consistency (SDMC)	Length (cm)	Prod. no.	
RGB	2350	60			500	**1004737**	
W | 3000K	1940	27	>90	6SDCM			

Incl. 2 end caps and fittings

In order to obtain a consistent light output from a length of 3 m, we recommend feeding in the strips on both sides.
From a length of 5 m, a new feed-in must be provided.



Options	Max. current load	Material	Length (cm)	Width (cm)	Height (cm)	Prod. no.	
■ LED power supply	150W	polycarbonate (PC)	23.4	11.4	4.9	**470548**	

To ensure heat dissipation, the LED strips must be glued into an aluminium profile.
The LED strips are supplied with adhesive tape on the back.



DISCOVER DALI AND NETWORK YOUR LIGHTING.

Familiarize yourself with the protocol that makes it possible to easily install, manage and communicate with individual lights and lighting installations.

Are you already familiar with the terms smart home or smart building? Do you want to install flexible lighting scenarios and sequences? Say hello to DALI and suitable SLV products: the Digital Adressable Lighting Interface (DALI) simplifies digital communication between electronic ballasts, transformers and corresponding actuators: flexible light management for modern buildings combined with typical SLV light diversity.


- Flexible and intelligent light management
- Centrally controlled with other building systems
- Easy to install and with universal use

The basis for intelligent lighting.
DALI is an excellent basis for flexible and intelligent light management in modern buildings. With DALI 2.0, it is now also possible to integrate sensors into the network. These can independently access the bus, communicate with a master controller, lighting controllers or other sensor controls and control the lights.

SAFELY COMBINABLE: SLV, DALI AND SCHNEIDER ELECTRIC PRODUCTS.

Working in close collaboration with Schneider Electric, we offer a tailored and easily installable solution. You benefit from SLV DALI lights, which largely already support DALI 2.0. Extensive testing guarantees compatibility between the KNX DALI Gateway of Schneider Electric and SLV DALI products.

This means you can easily and seamlessly integrate all SLV DALI lights into a streamlined building management system via the Schneider Electric Gateway. The newly introduced NUMINOS® lighting system along with our MEDO family offer an excellent choice of combinations and applications. Discover more about SLV lighting that can be networked with DALI on the following pages.

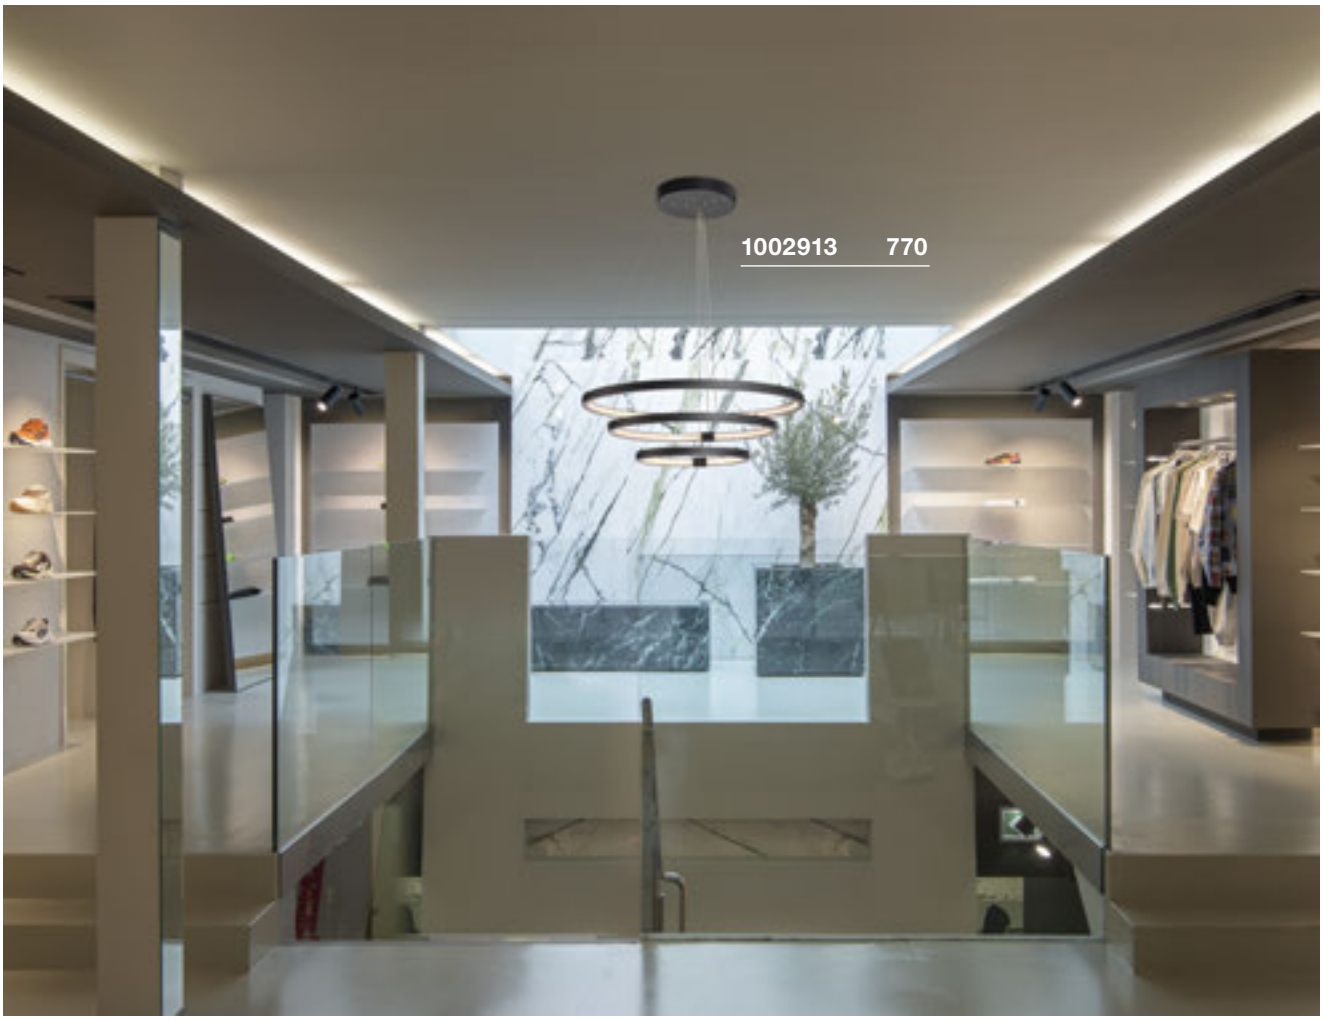

Lights	Page	DALI version	Compatible with Schneider Electric KNX/Dali Gateway
NUMINOS®, 3-phase	62-71	DALI	☺
NUMINOS® CW	72-79	DALI	☺
NUMINOS® CL	80-87	DALI	☺
NUMINOS® PD	88-95	DALI	☺
ONE 60/80/TRIPLE PD	119,120	DALI	☺
ONE 60/80/DOUBLE PD UP/DOWN	122,123	DALI	☺
ONE 40 WL	294	DALI	☺
ONE 40 TRACK, 3-phase	443	DALI	☺
WORKLIGHT PD DALI	146	DALI	☺
MEDO 30/40/60 AMBIENT CW	260-261	DALI	☺
MEDO 60 CL, square	261	DALI	☺
MEDO RING 60 PD	129	DALI	☺
MEDO 90 AMBIENT CL	261	DALI	☺
FERA 25 CL	284	DALI	☺
I-PENDANT PRO PD	140	DALI	☺
LIPSY® 40/50 CW DRUM	330	DALI	☺
PANEL 60 CL, round	263	DALI	☺
PANEL CL, 1200x300mm	263	DALI	☺
PANEL 60 PD, round	141	DALI	☺
PARA FLAC PD/CL	179	DALI	☺
Q-LINE® PD, single	145	DALI	☺
SIGHT TRACK, 3-phase	440	DALI	☺
SIGHT MOVE, 3-phase	441	DALI	☺

DALI.
TECHNICALLY LIT.

All lighting components must feature a DALI interface. This allows up to 64 addresses, 16 groups and 16 scenes to be centrally managed. The status of a light or lighting control device is displayed and set using bi-directional data exchange via a DALI control device.

- The voltage ranges from 9.5 to 22.5V
- The system voltage is a maximum of 250 mA
- The data transmission rate is 1200 baud
- DALI is optionally expandable

Heating appliances, air-conditioning units, blind systems and much more - if the 64 available addresses are not enough and additional building system components need to be centrally managed along with the lighting, that's no problem: DALI-based applications can be networked via a gateway throughout different rooms and higher-level controls. A KNX system such as the new Schneider Electric KNX/DALI Gateway is typically used.

All DALI-compatible products are marked with a symbol in the BIG WHITE® '22.





NUMINOS®
ZOOM M,
3-phase
Prod. no.
1006117
Page 71

Our NUMINOS® Down and Spotlight System can be found on pages 14 to 95, with compatible DALI LED drivers on pages 58 to 60.

Or simply configure your system online at:
www.numinos.slv.com

A LIGHTING SYSTEM. FOR EVERY SCENARIO.
And optimally connected with DALI 2.0. This means that the lights in the SLV NUMINOS® Down and Spotlight System can be perfectly integrated anywhere that is in need of adjustable lighting, be it as accent lighting or to illuminate sales areas, in gastronomy or in offices.




NUMINOS®
GIMBLE M, DL
Prod. no.
1005953
Page 53



NUMINOS® XL
3-phase
Prod. no.
1005796
Page 69

ONE 60
PD, DALI




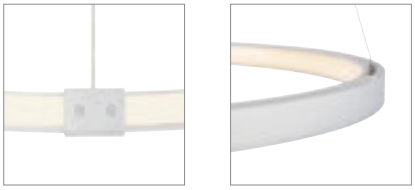

1480lm / 1550lm

INSIDE CRI 90

3000K / 4000K



Dali IP 20 L70B50 300 LED

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

ONE 80
PD, DALI






1930lm / 2140lm

INSIDE CRI 90

3000K / 4000K




Dali IP 20 L70B50 300 LED

220-240V ~50/60Hz | 800mA
Total wattage: 32W
Material: aluminium/steel

ONE TRIPLE
PD, DALI




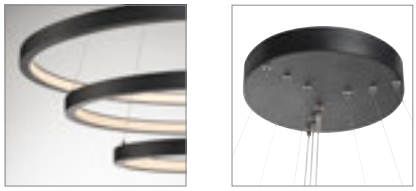

4040lm / 4200lm

INSIDE CRI 90

3000K / 4000K



Dali IP 20 L70B50 300 LED

220-240 V ~50/60 Hz | 1700 mA
Total wattage: 64W
Material: aluminium/steel

1002909, 1002910	1480/1550lm 3000/4000K	A→G


Options	Prod. no.
1480/1550lm | 3000/4000K | CRI90	
■ black	**1002909**
1480/1550lm | 3000/4000K | CRI90	
□ white	**1002910**


1002911, 1002912	1930/2140lm 3000/4000K	A→G

Options	Prod. no.
1930/2140lm | 3000/4000K | CRI90	
■ black	**1002911**
1930/2140lm | 3000/4000K | CRI90	
□ white	**1002912**

1002913, 1002914	4040/4200lm 3000/4000K	A→G


Options	Prod. no.
4040/4200lm | 3000/4000K | CRI90	
■ black	**1002913**
4040/4200lm | 3000/4000K | CRI90	
□ white	**1002914**

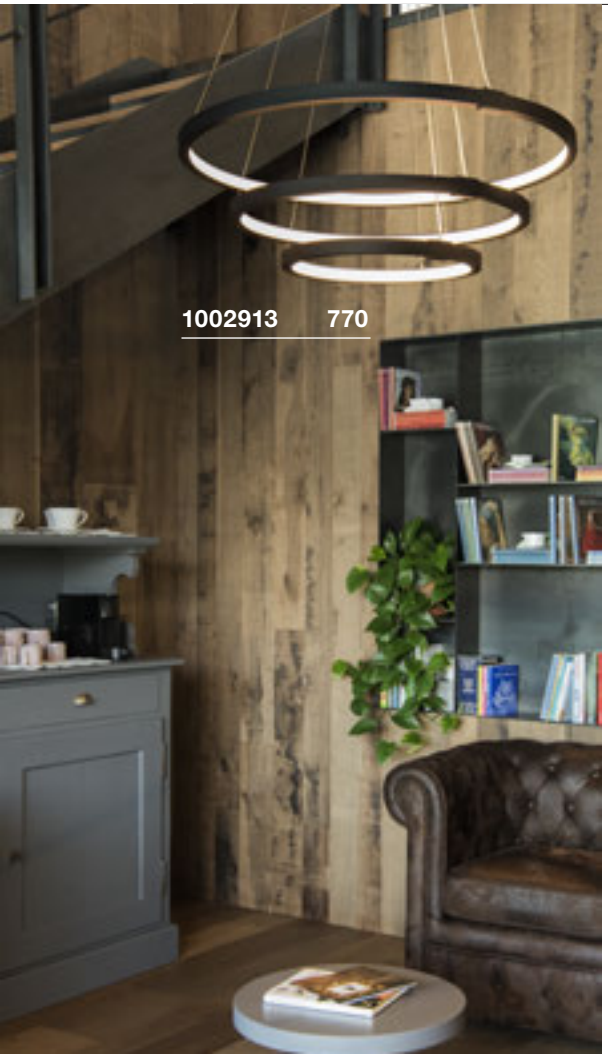

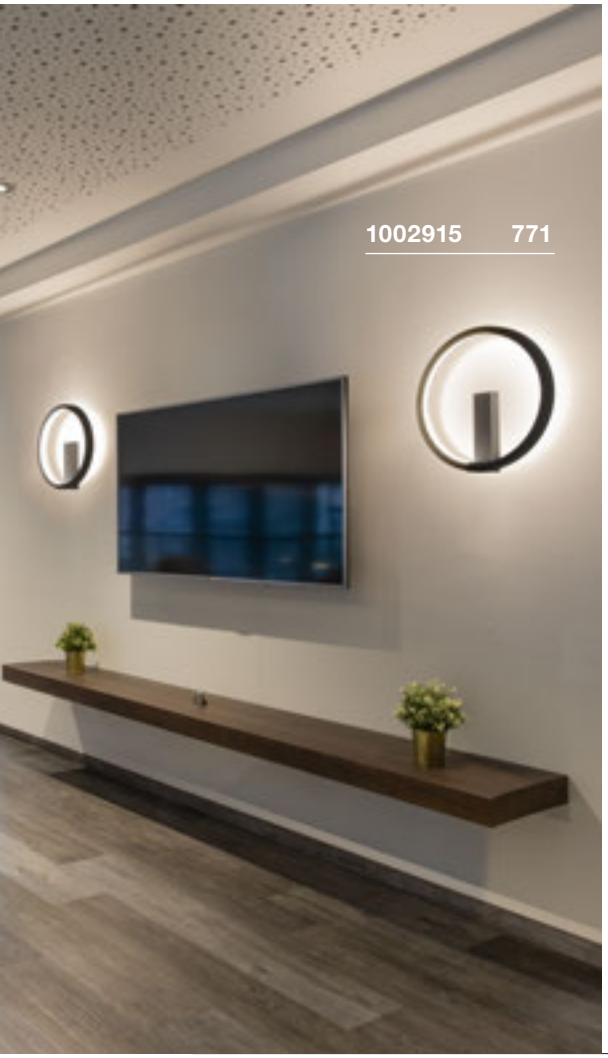

ONE 40
CW, DALI




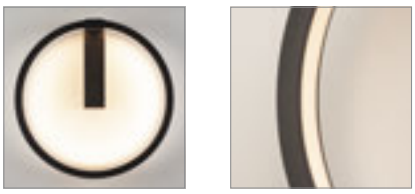

700lm / 730lm

INSIDE CRI 90

3000K / 4000K




Dali | IP 20 | 30 000 Hours | LED | L70B50

220-240V ~50/60Hz | 350mA
Total wattage: 14W
Material: aluminium/steel

1002915, 1002917	700/730lm 3000/4000K	A→G A G E

Options	Prod. no.
700/730lm | 3000/4000K | CRI90 | Diameter: 40 cm	
■ black	**1002915**
700/730lm | 3000/4000K | CRI90 | Diameter: 40 cm	
□ white	**1002917**

ONE 60
WL, DALI

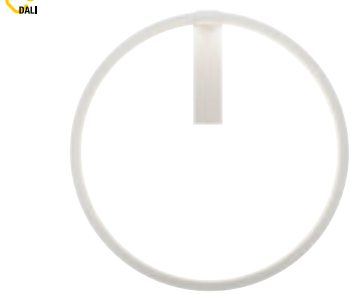




1350lm / 1430lm

INSIDE CRI 90

3000K / 4000K



Dali | IP 20 | 30 000 Hours | LED | L70B50

220-240V ~50/60Hz | 600mA
Total wattage: 24W
Material: aluminium/steel

1002918, 1002919	1350/1430lm 3000/4000K	A→G A G E


Options	Prod. no.
1350/1430lm | 3000/4000K | CRI90 | Diameter: 60 cm	
■ black	**1002918**
1350/1430lm | 3000/4000K | CRI90 | Diameter: 60 cm	
□ white	**1002919**

ONE 40 TRACK
3Ph., DALI





650lm
3000K
CRI 90



Dali LED 170° 340° 100°

220-240V ~50/60Hz | 350mA
Total wattage: 15.2W
Material: aluminium

hv		A→G
1004769, 1004770	650lm 3000K	A G E


Options	Prod. no.
650lm | 3000K | CRI90	
■ black	**1004769**
650lm | 3000K | CRI90	
□ white	**1004770**

ONE 40 TRACK
3Ph., DALI





670lm
4000K
CRI 90



Dali LED 170° 340° 100°

220-240V ~50/60Hz | 350mA
Total wattage: 15.2W
Material: aluminium

hv		A→G
1004771, 1004772	670lm 4000K	A G E

Options	Prod. no.
670lm | 4000K | CRI90	
■ black	**1004771**
670lm | 4000K | CRI90	
□ white	**1004772**








SIGHT MOVE
3Ph., DALI





2700lm
3000K
CRI 90



Dali | IP 20 | 75° | L70B50 | 120° | LED

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/poly (methyl methacrylate) (PMMA)

hv		A→G
1004690, 1004691	2700lm 3000K	A G E


Options	Prod. no.
2700lm | 3000K | CRI90	
■ black	**1004690**
2700lm | 3000K | CRI90	
□ white	**1004691**

SIGHT MOVE
3Ph., DALI





3100lm
4000K
CRI 90




Dali | IP 20 | 75° | L70B50 | 120° | LED

220-240V ~50/60Hz | 350mA
Total wattage: 26W
Material: aluminium/poly (methyl methacrylate) (PMMA)

hv		A→G
1004692, 1004693	3100lm 4000K	A G E

Options	Prod. no.
3100lm | 4000K | CRI90	
■ black	**1004692**
3100lm | 4000K | CRI90	
□ white	**1004693**

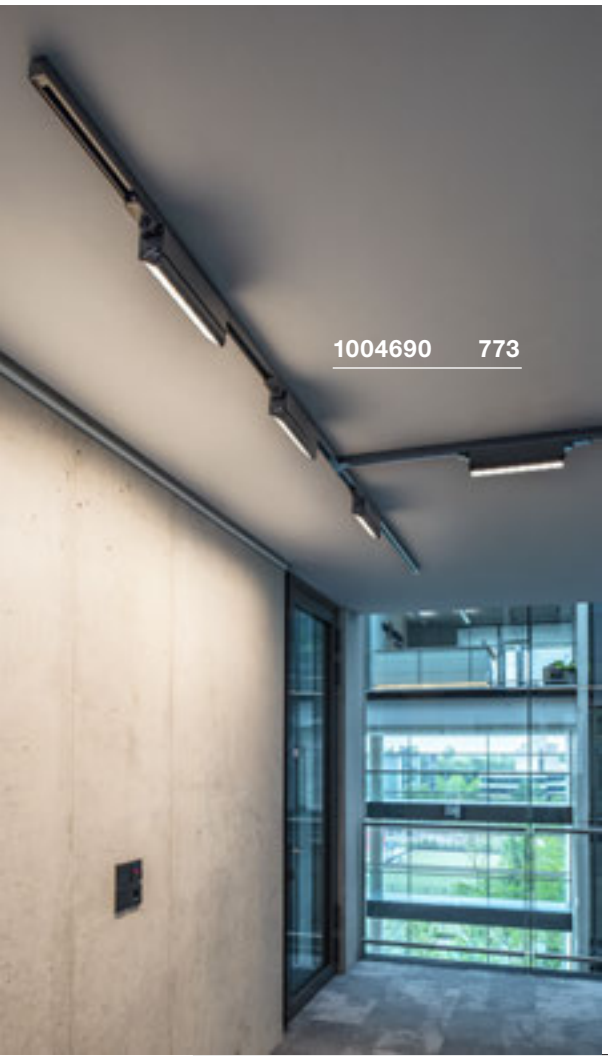

WORKLIGHT
PD, DALI

NEW








5000lm

INSIDE

CRI 80

4000K



Dali | IP 20 | IK02 | 80° | 110° | UGR 19

L80B10 | 250 | LED

200-240V ~50/60Hz | 1500mA
Total wattage: 57W
Material: aluminium

		A→G
Up	2000lm 4000K	D
Down	3000lm 4000K	D

Options	Prod. no.
Up: 2000lm | 4000K | CRI80 Down: 3000lm | 4000K | CRI80 ■ black	**1005395**
Up: 2000lm | 4000K | CRI80 Down: 3000lm | 4000K | CRI80 □ white	**1005396**






Q-LINE®
PD, DALI, single







3700lm
3000K
CRI 80



Dali | IP 20 | 120° | UGR 28 | L70B50 | 200

220-240V ~50/60Hz | 700mA
Total wattage: 47W
Material: aluminium/acrylic


1001309, 1001310	3700lm 3000K	A→G

Options	Prod. no.
3700lm | 3000K | CRI80	
■ black	**1001309**
3700lm | 3000K | CRI80	
□ white	**1001310**

MEDO LUMINAIRE FAMILY.
CEILING OR PENDANT LIGHTS.

	MEDO 30 AMBIENT CW, DALI	MEDO 40 AMBIENT CW, DALI	MEDO 60 AMBIENT CW, DALI	MEDO 90 AMBIENT CL, DALI	MEDO 60 CL, square, DALI
Example					
Lamp	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE CCT	LED INSIDE
Size	Diameter: 30 cm	Diameter: 40 cm	Diameter: 60 cm	Diameter: 90 cm	W | L: 60cm
Light strength	Down: 1230/1280lm Up: 20lm	Down: 2750/2900lm Up: 50lm	Down: 4350/4750lm Up: 120lm	Down: 9500/10100lm Up: 125lm	3300 lm
UGR	25	25	25	25	22
Dimmable	DALI	DALI	DALI	DALI	DALI
Suspension set	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m	1.5 m | 5 m



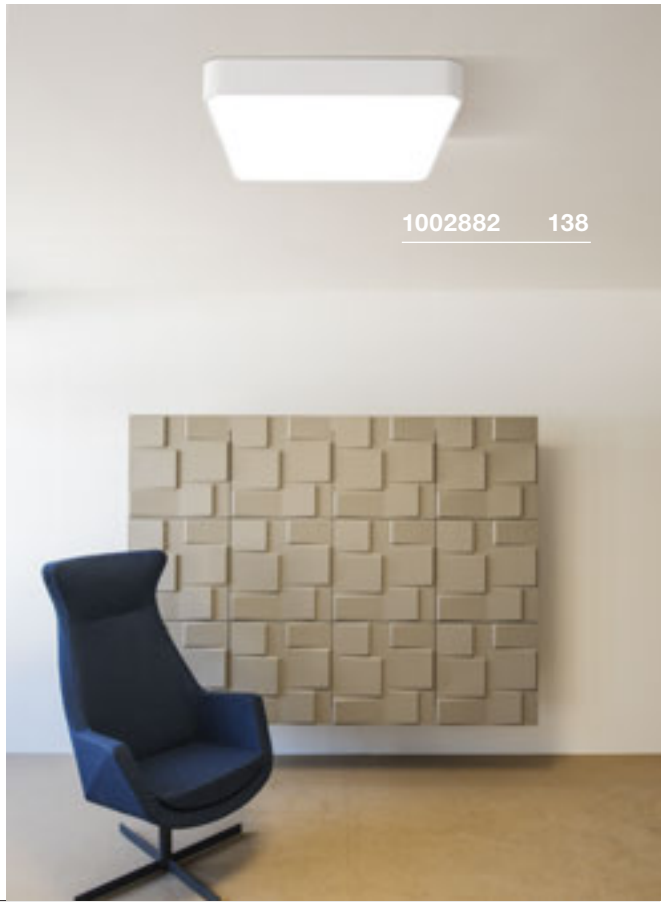



DALI INTERFACE
1-10V + on/off



1-10V IP 20

220-240V ~50/60Hz
L: 5.85 cm W: 3.25 cm H: 1.5 cm
Material: plastic

- Suitable for controlling electronic ballasts with 1-10V control input
- Galvanic isolation of DALI input and 1-10V output

Wattage up to	1000W

Options	Prod. no.
grey	1002218

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
3-25W



Dali IP 20

220-240V ~50/60Hz
L: 5.85 cm W: 3.25 cm H: 1.5 cm
Material: plastic

- Suitable for R, L and C thanks to automatic load detection. DALI power consumption: 6mA

Wattage of	3W
Wattage up to	25W

Options	Prod. no.
grey	1002220

Manufacturer:
LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
10-300W



Dali IP 20

220-240V ~50/60Hz
L: 12.02 cm W: 3.02 cm H: 2.16 cm
Material: plastic

- Suitable for R, L and C thanks to automatic load detection. DALI power consumption: 6mA

Wattage of	10W
Wattage up to	300W

Options	Prod. no.
grey	1002221

Manufacturer:
LUNATONE Industrielle Elektronik GmbH



SIMPLE. COMPATIBLE. SMART.

ZigBee® 3.0: the smart wireless system.

Dimmers, changing colors and lighting moods at the push of a button: it's not only lighting systems that are based on the standard ZigBee® 3.0. The wireless standard is versatile, involves minimum energy consumption and is easy to install, making it suitable for anyone who wants to easily network lights without having to deal with complicated technology. A theoretical range of up to 100 meters is possible for all types of living areas, houses and commercial buildings.

The SLV VALETO® SMART LIGHT SYSTEM.

The intelligent lighting solution for homes, hotels, restaurants and shops. Thanks to the ZigBee® 3.0 standard, you can enjoy compatibility with various common smart home systems:

Schneider Electric | Philips Hue | Amazon Alexa | and much more

It is easily managed via remote control, app or Amazon Alexa. The SLV VALETO® SMART LIGHT SYSTEM is, of course, easy to integrate into existing electrical installations.

Highly compatible.
Tested with Schneider Electric products.

With the VALETO® SMART LIGHT SYSTEM, SLV offers a variety of system-compatible lighting management based on the ZigBee® 3.0 standard.

Schneider Electric PlusLink products, which support switch actuators, dimmers, blinds, motion sensors and 1-10V DALI interfaces, are easily integrated into the system.
This enables seamless integration of the switch design with various switch programmes. You can also look forward to many other application solutions as part of our future collaboration with Schneider Electric.

Scalable:
Installations with up to 200 lights can be realized with the SLV VALETO® Gateway.

Integrable:
SLV VALETO® is, thanks to the ZigBee® 3.0 standard, compatible with other manufacturers' products and systems.

Controllable:
Easy to control via app, remote control or voice assistance systems.

Coverage:
By integrating their own mesh network, SLV VALETO® products can also be controlled across long distances.*

Secure:
The gateway only stores your data locally, never in the cloud.

SLV VALETO®

*Excluding battery-operated devices.



SIMPLE.

The ideal starting point for smart lighting management: simply couple our SLV VALETO® remote controls (e.g.: 1002994) with the SLV VALETO® lights (e.g.: 1001917) and see how easy smart can be.



ADVANCED.

Would you like something more?
The choice is yours when it comes to the SLV VALETO® SMART LIGHT SYSTEM: manage your home lighting using our SLV VALETO® remote control (1002994), or an app on your smartphone via our SLV VALETO® Gateway (1002411). There are no limits when it comes to managing your smart lighting thanks to the latest ZigBee standard (ZigBee® 3.0).




PROFESSIONAL.

Major plans?
Easily integrate more than 150 smart products into a smart lighting management system with our SLV VALETO® SMART LIGHT SYSTEM. Simply manage your lighting at any time, using any device, and perfectly showcase your projects.

MORE COMFORT AND SECURITY

The perfect solution for wireless control and monitoring of individual lights, specific rooms or the entire home.

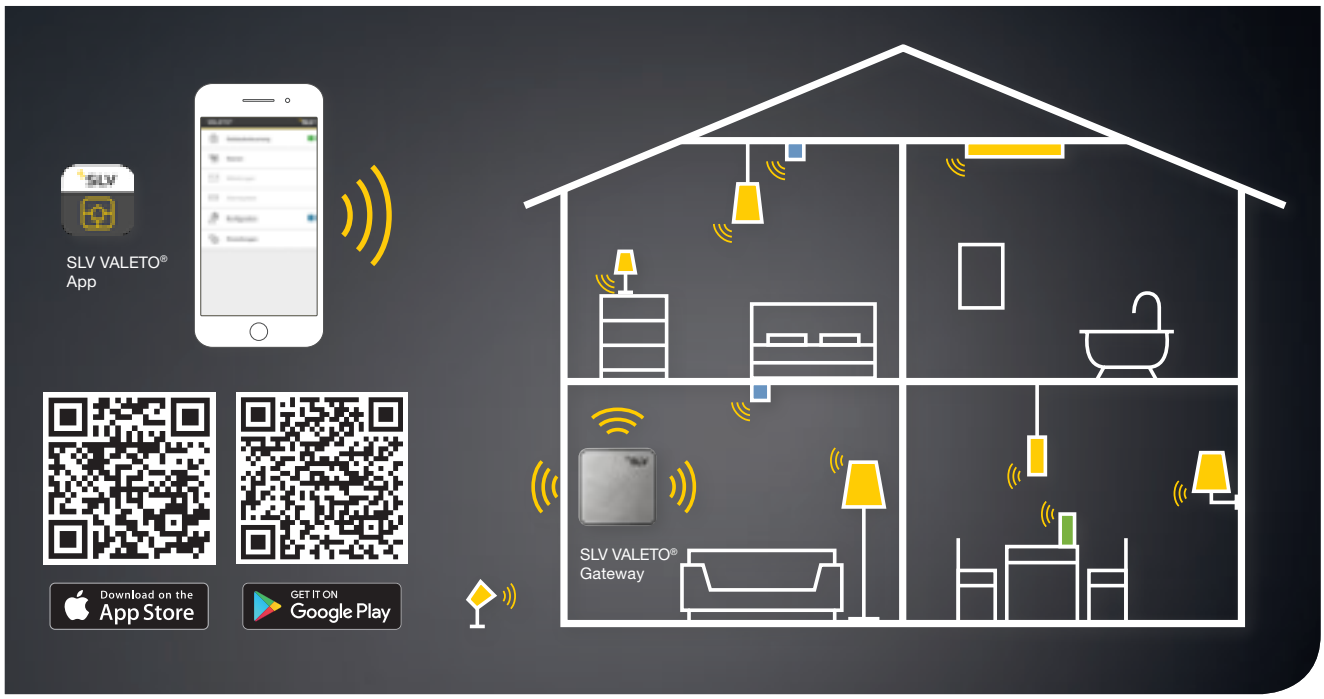

COMMUNICATION.

The SLV VALETO® Gateway forms the heart of the smart lighting system.

SLV VALETO®
Gateway

IP 20

220-240V ~50/60Hz
Operating voltage: 5V DC
Wattage: <1W
L: 10.6 cm W: 10.6 cm H: 2.6 cm
Material: aluminium/plastic

ZigBee® 3.0 certified product. A router connection via a LAN cable is required to manage the Gateway.

Scope of delivery
SLV VALETO® Gateway
Plug-in power supply 5V, 1A
Network cable, CAT6, 2m, black

Options	Prod. no.	
aluminium/black	**1002411**	





INTEGRABLE

GERMAN ENGINEERING


STRONG BANDWIDTH


SECURE


All ZIGBEE-compatible products are marked with a symbol in the BIG WHITE® '22.





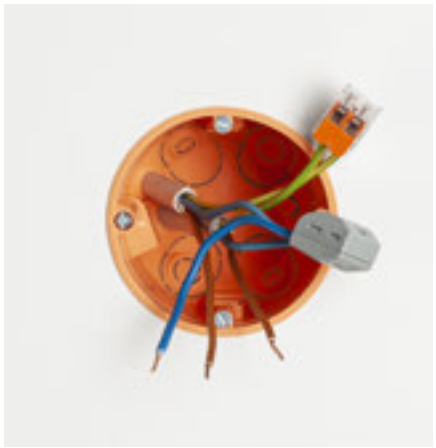

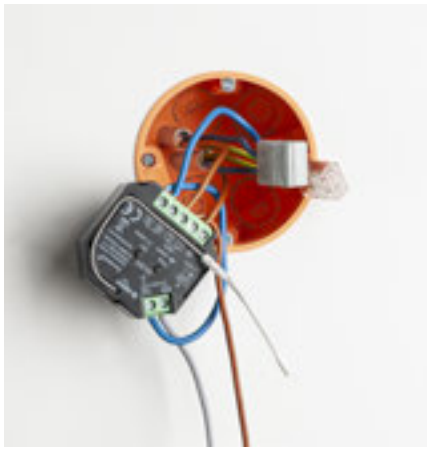

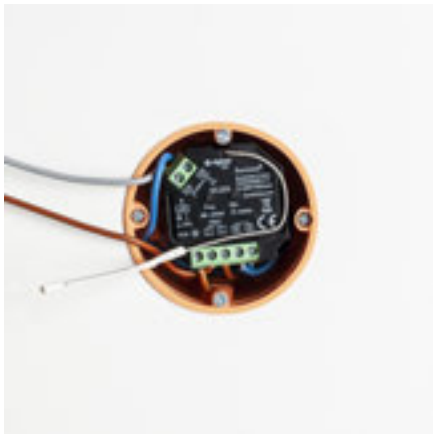



CONTROL.

SLV VALETO®
Remote control, CCT/TGBW



IP 20

Voltage: 3V battery operation
L: 6.5 cm W: 6.5 cm H: 1.95 cm
Material: plastic PC

The SLV VALETO® CCT/RGBW remote control can manage up to 20 ZigBee® devices in three groups. CCT and RGBW settings available.

Options	Prod. no.
white	**1002994**

CONTROL UNIT.

SLV VALETO®
Recessed wall dimmer



IP 20

220-240V ~50/60Hz
Wattage: max. 200W
L: 4.5 cm W: 4.5 cm H: 2.2 cm
Material: plastic PC

Controllable with SLV VALETO® CCT/RGBW remote control [1002994] or Gateway [1002411] Can be used as an independent dimmer without ZigBee®. Dimmer process: phase control. Dimmer for resistive (high-voltage halogen lamps) and capacitive loads (LED drivers). Suitable for all 60mm UP switch boxes with a depth of 42mm. 200W LED load.


Rated voltage	220-240V ~50/60Hz
Output voltage	220-240V ~50/60Hz
LED rated power	200W
Max. environmental temp.	50°C

Options	Prod. no.
black	**1002995**

CONNECTED LED PANEL
595x595mm, UGR<19



3200-3600lm
INSIDE
2700-6500K
CRI 90



IP 20 95° UGR 19 L70B50

100-240V ~50/60Hz | 1050mA
Total wattage: 43W
Material: aluminium/acrylic

- Remote control and dimming with CCT/DIM remote control [1002994] or Gateway [1002411]


1001250	3200-3600lm 2700-6500K	A→G D

Options	Prod. no.
3200-3600lm | 2700-6500K | CRI90	
white	**1001250**

CONNECTED LED PANEL
620x620mm, UGR<19



3200-3600lm
INSIDE
2700-6500K
CRI 80



IP 20 95° UGR 19 L70B50

100-240V ~50/60Hz | 1050mA
Total wattage: 43W
Material: aluminium/acrylic

- Remote control and dimming with CCT/DIM remote control [1002994] or Gateway [1002411]


1001251	3200-3600lm 2700-6500K	A→G D

Options	Prod. no.
3200-3600lm | 2700-6500K | CRI80	
white	**1001251**








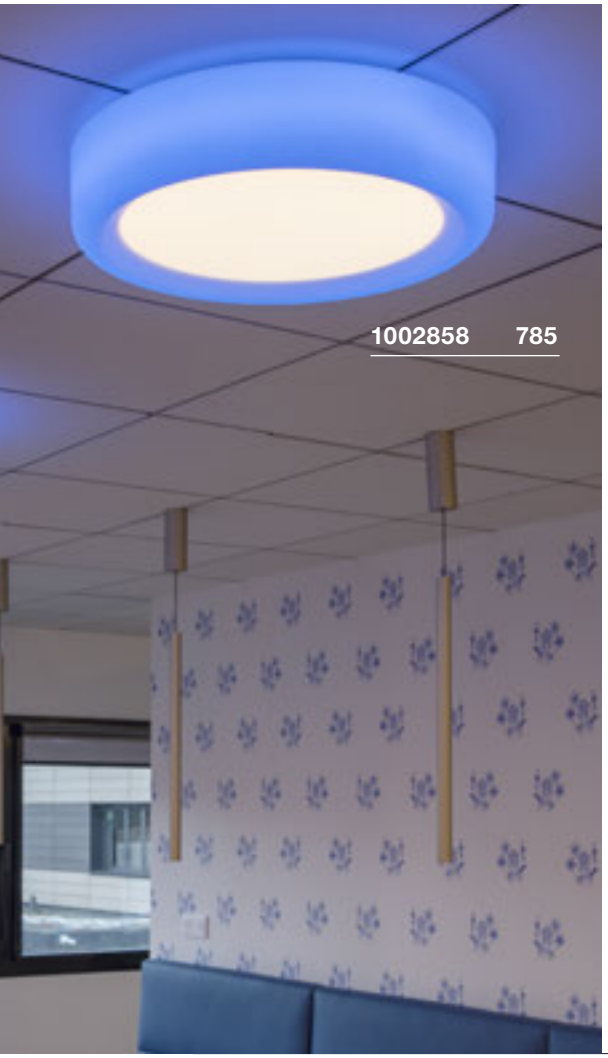


MALANG
CW





2450lm - 2750lm
2700K - 6500K
CRI 80



IP 20 | 110° | 19 | L70B50

100-240V ~50/60Hz | 24V
Total wattage: 39W
Material: aluminium / polyethylene (PE)

- Can be controlled and dimmed with SLV VALETO remote control [prod. no. 1002994] or Gateway [prod. no. 1002411]
- Ring light and panel can be controlled separately (Zigbee 3.0)

The energy efficiency class information for this product was not available at the time of printing. The latest product data can always be found at www.slv.com

■ Suspension set, 1.5m
Prod. no. 135250

□ Suspension set, 1.5m
Prod. no. 135251

■ Suspension set, 1.5m
Prod. no. 135254

□ Suspension set, 5m
Prod. no. 1001950

■ Suspension set, 5m
Prod. no. 1001951


■ Suspension set, 5m
Prod. no. 1001952

□ SLV VALETO® | remote control, CCT/RGBW
Prod. no. 1002994


Options	Prod. no.
Ring: 350lm | RGB+W (3000K) | CRI>80 Panel: 2100-2400lm | 2700-6500K | CRI>80	
□ white	**1002858**

NEW FLAT
WL, RGB-W



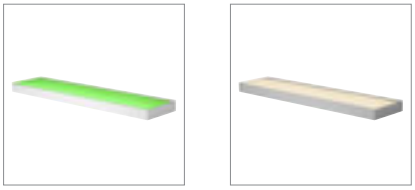

580lm
3000K
CRI 80



IP 20 | 110° | 110° | L70B50

220-240V ~50/60Hz | 24V
Total wattage: 11.3W
Material: aluminium/acrylic

- Can be controlled with Gateway [prod. no. 1002411] or remote control [prod. no. 1002994]

		A→G
Up	300lm 3000K	A→G
Down	280lm 3000K	A→G

Options	Prod. no.
Up: RGB-W (300lm | 3000K | CRI>80) Down: RGB-W (280lm | 3000K | CRI>80)	
□ white	**1003022**
Up: RGB-W (300lm | 3000K | CRI>80) Down: RGB-W (280lm | 3000K | CRI>80)	
▨ aluminium	**1003023**

LIGHTING.

LED A60
E27, tunable 2700-6500K, smart

NEW



IP 20 230° -

220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66)
Diameter: 6 cm H: 11 cm

Luminous flux	800lm
Lamp current	0.067A
Color rendering index	90
Wattage	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
white | 2700-6500K	**1005317**

LED A60
E27, RGBW, smart

NEW



IP 20 230° -

220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66)/ polycarbonate (PC)
Diameter: 6 cm H: 11 cm

Luminous flux	800lm
Lamp current	0.073A
Color rendering index	90
Wattage	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
white / opaque	**1005318**

LED QPAR51
GU10, tunable 2700-6500K, smart

NEW



IP 20 38° -

220-240V ~50/60Hz
Wattage: 5W
Material: polyamide 66 (PA 66)/ polycarbonate (PC)
Diameter: 5 cm H: 5.4 cm

Luminous flux	380lm
Lamp current	0.04A
Max. luminosity	530cd
Color rendering index	90
Wattage	5W
Energy consumption/1000h	5kWh

Options	Prod. no.
white | 2700-6500K	**1005311**

LED QPAR51
GU10, RGBW, smart

NEW



IP 20 38° -

220-240V ~50/60Hz
Wattage: 5.2W
Material: polyamide 66 (PA 66)/ polycarbonate (PC)
Diameter: 5 cm H: 6.1 cm

Luminous flux	370lm
Lamp current	0.042A
Max. luminosity	680cd
Color rendering index	90
Wattage	5.2W
Energy consumption/1000h	6kWh

Options	Prod. no.
white	**1005312**



LIGHTING.

QPAR111
GU10, tunable 2700-6500K, smart

NEW



IP 20 25° -

220-240V ~50/60Hz
Wattage: 10W
Material: aluminium/polycarbonate (PC)
Diameter: 11.1 cm H: 7 cm

Luminous flux	760lm
Lamp current	0.051A
Max. luminosity	4300cd
Color rendering index	90
Wattage	10W
Energy consumption/1000h	10kWh

Options	Prod. no.	
white | 2700-6500K	**1005313**	
white | 2700-6500K	**1005314**	

LED QPAR111
GU10, RGBW, smart

NEW



IP 20 25° -

220-240V ~50/60Hz
Wattage: 10W
Material: aluminium
Diameter: 11.1 cm H: 7 cm

Luminous flux	750lm
Lamp current	0.056A
Max. luminosity	3500cd
Color rendering index	90
Wattage	10W
Energy consumption/1000h	10kWh

Options	Prod. no.	
white	**1005315**	

LED QPAR111
GU10, RGBW, smart

NEW



IP 20 40° -

220-240V ~50/60Hz
Wattage: 10W
Material: aluminium
Diameter: 11.1 cm H: 7 cm

Luminous flux	790lm
Lamp current	0.056A
Max. luminosity	3500cd
Color rendering index	90
Wattage	10W
Energy consumption/1000h	10kWh

Options	Prod. no.	
white	**1005316**	




IN BRILLIANT COMPANY.

ACCESSORIES FOR INDIVIDUAL LIGHTING AESTHETICS.

Light has many facets, and the possibilities are just as diverse when it comes to illuminating rooms and outdoor spaces. With our accessories, these possibilities can be further expanded, allowing you to literally shed new light on different spaces, with various light installations.

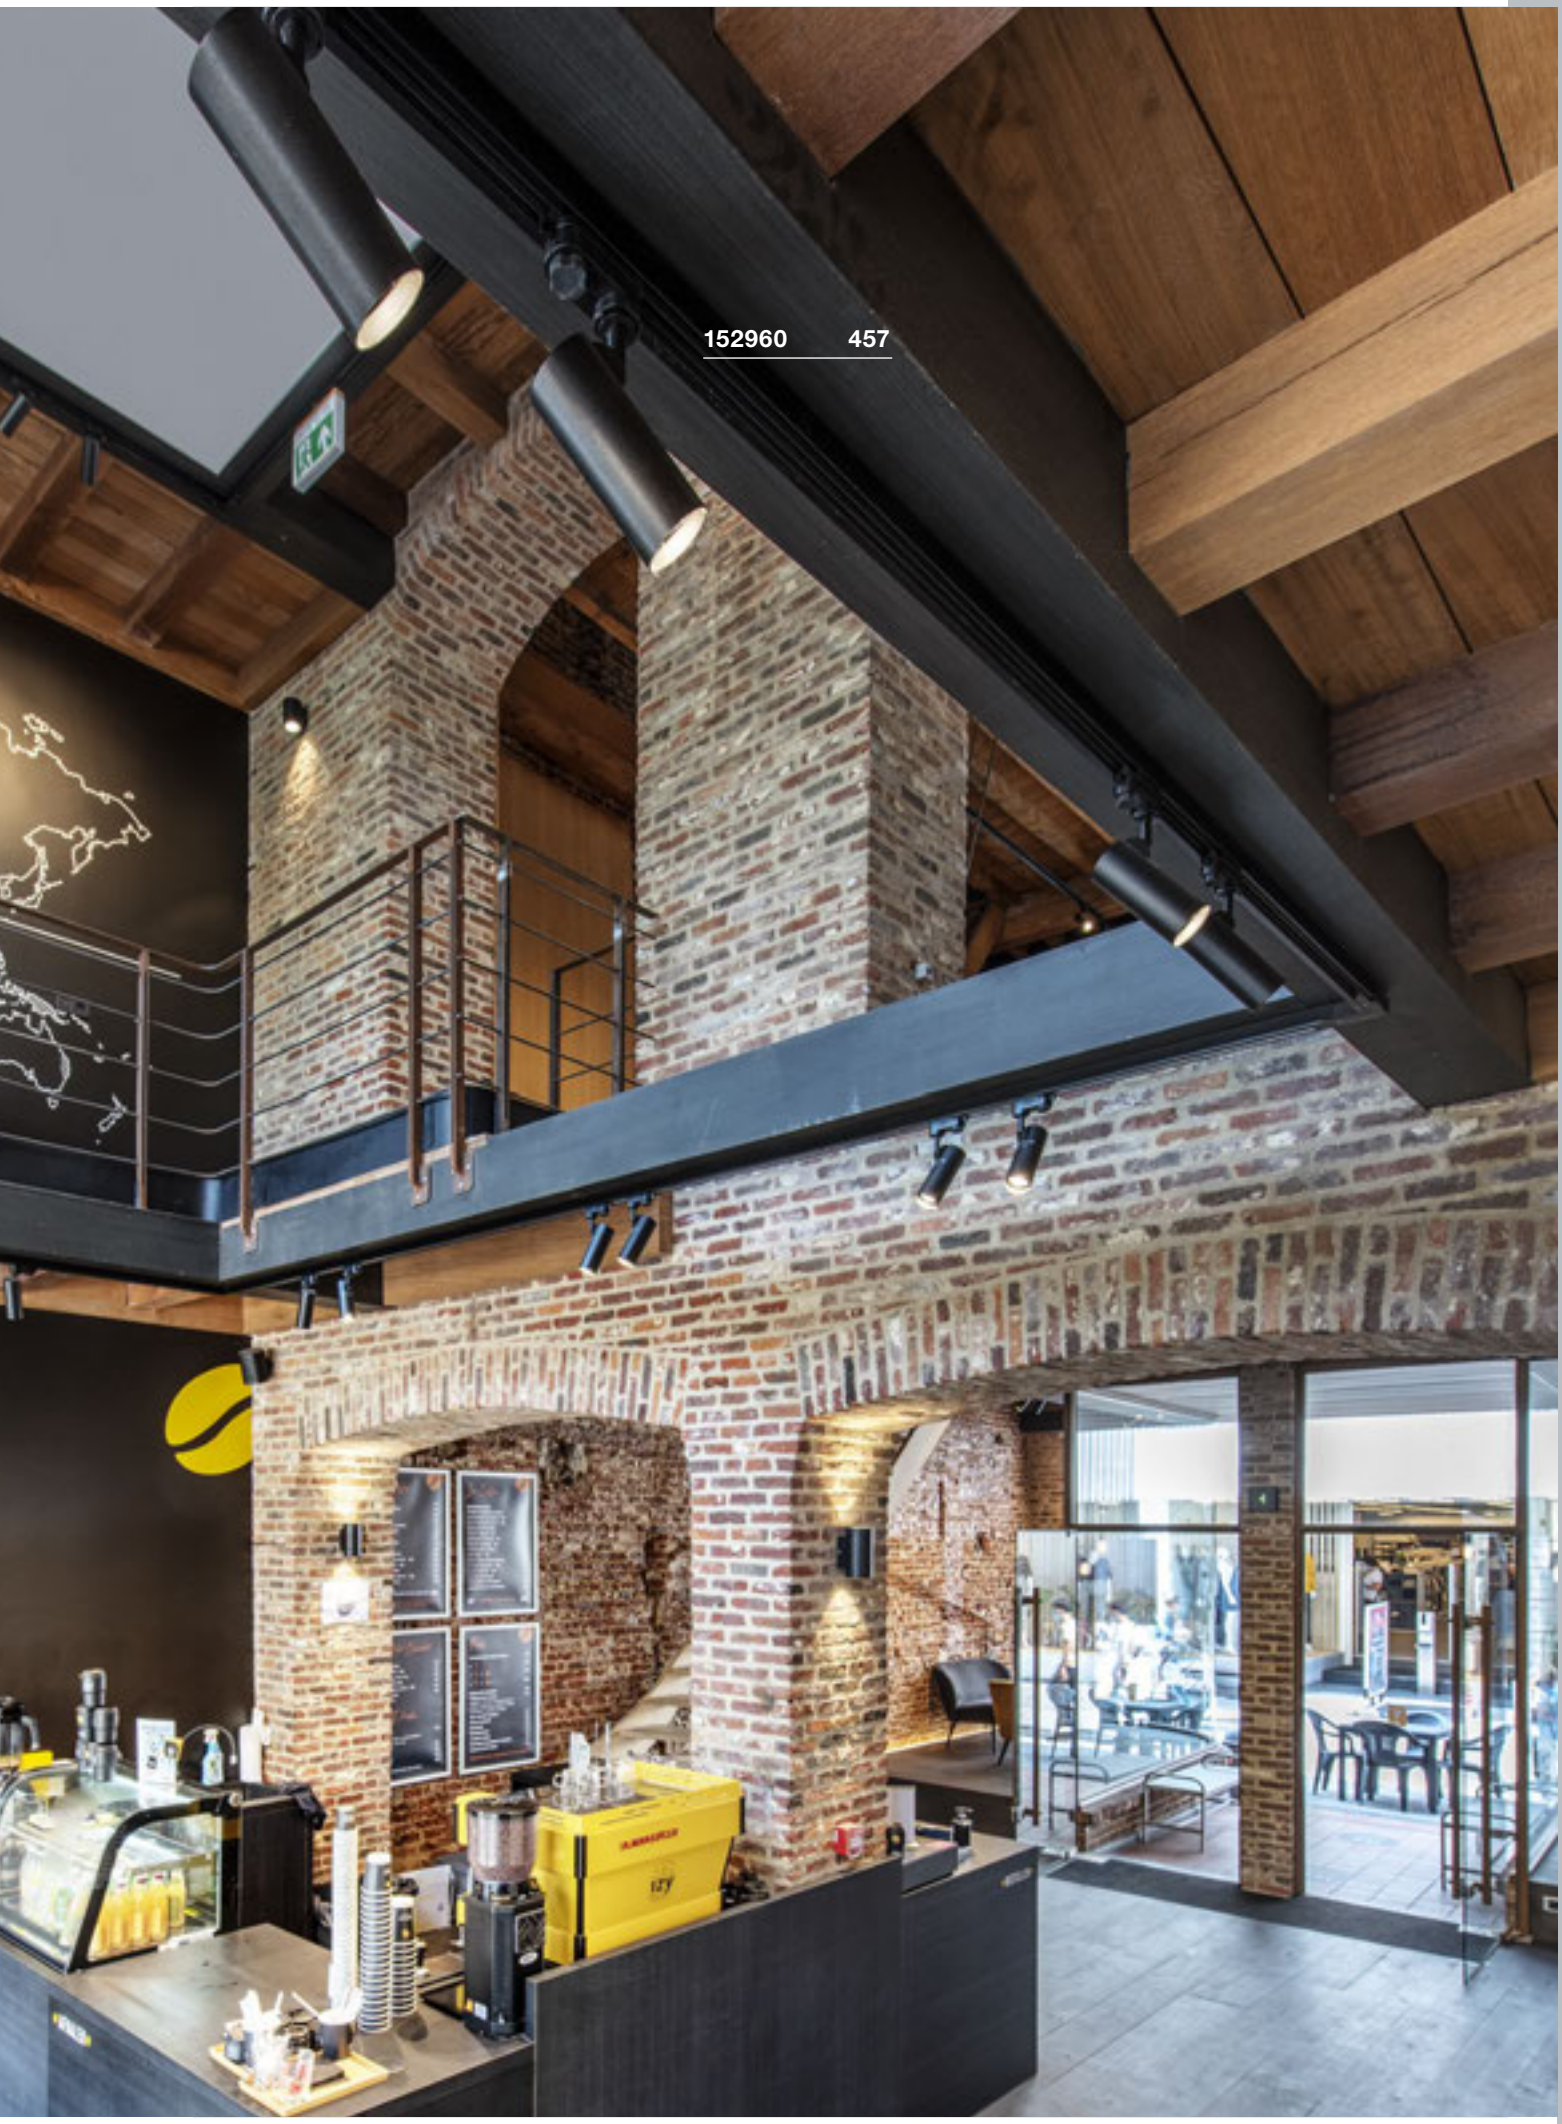


152960 457

FIND A DIMMER.
COMBINED TO PERFECTION.

ATMOSPHERIC ROOM LIGHTING THANKS TO THE PERFECT COMBINATION OF THE LIGHT AND ITS DIMMER. **AT FIND-A-DIMMER.SLV.COM**

When dimming, you must ensure compatibility between the light or lamp and the dimmer. With LED lights in particular, you must first check which dimmer is required. Given the wide range of different products available, the right combination is not always easy to find. Our “Find a Dimmer” overview is designed to help you with your decision. Alongside a wide range of combinations of lights/lamps and dimmers, at **find-a-dimmer.slv.com,** you can also find additional information regarding the minimum number of lights or lamps required for flawless operation.
The overview is regularly updated and expanded.

In case of special queries, please contact our technical support team at **service@slv.de**



1 Suitable

- Ideal dimming behavior
- The minimum number of lights/lamps required for flawless operation is stated as a number.

Only suitable under certain conditions

- No optimal dimming bahaviour
- May flicker

Not compatbile



find-a-dimmer.slv.com

ACCESSORIES

IP44 transformers
12V AC



792

Transformers
12V AC




792

TENSEO transformers
12V AC



793

1-10V Ddimmer



792

DALI interface
1-10V



794

DALI universal dimmer



794

DALI controller



794

Compensation module



794

LED mains adapter
12V/24V DC



795

LED mains adapter
24V DC



795

LED mains adapter
24V DC
dimmable



796

LED driver
DALI dimmable



797, 800

LED driver
dimmable



797-799

LED driver
not dimmable



800-802

Ceiling hook



803

Cable clamp



803

GLENOS® ceiling roses



803

Textile cable
10 m



803

Cable
10 m clear



803

Wire rope suspension



803

Stoppers
for wire rope



804

Cable extensions
1 m
2 m



804

Connector strip
3 outlets



804

Double-sided tape



804

Socket
GU10



804

Socket
GU10



804

Connection boxes



805

T-connector boxes



805

Reducer rings



806-807

You can find additional accessories at www.slv.com

TRANSFORMER
12V AC | 10VA IP44



IP 44

220-240V 50/60Hz
L: 7.5 cm W: 5 cm H: 4.5 cm
Material: plastic

Output voltage	12V AC
Wattage up to	10W
Control gear power factor	0,98
Thermal protection	133°C
Number of secondary outputs	1

Options	Prod. no.
■ black	**227140** ▼

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER
12V AC | 60VA IP44



IP 44

220-240V 50/60Hz
L: 7.5 cm W: 5 cm H: 4.5 cm
Material: plastic

Output voltage	12V AC
Wattage up to	60W
Control gear power factor	0,98
Thermal protection	133°C
Number of secondary outputs	1

Options	Prod. no.
■ black	**227160** ▼

Manufacturer:
Elektromaschinenbau Wittlich GmbH

TRANSFORMER
12V AC | 150VA



IP 20

220-240V 50/60Hz
L: 16.6cm W: 3.9 cm H: 3.3 cm
Material: plastic

Output voltage	12V AC
Wattage of	50W
Wattage up to	150W
Control gear power factor	0,98
Thermal protection	110°C
Number of secondary outputs	3

Options	Prod. no.
■ black	**461157**

Manufacturer:
WeiSen Electronic Co., Ltd

TRANSFORMER
12V AC | 60VA IP44



IP 20

220-240V 50/60Hz
L: 10.5 cm W: 3.3 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	12V AC
Wattage of	10W
Wattage up to	60W
Control gear power factor	0,98
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
□ white	**461060**

Manufacturer: HEP GmbH

1-10V DIMMER
10W



IP 20

L: 2.3 cm W: 3.9 cm H: 2 cm
Material: polycarbonate (PC)

Options	Prod. no.
□ white	**470505**

Manufacturer: HEP GmbH

TRANSFORMER TENSEO
12V AC | 50VA



220-240V 50/60Hz
Steel/brass
H: 11 cm
Diameter: 11.1 cm

Output voltage	12V AC
Number of secondary outputs	1
Nominal wattage VA	50
Wattage up to	50W
Thermal protection	130°C
Primary protection	1.6A

Options	Prod. no.
black	**1002691**
white	**1002692**
chrome	**1002693**

TRANSFORMER TENSEO
12V AC | 105VA



220-240V 50/60Hz
Steel/brass
H: 11 cm
Diameter: 11.1 cm

Output voltage	12V AC
Number of secondary outputs	1
Nominal wattage VA	105
Wattage up to	105W
Thermal protection	130°C
Primary protection	1.6A

Options	Prod. no.
white	**138981**
chrome	**138982**


TRANSFORMER TENSEO
12V AC | 210VA



220-240V 50/60Hz
Steel/brass
H: 11 cm
Diameter: 13.5 cm

Output voltage	12V AC
Number of secondary outputs	1
Nominal wattage VA	210
Wattage up to	210W
Thermal protection	130°C
Primary protection	3.15A

Options	Prod. no.
white	**138991**
chrome	**138992**

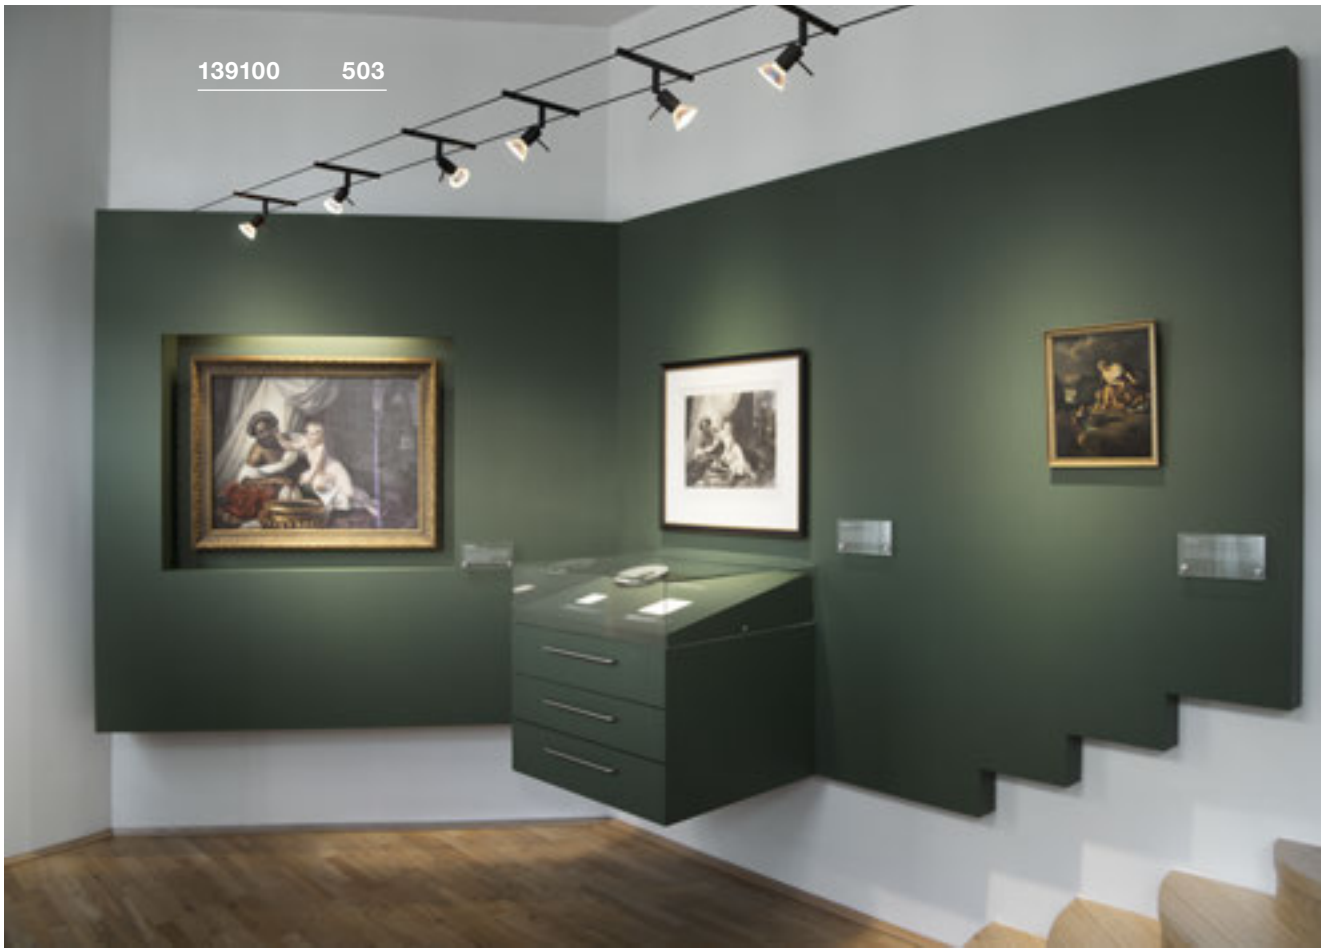

DALI INTERFACE
1-10V + on/off



1-10V IP 20

220-240V ~50/60Hz
L: 5.85 cm W: 3.25 cm H: 1.5 cm
Material: plastic

- Suitable for controlling electronic ballasts with 1-10V control input
- Galvanic isolation of DALI input and 1-10V output

Wattage up to	1000W

Options	Prod. no.
grey	**1002218**

Manufacturer: LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
3-25W



Dali IP 20

220-240V ~50/60Hz
L: 5.85 cm W: 3.25 cm H: 1.5 cm
Material: plastic

- Suitable for R, L and C thanks to automatic load detection. DALI power consumption: 6mA

Wattage of	3W
Wattage up to	25W

Options	Prod. no.
grey	**1002220**

Manufacturer: LUNATONE Industrielle Elektronik GmbH

DALI UNIVERSAL DIMMER
10-300W



Dali IP 20

220-240V ~50/60Hz
L: 12.02 cm W: 3.02 cm H: 2.16 cm
Material: plastic

- Suitable for R, L and C thanks to automatic load detection. DALI power consumption: 6mA

Wattage of	10W
Wattage up to	300W

Options	Prod. no.
grey	**1002221**

Manufacturer: LUNATONE Industrielle Elektronik GmbH

DALI CONTROLLER
24V DC



Dali IP 20

10-24V DC
L: 11.6 cm W: 4.2 cm H: 1.8 cm
Material: polycarbonate (PC)

Output voltage	10-24V DC
Number of secondary outputs	1

Options	Prod. no.
white	**1003106**

COMPENSATION MODULE



IP 20

220-240V ~50/60Hz
L: 9.5 cm
Diameter: 1.5 cm
Material: polycarbonate (PC)

- Reduces or corrects problems when dimming such as flickering, flashing or when the LED light does not fully go out when switched off. The compensator is always connected after the dimmer or switch and parallel to the downlight spot or LED driver.

Options	Prod. no.
glossy black	**1002785▼**



LED POWER SUPPLY
12V | 15W

NEW



IP 20

200-240V ~50/60Hz
H: 22 cm Diameter: 55 cm
Material: polycarbonate (PC)

Output voltage	12V DC
Wattage of	0W
Wattage up to	15W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005444**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V | 15W

NEW



IP 20 40°

200-240V ~50/60Hz
H: 22 cm Diameter: 55 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	15W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005445**

Manufacturer: HEP GmbH

LED POWER SUPPLY
12V | 12W with strain relief

NEW



IP 20

100-240V ~50/60Hz
L: 10.6 cm W: 3.3 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	12
Wattage of	0W
Wattage up to	12W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005241**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V | 12W with strain relief

NEW



IP 20

100-240V ~50/60Hz
L: 10.6 cm W: 3.3 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24
Wattage of	0W
Wattage up to	12W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005380**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V | 20W

NEW



220-240V ~50/60Hz
L: 11.5 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	20W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005381**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V | 40W

NEW



220-240V ~50/60Hz
L: 18 cm W: 4.5 cm H: 2.7 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	40W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005382**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V DC | 150W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 20.7 cm W: 11 cm H: 4.5 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	150W
Control gear power factor	0,98
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
black	**470549**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V | 60W

NEW



220-240V ~50/60Hz
L: 18 cm W: 4.5 cm H: 2.7 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	60W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005383**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V DC | 100W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 18.2 cm W: 8.8 cm H: 3.5 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	100W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	2

Options	Prod. no.
black	**470500**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V DC | 150W



IP 44

220-240V ~50/60Hz
L: 23.4 cm W: 11.4 cm H: 4.9 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	0W
Wattage up to	150W
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
black	**470548**

Manufacturer: HEP GmbH

LED POWER SUPPLY
24V DC | 50W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 18.4 cmW: 6.1 cm H: 3.2 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	12W
Wattage up to	50W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white/blue	**1003104**

LED POWER SUPPLY
24V DC | 100W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 21 cm W: 6.7 cm H: 3.4 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	34W
Wattage up to	100W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white/blue	**1003105**

LED POWER SUPPLY
12V DC | 100W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 34.7 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	5W
Wattage up to	100W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1004776**

Manufacturer: HEP GmbH

LED POWER SUPPLY
60W | DALI, 24V, 2 channel

NEW



IP 20

220-240V ~50/60Hz
L: 20.2 cm W: 5.8 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	5W
Wattage up to	60W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	2

Options	Prod. no.
white	**1006133**

Manufacturer: HEP GmbH

LED POWER SUPPLY
100W | DALI, 24V, 2 channel

NEW



IP 20

220-240V ~50/60Hz
L: 34.7 cm W: 4 cm H: 2.2 cm
Material: polycarbonate (PC)

Wattage of	5W
Wattage up to	100W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	2

Options	Prod. no.
white	**1006134**

Manufacturer: HEP GmbH

LED DRIVER
DALI

NEW



IP 20

220-240V ~50/60Hz
L: 42.5 cm W: 4.8 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	24V DC
Wattage of	5W
Wattage up to	200W
Control gear power factor	0,95
Thermal protection	90°C
Number of secondary outputs	1

Options	Prod. no.
white	**1004777**

Manufacturer: HEP GmbH

LED DRIVER
200mA | 6-8.4W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 8.5 cm B: 4.1 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	30-42V DC
Wattage of	6W
Wattage up to	8.4W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1003254**

Manufacturer: HEP GmbH

LED DRIVER
350mA | 3W



IP 20

220-240V ~50/60Hz
L: 6.3 cm W: 4 cm H: 2.3 cm
Material: polycarbonate (PC)

Output voltage	10–17V DC
Wattage of	3.5W
Wattage up to	5.9W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1002791**

Manufacturer: HEP GmbH

LED DRIVER
350mA | 10W



IP 20

220-240V ~50/60Hz
L: 8.5 cm B: 4.1 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	13-26V DC
Wattage of	4.55W
Wattage up to	9.1W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**464140**

Manufacturer: HEP GmbH

LED DRIVER
350mA | 15W



IP 20

220-240V ~50/60Hz
L: 8.5 cm B: 4.1 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	26-43
Wattage of	9W
Wattage up to	15W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1002803**

Manufacturer: HEP GmbH

LED DRIVER
350mA | 20W



IP 20

220-240V ~50/60Hz
L: 11.5 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	32-54V DC
Wattage of	11.2W
Wattage up to	18.9W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005449**

Manufacturer: HEP GmbH

LED DRIVER
500mA | 15W



IP 20

220-240V ~50/60Hz
L: 8.5 cm B: 4.1 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	18-30V DC
Wattage of	9W
Wattage up to	15W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**464144**

Manufacturer: HEP GmbH

LED DRIVER
700mA | 10W



IP 20

220-240V ~50/60Hz
L: 8.5 cm B: 4.1 cm H: 2.2 cm
Material: polycarbonate (PC)

Output voltage	13-26V DC
Wattage of	4.55W
Wattage up to	9.1W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**464142**

Manufacturer: HEP GmbH

LED DRIVER
700mA | 6W



IP 20

220-240V ~50/60Hz
L: 6.3 cm W: 4 cm H: 2.3 cm
Material: polycarbonate (PC)

Output voltage	4.8–8.6V DC
Wattage of	3.4W
Wattage up to	6W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1002792**

Manufacturer: HEP GmbH

LED DRIVER
700mA | 20W | dimmable | incl. strain relief



IP 20

220-240V ~50/60Hz
L: 11.5 cm W: 4.1 cm H: 2.5 cm
Material: polycarbonate (PC)

Output voltage	18-26V DC
Wattage of	12.6W
Wattage up to	182W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1006202**

Manufacturer: HEP GmbH

LED DRIVER
700mA | 39W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Material: polycarbonate (PC)

Output voltage	28-56V DC
Wattage of	20W
Wattage up to	39W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
grey/blue	**1001267**

LED DRIVER
700mA | 40W

FOLLOWER



220-240V ~50/60Hz
L: 14.5 cm B: 4 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	32-54V DC
Wattage of	22.4W
Wattage up to	37.8W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005446**

Manufacturer: HEP GmbH

LED DRIVER
1000mA | 39W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 16.6 cm W: 5.2 cm H: 2.4 cm
Material: polycarbonate (PC)

Output voltage	28-56V DC
Wattage of	20W
Wattage up to	39W
Control gear power factor	0,95
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**464804**

LED DRIVER
1000mA | 40W

FOLLOWER



200-240V ~50/60Hz
L: 14.5 cm B: 4 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	25-40V DC
Wattage of	26.3W
Wattage up to	42W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005387**

Manufacturer: HEP GmbH

LED DRIVER
250-700mA | 20W incl. strain relief



1-10V Dali IP 20

220-240V ~50/60Hz
L: 15 cm W: 5.2 cm H: 2.8 cm
Material: polycarbonate (PC)

Output voltage	6-60V DC
Wattage of	1.5W
Wattage up to	20W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1002423**

Manufacturer: HEP GmbH

LED DRIVER
250-700mA | 40W incl. strain relief



1-10V Dali IP 20

220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Material: polycarbonate (PC)

Output voltage	9-58V DC
Wattage of	4.5W
Wattage up to	40W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1002424**

Manufacturer: HEP GmbH

LED DRIVER
700-1500mA | 50W incl. strain relief



1-10V Dali IP 20

220-240V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 2.4 cm
Material: polycarbonate (PC)

Output voltage	6-58V DC
Wattage of	4.2W
Wattage up to	50W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1002425**

Manufacturer: HEP GmbH

LED DRIVER
250mA | 10 W



220-240V ~50/60Hz
L: 6.5 cm W: 3.9 cm H: 2 cm
Material: polycarbonate (PC)

Output voltage	26-40V DC
Wattage of	6.5W
Wattage up to	10W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1004780**

Manufacturer: HEP GmbH

LED DRIVER
320mA | 3W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 5.5 cm W: 3.9 cm H: 2 cm
Material: polycarbonate (PC)

Output voltage	3-9V DC
Wattage of	1W
Wattage up to	3W
Control gear power factor	0,4
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**464108**

Manufacturer: HEP GmbH

LED DRIVER
350mA | 3W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 5.6 cm W: 3.9 cm H: 2 cm
Material: polycarbonate (PC)

• 350mA AMP plug included

Output voltage	3-9V DC
Wattage of	1W
Wattage up to	3.6W
Control gear power factor	0,4
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**464107**

Manufacturer: HEP GmbH

LED DRIVER
350mA | 15W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 15.8 cm W: 2.2 cm H: 1.9 cm
Material: polycarbonate (PC)

Output voltage	2-40V DC
Wattage of	0W
Wattage up to	15W
Control gear power factor	0,6
Thermal protection	100°C
Number of secondary outputs	1

Options	Prod. no.
white	**464031**

Manufacturer: TCI Telecomunicazioni Italia Srl

LED DRIVER
350mA | 20W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 11.6 cm W: 4.4 cm H: 3 cm
Material: plastic

Wattage of	12.6W
Wattage up to	19.5W
Control gear power factor	0,9
Thermal protection	110°C

Options	Prod. no.
white	**1002420**

Manufacturer: HEP GmbH

LED DRIVER
500mA | 10W incl. strain relief

FOLLOWER



220-240V ~50/60Hz
L: 6.5 cm W: 3.9 cm H: 2 cm
Material: polycarbonate (PC)

Output voltage	13–20V DC
Wattage of	6.5W
Wattage up to	10W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1005384**

Manufacturer: HEP GmbH

LED DRIVER
700mA | 3W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 5.5 cm W: 3.9 cm H: 2 cm
Material: polycarbonate (PC)

Output voltage	4-5Vdc
Wattage of	3W
Wattage up to	3W
Control gear power factor	0,4
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**464200**

Manufacturer: HEP GmbH

LED DRIVER
500/600/700mA | 30W incl. strain relief



220-240V ~50/60Hz
L: 14.7 cm B: 4.3 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	30-42V DC
Wattage of	21W
Wattage up to	29.5W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	**1004781**

Manufacturer: HEP GmbH

LED DRIVER
800/900/1050mA | 40W incl. strain relief



IP 20

220-240V ~50/60Hz
L: 14.7 cm B: 4.3 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	30-42V DC
Wattage of	31.5W
Wattage up to	44W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
white	1004782

Manufacturer: HEP GmbH

LED DRIVER
700/90/100mA | 40W incl. strain relief

FOLLOWER



IP 20

120-277V ~50/60Hz
L: 12.3 cm W: 7.9 cm H: 3 cm
Material: polycarbonate (PC)

Output voltage	28-52V DC
Wattage of	19.6W
Wattage up to	40W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	3

Options	Prod. no.
white	1006120

Manufacturer: HEP GmbH

LED DRIVER
1000mA | 60W incl. strain relief




IP 20

220-240V ~50/60Hz

Output voltage	28-57V DC
Wattage of	28W
Wattage up to	57W
Control gear power factor	0,9
Thermal protection	110°C
Number of secondary outputs	1

Options	Prod. no.
black	1002422

Manufacturer: HEP GmbH

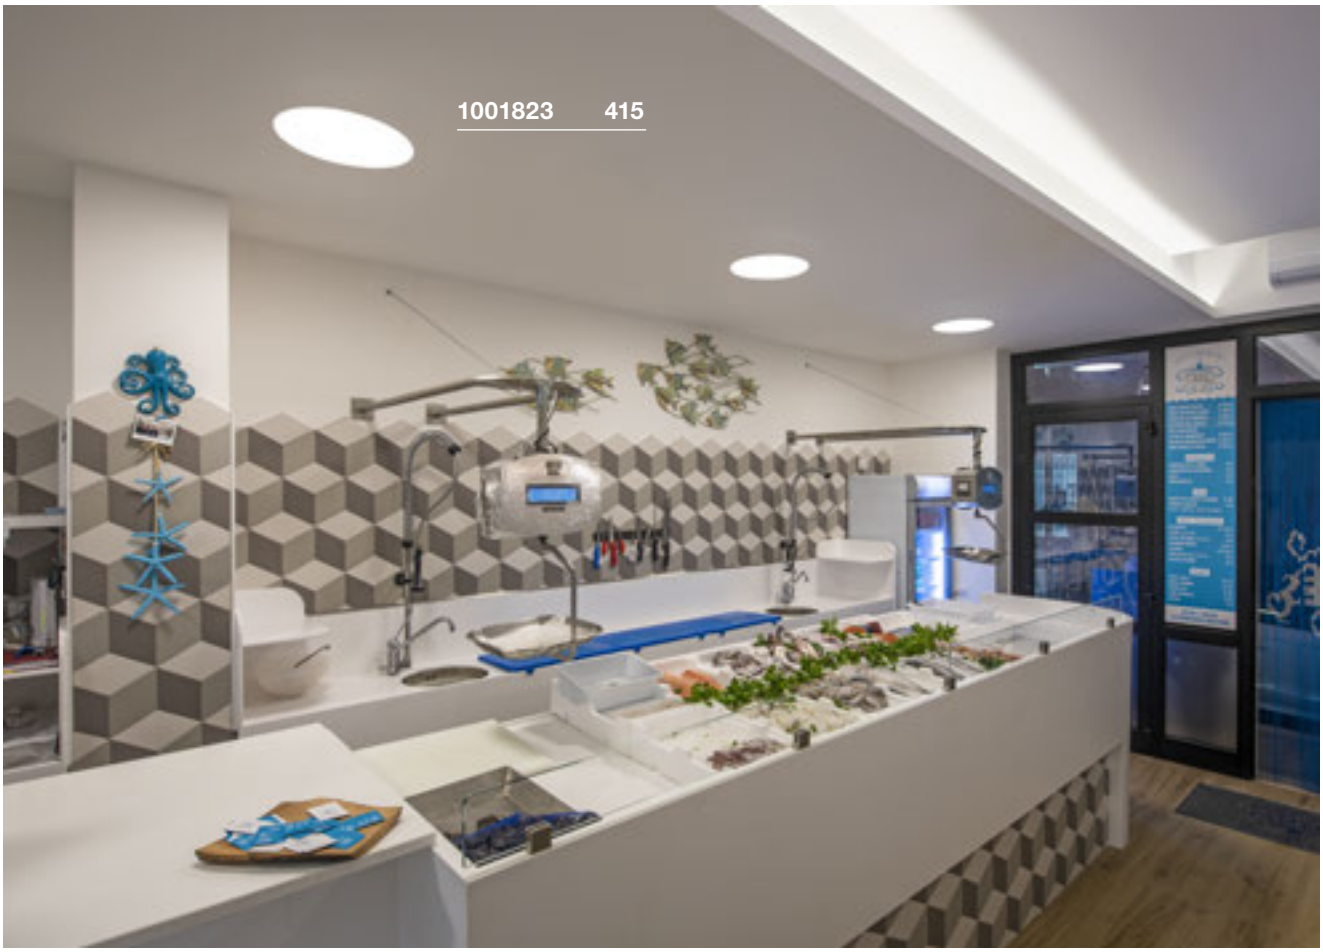

CEILING HOOK



IP 20

L: 4.6 cm Diameter: 1.8 cm
Material: aluminium

Options	Prod. no.
black	132670
white	132671

CABLE CLAMP



IP 20

L: 3.1 cm Diameter: 1.4 cm
Material: aluminium

Options	Prod. no.
black	132680
white	132681

GLENOS®
ceiling rose



IP 20

230V ~50Hz
L: 8.5 cm W: 8.5 cm H: 2.7 cm
Material: aluminium

Nominal voltage	230V ~50Hz
Max. current load	8.5A

Options	Prod. no.
black	210060
white	210061
grey	210064

TEXTILE CABLE
10m



IP 20

L: 1000 cm Diameter: 0.6 cm
Material: polyvinyl chloride (PVC)

Max. voltage	300V

Options	Prod. no.
black	961270
white	961271
red	961276

CABLE
3-pole, 3 x 0.75 mm², 10 m



L: 1000 cm

Max. voltage	300V

Options	Prod. no.
silver	961250

WIRE ROPE SUSPENSION



IP 20 40 kg

L: 500 cm Diameter: 0.15 cm
Material: steel/plastic

- 3 cable clips included

Options	Prod. no.
silver	961037

Manufacturer: Reutlinger GmbH

STOPPERS FOR WIRE ROPE



IP 20

Diameter: 0.8 cm
Material: steel

Options	Prod. no.
grey	**961034**

CABLE EXTENSION



IP 20

L: 100 cm
Material: plastic

• With amp plug and socket

Max. current load	350mA

Options	Prod. no.
black/red	**111861**

CONNECTOR STRIP
3 outlets



IP 20

L: 5.2 cm W: 1.4 cm H: 1.3 cm
Material: plastic

Max. current load	350mA

Options	Prod. no.
black	**111850**

DOUBLE-SIDED TAPE



L: 300 cm B: 0.9 cm

Options	Prod. no.
transparent	**220000**

GU10 SOCKET



IP 20

230V ~50Hz
H: 1.6 cm
Diameter: 2.8 cm
Material: ceramic

Nominal voltage	220-240V ~50/60Hz

Options	Prod. no.
white	**955135**

GU10 SOCKET
with connection box and quick clamp



IP 20

L: 27 cm

Options	Prod. no.
white/black	**1000909**

CONNECTION BOX
5-pole



IP 68

220-240V ~50/60Hz
L: 13 cm Diameter: 3.2 cm
Material: polyamide (PA)

Max. voltage	450V
Max. current load	32A

Options	Prod. no.
black	**228725**

CONNECTION BOX
IP68, 3-pin



IP 68

220-240V ~50/60Hz
L: 11.5 cm Diameter: 2.7 cm
Material: polyamide (PA)

Max. voltage	450V
Max. current load	17.5A

Options	Prod. no.
black	**228730**

T-CONNECTOR BOX
3-pole



IP 68

220-240V ~50/60Hz
L: 11 cm W: 6.4 cm H: 3 cm
Material: polyamide (PA)

Max. voltage	500V
Max. current load	17.5A

Options	Prod. no.
black	**228726**



NEW

TIME FOR A CHANGE. TIME FOR AN UPDATE.

An old recessed ceiling light, often still fitted with conventional bulbs, should give way to an energy-efficient and cost-effective alternative. When removing the old fitting, a larger ceiling cut-out than before will often be required.

SLV offers the ideal solution to this problem – our new reducer rings.
The reducer rings completely cover the larger ceiling cut-out while at the same time providing perfect support for your new, compact recessed ceiling light.

Neat, time-saving and uncomplicated.
And also perfectly tailored to the NUMINOS® Downlight and Spotlight System.



1. Old recessed ceiling light with a larger ceiling cut-out



2. Removal of the old recessed ceiling light



3. Installation of the reducer ring



4. Reducer ring installed and larger ceiling cut-out fully covered



5. Electrical connection and installation of the new recessed ceiling light



6. New recessed ceiling light placed into the reducer ring





Reducer ring, round













Material	steel	steel	steel	steel	steel
External diameter	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal diameter	7 cm	9 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006135**	**1006139**	**1006143**	**1006147**	**1006151**
Prod. no. white	**1006136**	**1006140**	**1006144**	**1006148**	**1006152**

Reducer ring, square



Material	steel	steel	steel	steel	steel
Length	16 cm	16 cm	24 cm	24 cm	24 cm
Width	16 cm	16 cm	24 cm	24 cm	24 cm
Height	5.3 cm	5.3 cm	5.3 cm	5.3 cm	5.3 cm
Internal diameter	7 cm	9 cm	12 cm	15 cm	18 cm
Ceiling cut-out	8.5 - 13 cm	12 - 15 cm	14 - 18 cm	17 - 20 cm	20 - 22 cm
Material thickness	3 cm	3 cm	3 cm	3 cm	3 cm
Prod. no. black	**1006137**	**1006141**	**1006145**	**1006149**	**1006153**
Prod. no. white	**1006138**	**1006142**	**1006146**	**1006150**	**1006154**

THE SOURCE OF ALL LIGHT.

THE RIGHT LAMP FOR EVERY LIGHTING SOLUTION.

The right lighting effect is what happens when the light and lamp come together in perfect harmony. Alongside design, energyefficiency is an important criterion. In recent years, a wide range of alternatives to the classic incandescent lamp have been introduced to the market. You are therefore sure to find the right lamp for every application and type of light fitting.

LAMPS

GENERAL INFORMATION.

• The operation of open lights without protective glass is only permitted with low-pressure lamps. Lamps with this symbol (Standard IEC 357) are suitable for use in lights without protective glass.

• Halogen lamps and metal halide HID lamps can cause the respective light housing to heate up. They should therefore only be touched once the housing has cooled down. Adjustable lights and light heads that do not feature insulated positioning levers or which exceed the maximum permissible housing temperature at the positioning point when operated at maximum wattage should also be mounted out of reach. Appropriate solutions can be found in this chapter.

• In many cases, lowvoltage lights can also be used with suitable LED retrofit lamps. However, in some cases, due to the coming together of specific transformer and LED technologies, not all lights can be combined with all lamps - even those that may appear compatible. If you have any questions regarding compatibility, you can find information at slv.com or contact our sales department.

• The dimensions of the lamps always refer to the complete external dimensions, which include the threaded fitting.

• All bulbs must be sorted before disposal and do not belong in the household waste.



LED QT14
G9

NEW



IP 20 | 300° | -

220-240V ~50/60Hz
Wattage: 3.6W
Material: ceramic
Diameter: 1.8 cm H: 5.4 cm

Luminous flux	400lm
Lamp current	0.03A
Color rendering index	90
Wattage	3.6W
Energy consumption/1000h	4kWh

A–G: E

Options	Prod. no.
white | 3000K	**1005286**

LED QT-DE12
R7S, 78 mm

NEW



L | 330° | -

220-240V ~50/60Hz
Wattage: 9W
Material: polycarbonate (PC)
Diameter: 2.9 cm L: 7.8 cm

Luminous flux	1050lm
Lamp current	0.043A
Color rendering index	90
Wattage	9W
Energy consumption/1000h	9kWh

A–G: E

Options	Prod. no.
grey | 3000K	**1005287**

LED QT-DE12
R7S, 118 mm

NEW



L | 330° | -

220-240V ~50/60Hz
Wattage: 15W
Material: polycarbonate (PC)
Diameter: 2.9 cm L: 11.8 cm

Luminous flux	2000lm
Lamp current	0.068A
Color rendering index	90
Wattage	15W
Energy consumption/1000h	15kWh

A–G: E

Options	Prod. no.
grey | 3000K	**1005288**

LED C35
E14

NEW



C,L | 320° | -

220-240V ~50/60Hz
Wattage: 4.2W
Material: glass
Diameter: 3.5 cm H: 9.8 cm

Luminous flux	380lm
Lamp current	0.025A
Color rendering index	90
Wattage	4.2W
Energy consumption/1000h	5kWh

A–G: F

Options	Prod. no.
transparent | 2700K	**1005284**

LED C35
E14

NEW



C,L | 320° | -

220-240V ~50/60Hz
Wattage: 4.2W
Material: glass
Diameter: 3.5 cm H: 9.8 cm

Luminous flux	350lm
Lamp current	0.025A
Color rendering index	90
Wattage	4.2W
Energy consumption/1000h	5kWh

A–G: G

Options	Prod. no.
white | 2700K	**1005285**

LED TCR-TSE
GX53

NEW

C,L | 120° | -

220-240V ~50/60Hz
Wattage: 6.1W
Material: polycarbonate (PC) / polycarbonate (PC)
Diameter: 7.5 cm H: 2.4 cm

Luminous flux	490lm
Lamp current	0.034A
Color rendering index	90
Wattage	6.1W
Energy consumption/1000h	6kWh

A–G: G 1005272 1005271 | A–G: F 1005269

Options	Prod. no.
white/opaque | 2700K	**1005272**
white/opaque | 3000K	**1005271**
white/opaque | 4000K	**1005269**

LED QR51
GU5,3



IP 20 | 36° | -

12V AC
Wattage: 5.5W
Material: glass
Diameter: 5 cm L: 4.5 cm

Luminous flux	450lm
Lamp current	0.63A
Max. luminosity	1000cd
Color rendering index	80
Wattage	5.5W
Energy consumption/1000h	7kWh

G 1001574 F 1001575

Options	Prod. no.
transparent | 2700K	**1001574**
transparent | 3000K	**1001575**

Manufacturer: Signify B.V.

LED G53



IP 20 | 24° | -

12V AC
Wattage: 15W
Material: plastic/aluminium
Diameter: 11.1 cm L: 6.2 cm

Luminous flux	760lm
Lamp current	1.8A
Max. luminosity	3900cd
Color rendering index	90
Wattage	15W
Energy consumption/1000h	17kWh

G

Options	Prod. no.
silver | 2700K	**560231**
silver | 3000K	**560233**

Manufacturer: Signify B.V.

LED G53



IP 20 | 40° | -

12V AC
Wattage: 15W
Material: plastic/aluminium
Diameter: 11.1 cm L: 6.2 cm

Luminous flux	800lm
Lamp current	1.8A
Max. luminosity	1400cd
Color rendering index	90
Wattage	15W
Energy consumption/1000h	17kWh

G

Options	Prod. no.
silver | 2700K	**560232**
silver | 3000K	**560234**

Manufacturer: Signify B.V.

LED T32 FILAMENT
GU10



C | IP 20 | -


220-240V ~50/60Hz
Wattage: 3.2W
Material: glass
Diameter: 3.2 cm L: 10 cm

Luminous flux	270lm
Lamp current	0.0175A
Color rendering index	90
Wattage	3.2W
Energy consumption/1000h	4kWh

G

Options	Prod. no.
transparent | 2700K	**1003101**

Manufacturer: Segula GmbH

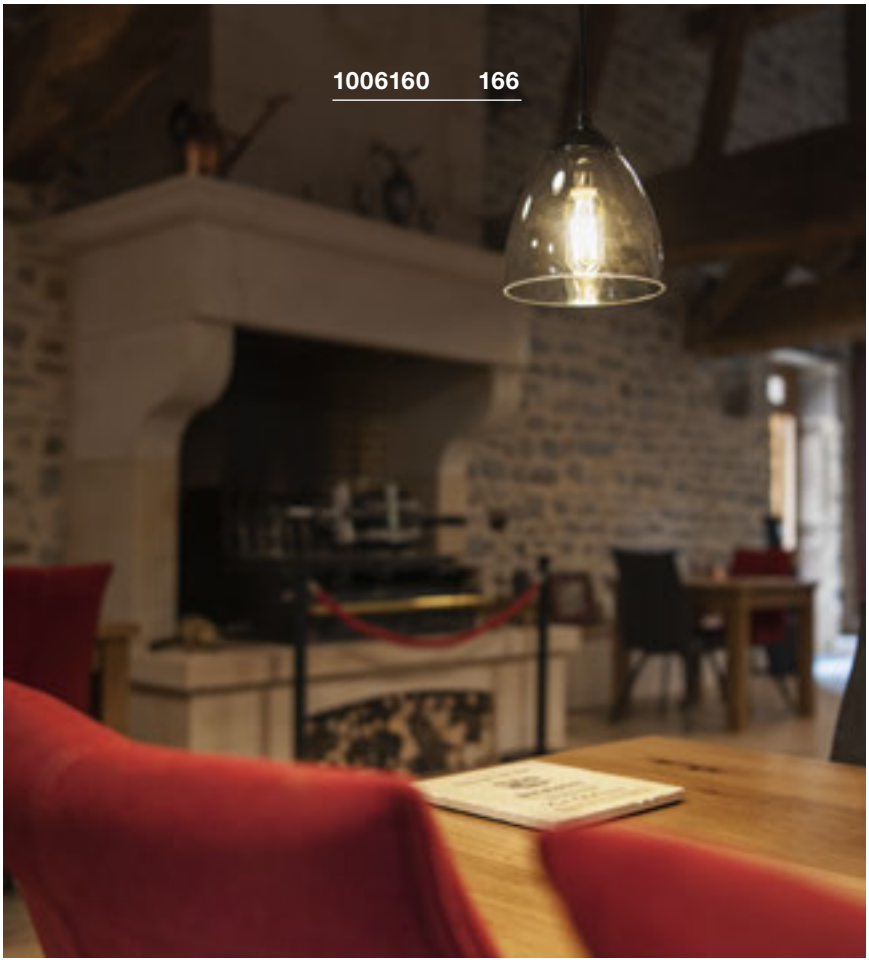

LED QPAR51
GU10, tunable 2700-6500K, smart

NEW



IP 20 | 38° | 25 000 Hours

220-240V ~50/60Hz
Wattage: 5W
Material: polyamide 66 (PA 66) / polycarbonate (PC)
Diameter: 5 cm H: 5.4 cm

Luminous flux	380lm
Lamp current	0.04A
Max. luminosity	530cd
Color rendering index	90
Wattage	5W
Energy consumption/1000h	5kWh

A F

Options	Prod. no.
white | 2700-6500K	**1005311**

LED QPAR51
GU10, RGBW, smart

NEW



IP 20 | 38° | 25 000 Hours

220-240V ~50/60Hz
Wattage: 5.2W
Material: polyamide 66 (PA 66) / polycarbonate (PC)
Diameter: 5 cm H: 6.1 cm

Luminous flux	370lm
Lamp current	0.042A
Max. luminosity	680cd
Color rendering index	90
Wattage	5.2W
Energy consumption/1000h	6kWh

A F

Options	Prod. no.
white	**1005312**

LED QPAR51
GU10



IP 20 | 36° | 20 000 Hours

220-240V ~50/60Hz
Wattage: 4W
Material: plastic
Diameter: 5 cm L: 5.5 cm

- Contains recycled material

Luminous flux	270lm
Lamp current	0.035 A
Max. luminosity	400cd
Color rendering index	80
Wattage	4W
Energy consumption/1000h	4kWh

A G 1004972

A F 1004973 1004974

Options	Prod. no.
white | 2700K	**1004972▼**
white | 3000K	**1004973▼**
white | 4000K	**1004974▼**

LED QPAR51
GU10

NEW



IP 20 | 36° | 40 000 Hours

220-240V ~50/60Hz
Wattage: 6W
Material: glass
Diameter: 5 cm L: 5.4 cm

Luminous flux	360lm
Lamp current	0.033A
Max. luminosity	680cd
Color rendering index	90
Wattage	6W
Energy consumption/1000h	6kWh

A G

Options	Prod. no.
silver | 2200-2700K	**1005273**



LED QPAR51
GU10



IP 20 38° -

220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Diameter: 5 cm L: 5.4 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Color rendering index	90
Wattage	6W
Energy consumption/1000h	6kWh

G 1005077 F 1005080 1005083

Options	Prod. no.
black | 2700K	**1005077**
black | 3000K	**1005080**
black | 4000K	**1005083**

LED QPAR51
GU10



IP 20 38° -

220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Diameter: 5 cm L: 5.4 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Color rendering index	90
Wattage	6W
Energy consumption/1000h	6kWh

G 1005076 F 1005079 1005082

Options	Prod. no.
white | 2700K	**1005076**
white | 3000K	**1005079**
white | 4000K	**1005082**

LED QPAR51
GU10



IP 20 38° -

220-240V ~50/60Hz
Wattage: 6W
Material: polycarbonate (PC)
Diameter: 5 cm L: 5.4 cm

Luminous flux	450lm
Lamp current	0.037A
Max. luminosity	880cd
Color rendering index	90
Wattage	6W
Energy consumption/1000h	6kWh

G 1005075 F 1005078 1005081

Options	Prod. no.
grey | 2700K	**1005075**
grey | 3000K	**1005078**
grey | 4000K	**1005081**

QPAR111
GU10, tunable 2700-6500K, smart

NEW ZIGBEE



IP 20 25° -

220-240V ~50/60Hz
Wattage: 10W
Material: aluminium / polycarbonate (PC)
Diameter: 11.1 cm H: 7 cm

Luminous flux	760lm
Lamp current	0.051A
Max. luminosity	4300cd
Color rendering index	90
Wattage	10W
Energy consumption/1000h	10kWh

F

Options	Prod. no.	
white | 2700-6500K	**1005313**	
white | 2700-6500K	**1005314**	

LED QPAR111
GU10, RGBW, smart

NEW ZIGBEE RGB +W



IP 20 25° -

220-240V ~50/60Hz
Wattage: 10W
Material: aluminium
Diameter: 11.1 cm H: 7 cm

Luminous flux	750lm
Lamp current	0.056A
Max. luminosity	3500cd
Color rendering index	90
Wattage	10W
Energy consumption/1000h	10kWh

F

Options	Prod. no.	
white	**1005315**	

LED QPAR111
GU10, RGBW, smart

NEW ZIGBEE RGB +W



IP 20 40° -

220-240V ~50/60Hz
Wattage: 10W
Material: aluminium
Diameter: 11.1 cm H: 7 cm

Luminous flux	790lm
Lamp current	0.056A
Max. luminosity	3500cd
Color rendering index	90
Wattage	10W
Energy consumption/1000h	10kWh

F

Options	Prod. no.	
white	**1005316**	

LED QPAR 111
GU10

NEW



IP 20 | 10° | -

220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Diameter: 11.1 cm H: 7 cm

Luminous flux	900lm
Lamp current	0.058A
Max. luminosity	11000cd
Color rendering index	90
Wattage	12.5W
Energy consumption/1000h	13kWh

Options	Prod. no.
silver | 2700K	**1005275**
silver | 3000K	**1005278**
silver | 4000K	**1005281**

LED QPAR 111
GU10

NEW



IP 20 | 30° | -

220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Diameter: 11.1 cm H: 7 cm

Luminous flux	950lm
Lamp current	0.058A
Max. luminosity	3000cd
Color rendering index	90
Wattage	12.5W
Energy consumption/1000h	13kWh

Options	Prod. no.
silver | 2700K	**1005276**
silver | 3000K	**1005279**
silver | 4000K	**1005282**

LED QPAR 111
GU10

NEW



IP 20 | 60° | -

220-240V ~50/60Hz
Wattage: 12.5W
Material: aluminium
Diameter: 11.1 cm H: 7 cm

Luminous flux	1000lm
Lamp current	0.058A
Max. luminosity	1000cd
Color rendering index	90
Wattage	12.5W
Energy consumption/1000h	13kWh

F 1005277 1005280 E 1005283

Options	Prod. no.
silver | 2700K	**1005277**
silver | 3000K	**1005280**
silver | 4000K	**1005283**

LED QPAR111
GU10

NEW



C,L | IP 20 | 38° | -

220-240V ~50/60Hz
Wattage: 8W
Material: glass
Diameter: 11.1 cm H: 6.1 cm

Luminous flux	680lm
Lamp current	0.046A
Max. luminosity	1300cd
Color rendering index	90
Wattage	8W
Energy consumption/1000h	8kWh

Options	Prod. no.
transparent | 2700K	**1005274**

LED QPAR111
GU10

NEW



IP 20 | 25° | -

220-240V ~50/60Hz
Wattage: 7.3W
Material: plastic/aluminium
Diameter: 11.1 cm H: 7.1 cm

Luminous flux	530lm
Lamp current	0.051A
Max. luminosity	1470cd
Color rendering index	90
Wattage	7.3W
Energy consumption/1000h	7kWh

Options	Prod. no.
silver | 2700K	**1005291**
silver | 3000K	**1005292**
silver | 4000K	**1005293**

LED QPAR111
GU10

NEW



IP 20 | 40° | -

220-240V ~50/60Hz
Wattage: 7.3W
Material: plastic/aluminium
Diameter: 11.1 cm H: 7.1 cm

Luminous flux	500lm
Lamp current	0.051A
Max. luminosity	1040cd
Color rendering index	90
Wattage	7.3W
Energy consumption/1000h	7kWh

Options	Prod. no.
silver | 2700K	**1005294**
silver | 3000K	**1005295**
silver | 4000K	**1005296**

LED A60
E27, tunable 2700-6500K, smart

NEW



IP 20 230° -

220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66)
Diameter: 6 cm H: 11 cm

Luminous flux	800lm
Lamp current	0.067A
Color rendering index	90
Wattage	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
white | 2700-6500K	**1005317**

LED A60
E27, RGBW, smart

NEW



IP 20 230° -

220-240V ~50/60Hz
Wattage: 9W
Material: polyamide 66 (PA 66) / polycarbonate (PC)
Diameter: 6 cm H: 11 cm

Luminous flux	800lm
Lamp current	0.073A
Color rendering index	90
Wattage	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
white / opaque	**1005318**

LED A60
E27

NEW



320° -

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 6 cm H: 10.5 cm

Luminous flux	700lm
Lamp current	0.038A
Color rendering index	90
Wattage	7.5W
Energy consumption/1000h	8kWh

Options	Prod. no.
frosted | 2700K	**1005304**

LED A60
E27

NEW



IP 20 220° -

220-240V ~50/60Hz
Wattage: 9W
Material: plastic
Diameter: 6 cm H: 11 cm

Luminous flux	800lm
Lamp current	0.048A
Color rendering index	90
Wattage	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
white | 2700K	**1005301**

LED A60
E27

NEW



IP 20 220° -

220-240V ~50/60Hz
Wattage: 9W
Material: plastic
Diameter: 6 cm H: 11 cm

Luminous flux	1300lm
Lamp current	0.062A
Color rendering index	90
Wattage	9W
Energy consumption/1000h	9kWh

Options	Prod. no.
white | 2700K	**1005302**

LED A60
E27

NEW



320° -

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 6 cm H: 10.5 cm

Luminous flux	800lm
Lamp current	0.038A
Color rendering index	90
Wattage	7.5W
Energy consumption/1000h	8kWh

Options	Prod. no.
transparent | 2700K	**1005303**

LED T38
E27

NEW



C,L | IP 20 | 240° | 25 000 Hours -

220-240V ~50/60Hz
Wattage: 8W
Material: plastic
Diameter: 3.8 cm H: 11.6 cm

Luminous flux	880lm
Lamp current	0.035 A
Color rendering index	90
Wattage	8W
Energy consumption/1000h	8kWh

A E G

Options	Prod. no.	
white | 3000K	**1005289**	
white | 4000K	**1005290**	

LED T45
E27

NEW



C,L | IP 20 | 240° | 25 000 Hours -

220-240V ~50/60Hz
Wattage: 13.5W
Material: plastic
Diameter: 4.5 cm H: 14 cm

Luminous flux	1520lm
Lamp current	0.06A
Color rendering index	90
Wattage	13.5W
Energy consumption/1000h	14kWh

A E G

Options	Prod. no.	
white | 3000K	**1005307**	
white | 4000K	**1005308**	

LED ST64
E27

NEW



C,L | 320° | 15 000 Hours -

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 6.4 cm H: 14.5 cm

Luminous flux	700lm
Lamp current	0.038A
Color rendering index	90
Wattage	7.5W
Energy consumption/1000h	8kWh

A F G

Options	Prod. no.	
gold | 2500K	**1005265**	

LED G95
E27

NEW



C,L | 320° | 15 000 Hours -

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 9.5 cm H: 13.8 cm

Luminous flux	800lm
Lamp current	0.038A
Color rendering index	90
Wattage	7.5W
Energy consumption/1000h	8kWh

A E G

Options	Prod. no.	
transparent | 2700K	**1005309**	

LED A60
E27, mirrorhead, chrome

NEW



C,L | 180° | 15 000 Hours -

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 6 cm H: 10.5 cm

Luminous flux	720lm
Lamp current	0.038A
Color rendering index	90
Wattage	7.5W
Energy consumption/1000h	8kWh

A F G

Options	Prod. no.	
chrome | 2700K	**1005305**	

LED ST58
E27

NEW



C,L | 320° | 15 000 Hours -

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 5.8 cm H: 14.2 cm

Luminous flux	800lm
Lamp current	0.038A
Color rendering index	90
Wattage	7.5W
Energy consumption/1000h	8kWh

A F G

Options	Prod. no.	
transparent | 2700K	**1005268**	

LED G125
E27, mirrorhead, chrome

NEW



180° -

220-240V ~50/60Hz
Wattage: 7.5W
Material: glass
Diameter: 12.5 cm H: 17.8 cm

Luminous flux	720lm
Lamp current	0.038A
Color rendering index	90
Wattage	7.5W
Energy consumption/1000h	8kWh

Options	Prod. no.
chrome | 2700K	**1005306**



EASY TO INSTALL.

When we say “Easy to install”, we are referring to well-thought-out features for increased efficiency. For you, this means: time-saving installation for fast project completion, impeccable work and satisfied customers.

MOUNTABLE LAMP HEADS.
With our ENOLA® family, the lamp head can be separated from the mounting plate that is fixed to the wall. This way, after mounting using the integrated nib and establishing the electrical connection using the plug connection, both hands remain free to securely screw on the lights.



1003425 612






Practical nib




Secure assembly



Finally, fix it in place

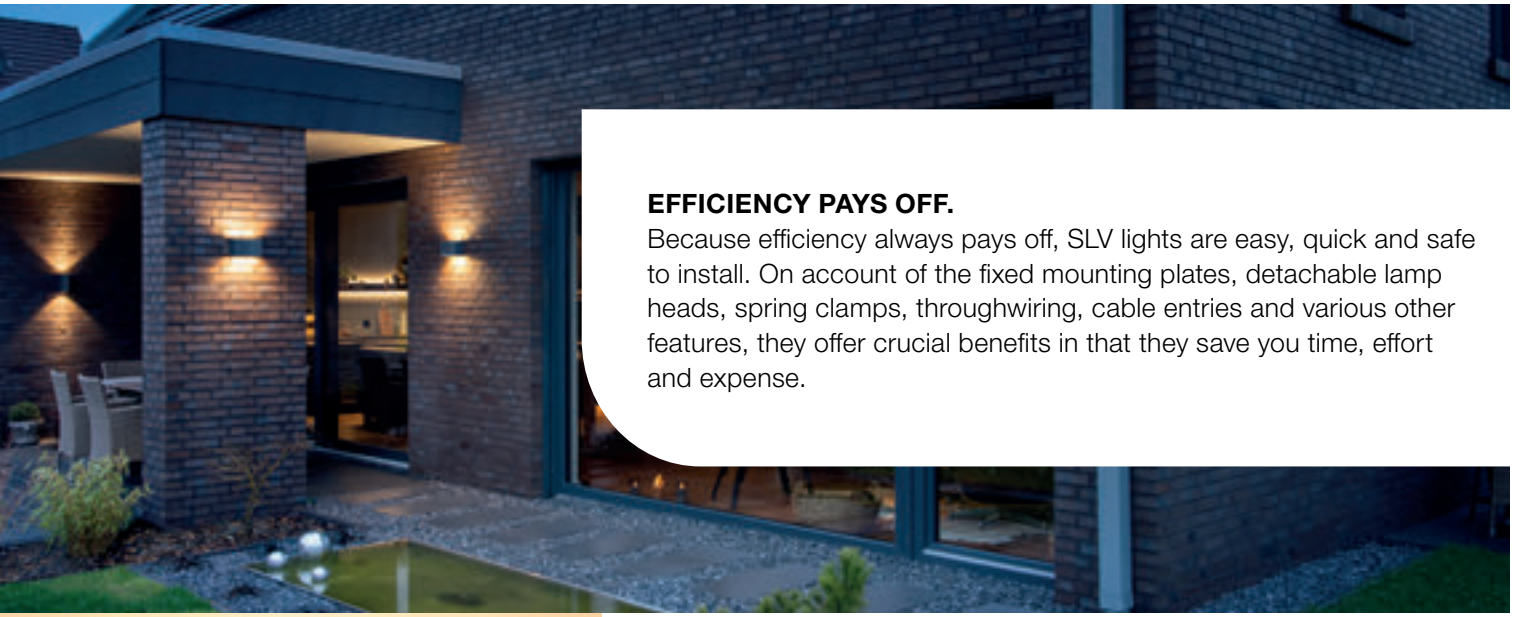


EFFICIENCY PAYS OFF.
Because efficiency always pays off, SLV lights are easy, quick and safe to install. On account of the fixed mounting plates, detachable lamp heads, spring clamps, throughwiring, cable entries and various other features, they offer crucial benefits in that they save you time, effort and expense.

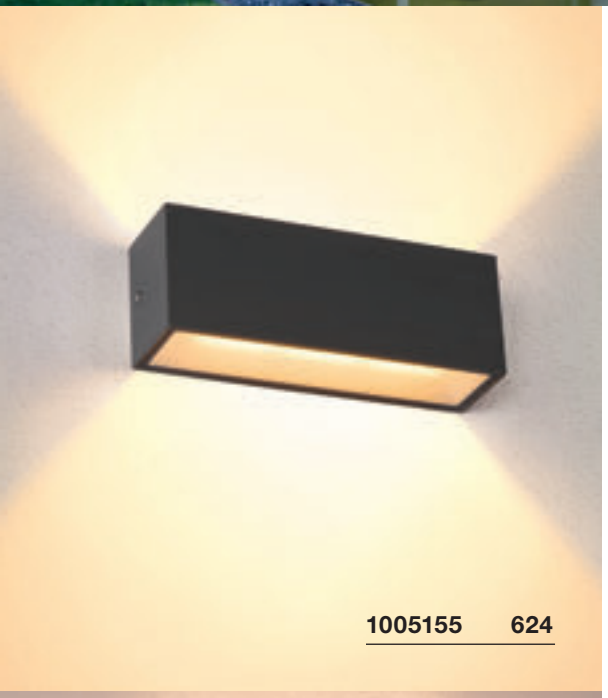

1005155 624


PRACTICAL SPRING CLAMPS.
The cube-shaped SITRA CUBE wall lights offer wonderful modern simplicity. This means they are also fast and simple to install: simply directly connect the connection cable (no tools required) and plug together the mounting plate coupling and light connector – done!



Connection of the power line



Simply plug together

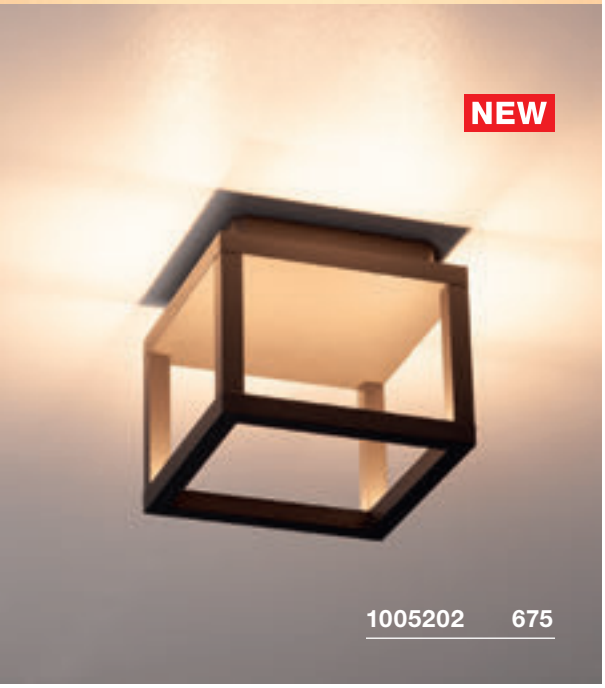

1005202 675


FEED-THROUGH WIRING
Our QUADRULO wall and ceiling lights show how simply through-wiring functions in practice. Two cable entries in a figure of eight configuration are provided in the light's baseplate. The spring clamp also has two connection options. This means that multiple lights can be quickly and simply installed at the same time.



Secure cable entry



Feed-through wiring

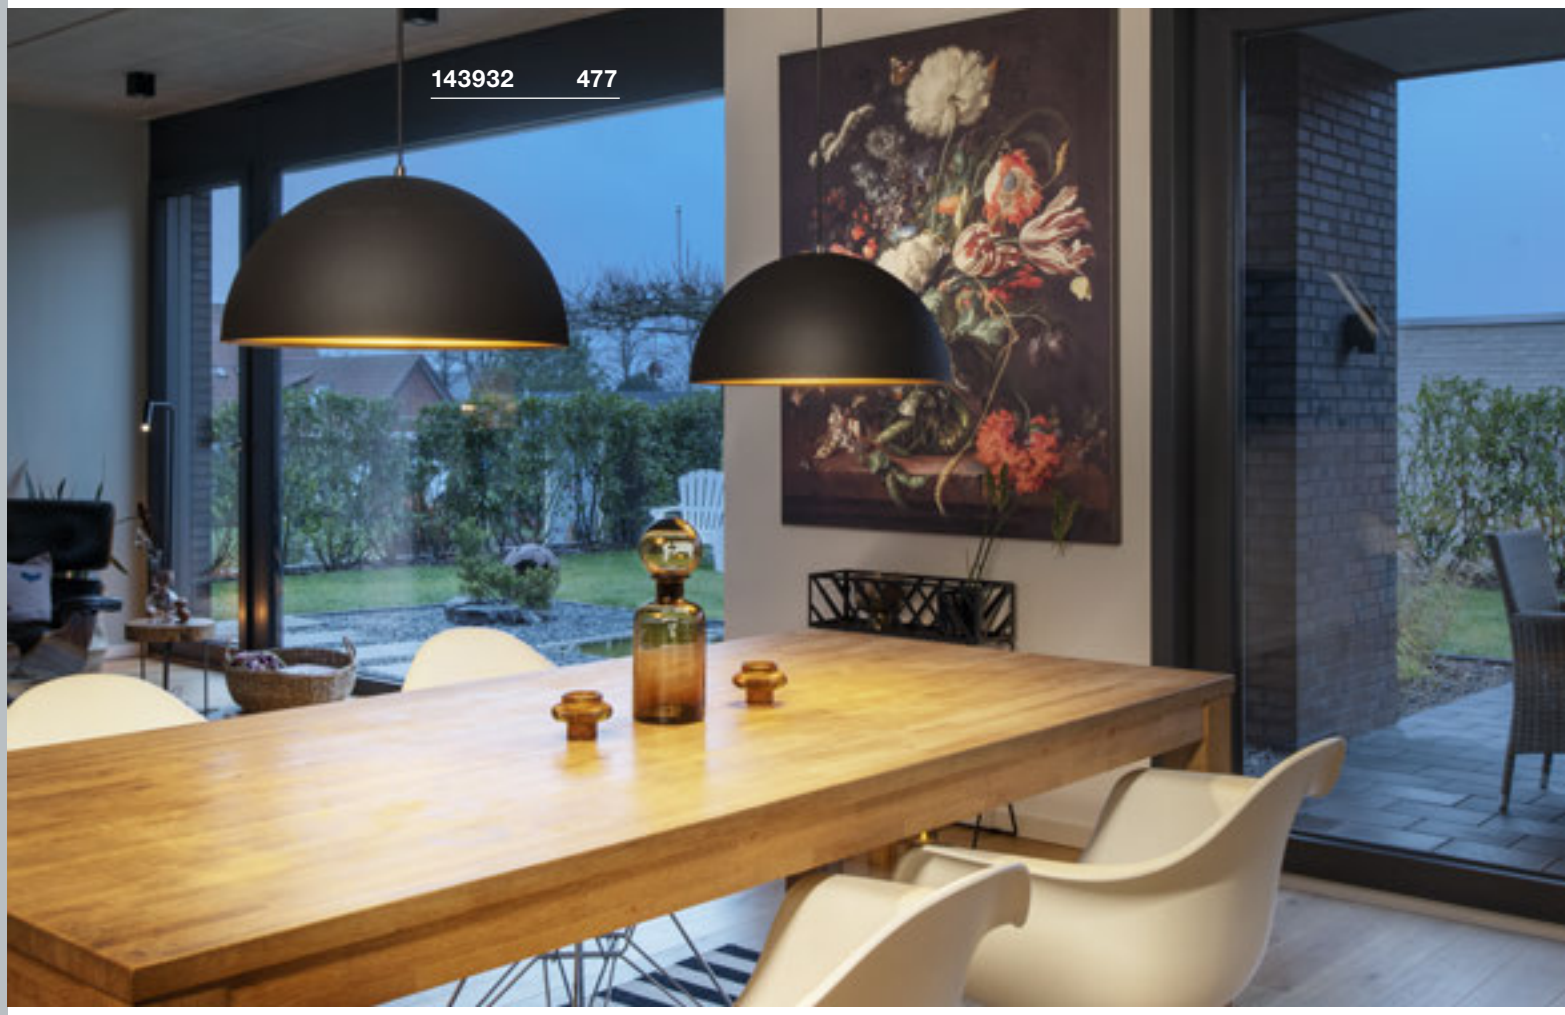

A FAMILY MATTER.

OUR SLV LUMINAIRE FAMILIES.

Particularly when visual continuity is desired, our luminaire families are perfectly suited for designing rooms and settings in a uniform way while still remaining versatile.

ABRIDOR

Paths/floor	Paths/floor	Wall	Wall
			
576	576	650	650

ACCANTO

Pendant	Wall	Ceiling
		
156	221	279

ALTRA DICE

Wall

274

Wall/ceiling

308

Single-circuit track

485

3-circuit track

453

ANELA

Pendant

164

Ceiling

287

APONI

Paths/floor

558

Paths/floor

558

Wall

658

ASTINA

Pendant

160

Wall

217

Ceiling

287

Wall

641

Wall

641

AVO

Wall/ceiling

315

Wall/ceiling

315

Wall/ceiling

315

Wall/ceiling

315

3-circuit track

459

Single-circuit track

479

BIG NAILS

Paths/floor

560

Wall

660

BIMA

3-circuit track

456

3-circuit track

456

Single-circuit track

482

Single-circuit track

482

Easytec® II

492


Easytec® II

492


BOOKAT

Wall

479

Wall
NEW

632

ENOLA

Pendant

161

Wall

611

Wall

611

Wall

611

Wall

612

Wall

612

Wall

612

Wall

615

Wall

615

Wall

615

Wall

616

Wall

616

Wall

616

Wall

671

Wall

671

Wall

671

Wall

672


Wall

672

Wall

672

ENOLA B

Pendant

161

Wall

217

Wall

217

Ceiling

281

Wall/ceiling

307

Wall/ceiling

307

Wall/ceiling

307

Single-circuit track

480

Single-circuit track

481

ENOLA C

Ceiling

281

Ceiling

281

3-circuit track

459

Single-circuit track

480

Paths/floor

580

ESKINA

Paths/floor

516

Wall

665

Wall

683

Wall

682

ESKINA FRAME

Paths/floor

512

Paths/floor

512

Paths/floor NEW

514

Paths/floor NEW

515

Wall

631

Wall

631

FENDA
MIX & MATCH

Table

104

Floor

104

Table

105

Floor

105

Floor

106

Pendant

154

Wall

218

Wall

219

Wall

219

Ceiling

276

Shades NEW VARIANT

107, 155

Shades NEW VARIANT

107, 155, 277

Shades

107, 154

Shades

154

Shades

218

Shades

218

FITU
MIX & MATCH

Floor

109

Floor

109

Pendant

150

Pendant

150

Wall

215

Wall

214

Wall/ceiling

214

Wall/ceiling

318

FORCHINI

Pendant

170

Pendant

170

Pendant

171

Pendant

171

3-circuit track

447

Single-circuit track

477

GLENOS

Pendant

143

Pendant

143

Wall

241

GLOO PURE

Paths/floor

545

Wall/ceiling

658

GRAPHITE

Paths/floor NEW

521

Paths/floor NEW

518

Wall NEW

627

Wall

627

Wall NEW

626

Wall NEW

626

HELIA

Pendant

158

Pendant

159

Pendant

158

Pendant

159

Pendant

157

Pendant

157

Wall/ceiling

299

Wall/ceiling

299

Recessed

400

3-circuit track

457

Single-circuit track

483

Paths/floor

581

Paths/floor

581

Paths/floor

828

Paths/floor

582

Spotlight

599

Spotlight

599

Wall

685

Wall

685

KALU

Wall/ceiling

302

Wall/ceiling

302

Wall/ceiling

302

Wall/ceiling

302

Wall/ceiling

304

Wall/ceiling

304

Wall/ceiling

304

Wall/ceiling

304

3-circuit track

454

3-circuit track

454

3-circuit track

454

Single-circuit track

484

Single-circuit track

484


Single-circuit track

484

KARPO

Table

108

Floor

108

Wall

224

Wall
NEW

224

Wall

225

Wall

225

Wall/ceiling

296

Wall/ceiling

296

Recessed

400

LIGHT EYE

Pendant

172

Pendant

172

3-circuit track

446

3-circuit track

446

Single-circuit track

476

Single-circuit track

476

Easytec® II

495

Easytec® II

495

LISENNE

Pendant

164

Wall

213

Paths/floor

553

Paths/floor

553

L-LINE

Wall

242

Wall

242

Paths/floor

538

Paths/floor

538

Paths/floor

538, 539

Wall

656

LOGS

Wall


196

Wall

196

Wall

197

Wall

197

Paths/floor

517

Paths/floor

517

Wall

652

MAGANDA

Table



113

Wall



232

MANA

Wall



185

Wall



185

Wall



185

Wall



185

Wall



186

Shade



186

Shade



186

Wall

187

Wall




187

Shade



187

Shade



187

Wall



655

MECANICA

Table



111

Floor



111

MEDO LED

Pendant/ceiling



133, 257

Pendant/ceiling



132, 257

Pendant/ceiling



130, 254

Pendant/ceiling



131, 255

Pendant/ceiling



131, 255

Pendant/ceiling



131, 255

Pendant/ceiling



134, 258

Pendant/ceiling



134, 258

Pendant/ceiling



134, 258

Pendant/ceiling




135, 259

Pendant/ceiling



136, 260

Pendant/ceiling



136, 260

Pendant/ceiling



136, 260

Pendant/ceiling



137, 261

Pendant/ceiling



132, 256

Pendant/ceiling

138, 261

Pendant



128

Pendant



128

Pendant



129

Recessed



414, 415

Recessed



416, 417

MOLAT

Pendant	Paths/floor	Wall	Ceiling
			
552	552	657	677

MYRA


Paths/floor	Wall	Wall	Wall/ceiling	Wall/ceiling
				
583	644	665	666	686


NAUTILUS

Spike	Spike	Spike	Spike
			
593	593	594	597

Spotlight	Spotlight	Spotlight	Wall/ceiling
			
595	595	595	666

NOBLO

Wall/ceiling	Wall/ceiling	Wall/ceiling	3-circuit track
			
300	300	300	458

Single-circuit track	Single-circuit track	Low-voltage cable system
		
470	483	506

NUMINOS®

Recessed

029

Recessed

031

Recessed

033

Recessed

035

Recessed

037

Recessed NEW VARIANT

039

Recessed NEW VARIANT

041

Recessed

043

Recessed

045

Recessed

047

Recessed NEW

049

Recessed NEW

051

Recessed NEW

053

Recessed NEW

055

Recessed NEW

057

3-circuit track

063

3-circuit track

065

3-circuit track

067

3-circuit track NEW VARIANT

069

3-circuit track NEW

071

Wall/ceiling

073

Ceiling

075

Ceiling

077

Ceiling NEW VARIANT

079

Ceiling

081

Ceiling

083

Ceiling

085

Ceiling NEW VARIANT

087

Pendant

089

Pendant

091

Pendant

093

Pendant NEW VARIANT

095

OCCULDAS
Design:
David Morgan

Ceiling

273

Ceiling

273

Recessed

397

Recessed

397

OCULUS

Pendant

147

Wall

188

Ceiling

280

Wall/ceiling

296

Recessed

369

ONE

Pendant NEW

118

Pendant NEW

118

Pendant

119, 770

Pendant

120, 770

Pendant

120, 770

Pendant

121

Pendant NEW VARIANT

121

Pendant

122

Pendant

123

Pendant NEW VARIANT

123

Wall

294, 771

Wall

294, 771

3-circuit track

443, 772

OVALISK

Paths/floor

542

Wall

637

Wall

637

Ceiling

676

PARA CONE

Pendant NEW

166

Pendant

167

3-circuit track NEW

444

3-circuit track NEW

444

3-circuit track

445

3-circuit track

445

Single-circuit track NEW

472

Single-circuit track NEW

472

Single-circuit track

474

Single-circuit track

474

PLASTRA

Pendant

175

Wall

190

Wall

190

Wall

191

Wall

191

Wall

193

Wall

193

Wall

193

Wall

194

Wall

194

Wall

194

Wall

223

Ceiling

282

Ceiling

282

Ceiling

282

Ceiling

283

Recessed

402

Recessed

403

P-LIGHT

Wall/ceiling

340

Wall/ceiling

340

Wall/ceiling

341

Recessed

420

PURI

Wall/ceiling

312

Wall/ceiling

312

Wall/ceiling

312

Wall/ceiling

312

3-circuit track

453

3-circuit track

453

Single-circuit track

470

Single-circuit track

478

Single-circuit track

478

Q-LINE

Pendant

144, 145

Pendant

144, 145

Pendant

145, 775

Wall

243

Ceiling

264

Ceiling

265

QUADRASS

Pendant

165

Wall

212

Wall

212

QUADRASYL

Paths/floor

577

Wall

662

QUADRULO

Paths/floor NEW

522

Wall NEW

629

Wall

629

Ceiling

675

RASCALI

Paths/floor

579

Wall

661

ROTOBALL

Pendant

174

Pendant

174

Pendant

174

Ceiling

289

Ceiling

289

Floor

546

Floor

546

Floor

546

ROX

Paths/floor

561

Paths/floor

561

Paths/floor

561

Wall

645

Wall

645

Ceiling

679


Ceiling

679

RUSTY

Paths/floor

524

Paths/floor

524, 525

Paths/floor

527

Paths/floor

527

Paths/floor

528

Paths/floor

529

Paths/floor

530

Paths/floor

530

Paths/floor

532

Paths/floor

533

Wall

636

Wall

636

SENSOR

Wall/ceiling — 319

Wall/ceiling — 319

Wall/ceiling — 319


Wall/ceiling — 320

Wall/ceiling — 320

Wall/ceiling — 320


Recessed — 389

Recessed — 389

Recessed — 389

Recessed — 390

Recessed — 390

Recessed — 390

SIGHT LED

Wall/ceiling — 337


Wall/ceiling — 337


3-circuit track — 440 NEW


3-circuit track — 441, 773


3-circuit track — 448


3-circuit track — 450 NEW

SITRA

Paths/floor — 583


Spike — 602


Spike — 603


Wall — 622


Wall — 622


Wall — 624 NEW


Wall — 624 NEW


Wall — 624 NEW


Wall — 644


Wall — 644


Wall — 661


Ceiling — 679


Wall/ceiling — 684


SLOTS

Paths/floor — 570


Paths/floor — 571


Wall — 647


SQUARE

Paths/floor — 568


Paths/floor — 568


Paths/floor — 568


Wall — 660


Wall — 662


SUPROS

Pendant

148

Pendant

148, 149

Wall

189

Ceiling

270

Ceiling

271

Recessed

382

Recessed

383

Recessed

384, 385

Recessed

386, 387

THEO

Wall

216

Paths/floor

540

Paths/floor

540

Paths/floor

541

Spike

601

Wall

618

Wall

619

Wall

619

Wall

619

Wall


620

Wall

621

Wall

621

Ceiling

674

Ceiling

674

Ceiling

684

TONGA

Pendant

165

Single-circuit track

475

Easytec® II

494

WORKLIGHT

Table

NEW
100

Floor

NEW
101

Pendant

NEW
146, 774


1005394 100
1005392 100

NUMINOS®
DOWNLIGHTS AND SPOTLIGHTS

can be found on the following pages:

Recessed lights ..... 28 - 57
3-phase track systems ..... 62 - 71
Wall and ceiling lights ..... 72 - 73
Ceiling lights ..... 72 - 86
Pendant lights ..... 88 - 95

Or simply configure your system online at: **www.numinos.slv.com**







1004250 91



1005737 69



1005769 87

Please note: The 7-digit product numbers can be found from page 843 onwards.

111000

111262 409
111292 408
111360 352
111361 353
111362 354
111380 355
111381 355
111382 355
111710 352
111711 352
111716 352
111720 352
111721 352
111726 352
111850 804
111861 804

112000

112161 394
112162 394
112165 394
112221 394
112222 394
112225 394
112242 404
112682 393
112692 393
112702 393
112720 408
112721 408
112780 408, 409, 410
112781 408, 409, 410
112910 372
112911 372

113000

113140 370
113141 370
113150 371
113151 371
113160 372
113161 372
113170 374
113171 374
113262 409
113292 408
113440 351
113441 351
113446 351
113450 351
113451 351
113456 351
113490 352
113491 353
113492 354
113510 352
113511 353
113512 354
113540 355
113541 355
113550 355
113830 355
113840 355
113841 355
113870 362
113871 362
113876 362
113880 362
113881 362
113886 362
113890 364
113891 364
113896 364
113900 362
113901 362
113906 362
113910 363
113911 363
113916 363
113920 365
113921 365
113926 365
113930 269
113931 269
113940 269
113941 269
113951 357
113956 357
113961 357
113966 357
113970 356
113971 356
113976 356

114000

114102 148, 149, 270, 384, 385, 386, 387
114104 148, 149, 270, 384, 385, 386, 387
114220 366
114221 366
114230 366
114231 366
114240 366
114241 366
114250 367
114251 367
114260 368
114261 368
114270 368
114271 368
114280 369
114281 369
114290 369
114291 369
114380 360
114381 360
114386 360
114390 361
114391 361
114396 361
114400 356
114401 356
114406 356
114420 421, 707
114421 421, 707
114426 421, 707
114430 421, 707
114431 421, 707
114436 421, 707
114440 422, 708
114441 422, 708
114450 422, 708
114451 422, 708
114460 423, 708
114461 423, 708
114480 399
114481 399
114490 399
114491 399

115000

115510 376
115511 376
115520 376
115521 376
115530 376
115531 376
115540 378
115541 378
115550 378
115551 378
115700 379
115701 379
115710 379
115711 379
115720 379
115721 379
115730 380
115731 380
115740 380
115741 380

116000

116302 148, 189, 271, 382, 383
116304 148, 189, 271, 382, 383
116310 382
116311 382
116320 383
116321 383
116330 271
116331 271
116340 189
116341 189

117000
117100 ... 275
117101 ... 275
117110 ... 275
117111 ... 275
117311 ... 397
117321 ... 273
117331 ... 397
117351 ... 273

132000
132020 ... 308
132021 ... 308
132024 ... 308
132600 ... 151, 473
132601 ... 151, 473
132605 ... 151, 473
132610 ... 151, 473
132611 ... 151, 473
132615 ... 151, 473
132620 ... 151
132621 ... 151
132625 ... 151
132660 ... 154
132661 ... 154
132662 ... 154
132670 ... 803
132671 ... 803
132680 ... 803
132681 ... 803
132690 ... 150
132691 ... 150
132835 ... 551

133000
133019 ... 167
133060 ... 167
133120 ... 148
133121 ... 148
133310 ... 169
133320 ... 169
133444 ... 165
133481 ... 172
133482 ... 172
133489 ... 172
133490 ... 172
133491 ... 172
133840 ... 128
133841 ... 128
133850 ... 128
133851 ... 128

135000
135020 ... 133, 257
135021 ... 133, 257
135024 ... 133, 257
135070 ... 133, 257
135071 ... 133, 257
135074 ... 133, 257
135120 ... 131, 255
135121 ... 131, 255
135124 ... 131, 255
135170 ... 131, 255
135171 ... 131, 255
135174 ... 131, 255
135250 ... 135, 255, 295, 785
135251 ... 135, 255, 295, 785
135254 ... 135, 255, 295, 785

138000
138981 ... 501, 793
138982 ... 501, 793
138991 ... 501, 793
138992 ... 501, 793

139000
139004 ... 500
139006 ... 500
139024 ... 500
139026 ... 500
139030 ... 500
139031 ... 500
139040 ... 500
139041 ... 500
139050 ... 500
139051 ... 500
139060 ... 500
139061 ... 500
139070 ... 502
139071 ... 502
139072 ... 502
139080 ... 502
139081 ... 502
139082 ... 502
139090 ... 503
139091 ... 503
139092 ... 503
139100 ... 503
139101 ... 503
139102 ... 503
139110 ... 504
139111 ... 504
139112 ... 504
139120 ... 506
139121 ... 506
139122 ... 506
139130 ... 503
139131 ... 503
139132 ... 503

143000
143010 ... 465
143011 ... 465
143012 ... 465
143020 ... 465
143021 ... 465
143022 ... 465
143030 ... 467
143031 ... 467
143032 ... 467
143040 ... 467
143041 ... 467
143042 ... 467
143050 ... 467
143051 ... 467
143052 ... 467
143060 ... 467
143061 ... 467
143062 ... 467
143070 ... 467
143071 ... 467
143072 ... 467
143080 ... 467
143081 ... 467
143082 ... 467
143090 ... 467
143091 ... 467
143092 ... 467
143100 ... 467
143101 ... 467
143102 ... 467
143110 ... 467
143111 ... 467
143112 ... 467
143120 ... 151, 467, 469, 473
143121 ... 151, 467, 469, 473
143124 ... 151, 467, 469, 473
143130 ... 467
143131 ... 467
143132 ... 467
143151 ... 467
143152 ... 467
143160 ... 467
143161 ... 467
143162 ... 467
143169 ... 467
143170 ... 467, 469
143171 ... 467, 469
143172 ... 467, 469
143190 ... 470
143191 ... 470
143194 ... 470
143221 ... 469
143230 ... 469
143231 ... 469
143241 ... 469
143251 ... 469
143261 ... 469
143281 ... 469
143350 ... 485
143351 ... 485
143354 ... 485
143380 ... 467
143381 ... 467
143382 ... 467
143390 ... 478
143391 ... 478
143392 ... 478
143430 ... 482
143431 ... 482
143432 ... 482
143440 ... 482
143441 ... 482

143442 482
143450 478
143451 478
143454 478
143540 484
143541 484
143544 484
143580 483
143581 483
143594 475
143620 476
143621 476
143731 484
143811 485
143930 477
143932 477
143941 480
143951 480
143960 481
143961 481
143964 481
143990 474
143991 474

144000
144010 476
144011 476
144019 476
144200 479
144201 479
144204 479

145000
145100 435
145102 435
145200 435
145202 435
145300 435
145302 435
145510 437
145514 437
145520 437
145524 437
145530 437
145534 437
145551 439
145560 437
145564 437
145580 437
145584 437
145590 437
145594 437
145600 437
145604 437
145630 437
145634 437
145640 437
145644 437
145660 437
145664 437
145670 437
145674 437
145680 437
145684 437
145690 437
145694 437
145700 437
145710 437
145714 437
145720 437
145724 437
145730 437
145734 437
145830 437
145834 437
145990 151, 437, 473
145994 151, 437, 473

146000
146000 110
146010 110
146332 245
146472 245
146682 229
146692 228

147000
147301 304
147306 304
147311 304
147316 304
147321 304
147326 304
147360 312
147361 312
147370 312
147371 312
147380 312
147381 312
147411 311
147412 311
147414 311
147441 316
147442 316
147443 316
147444 316
147529 211
147550 308
147551 308
147559 308

148000
148001 282
148002 283
148004 282
148005 282
148010 191
148012 194
148013 194
148016 194
148018 190
148019 223
148060 193
148070 402
148071 403
148091 193
148540 230

149000
149381 161
149387 161
149388 161
149452 222
149471 205
149511 205
149762 234
149772 234

151000
151040 172, 228, 476
151041 172, 245, 476
151049 172, 245, 476
151271 201
151275 201
151282 237
151311 200
151315 200
151320 196
151321 196
151325 196
151410 202
151411 202
151416 202
151450 202
151451 202
151456 202
151511 274
151514 274
151531 274, 308
151534 274, 308
151591 211
151710 203
151711 203
151740 203
151741 203
151781 207
151786 207
151791 207
151796 207
151800 217
151801 217
151803 217
151804 217
151810 281
151811 281
151813 281
151830 307
151831 307
151840 217, 281, 307
151850 161

151851 ... 161
151853 ... 161
151950 ... 412
151952 ... 412
151960 ... 412
151962 ... 412

152000
152010 ... 307
152011 ... 307
152013 ... 307
152020 ... 307
152021 ... 307
152023 ... 307
152101 ... 281
152230 ... 456
152231 ... 456
152232 ... 456
152240 ... 456
152241 ... 456
152242 ... 456
152320 ... 453
152321 ... 453
152330 ... 296
152331 ... 296
152340 ... 225
152341 ... 225
152360 ... 158
152361 ... 158
152370 ... 159
152371 ... 159
152380 ... 400
152381 ... 400
152430 ... 459
152431 ... 459
152600 ... 454
152601 ... 454
152610 ... 454
152611 ... 454
152640 ... 459
152641 ... 459
152750 ... 451
152751 ... 451
152780 ... 451
152781 ... 451
152960 ... 457
152961 ... 457

153000
153112 ... 446
153130 ... 447
153140 ... 445
153141 ... 445
153420 ... 452
153421 ... 452
153560 ... 453
153561 ... 453
153564 ... 453
153580 ... 454
153581 ... 454
153850 ... 452
153851 ... 452

155000
155156 ... 288
155180 ... 332
155236 ... 332
155373 ... 278
155490 ... 105
155492 ... 105
155530 ... 170
155540 ... 105
155550 ... 276
155551 ... 276
155552 ... 276
155582 ... 107, 155, 277
155583 ... 107, 155, 277
155592 ... 107, 155, 277
155714 ... 164
155752 ... 213
155780 ... 104
155785 ... 104
155790 ... 104
155795 ... 104
155870 ... 156
155871 ... 156
155910 ... 171
155930 ... 171

156000
156050 ... 278
156051 ... 278
156100 ... 155, 277
156111 ... 107, 155, 277
156113 ... 107, 155, 277
156122 ... 107, 155, 277
156141 ... 107, 155
156143 ... 107, 155
156152 ... 107, 155
156500 ... 299
156501 ... 299
156510 ... 299
156511 ... 299
156530 ... 400
156531 ... 400

158000
158400 ... 158
158401 ... 158
158410 ... 159
158411 ... 159

161000
161271 ... 398
161291 ... 398
161461 ... 285

165000
165358 ... 179
165359 ... 179
165390 ... 174
165400 ... 174
165410 ... 174

175000
175060 ... 433
175080 ... 433
175160 ... 433
175180 ... 433
175190 ... 433
175210 ... 433

181000
181530 ... 501
181531 ... 501
181532 ... 501

184000
184000 ... 491
184002 ... 491
184004 ... 491
184010 ... 491
184012 ... 491
184020 ... 491
184022 ... 491
184030 ... 491
184032 ... 491
184060 ... 491
184062 ... 491
184071 ... 492
184140 ... 491
184142 ... 491
184170 ... 491
184172 ... 491
184290 ... 491
184292 ... 491
184300 ... 491
184302 ... 491
184330 ... 491
184332 ... 491
184440 ... 492
184450 ... 492
184452 ... 492
184530 ... 494
184534 ... 494
184590 ... 495
184630 ... 494
184634 ... 494

185000
185580 ... 495
185590 ... 495

186000
186300 ... 501
186301 ... 501
186302 ... 501
186310 ... 501
186311 ... 501
186312 ... 501

186330 501
186331 501
186332 501
186340 501
186341 501
186342 501
186350 501
186351 501
186352 501
186360 501
186361 501
186362 501
186640 501
186641 501
186642 501

210000
210060 803
210061 803
210064 803

220000
220000 804

227000
227140 792
227160 792
227176 661
227194 647
227195 647
227219 546
227220 546
227221 546
227410 593
227418 593
227462 724
227504 601
227505 601
227507 601
227600 730
227604 730
227680 731
227684 731
227922 559, 560

228000
228100 559
228110 559
228130 559
228332 724
228342 724
228370 722
228412 716
228430 721
228434 721
228545 580
228555 599
228712 542, 557, 582, 583
228722 542, 557
228725 805
228726 561, 577, 805
228730 805
228752 582, 583
228753 550, 570, 571
228754 517, 521
228771 641
228775 641
228776 641
228925 557
228935 557
228945 557
228965 555

229000
229020 533
229021 533
229022 532, 533
229050 562
229054 562
229057 562
229059 562
229062 703
229071 691
229072 691
229075 691
229081 691
229085 691
229090 595
229110 702
229162 560
229172 560
229182 660
229200 722
229230 722
229234 722
229320 721
229324 721
229374 721
229381 718
229383 718
229410 524
229411 525
229420 529
229421 529
229422 527, 528, 529, 534, 553, 530
229430 530
229431 530
229432 530
229524 620
229525 620
229531 618
229532 618
229535 618
229551 674
229554 674
229555 674
229564 621
229565 621
229574 619
229575 619
229664 655
229665 655
229702 703
229740 594
229741 595
229931 692
229935 692
229961 688
229965 688
229971 688
229975 688

230000
230030 639
230034 639
230060 516, 552, 565, 583
230061 565
230063 565
230066 565
230069 565
230084 630
230085 630
230090 527
230355 661
230365 644
230435 551
230465 550
230655 630
230657 630

231000
231010 638
231012 638
231015 638
231035 597
231072 591
231205 627
231215 521
231225 521
231230 517, 521, 524, 525
231231 577
231233 535
231234 545, 561, 568
231235 536, 537
231305 577
231315 662
231351 642
231355 642
231370 536
231371 536
231410 534
231411 534
231420 535
231440 537
231455 571
231457 571
231465 659
231475 566
231505 583
231515 684
231525 602
231535 603
231541 679

231545 679
231585 659
231595 567
231805 647
231807 647
231815 570
231817 570

232000
232045 657
232055 677
232065 548
232075 549
232085 549
232095 548
232101 652
232104 652
232105 652
232115 517
232119 517
232125 517
232135 574
232145 574
232155 572
232165 572
232175 573
232185 573
232195 572, 573
232285 662
232294 577
232295 577
232431 622
232435 633
232441 634
232445 634
232461 633
232465 633
232471 634
232475 634
232485 652
232491 652
232495 652
232497 652
232531 622
232535 622
232537 622
232905 651
232915 651

233000
233094 686
233095 686
233104 666
233105 666
233114 644
233115 644
233134 665
233135 665
233144 583
233145 582, 583
233164 583
233165 582, 583
233184 583
233185 583
233215 644, 665, 666
233245 685
233255 685
233275 582
233285 582
233302 641
233407 532
233417 532
233427 528
233437 528
233447 524
233457 524
233500 718
233540 723
233570 598
233571 598
233580 598
233582 598
233601 701
233605 701
233611 701
233615 701
233621 701
233625 701
233635 700
233639 700
233650 702
233660 702
233792 724

234000
234505 619
234515 619
234525 621
234535 674

240000
240000 340
240002 340
240004 341
240006 420
240007 340, 341
240008 340, 341
240009 341
240010 341
240020 340
240021 340
240022 341
240024 420

461000
461060 792
461157 792

464000
464031 801
464107 801
464108 800
464140 412, 798
464141 157, 375
464142 798
464144 798
464147 349
464200 801
464804 799

470000
470500 796
470505 792
470548 796
470549 796

560000
560231 811
560232 811
560233 811
560234 811

631000
631337 339
631339 339
631347 339
631349 339
900011 595, 598

955000
955135 804

961000
961034 804
961037 803
961250 803
961270 803
961271 803
961276 803

1000100
1000127 303
1000128 303
1000129 303
1000130 303
1000131 303
1000132 303
1000135 303
1000136 303

1000300
1000327 216
1000329 216
1000330 216
1000331 618
1000332 679
1000333 645
1000334 645
1000335 662
1000336 660
1000339 679
1000340 647
1000342 647

1000343 568
1000344 568
1000345 568
1000346 568
1000384 724
1000398 548, 552

1000400
1000422 199
1000423 199
1000426 298
1000427 298
1000443 288
1000445 288
1000457 735
1000458 735
1000459 735
1000460 735
1000461 735
1000462 735
1000463 735
1000464 735
1000465 735
1000466 736, 739
1000467 736, 739
1000468 736, 739
1000469 736, 739
1000470 736
1000471 736
1000472 737
1000473 737
1000474 737
1000475 737
1000476 737
1000477 737
1000478 737
1000479 737
1000480 737
1000481 737
1000482 737
1000483 737
1000484 737
1000485 737
1000486 737
1000487 736
1000489 736
1000496 742
1000497 742
1000498 742

1000500
1000505 741
1000506 741
1000507 741
1000514 741
1000515 741
1000516 741
1000523 741
1000524 741
1000525 741
1000532 741
1000533 741
1000534 741
1000535 745
1000536 745
1000537 745
1000540 743
1000546 743
1000549 743
1000552 743
1000555 743
1000556 744
1000557 744
1000558 744
1000559 744
1000560 744
1000561 744
1000562 744
1000563 744
1000564 744
1000565 744
1000566 744
1000567 744
1000568 744
1000569 744
1000570 744
1000571 743
1000574 408
1000575 408
1000576 409
1000577 409
1000579 107, 155, 277
1000580 107, 155, 277

1000600
1000613 186
1000614 187
1000615 187
1000616 186
1000618 186
1000619 186
1000621 187
1000623 187
1000624 187
1000631 281
1000634 201
1000635 201
1000636 201
1000637 201
1000638 196
1000639 196
1000640 196
1000655 724
1000656 457
1000657 457
1000665 553
1000666 553
1000668 243
1000669 243
1000670 243
1000681 658
1000682 558
1000683 558
1000685 264
1000686 264
1000688 264
1000689 264
1000691 265
1000692 265
1000694 265
1000695 265

1000700
1000702 304
1000703 304
1000704 304
1000707 446
1000708 446
1000709 446
1000711 480
1000712 480
1000713 476
1000714 395
1000715 395
1000716 395
1000717 395
1000718 395
1000719 395
1000720 395
1000721 395
1000725 132, 256
1000726 132, 256
1000727 132, 256
1000729 217
1000730 217
1000731 217
1000735 599
1000736 581, 599
1000746 333
1000748 333
1000763 106
1000764 107, 154
1000773 154
1000777 238
1000780 239
1000783 262
1000784 262
1000785 262
1000786 262
1000797 661
1000799 579

1000800
1000801 579
1000807 287
1000808 287
1000809 164, 287
1000810 164, 287
1000811 164, 287
1000812 164, 287
1000813 164
1000820 657
1000821 552

1000822 ... 552
1000823 ... 677
1000824 ... 186
1000825 ... 187
1000827 ... 179
1000833 ... 407, 709
1000855 ... 130, 254
1000856 ... 130, 254
1000857 ... 130, 254
1000864 ... 131, 255
1000865 ... 131, 255
1000866 ... 131, 255
1000880 ... 665
1000881 ... 665
1000886 ... 315
1000887 ... 315
1000889 ... 315
1000890 ... 315
1000892 ... 315
1000893 ... 315
1000895 ... 315
1000896 ... 315

1000900
1000909 ... 804
1000910 ... 216
1000911 ... 216
1000914 ... 370
1000915 ... 370
1000917 ... 370
1000918 ... 179
1000926 ... 144
1000927 ... 144
1000929 ... 144
1000930 ... 144
1000932 ... 145
1000933 ... 145
1000935 ... 145
1000936 ... 145
1000957 ... 155, 277

1001000
1001015 ... 406, 710
1001016 ... 406, 710
1001017 ... 406, 710
1001018 ... 406, 710
1001019 ... 336
1001020 ... 336

1001100
1001155 ... 401
1001156 ... 401
1001165 ... 405, 713
1001166 ... 405, 713
1001167 ... 405, 713
1001168 ... 405, 713
1001169 ... 405, 713
1001170 ... 405, 713
1001171 ... 405, 713
1001172 ... 405, 713

1001200
1001250 ... 418, 784
1001251 ... 418, 784
1001252 ... 728
1001253 ... 728
1001254 ... 728
1001255 ... 728
1001256 ... 728
1001262 ... 728
1001263 ... 728
1001264 ... 407
1001267 ... 799
1001272 ... 218
1001273 ... 218
1001274 ... 218
1001275 ... 218
1001276 ... 218
1001283 ... 337
1001284 ... 337
1001285 ... 337
1001286 ... 337
1001287 ... 337
1001288 ... 337
1001299 ... 242

1001300
1001300 ... 242
1001301 ... 242
1001303 ... 242
1001304 ... 242
1001305 ... 242
1001309 ... 145, 775
1001310 ... 145, 775
1001314 ... 692
1001315 ... 692
1001317 ... 692
1001359 ... 728
1001380 ... 433
1001382 ... 433
1001390 ... 433
1001392 ... 433
1001395 ... 433

1001400
1001400 ... 143
1001403 ... 143
1001406 ... 143
1001409 ... 143
1001419 ... 459
1001420 ... 459
1001449 ... 219
1001450 ... 219
1001451 ... 218
1001452 ... 218
1001453 ... 218
1001454 ... 218
1001460 ... 108
1001461 ... 108
1001462 ... 108
1001463 ... 108
1001468 ... 231
1001472 ... 231
1001488 ... 561
1001489 ... 561
1001490 ... 561
1001494 ... 561
1001495 ... 296
1001496 ... 296

1001500
1001505 ... 262
1001506 ... 262
1001508 ... 262
1001509 ... 262
1001510 ... 435
1001511 ... 435
1001512 ... 435
1001513 ... 437
1001514 ... 437
1001515 ... 437
1001516 ... 437
1001517 ... 437
1001518 ... 437
1001519 ... 437
1001520 ... 437
1001521 ... 437
1001522 ... 437
1001523 ... 437
1001524 ... 437
1001525 ... 437
1001526 ... 437
1001527 ... 437
1001528 ... 437
1001529 ... 437
1001530 ... 437
1001531 ... 439
1001532 ... 439
1001533 ... 439
1001534 ... 439
1001536 ... 439
1001537 ... 439
1001538 ... 439
1001539 ... 439
1001542 ... 151, 437, 439, 473
1001574 ... 811
1001575 ... 811

1001600
1001676 ... 109
1001691 ... 179
1001692 ... 179

1001700
1001701 ... 170

1001800
1001818 ... 151, 473
1001819 ... 151, 473
1001820 ... 151
1001821 ... 151

1001823 ... 527
1001824 ... 527
1001855 ... 690
1001856 ... 690
1001861 ... 485
1001862 ... 483
1001863 ... 483
1001864 ... 483
1001865 ... 458
1001866 ... 458
1001868 ... 478
1001869 ... 478
1001870 ... 478
1001871 ... 453
1001872 ... 453
1001877 ... 134, 258
1001878 ... 135, 259
1001879 ... 135, 259
1001880 ... 135, 259
1001881 ... 134, 258
1001882 ... 134, 258
1001883 ... 134, 258
1001884 ... 134, 258
1001885 ... 134, 258
1001886 ... 134, 258
1001887 ... 134, 258
1001888 ... 134, 258
1001889 ... 136, 260
1001890 ... 137, 261
1001891 ... 137, 261
1001892 ... 137, 261
1001893 ... 136, 260
1001894 ... 136, 260
1001895 ... 136, 260
1001896 ... 136, 260
1001897 ... 136, 260
1001898 ... 136, 260
1001899 ... 136, 260

1001900
1001900 ... 136, 260
1001901 ... 414
1001902 ... 415
1001903 ... 415
1001904 ... 415
1001905 ... 416
1001906 ... 416
1001907 ... 416
1001908 ... 417
1001930 ... 404, 711
1001931 ... 404, 711
1001937 ... 597
1001939 ... 285
1001950 ... 135, 255, 295, 785
1001951 ... 135, 255, 295, 785
1001952 ... 135, 255, 295, 785
1001962 ... 595
1001963 ... 595
1001964 ... 593
1001965 ... 593
1001968 ... 474
1001969 ... 642
1001970 ... 642
1001978 ... 361
1001980 ... 350
1001981 ... 350
1001982 ... 350
1001989 ... 361
1001990 ... 361
1001991 ... 361
1001992 ... 361
1001993 ... 361
1001994 ... 350
1001995 ... 350
1001996 ... 350
1001999 ... 545

1002000
1002000 ... 545
1002001 ... 545
1002002 ... 658
1002003 ... 269
1002004 ... 266
1002005 ... 266
1002006 ... 266
1002008 ... 269
1002010 ... 266
1002011 ... 266
1002012 ... 266
1002013 ... 266
1002015 ... 266
1002018 ... 644
1002020 ... 326
1002021 ... 326
1002022 ... 326
1002023 ... 304
1002024 ... 304
1002025 ... 304
1002029 ... 312
1002030 ... 312
1002032 ... 622
1002033 ... 622
1002034 ... 622
1002035 ... 686
1002045 ... 173
1002046 ... 173
1002047 ... 175
1002051 ... 289
1002052 ... 289
1002069 ... 639
1002070 ... 639
1002075 ... 329
1002076 ... 329
1002077 ... 329
1002098 ... 420, 706
1002099 ... 420, 706

1002100
1002100 ... 420, 706
1002101 ... 420, 706
1002102 ... 420, 706
1002103 ... 420, 706
1002110 ... 480
1002111 ... 480
1002113 ... 480
1002116 ... 229
1002117 ... 228
1002118 ... 228
1002119 ... 228
1002140 ... 225
1002146 ... 109
1002147 ... 214
1002148 ... 214
1002149 ... 214
1002151 ... 465
1002152 ... 465
1002153 ... 465
1002163 ... 151
1002164 ... 151
1002165 ... 151
1002168 ... 150
1002169 ... 159
1002170 ... 158
1002171 ... 159
1002172 ... 158
1002188 ... 716
1002190 ... 235
1002191 ... 235
1002192 ... 235
1002198 ... 581

1002200
1002200 ... 581
1002201 ... 601
1002203 ... 601
1002215 ... 274, 308
1002216 ... 274
1002217 ... 154
1002218 ... 777, 794
1002220 ... 777, 794
1002221 ... 777, 794
1002228 ... 237
1002229 ... 237
1002238 ... 191
1002239 ... 208
1002240 ... 208
1002264 ... 151
1002265 ... 151

1002400
1002402 ... 629
1002403 ... 629
1002404 ... 111
1002405 ... 111
1002411 ... 782
1002420 ... 801
1002422 ... 802
1002423 ... 800
1002424 ... 800
1002425 ... 800

1002430 228
1002431 228
1002432 228
1002494 554

1002500
1002503 643
1002504 643
1002505 643
1002558 150
1002562 150
1002563 150
1002564 150
1002583 112
1002584 318
1002585 318
1002591 375
1002592 375
1002594 375
1002596 375

1002600
1002602 500
1002603 500
1002604 500
1002605 655
1002606 655
1002607 228
1002608 228
1002610 470
1002611 470
1002612 470
1002631 431
1002632 431
1002633 431
1002634 431
1002635 431
1002636 431
1002637 433
1002638 433
1002639 433
1002640 433
1002641 433
1002642 433
1002643 433
1002644 433
1002645 433
1002646 433
1002647 433
1002648 433
1002649 433
1002650 433
1002651 433
1002652 433
1002653 433
1002654 433
1002655 433
1002656 433
1002657 433
1002658 433
1002659 433
1002660 433
1002686 445
1002688 506
1002689 506
1002690 506
1002691 793
1002692 793
1002693 793
1002694 506
1002695 506
1002696 506
1002697 501
1002698 501
1002699 501

1002700
1002700 501
1002701 501
1002702 501
1002703 501
1002704 501
1002705 501
1002785 794
1002791 797
1002792 798

1002800
1002803 389, 390, 798
1002842 197
1002843 197
1002844 197
1002845 433, 437, 467
1002853 611, 615, 657, 685
1002854 484
1002855 220
1002856 220
1002858 139, 295, 785
1002859 222
1002860 245
1002861 504
1002862 504
1002863 504
1002864 505
1002865 505
1002866 505
1002867 666
1002868 648
1002869 648
1002870 540
1002871 540
1002873 474
1002874 474
1002875 474
1002876 445
1002877 445
1002878 445
1002882 138, 261
1002884 666
1002890 129
1002891 129
1002893 719
1002895 719
1002897 719
1002898 719
1002899 719

1002900
1002900 655
1002902 655
1002903 683
1002904 682
1002905 665
1002906 516
1002907 516
1002909 120, 770
1002910 120, 770
1002911 120, 770
1002912 120, 770
1002913 119, 770
1002914 119, 770
1002915 294, 771
1002917 294, 771
1002918 294, 771
1002919 294, 771
1002922 413
1002925 210
1002926 210
1002927 210
1002928 197
1002929 197
1002930 197
1002931 217
1002932 217
1002933 217
1002934 287
1002935 287
1002936 287
1002937 160
1002938 160
1002939 160
1002940 330
1002941 330
1002942 221
1002943 221
1002944 279
1002945 279
1002946 156
1002947 156
1002949 169
1002950 169
1002952 640
1002953 640
1002954 640
1002955 640
1002956 575
1002957 575
1002958 575
1002959 575
1002960 244

1002961 244
1002962 207
1002964 207
1002965 287
1002967 284
1002968 284
1002969 300
1002970 300
1002971 300
1002973 300
1002974 300
1002975 300
1002976 300
1002977 300
1002978 300
1002979 410
1002980 410
1002981 410
1002982 413
1002983 413
1002984 413
1002985 245
1002986 245
1002987 245
1002989 650
1002990 650
1002991 576
1002992 576
1002993 211
1002994 139, 295, 783, 785
1002995 783

1003000
1003001 578
1003004 162
1003005 162
1003006 162
1003007 162
1003008 389
1003009 389
1003010 389
1003011 390
1003012 390
1003013 390
1003014 320
1003015 320
1003016 320
1003017 319
1003018 319
1003019 319
1003022 209, 785
1003023 209, 785
1003028 106
1003029 106
1003030 104
1003031 104
1003032 105
1003033 105
1003034 219
1003035 219
1003040 263
1003041 263
1003042 263
1003043 263
1003044 141
1003045 141
1003046 141
1003047 141
1003048 140
1003049 140
1003050 140
1003051 140
1003052 263
1003053 263
1003054 263
1003055 263
1003057 357
1003058 358
1003059 358
1003060 358
1003061 357
1003062 359
1003063 359
1003064 359
1003065 358
1003066 358
1003067 358
1003068 359
1003069 359
1003070 359
1003073 419
1003074 419
1003083 419
1003084 419

1003100
1003101 811
1003104 796
1003105 796
1003106 794
1003107 179

1003200
1003254 797
1003275 148
1003276 148
1003277 148
1003278 148
1003279 149
1003280 149
1003281 149
1003282 149
1003283 270
1003284 270
1003285 270
1003286 270
1003287 270
1003288 270
1003289 270
1003290 270
1003299 384

1003300
1003300 384
1003301 384
1003302 384
1003303 384
1003304 384
1003305 385
1003306 385
1003307 386
1003308 386
1003309 387
1003310 387
1003311 386
1003312 386
1003313 387
1003314 387
1003316 204
1003317 204

1003400
1003416 615
1003417 615
1003418 616
1003419 616
1003420 672
1003421 672
1003422 611
1003423 611
1003424 612
1003425 612
1003426 671
1003427 671
1003428 212
1003429 212
1003430 212
1003431 212
1003432 165
1003435 157
1003436 157
1003437 615
1003438 616
1003439 672
1003440 611
1003441 612
1003442 671
1003443 163
1003444 163
1003447 591
1003448 591
1003449 689
1003450 689
1003451 689
1003452 689
1003453 639
1003454 639

1003455 226
1003456 226
1003457 226
1003458 226
1003459 227
1003460 227
1003466 410
1003467 198
1003468 198
1003479 671, 672

1003500
1003506 241
1003507 241
1003508 241
1003518 686
1003519 686
1003530 142
1003532 142
1003535 538
1003536 538
1003537 538
1003538 539
1003539 656

1004600
1004649 666
1004650 636
1004651 636
1004652 601
1004653 684
1004654 541
1004655 541
1004657 185
1004660 185
1004661 185
1004662 185
1004663 185
1004664 296
1004665 296
1004666 280
1004667 280
1004668 396
1004669 396
1004670 188
1004671 188
1004672 147
1004673 147
1004674 151
1004675 151
1004676 151
1004677 676
1004678 637
1004679 637
1004680 542
1004681 542
1004682 214
1004683 214
1004684 433
1004685 433
1004686 448
1004687 448
1004688 448
1004689 448
1004690 441, 773
1004691 441, 773
1004692 441, 773
1004693 441, 773
1004694 389
1004695 389
1004696 389
1004697 390
1004698 390
1004699 390

1004700
1004700 320
1004701 320
1004702 320
1004703 319
1004704 319
1004705 319
1004706 224
1004707 224
1004708 754
1004709 754
1004710 754
1004712 755
1004713 755
1004714 755
1004716 756
1004717 756
1004718 756
1004719 756
1004720 757
1004721 757
1004722 758
1004723 758
1004725 759
1004726 762
1004727 760
1004729 233
1004730 233
1004731 233
1004732 193
1004733 190
1004734 761
1004735 761
1004736 761
1004737 763
1004738 215
1004739 215
1004740 206
1004741 206
1004742 206
1004743 206
1004744 151
1004745 151
1004746 151
1004747 631
1004748 631
1004749 512
1004750 512
1004751 512
1004757 592
1004759 121
1004760 121
1004761 121
1004762 121
1004763 122
1004764 122
1004765 123
1004766 123
1004767 123
1004768 123
1004769 443, 772
1004770 443, 772
1004771 443, 772
1004772 443, 772
1004773 107, 155
1004774 107, 155, 277
1004775 107, 155, 277
1004776 797
1004777 797
1004780 800
1004781 801
1004782 802
1004783 467
1004784 467
1004785 467

1004800
1004889 738
1004890 738
1004893 739
1004894 739
1004895 739
1004896 747
1004897 747
1004898 747
1004899 747

1004900
1004900 748
1004901 748
1004902 749
1004903 749
1004904 749
1004905 747
1004906 747
1004907 747
1004908 747
1004909 748
1004910 748
1004911 749
1004912 748
1004913 748

1004914 748
1004915 748
1004916 748
1004917 748
1004918 741
1004919 741
1004920 741
1004921 741
1004922 741
1004923 741
1004924 742
1004925 742
1004926 742
1004927 743
1004928 743
1004929 743
1004930 743
1004931 743
1004932 745
1004933 471
1004934 471
1004935 471
1004936 471
1004937 431
1004938 431
1004939 433
1004940 433
1004941 433
1004942 433
1004943 433
1004944 433
1004957 666
1004969 185
1004970 113
1004971 232
1004972 812
1004973 812
1004974 812

1005000
1005075 813
1005076 813
1005077 813
1005078 813
1005079 813
1005080 813
1005081 813
1005082 813
1005083 813
1005085 322
1005086 322
1005087 323
1005088 323
1005089 690
1005090 690

1005100
1005125 635
1005126 635
1005148 624
1005149 624
1005150 624
1005151 624
1005153 624
1005154 624
1005155 624
1005156 624
1005157 624
1005177 121
1005178 123

1005200
1005201 629
1005202 675
1005205 611, 615, 672
1005206 611, 615, 672
1005207 611, 615, 672
1005214 176
1005215 176
1005216 176
1005217 176
1005218 176
1005241 795
1005262 611, 615, 672
1005263 611, 615, 672
1005265 816
1005268 816
1005269 810
1005271 810
1005272 810
1005273 812
1005274 814
1005275 814
1005276 814
1005277 814
1005278 814
1005279 814
1005280 814
1005281 814
1005282 814
1005283 814
1005284 810
1005285 810
1005286 810
1005287 810
1005288 810
1005289 816
1005290 816
1005291 814
1005292 814
1005293 814
1005294 814
1005295 814
1005296 814

1005300
1005301 815
1005302 815
1005303 815
1005304 815
1005305 816
1005306 817
1005307 816
1005308 816
1005309 816
1005310 816
1005311 812
1005312 812
1005313 813
1005314 813
1005315 813
1005316 813
1005317 815
1005318 815
1005380 795
1005381 795
1005382 795
1005383 796
1005384 801
1005387 799
1005390 101
1005391 101
1005392 100
1005394 100
1005395 146, 774
1005396 146, 774
1005397 440
1005399 440

1005400
1005400 450
1005401 450
1005402 450
1005407 349
1005408 349
1005409 349
1005410 349
1005415 349
1005416 349
1005417 349
1005418 349
1005423 349
1005424 349
1005425 349
1005426 349
1005435 373


1005436 ... 373
1005439 ... 514
1005440 ... 515
1005441 ... 579
1005442 ... 522
1005443 ... 632
1005444 ... 795
1005445 ... 795
1005446 ... 799
1005449 ... 798
1005496 ... 800
1005497 ... 799

1006100
1006104 ... 730
1006105 ... 730
1006106 ... 717
1006107 ... 717
1006120 ... 802
1006121 ... 371
1006122 ... 371
1006123 ... 334
1006124 ... 334
1006125 ... 334
1006126 ... 334
1006127 ... 334
1006128 ... 334
1006133 ... 797
1006134 ... 797
1006135 ... 807
1006136 ... 807
1006137 ... 807
1006138 ... 807
1006139 ... 807
1006140 ... 807
1006141 ... 807
1006142 ... 807
1006143 ... 807
1006144 ... 807
1006145 ... 807
1006146 ... 807
1006147 ... 807
1006148 ... 807
1006149 ... 807
1006150 ... 807
1006151 ... 807
1006152 ... 807
1006153 ... 807
1006154 ... 807
1006155 ... 472
1006156 ... 472
1006157 ... 444
1006158 ... 444
1006159 ... 166, 444, 472
1006160 ... 166, 444, 472
1006161 ... 224
1006162 ... 224
1006171 ... 727
1006172 ... 727
1006173 ... 727
1006174 ... 727
1006175 ... 727
1006176 ... 727
1006178 ... 626
1006179 ... 626
1006180 ... 518
1006181 ... 518
1006182 ... 518
1006183 ... 627
1006184 ... 521
1006185 ... 118
1006186 ... 118
1006187 ... 118
1006188 ... 118
1006189 ... 118
1006190 ... 118
1006191 ... 589
1006192 ... 589
1006193 ... 589

1006200
1006202 ... 799


NEW
PANEL TRACK


NEW
QUADRULO

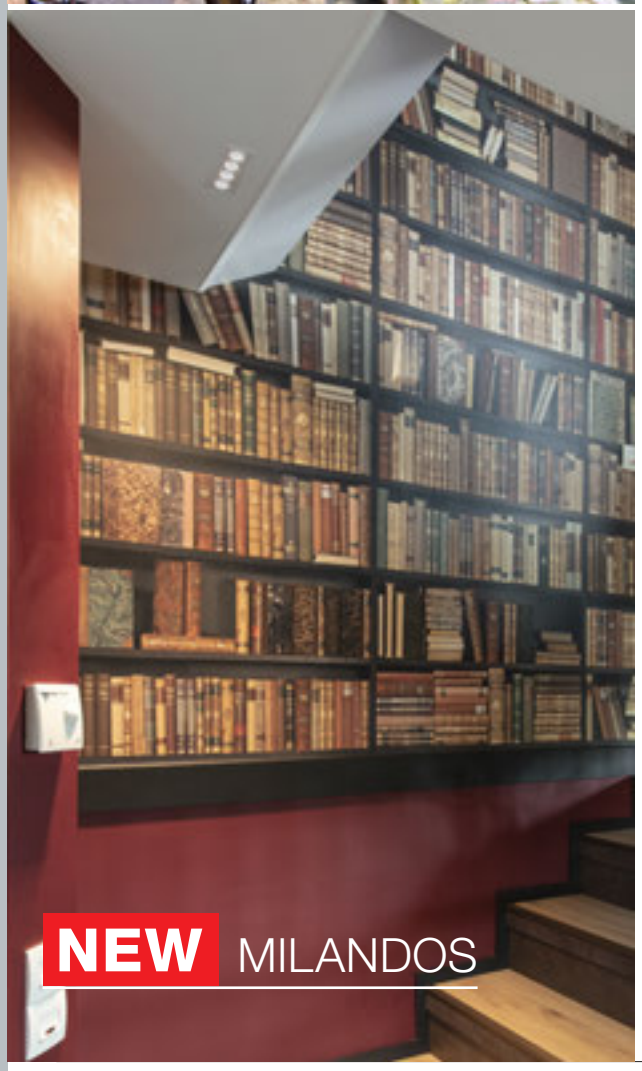
NEW
MILANDOS


NEW
FLOODI



NEW VARIANT ONE DOUBLE



NEW PARA CONE


1005739 69
SCOTT

SINGLE-CIRCUIT

SINGLE-CIRCUIT MOUNTING TRACKS ... 528
SINGLE-CIRCUIT MOUNTING TRACKS accessories ... 467
SINGLE-CIRCUIT RECESSED TRACK ... 469
SINGLE-CIRCUIT RECESSED TRACK accessories ... 469

3-CIRCUIT

EUTRAC®

EUTRAC® 3-CIRCUIT MOUNTING TRACK ... 435
EUTRAC® 3-CIRCUIT MOUNTING TRACK accessories ... 437
EUTRAC® 3-CIRCUIT RECESSED TRACK ... 439
EUTRAC® 3-CIRCUIT RECESSED TRACK accessories ... 439

S-TRACK

S-TRACK 3-CIRCUIT MOUNTING TRACK DALI ... 431
S-TRACK 3-CIRCUIT MOUNTING TRACK DALI accessories ... 433

A

ABRIDOR 60 Pole ... 576
ABRIDOR 100 Pole ... 576
ABRIDOR SENSOR WL ... 650
ABRIDOR WL ... 650
ACCANTO CL, E27 ... 279
ACCANTO PD, E27 ... 156
ACCANTO WL, E27 ... 221

ACCESSORIES

1-10V dimmer 10W ... 792
Cable clamp ... 803
Cable extension ... 804
Compensation module ... 794
Ceiling hook ... 803
Connection box 5-pole ... 805
Connection box IP68, 3-pole ... 805
Connector strip 3 outlets ... 804
DALI CONTROLLER 24V DC ... 794
DALI INTERFACE 1-10V + on/off ... 777, 794
DALI UNIVERSAL DIMMER 10-300W ... 777, 794
DALI UNIVERSAL DIMMER 3-25W ... 777, 794
Double-sided tape ... 804
GLENOS® Ceiling rosette ... 803
GU10 fitting ... 804
GU10 fitting with connection box and quick clamp ... 804
LED power supply 60W | DALI, 24V, 2-channel ... 797
LED driver 1000mA | 39W incl. strain relief ... 799
LED driver 100mA | 40W ... 799
LED driver 100mA | 60W incl. strain relief ... 802
LED driver 1050mA | 30W incl. strain relief ... 799
LED driver 200mA | 10W incl. strain relief ... 800
LED driver 200mA | 6-8,4W incl. strain relief ... 797
LED driver 250-700mA | 20W incl. strain relief ... 800
LED driver 250-700mA | 40W incl. strain relief ... 800
LED driver 250mA | 10 W ... 800
LED driver 320mA | 3W incl. strain relief ... 800
LED driver 350mA | 10W ... 798
LED driver 350mA | 15W ... 798
LED driver 350mA | 15W incl. strain relief ... 801
LED driver 350mA | 20W ... 798
LED driver 350mA | 20W incl. strain relief ... 801
LED driver 350mA | 3W ... 797
LED driver 350mA | 3W incl. strain relief ... 801
LED diver 500/600/700mA | 30W incl. strain relief ... 801
LED driver 500mA | 10W incl. strain relief ... 801
LED driver 500mA | 15W ... 798
LED driver 700-1500mA | 50W incl. strain relief ... 800
LED driver 700/90/100mA | 40W incl. strain relief ... 802
LED driver 700mA | 10W ... 798
LED driver 700mA | 20W | dimmable | incl. strain relief ... 799
LED driver 700mA | 39W incl. strain relief ... 799
LED driver 700mA | 3W incl. strain relief ... 801
LED driver 700mA | 40W ... 799
LED driver 700mA | 6W ... 798
LED driver 800/900/1050mA | 40W incl. strain relief ... 802
LED driver DALI ... 797
LED power supply ... 797
LED power supply 100W | DALI, 24V, 2-channel ... 797
LED power supply 12V | 100W incl. strain relief ... 797
LED power supply 12V | 12W with strain relief ... 795
LED power supply 12V | 15W ... 795
LED power supply 24V | 12W with strain relief ... 795
LED power supply 24V | 15W ... 795
LED power supply 24V | 20W ... 795
LED power supply 24V | 40W ... 795
LED power supply 24V | 50W incl. strain relief ... 796
LED power supply 24V | 60W ... 796
LED power supply 24V DC | 100W with strain relief ... 796
LED power supply 24V DC | 150W ... 796
LED power supply 24V DC | 150W incl. strain relief ... 796
SLV VALETO® remote control, CCT/RGBW ... 783
SLV VALETO® Gateway ... 782
SLV VALETO® Wall-recessing dimmer ... 783
Stopper for wire rope ... 804
T-connector box 3-pole ... 805
TENSEO Transformer 12V AC | 50VA ... 793
TENSEO Transformer 12V AC | 105VA ... 793
TENSEO Transformer 12V AC | 210VA ... 793
Textile cable 10m ... 803
Transformer 12V AC | 10VA IP44 ... 792
Transformer 12V AC | 60VA ... 792
Transformer 12V AC | 60VA IP44 ... 792
Transformer 12V AC | 150VA ... 792
Wire rope suspension ... 803

ADEGAN FL, E27 ... 555
ADEGAN MANILA FL, E27 ... 554
ADI EL ... 700
AINOS CW ... 688
AINOS CW SENSOR ... 688
AINOS CW SENSOR, square ... 689
AINOS CW, square ... 689
AKALO D83 EL, PHASE ... 407
ALPA CONE 100 Pole, E27 ... 557
ALPA MUSHROOM 45 Pole, E27 ... 557
ALPA MUSHROOM 75 Pole, E27 ... 557
ALTRA DICE CL, QPAR51 ... 274
ALTRA DICE CW, double, QPAR51 ... 274, 308
ALTRA DICE TRACK 1Ph., QPAR51 ... 485
ALTRA DICE TRACK 3Ph., QPAR51 ... 453
ANDREAS WL, QT-DE12 ... 210
ANELA CL, PHASE ... 287
ANELA PD, PHASE ... 164
ANGOLUX SENSOR WL ... 642
ANGOLUX WL ... 642
ANILA EASYTEC® II, QPAR51 ... 494
APONI 90 Pole, PHASE ... 558
APONI 120 Pole, PHASE ... 558
APONI WL, PHASE ... 658
ARLINA 60 WL ... 208
ARLINA 130 WL ... 208
ARROCK ARC Pole, QPAR51 ... 535
ARROCK GRANITE 40 Pole, square, E27 ... 534
ARROCK GRANITE 70 Pole, square, E27 ... 534
ARROCK SLOT ... 537
ARROCK STONE 50 Pole ... 536
ARROCK STONE 75 Pole ... 536
ASMARA LV, QR-C51 ... 502
ASSO 70 WL ... 200
ASSO 300 WL, PHASE ... 201
ASSO WL, PHASE ... 201
ASTINA CL, QPAR51 ... 287
ASTINA PD, QPAR51 ... 160
ASTINA STEEL WL, QPAR51 ... 641
ASTINA UP/DOWN WL, QPAR51 ... 217
ASTINA WL, QPAR51 ... 641
ASTO CW, double, QPAR51 ... 316
ASTO CW, quad, QPAR51 ... 316
ASTO CW, single, QPAR51 ... 316
ASTO CW, triple, QPAR51 ... 316
ASTO TUBE CW, double, QPAR51 ... 311
ASTO TUBE CW, single, QPAR51 ... 311
ASTO TUBE CW, triple, QPAR51 ... 311
AVO CW, double, QPAR51 ... 315
AVO CW, quad, QPAR51 ... 315
AVO CW, single, QPAR51 ... 315
AVO CW, triple, QPAR51 ... 315
AVO TRACK 1Ph., QPAR51 ... 479
AVO TRACK 3Ph., QPAR51 ... 459

B

BASKET WL, E27 ... 211
BATO 35 CW, E27 ... 333
BATO 45 CW, E27 ... 288
BATTEN 120 CW ... 334
BATTEN 60 CW ... 334
BENA 120 CW ... 339
BENA 150 CW ... 339
BIG NAILS 50 POLE, E27 ... 560
BIG NAILS 80 POLE, E27 ... 560
BIG NAILS WL, E27 ... 660
BIG NAUTILUS SP, round, QPAR51 ... 593
BIG PLOT cover, 2er ... 728
BIG PLOT cover, 4er ... 728
BIG PLOT Module ... 728
BIG QUAD Up/Down WL ... 635
BIG QUAD WL ... 622, 633
BIG THEO CL ... 674
BIG THEO CL, QPAR111 ... 674
BIG THEO UP/DOWN WL, QPAR111 ... 619
BIG THEO WL ... 621
BIG THEO WL, QPAR111 ... 621
BIMA 1Ph., double, QPAR51 ... 482
BIMA 1Ph., single, QPAR51 ... 482
BIMA 3Ph., double, QPAR51 ... 456
BIMA 3Ph., single, QPAR51 ... 456
BIMA EASYTEC® II, double, QPAR51 ... 492
BIMA EASYTEC® II, single, QPAR51 ... 492
BOOKAT Pole, PHASE ... 579
BOOKAT WL ... 632
BOX UP/DOWN WL, QT-DE12 ... 652
BOX-L WL ... 686
BOX-L WL, E27 ... 652
BRICK DOWNUNDER EL ... 703
BRICK DOWNUNDER EL, E14 ... 703
BRICK EL, asymmetrical ... 702
BRICK EL, symmetrical ... 702
BRICK MESH EL, E14 ... 702

BULAN CW, E14 ... 691
BULAN GRID CW, E27 ... 691

C

C-POL POLE, E27 ... 566
C-POL WL, E27 ... 659
CARISO WL, PHASE ... 203
CHROMBO WL, PHASE ... 204
COMET LED LV ... 506
COMET LV, QR-C51 ... 506
CONE FL, E27 ... 551
CONNECTED LED PANEL 595x595mm, UGR<19 ... 418
CONNECTED LED PANEL 620x620mm, UGR<19 ... 418
CONTONE® DL, round, rigid, PHASE ... 398
CONTONE® DL, round, adjustable, PHASE ... 398
COSMIC LV, QR-C51 ... 503
COUPA FLEX WL ... 222
COUPA WL, QT14 ... 222
CUBIX FL, QPAR51 ... 551

D

DASAR®

DASAR® 70 EL, square, QPAR51 ... 721
DASAR® 80 EL, round/square, QPAR51 ... 721
DASAR® 215 EL, round, E27 ... 722
DASAR® 215 EL, round/square, QPAR111 ... 722
DASAR® 218 EL, QR111 ... 722
DASAR® 255 EL ... 718
DASAR® 270 EL, asymmetrical ... 719
DASAR® 270 EL, symmetrical ... 719
DASAR® 370 EL, round ... 723
DASAR® 920 EL ... 718
DASAR® EXACT 116 EL, round/square, QPAR51 ... 721
DASAR® FLAT 80 EL ... 716
DASAR® FLAT 120 EL ... 717
DASAR® PROJECTOR SP, 12/24V ... 598
DASAR® PROJECTOR SP, 230V ... 598

DEKLED EL ... 404
DELWA WL ... 647
DENA 30 WL, E14 ... 211
DIO FLEX PLATE WL ... 228, 229
DIO FLEX PLATE WL QPAR51 ... 228
DIRETO 60 WL, PHASE ... 206
DIRETO 90 WL, PHASE ... 206
DISPLAY ADL 50 QPAR51 ... 245
DL 126 EL ... 394
DOLIX OUT EL, square, QPAR51 ... 405, 713
DOLIX OUT EL, round, QPAR51 ... 405, 713
DORISA 30 ... 238
DORISA 50 ... 239
DOWNUNDER OUT L EL ... 701
DOWNUNDER OUT M EL ... 701
DOWNUNDER OUT S EL ... 701
DOWNUNDER OUT WL, square ... 648
DOWNUNDER OUT WL, round ... 648
DOWNUNDER PUR 80 EL ... 412
DOWNUNDER PUR 150 EL ... 412
DURNO ... 504

E

EASYTEC® II

EASYTEC® II track ... 491
EASYTEC® II track, accessories ... 491

ENOLA

ENOLA B CL, QPAR51 ... 281
ENOLA B CW, double, QPAR51 ... 307
ENOLA B CW, single, QPAR51 ... 307
ENOLA B PD, QPAR51 ... 161, 481
ENOLA B TRACK 1Ph., QPAR51 ... 480
ENOLA B WL, QPAR51 ... 217
ENOLA C CL ... 281
ENOLA C CL, PHASE ... 281
ENOLA C POLE ... 580
ENOLA C TRACK 1Ph. ... 480
ENOLA C TRACK 3Ph. ... 459
ENOLA PD, E27 ... 161
ENOLA ROUND S CL ... 671
ENOLA ROUND S WL, single ... 611
ENOLA ROUND L CL ... 671
ENOLA ROUND L WL, single ... 611
ENOLA ROUND M CL ... 671
ENOLA ROUND M WL, single ... 611
ENOLA SQUARE S CL ... 672
ENOLA SQUARE S WL, single ... 615
ENOLA SQUARE M CL ... 672
ENOLA SQUARE M WL, single ... 615
ENOLA SQUARE L CL ... 672
ENOLA SQUARE L WL, single ... 615
ENOLA accessories ... 617

ESKINA 30 Pole ... 516
ESKINA 80 Pole ... 516
ESKINA D display, PHASE ... 665
ESKINA FRAME 45 Pole, single ... 512
ESKINA FRAME 75 Pole, double ... 512
ESKINA FRAME 75 Pole, single ... 512
ESKINA FRAME 125 Pole, double ... 514
ESKINA FRAME 175 Pole, double ... 515
ESKINA FRAME WL ... 631
ESKINA FRAME WL, double ... 631
ESKINA SPOT CW, PHASE ... 683
ESKINA SPOT SENSOR CW, PHASE ... 682
EURO CUBE 3Ph. ... 451
EURO SPOT TRACK 1Ph., QPAR51 ... 485
EURO SPOT TRACK 3Ph., QPAR111 ... 452
EURO SPOT TRACK 3Ph., QPAR51 ... 452

F

F-POL POLE, E27 ... 567
F-POL WL, E27 ... 659

FENDA

FENDA 15 cm, round ... 107, 155
FENDA 30 cm, round ... 107, 155, 277
FENDA 45 cm, round ... 107, 155, 277
FENDA BOW BASIS FL, E27 ... 106
FENDA ceiling rosette, E27 ... 276
FENDA FL, E27 ... 104, 105
FENDA glass screen ... 154
FENDA half shade ... 218
FENDA Ø 20 cm, round ... 218
FENDA Ø 40 cm, round ... 107, 154
FENDA Ø 70 cm, round ... 107, 155, 277
FENDA PD, E27 ... 154
FENDA TL, E27 ... 104, 105
FENDA WL, Basis, E27 ... 218, 219
FENDA WL, E27 ... 219

FERA 25 CL ... 285
FERA 25 CL, DALI ... 284
FITU CUBE WL, E27 ... 215
FITU CW, E27 ... 318
FITU FL, E27 ... 109
FITU MIX & MATCH accessories ... 151
FITU PD, E27 ... 150
FITU TL, E27 ... 109
FITU wall bracket ... 214
FITU WL, E27 ... 214
FLAC BEAM® SP ... 591
FLATT 100 POLE ... 575
FLATT 65 POLE ... 575
FLATT SENSOR WL ... 640
FLATT WL ... 640
FLOODI L SP ... 589
FLOODI M SP ... 589
FLOODI S SP ... 589
FORCHINI 50 PD, E27 ... 170
FORCHINI 70 PD, E27 ... 170
FORCHINI M 40 PD, E27 ... 171
FORCHINI M 40 TRACK 1Ph., E27 ... 477
FORCHINI M 40 TRACK 3Ph., PD, E27 ... 447
FORCHINI M 50 PD, E27 ... 171
FRAME BASIC RL ... 409
FRAME BASIC RL, HV ... 409
FRAME BASIC SET RL ... 408
FRAME CURVE EL ... 408
FRAME CURVE EL, HV ... 408

G

GALEN 120 SP ... 591
GALEN 60 SP ... 591
GIMBLE OUT EL ... 724
GLASSA CW, square, E27 ... 332
GLENOS PD, 1m, 1-10V ... 143
GLENOS PD, 2m, 1-10V ... 143
GLENOS® 60 WL ... 241
GLOO PURE 27 Pole, E27 ... 545
GLOO PURE 44 Pole, E27 ... 545
GLOO PURE 70 Pole, E27 ... 545
GLOO PURE WL, E27 ... 658
GRAFIT 30 Pole, E27 ... 521
GRAFIT 30 Pole, round, E27 ... 518
GRAFIT 60 Pole, E27 ... 521
GRAFIT 60 Pole, round, E27 ... 518
GRAFIT 90 Pole, E27 ... 521
GRAFIT 90 Pole, round, E27 ... 518
GRAFIT SENSOR WL, square, E27 ... 627
GRAFIT SENSOR WL, round, E27 ... 626
GRAFIT WL, square, E27 ... 627
GRAFIT WL, round, E27 ... 626

GRAZIA LED strips

GRAZIA IP FLEXSTRIP, 24V ... 761
GRAZIA IP FLEXSTRIP, RGBW, 24V ... 763
GRAZIA IP FLEXSTRIP, Tunable white, 24V ... 762
GRAZIA PRO FLEXSTRIP, 24V ... 756
GRAZIA PRO FLEXSTRIP, RGBW, 24V ... 760
GRAZIA PRO FLEXSTRIP, Tunable white, 24V ... 759
GRAZIA PRO MAX FLEXSTRIP, 24V 757, 758

GRAZIA profiles

GRAZIA 10 Mounting profile, flat ... 735
GRAZIA 10 Mounting profile, standard ... 735
GRAZIA 10 Installation profile ... 735
GRAZIA 10 Accessories ... 736, 737
GRAZIA 10 EDGE Mounting profile ... 738
GRAZIA 10 EDGE Accessories ... 739
GRAZIA 20 Mounting profile, Flat ... 741
GRAZIA 20 Mounting profile, standard ... 741
GRAZIA 20 Installation profile ... 742
GRAZIA 20 Accessories ... 743, 744, 745
GRAZIA 60 Mounting profile ... 747
GRAZIA 60 Installation profile ... 747
GRAZIA 60 Accessories ... 748, 749

H

H-LIGHT DL, oval, PHASE ... 399
H-LIGHT DL, round, PHASE ... 399
H-POL 30 Pole ... 572
H-POL 60 Pole ... 572
H-POL TWIN 30 Pole ... 573
H-POL TWIN 60 Pole ... 573
HELIA 30 PD ... 158
HELIA 30 PD, PHASE ... 158
HELIA 40 PD ... 159
HELIA 40 PD, PHASE ... 159
HELIA 50 TRACK 1Ph. ... 483
HELIA 50 TRACK 3Ph. ... 457
HELIA AMBIENT 35 PD ... 157
HELIA AMBIENT 35 PD, PHASE ... 157
HELIA CW, double, PHASE ... 299, 685
HELIA CW, single, PHASE ... 299, 685
HELIA EL ... 400
HELIA Pole, double, PHASE ... 581, 582
HELIA Pole, single, PHASE ... 581, 582
HELIA SPOT S SP, single, PHASE ... 599
HELIA SPOT L SP, single, PHASE ... 599
HORN DL, double, QPAR51 ... 371
HORN DL, GU10, blower door tested ... 373

HORN DL, single, asymmetrical, QPAR51 ...371
HORN DL, single, QPAR51 ... 370, 372
HORN EL, single, QPAR51 ... 372
HORN MAGNA ... 375
HORN MINI EL ... 370
HORN-T EL, QPAR111 ... 374

I

I-PENDANT PRO PD, 1195x295mm, DALI .. 140
IMPERVA 120 CW ... 692
IMPERVA 150 CW ... 692
INDA CW, QPAR51 ... 308
IPERI 50 Pole ... 577
IPERI WL ... 662

K

KADUX EL, double, 1-10V ... 380
KADUX EL, double, PHASE ... 379
KADUX EL, double, QPAR111 ... 378
KADUX EL, double, QPAR51 ... 376
KADUX EL, single, 1-10V ... 380
KADUX EL, single, PHASE ... 379
KADUX EL, single, QPAR111 ... 378
KADUX EL, single, QPAR51 ... 376
KADUX EL, triple, PHASE ... 379
KADUX EL, triple, QPAR51 ... 376
KALU CW, double, PHASE ... 303
KALU CW, double, QPAR111 ... 304
KALU CW, quad, PHASE ... 303
KALU CW, quad, QPAR111 ... 304
KALU CW, single, PHASE ... 303
KALU CW, single, QPAR111 ... 304
KALU CW, triple, PHASE ... 303
KALU CW, triple, QPAR111 ... 304
KALU TRACK 1Ph., PHASE ... 484
KALU TRACK 1Ph., QPAR111 ... 484
KALU TRACK 3Ph., PHASE ... 454
KALU TRACK 3Ph., QPAR111 ... 454
KALU TRACK 3Ph., QR111 ... 454
KAMUELA ECO EL, round, PHASE .. 406, 710
KANO EASYTEC® II, QPAR51 ... 492
KARDAMOD CL, double, square, QPAR111 ... 275
KARDAMOD CL, single, square, QPAR111 ... 275
KARPO 30 CW, single 296
KARPO 30 CW, single, PHASE ... 296
KARPO 30 EL ... 400
KARPO 30 WL, single ... 225
KARPO FL ... 108
KARPO GOOSE WL ... 224
KARPO MAGN CW, single, PHASE ... 224
KARPO TL ... 108
KARPO WL ... 225
KENKUA SPOT WL, E27 ... 220
KENKUA WL, E27 ... 220
KERAS ELT WL, E27 ... 661
KINI EL, PHASE ... 407, 709

L

L-LINE 120 WL ... 242
L-LINE 60 WL ... 242
L-LINE OUT 30 FL, vertical ... 538
L-LINE OUT 50 Pole, horizontal ... 538
L-LINE OUT 60 FL, vertical ... 538
L-LINE OUT 80 Pole, horizontal ... 539
L-LINE OUT WL ... 656
LED PANEL 600x600mm ... 419
LED PANEL 620x620mm ... 419
LIGHT EYE® 150 3Ph., PD, QPAR111 ... 446, 476
LIGHT EYE® 150 EASYTEC® II, PD, QPAR111 ... 495
LIGHT EYE® 150 PD, QPAR111 ... 172
LIGHT EYE® 150 TRACK 3Ph., QPAR111 . 446
LIGHT EYE® 150 TRACK EASYTEC® II, QPAR111 ... 495
LIGHT EYE® 90 1Ph., QPAR51 ... 476
LIGHT EYE® 90 PD, GU10 ... 172

LIGHTBULB

LED A60 E27 ... 815
LED A60 E27, Mirrorhead, chrome ... 816
LED A60 E27, RGBW, smart ... 815
LED A60 E27, tunable 2700-6500K, smart ... 815
LED C35 E14 ... 810
LED G125 E27, Mirrorhead, chrome ... 817
LED G53 ... 811
LED G95 E27 ... 816
LED QPAR 111 GU10 ... 814
LED QPAR111 GU10, RGBW, smart ... 813
LED QPAR111 GU10, RGBW, smart ... 813
LED QPAR111 GU10, tunable 2700-6500K, smart ... 813
LED QPAR51 GU10 ... 812,813
LED QPAR51 GU10, RGBW, smart ... 812
LED QPAR51 GU10, tunable 2700-6500K, smart ... 812
LED QR51 GU5,3 ... 811
LED QT-DE12 R7S, 118 mm ... 810
LED QT-DE12 R7S, 78 mm ... 810
LED QT14 G9 ... 810
LED SPIKE SP ... 601
LED SPOT SP ... 666
LED ST58 E27 ... 816
LED ST64 E27 ... 816
LED T32 Filament GU10 ... 811
LED T38 E27 ... 816
LED T45 E27 ... 816
LED TCR-TSE GX53 ... 810

LIGHTPOINT EL ... 401
LIPA CW, PHASE ... 690
LIPSY® 30 CW, Dome ... 326
LIPSY® 30 CW, Drum ... 329
LIPSY® 40 CW, Dome ... 326
LIPSY® 40 CW, Drum ... 329
LIPSY® 40 CW, Drum, DALI ... 330
LIPSY® 50 CW, Dome ... 326
LIPSY® 50 CW, Drum ... 329
LIPSY® 50 CW, Drum, DALI ... 330
LISENNE 40 Pole, E27 ... 553
LISENNE 70 Pole, E27 ... 553
LISENNE PD, E27 ... 164
LISENNE WL, E27 ... 213
LOGS 40 Pole ... 517
LOGS 70 Pole ... 517
LOGS IN L WL, PHASE ... 197
LOGS IN WL ... 196
LOGS IN WL, PHASE ... 196
LOGS WL ... 652
LONG GRILL CW ... 336

M

MAGANDA TL ... 113
MAGANDA WL ... 232
MALANG CW ... 139, 295
MANA 40 Shade, round ... 185
MANA 60 Shade, round ... 185
MANA BASE round ... 185
MANA BASE WL, round, PHASE ... 185
MANA OUT WL, PHASE ... 655
MANA Shade ... 186, 187
MANA WL, Basis ... 187
MANA WL, Basis, PHASE ... 186, 187
MARONA WL, PHASE ... 288
MARYLIN 40/60/90 WL ... 235
MECANICA PLUS FL ... 111
MECANICA PLUS TL ... 111

MEDO

MEDO 30 AMBIENT CW, DALI ... 136, 260
MEDO 30 AMBIENT CW, PHASE ... 134, 258
MEDO 30 CL, 1-10V ... 130, 254
MEDO 30 CL, PHASE ... 133, 257
MEDO 30 EL, Mounting frame ... 416
MEDO 30 EL, Frameless ... 414
MEDO 40 AMBIENT CW, DALI ... 136, 260
MEDO 40 AMBIENT CW, PHASE ... 134, 258
MEDO 40 CL, 1-10V ... 131, 255
MEDO 40 CL, PHASE ... 133, 257
MEDO 40 EL, Mounting frame ... 416
MEDO 40 EL, Frameless ... 415
MEDO 60 AMBIENT CW, DALI ... 136, 260
MEDO 60 AMBIENT CW, PHASE ... 134, 258
MEDO 60 CL, 1-10V ... 131, 255
MEDO 60 CL, square, 1-10V ... 132, 256
MEDO 60 CL, square, DALI ... 138, 261
MEDO 60 EL, Mounting frame ... 416
MEDO 60 EL, Frameless ... 415
MEDO 90 AMBIENT CL, DALI ... 137, 261
MEDO 90 AMBIENT CL, PHASE ... 135, 259
MEDO 90 CL, 1-10V ... 131, 255
MEDO 90 EL, Mounting frame ... 417
MEDO 90 EL, Frameless ... 415
MEDO RING 60 PD, 1-10V ... 128
MEDO RING 60 PD, DALI ... 129
MEDO RING 90 PD, 1-10V ... 128

MELAN CW, E27 ... 332
MERADO FLOOD WL, PHASE ... 231
MERIDIAN BOX SENSOR WL, E27 ... 630
MERIDIAN BOX WL, E27 ... 630
MIBO UP/DOWN WL, QT14 ... 237
MILANDOS 4 DL ... 349
MILANDOS 6 DL ... 349
MILANDOS 8 DL ... 349
MOBALA EL ... 413
MOLAT CL, E27 ... 677
MOLAT PD, E27 ... 552
MOLAT Pole, E27 ... 552
MOLAT WL, E27 ... 657
MYRA CW, single, QPAR51 ... 666
MYRA DISPLAY WL, curved, QPAR51 ... 665
MYRA SPOT Double, GU10 ... 583
MYRA UP/DOWN WL, QPAR51 ... 644
MYRA WL, double, QPAR51 ... 686

N

NAGY 75 CL, QPAR51 ... 287
NAUTILUS 10 SP, square ... 597
NAUTILUS 10 SP, round, QPAR51 ... 593, 594
NAUTILUS 10 SPOT LED SP ... 595
NAUTILUS 10 SPOT SP, QPAR51 ... 595
NAUTILUS SP, QR-C51 ... 595
NAUTILUS WL QPAR51 ... 666
NEPRO DISPLAY QT-DE12 ... 245
NEW FLAT WL, RGB-W ... 209

NEW TRIA

NEW TRIA 45 DL, round ... 356
NEW TRIA 45 Single, square, CS ... 356
NEW TRIA 68 DL, square ... 357, 359
NEW TRIA 68 DL, square, PHASE ... 359, 361
NEW TRIA 68 DL, square, QPAR51 ... 350
NEW TRIA 68 DL, round ... 357, 358
NEW TRIA 68 DL, round, PHASE ... 360, 361
NEW TRIA 68 DL, round, QPAR51 ... 350
NEW TRIA 77 DL, square ... 362, 363
NEW TRIA 77 DL, round ... 362
NEW TRIA 78 DL, square, QPAR51 .. 352, 353
NEW TRIA 78 DL, round, QPAR51 ... 352
NEW TRIA 78 XL DL, square, QPAR51 ... 351
NEW TRIA 78 XL DL, round, QPAR51 ... 351
NEW TRIA 110 DL, square, PHASE .. 366, 367
NEW TRIA 110 DL, round, PHASE ... 366
NEW TRIA 150 DL, square, 1-10V ... 369
NEW TRIA 150 DL, square, QPAR111 ... 355
NEW TRIA 150 DL, round, 1-10V ... 368
NEW TRIA 150 DL, round, QPAR111 ... 355
NEW TRIA 155 DL, double ... 364, 365
NEW TRIA 155 DL, double, QPAR51 ... 354
NEW TRIA 300 DL, double, QPAR111 ... 355

NOBLO CW, double, PHASE 300
NOBLO CW, PHASE 300
NOBLO CW, single, PHASE 300
NOBLO CW, triple, PHASE 300
NOBLO SPOT 1Ph. 483
NOBLO SPOT 1Ph., Triple Track Set 470
NOBLO SPOT 3-circuit 458
NOBLO SPOT LV, Rope Track 506
NOTAPO L RL 410
NOTAPO S RL 410
NOYA PD, PHASE 142

NUMINOS®
NUMINOS® accessories 58-61
NUMINOS® 3Ph. 62-71
NUMINOS® CL 74-87
NUMINOS® CW 72-73
NUMINOS® DL 28-61
NUMINOS® PD 88-95

O

OCCULDAS 13 DL, indirect, PHASE 273
OCCULDAS 14 EL, indirect, PHASE 397
OCCULDAS 23 DL, indirect, PHASE 273
OCCULDAS 23 EL, indirect, PHASE 397
OCULUS CL, Move, PHASE 396
OCULUS CL, PHASE 280
OCULUS CW, PHASE 296
OCULUS PD, single, PHASE 147
OCULUS UP/DOWN WL, PHASE 188
ONE 40 CW, DALI 294
ONE 40 TRACK 3Ph., DALI 443
ONE 60 PD, DALI 120
ONE 60 PD, DALI, up/down 121
ONE 60 PD, PHASE, up/down 121
ONE 60 WL, DALI 294
ONE 80 PD, DALI 120
ONE 80 PD, DALI, up/down 122
ONE DOUBLE PD, DALI, up/down 123
ONE DOUBLE PD, PHASE, up/down 123
ONE LINEAR 100 PD, PHASE, up/down 118
ONE LINEAR 140 PD, PHASE, up/down 118
ONE TRIPLE PD, DALI 119
ORBIT LV, QR111 504
ORDI SENSOR WL 651
ORDI WL 651
OSSA 180 WL, QT-DE12 202
OSSA 300 WL, QT-DE12 202
OTOS GLAS Pole, E27 550
OUT 65 EL, round, PHASE 423, 708
OUT-BEAM FRAME SP 686
OVALISK 75 Pole 542
OVALISK 100 Pole 542
OVALISK CL 676
OVALISK SENSOR WL 637
OVALISK WL 637

P

P-LIGHT CW 340, 341
P-LIGHT EL 420
PANEL 60 CL, round, DALI 263
PANEL 60 CL, round, PHASE 262
PANEL 60 PD, round, DALI 141
PANEL CL, 1200x300mm, DALI 263
PANEL CL, 1200x300mm, PHASE 262
PANEL TRACK 1Ph., square 471
PANEL TRACK 1Ph., round 471
PANTILO 20 PD, E27 162
PANTILO 28 PD, E27 162
PANTILO CONVEX 29 163
PANTILO CONVEX 40 PD, E27 163
PARA 380 PD, E27 179
PARA CONE 14 1Ph., PD, QPAR51 474
PARA CONE 14 1Ph., QPAR51 474
PARA CONE 14 3Ph., PD, QPAR51 445
PARA CONE 14 3Ph., QPAR111 445
PARA CONE 30 PD, E27 167
PARA CONE GL 1Ph., GU10 472
PARA CONE GL 3Ph., GU10 444
PARA CONE GL PD, GU10 ..... 166, 444, 472
PARA DOME PD, E27 176
PARA DOME ..... Shade 176
PARA FLAC PD/CL 179
PARA FLAC PD/CL, DALI 179
PATTA-F EL, square, PHASE 422, 708
PATTA-F EL, round, PHASE 422, 708
PATTA-I DL, square, PHASE 420, 706
PATTA-I EL, square, PHASE 421, 707
PATTA-I EL, round, PHASE 420, 421, 706, 707
PEMA® WL 638, 639
PEMA® WL, E27 639
PHELIA 25 PD, E27 169
PHELIA 30 PD, E27 169
PHELIA FL, E27 110
PHELIA TL, QPAR51 110
PHELIA WL, QPAR51 230
PHOTONIA CL, E27 677
PHOTONIA PD, E27 548
PHOTONIA Pole, E27 549
PHOTONIA TL, E27 548
PHOTONIA WL, E27 657
PIKA DL, round, QPAR51, pivoting 395
PIKA DL, round, QPAR51, rigid 395

PLASTRA
PLASTRA 101 WL, E14 194
PLASTRA 104 CL, E27 283
PLASTRA 104 WL, QT14 194
PLASTRA 105 CL, E27 282
PLASTRA 25 PD, round, TCR-TSE 175
PLASTRA CL, PHASE 282
PLASTRA CL, QPAR51 282
PLASTRA CW, round 193
PLASTRA RL, square, QPAR51 403
PLASTRA RL, round, QPAR51 402
PLASTRA WL, Cube, QT14 190
PLASTRA WL, Cubes 190
PLASTRA WL, Curve, QT-DE12 194
PLASTRA WL, E14 191
PLASTRA WL, square 223
PLASTRA WL, semi-circle 193
PLASTRA WL, QPAR51 193
PLASTRA WL, square, QT-DE12 191

PLYTTA 505
POWER TRAIL-LITE® EL, round/square 724
PURI CW, double, QPAR51 312
PURI CW, quad, QPAR51 312
PURI CW, single, QPAR51 312
PURI CW, triple, QPAR51 312
PURI TRACK 1Ph., QPAR51 478
PURI TRACK 1Ph., Triple Track Set 470
PURI TRACK 3Ph., QPAR51 453
PURIA TRACK 1Ph., QPAR51 478
PURISA WL, E27 211

Q

Q-LINE® CL, 1m, BAP, PHASE 264
Q-LINE® CL, 2m, BAP, PHASE 265
Q-LINE® PD, 1m, BAP, PHASE 144, 145
Q-LINE® PD, 2m, BAP, PHASE 144, 145
Q-LINE® PD, DALI, single 145
Q-LINE® WL 243
QUAD FRAME 14 WL 198
QUAD FRAME 19 WL 198
QUAD FRAME 9 WL 410
QUAD POLE 578
QUAD UP/DOWN 12 WL 634
QUAD UP/DOWN 15 WL 634
QUAD WL 633
QUADRASS PD, E27 165
QUADRASS SPOT WL, E27 212
QUADRASS WL, E27 212
QUADRASYL 75 Pole, TCR-TSE 577
QUADRASYL WL, TCR-TSE 662
QUADRULO CL 675
QUADRULO FL 522
QUADRULO SENSOR WL, E27 629
QUADRULO WL 629
QUADRULO WL, E27 629

R

RASCALI 45 Pole 579
RASCALI 65 Pole 579
RASCALI WL 661
RETRATO WL, PHASE 244
ROCCI 200 EL, round/square 730
ROCCI EL, square 730
ROCCI EL, round 730
ROTOBALL 25 CL, E27 289
ROTOBALL 25 FL, E27 546
ROTOBALL 25 PD, E27 174
ROTOBALL 40 CL, E27 289
ROTOBALL 40 FL, E27 546
ROTOBALL 40 PD, E27 174
ROTOBALL 50 FL, E27 546
ROTOBALL 50 PD, E27 174
ROX ACRYL 30 561
ROX ACRYL 60 561
ROX ACRYL 90 561
ROX CL, GX53 679
ROX CL, QPAR111 679
ROX UP/DOWN WL, QPAR111 645
ROX WL, QPAR111 645
RUBA 27/42 CW 690
RUSTY® UP/DOWN WL, square 636
RUSTY® UP/DOWN WL, round 636
RUSTY® 40 Pole 528, 532
RUSTY® 40 Pole, E27 ..... 529, 533
RUSTY® 70 Pole 528, 532
RUSTY® 70 Pole, E27 ..... 529, 533
RUSTY® CONE 24 FL, E14 530
RUSTY® CONE 40 Pole, E27 530
RUSTY® CONE 70 Pole, E27 530
RUSTY® PATHLIGHT 40 Pole 527
RUSTY® PATHLIGHT 70 Pole 527
RUSTY® PATHLIGHT Pole, TCR-TSE 527
RUSTY® SLOT 50 Pole 524
RUSTY® SLOT 50 Pole, E27 524
RUSTY® SLOT 80 Pole 524
RUSTY® SLOT 80 Pole, E27 525

S

SAIL WL 655
SALUNA LV, QR-C51 503
SAMRINA SP, single, GU10 592
SEDO 7 WL 207
SEDO 14 WL 207
SEDO 21 WL 207
SENSER 12 CW, square, PHASE 319
SENSER 12 CW, round, PHASE 320
SENSER 12 EL, round 389, 390
SENSER 18 CW, square, PHASE 319
SENSER 18 CW, round, PHASE 320
SENSER 18 EL, round 389, 390
SENSER 24 CW, square, PHASE 319
SENSER 24 CW, round, PHASE 320
SENSER 24 EL, round 389, 390
SHELL 15 WL, PHASE 199
SHELL 30 WL, PHASE 199
SIGHT 60 CW 337
SIGHT 115 CW 337
SIGHT MOVE 3Ph., DALI 441
SIGHT MOVE 3Ph. 448
SIGHT TRACK 3Ph. 450
SIGHT TRACK 3Ph., DALI 440
SIMA CW, square, PHASE 323
SIMA CW, square, Sensor 323
SIMA CW, round, PHASE 322
SIMA CW, round, Sensor 322
SITRA 360 CW, TCR-TSE 684
SITRA 360 Pole, TCR-TSE 583
SITRA 360 SPIKE SP, double, TCR-TSE 603
SITRA 360 SPIKE SP, single, TCR-TSE 602

SITRA CL, TCR-TSE ... 679
SITRA CUBE WL ... 622
SITRA CUBE WL, TCR-TSE ... 622
SITRA S WL, single, square ... 624
SITRA M WL, up/down, square ... 624
SITRA L WL, up/down, square ... 624
SITRA UP/DOWN WL ... 644
SITRA UP/DOWN WL, TCR-TSE ... 644
SITRA WL, TCR-TSE ... 661
SLOTBOX 40 Pole ... 574
SLOTBOX 70 Pole ... 574
SLOTS 45 Pole ... 570
SLOTS 65 Pole ... 571
SLOTS WL ... 647
SMALL PLOT cover, double ... 727
SMALL PLOT cover, quadruple ... 727
SMALL PLOT module ... 727
SOLASTO EL, round ... 731
SOLID CUBE WL, QT14 ... 216
SOMNILA FLEX WL, left ... 227
SOMNILA FLEX WL, right ... 227
SOMNILA SPOT WL, left ... 226
SOMNILA SPOT WL, right ... 226
SOPRANA CL, E27 ... 278
SPOT 79 CW, QPAR51 ... 308
SPOT DISPLAY E27 ... 245
SQUARE POLE 30 Pole, E27 ... 568
SQUARE POLE 60 Pole, E27 ... 568
SQUARE POLE 90 Pole, E27 ... 568
SQUARE TURN WL, G9 ... 662
SQUARE WL, E27 ... 660
STRUCTEC ZOOM 3 Ph, ... 457
SUN / BIG SUN PD, E27 ... 173
SUPROS 78 CL, PHASE ... 271
SUPROS 78 EL, Move, PHASE ... 383
SUPROS 78 EL, PHASE ... 382
SUPROS 78 PD ... 148
SUPROS 78 UP/DOWN WL, PHASE ... 189
SUPROS CL, Move ... 270
SUPROS DL ... 384, 385
SUPROS DL, Move ... 386, 387
SUPROS PD ... 148, 149
SYNA SP ... 601
SYROS LV, QR-C51 ... 503

T

TEC KALU TRACK 3Ph., double, PHASE ... 459
TELESKOP LV, QR-C51 ... 502
TENORA CL, E27 ... 278

TENSEO Low-voltage cable
TENSEO Low-voltage cable ... 500
TENSEO Low-voltage cable accessories ... 501

TERANG 200 CW ... 692
THEO BRACKET 50 Pole ... 541
THEO BRACKET 70 Pole ... 541
THEO BRACKET CW ... 684
THEO BRACKET SP ... 601
THEO PATHLIGHT Pole, double ... 540
THEO PATHLIGHT Pole, single ... 540
THEO UP/DOWN WL, QPAR51 ... 216, 618
THEO WL, QPAR51 ... 620
TODAY PRO Display ... 665
TONGA® 1Ph., PD, E14 ... 475
TONGA® EASYTEC® II, PD, E14 ... 494
TONGA® PD, E14 ... 165
TONILA TL ... 112
TOTHEE CW, PHASE ... 298
TRAIL-LITE® 60 EL ... 724
TRIADEM PD, E27 ... 156
TRILEDO CL, double, square ... 269
TRILEDO CL, double, square, QPAR51 ... 266
TRILEDO CL, single, square ... 269
TRILEDO CL, single, square, QPAR51 ... 266
TRILEDO CL, single, round ... 269
TRILEDO CL, single, round, QPAR51 ... 266
TRUKKO 60 WL ... 234
TRUKKO 90 WL ... 234
TRUKKO WL, rectangular ... 233
TRUKKO WL, round ... 233
TRUST 30 Pole ... 559
TRUST 60 Pole ... 559

V


VAP 40 ... 562
VAP 70 ... 562
VAP 100 ... 562
VAP SLIM 30 Pole, E27 ... 565
VAP SLIM 60 Pole, E27 ... 565
VAP SLIM 90 Pole, E27 ... 565
VARU EL, QPAR51 ... 404, 711
VERLUX EL, square, PHASE ... 393
VILUA S WL ... 643
VILUA L WL ... 643
VILUA UP/DOWN, WL ... 643

W

WALLYX WL, QPAR51 ... 647
WL 106 E14 ... 237
WL 149 WL, PHASE ... 205
WL 149 WL, QT-DE12 ... 205
WORKLIGHT FL ... 101
WORKLIGHT PD, DALI ... 146
WORKLIGHT TL ... 100
WORO EL ... 413

REFERENCE PROJECTS WITH **SLV LIGHTING SOLUTIONS**

Get to know many other possible applications of SLV products within real projects. GOOD LIGHT References provides you with an overview of diverse lighting concepts by and for our customers.

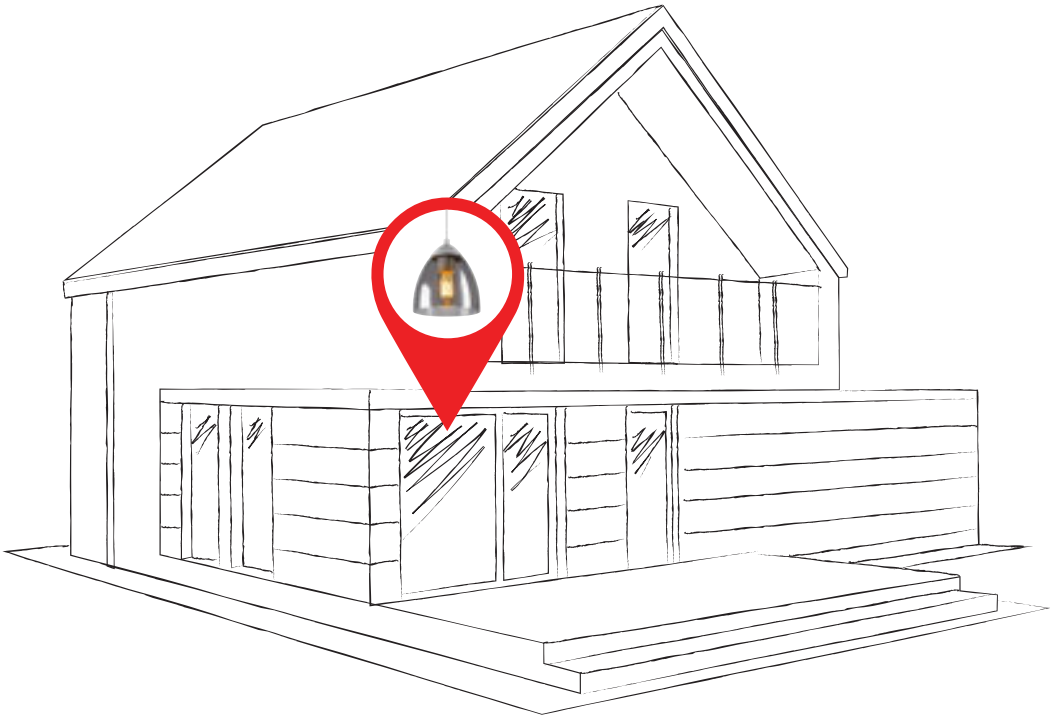





From single-family homes with gardens to DALI-controllable shop lighting and right through to large projects such as hotel and office complexes: with SLV you have a strong partner for all areas of application at your side.
See for yourself and be inspired by our completed projects.

SCAN THE QR CODE NOW >>>

You can find more inspiration and references at
www.slv.com










„Raum und Licht und Ordnung.
Das sind die Dinge, die man genauso braucht
wie Brot oder einen Platz zum Schlafen.“

Le Corbusier






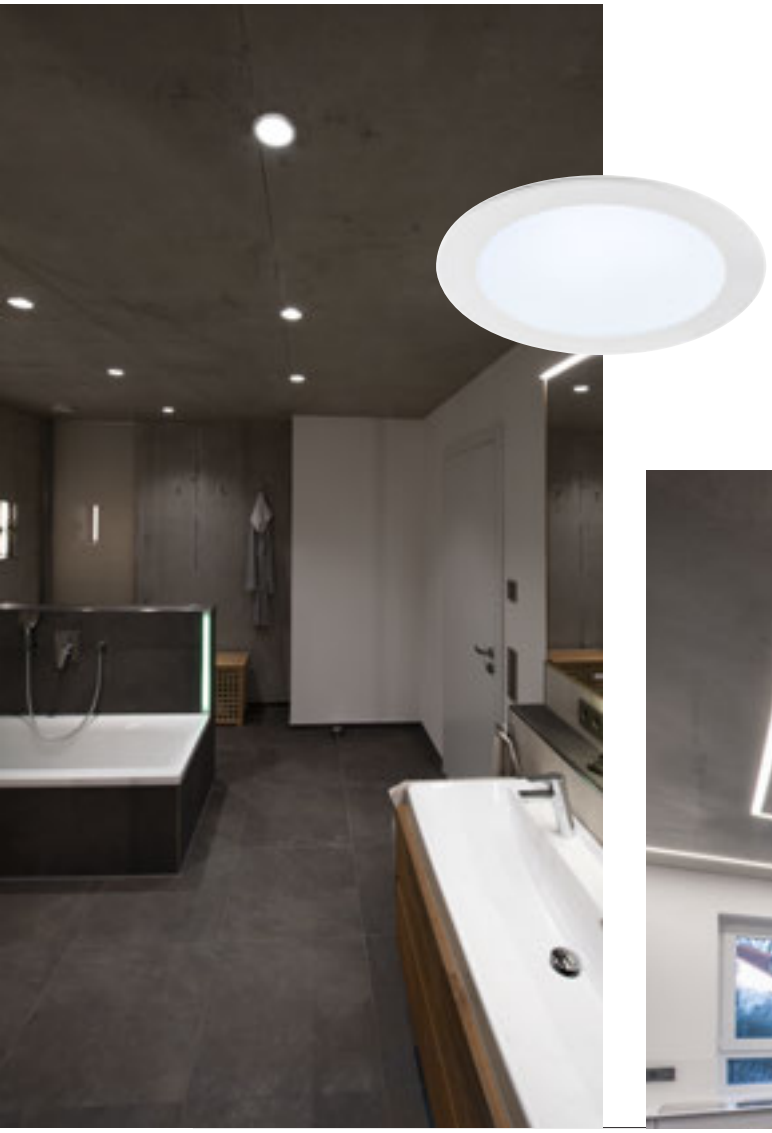

„Design is the appropriate combination of materials in order to solve a problem.“


Charles Eames, Designer



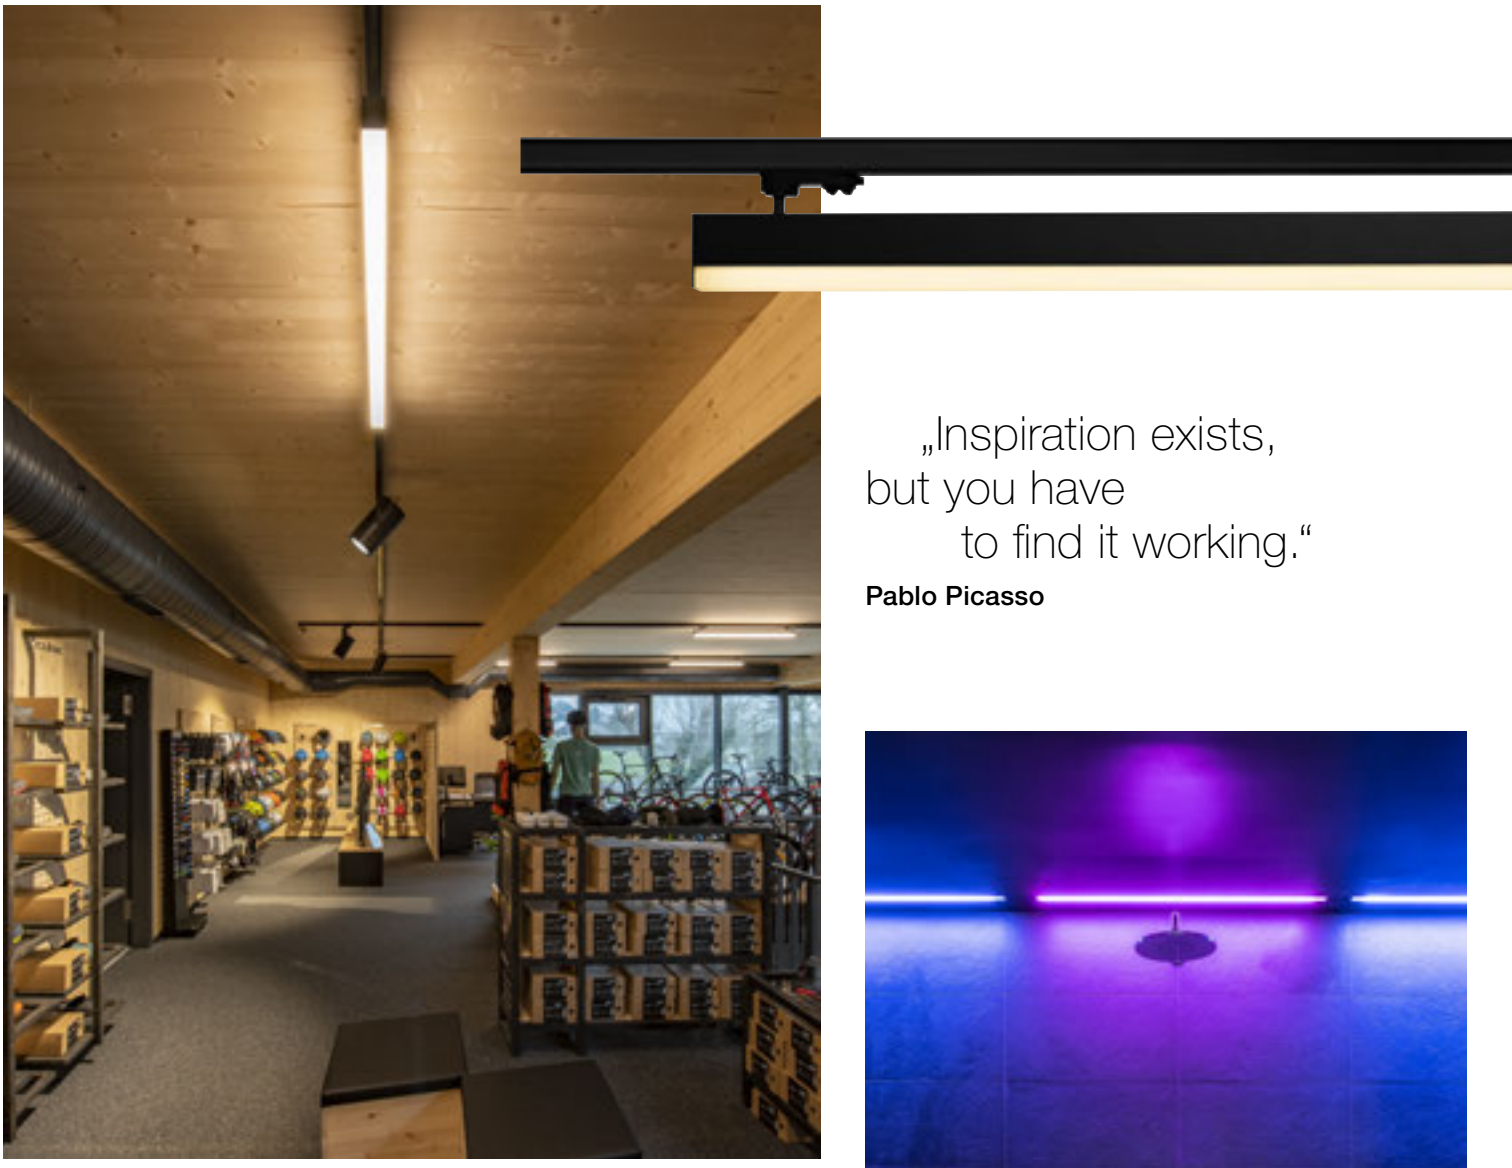


„Inspiration exists,
but you have
to find it working.“

Pablo Picasso

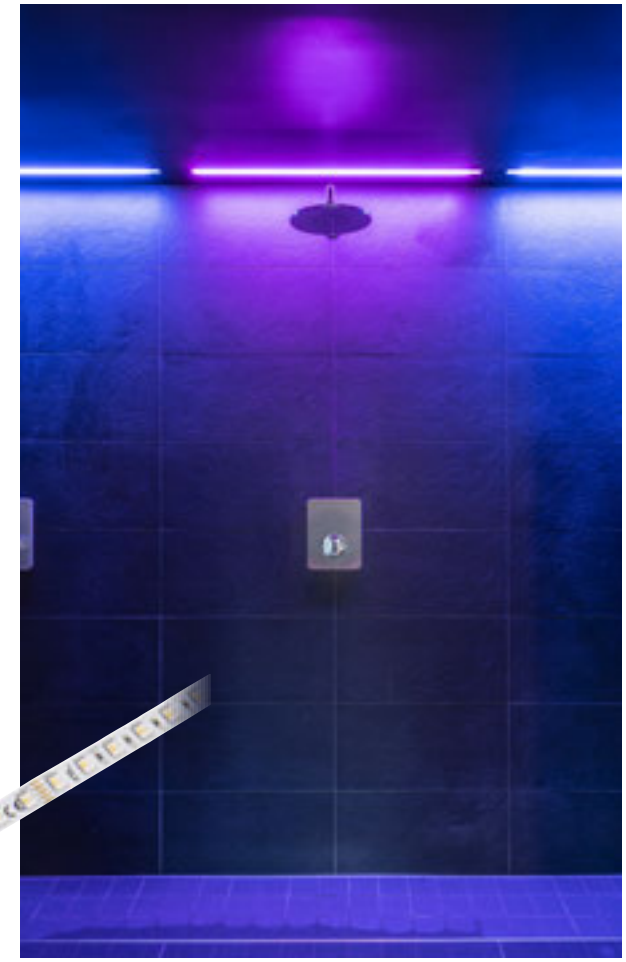

„Licht schafft Atmosphäre und
das Gefühl des Raums
sowie den Ausdruck einer Struktur.“

Le Corbusier

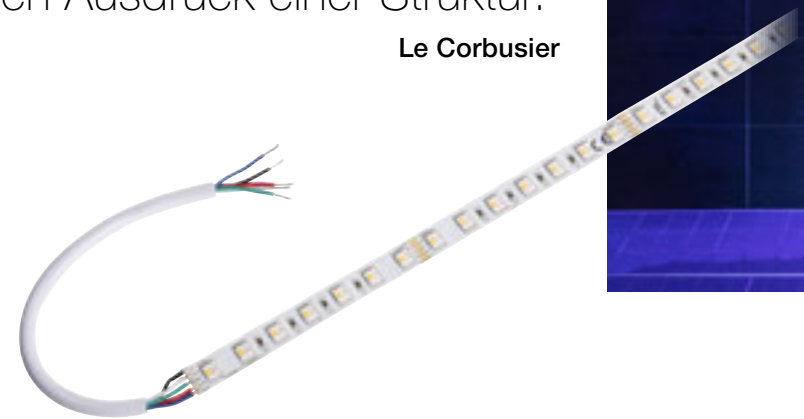












„The details are
not the details.
They make the design.“

Charles Eames, Designer

Have you completed your own successful projects using SLV lights? We would love to hear about it! Feel free to send us some photos and detailed background information at: **references@slv.de**



SLV WORLDWIDE.

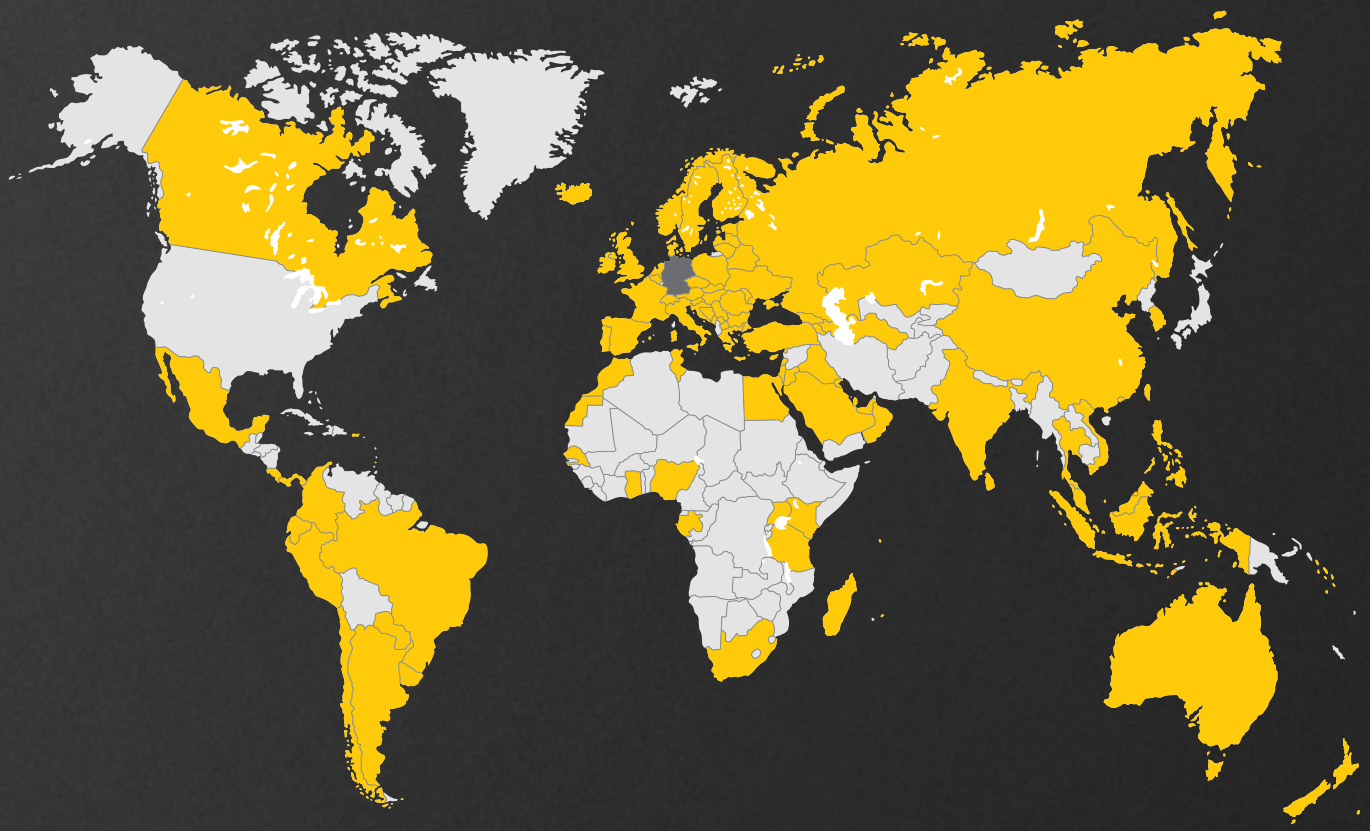

MORE THAN 100 COUNTRIES – ONE SHARED LANGUAGE: EXPERIENCE LIGHT.

Our SLV lights illuminate **the dark, all over the** world.
Our lights are already in use in more than 100 countries.

And the journey continues: together with you, we want to inspire people **all over the world** to experience light in the best way possible.

SYMBOLS KEY

PRODUCT CHARACTERISTICS

Energy efficiency class
"This light is suitable for bulbs with an energy class rating of..."

Lights with integrated LEDs
"This light contains integrated LED light bulbs. The bulbs in the light cannot be replaced." (cf. EU Regulation 874/2012)

"This light contains integrated LED light bulbs. The bulbs in the light cannot be replaced."
(cf. EU Regulation 874/2012)
Note for the end user:
The light source in this light may only be replaced by the manufacturer, or by a service technician assigned by the manufacturer.

Dimmable with...
· C = leading-edge **phase** dimmer
· L = trailing-edge **phase** dimmer
· Uni = universal dimmer
· 1–10 V
· Dali = Dali busbar system
· Switch = switch/button or touch control on the light

Dim to warm
With dimmers, the light colour can be altered from cold white to warm white.

Rotating and pivoting capacity in degrees:
· Rotation range
· Pivot range
· Gimballed

Beam angle
Describes the beam angle in degrees. The smaller the angle, the more concentrated the light will be.

Pendant cable length in cm

Power cable length in cm
Feed-in length in cm (with open cable ends)

Average lifespan of a lightbulb or light source in hours

Lumen maintenance
Describes the amount by which the luminous flux of an LED decreases during a specified period.

Indicates products that can be operated via **remote control**

UGR = Unified Glare Rating
The lower the UGR value, the lower the psychological glare.

SAFETY DETAILS

Protection categories
· Protection category I/protective conductor
· Protection class II/protection through double or strengthened insulation
· Protection category III/protection through low voltage

The **IK degree of shock resistance** is a measure of the resistance of the housing of electrical equipment to mechanical stress, especially impact stress..

SPECIFIC DETAILS - RECESSED LIGHTS

Shape of the installation opening

Installation depth specification

Product suitability for being driven over stated

Weight-bearin capacity of the product up to specified value in tonnes. Measurements based on concrete installation.

APPLICATION AREA · ASSEMBLY

IP protection class
Indicates the suitability of electrical equipment for different environmental conditions.

Allows the installation of electrical control equipment on materials whose **flammability** is not known.

Through-wiring possible.

Independent converter
(control equipment also for use outside of lights)

Short circuit protected **safety control equipment**

· For indoor use **only**
· **Not suitable** for use **indoors**

SPECIAL SYMBOLS

Indicates **products** that have been added to the catalogue for the first time

Indicates **new versions** of existing products
· New product variant
· Successor

Items with this symbol are **discontinued models**

Indicates products
· with **integrated** LEDs
· with **lamp socket**

Connected lighting
Indicates smart products that use the following protocols:
· Zigbee® · DALI · Bluetooth

Indicates **lights with a movement sensor** (microwave technology (MR)/infrared/radio)

Using the integrated **CCT switch**, the light colour can be switched between 3000K and 4000K during installation.

Indicates **lights with RGB+W** and **RGB** (Red-Green-Blue + White and Red-Green-Blue)

· **USB charging function**
· **Inductive (wireless) charging function** for Smartphones

Indicates products that **can be combined**

Indicates lights that, after priming **can be individually covered with wall paint or wallpaper**.

Indicates lights from a single **lighting family**

Award-winning lights
· Red Dot Design Award
· German Design Award

CUSTOMER INFORMATION

Information regarding light housing heat generation
Halogen lamps operate at high temperatures and can lead to the heating of the housing of the light fixture. They should therefore only be touched once the housing has cooled down. Adjustable lights and light heads that do not feature insulated positioning levers, or which exceed the maximum permissible housing temperature at the positioning point when operated at maximum wattage, should also be mounted out of reach. LED retrofit lamps offer a low-temperature alternative to most of our halogen lights.

Luminous flux
The total amount of light produced by a light source is given in lumens (lm).

Luminosity
The luminosity is the luminous flux indicated per solid angle and is expressed in candelas (cd).

Colour rendering index
The colour rendering property of a light source is indicated by the Colour Rendering Index (CRI). A CRI of 80 or higher is required for light sources used indoors. Light sources used outdoors must have a CRI of at least 65.

Colour temperature
The colour temperature of a light source is indicated in K (Kelvin).

Standard LED
This is the classic version of the LED (3 mm or 5 mm LED). These were originally developed for indication purposes, e.g. in instrument panels.

Standard SMD LED
SMD means "Surface Mounted Device". This is a compact LED that is soldered directly onto the circuit board without wire connections. SMDs are available in different sizes and are suitable for lighting purposes.

PowerLED
PowerLED is a high-performance LED with a power of 1W or more. It places increased demands on current constancy and should therefore always be operated with constant current sources. If you with to connect several LEDs, they must therefore be connected in series. A parallel connection is not permitted. Please ensure that you observe the installation sequence so that the LEDs are not exposed to high current for a short time, which could damage them. Ultimately, the following rule applies: first you should completely connect the secondary circuit (LEDs to driver), then you should close the primary circuit (driver to power source).

Chip On Board LED (COB LED); Large surface LED
This is an LED with an exceptionally flat shape. The advantage of COB LEDs is good heat dissipation when technically implemented with cooling surfaces, which enables high light output and a long lifespan.

Stainless Steel 304
(1.4301) Good resistance to corrosion is shown in natural environmental media (water, urban and rural atmosphere) in the absence of significant chlorine and salt concentrations. 1.4301 is, however, not suitable for use in areas where there is contact with seawater, salt water or a salty atmosphere, or for use in swimming pools or similar contexts.

Stainless Steel 316
(1.4404) In natural environmental media (water, urban and rural atmosphere) as well as in industrial areas with moderate chlorine and salt concentration, in the food and pharmaceutical industry and in the agricultural food sector, 1.4404 shows excellent resistance to corrosion. 1.4404 is not resistant to seawater.

Please note:
A large part of the products shown in this catalogue are protected by trademarks, registered designs, utility models or patents. Any violation of these property rights or the use of text and layout design or copyrighted images without our authorisation will be prosecuted. The illustrations and information contained in this catalogue are for illustrative purposes only and are not legally binding in terms of colour, shape, design or technical details. All product descriptions and specifications are subject to alteration and errors.
All of the products in our range are subject to our strict quality assurance procedures and comply with generally applicable standards. This catalogue contains a general range and is not country specific. Any deviations from country-specific guidelines must be clarified before ordering. SLV cannot be held responsible for any deviations in terms of technical standards.
All weights and dimensions are given in kg and cm respectively unless stated otherwise. We reserve the right to make technical alterations!

The presentation of our lights with realistic photos showing examples of use is possible thanks to the kind cooperation and agreement of the owners or designers of the environments depicted in the images. We would like to take this opportunity to thank all those who contributed to the creation and use of our photos by giving their consent!

With the appearance of this catalogue, the prices stated in previous lists and catalogues are rendered invalid. SLV has the right to adapt the relevant price list in line with changes in market conditions, in the event of substantial changes in procurement costs or similar circumstances.

All prices are recommended retail prices (RRP) and indicated in Euro without VAT.

Publisher
SLV GmbH, Germany
Daimlerstrasse 21-23
52531 Uebach-Palenberg
T +49 2451 4833-355
slv.com

Copyright
© SLV GmbH, 2021

Image credits
SLV GmbH
External photographers: Andreas Fein, Anja Lynen, Gerd Arnolds, Günther Preissler, Marc Derkum, Dirk Hoffmann

SLV

EXPERIENCE LIGHT

SLV GmbH
Daimlerstrasse 21-23
52531 Uebach-Palenberg
Germany

T +49 2451 4833 - 355
F +49 2451 4833 - 179

export@slv.de
slv.com

FSC
www.fsc.org
MIX
Paper from responsible sources
FSC® C011124

minus 52% CO_2

Innovative use of combined heat and power technology when printing this product reduced CO_2 emissions by up to 52% in comparison to conventional methods in Germany.

1006208